



Oracle AI Database@AWS

Technical Deep Dive

June 2026

Safe harbor statement

The following is intended to outline our general product direction. It is intended for information purposes only, and may not be incorporated into any contract. It is not a commitment to deliver any material, code, or functionality, and should not be relied upon in making purchasing decisions. The development, release, timing, and pricing of any features or functionality described for Oracle's products may change and remains at the sole discretion of Oracle Corporation.



Agenda

- Oracle AI Database@AWS Overview
- Roadmap
- Architecture
- OD@AWS Integrations
- Oracle Database Cloud Services
- Exadata Database Service
- Autonomous AI Database
- Autonomous Recovery Service
- Service Responsibility
- Licensing and Pricing
- Networking
- Maximum Availability Architecture
- Migration
- Identity
- Security
- Resource Modeling
- Monitoring
- Procurement
- Billing
- Support
- Provisioning
- Docs



Oracle AI Database@AWS Overview

Oracle and Amazon Web Services Announce Strategic Partnership

Simplify migration and deployment of enterprise workloads to the cloud while improving agility, flexibility, and security

Austin, Texas and Seattle, WA – September 9, 2024


Oracle and Amazon Web Services, Inc. (AWS) today announced the launch of **Oracle AI Database@AWS**, a new offering that allows customers to access **Oracle Autonomous** Database on dedicated infrastructure and **Oracle Exadata Database** Service within AWS. Oracle AI Database@AWS will provide customers with a **unified experience** between Oracle Cloud Infrastructure (OCI) and AWS, offering simplified database administration, billing, and unified customer support. In addition, customers will have the ability to seamlessly connect enterprise data in their Oracle Database to applications running on Amazon Elastic Compute Cloud (Amazon EC2), AWS Analytics services, or AWS's advanced artificial intelligence (AI) and machine learning (ML) services, including Amazon Bedrock.



<https://www.oracle.com/news/announcement/ocw24-oracle-and-amazon-web-services-announce-strategic-partnership-2024-09-09/>

Roadmap

Oracle AI Database@AWS

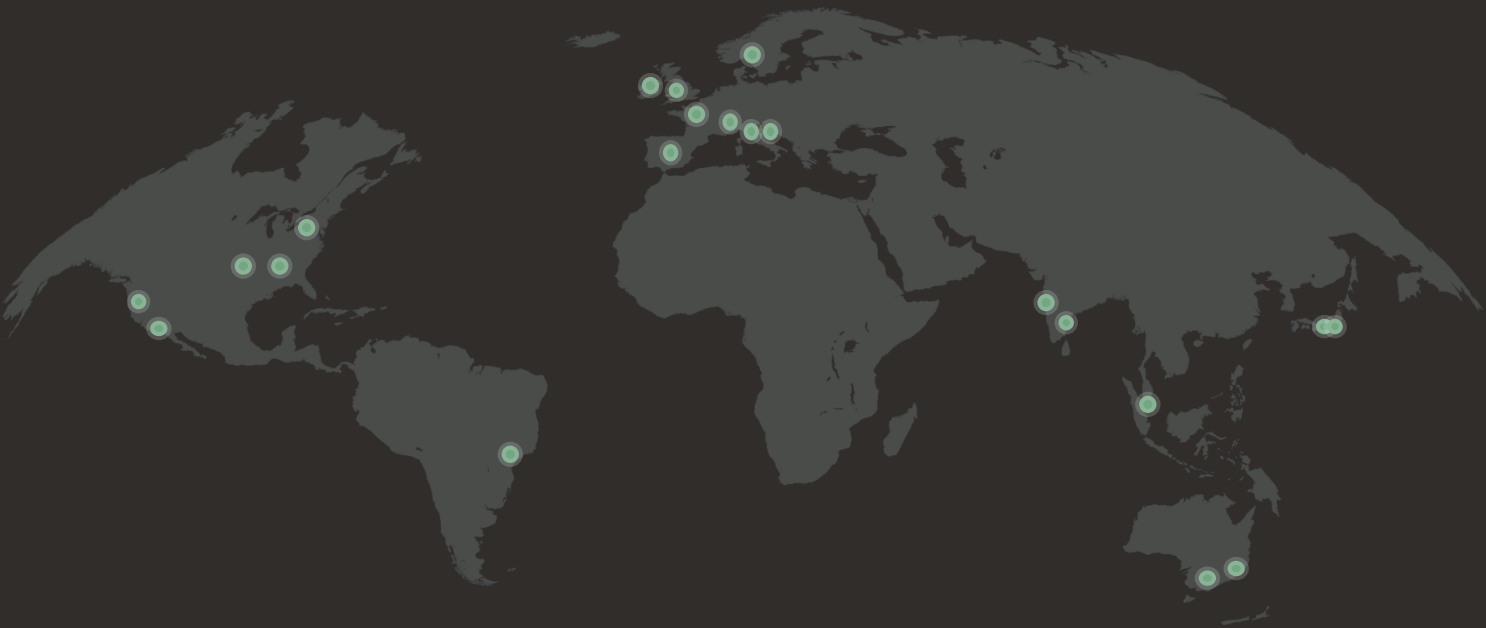



22

22 live
(2 AZs per region)

Available

Canada Central	Hyderabad	Frankfurt
N. California	Mumbai	Ireland
N. Virginia	Melbourne	London
Oregon	Osaka	Milan
Ohio	Seoul	Paris
Sao Paolo	Singapore	Spain
	Sydney	Stockholm
	Tokyo	Zurich



Functionality available

Services

- Oracle Exadata Database Service on Dedicated Infrastructure (26ai, 19c)
- Oracle Autonomous AI Database:
 - Serverless (26ai, 19c)
 - On Dedicated Exadata Infrastructure (26ai, 19c)
- Managed backup to Amazon S3, OCI Object Storage, Autonomous Recovery Service
- Exadata X11M

UX (including onboarding)

- AWS Management Console, CLI/SDK/API, AWS CloudFormation, Terraform
- Oracle Cloud Console, CLI/SDK/API, Terraform

Oracle Capabilities

- Zero Downtime Migration (ZDM)
- OCI Vault, Oracle Key Vault, AWS KMS
- Oracle Data Safe
- Oracle Enterprise Manager
- Oracle Apps, including EBS, JDE, Retail, PeopleSoft, Enterprise Performance Management, Primavera P6, Siebel

AWS Capabilities

- Multiple Amazon VPCs
- AWS Transit Gateway, AWS Cloud WAN
- AWS Key Management Service (KMS)
- Amazon CloudWatch, AWS EventBridge
- Amazon VPC Lattice
- AWS CloudTrail
- Resource Sharing across AWS accounts (same organization)
- High network performance

Commercial

- Private offer (with subscription sharing) shared across multiple AWS accounts
- Public offer
- Reinstate suspended
- End-of-term replenish
- Product-level usage reporting in AWS Cost Explorer, detailed billing in OCI
- Partner resell (AWS CPPO) model
- Cloud Service Provider (CSP) model


Compliance

SOC1, SOC2, HIPAA, C5, CSA STAR Attest, CSA STAR Cert, ISO/IEC (9001, 20000-1, 27001, 27017, 27018, 27701), PCI DSS, HITRUST




Architecture

High Level Architecture

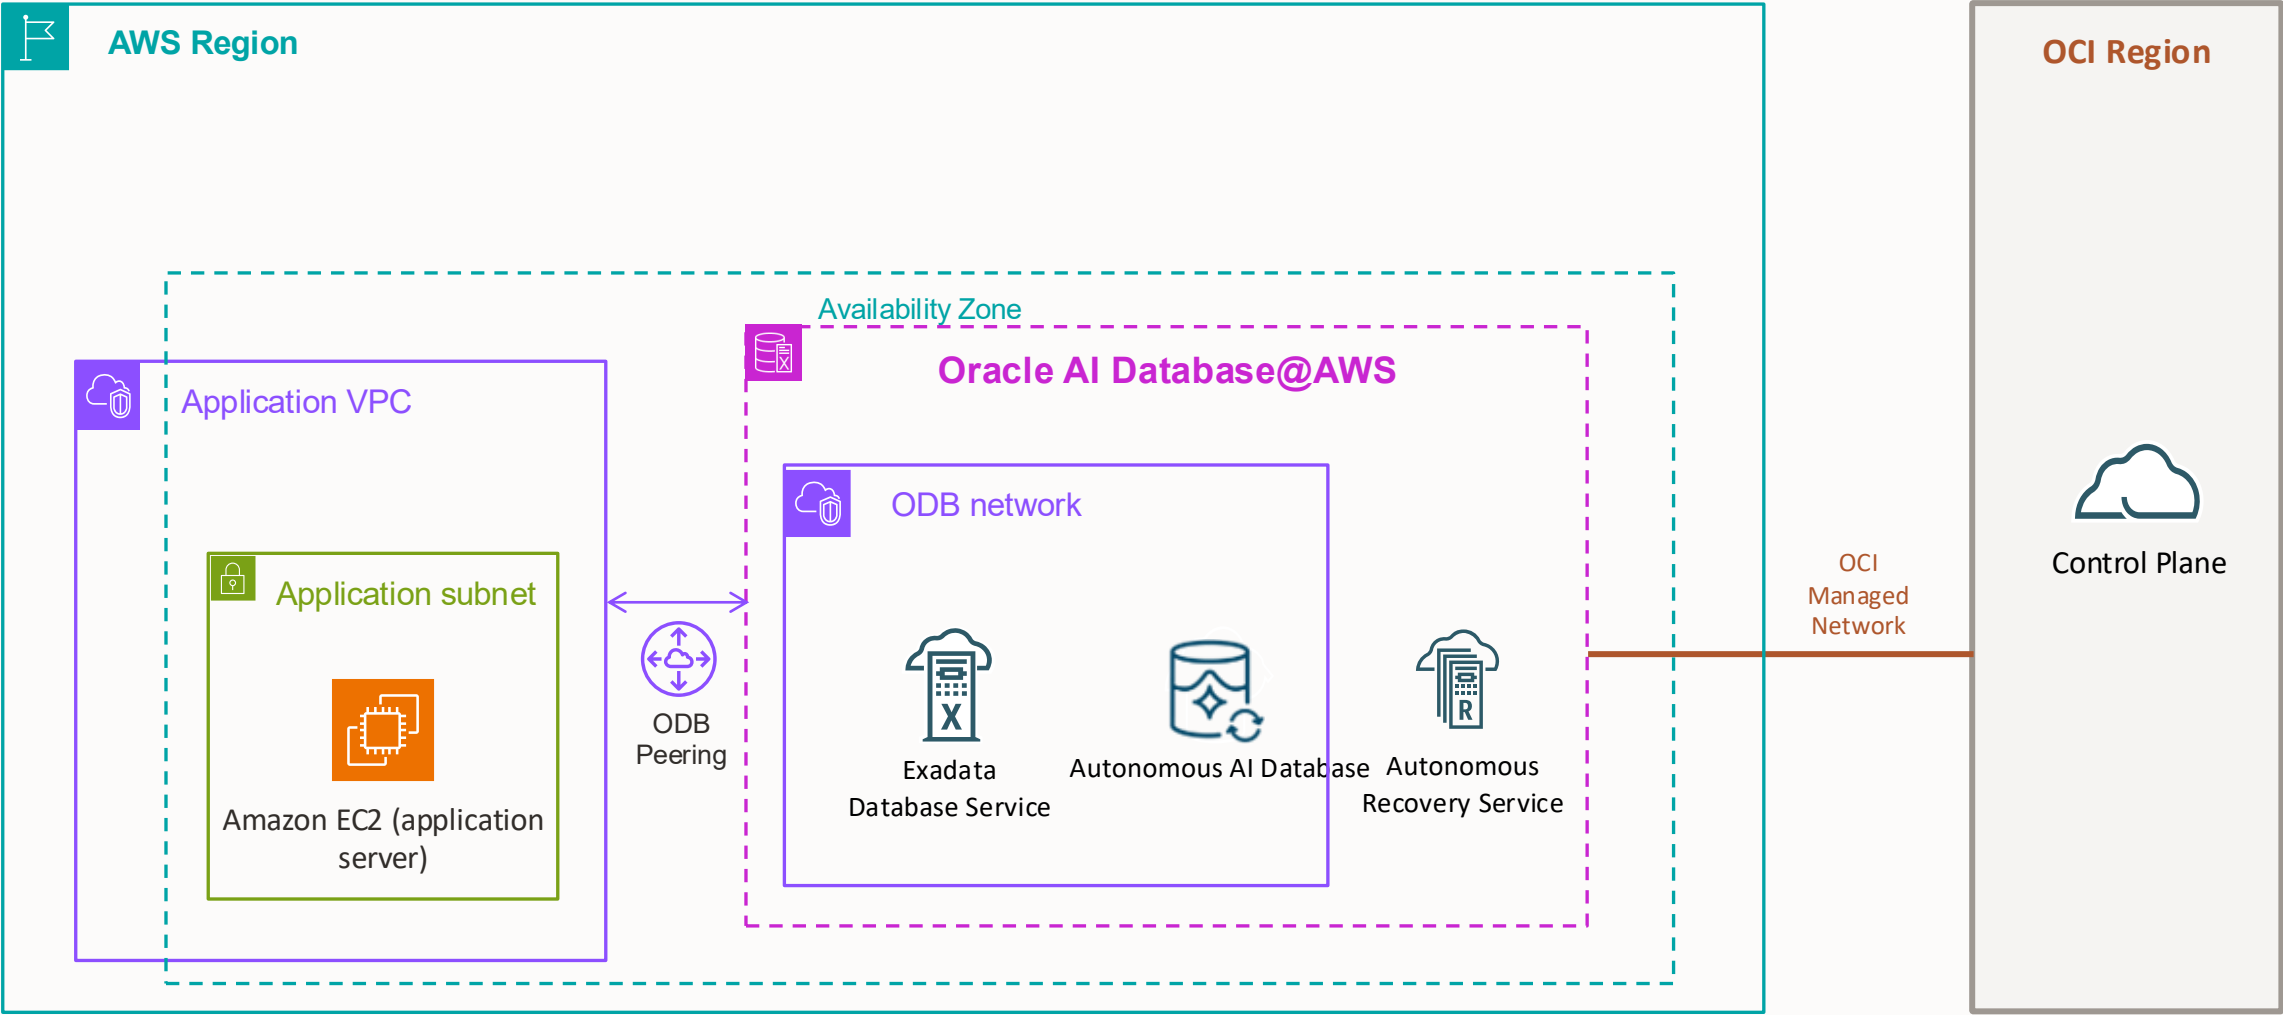

Oracle AI Database@AWS – Detailed Architecture

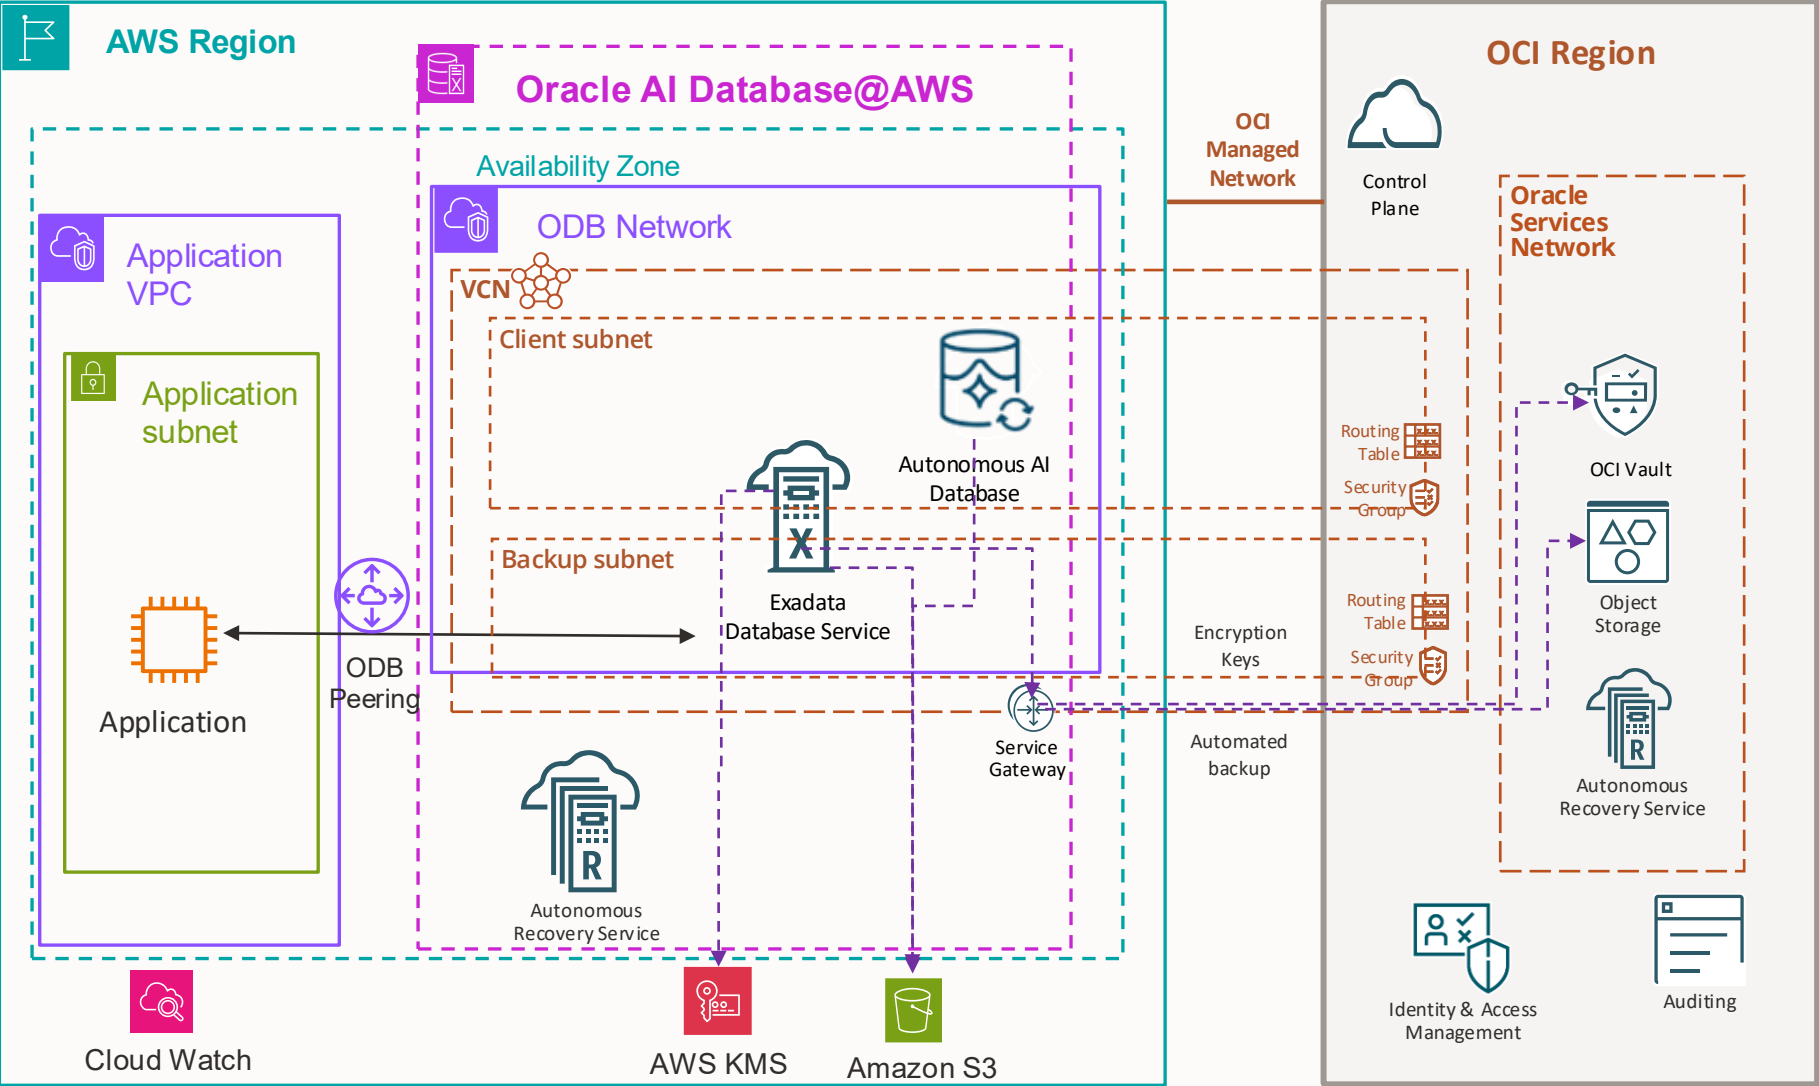


Autonomous AI Database Service on Dedicate Infrastructure and Exadata Database Service on Dedicated Infrastructure co-located inside AWS, runs alongside your application stack

Customer creates a new network resource called “ODB Network” to connect to databases

Automated backups to Oracle Zero Data Loss Autonomous Recovery Service in OCI/AWS, OCI Object Store, or Amazon S3



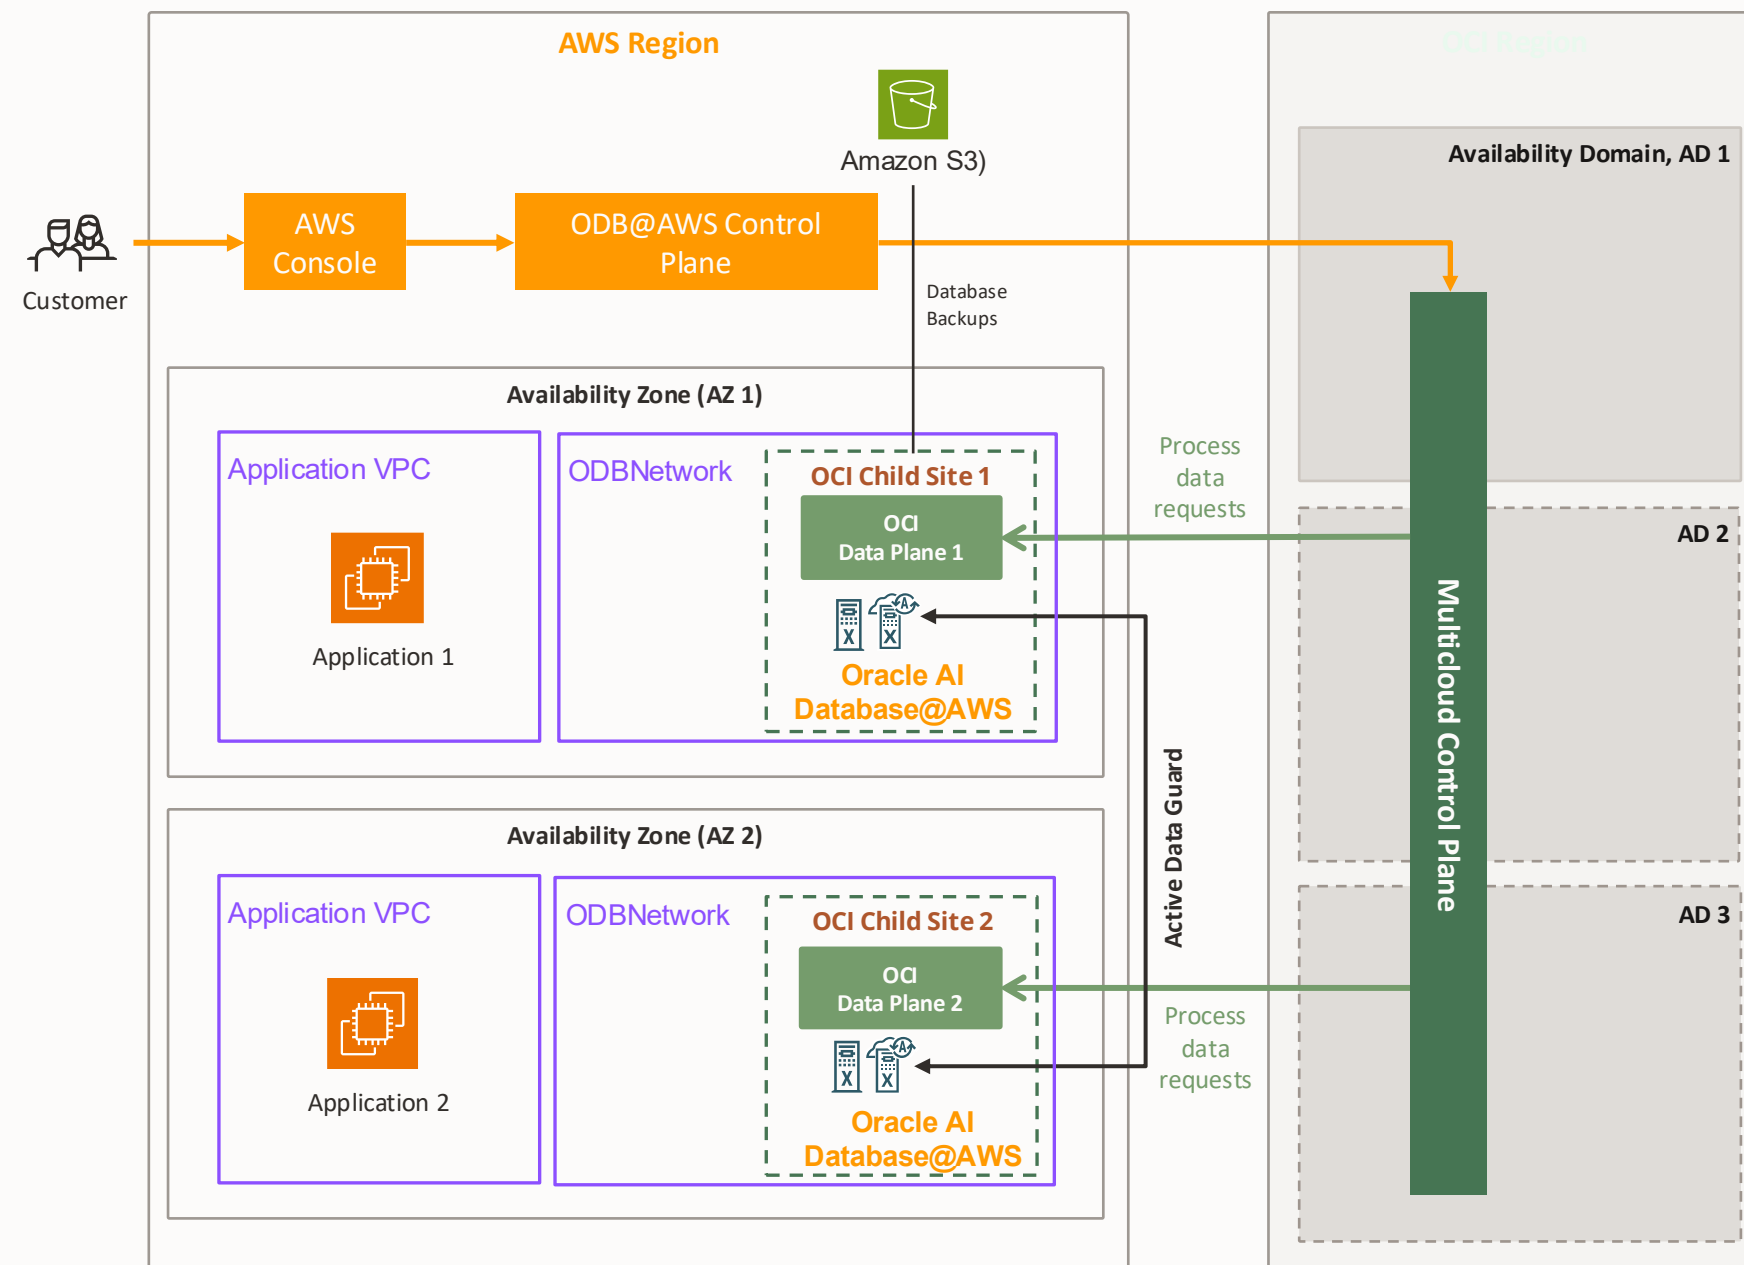

What happens if OCI AD is unreachable?

- Multicloud Control Plane continues to operate on load-balanced VMs across other ADs. In case of a single-AD regions, the Control Plane remains available in **3 Fault Domains (FDs)**.
- This employs **OCI best practices**. In case of OCI Region failure, customers can still access their DBs, physically hosted in each cloud provider.

What happens if AWS AZ unreachable?

- Data request for that AZ will not succeed but if application is built with **failover mechanism**, App 2 will pick up operation connecting to Database 2 utilizing **Active Data Guard**.

SLAs:


- Remain the same through network connectivity across clouds.



Oracle Database Cloud Services

Oracle AI Database@AWS – The best of both worlds

Enterprise-grade data Management

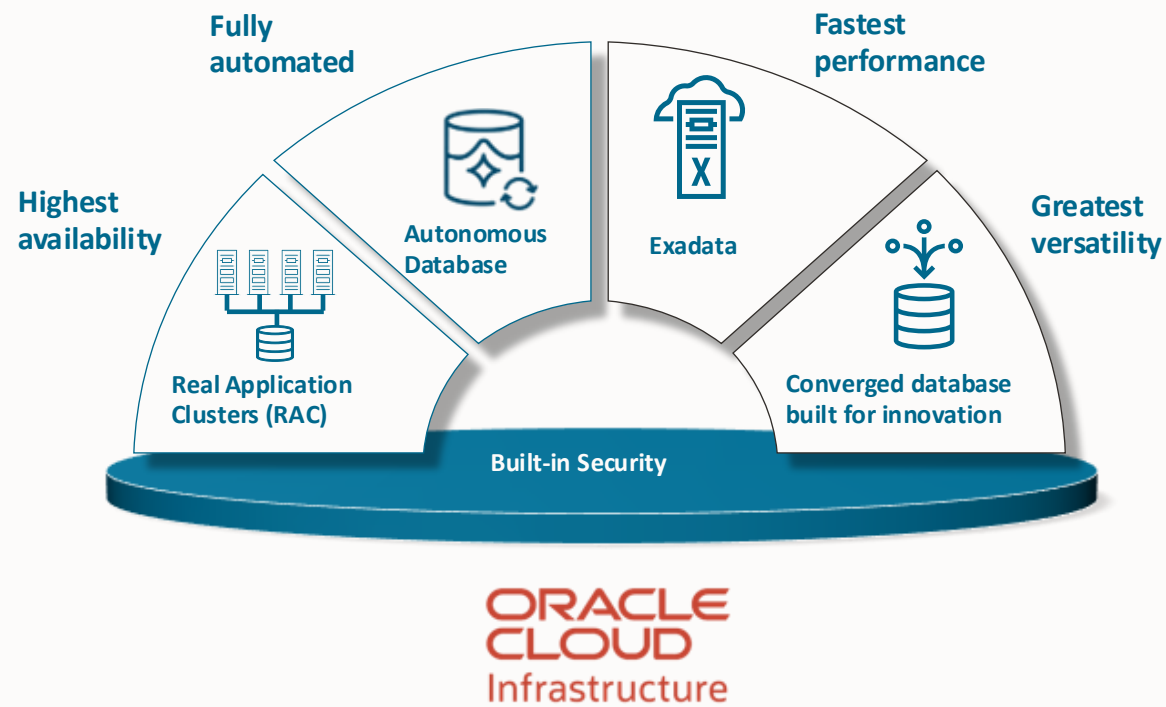

Most widely adopted cloud





Amazon EC2



Amazon SageMaker



Amazon EKS



Amazon Bedrock



Amazon Simple Storage Service (Amazon S3)




AWS KMS



Oracle Database Services on Oracle Database@AWS

Autonomous AI Database



Fully managed, cloud-native
Oracle Database service
on **Exadata** with
complete automation and
the **lowest TCO**

Exadata Database Service




Co-managed
Oracle Database service on
Exadata with cloud
automation and
full administrative control

Autonomous Recovery Service




Fully managed zero data loss
recovery service with fast
incremental forever backups,
continuous **recovery validation**
and data **anomaly detection**

Oracle AI Database 26ai

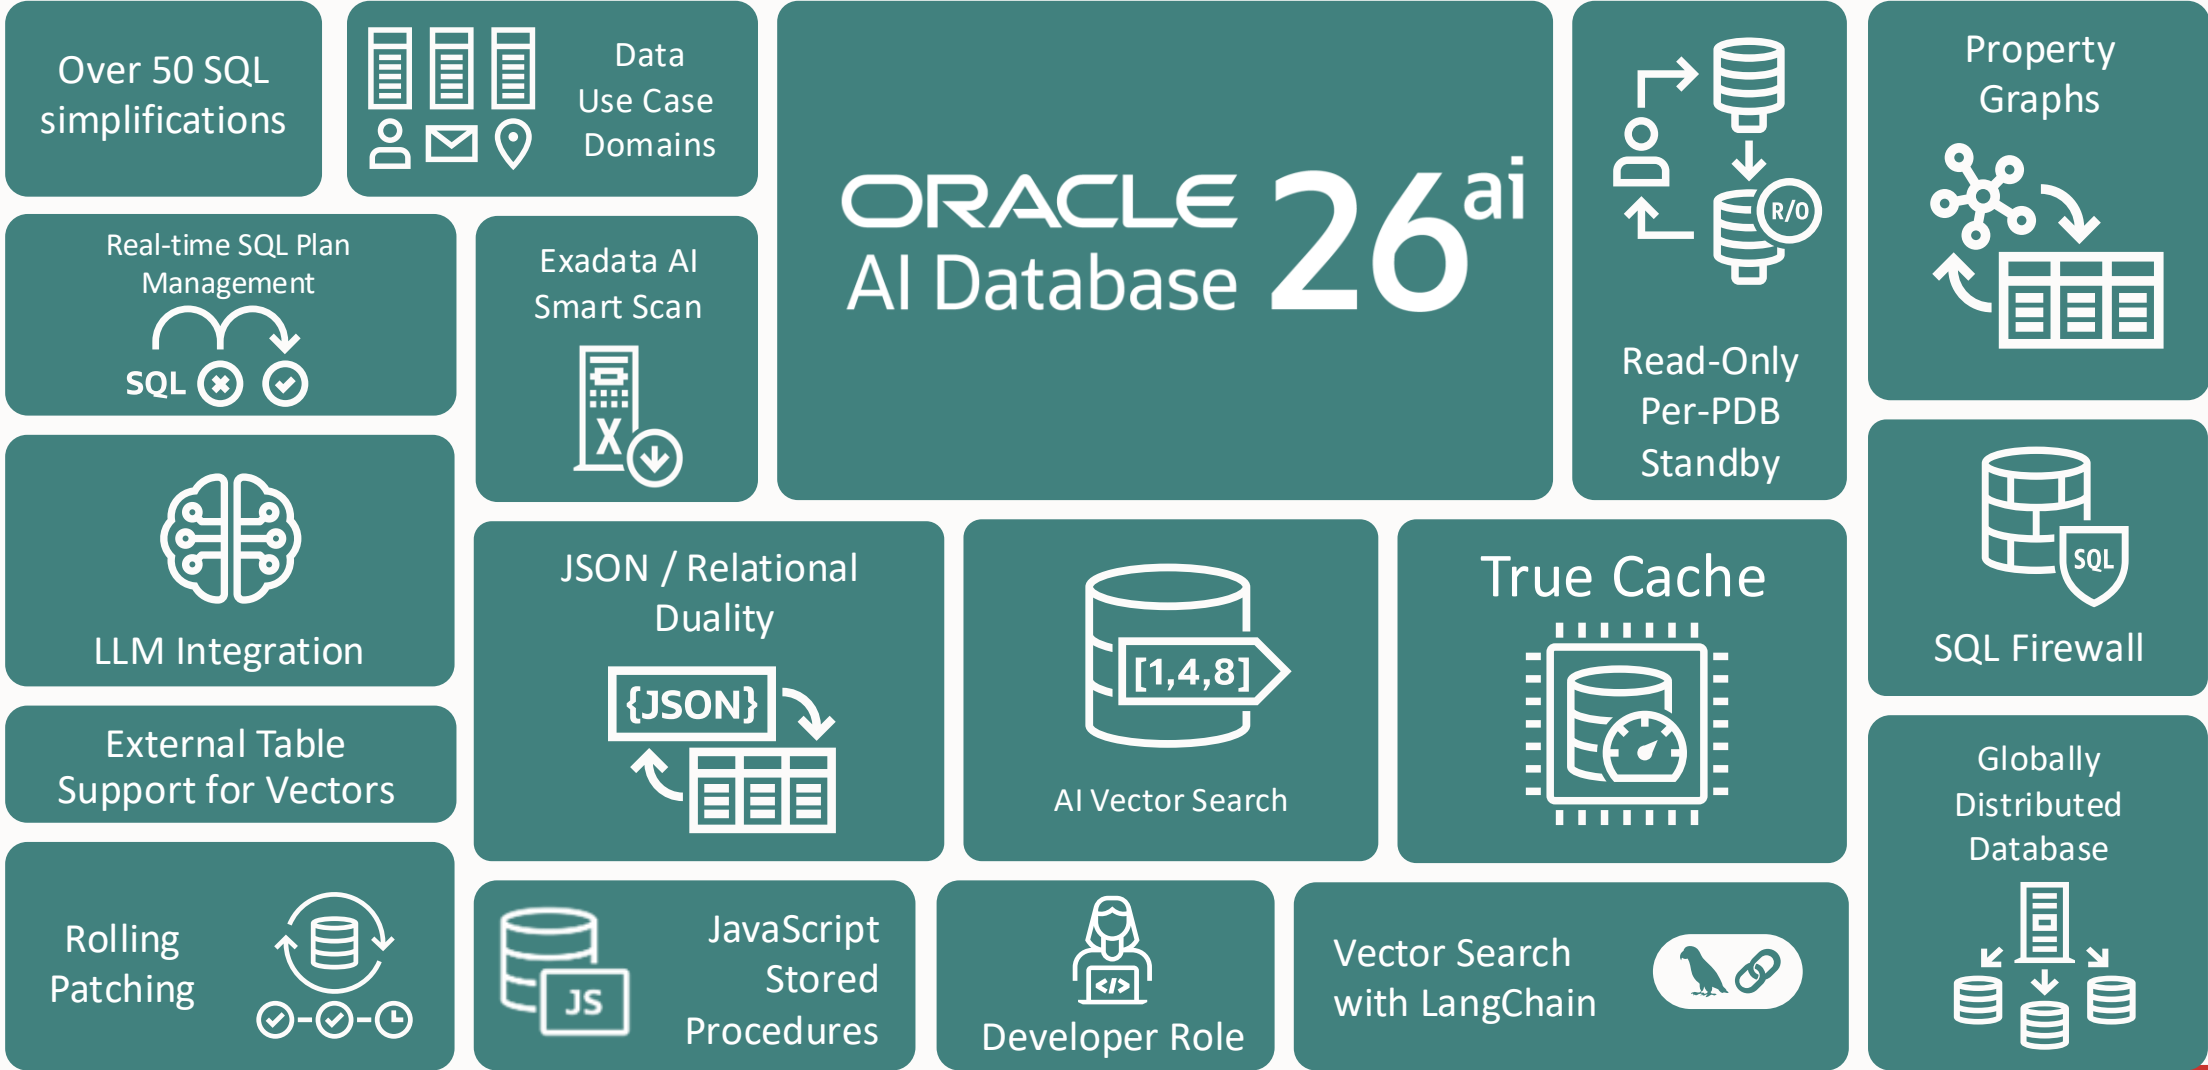

Exadata vision

Extreme performance, scalability, and availability for data and AI workloads, at a low cost

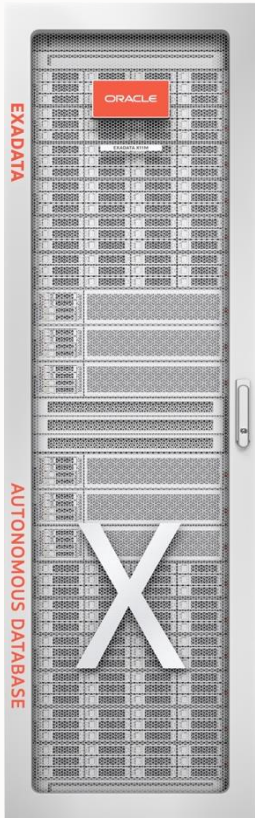

Data optimized hardware

Scale-out, data optimized compute, networking, and storage


Data intelligent software

Unique algorithms deliver extreme performance and efficiency for AI, analytics, and mission-critical apps, at any scale

Engineered to run everywhere

On-premises, Cloud@Customer, Oracle Cloud, and Multicloud

Complete Oracle Database and Exadata capabilities in the cloud

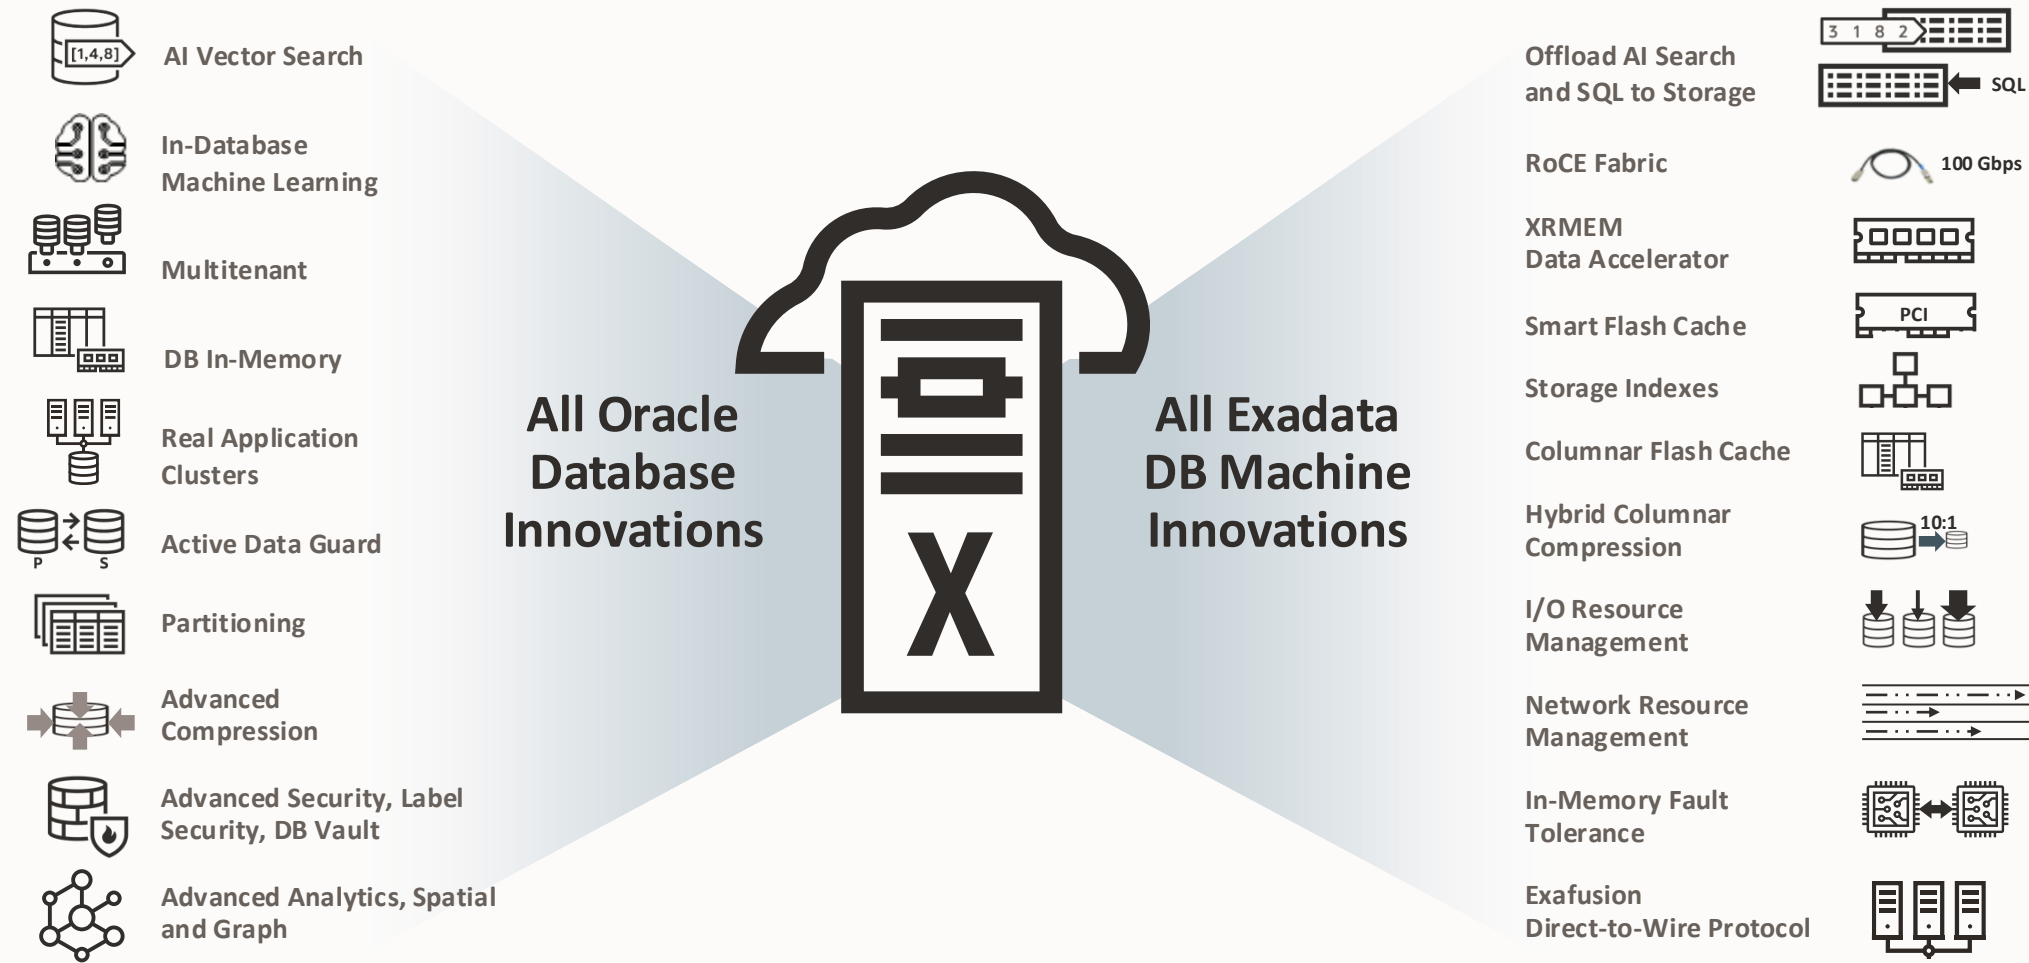

Exadata Cloud Infrastructure

All the power and functionality of Oracle Database and Exadata in the public cloud

Exadata in the public cloud

- Same architecture as on-premises Exadata
- Infrastructure managed by Oracle experts
- Deployed in chosen public cloud (OCI) or AWS region

Consistent public cloud experience

- Public cloud UI/API-driven system and database management
- Flexible financial model with pay-per-use database cores
- Infrastructure subscription for as low as 48-hour minimum

Efficient cloud adoption strategy

- Single infrastructure runs Autonomous AI Database and Exadata Database Service
- Meet or even exceed on-premises service levels and extend Exadata benefits to applications in AWS

Exceptional Outcomes

- Performance
- Availability
- Security
- Consolidation



Elastic Scaling

- Add CPU and Storage Online
- Any size workload or database



Highest Value

- Best Price/Performance
- Pay-per-use Pricing
- One DB Service vs Many



Fully-elastic scale-out dedicated infrastructure configurations

Compute and storage servers in fully-elastic configurations


- Start with 2 compute and 3 storage servers
- Scale-out to 32 compute and 64 storage servers
- Choose quantity of each type of server based on workloads
- Complete server and tenant isolation with server hardware dedicated to a single customer

Scale-out X11M compute servers for database processing

- 192 AMD EPYC Processor cores (760 ECPUs)
- 1,390 GB Memory

Scale-out X11M intelligent storage servers for database offload

- 64 AMD EPYC Processor cores
- 1.25 TB Exadata RDMA Memory (XRMEM)
- 27.2 TB NVMe Flash
- 80 TB HDD usable storage

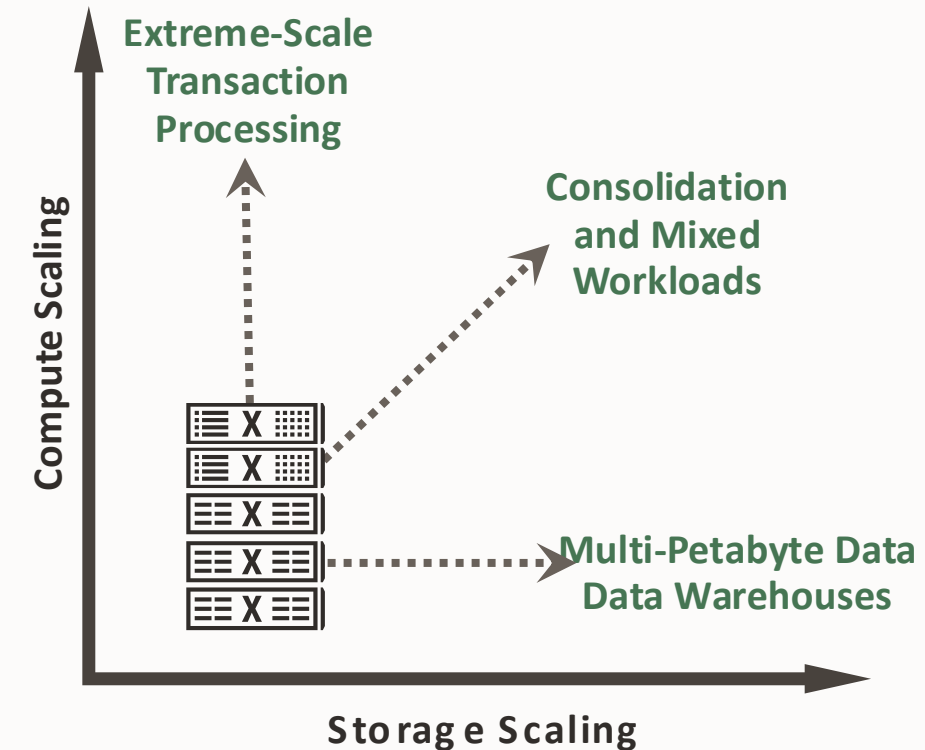

Performance scales as more servers are added

Exadata Cloud Infrastructure architecture

Exadata components in the cloud

- Scale-out database compute and storage connected by secure RDMA fabric
- Infrastructure managed by Oracle

Cloud controls and networking


- Identity management and policies to control access
- Virtual Cloud Network (VCN)
- Compartments to organize cloud resources

Secure isolation

- Databases run in secure virtual machines isolated from underlying infrastructure

Control plane


- Controls and manages Exadata infrastructure

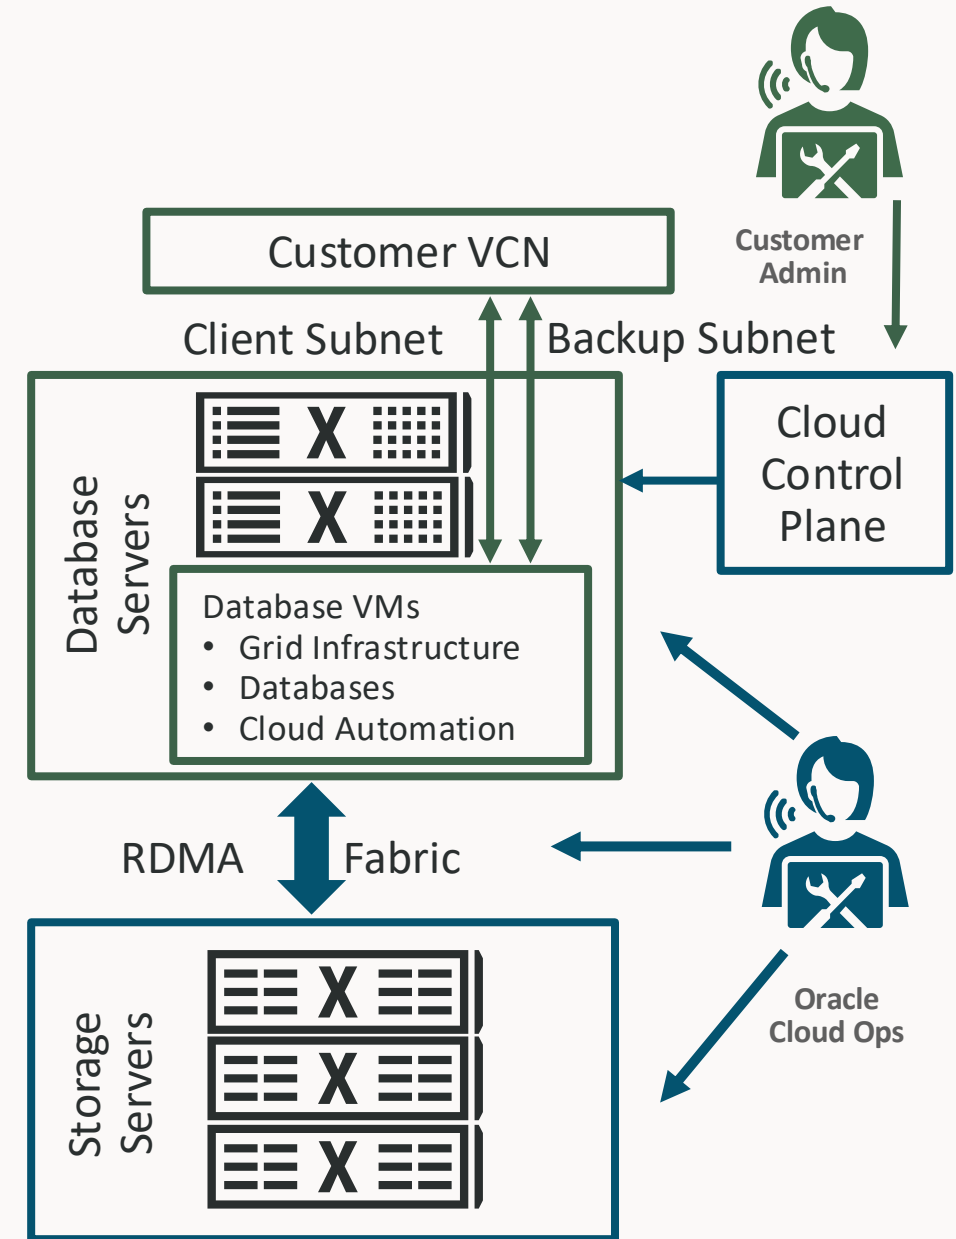

Multiple VM Clusters on dedicated Exadata infrastructure

Improves database consolidation efficiency and cloud economics


Autonomous AI Database
and
Exadata Database Service
run concurrently
on the same infrastructure

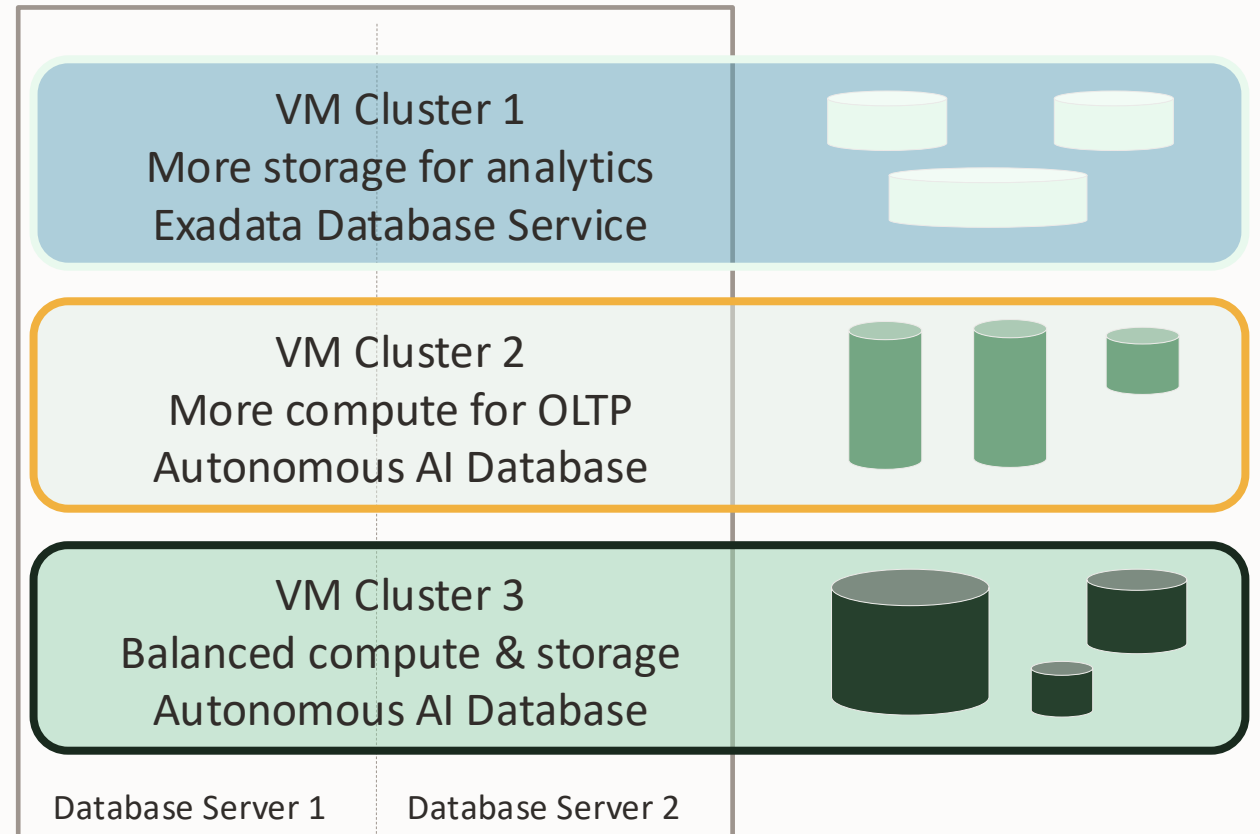

Exadata Database Service on Dedicated Infrastructure (ExaDB-D)

Exadata Database Service

Co-managed with 100% Oracle Database compatibility and unique Exadata capabilities

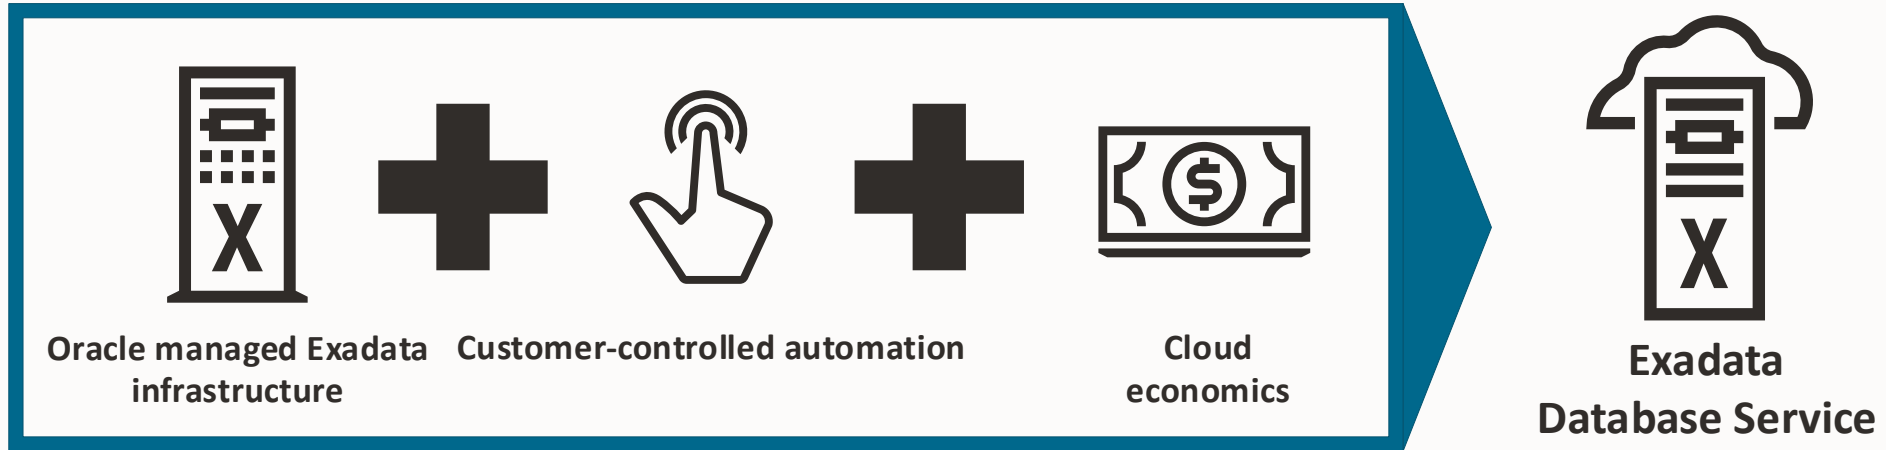

Intelligent data architecture
with unique
software optimizations



Extreme performance,
scalability, reliability,
and security



Highly-available,
fully-redundant
hardware and software



All Oracle Database
Enterprise Edition
functionality and options

Run mission-critical AI, OLTP, Analytic workloads at any scale on Exadata in the cloud

Exadata Database Service management model



Cloud automation for lifecycle management

Oracle Cloud Web base UI, REST APIs, SDK, CLI, Terraform

- Scale Servers and ECPUs
- Create Database Homes and Databases
- Schedule Infrastructure Maintenance
- Update Operating System, Grid Infrastructure, and Databases
- Backup and Recover Databases
- Enable Data Guard and Add Standby Databases

Create database

Database name

DB23ai

Required

Unique Database

Database version

23ai

PDB name

Cancel

Create

Scale VM cluster

VM Count

2

Resource allocation per VM

ECPU count per VM

2

Required

Requested ECPU count for the VM 4 cluster

Memory per VM

30

Required

Requested memory for the VM cluster (GB)

60

Cancel

Scale

Database backups

Enable automatic backups

Automatic backup is the preferred method for backing up Oracle Cloud databases. [Learn more.](#)

Backup destination

Autonomous Recovery Service (Recommended)

Required

Compartment

MyDemo

Protection policy

Silver (35-days recovery window)

Required

Location

OCI

Retention lock

Disabled

Real-time data protection

Cancel

Create

Add standby

Peer VM Cluster

Peer region

US West (Phoenix)

Required

Availability domain

vPAY-PHX-AD-1

Required

Select a service

Exadata Database Service on Dedicated Infrastructure

Required

Compartment

MyDemo

Exadata infrastructure

Required

Compartment

MyDemo

VM cluster

Required

Cancel

Run Precheck

Add

26

Copyright © 2026, Oracle and/or its affiliates

The Oracle logo, consisting of a red square with a white stylized 'O' inside.

Exadata Database Service update release timelines

Infrastructure Exadata image updates

- Released quarterly
- Updates are mandatory

Infrastructure security updates


- Released monthly
- Updates are mandatory

GI and Database release updates

- Released quarterly
- Updates are recommended

VM Exadata OS image updates


- Released monthly
- Updates are recommended

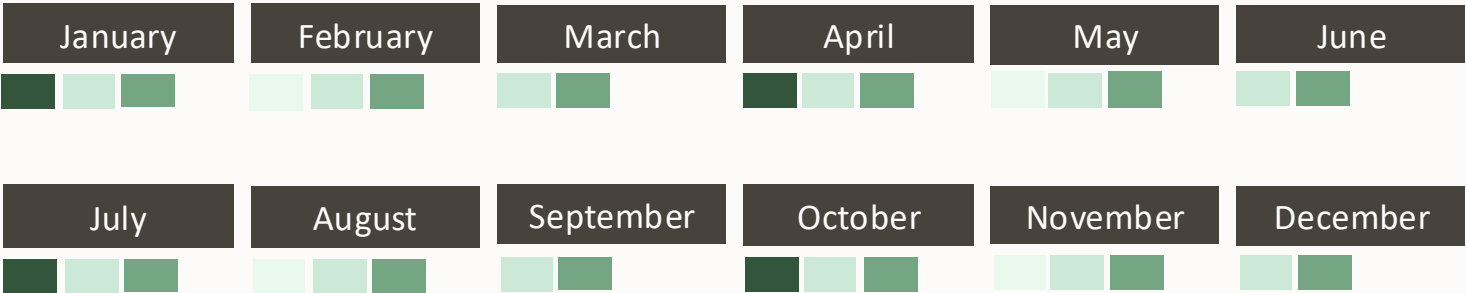

Autonomous AI Database Serverless and Dedicated Exadata Infrastructure (ADB-S and ADB-D)

Autonomous AI Database delivers the best data experience

Fully-managed, cloud native, lowest TCO

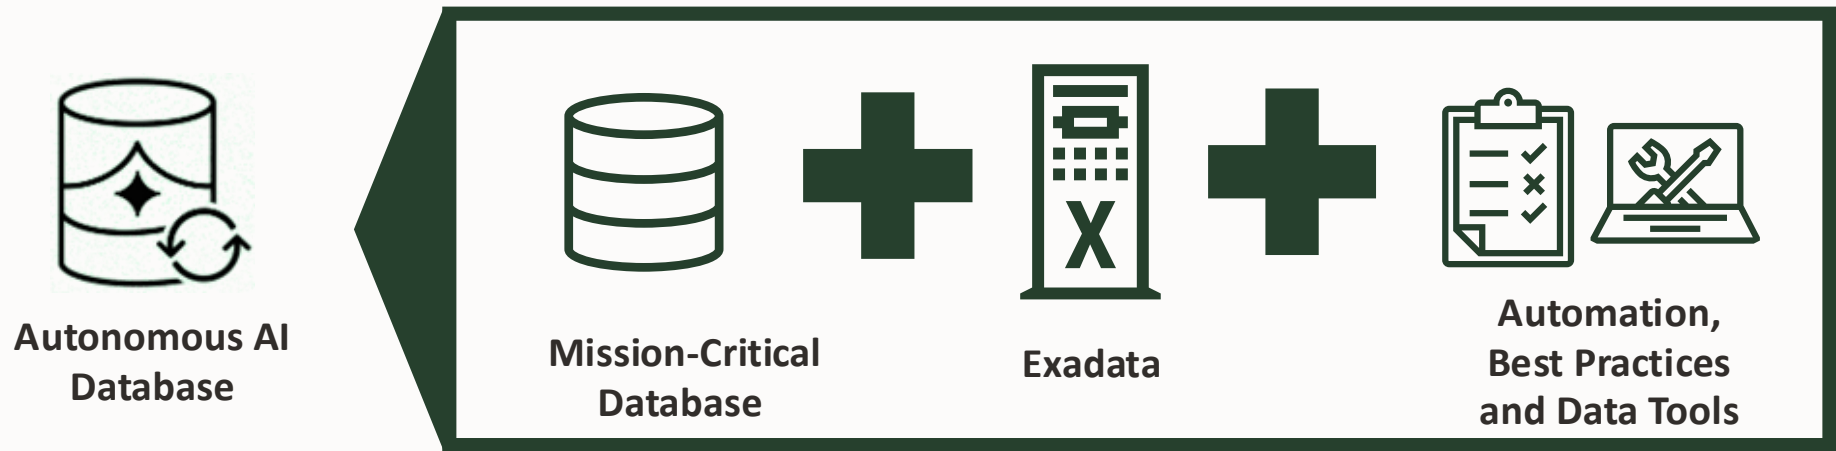

Automatically secures, tunes, and scales



Eliminates many manual tasks



Reduces human error



Simplifies scaling



Minimizes downtime




Aligns costs with demand

RAC-enabled ♦ Up to 99.995% SLA ♦ Zero regression SLO



What is Oracle Autonomous AI Database?

Modern, fully-managed, cloud-native, AI-enhanced data platform that automates data management.

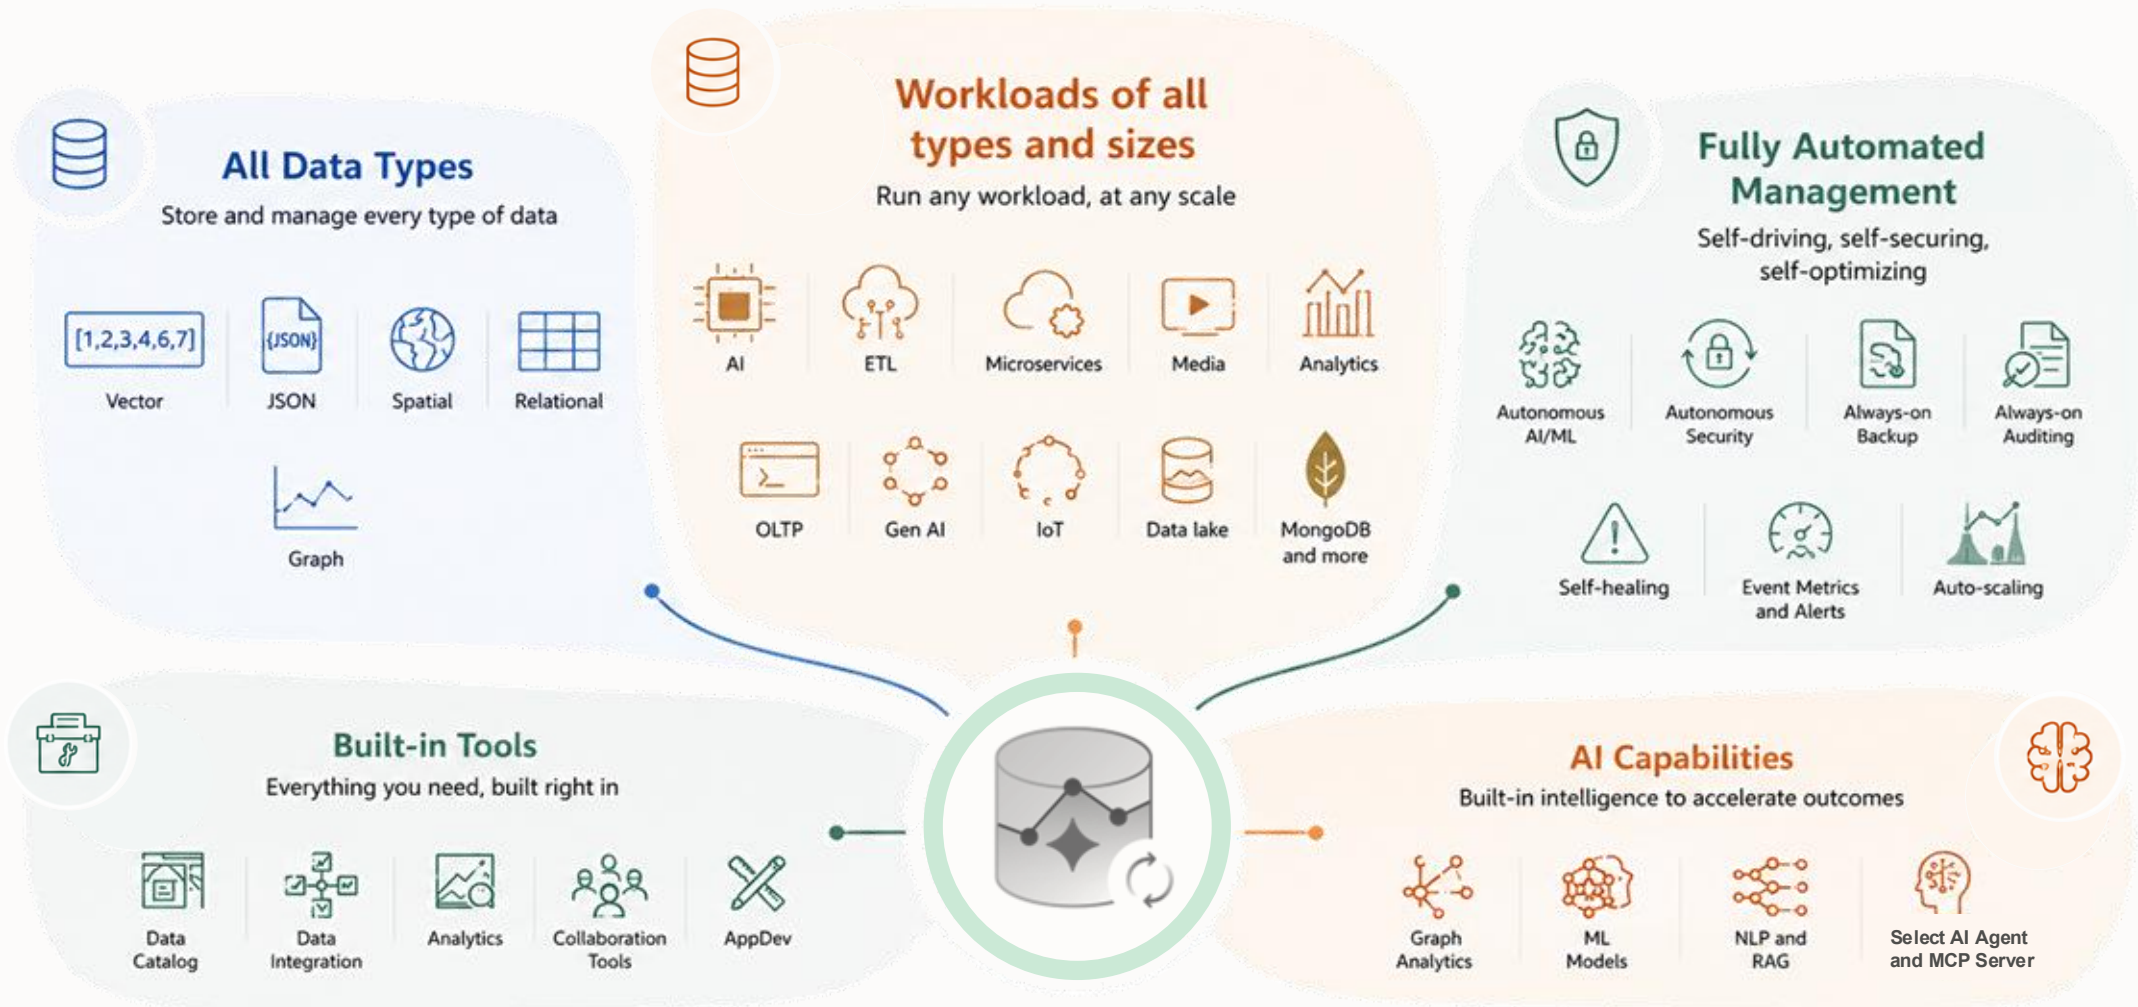

Autonomous AI Database is **flexible**

Optimized for **all workloads** and **data types**

ANY DATA



No need to maintain specialized databases

Innovate with all types of data within a single database

ANY DEVELOPMENT STYLE



Use your development styles and frameworks of choice

Innovate with zero-code/low-code to any-code using built-in frameworks

ANY WORKLOAD



No need to manually optimize for your workload


Innovate regardless of workload – apps, analytics, AI/ML, or mixed

Autonomous AI Database brings Automation

Automatically secures, tunes, and scales



Automated **patching**
and **security**



Automated
scaling



Automated **backups**
and **failover**



Automated
provisioning



Automated
configuration



Automated **tuning**

Up to **65%** reduction in manual administration*

Up to **99.995%** SLA | **Zero** regression SLO

*As compared to non-managed Oracle Databases

<https://www.oracle.com/a/ocom/docs/autonomous-tco-report-exec-summary.pdf>

Autonomous AI Database is **Secure**



Automated patching

Hands-free patch management with zero downtime and no interruption of service



Data compliance


Meets a broad set of international and industry-specific compliance standard

[Link to regulatory compliance certification list](#)



Enhanced Security


Automated always-on data encryption, auditing, and ability to protect sensitive and regulated data



AI Security


Oracle's **zero-trust** model for data access: Select AI. Control for blocking **LLM** access to the data, no matter the prompt.

Autonomous AI Database is **workload-optimized**




Autonomous AI Lakehouse

Pre-configured for columnar format, partitioning, and large joins to accelerate **analytics**, **data warehouse**, and **data lake**




Autonomous AI Transaction Processing

Pre-configured for row format, indexes, and data caching to accelerate **transaction processing** and **mixed workloads**



Autonomous AI JSON Database

Designed for developing **NoSQL-style applications** that use JavaScript Object Notation (JSON) documents




Autonomous APEX AI Application Generator

Oracle APEX AI Application Generator is a low cost service offering convenient access to the Oracle APEX platform for rapidly building and **deploying low-code applications.**



Oracle AI Lakehouse is a live AI hub for all your real-time data

Natively supports 100+ data sources

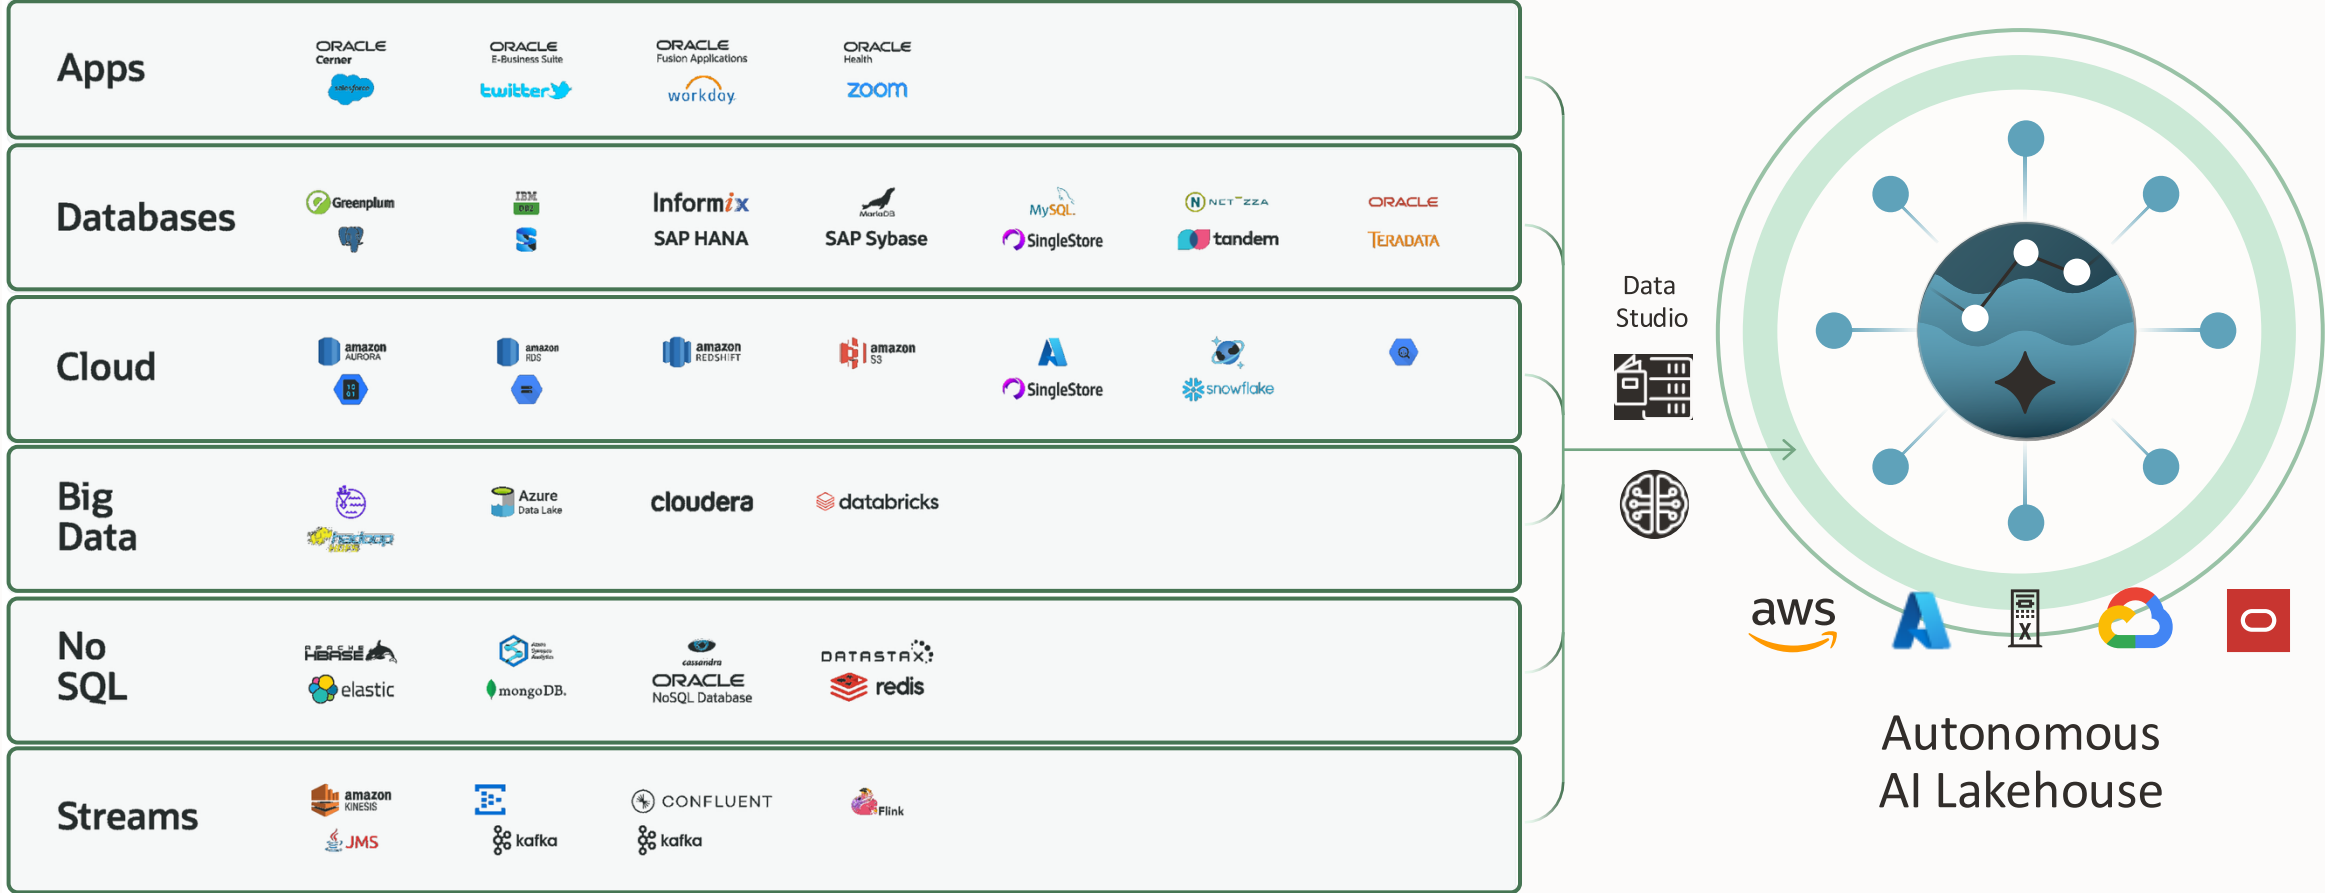

Oracle AI Data Catalog

One place to view all of your data

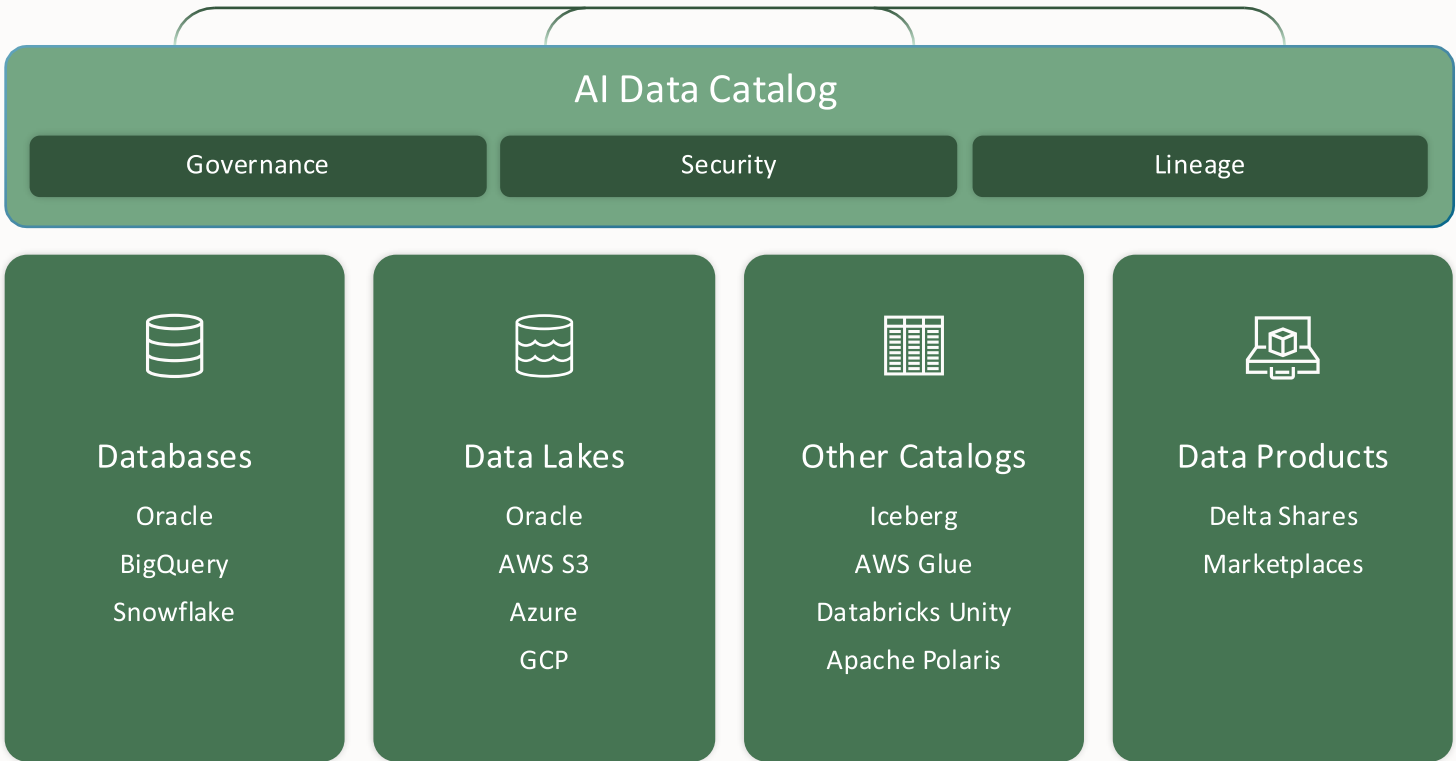

Unified view of
all enterprise data

“Catalog of catalogs” architecture

Provides security and governance

Gather semantic and business information for
data



Provides **Plug & Play Access** to Iceberg

Immediately query **any Iceberg Table**

- Use any Iceberg catalog: Databricks Unity, Snowflake Horizon, AWS Glue
- Or one-command setup for **Iceberg** Tables in object storage

Simple SQL syntax: schema.table@catalog

```
SELECT
    Customer_Name,
    ...
FROM
    Marketing.Promotions@Databricks
WHERE
    Promotion_Date = '01-October-2025'
```

Lake cache for **faster performance**


Performance of Native Exadata Tables for Iceberg Data

- Cache Iceberg tables automatically or based upon user-specified policies
 - Automatic caching coming soon
- All of the benefits of Exadata Storage

Transparent to Applications and Users


- No code changes required
- Full data consistency

Analytic (TPC-DS) Queries

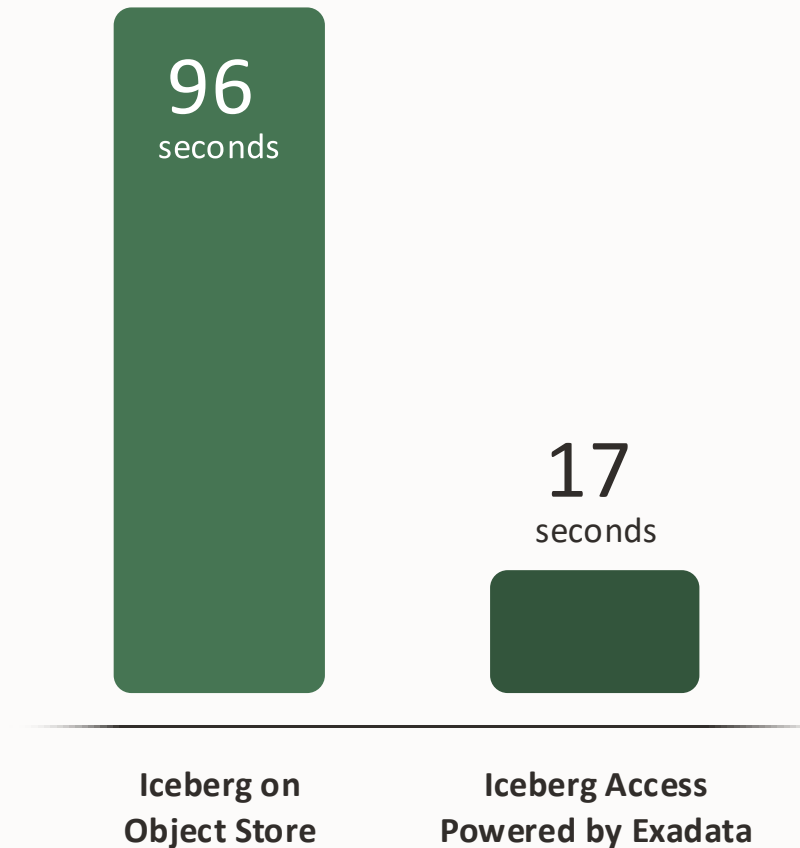


Autonomous AI Database includes dozens of AI-enhanced Self-Service tools

Nothing else to purchase, install, or configure

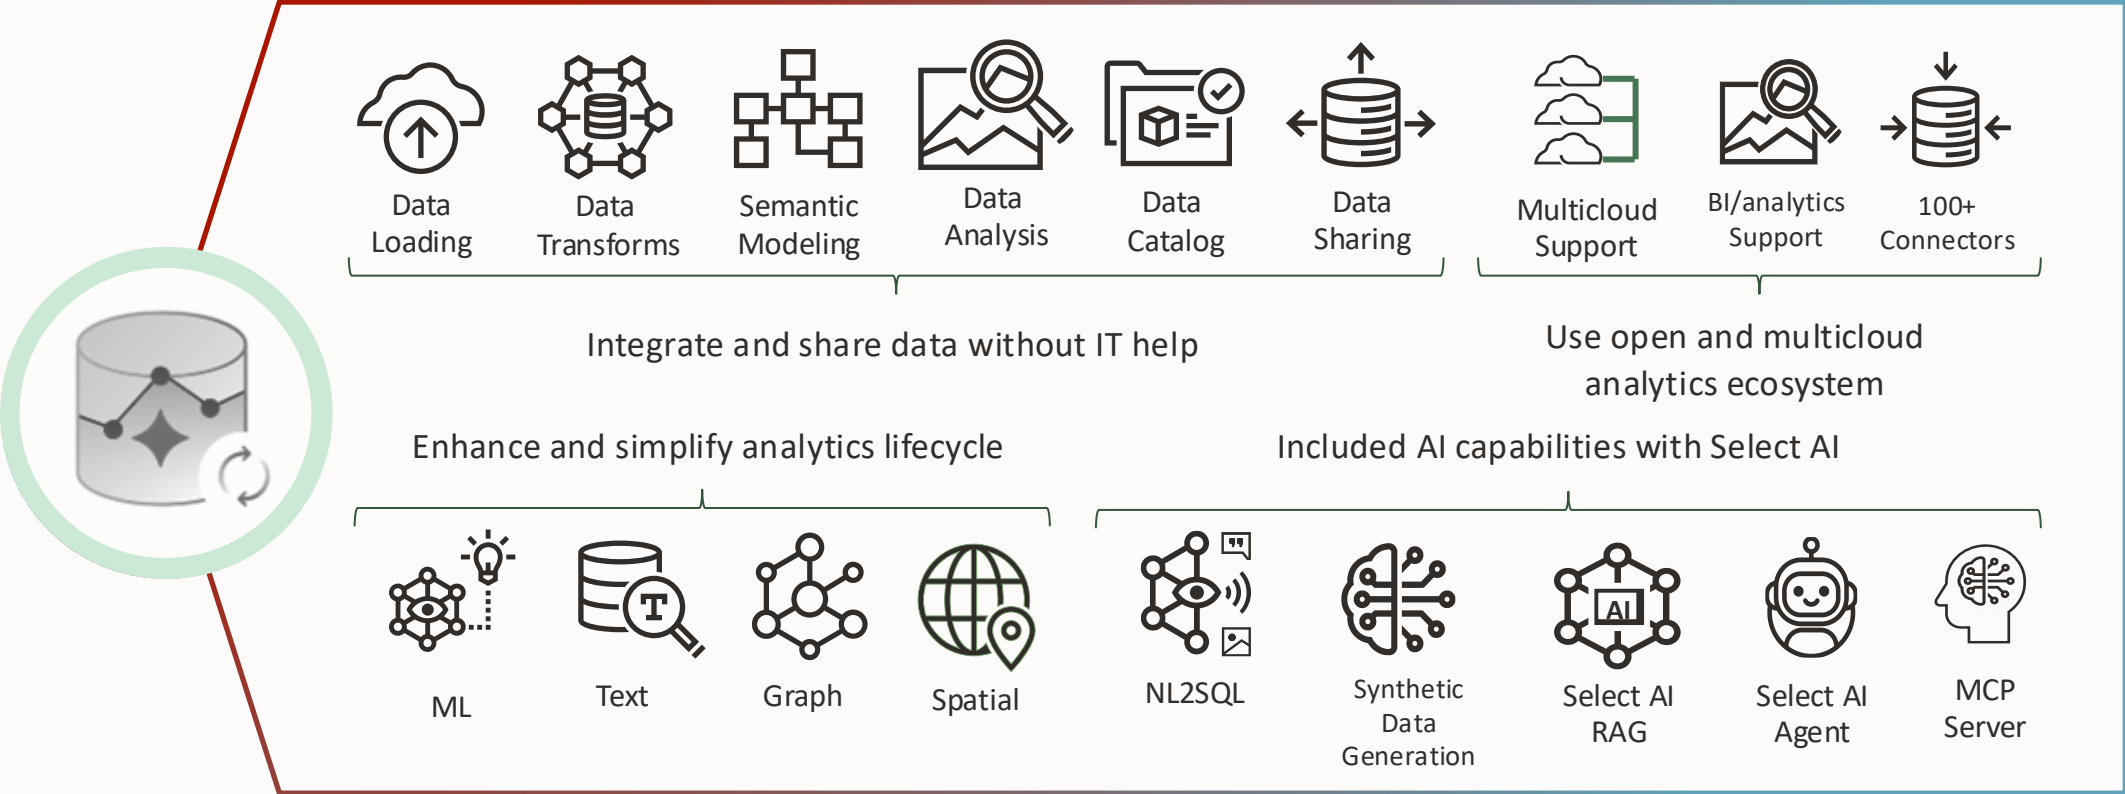

Bring AI to Your Data

MACHINE LEARNING



- **Build and train models** directly where your data lives.
- **Eliminate data movement** to reduce cost and security risks.
- **Predict outcomes** faster using scalable processing.

NL2SQL



- **Chat with your data** using natural language.
- **Empower business users** to get answers without learning SQL.
- **Generate instant insights** from complex enterprise data.

RAG



- **Ground Generative AI** with your private, real-time data.
- **Manage all data types** (structured, vector, unstructured) in one platform.
- **Support enterprise security** while adopting LLMs.

AGENTS & MCP



- **Turn insights into action** with autonomous AI agents.
- **Agents securely access** tools and business data through an MCP server.
- **Drive business efficiency** with multi-step reasoning AI assistants that do the work.

Autonomous AI Database adds your **Private Data to AI Models**

Reasoning across both public & private data delivers highest value results

How is your share of wallet trending with top accounts?


Enterprise Data: Cross-product purchase data

Cloud Data Sources: Updated customer behavior

Which of your customers are most likely to churn?


Enterprise Data : Contract terms, usage metrics, service tickets

Cloud Data Sources : Competitor pricing changes, social sentiment, macro-economic indicators

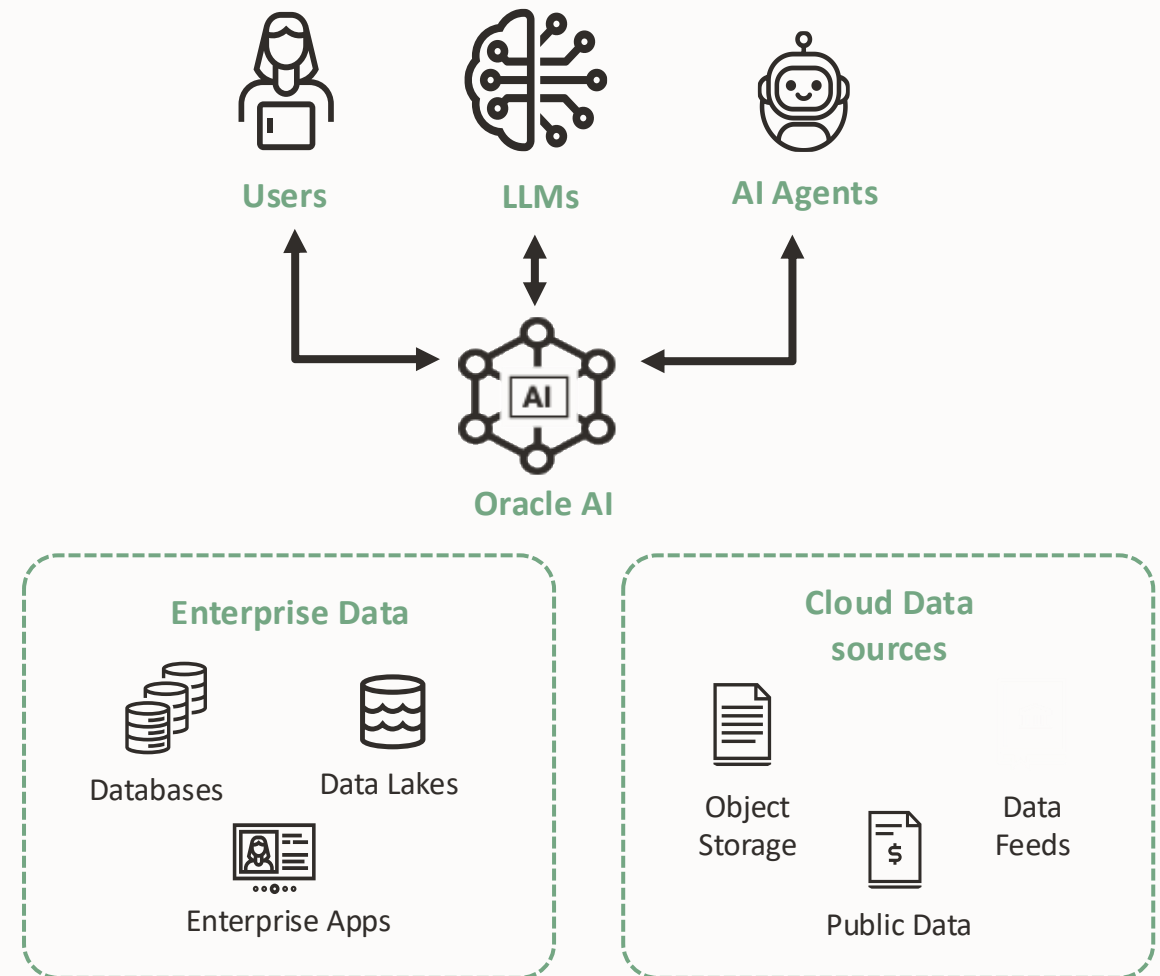

Autonomous AI Database **Select AI**


The simplest way to get answers about your business

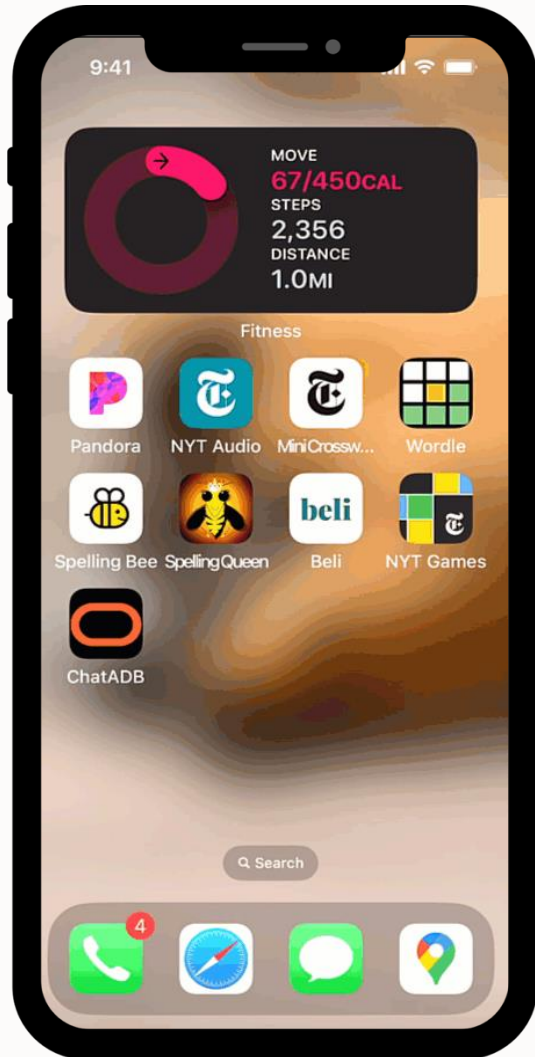

Use **your language** to query and analyze data.

There's no need to understand **where and how your data is stored** to gain insights.

Autonomous AI Database delivers AI Agents using **Select AI Agent**

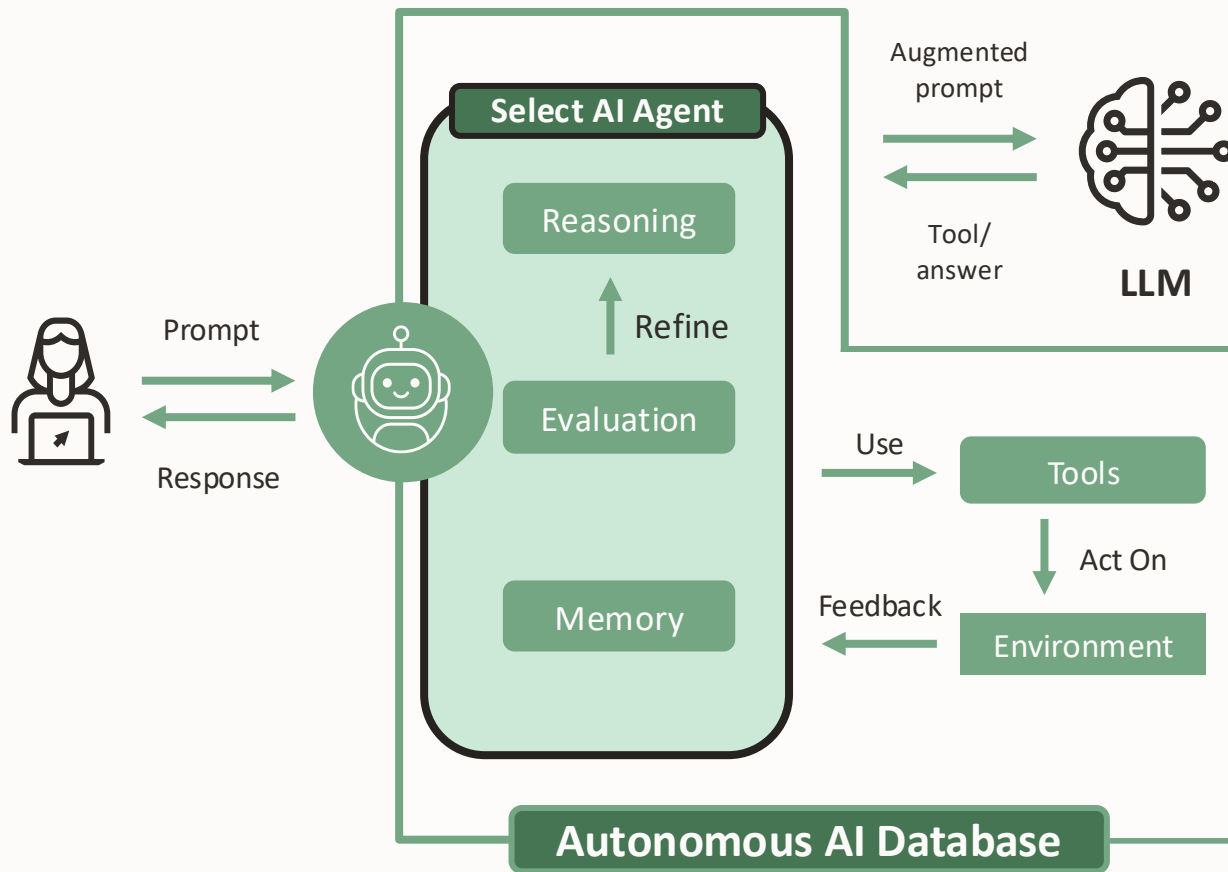

AI Agents utilize dynamic multi-step workflows to **perceive** their environment, **process** information, **make decisions**, and **take actions** to achieve user goals

Simple, automated framework to build, deploy, and manage AI agents

- Automatic short-term and long-term memory management
- Multi-turn chat using conversations
- Built-in and custom tools

Agentic Autonomous AI Database Access via MCP Server

Secure, simplified AI integration

Fully managed, multi-tenant MCP Server

Embedded in ADB Serverless and Dedicated Region 26ai and 19c for seamless AI agent integration – no separate server infrastructure required

Dynamic Tool Discovery


Enables MCP clients and AI agents to find and use tools created via Select AI Agent, without custom integration code

Robust Security & Access Management

Leverages Oracle Database Identity, OCI IAM, and external OIDC/OAuth 2.1 for centralized authentication and authorization

Key Benefits

- Reduces operational and technical complexity
- Eliminates manual security administration
- Enforces enterprise security, auditing, and compliance policies
- Safely extends AI-powered features across the enterprise

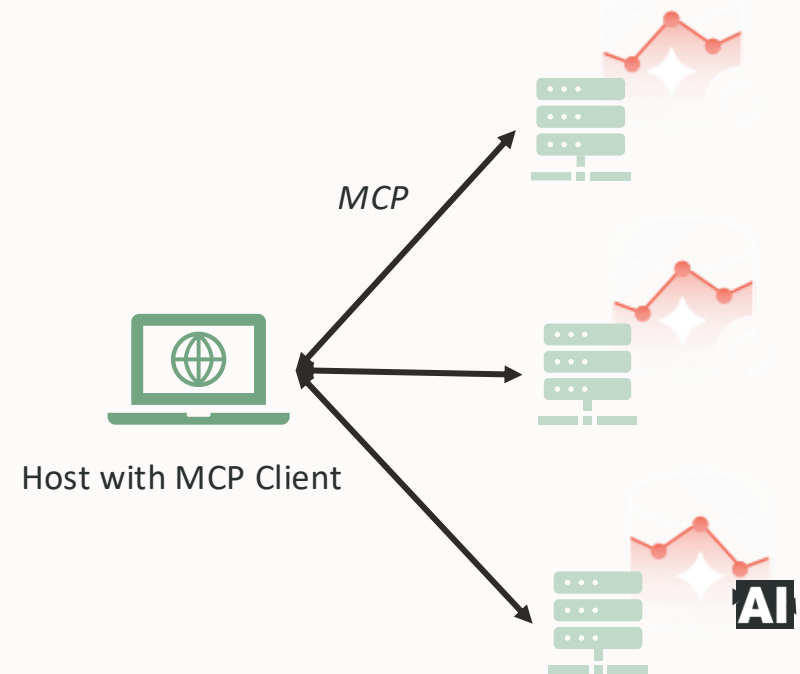

Autonomous AI Database on Dedicated Infrastructure (ADB-D)



Autonomous AI Database on Dedicated Exadata Infrastructure

A **deployment choice** with added controls for update, security and performance isolation

Dedicated Servers

Satisfy corporate and/or regulatory requirements for isolated production databases

More than just dedicated servers, added customizable lifecycle control policies

Improved **change management, governance, durability for mission critical deployments**

- Control database isolation to meet performance, security and regulatory requirements
- Control software version and maintenance scheduling for extended test cycles and isolated production updates
- Control high availability and disaster recovery with the most stringent RPO, RTO requirements

Co-Resident to optimize your investment and simplify database modernization

Deploy **VMs that run on the same infrastructure as other Exadata Database Service VMs**

- Optimize and leverage existing or new subscriptions to Dedicated Exadata Infrastructure
- Zero cost VM compute allocation. Setup separate Dev-Test, UAT, Production environments with no cost
 - Only charged pay-per-use for actively running database workloads inside the VM
 - Create your own private Serverless Database as-a Service, you control capacity, application teams enjoy budgeted self-service



ADB - Dedicated Exadata Infrastructure

I.T. Control of Governance, Best Practices, Budgeting, Compliance without typical Admin Burden




- Customizable database separation policies:
 - Separate critical, general purpose, and test databases
 - Separate databases by organization (sales, HR, marketing)
- Customizable software update and upgrade policies:
 - Deploy new versions on test/dev database before production
 - Avoid updates during peak periods (e.g. sale, quarter close)
 - Control upgrade to conform to application certified version
- Customizable availability policies (SLA):
 - Specify level of HA and DR needed for each container DB
- Customizable overprovisioning and peak usage policies



Autonomous AI Database on Dedicated Exadata Infrastructure

Management model

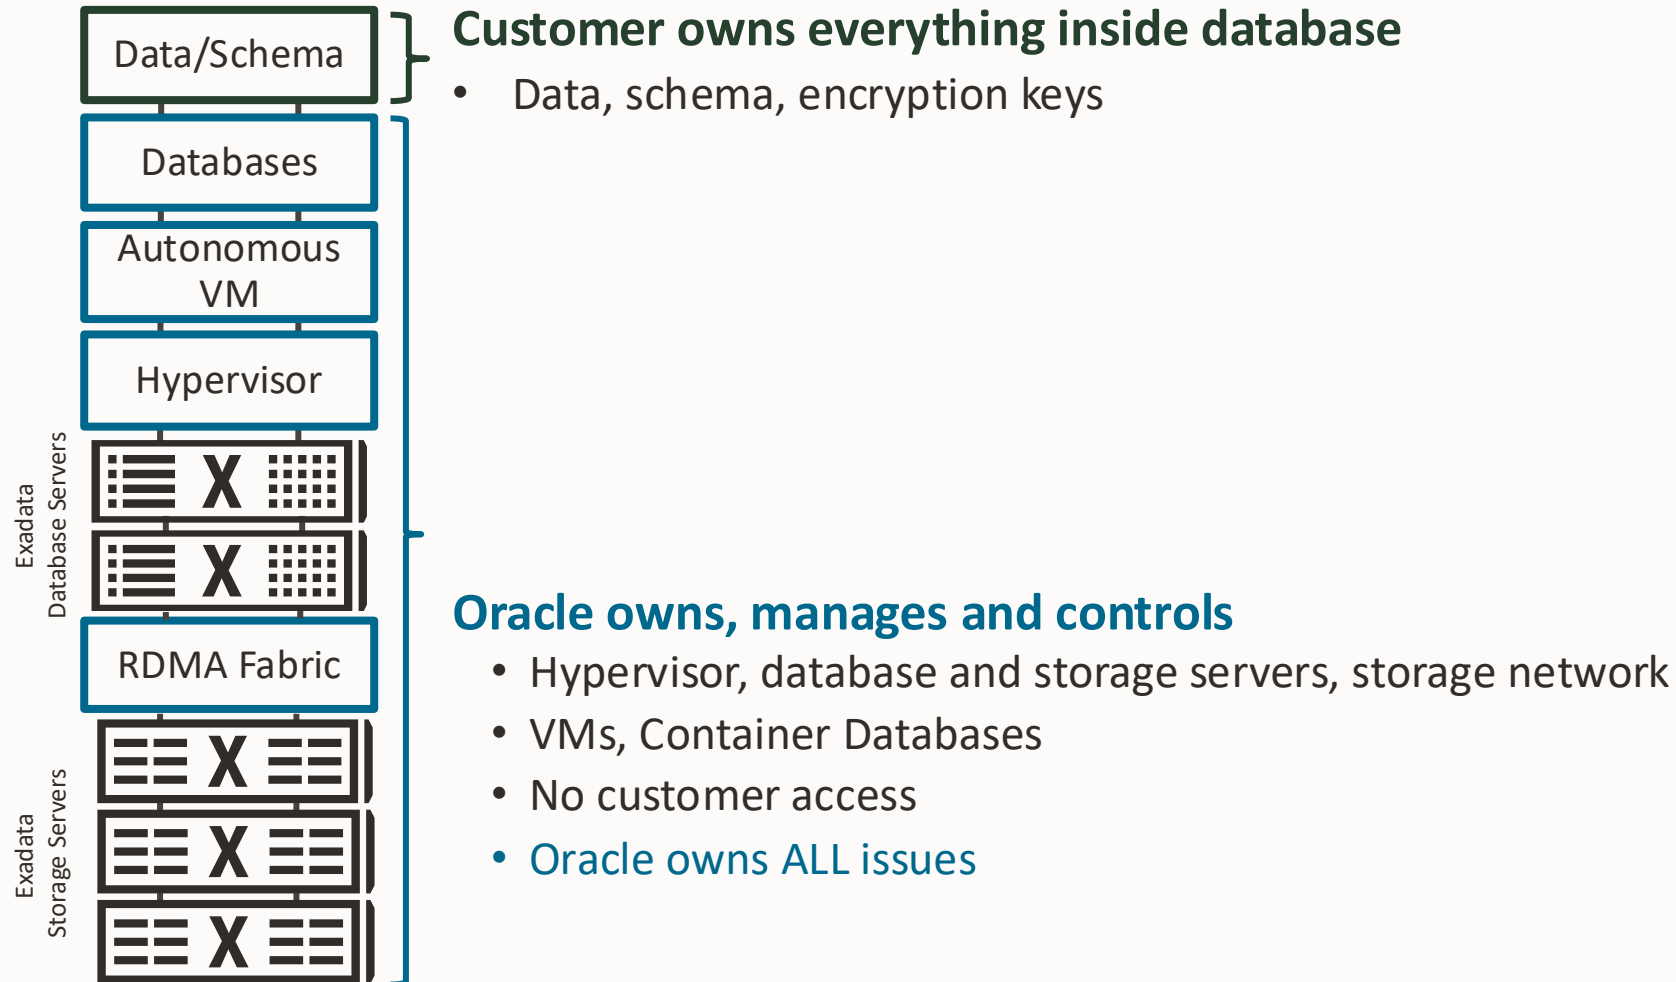



Autonomous AI Database on Dedicated Exadata Infrastructure

Service update release timelines

- Infrastructure and VM security updates


 - Released monthly
 - Updates are mandatory and online
- Infrastructure Exadata image updates

 - Released quarterly
 - Updates are recommended on availability
- Database release updates

 - Released quarterly
 - Updates are recommended on availability
- GI and Guest VM OS image updates

 - Released quarterly
 - Updates are recommended on availability

Chart indicates when updates arrive, but updates may be scheduled to apply with date and time flexibility within the applicable quarter or monthly boundary. All updates except security are allowed to skip 1 quarter.

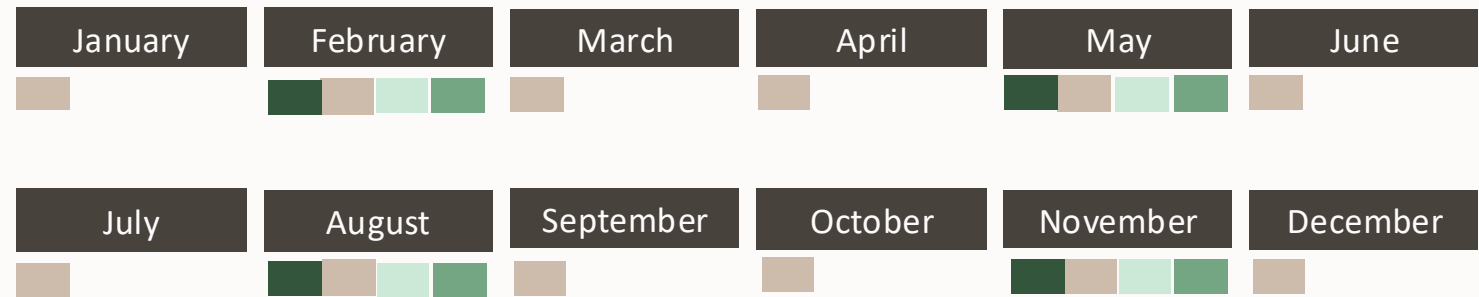

Autonomous AI Database Serverless (ADB-S)

Region Availability at GA

AWS Region	OCI Region	Availability Zones
GA (June 2026)		
US East (Northern Virginia)	US East (Ashburn)	1
US West (Oregon)	US West (Boardman)	2
Post-GA		
US, APAC, Europe, Sao Paulo	US, APAC, Europe, Sao Paulo	2 per region



Customer Experience across interfaces (at GA)

Action	AWS Interface (CLI, Console, CloudFormation)	OCI Interface (CLI, Console, CloudFormation)
Create	Supported	Not Supported
Read	Supported	Supported
Update	Supported	Supported
Delete	Supported	Not Supported



Zero Data Loss Autonomous Recovery Service (ZRCV)

Intelligent data protection for Oracle databases

Zero data loss recovery


- Real-time transaction protection
- Continuous recovery validation

Fast, low-impact backup and recovery

- Space-efficient incremental forever
- One-step recovery without needing incremental apply

Database-aware ransomware resiliency


- Immutable backups with retention lock
- Separation of duties and granular access control
- Logical airgap between the customer and Oracle Cloud operations tenancies
- Cross-domain and cross-region clean room support

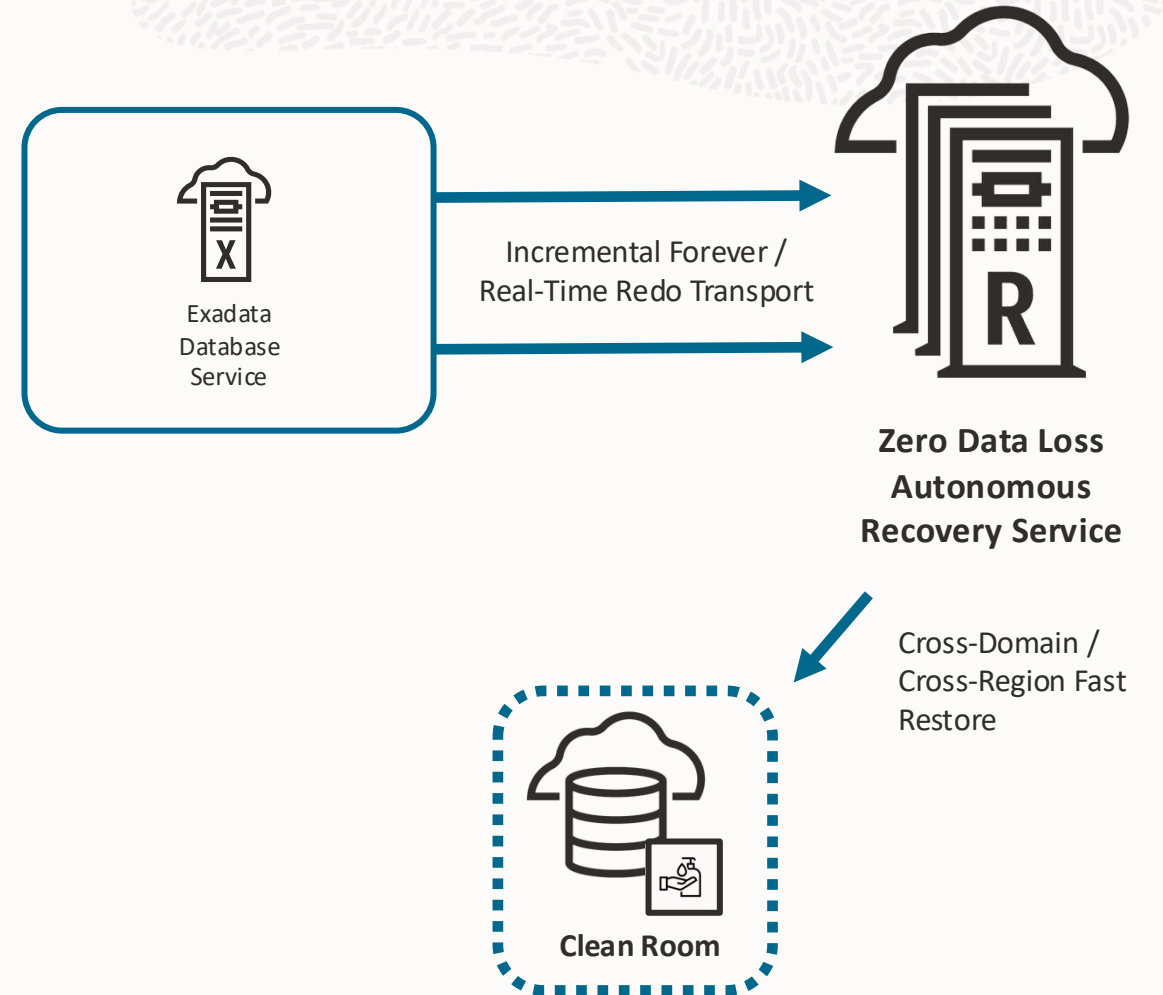

Service Responsibility

Transfer more responsibility to the service while lowering costs

Same license and infrastructure cost, greater value with Autonomous

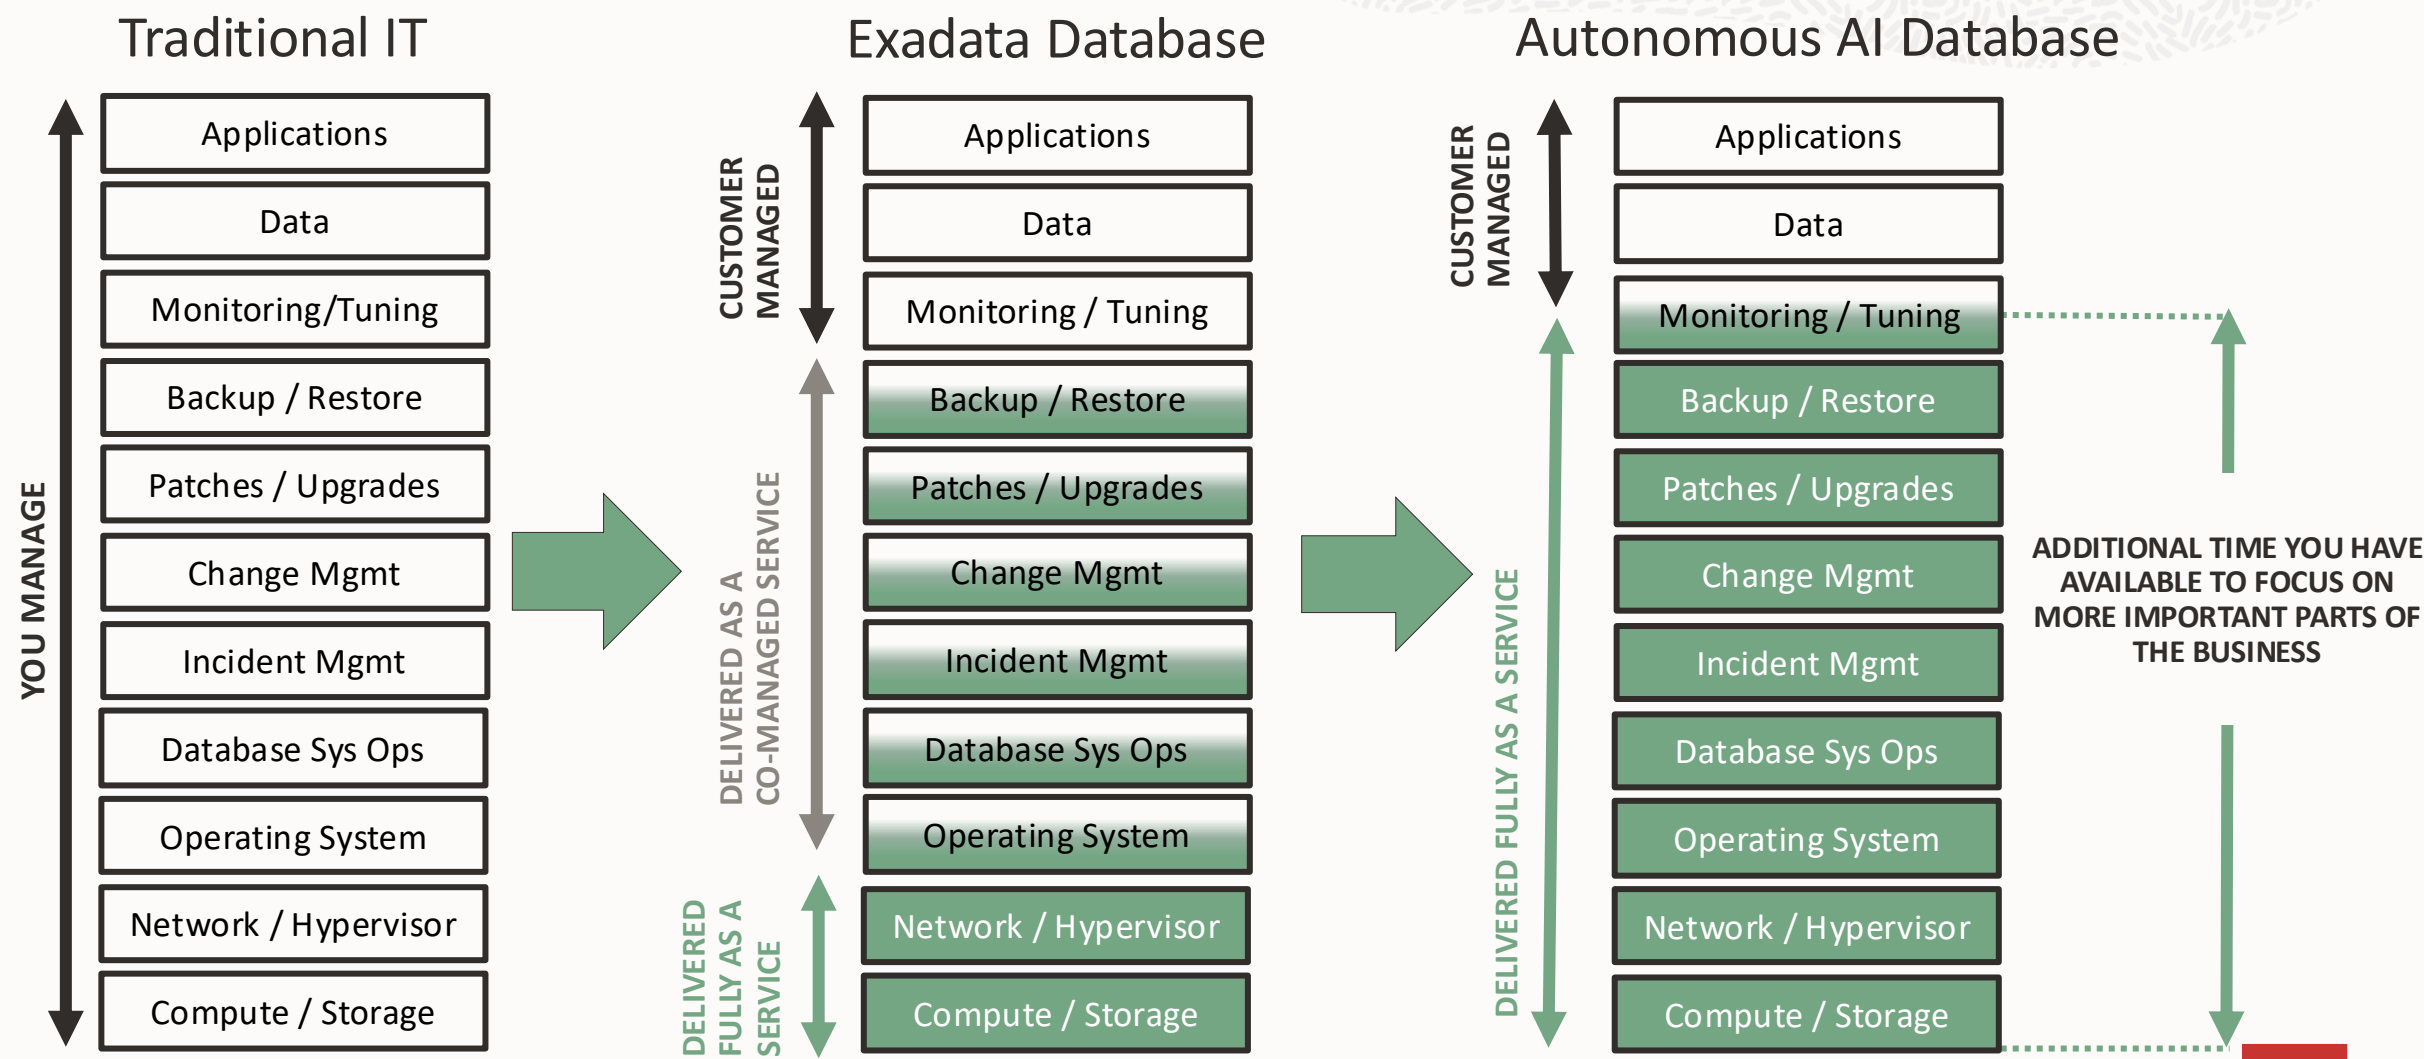

Shared Responsibility

Pluggable Database (PDB) and application data

Database Home and Container Database (CDB)


Grid Infrastructure

Virtual Machines in Exadata VM Cluster

Virtual infrastructure

Exadata Physical Machines Hardware

Physical network and accommodations

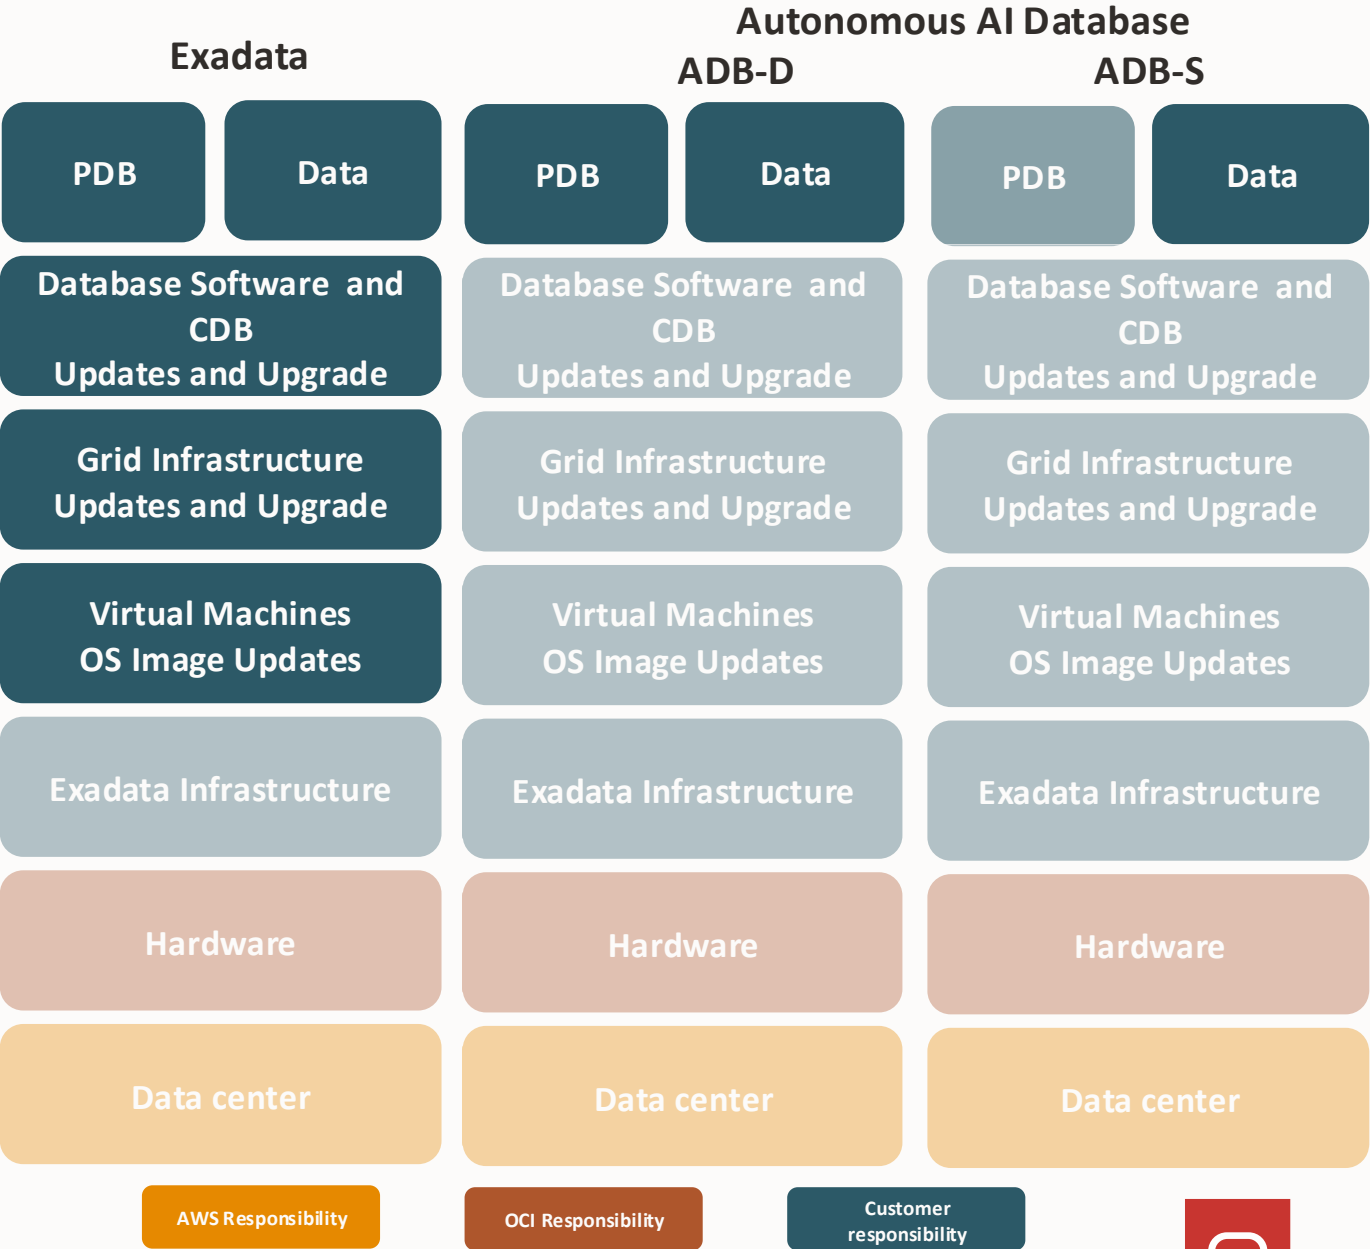

ADB-D: Enterprise Class Security for CSP managed environments


Operator Access Control for Regulated Industries

Provides **isolation zone** for highest protection from other tenants

- Data stored on dedicated servers only for one customer
- Further intra-company isolation with separate systems by SLA, Organization, Prod/Non-Prod, etc

ADB-D provides **Operator Access Control (OpCtl)** to enable customers to grant, audit, and revoke **cloud operator access** to Autonomous AI Database VMs

- For customers who have regulatory requirements to audit and control all aspects of their system management components they can access
- Exclusively customer granted access for operators with privilege scoped command shells and real-time logging integrated with customer SIEM. Moves operator PAM keys to service controlled by customer.

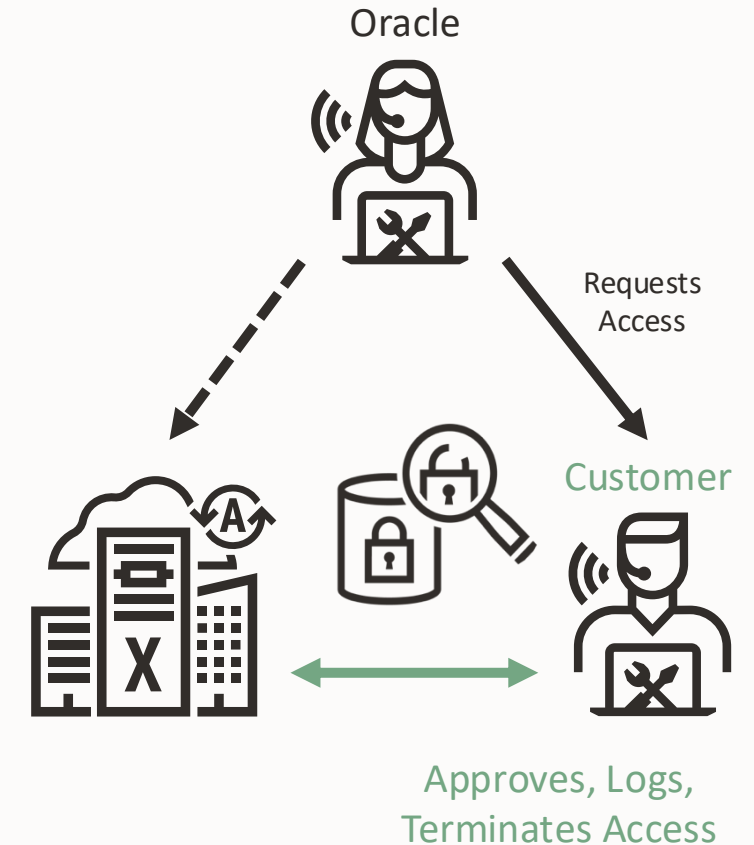

Enhanced Security for Regulated Industries

Licensing and Pricing


Choice of licensing models for maximum value

1. License Included

Ideal for organizations seeking to build new applications or expand functionality

Includes Exadata System Software, Oracle Database, All Options and Management Packs
at one low price

Pay-per-use pricing for ECPUs, all paid using Universal Credits



Oracle Database Software
+ All Options

2. Bring Your Own License (BYOL)

Ideal for organizations moving existing workloads

Utilize **existing on-premises licenses** to save on existing software support

Includes Exadata System Software, Exadata Columnar Cache, TDE, Data Safe, and select database management packs
at no additional cost




Reduce costs with elastic resource scaling

Align compute consumption with workload demands



Traditional database services and systems


Pay for all available processor resources regardless of usage

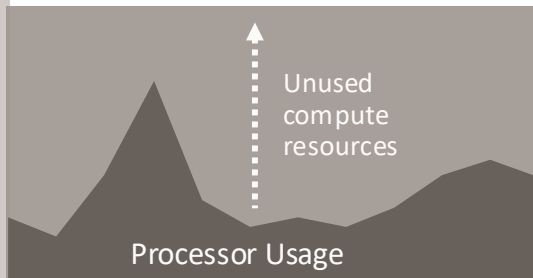

- 1 Sized for future peak workloads with all resources enabled
- 2 High cost for idle resources
- 3 Fixed compute costs based on available cores, not usage

Exadata Database Service


Scale enabled processors up for peak demands and down for normal needs

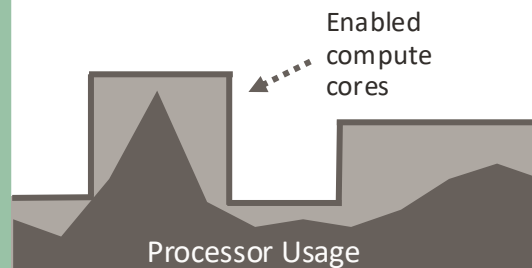

- 1 Administrators scale enabled database cores up or down based on workload demand
- 2 Scale enabled cores with scripts based on monitored use and predefined metrics
- 3 Only pay for enabled cores

Autonomous AI Database

Real-time scaling of consumption and costs based on demand

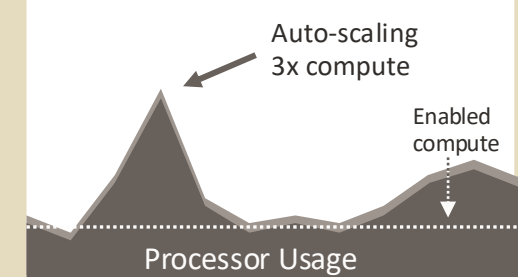

- 1 Built-in automatic scaling increases compute to meet workload demand spikes
- 2 Automatically scales database compute down when not required
- 3 Only pay for cores used


Exadata | Pricing Components

Choose the Infrastructure and match the DB Licensing by the scale of your environment



Select Infrastructure Shape

- Minimum footprint includes 2 DB / 3 Storage server nodes
- Meter is always running on the shape as long as the system is provisioned
- Scale out option to add incremental DB/Storage servers



Add DB & Storage nodes to scale:

- Independently add Compute and/or Storage nodes up to 32 DB servers and 64 storage servers to meet new requirements.
- A single DB server contains 192* usable cores and 1390 GB memory.
 - A single storage server contains 80 TB of usable disk storage capacity

* - based on X11M

Infrastructure Pricing components



Oracle Database 19c/26ai

Subscribe to License Included or BYOL (OCPU consumption)

- License Included subscription includes Enterprise Edition plus all Oracle Database options and management packs:
 - Includes advanced Oracle Database options such as Oracle RAC, Active Data Guard, and Database In-Memory plus **Oracle Support**
- BYOL requires existing Enterprise Edition and applicable Oracle Database option licenses
- Metering Min is 48hrs and then per second

ECPU component





Autonomous AI Database Serverless subscription options

Subscription options

Simple price structure: Pay As You Go or Universal Credits

Also available:

- **Bring-your-own-license (BYOL):** Use existing on-premise Oracle Database licenses and save 75%
- **Mix-and-match:** Combine BYOL and license-included to ensure that BYOL limits are not exceeded

Pay per Database


- Starts at 2 ECPUs
- Each database is billed independently
- Available as subscription or BYOL
- BYOL includes Transparent Data Encryption, Data Safe, Partitioning, Advanced Compression, and select management packs at **no additional cost**

Pay per Elastic Pool


- Starts at 128 ECPUs
- Aggregate dozens of hundreds of databases into a single bill
- **Up to 4-8x cost savings** vs per-database pricing
- No changes to database functionality, scalability or performance
- Available as license-included or BYOL

Networking

Single VPC

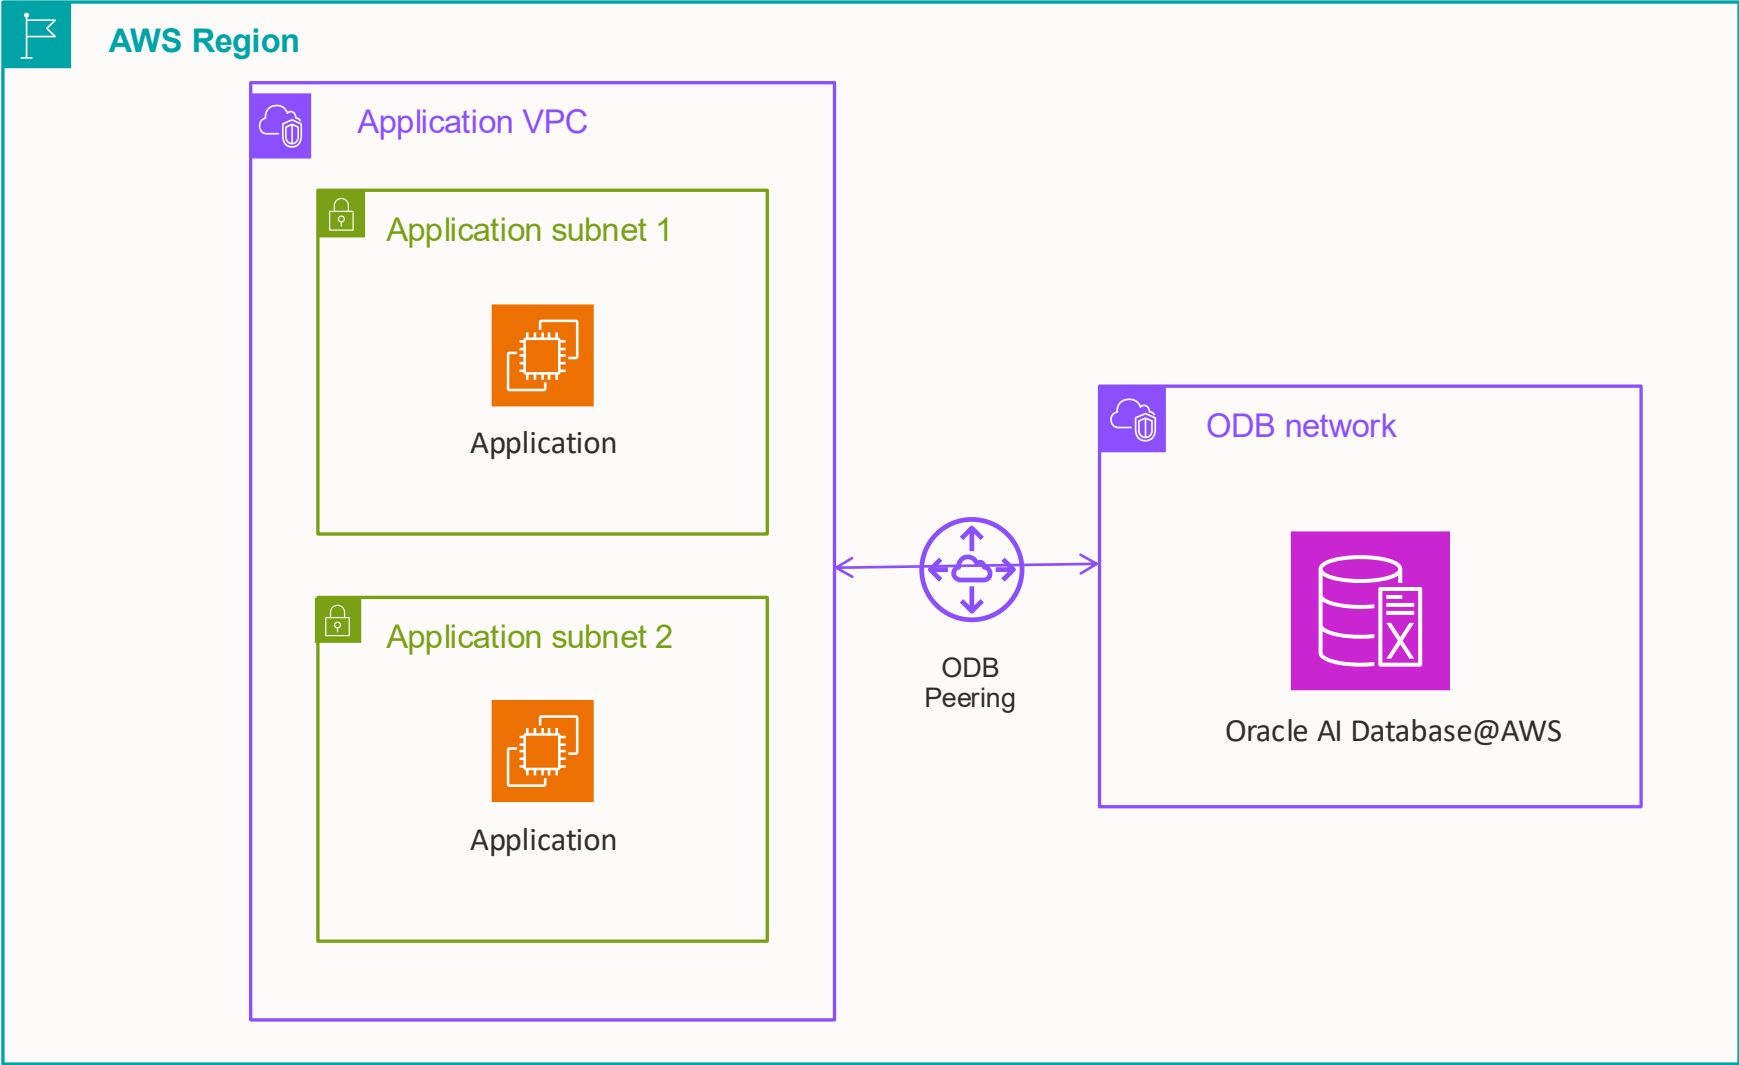


Multiple VPCs to One ODB Network

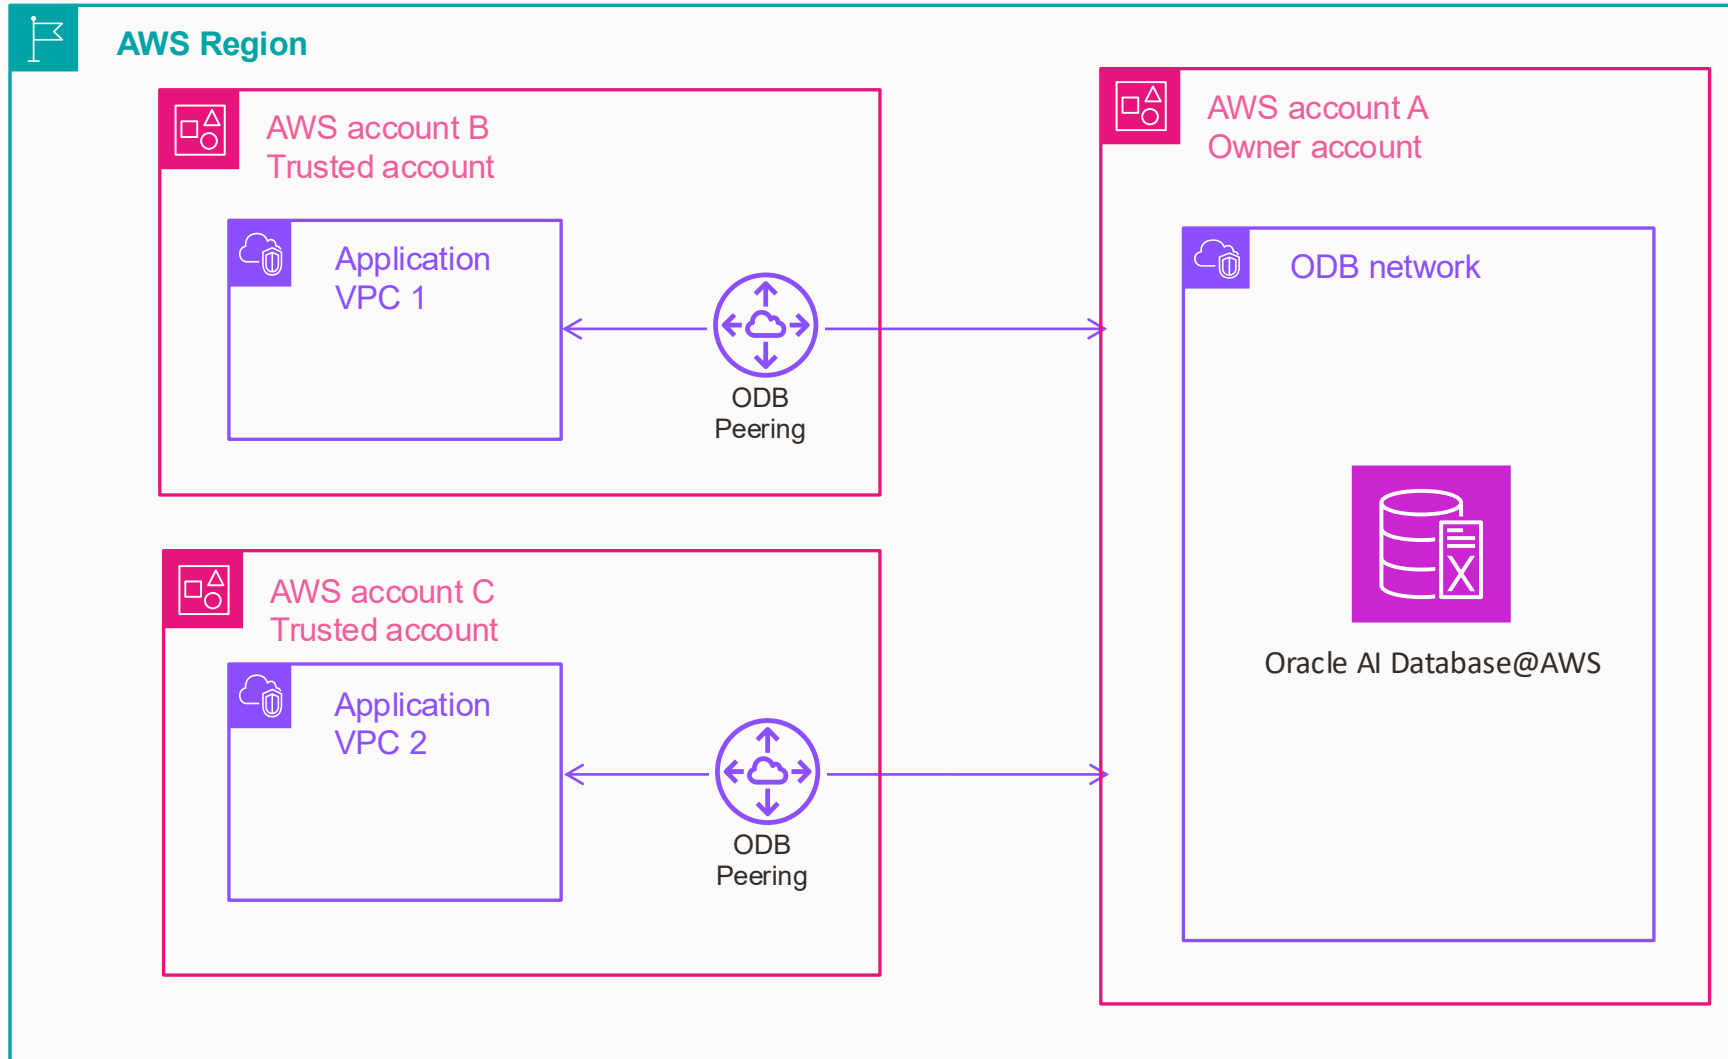


- 1 ODB peering connection 1VPC:1 ODB network
- 1 ODB network supports up to 45 ODB peering connections
- ODB network can be shared with AWS RAM


One VPC to Multiple ODB Networks

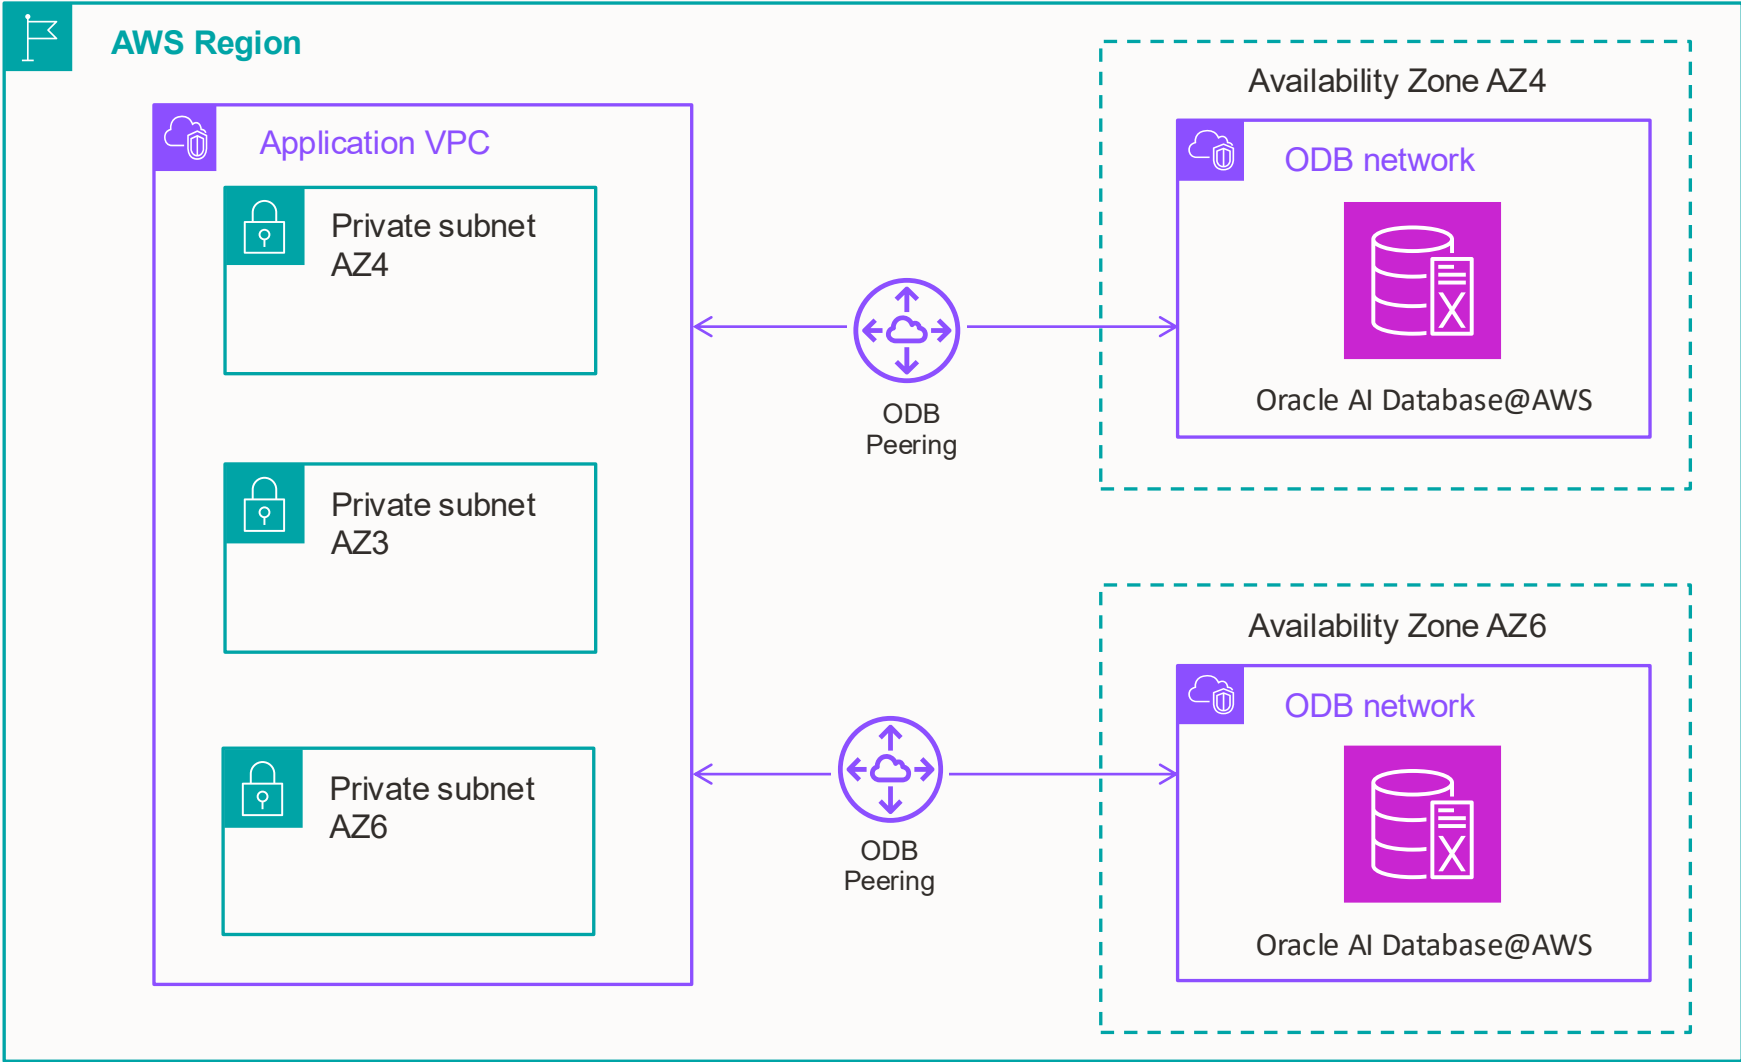


AWS Hub and Spoke Design

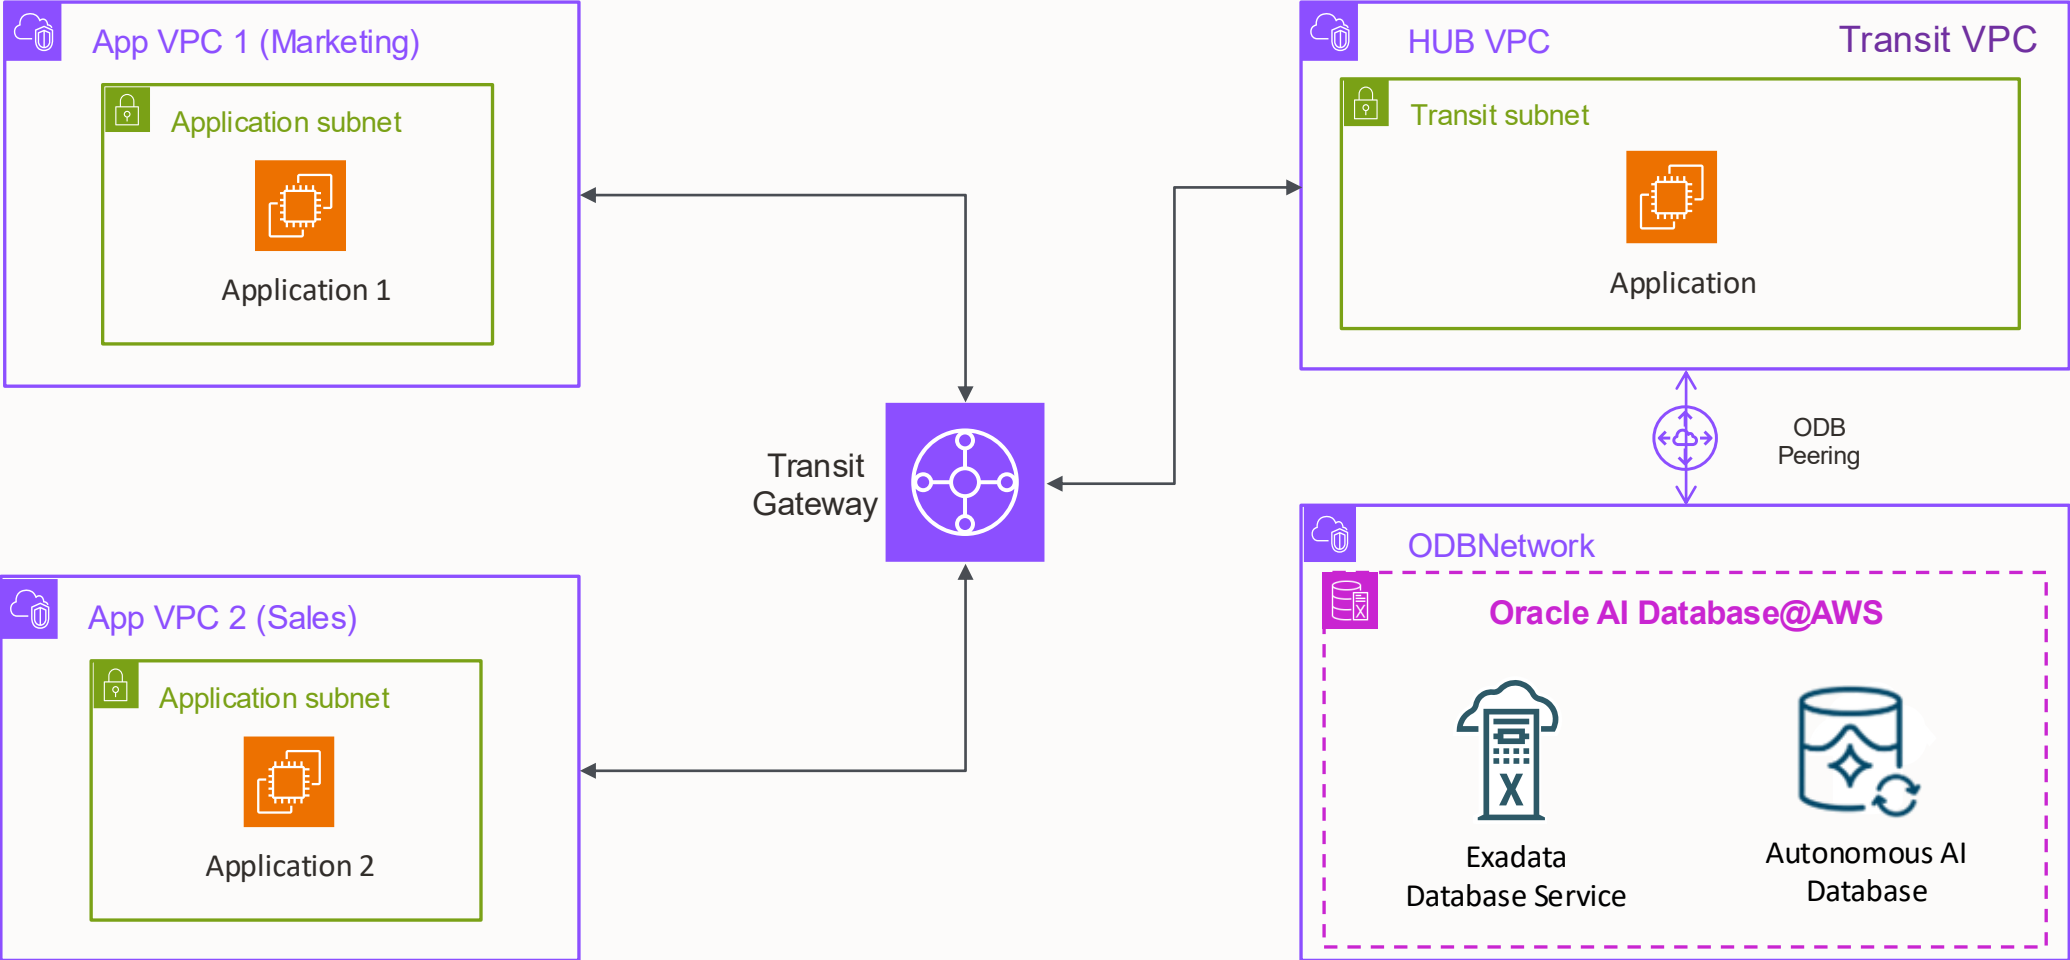


AWS – Cross Region

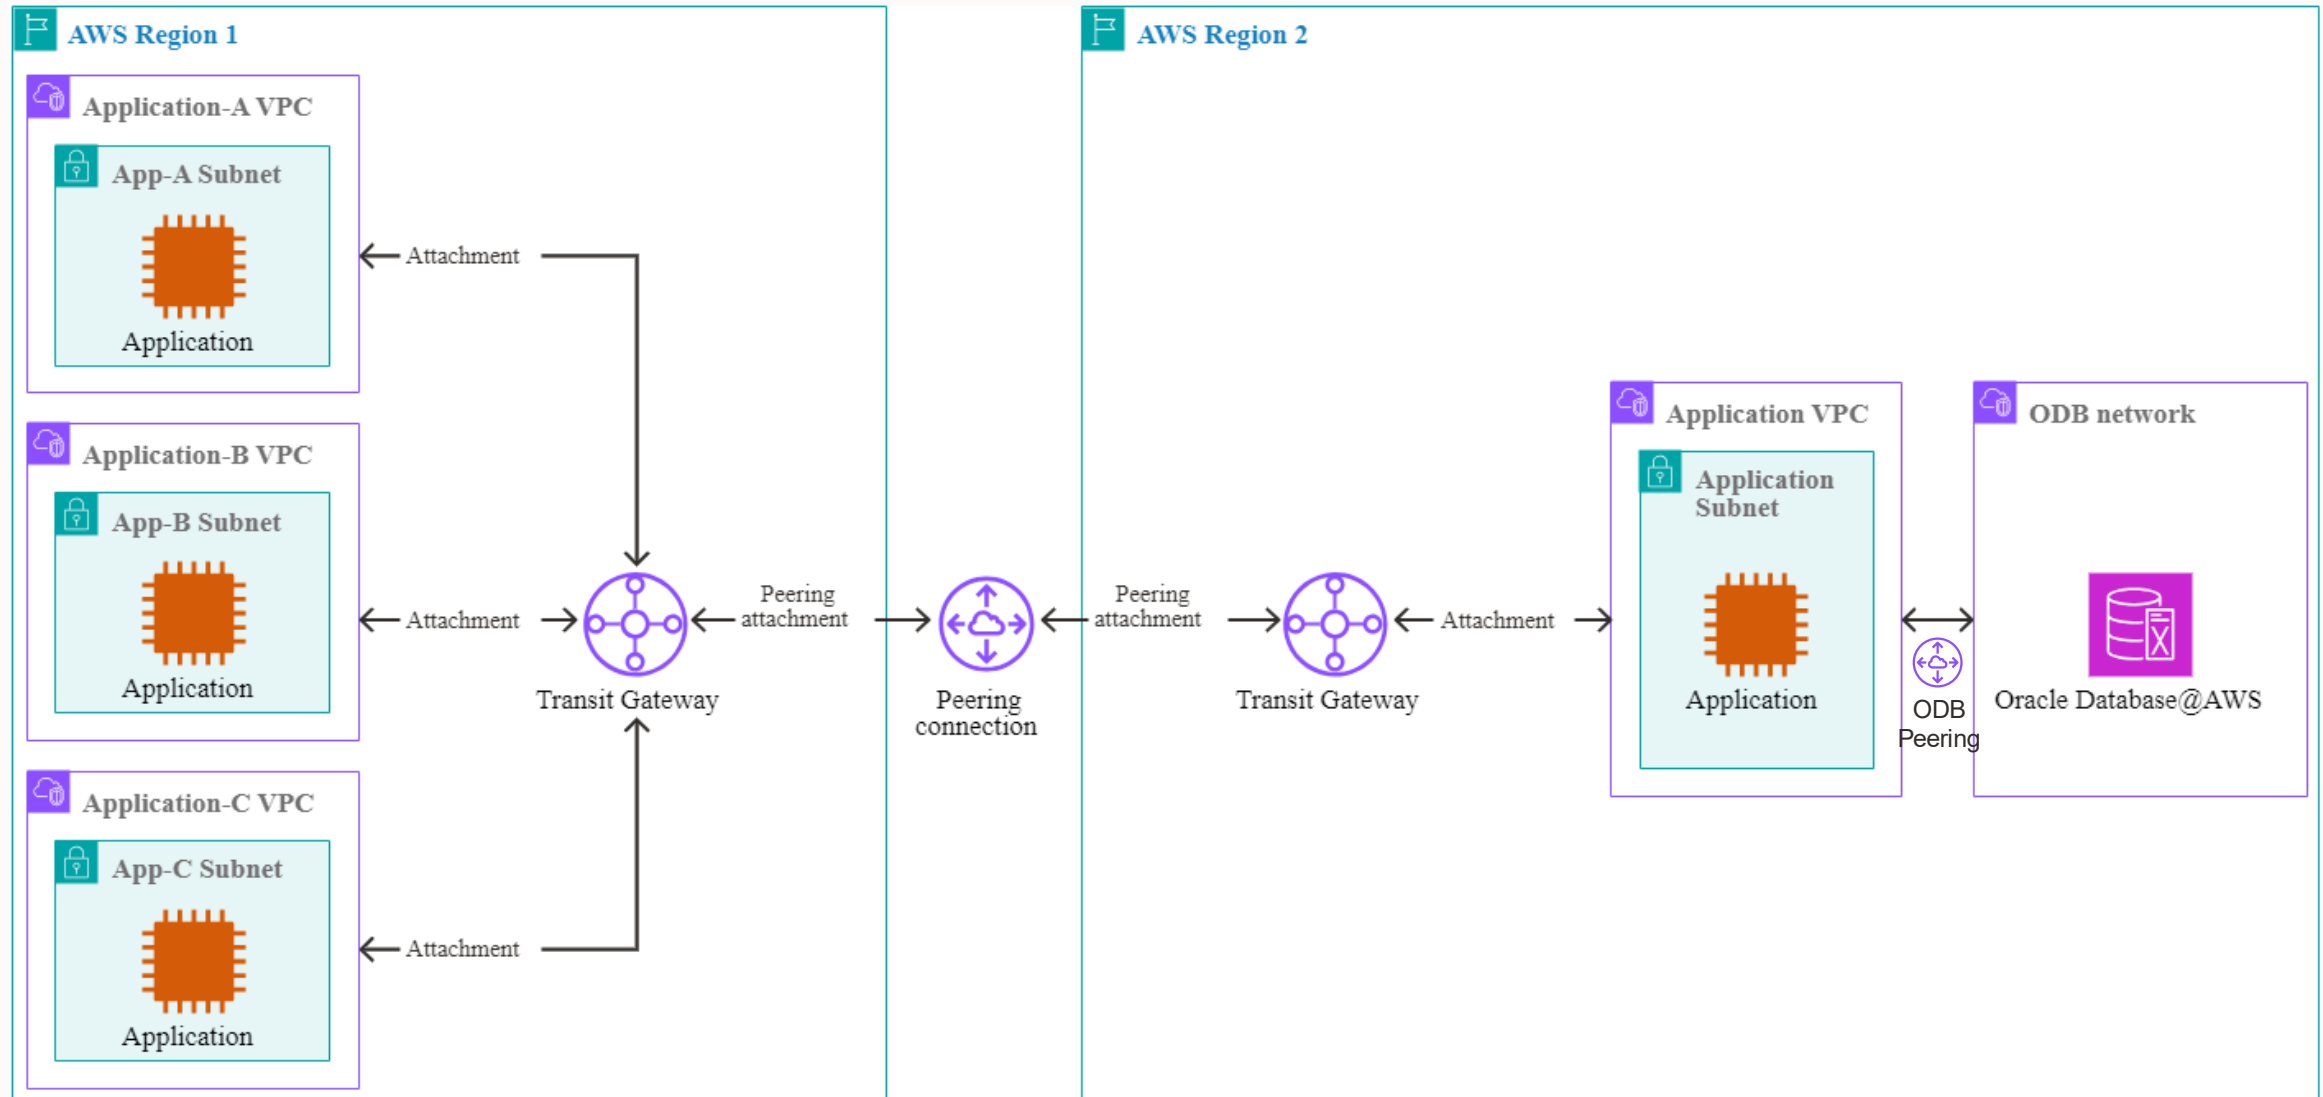


AWS Hub-and-Spoke On-Premises Applications Topology

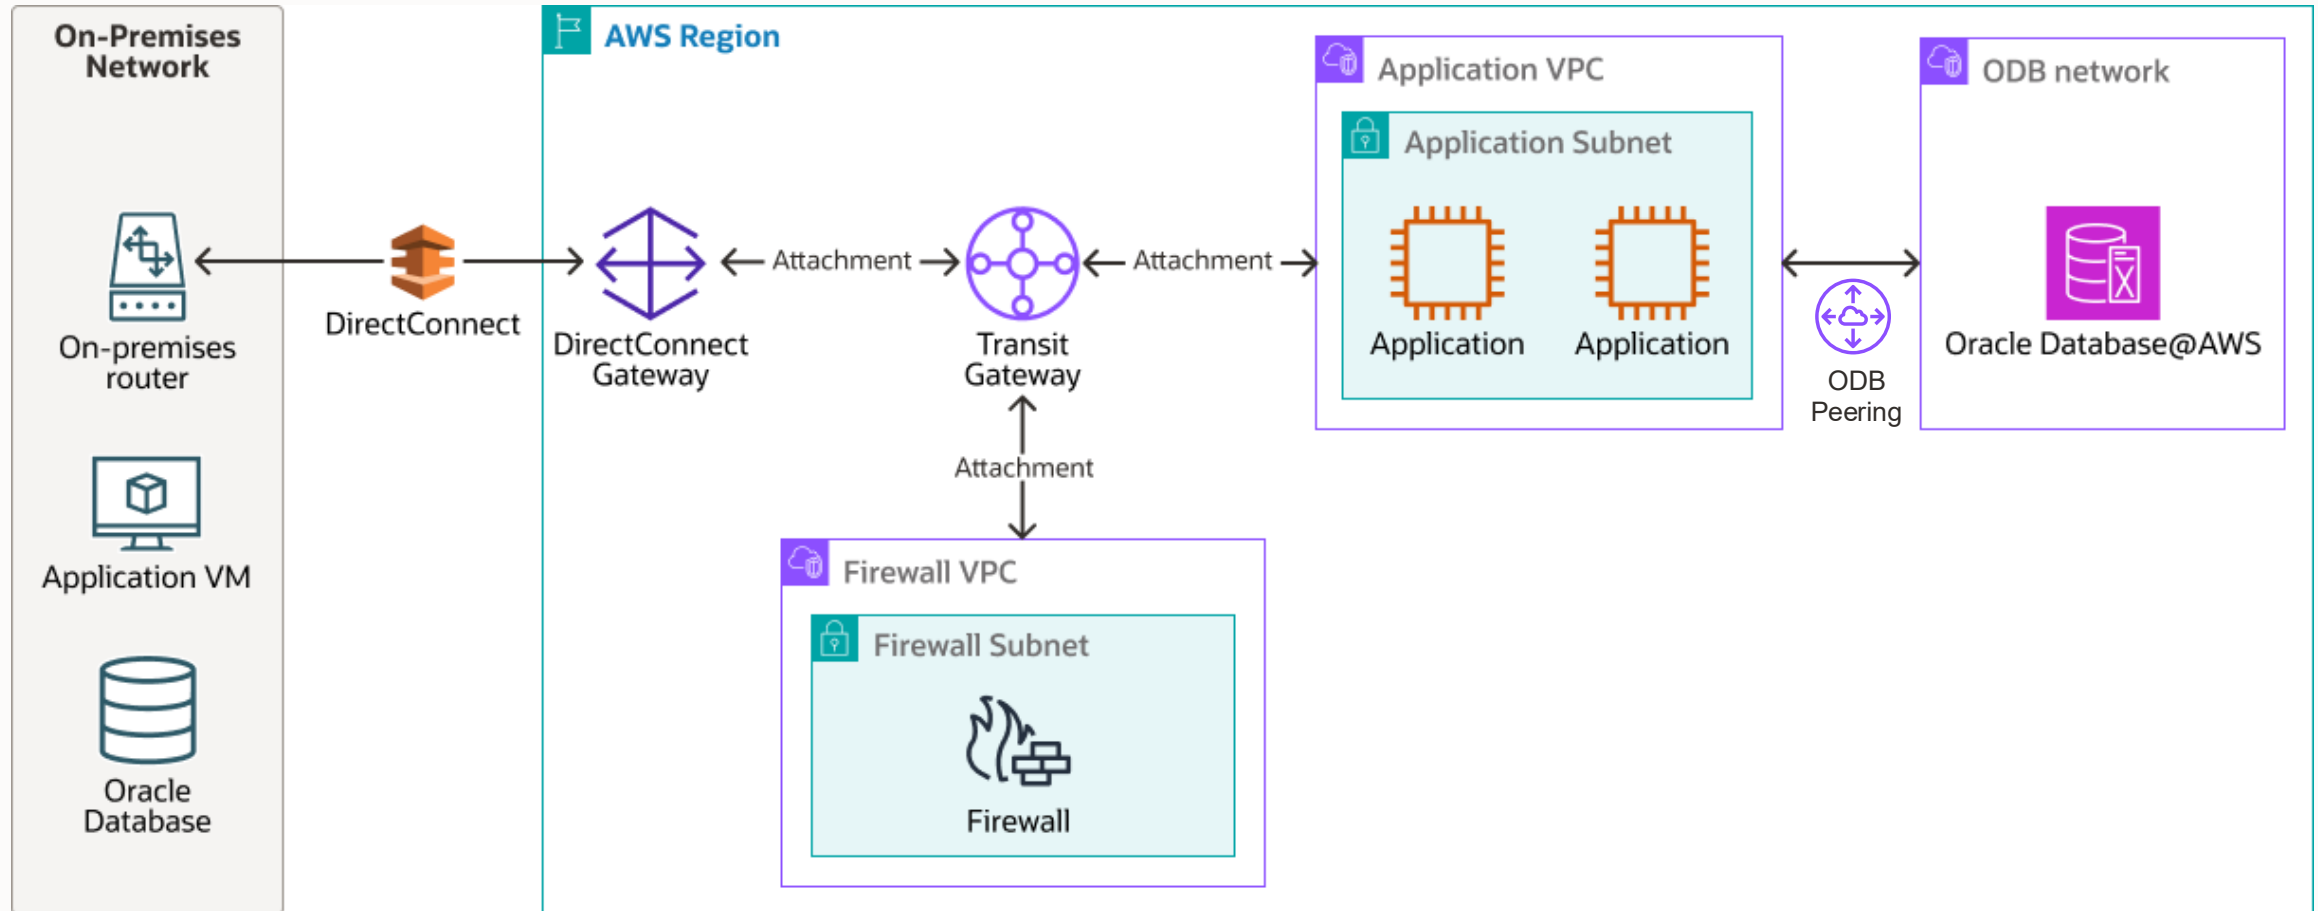

AWS Hub-and-Spoke On-Premises Applications Topology

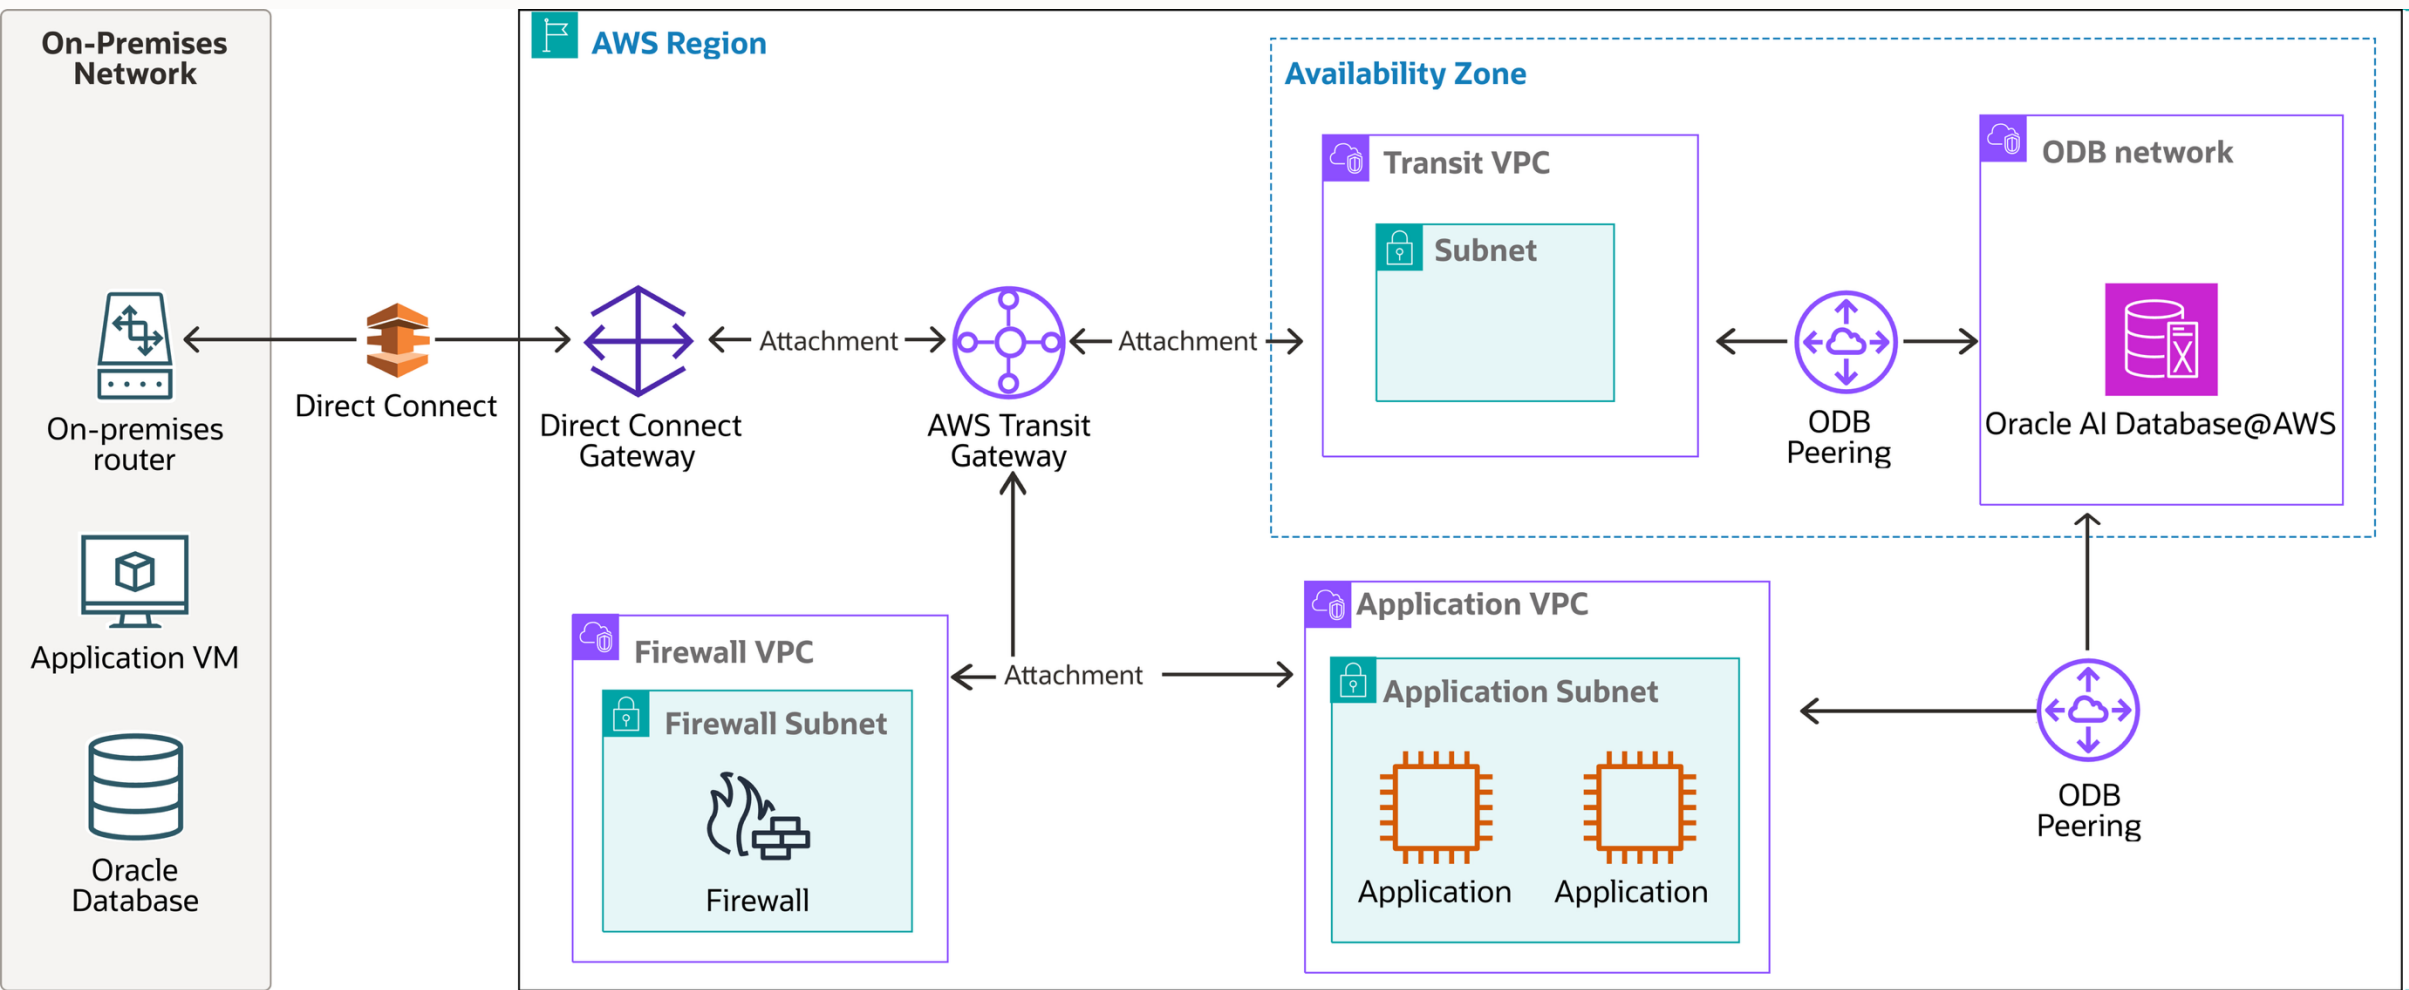

AWS Same AZ with Multiple VM Clusters Topology

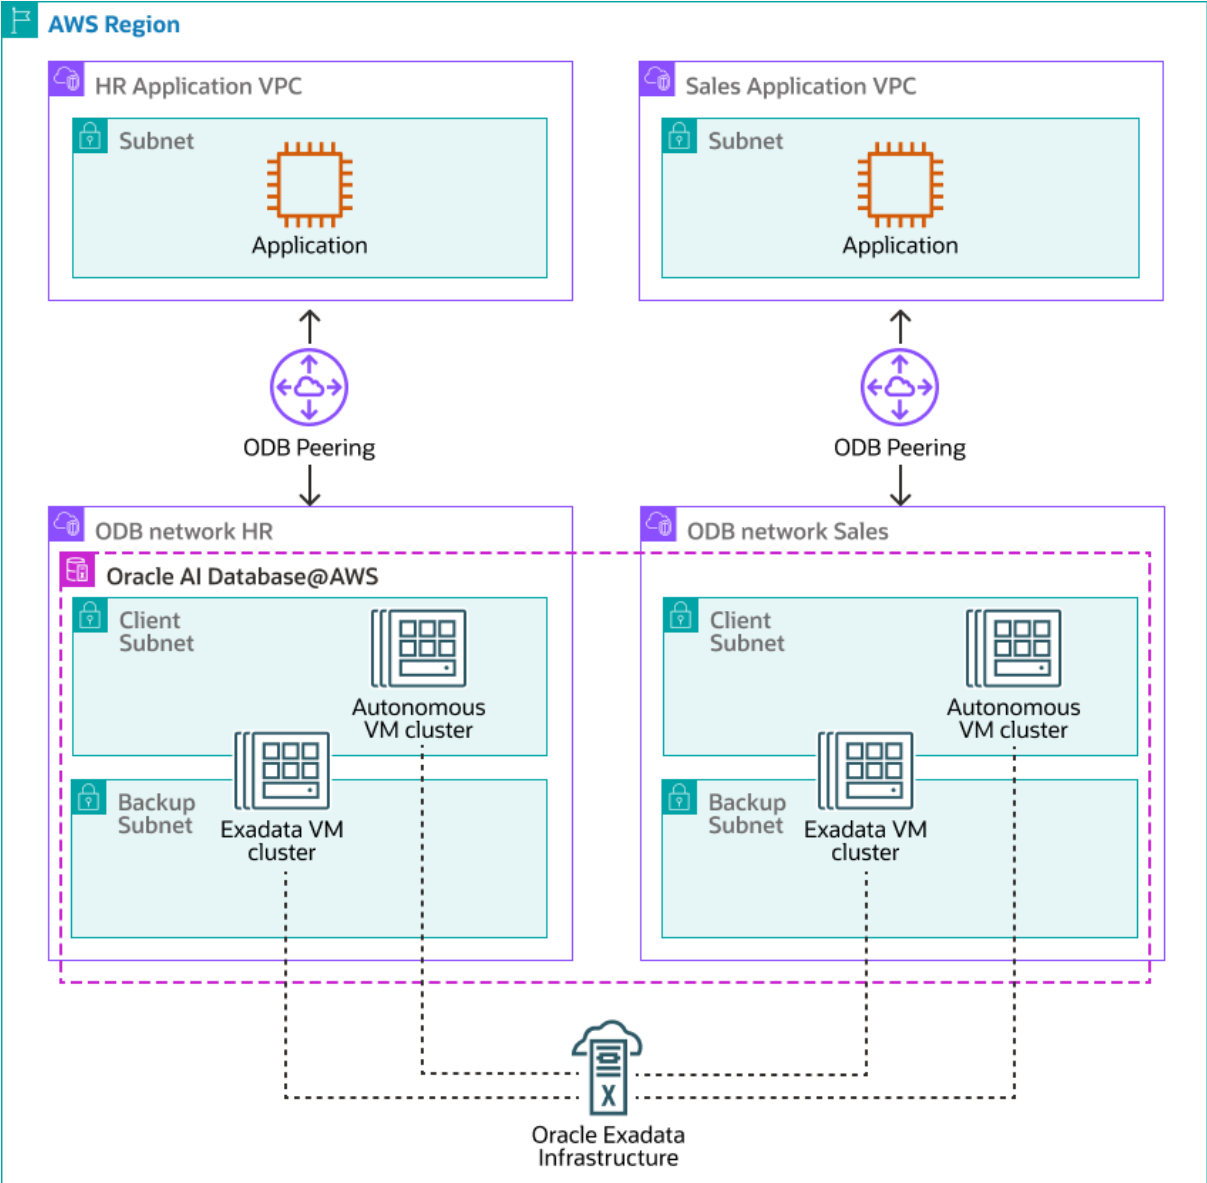

ODB Network – Considerations

Zonal & Fixed Setup

- ODB network is tied to a **single availability zone**
- **CIDR ranges (Client/Backup)** cannot be changed after creation
- **Backup subnet cannot be added later**
- Backup subnet:
 - Optional for **ADB-D, ADB-S**
 - Required for **ExaDB-D**

CIDR Restrictions

- No overlap allowed:
 - Between **Client & Backup subnets**
 - With **VPC CIDR ranges**
- Must use **private IPv4 ranges** (e.g., 10.x, 172.16.x, 192.168.x)

Network Scope

- Network is tied to the **VM cluster**
- All VM nodes will be in the **same ODB network**

Disallowed CIDR Ranges

- 100.64.0.0/10 (OCI interconnect)
- 169.254.0.0/16 (Oracle reserved)
- 224.0.0.0 – 239.255.255.255 (Class D)
- 240.0.0.0 – 255.255.255.255 (Class E)

Additional Limitation

- Cannot use certain VPC CIDRs listed under **restricted associations**



ADB-S Network access

Access Type	
Secure access from everywhere	Public endpoint, allow users with database credentials to access the database from the internet.
Secure access from allowed IPs and CIDR blocks only	Public endpoint, restrict access to specified IP addresses and CIDR blocks.
Private endpoint access only	Restrict access to a private endpoint within an ODB Network (new or existing)



DNS Configuration – ODB Network

ODB Network supports Domain name configuration :

1. Default domain name: **oraclevcn.com**

- Define domain prefix
 - Limited to 15 characters
- Apply to ADB-D and ExaDB-D

2. Custom domain name: **<yourcustomdomain>.com**

- Limited to 253 characters
- OCI private view is created in the OCI VCN DNS resolver
- Apply to ExaDB-D only

DNS configuration

Set the domain name to use for all resources provisioned for this ODB network, including SCAN and VM host names. The default is oraclevcn.com and you must include your own domain name prefix or choose your own custom domain name.

- ☒ Default
- ☐ Custom domain name

Domain name prefix - optional

Enter a custom domain name prefix to use for all resources provisioned with this ODB network, including SCAN names and VM host names.

my-domain-name-prefix

The domain name prefix must be 1-15 letters or numbers, and must start with a letter.

Domain name


oraclevcn.com

DNS resolution – Oracle Database

The service provides two DNS endpoints in the OCI VCN:

- Listener
- Forwarder

Configure Route53 inbound and outbound endpoints to forward DNS queries

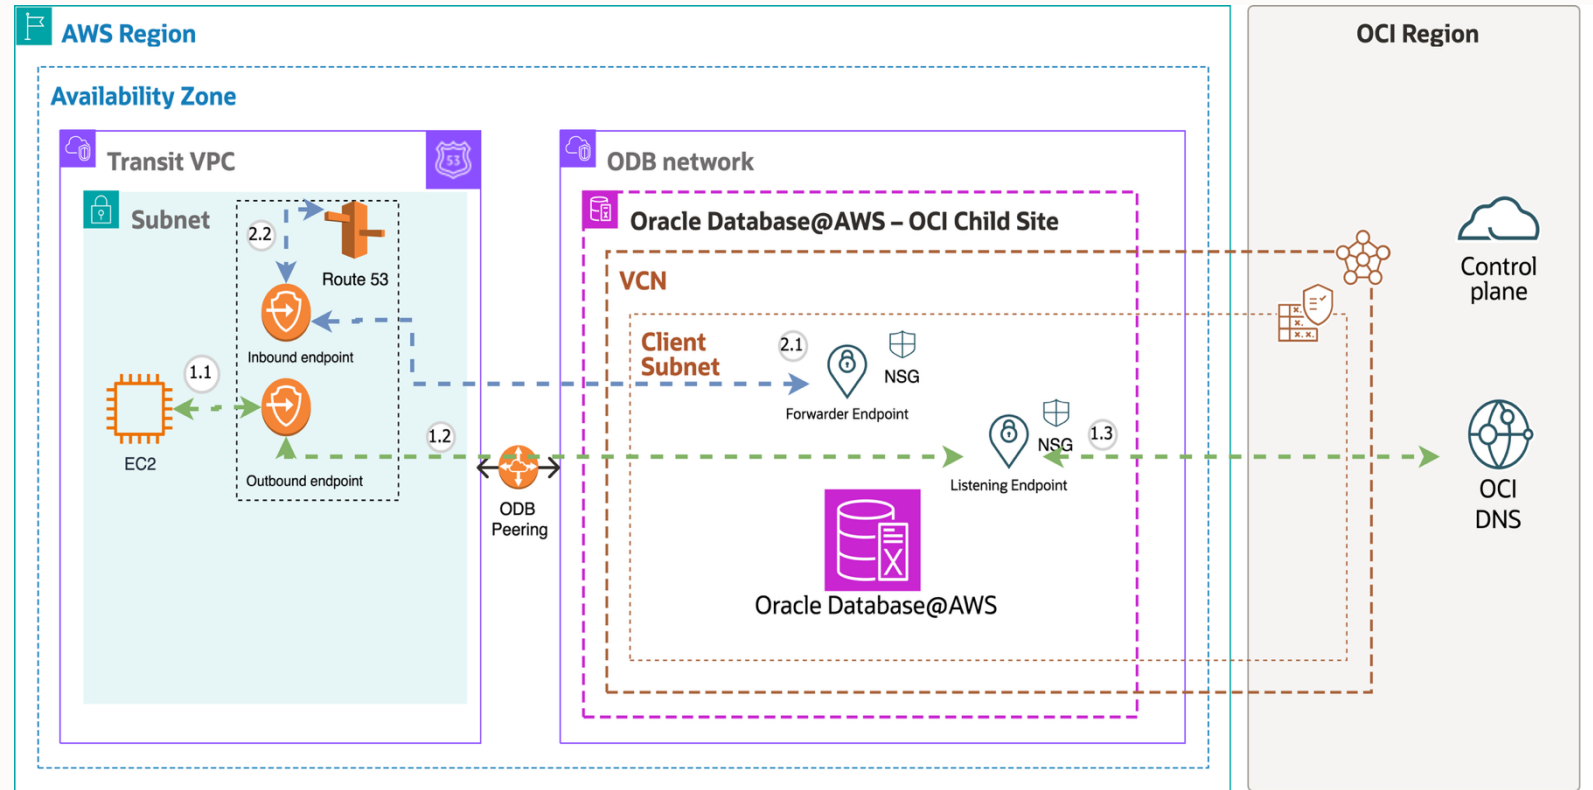

ODB network

From AWS console:

- Domain name
- OCI DNS listening endpoint IP

demo-odb-network-07

Summary

OCI resources

Status Available Availability Zone us-east-1b ODB network ARN arn:aws:odb:us-east-1:182399700237:odb-network/odbnet_9spquv21at ODB network ID odbnet_9spquv21at Created Jul 11, 2025, 00:49:51 GMT+02:00	Client subnet CIDR range 10.7.10.0/24 Backup subnet CIDR range 10.7.11.0/24 Peered CIDRs 10.77.0.0/16	DNS configuration Domain name DNS listener IP 10.7.10.60
--	---	--



OCI Custom domain name and Private resolvers' endpoint

← Private zones

Private zone

Active

Actions

Details

Records

Work requests

Tags

Records

Listed records are grouped by RRSet. An RRSet is a collection of DNS records of the same domain and type.

Search and Filter

Manage records

Domain ^	Type	TTL	RDATA
▶ demo07.com	NS Protected	86400	vcn-dns.oraclevcn.com.
▶ demo07.com	SOA Protected	86400	vcn-dns.oraclevcn.com. hostmaster.oracle.com. 8 3600 3600 3600 10
mydemo-2jd3p-scan.demo07.com	A	3600	10.7.10.36 10.7.10.78 10.7.10.250
mydemo-2jd3p1-backup.demo07.com	A	3600	10.7.11.183
mydemo-2jd3p1-vip.demo07.com	A	3600	10.7.10.58
mydemo-2jd3p1.demo07.com	A	3600	10.7.10.251
mydemo-2jd3p2-backup.demo07.com	A	3600	10.7.11.58

← Private resolvers

Private resolver

Active

Details

Rules

Associated private views

Endpoints

Monitoring

Work requests

Tags

Endpoints

Search and Filter

Create endpoint

Name	State	Subnet	Forwarding address	Listening address	Created ^
forwarder	Active	client-subnet	10.7.10.66	—	Thu, 10 Jul 2025 23:31:03 UTC
listener	Active	client-subnet	—	10.7.10.60	Thu, 10 Jul 2025 23:31:03 UTC

◀ ▶

Page 1 of 1 (1 - 2 of 2 total items)


Items per page



Maximum Availability Architecture

Oracle Maximum Availability Architecture (MAA)

Standard Reference Architectures for Never-Down Deployments

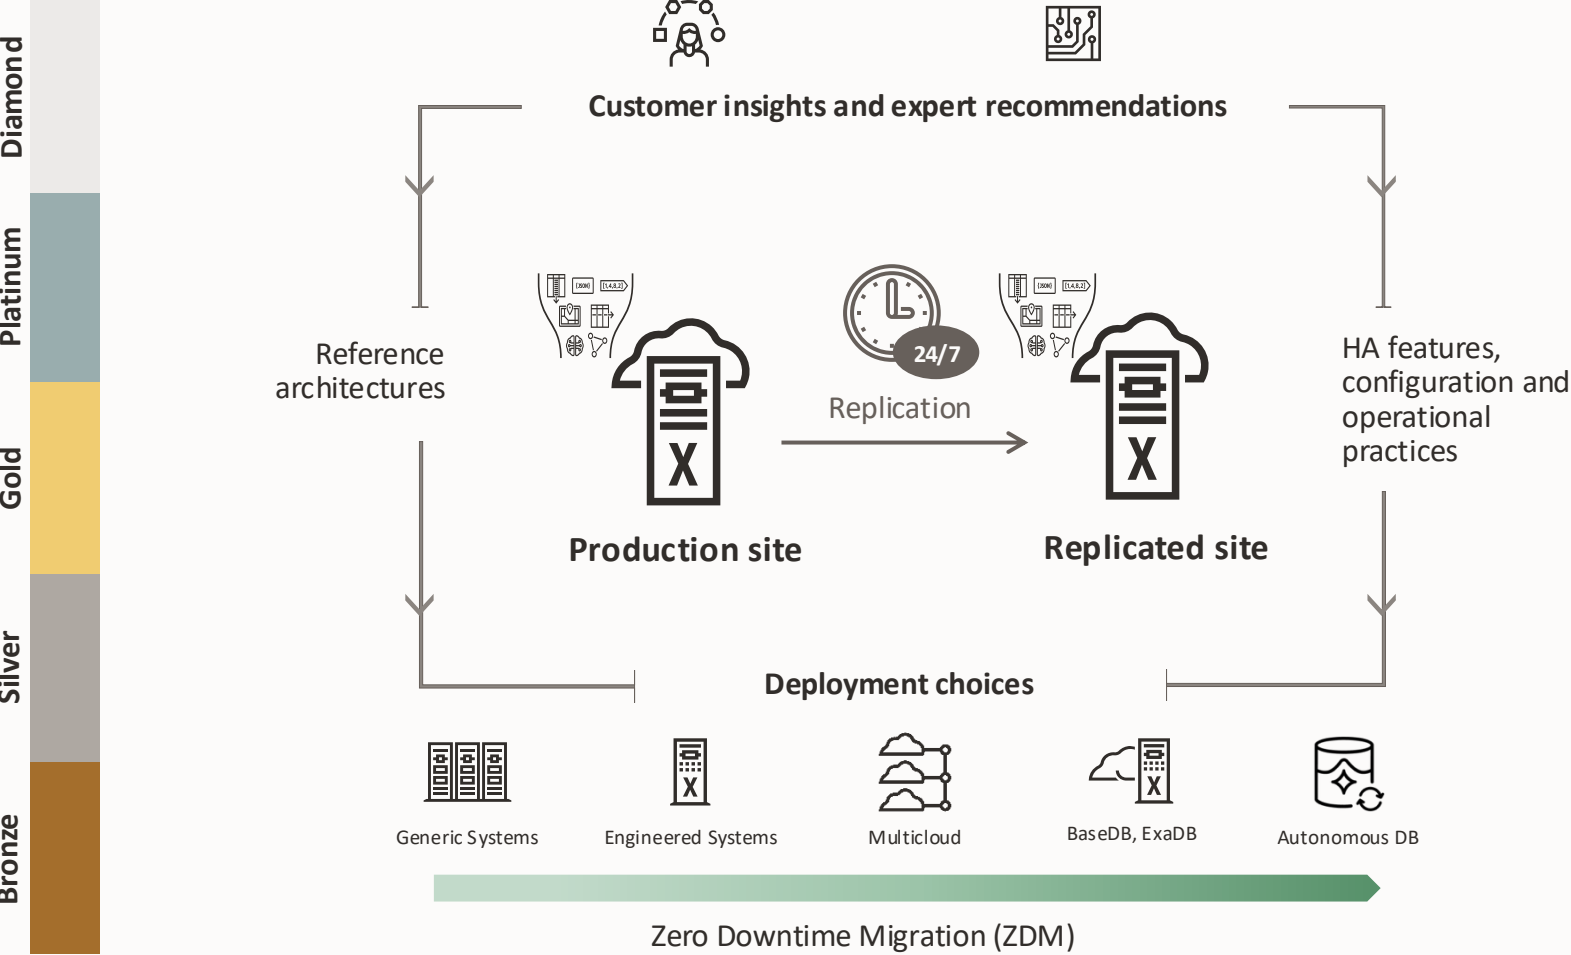

High performance

- Resource Management
- Database In-Memory
- True Cache

Continuous availability

- Application Continuity
- Online Redefinition
- Edition-based Redefinition

Data protection

- Flashback
- RMAN
- ZDLRA+ ZRCV

Active replication

- Active Data Guard
- Full Stack DR
- GoldenGate

Scale out & Lifecycle

- RAC
- Globally Distributed Database
- FPP
- Real Application Testing



Oracle MAA Reference Architectures

Availability service levels for Oracle AI Database

Bronze

Dev, test, prod

Single instance DB
Restartable
Backup/restore



Recoverable local failure: Minutes to hour
Disasters: Hours to days
RPO < 15 min

Silver

Prod/departmental

Bronze +

Database HA with RAC or Local Data Guard
Client failover HA best practices
Application Continuity (optional)



Recoverable local failure: seconds to minutes
Disasters: Hours to days
RPO < 15 min

Gold

Business critical

Silver with RAC +

DB replication with (Active) Data Guard with automatic failover
Client failover DR best practices



Recoverable local failure: Less than 60 seconds
Disasters: < 5 min
RPO = zero or near zero

Platinum

Mission critical

Gold with Exadata and either option:

Option 1: GoldenGate with Oracle Database 19c
OR
Option 2: (Active) Data Guard with Oracle AI Database 26ai



Recoverable local failure: Less than 20 seconds
Disasters: < 30 secs
RPO = zero or near zero

Diamond (NEW)

Extreme availability

Configuration

GoldenGate 26ai replicas, each running:

Oracle AI Database 26ai + RAC on Exadata + (Active) Data Guard



Recoverable local failures: Less than 10 seconds
Disasters zero to 10 secs
RPO = zero or near zero



Oracle MAA certifications for Oracle AI Database@AWS


MAA Certification	Exadata Database Dedicated	Autonomous AI Database
		Planned
		Planned
		



Oracle Exadata Database Service on Dedicated Infrastructure



Oracle MAA Silver level architecture

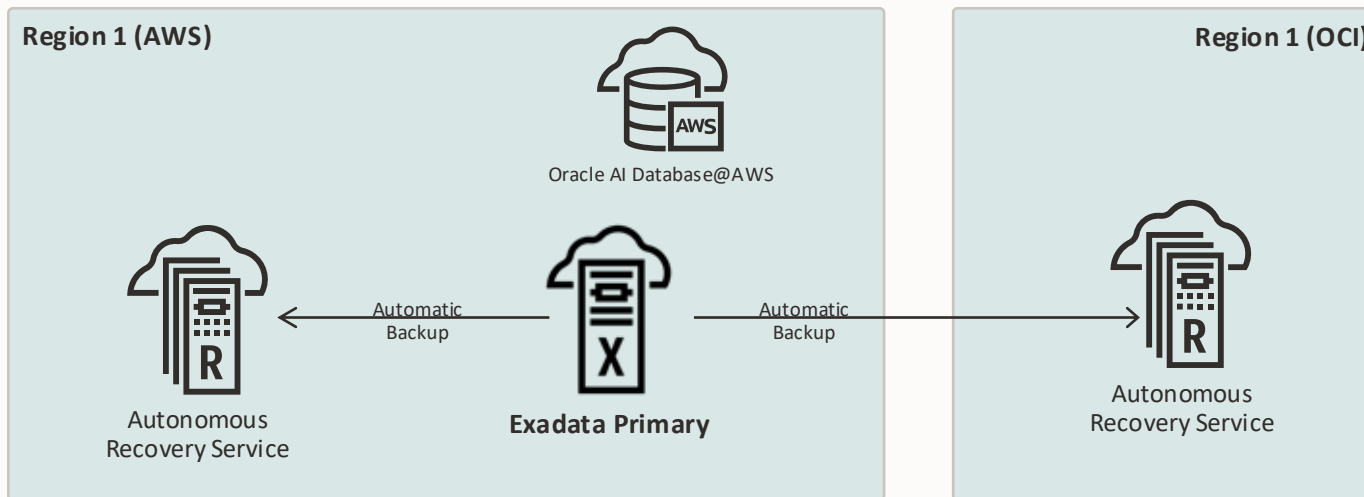

High availability built-in by default

Oracle Exadata and Oracle RAC

- ✓ Agility to scale storage, compute, and memory without downtime
- ✓ Node failure protection
- ✓ Zero downtime maintenance

+ Zero Data Loss Autonomous Recovery Service


- ✓ Zero data loss recovery
- ✓ Fast, low impact backup & recovery
- ✓ Database-aware ransomware resiliency





Oracle Exadata Database Service on Dedicated Infrastructure

Oracle MAA Gold level cross-zones architecture

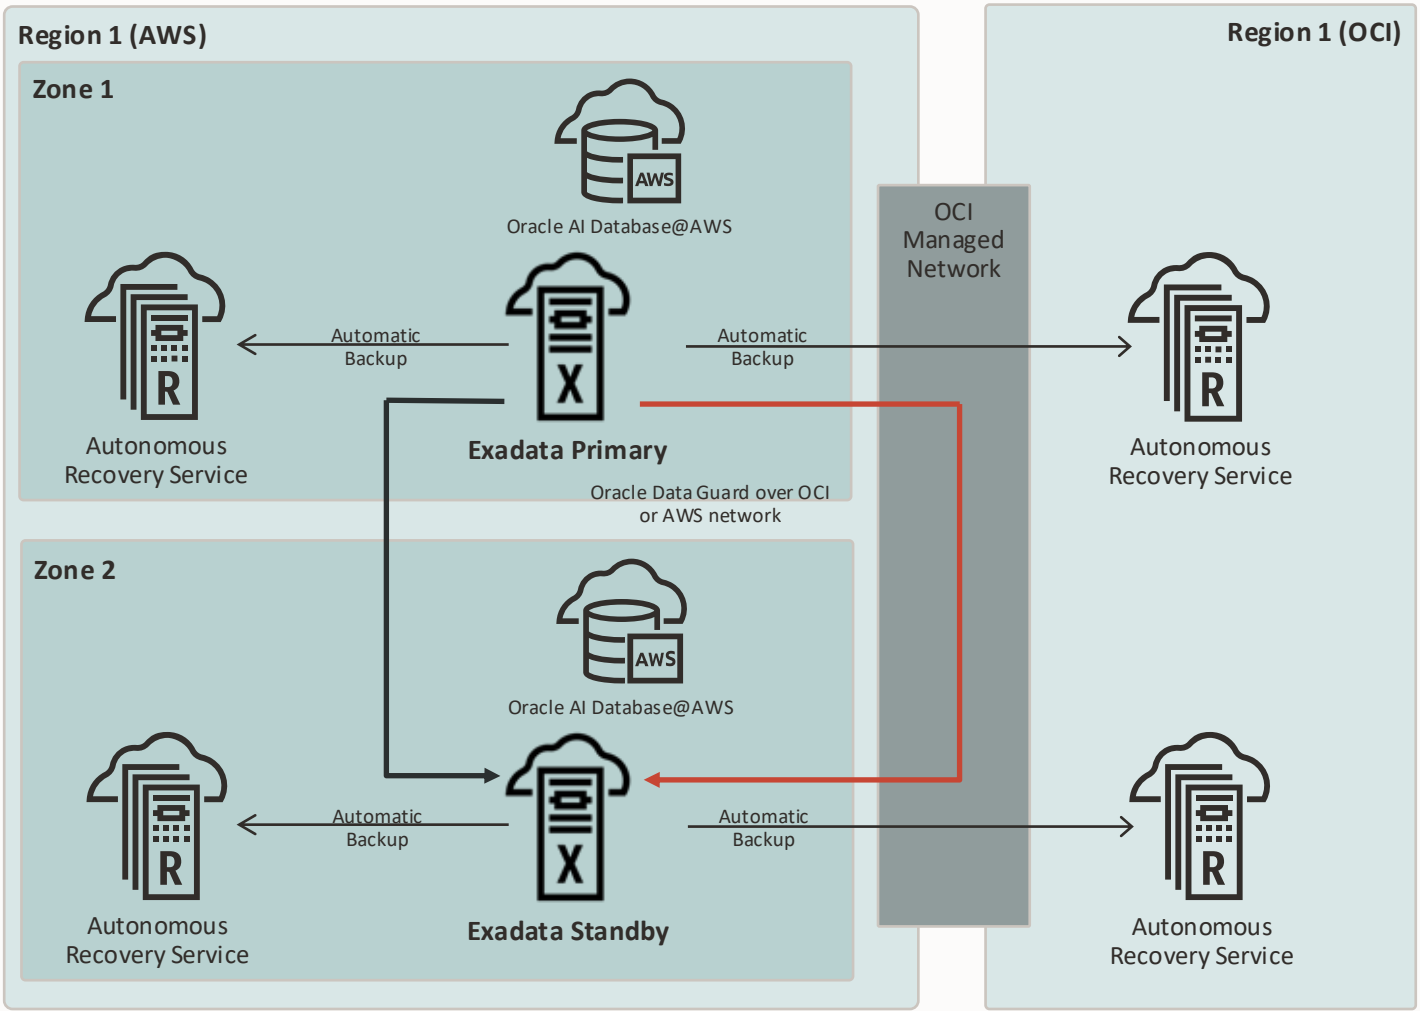

Enhancing availability and ensuring zero data loss

MAA Silver Level +

- ✓ Site failure protection
- ✓ Oracle Data Guard's In-Memory replication with zero data loss

+ Active Data Guard

- ✓ Comprehensive data corruption prevention
- ✓ Offload read-mostly workloads to standby
- ✓ Online updates


+ Multiple Standbys

- ✓ Read-mostly scale-out



Exadata Database Service@AWS | MAA Gold Level - Cross-AZ

Network Topology for Oracle Active Data Guard

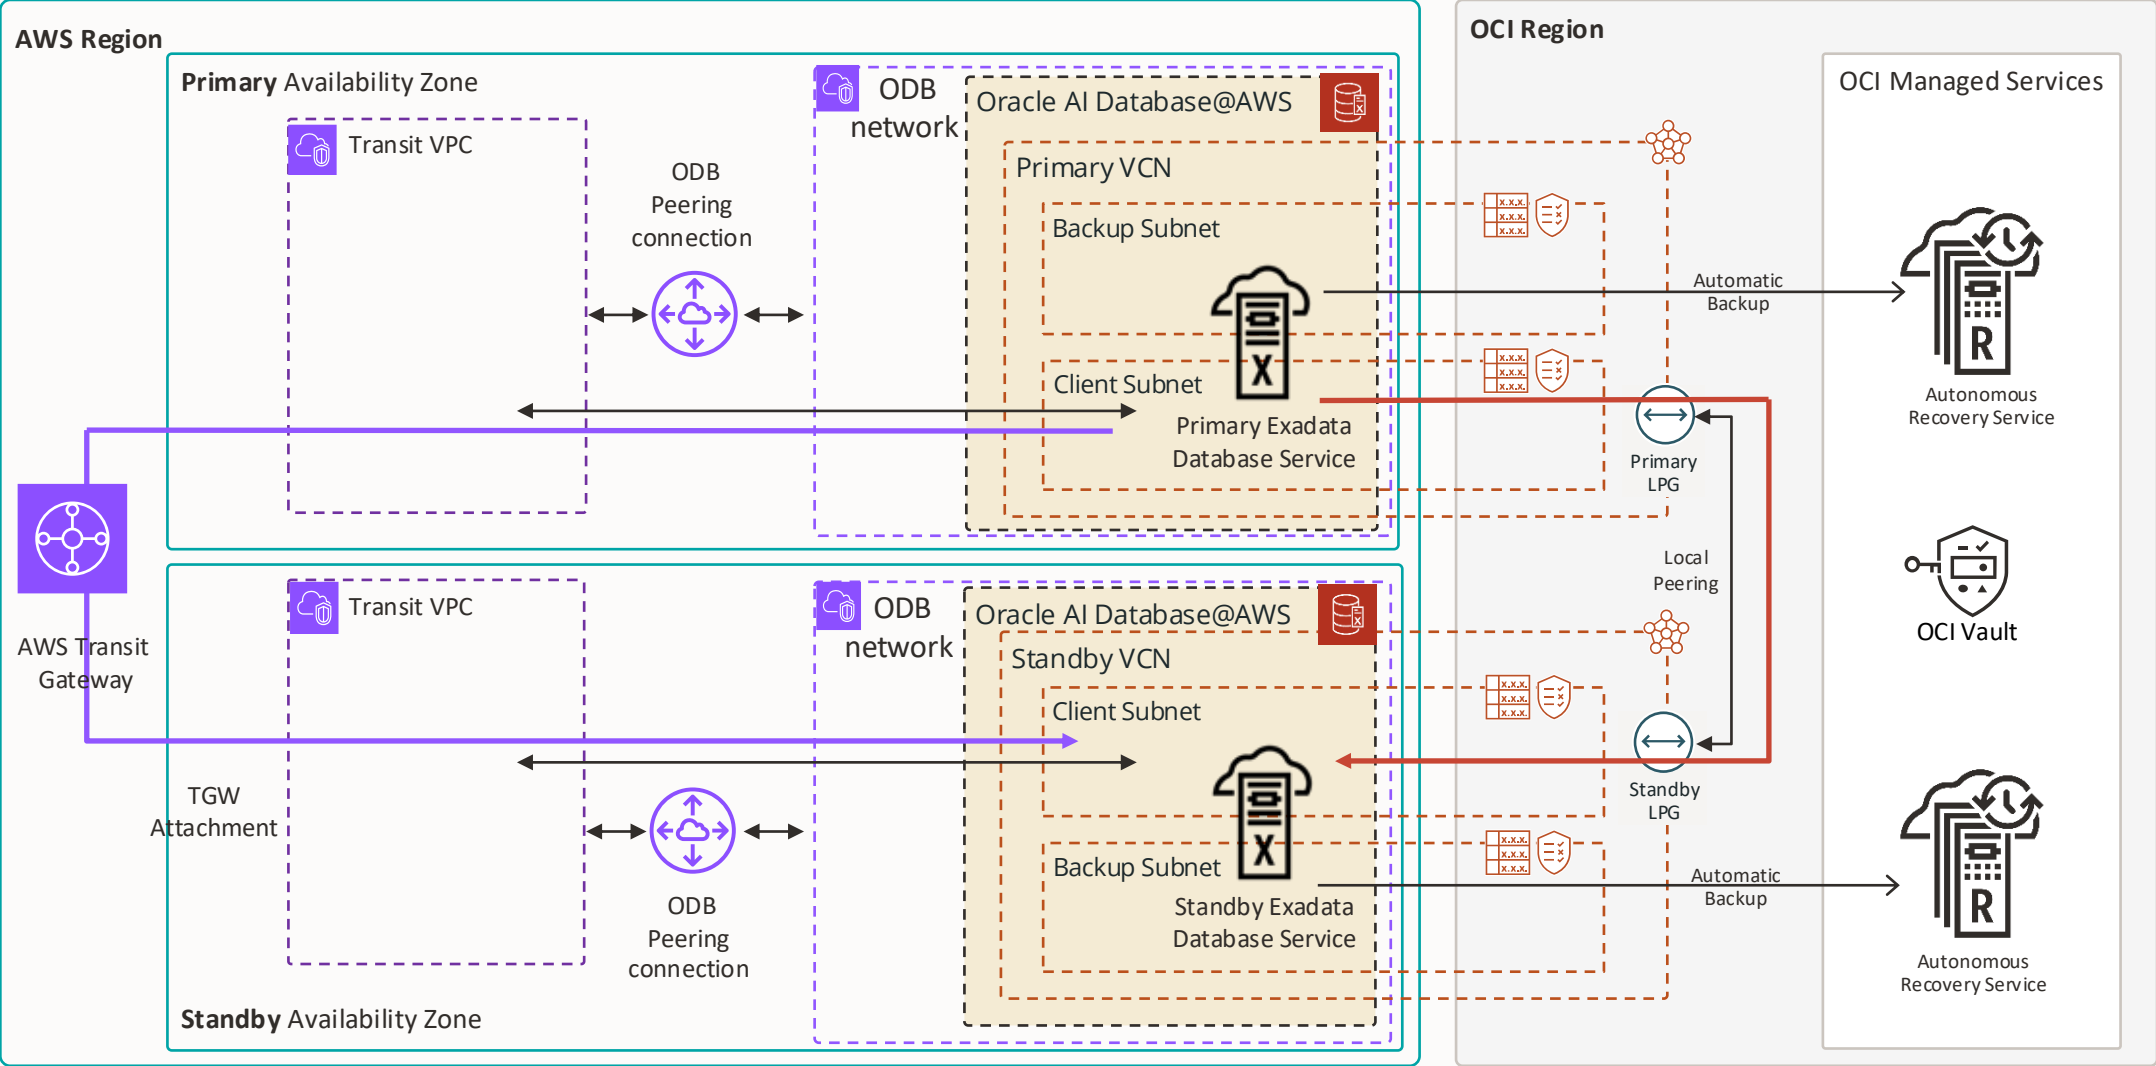


Active Data Guard
Option 1: via OCI network
Option 2: via AWS network





Oracle Exadata Database Service on Dedicated Infrastructure

Oracle MAA Gold level cross-region architecture

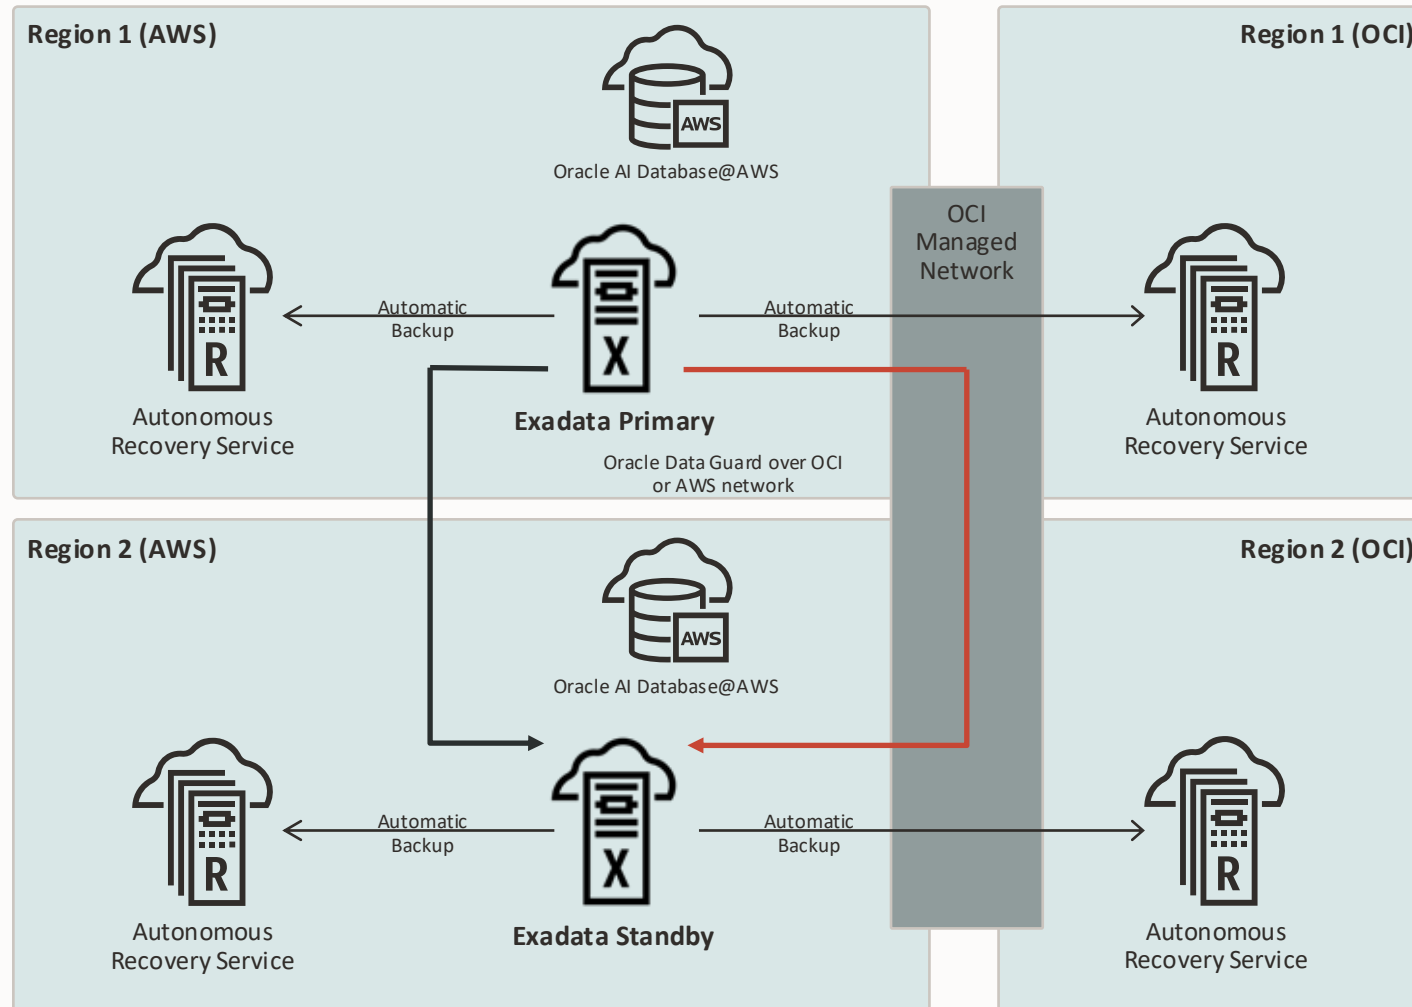

Safeguarding continuous availability and real-time data protection

MAA Silver Level +

- ✓ Regional disaster recovery protection
- ✓ Oracle Data Guard's In-Memory replication with (near) zero data loss

+ Active Data Guard

- ✓ Comprehensive data corruption prevention
- ✓ Offload read-mostly workloads to standby
- ✓ Online updates

+ Multiple Standbys


- ✓ Zero data loss across regions with minimal impact on primary performance
- ✓ Read-mostly scale-out



Exadata Database Service@AWS | MAA Gold Level - Cross-region



Network Topology for Oracle Active Data Guard

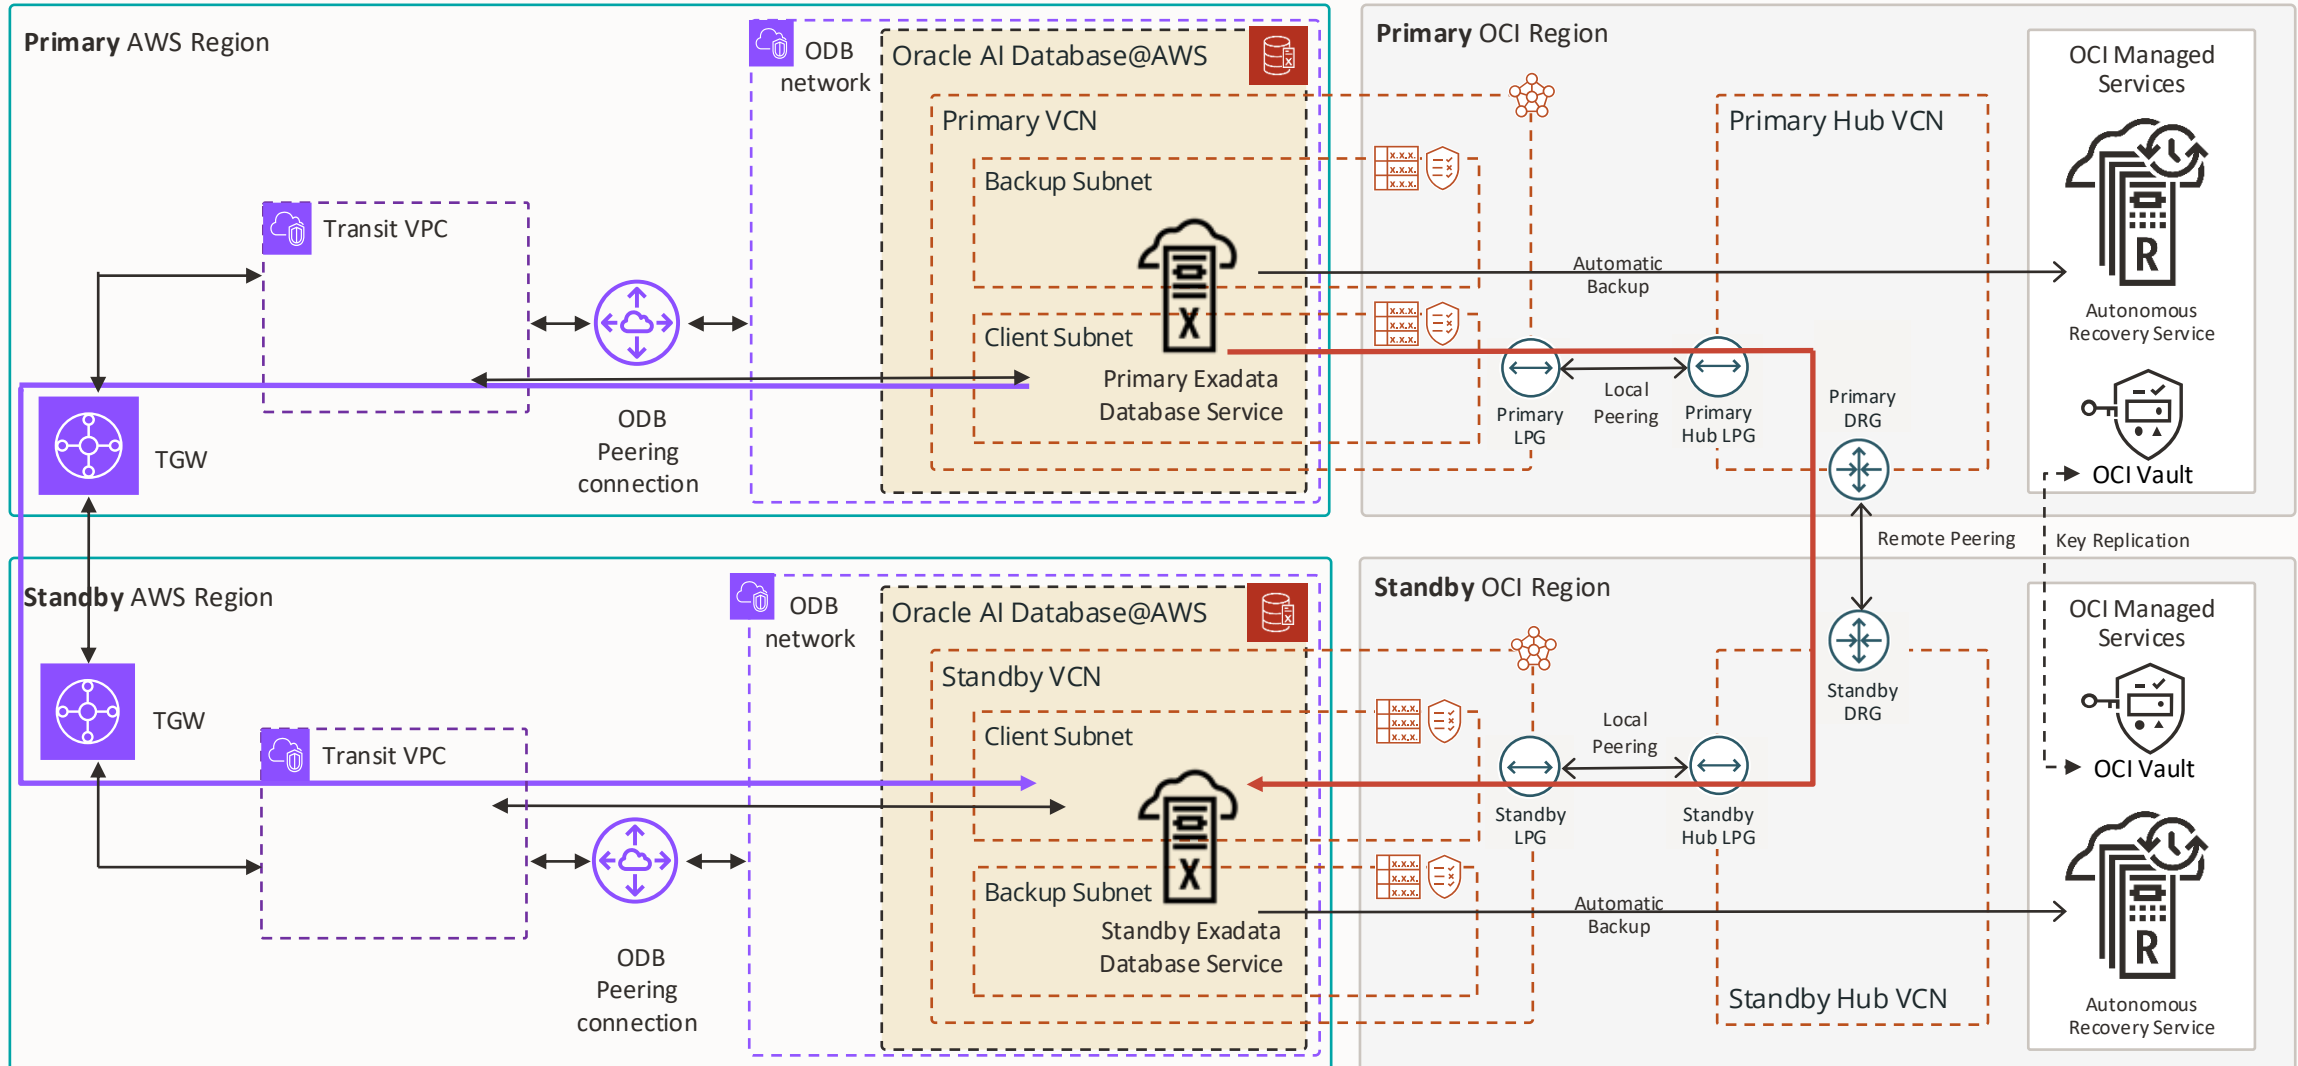

Active Data Guard

Option 1: via OCI network
Option 2: via AWS network



Oracle Data Guard Network traffic configuration options

Via OCI or AWS

Network Traffic through OCI (recommended)

- ✓ Automated Data Guard one-click setup
 - ✓ MAA best practices by default
 - ✓ VCN peering required
- ✓ Oracle controls the network and ensures reliability
- ✓ No chargeback for network traffic across availability domains in the same region
- ✓ First 10TB/month cross-region traffic for free
- ✓ Multiple standby databases via cloud tooling
- ✓ Optional: Fast-Start Failover (FSFO) manual setup

Network Traffic through AWS

- ✓ Automated Data Guard one-click setup
 - ✓ MAA best practices by default
 - ✓ ODB Network peering using TGW required
- ✓ Amazon controls the network and ensures reliability
- ✓ Chargeback for network traffic across availability zones in the same region
- ✓ Chargeback for cross-region traffic
- ✓ Multiple standby databases via cloud tooling
- ✓ Optional: Fast-Start Failover (FSFO) manual setup



Fully automated Oracle Active Data Guard setup

Using OCI Console, OCI CLI, SDKs, or REST APIs

Database information

Backups

Data Guard Group

Connections

Pluggable

Add standby operation will also do a precheck. [Learn more](#)

Q Search and Filter

Add standby

1. Click
"Add standby"

Member	VM Cluster	Role
DB0714	vmc	Primary
DB0714	maa	Standby

Add standby

Peer VM Cluster

2. Choose your
standby zone or
region

Peer region
US East (Ashburn)

Canada Southeast (Toronto)

UK South (London)

US East (Ashburn)

Primary database is in region UK South (London)



Configure Data Guard in OCI Console



Resources

Metrics

Backups (0)

Data Guard Associations (0)

Pluggable Databases (1)

Enable Data Guard

Select peer VM Cluster

Peer region
Germany Central (Frankfurt)
Primary database is in region Germany Central (Frankfurt)

Select availability domain
vPAY:EU-FRANKFURT-1-AD-1
Primary database is in availability domain vPAY:EU-FRANKFURT-1-AD-1

Select Exadata infrastructure in FieldDemo [\(Change compartment\)](#)
Select an infrastructure

Select a VM cluster in FieldDemo [\(Change compartment\)](#)
First select Exadata Infrastructure

Data Guard association details

Data Guard Type
Active Data Guard
Active Data Guard is a licensed option to the Oracle Database capabilities that extend the basic Data Guard functionality. These include Offload, Automatic Block Repair, Standby Block Change Tracking, and Application Continuity. [Learn more](#).

Protection mode
Select protection mode

Transport type
First select protection mode

Choose Database Home

☒ Select an existing Database Home ☐ Create a new Database Home

Database Home display name
First select a peer resource
Only Database Homes compatible with the source database's Oracle Database version and patch level are listed.

Configure standby database

Database unique name Optional

Specify a value for the DB_UNIQUE_NAME database parameter. This value must be unique across the primary and standby cloud VM clusters. Enter up to 30 characters.

Database password

The standby database admin password must be the same as the primary database admin password.

[Show advanced options](#)


Enable Data Guard

Cancel



Oracle Autonomous AI Database Dedicated

High availability and data protection built-in by default

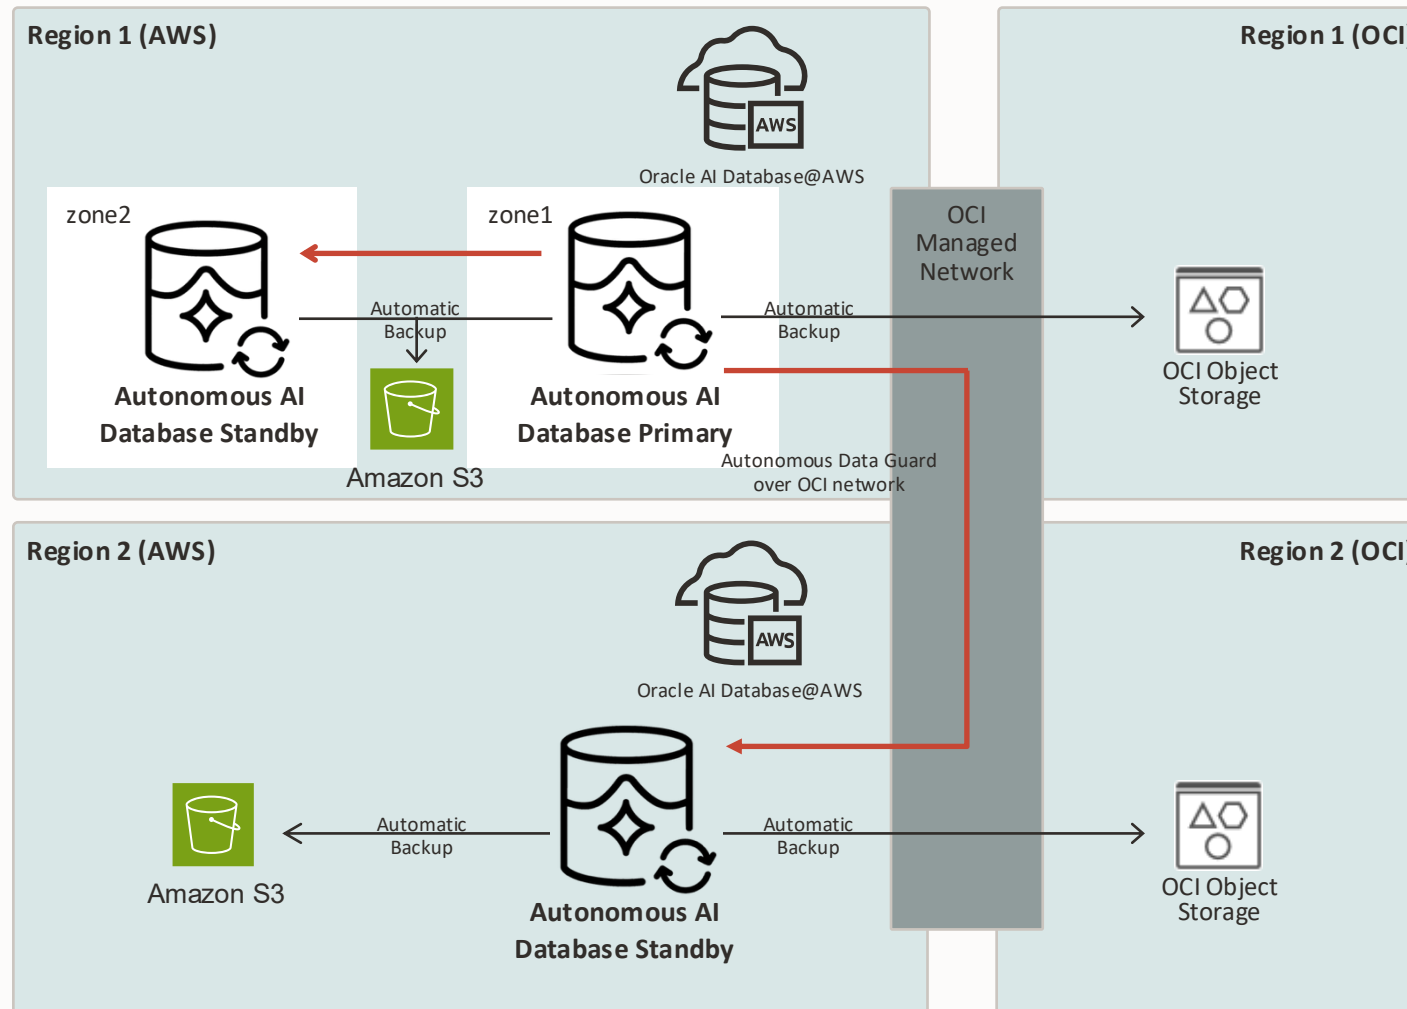

Oracle Exadata and Oracle RAC

- ✓ Full elasticity with online and auto-scaling of compute and storage
- ✓ Node failure protection
- ✓ Zero downtime maintenance
- ✓ 99.95% SLA

Backup-based disaster recovery


- ✓ Automatic backup by default

+ Autonomous Data Guard

- ✓ Local and regional standbys one-click setup
- ✓ Automatic failover for lower RTO
- ✓ Real-time data replication for lower RPO
- ✓ Synchronous replication for zero data loss
- ✓ Convert to snapshot standby for read/write
- ✓ 99.995% SLA

Oracle Autonomous AI Database Serverless

High availability and data protection built-in by default

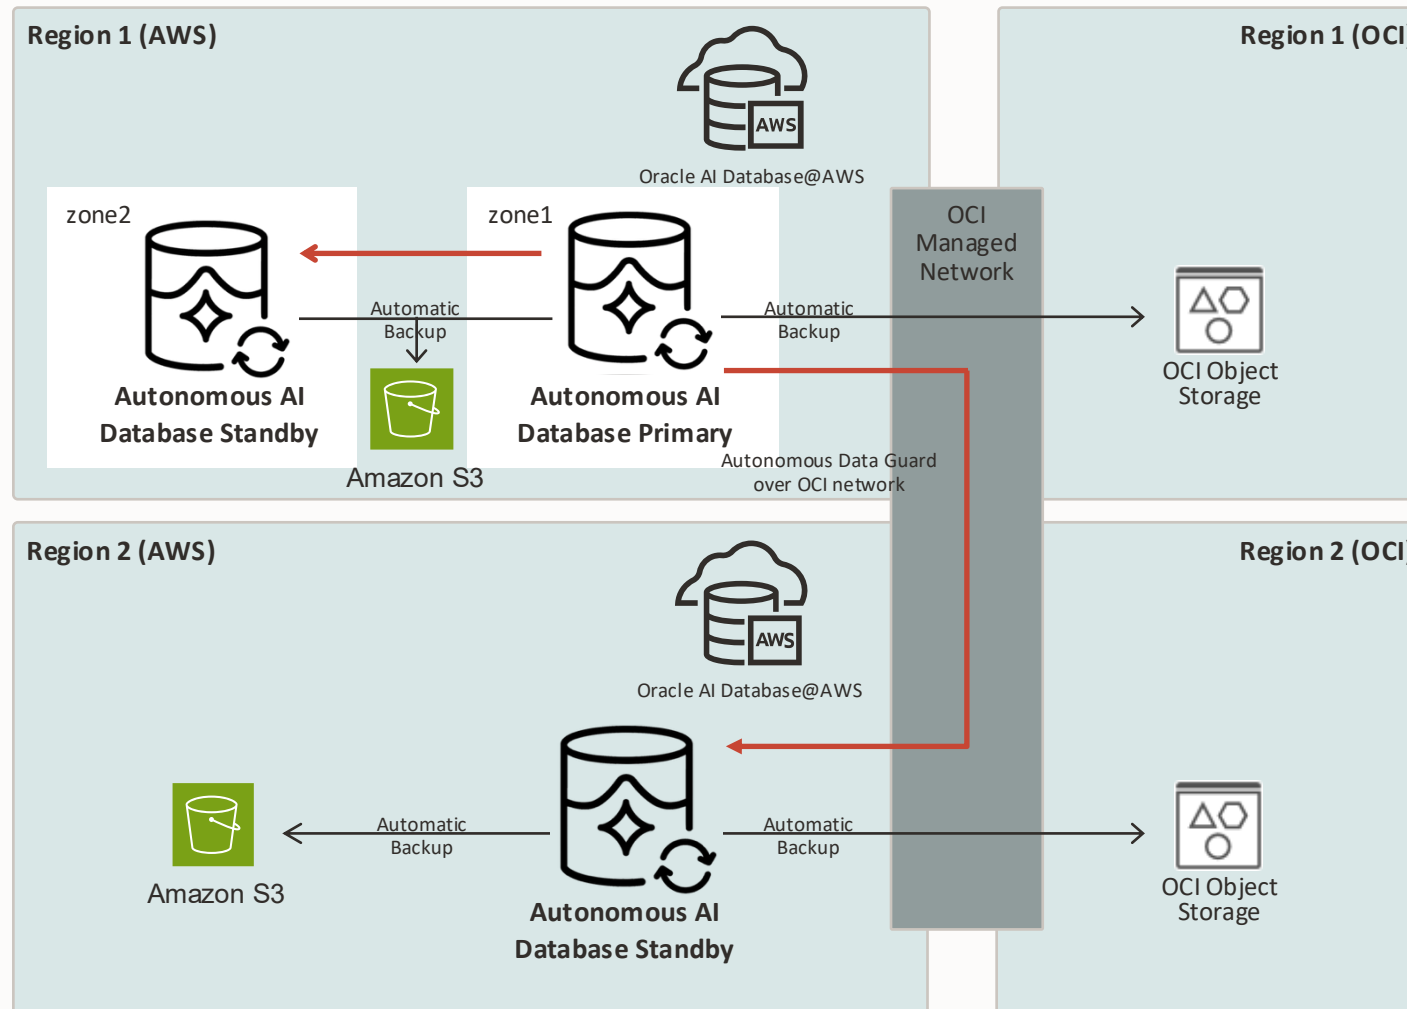

Oracle Exadata and Oracle RAC

- ✓ Full elasticity with online and auto-scaling of compute and storage
- ✓ Node failure protection
- ✓ Zero downtime maintenance
- ✓ 99.95% SLA

Backup-based disaster recovery

- ✓ Automatic backup by default


+ Autonomous Data Guard

- ✓ Local and regional* standbys one-click setup
- ✓ Automatic failover for lower RTO
- ✓ Real-time data replication for lower RPO

** on the roadmap*



Zero Data Loss Autonomous Recovery Service (RCV)

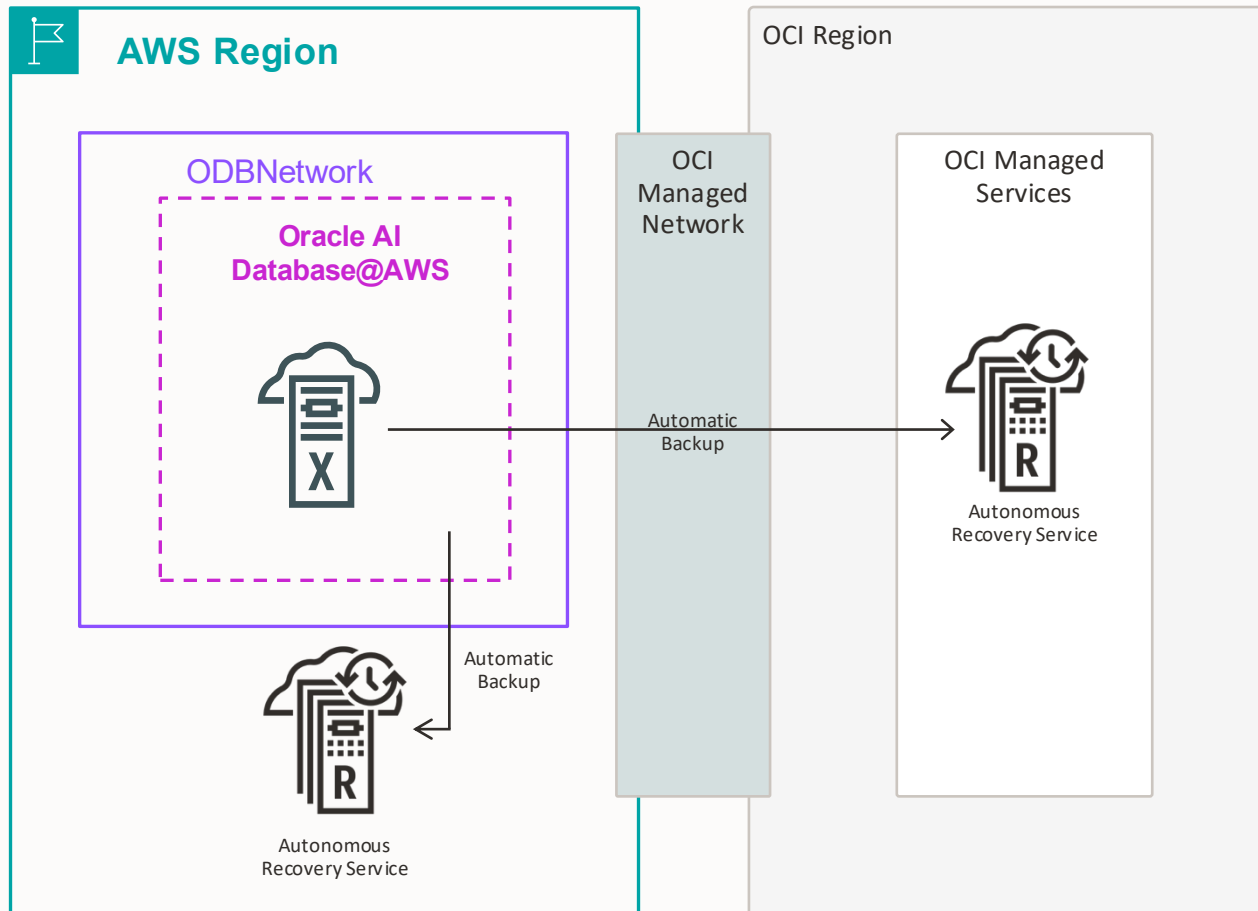

Zero Data Loss Autonomous Recovery Service (RCV)

- Real-time data protection
- Continuous recovery validation
- Ransomware protection
- Incremental forever backup strategy
 - No weekly full backups
- Available in OCI and in AWS
- Charged towards DB@AWS consumption

☒ Store backups in the same cloud provider as the database ⓘ

- Supports ExaDB-D & ADB-D
- Long term retention up to 10 years
 - Planned for RCV in AWS

Configure Automatic Backup to RCV in OCI Console

- Provides the option to select a backup time for daily incremental backups
- Backup retention for 14, 35, 65, 95 days
- Cost is based on backup files stored for their retention period, and if real-time data protection is enabled

Configure automatic backups

☒ Enable automatic backups ⓘ

ⓘ **Important:** For automatic backups to function, all [prerequisites](#) must be met.

Backup destination ⓘ

Autonomous Recovery Service (Recommended)

Autonomous Recovery Service (Recommended)

Object Storage

Protection policy in **641531f9-2e12-430b-be35-0d8eba8d957c** ⓘ ([Change compartment](#))

Silver (35-days recovery window)

☒ Real-time data protection ⓘ

Deletion options after database termination ⓘ

☒ Retain backups according to the protection policy retention period


☐ Retain backups for 72 hours, then delete

Scheduled time for daily backup (UTC) ⓘ

2:00AM - 4:00AM

☒ Take the first backup immediately ⓘ

Migration

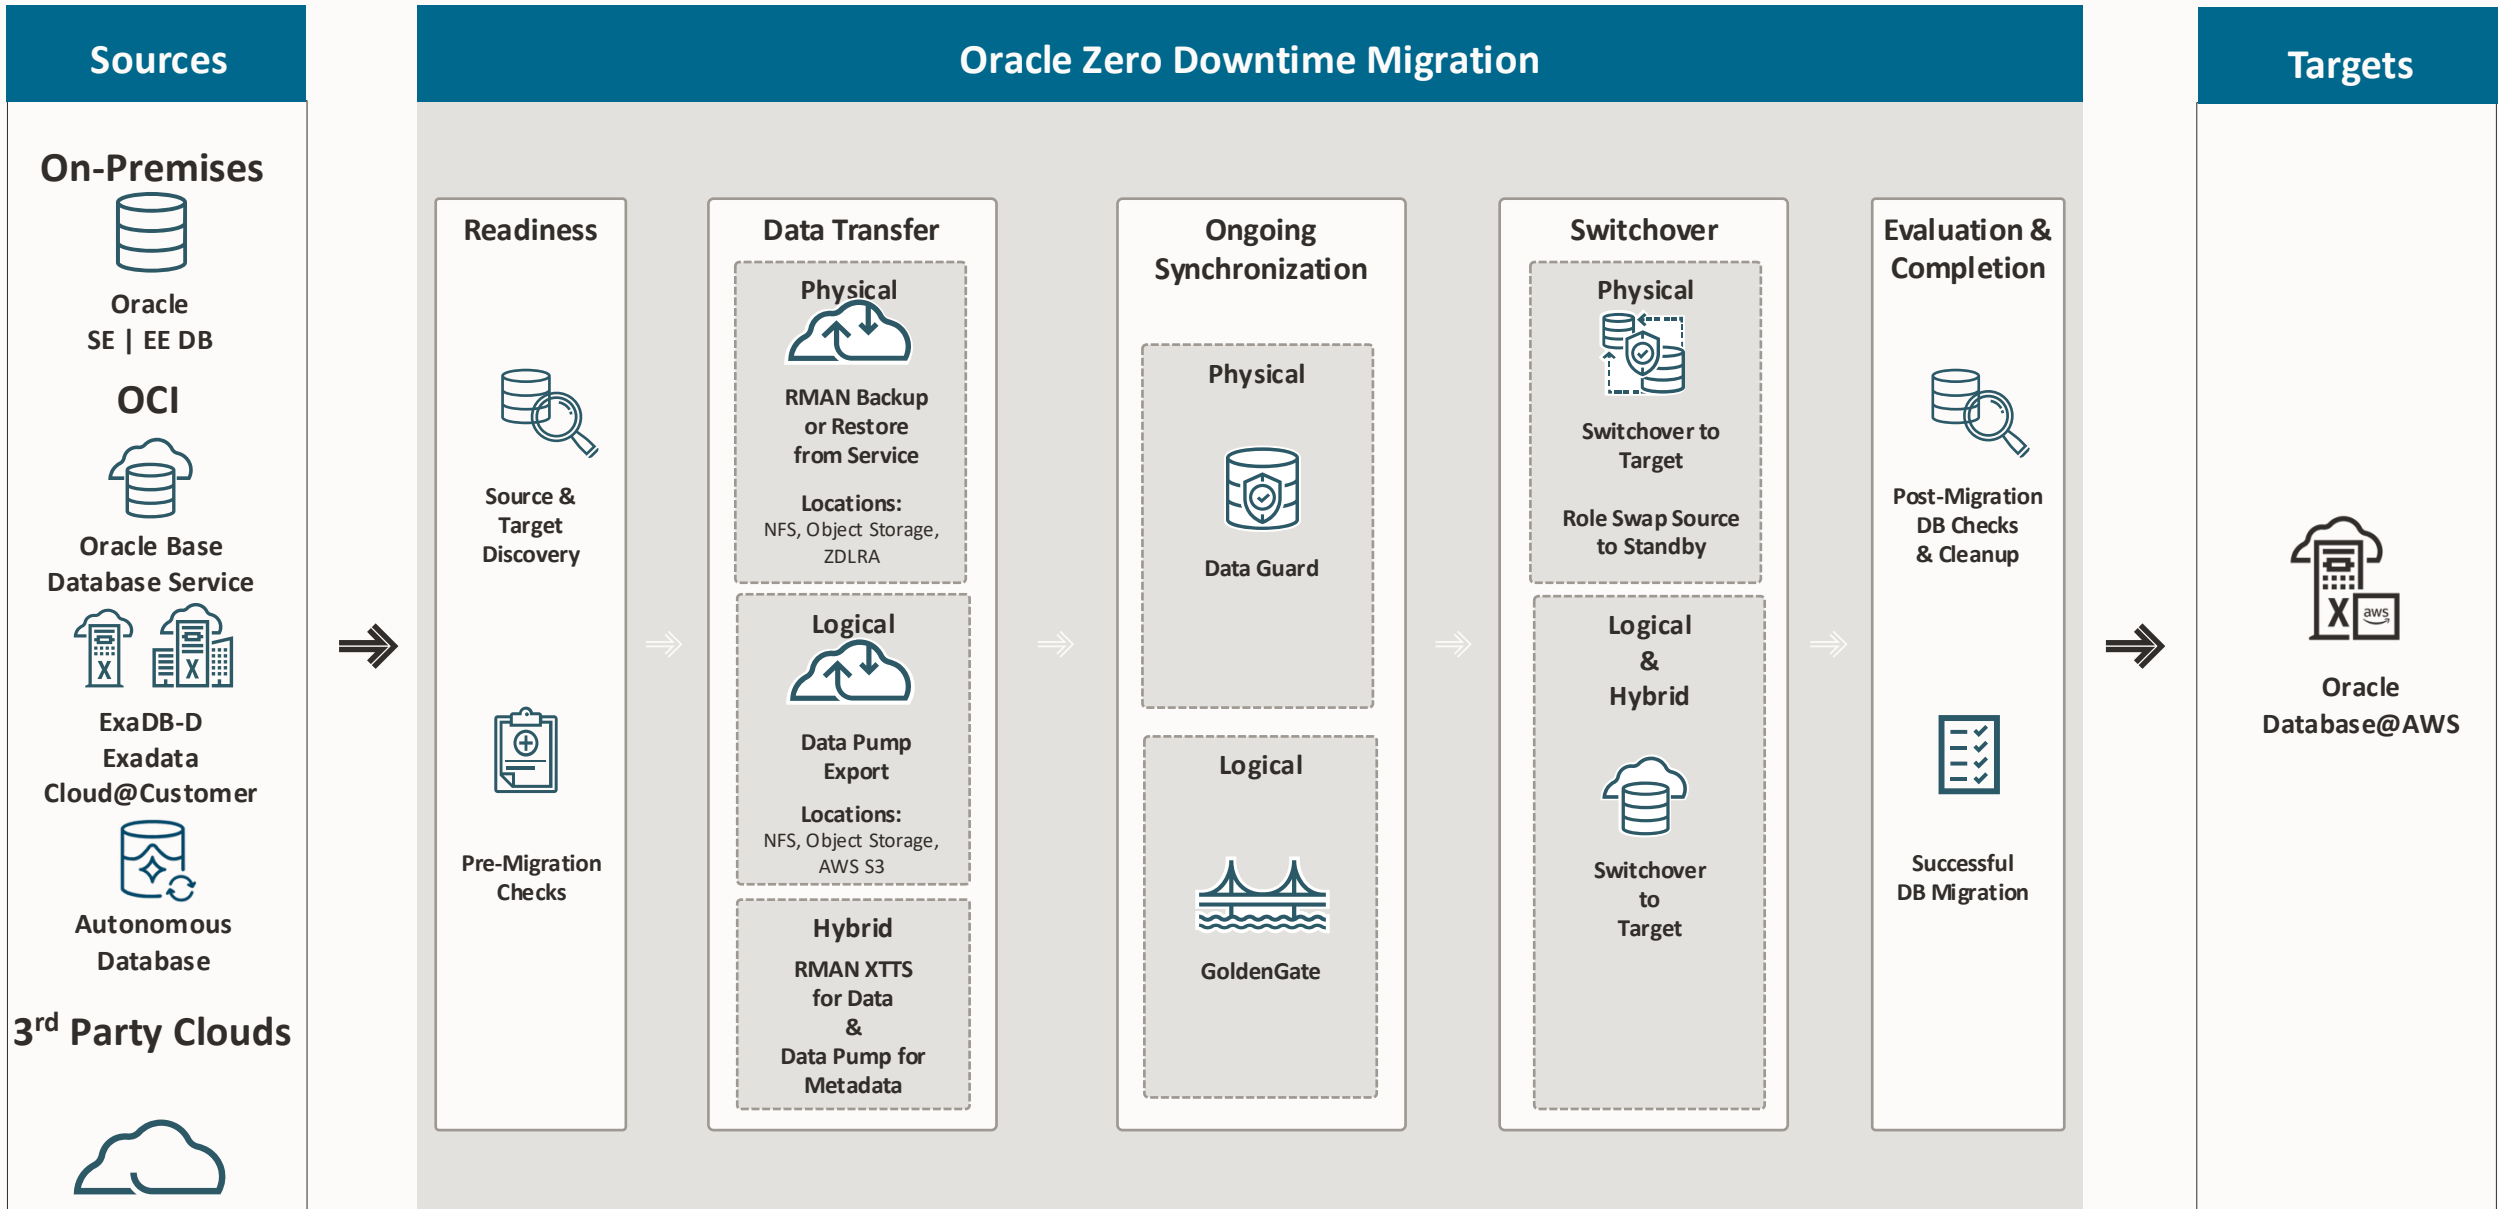

Oracle AI Database@AWS

Oracle Zero Downtime Migration – Migration Methodologies

Method	ExaDB-D	ADB (Both S and D)
Physical Online		
Physical Offline		
Logical Online		
Logical Offline		



Migration to ExaDB-D at Oracle AI Database@AWS

Migration Methods – Exadata Database Dedicated

Migration Approach	Migration	Online	Downtime *
ZDM – Recommended (Oracle Zero Downtime Migration)	Physical/Logical		Minimal
Oracle Data Guard	Physical		Minimal
Oracle GoldenGate	Logical		Minimal
RMAN	Physical		Required
Oracle Data Pump	Logical		Required
Oracle Database Multitenant Movement	Physical		Required

* Downtime – The duration depends on the volume and use case.




Online Migration



Offline Migration




Physical Online Migration to ExaDB-D at Oracle AI Database@AWS

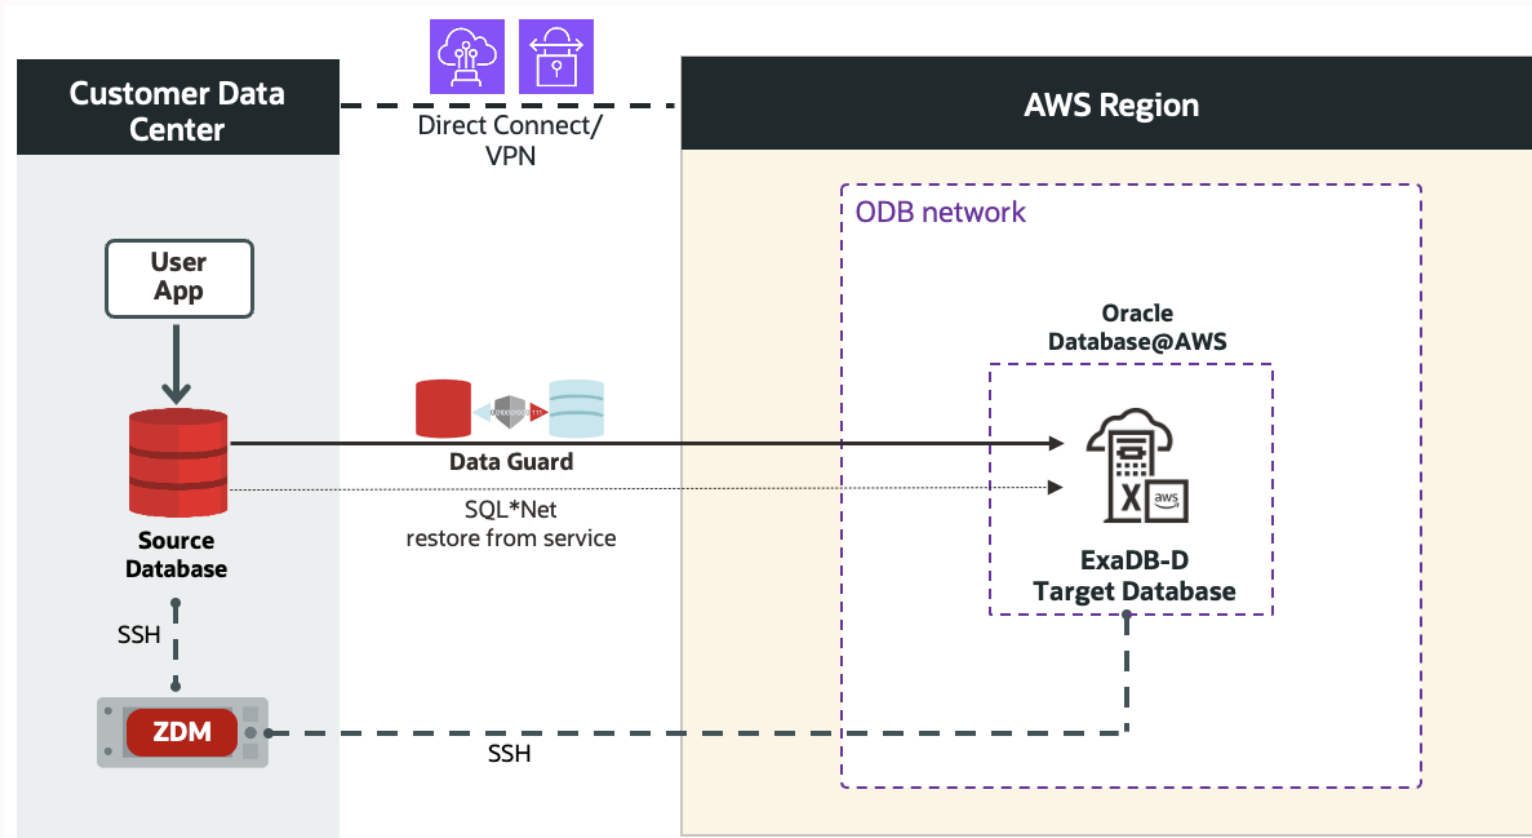


1. Download & Configure ZDM
2. ZDM Starts Database Migration
3. ZDM Connects to Source, Target and performs pre-checks
4. ZDM Instantiates a TDE enabled Standby
5. ZDM configures Data Guard, performs switchover and role swap
6. ZDM executes data patch, post steps and post checks
7. ZDM Finalizes migration

Physical Offline Migration to ExaDB-D at Oracle AI Database@AWS

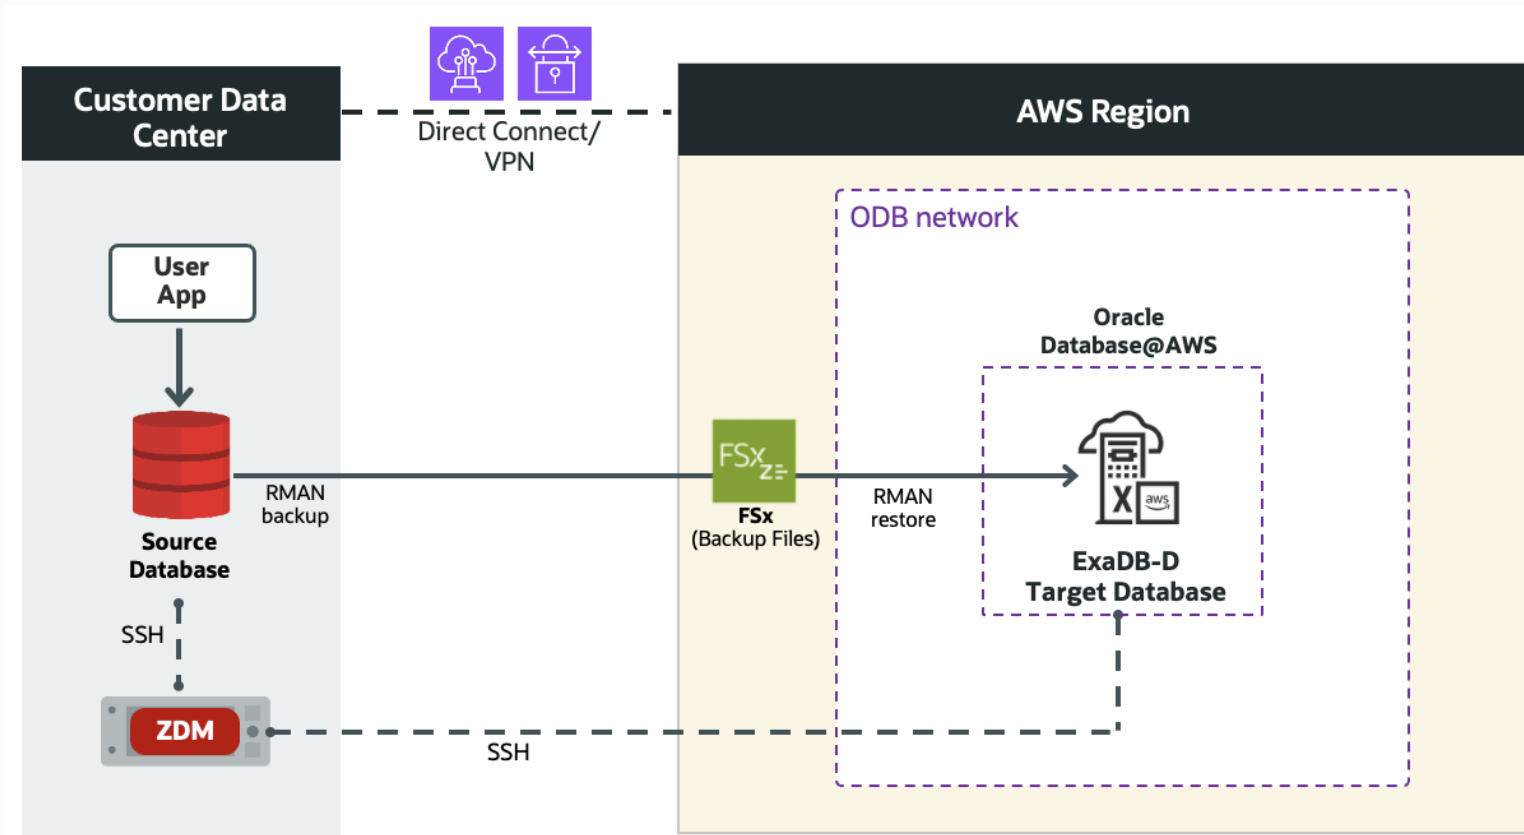


1. Download & Configure ZDM
2. ZDM Starts Database Migration
3. ZDM Connects to Source, Target and performs pre-checks
4. ZDM creates RMAN Backups and transfer to backup location
5. ZDM instantiates a TDE enabled Target database, performs switchover
6. ZDM executes data patch, post steps and post checks
7. ZDM Finalizes migration

Logical Online Migration to ExaDB-D at Oracle AI Database@AWS

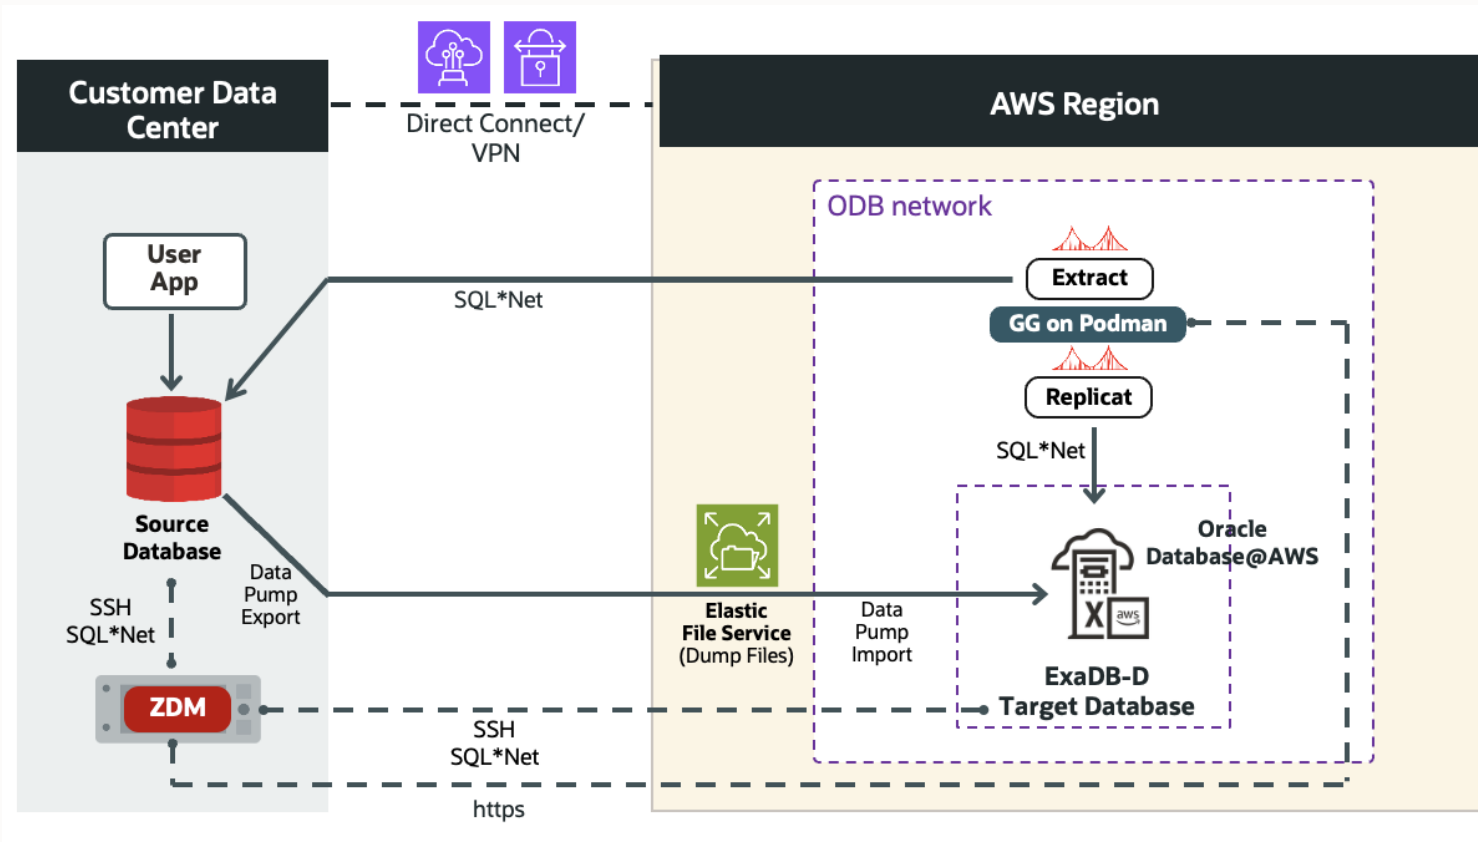

1. Download & Configure ZDM
2. ZDM Starts Database Migration
3. ZDM Connects to Source, Target and performs pre-checks
4. ZDM configures GoldenGate Extract
5. ZDM starts Data Pump Import and transfer dump files to backup location
6. ZDM starts Import process and instantiates target database
7. ZDM configures GoldenGate Replicat, apply changes and waits for lag
8. ZDM performs switchover, post checks
9. ZDM Finalizes Migration

Logical Offline Migration to ExaDB-D at Oracle AI Database@AWS

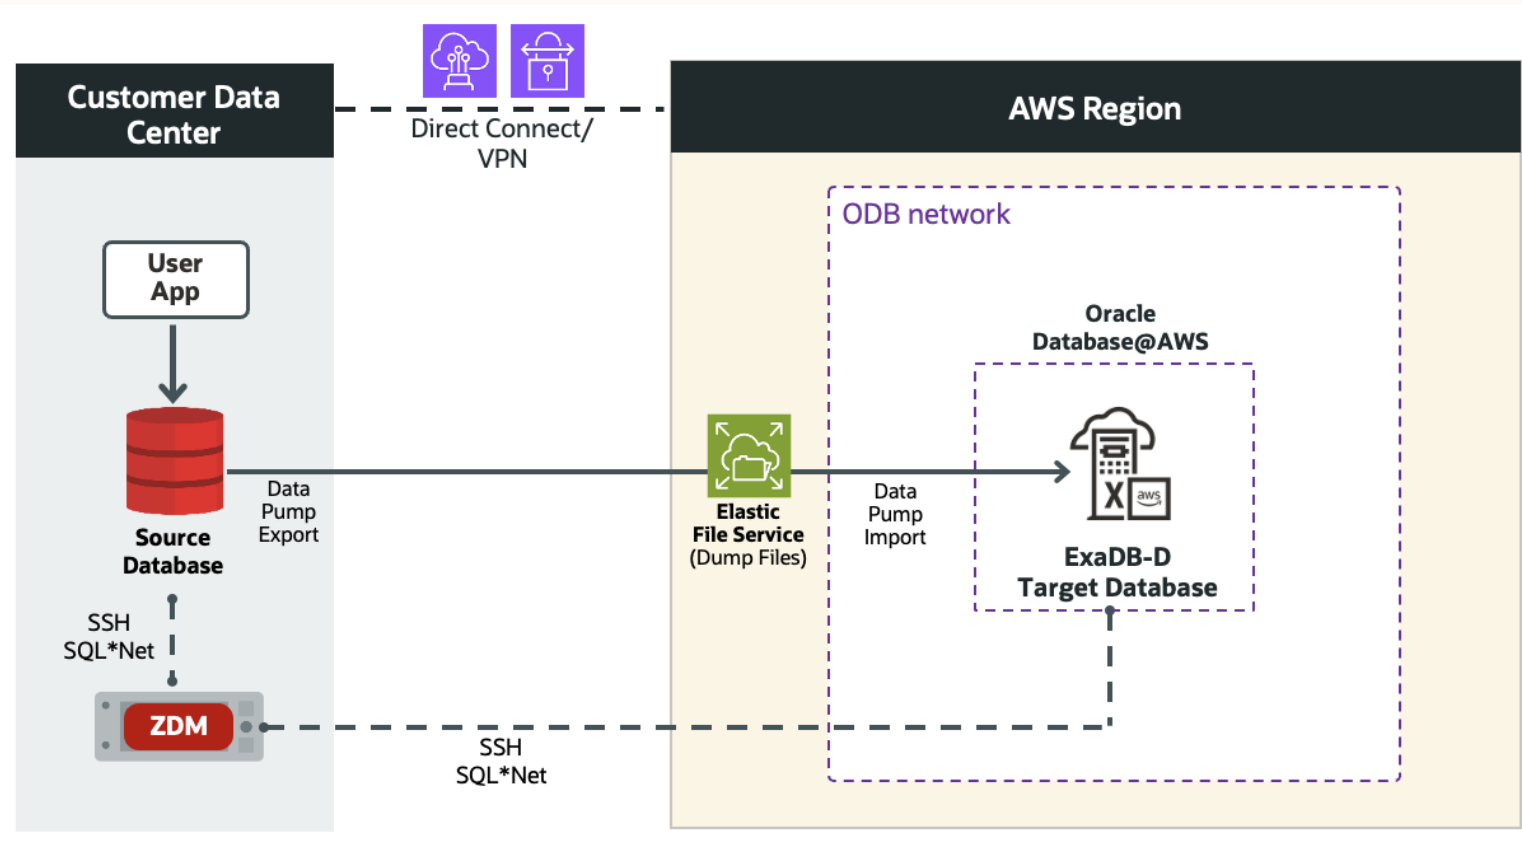

1. Download & Configure ZDM
2. ZDM Starts Database Migration
3. ZDM Connects to Source, Target and performs pre-checks
4. ZDM starts Data Pump Import and transfer dump files to backup location
5. ZDM starts Import process and instantiates target database, and switches over
6. ZDM executes data patch, post steps and post checks
7. ZDM Finalizes migration

Migration to ADB at Oracle AI Database@AWS

Migration Methods – Autonomous AI Database


Migration Approach	Migration	Online	Downtime *
ZDM – Recommended (Oracle Zero Downtime Migration)	Logical		Minimal
Oracle Data Guard	(Not supported)		n/a
Oracle GoldenGate	Logical		Minimal
RMAN	(Not supported)		n/a
Oracle Data Pump	Logical		Required
Oracle Database Multitenant Movement	(Not supported)		n/a

* Downtime – The duration depends on the volume and use case.

-  Online Migration
-  Offline Migration
-  Not supported




Logical Online Migration to ADB at Oracle AI Database@AWS

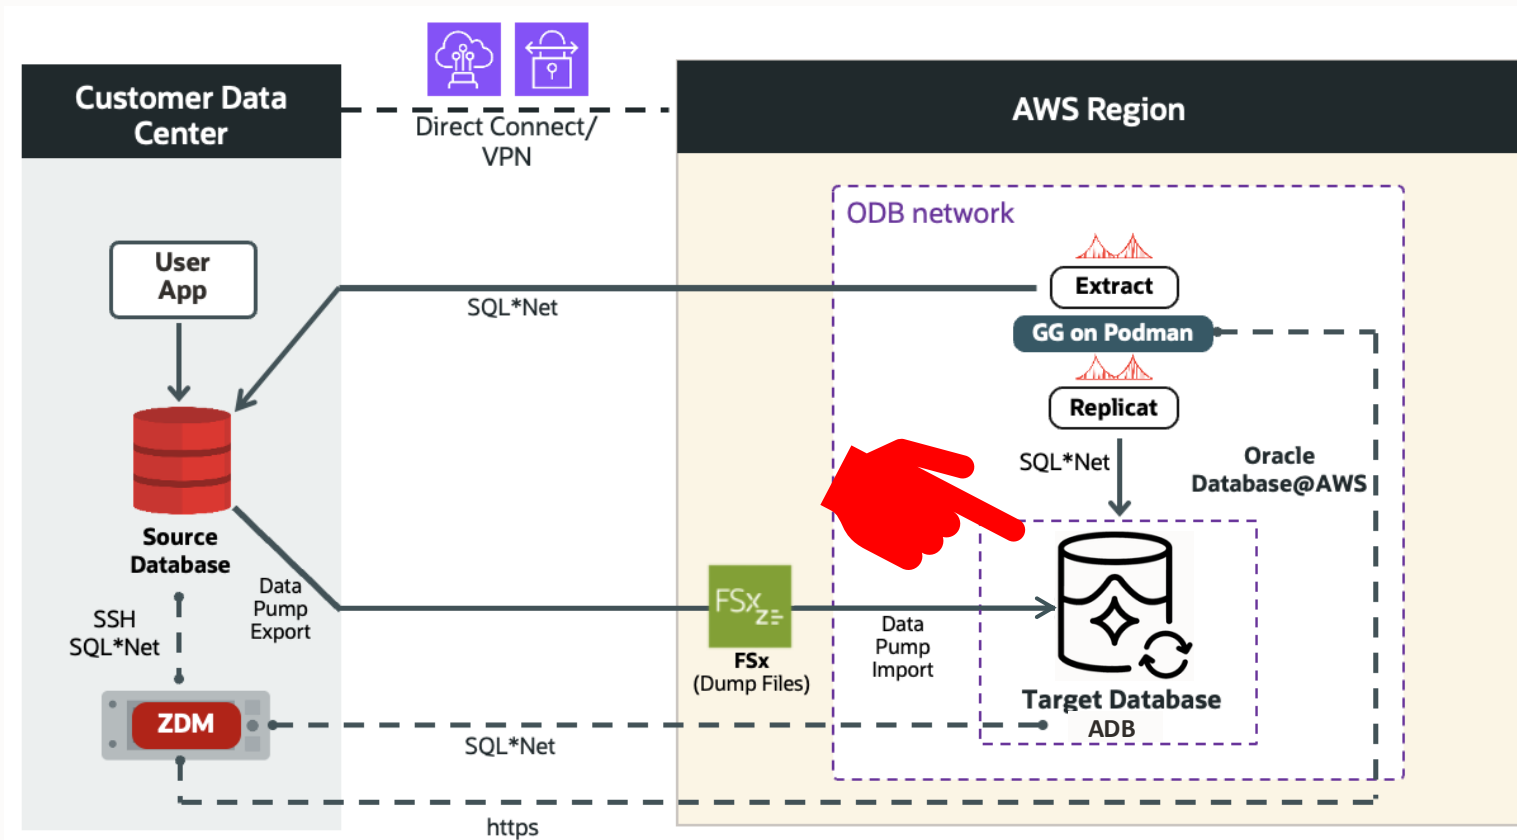

1. Download & Configure ZDM
2. ZDM Starts Database Migration
3. ZDM Connects to Source, Target and performs pre-checks
4. ZDM configures GoldenGate Extract
5. ZDM starts Data Pump Import and transfer dump files to backup location
6. ZDM starts Import process and instantiates target database
7. ZDM configures GoldenGate Replicat, apply changes and waits for lag
8. ZDM performs switchover, post checks
9. ZDM Finalizes Migration

Logical Offline Migration to ADB-D at Oracle AI Database@AWS

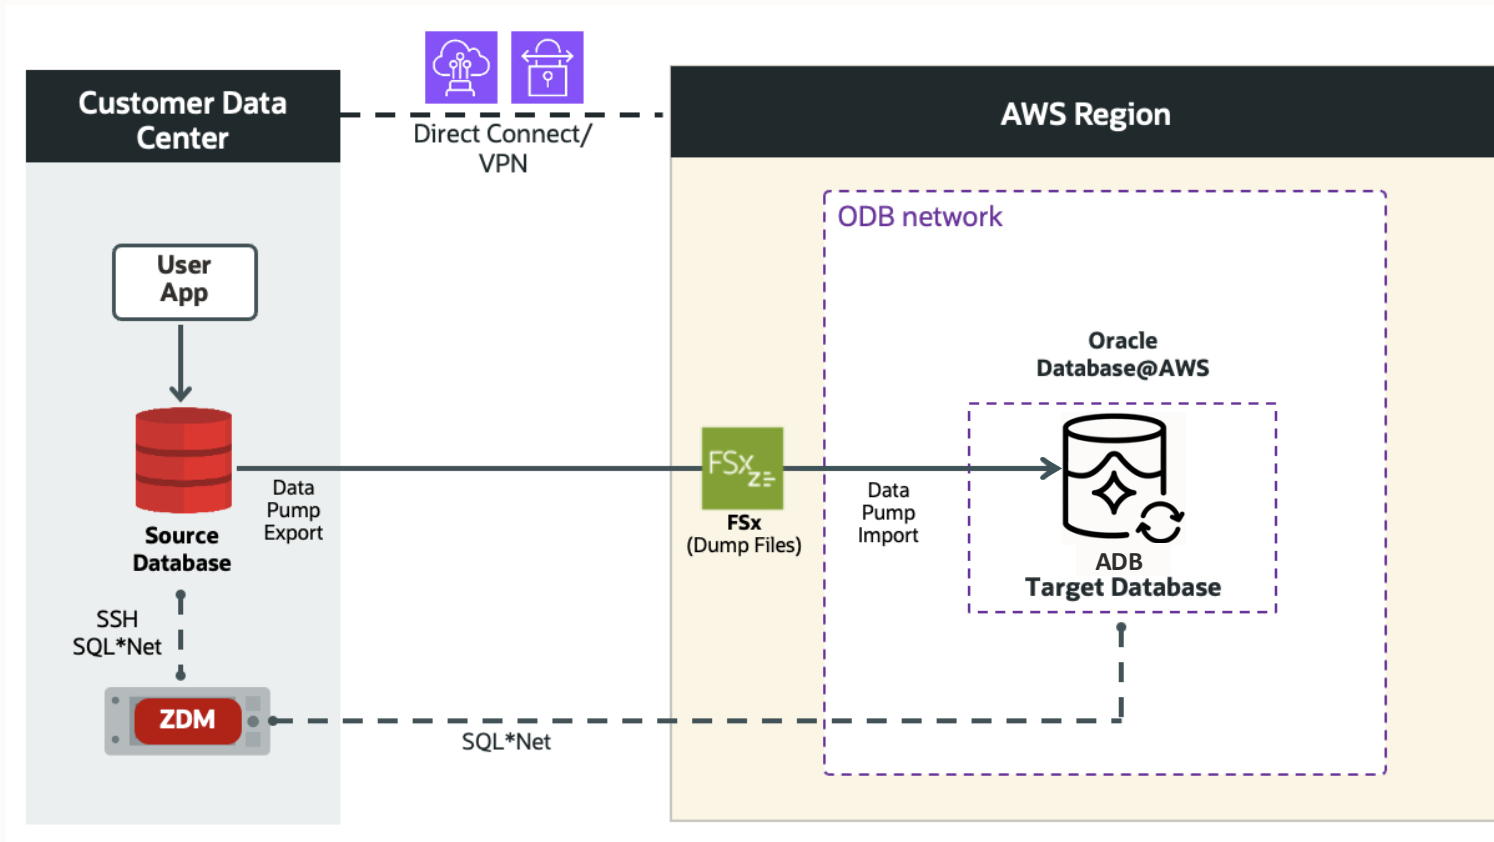

1. Download & Configure ZDM
2. ZDM Starts Database Migration
3. ZDM Connects to Source, Target and performs pre-checks
4. ZDM starts Data Pump Import and transfer dump files to backup location
5. ZDM starts Import process and instantiates target database, and switches over
6. ZDM executes data patch, post steps and post checks
7. ZDM Finalizes migration

Identity


Identity Access Management

Users and Groups

- Direct access for native users in **AWS** IAM to AWS resources
- **OCI** defined groups

Roles

- **AWS** Managed IAM Policies allow customers direct access to the service in AWS
- **OCI** Automated policy statement generated by MulticloudLink service.

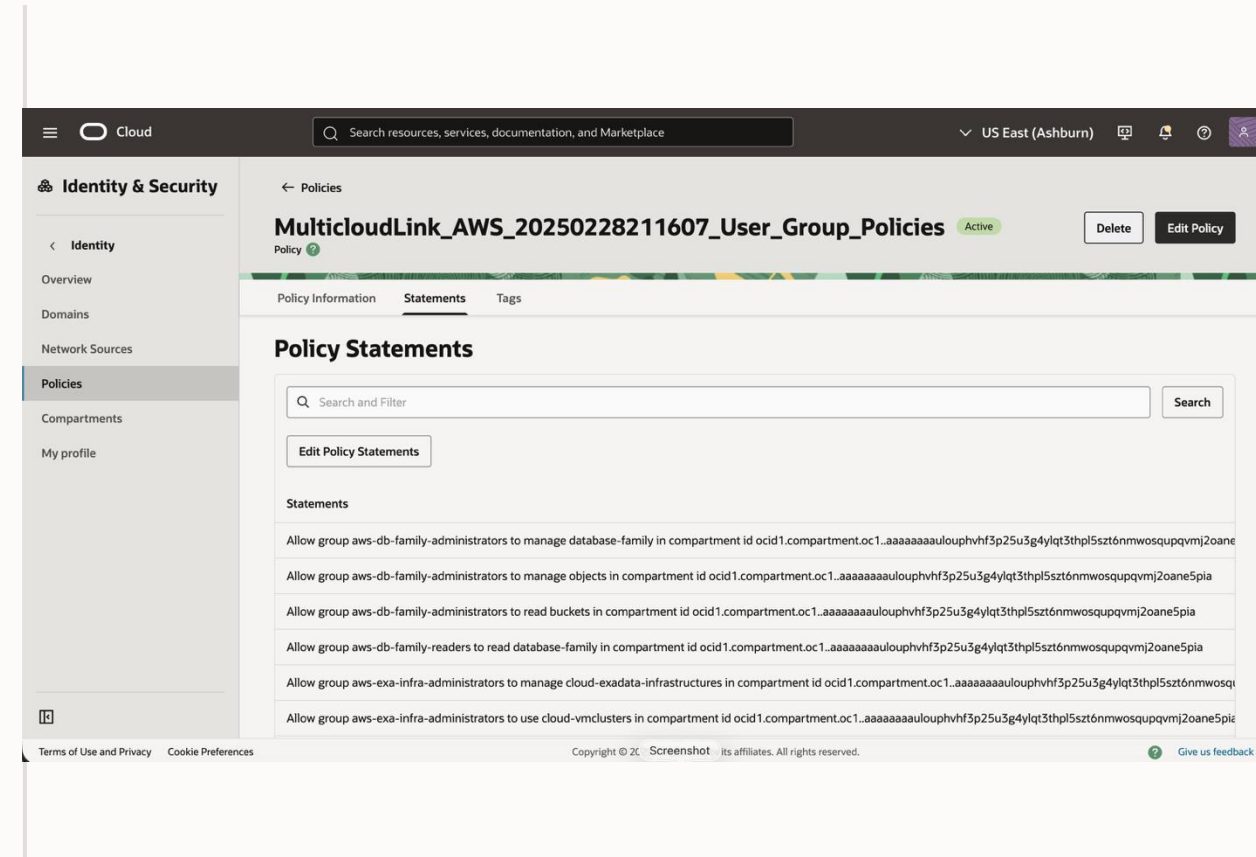

Identity and Access Management (IAM)

Create roles with policies

AM

Policies

ODBAWS.read.only.user

Edit policy

Step 1

Modify permissions in ODBAWS.read.only.user

Step 2

Review and save

1

{

2

"Version": "2012-10-17",

3

"Statement": [

4

{

5

"Sid": "VisualEditor0",

6

"Effect": "Allow",

7

"Action": [

8

"odbc:ListCloudExadataInfrastructures",

9

"odbc:ListDbNodes",

10

"odbc:ListCloudVmClusters",

11

"odbc:ListDbNetworks",

12

"odbc:ListDbPeeringConnections",

13

"odbc:ListCloudAutonomousVmClusters"

14

],

15

"Resource": "*"

16

}

17

]

18

}

Visual

JSON

Actions

Edit statement

Select a statement

Select an existing statement in the policy
add a new statement.

+ Add new statement

+ Add new statement

RWS

Search

[Option+S]

Global

Account ID: 1823-9970-0237

IAM

Policies

Create policy

Step 1

Specify permissions

Step 2

Review and create

Specify permissions

Add permissions by selecting services, actions, resources, and conditions. Build permission statements using the JSON editor.

VisualJSONActions

▼ Oracle Database@AWS

Allow 24 Actions

Specify what actions can be performed on specific resources in Oracle Database@AWS.

▼ Actions allowed

Specify actions from the service to be allowed.

Filter Actions

Effect

AllowDeny

Manual actions | Add actions

☐ All Oracle Database@AWS actions (odbc*)

Access level

▼ List (6)

☐ All list actions

☐ ListCloudAutonomousVmClusters

☐ ListCloudExadataInfrastructures

☐ ListCloudVmClusters

☐ ListDbNodes

☐ ListDbNetworks

☐ ListDbPeeringConnections

► Read (16)

► Write (Selected 24/24)

► Tagging (2)

▼ Resources

Specify resource ARNs for these actions.

☒ All

☐ Specific

CloudShell

Feedback

© 2025, Amazon Web Services, Inc. or its affiliates. PrivacyTermsCookie preferences




Identity Federation –AWS and OCI Console with an Identity provider

For example, using Azure Entra ID



AWS customers keep using their existing federation
OCI – federate just like they do with their IDP

- SAML 2.0 compliant, SCIM compatible
- Provisioned/synchronized OCI users can have all OCI credentials, except for a console password

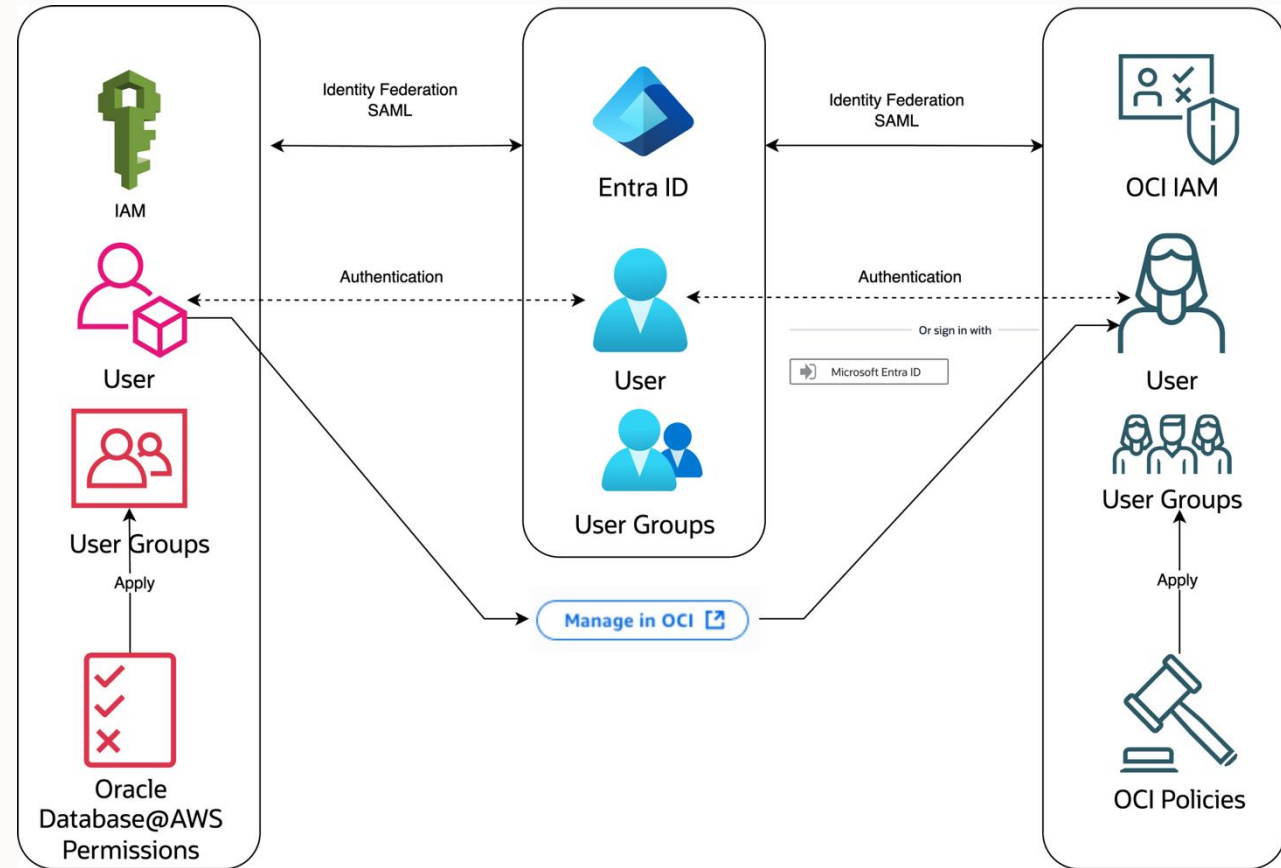

Database Authentication & User Management: Azure EntraID or OCI IAM


- Single integrated Authentication for the fleet of databases
- OAuth2 enabled flow that works similarly to Enterprise User Security & Centrally Managed Users
- Can be integrated with other 3rd Party Identity Providers for Database Login

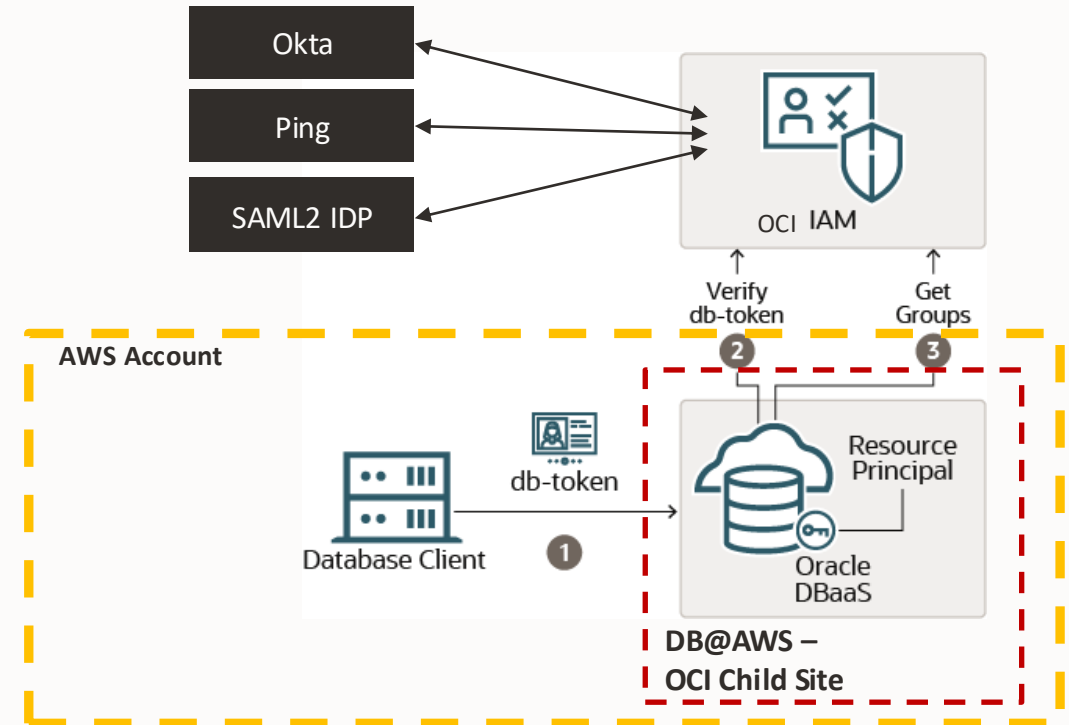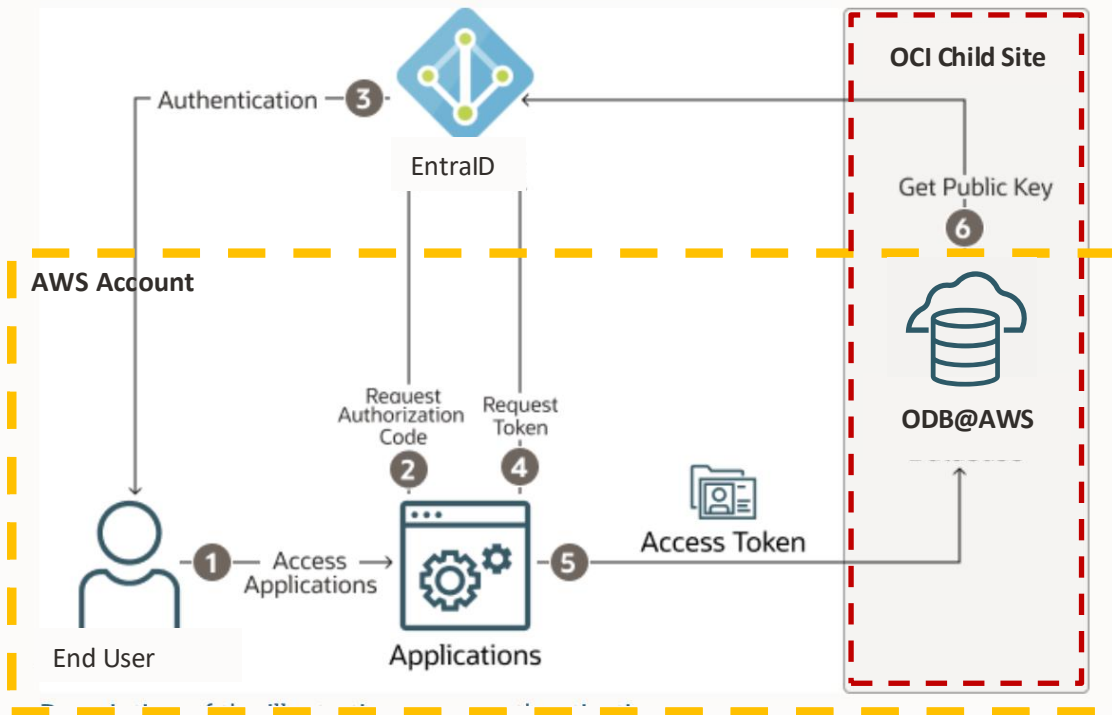

Security

Oracle Maximum Security Architecture

Defense in Depth to protect your data

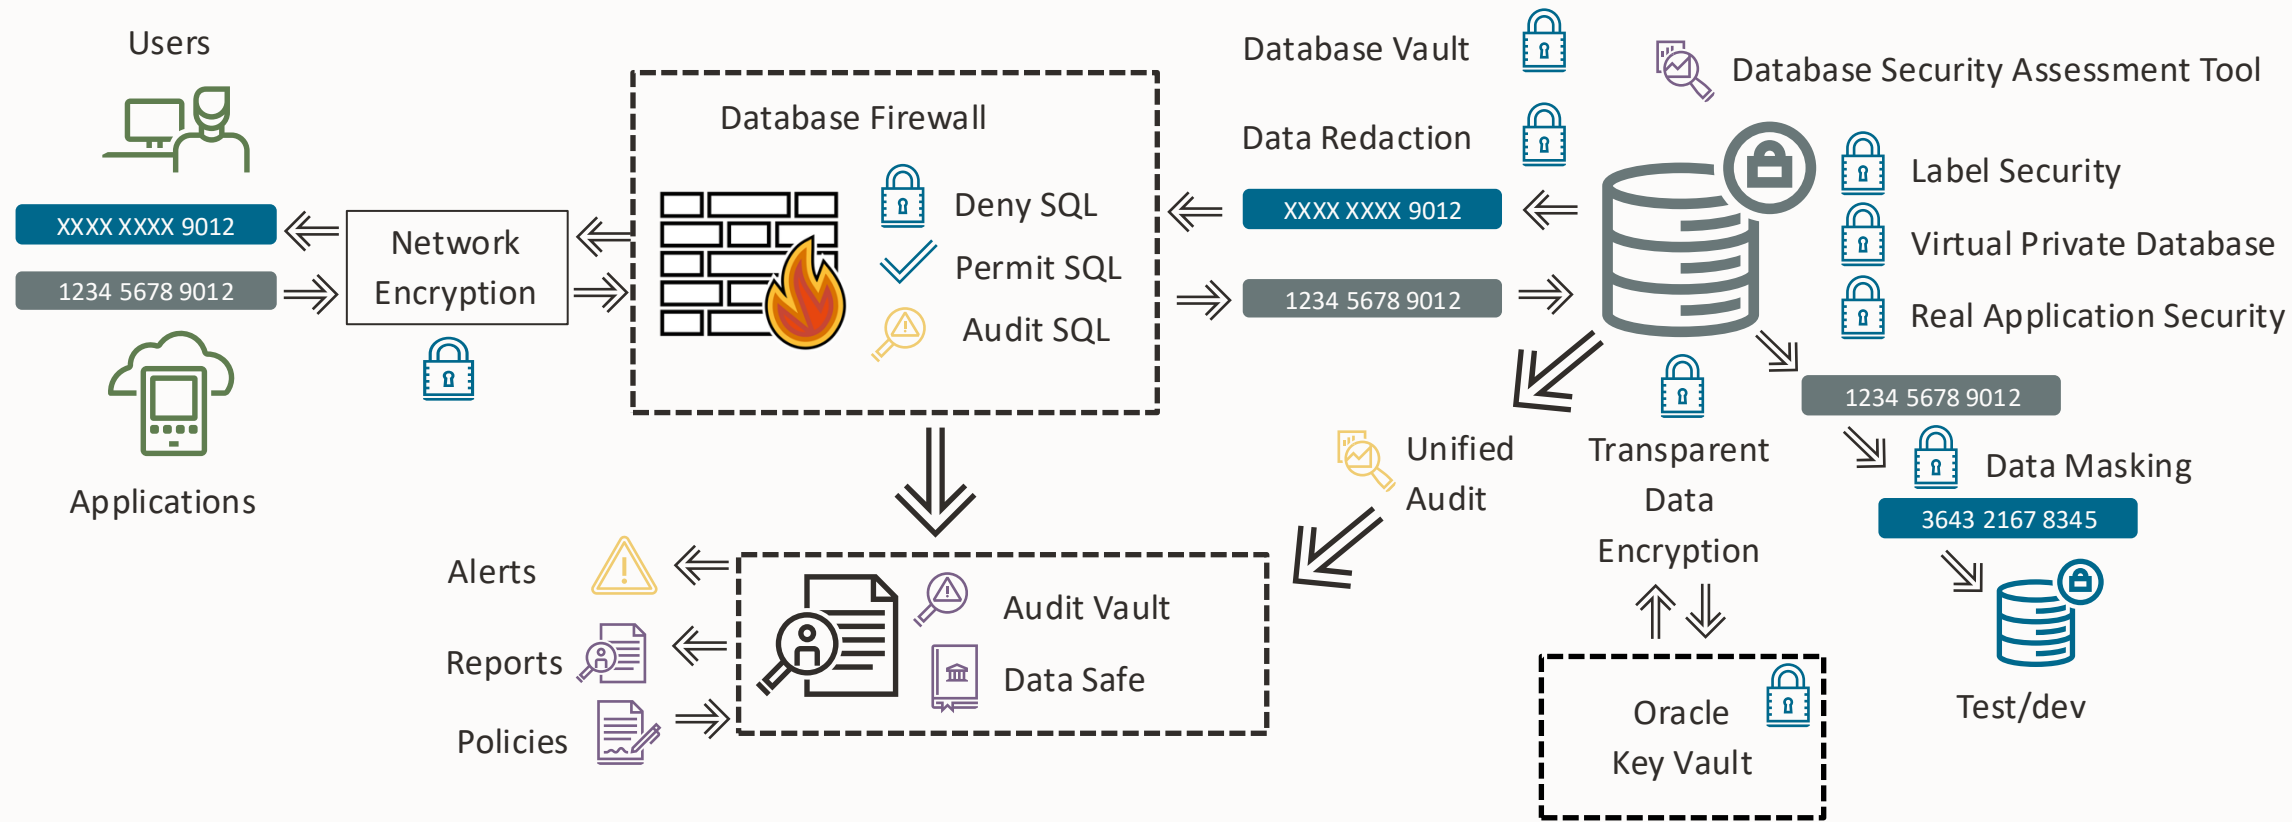

Oracle AI Database@AWS - Security

Security Feature	Granularity	Options	
Encryption and Key management	Encryption at rest	TDE (Wallet, OCI Vault, Oracle Key Vault)	AWS KMS
	Encryption in transit	SSL/NNE based	
Auditing	Database level	Unified Auditing/ Fine Grained Auditing	
	Resource level	AWS CloudTrail	
		OCI Audit Service	
Network Isolation	Database level	Database ACL, Database Firewall	
	VPC level	NACL, Security Groups	
Access restrictions	Database level	Database Vault, VPD, RLS	
	Resource level	AWS IAM Policies, groups/roles	


Oracle Database Feature

AWS feature

OCI feature



Encryption at rest – TDE key management options

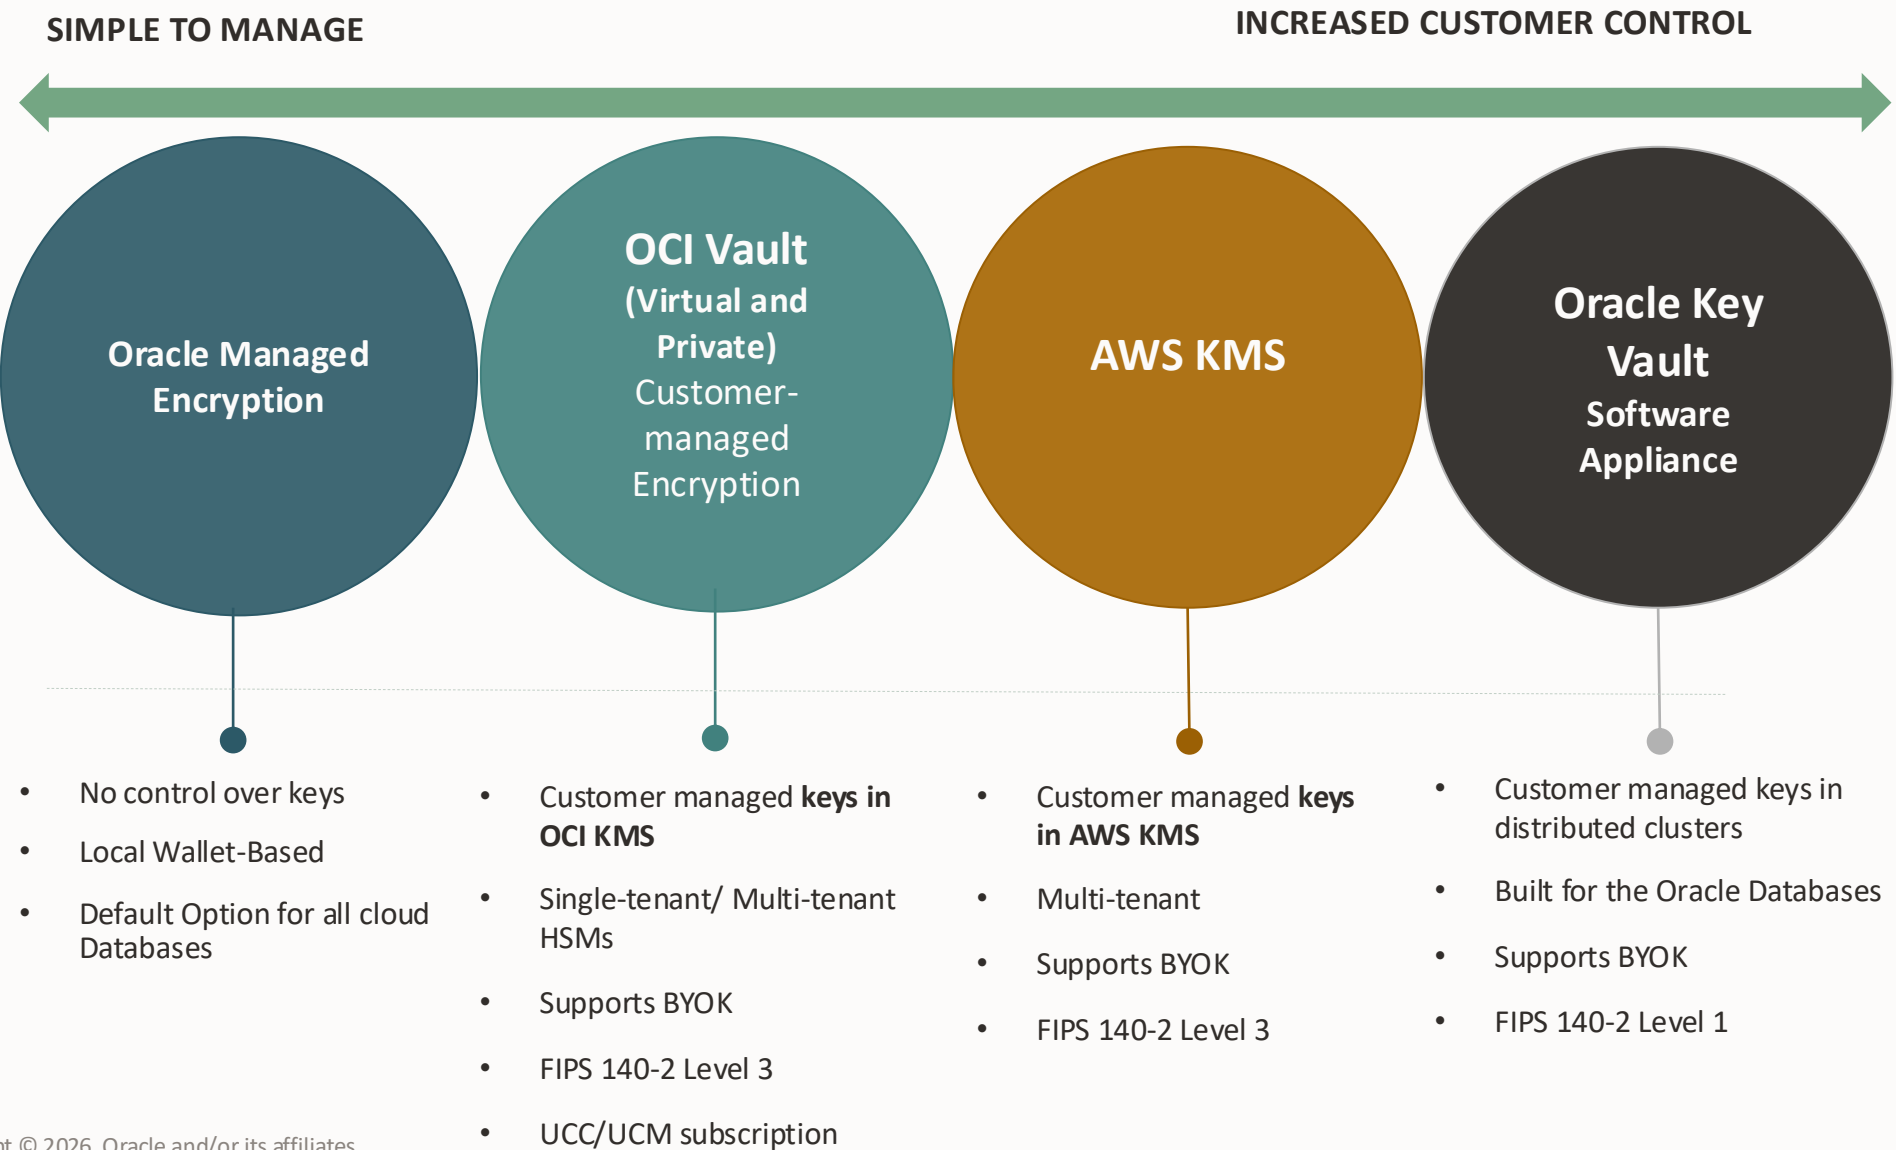


TDE Key Management Options


Key Management Source	Exadata Database Dedicated	Autonomous AI Database	Cross-AZ Dataguard Support	Cross-Region Dataguard Support
Local Oracle Wallet (Default)				
OCI Vault				 <i>**Requires Cross-Region Replication</i>
Oracle Key Vault (OKV)				 <i>**Requires Multi-Master Cluster</i>
AWS Key Management Service (AWS KMS)				 <i>**Use multi-region keys</i>



Exadata Database Service with AWS KMS Integration

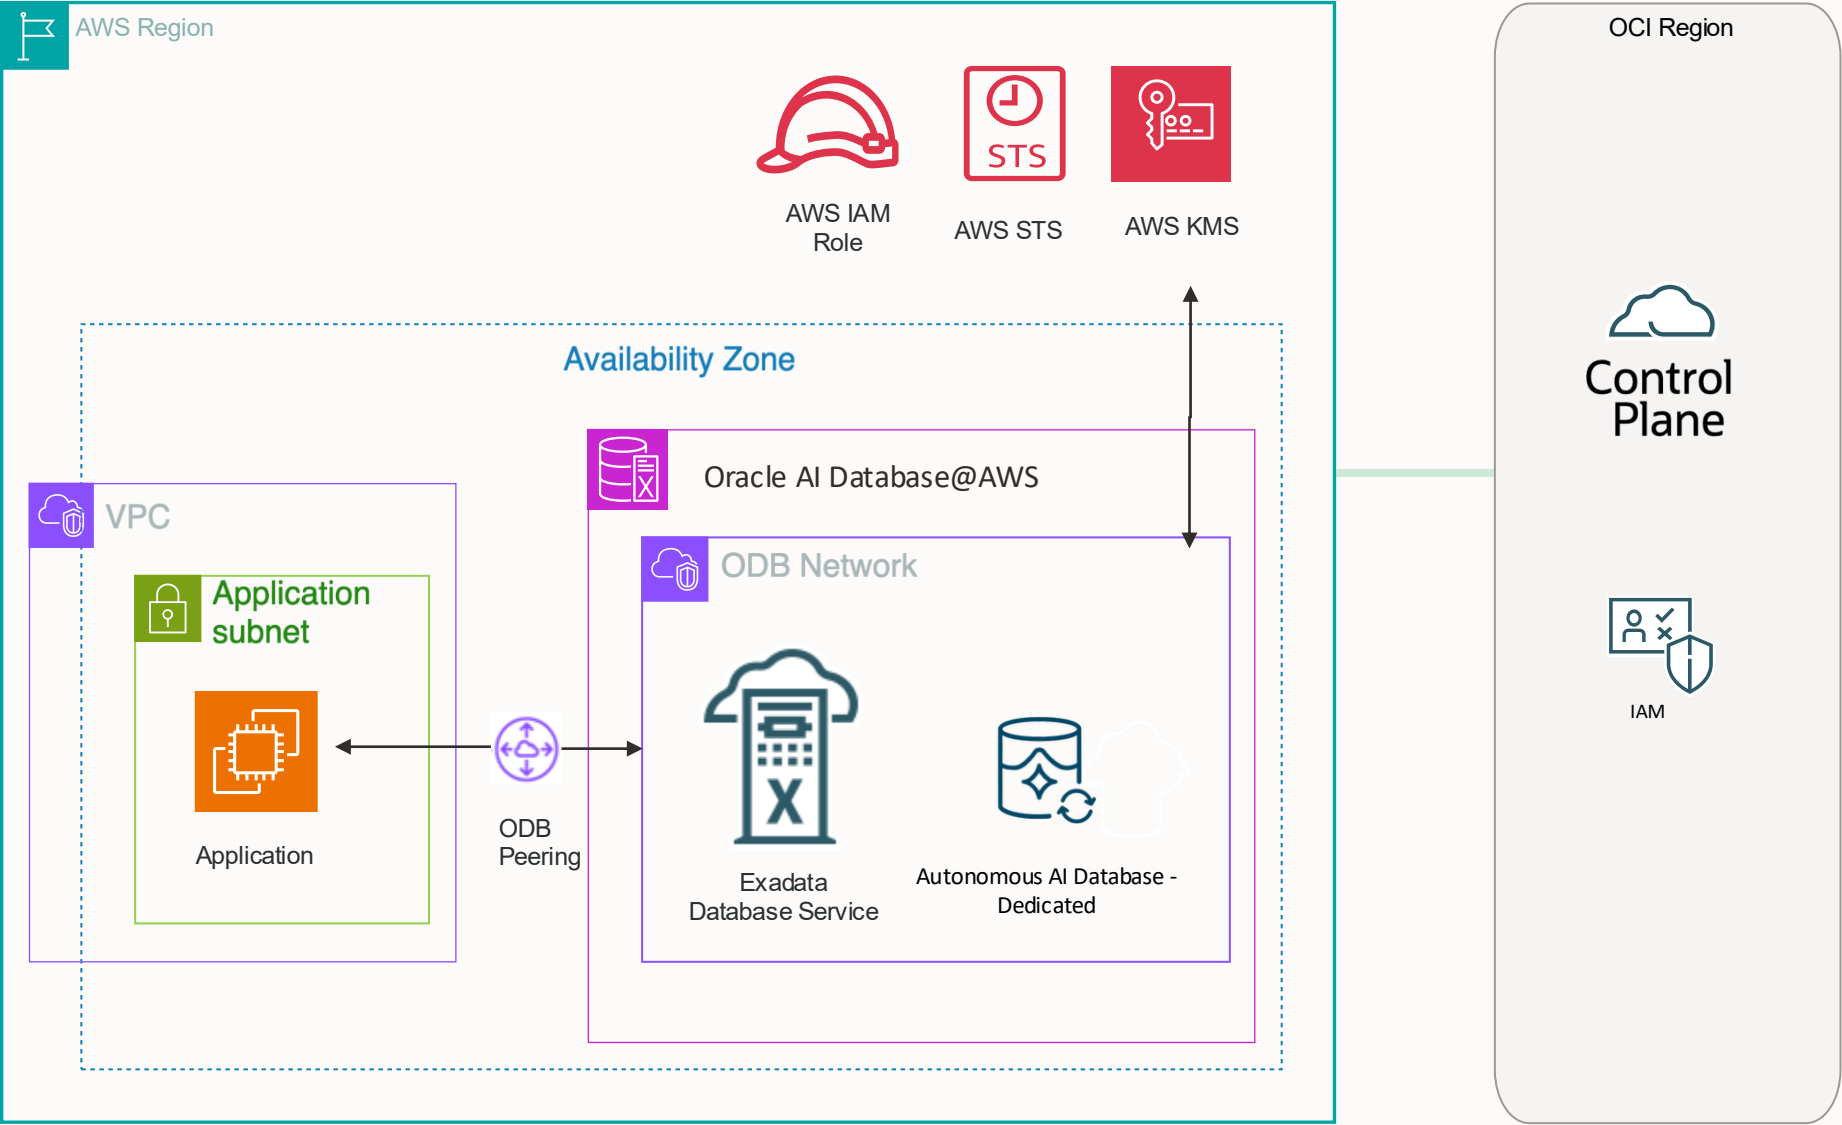


Oracle AI Database@AWS: Access to AWS KMS via STS flow

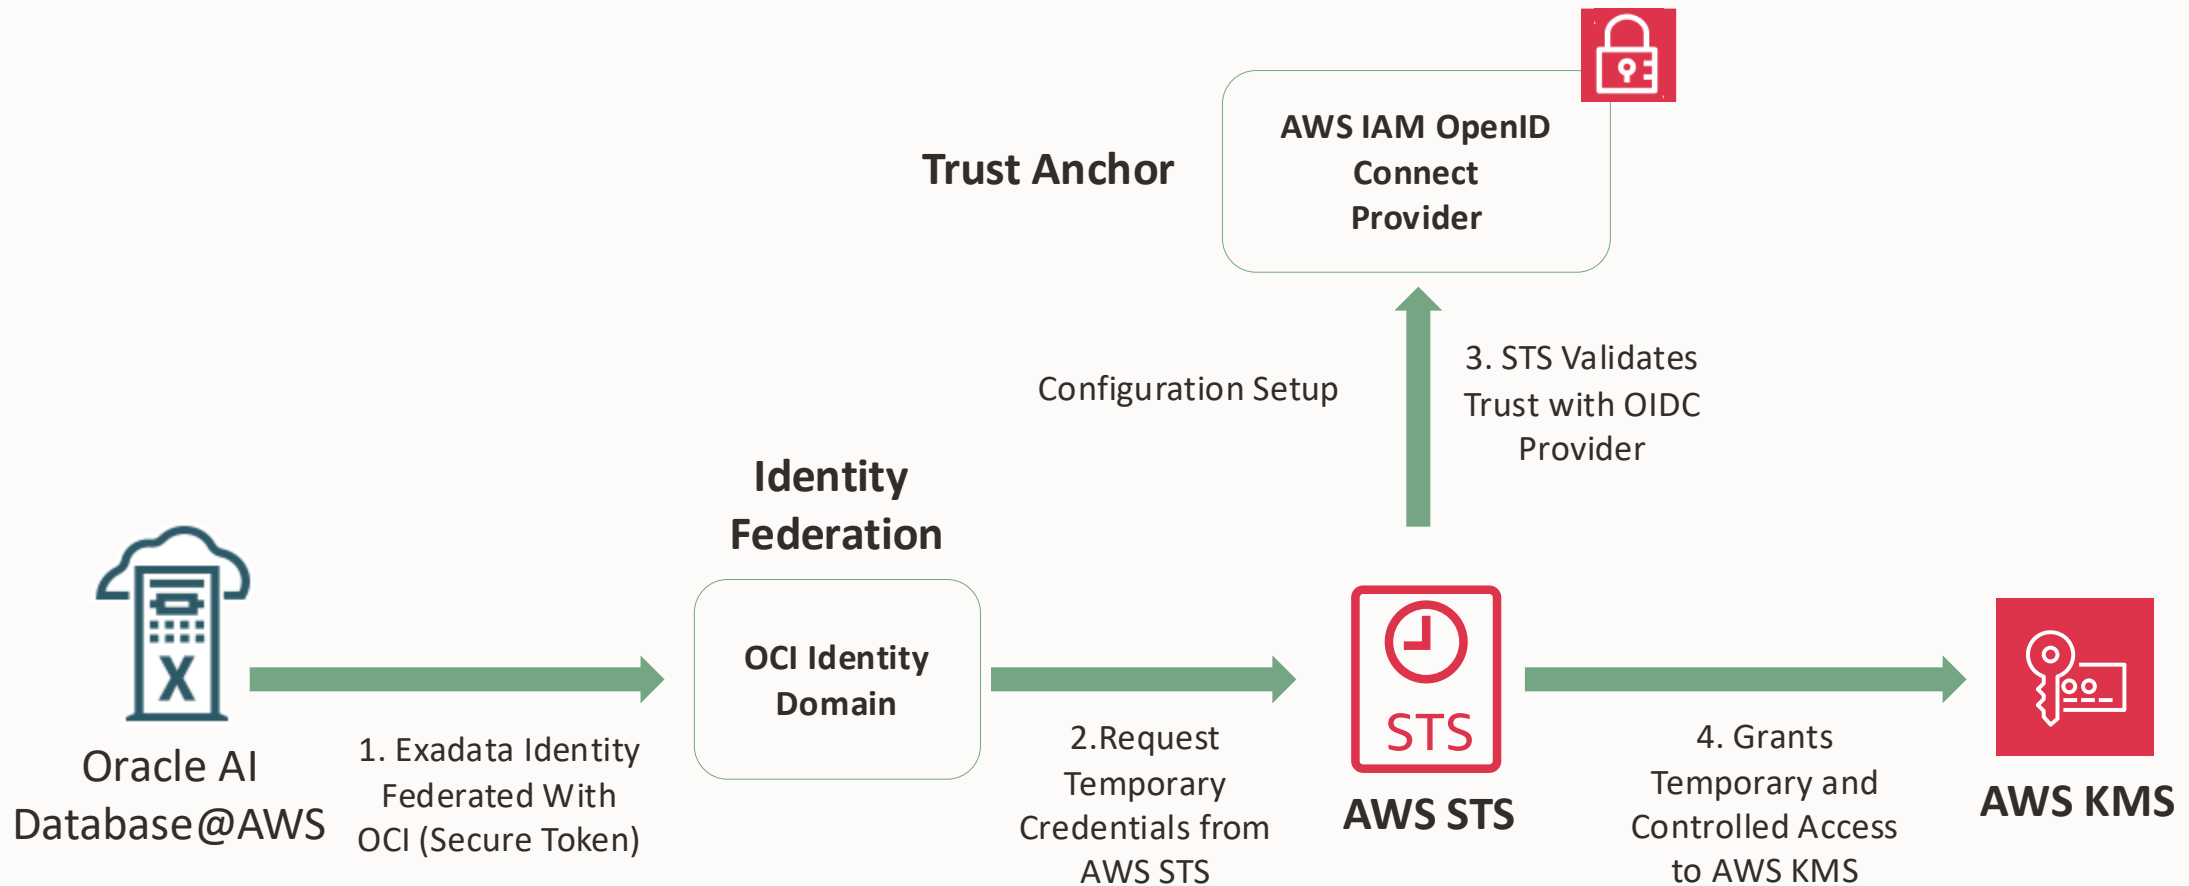


Key Benefits: No Long-Term Credentials – Improved Security Compliance – Native Integration

AWS KMS Integration – High level steps

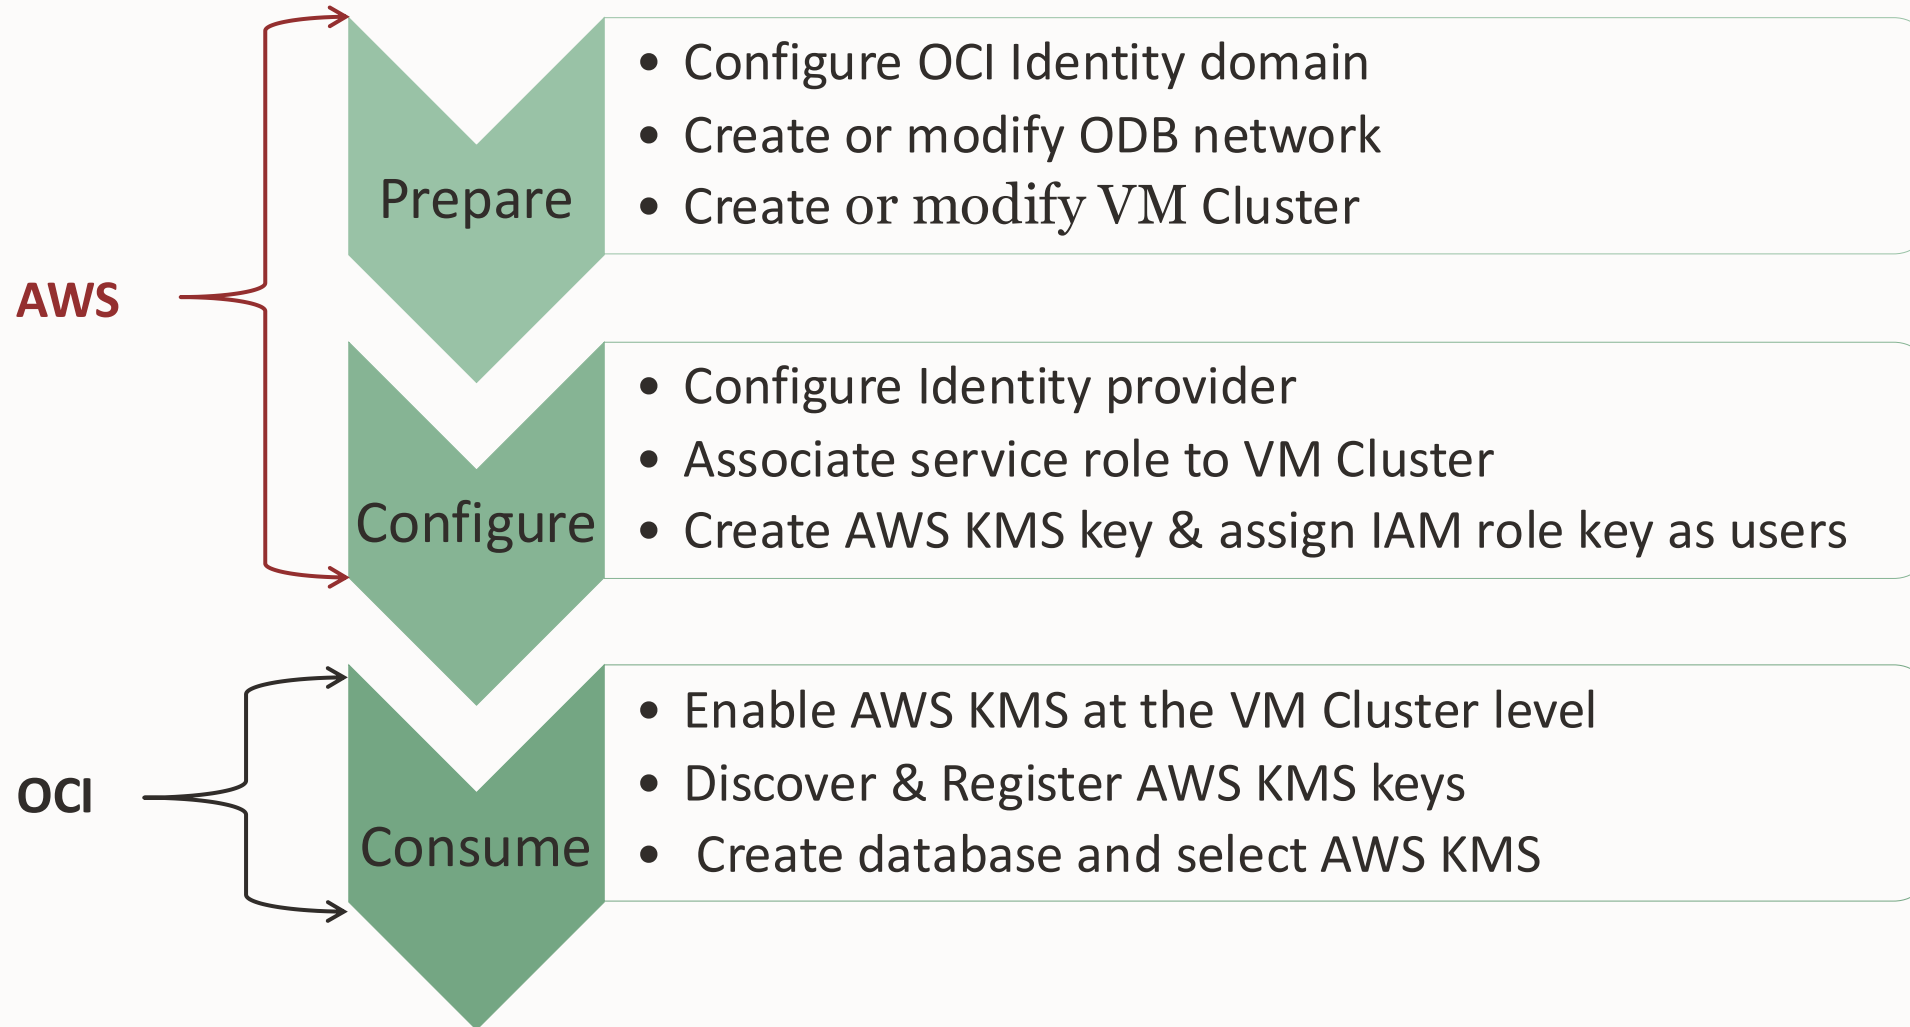

Oracle Key Vault for Oracle Database TDE on AWS

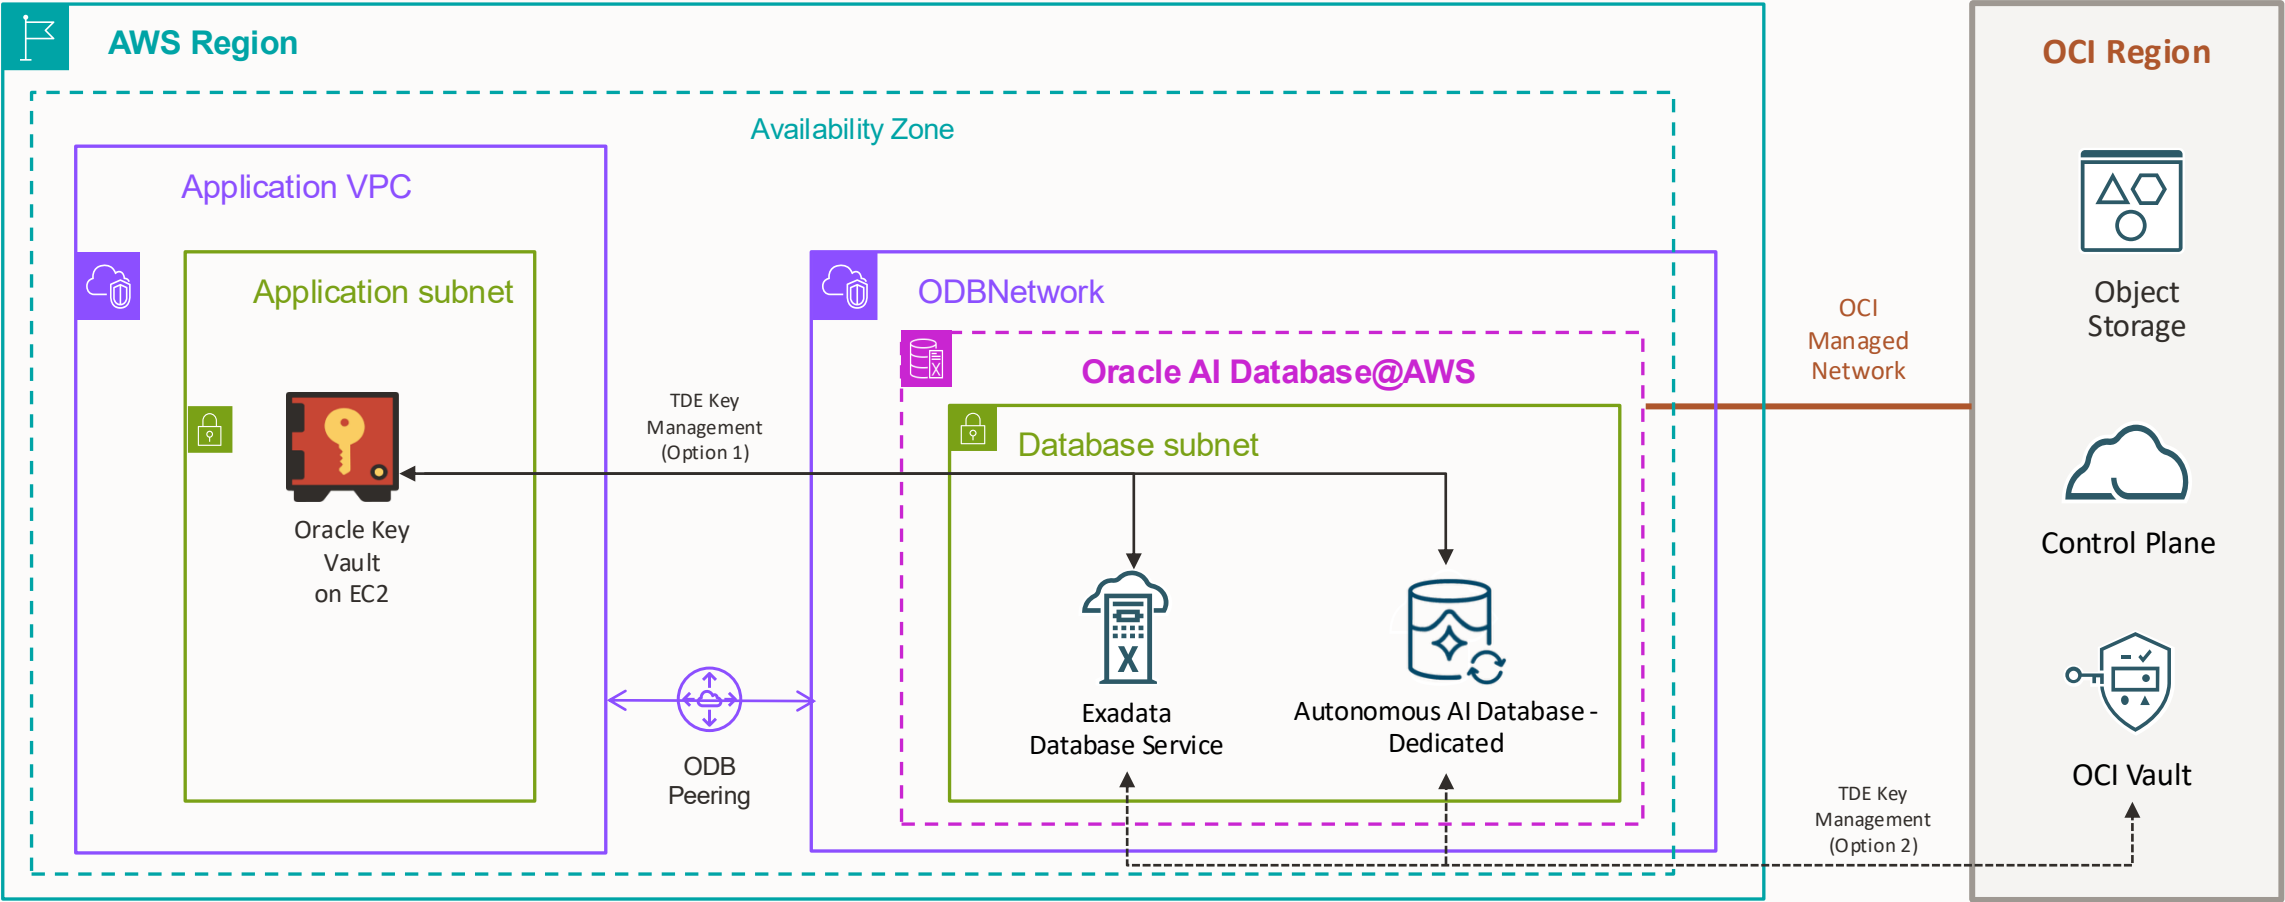

Option 1: Oracle Key Vault is the deployable software that can store keys in a clustered, distributed architecture, OKV License Required.

Option 2: OCI Vault is the default Key Management System for Oracle AI Database@AWS. To use OCI Vault, **OCI Universal Cloud Credits(UCC)** are required



Resource Modeling

Resource Modeling

Resource Sharing with AWS Resource Access Manager (RAM)	Subscription Sharing/ Entitlement Sharing with AWS License Manager
• Share Exadata Infrastructure and ODB Network with multiple accounts. • Recipient accounts create VM clusters.	• Multiple accounts can provision Exadata Infra and ODB Network


Both methods can also be used simultaneously.

Only works:

1. A single private offer can only be associated to a single OCI tenancy.
2. AWS accounts need to be in the same AWS organization.
3. Each AWS account is associated to one OCI compartment.


Resource Modeling

AWS Accounts/Organizations to OCI Tenancy/Compartments to resource management

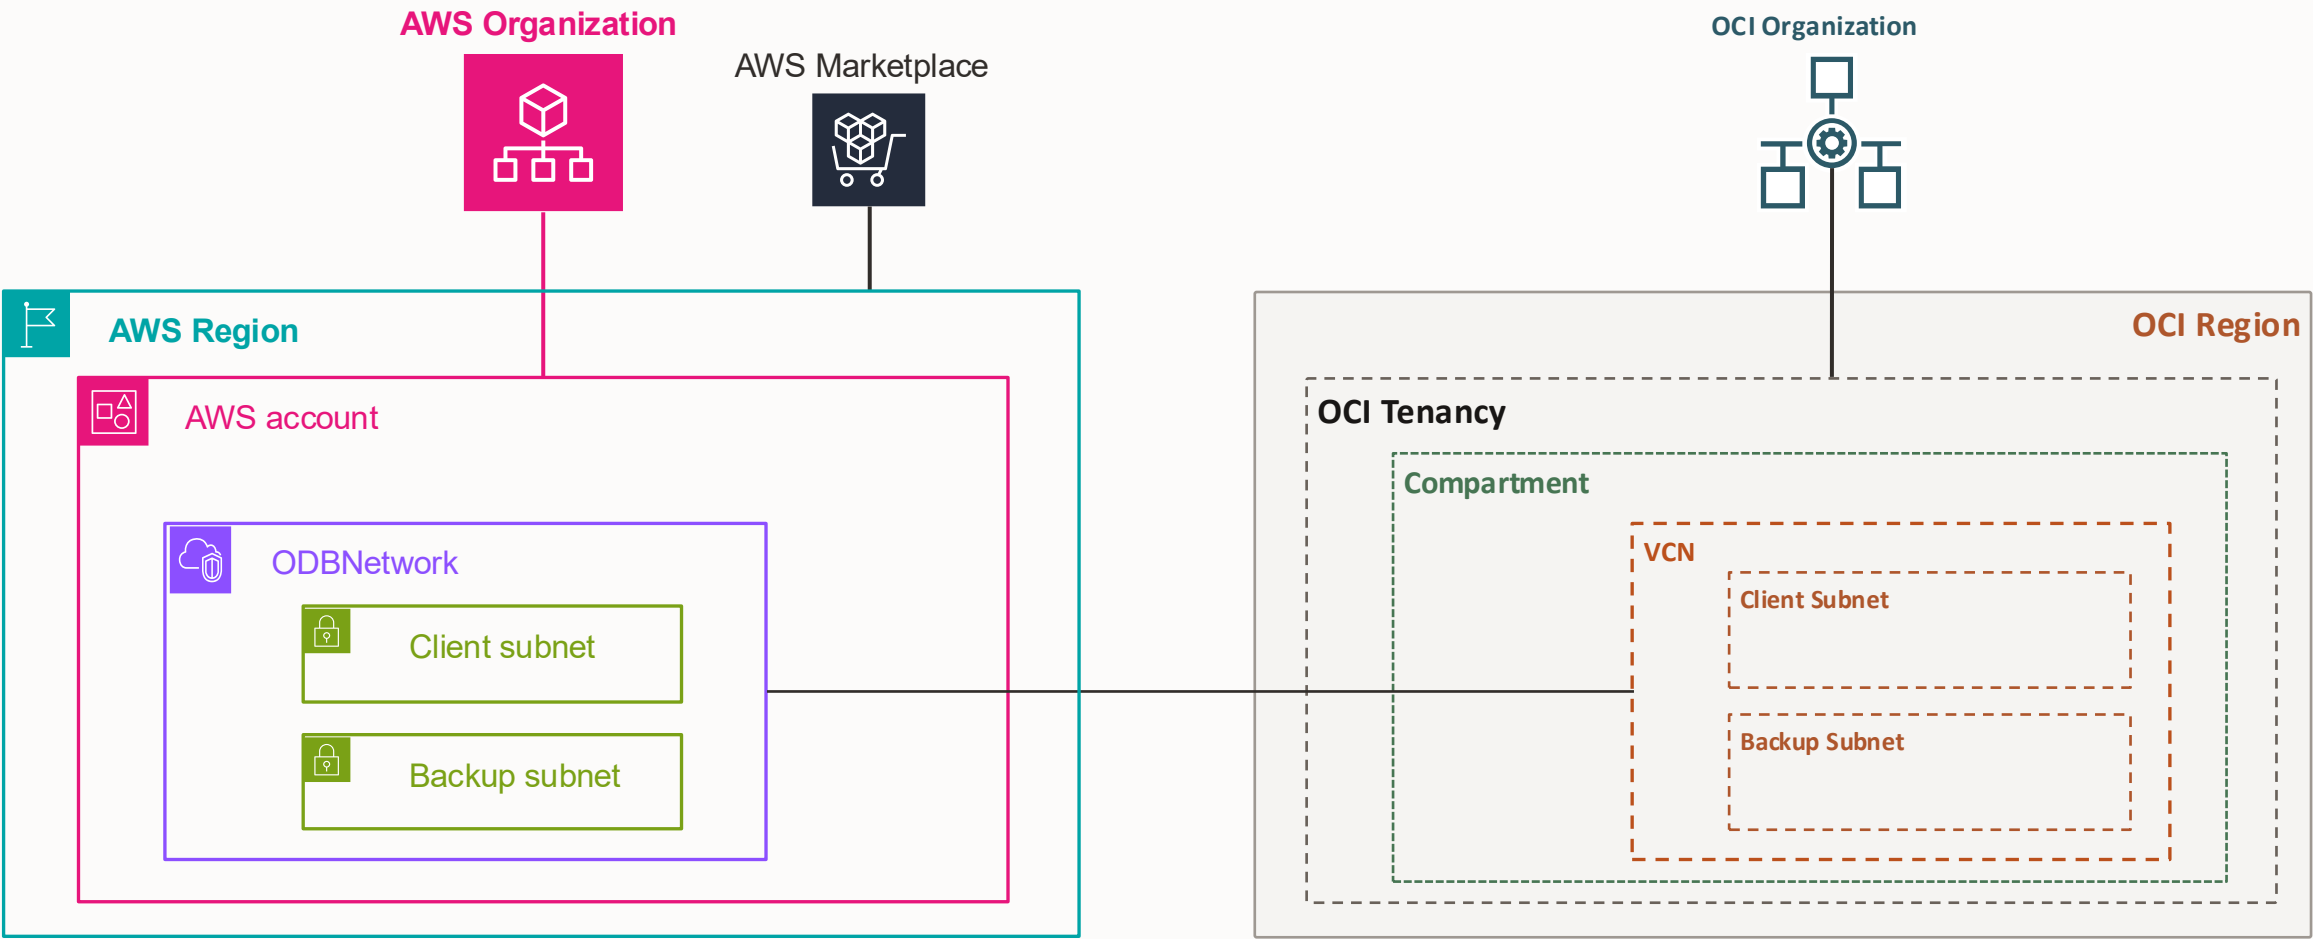


Resource Modeling – AWS RAM Sharing

AWS Accounts and Organizations

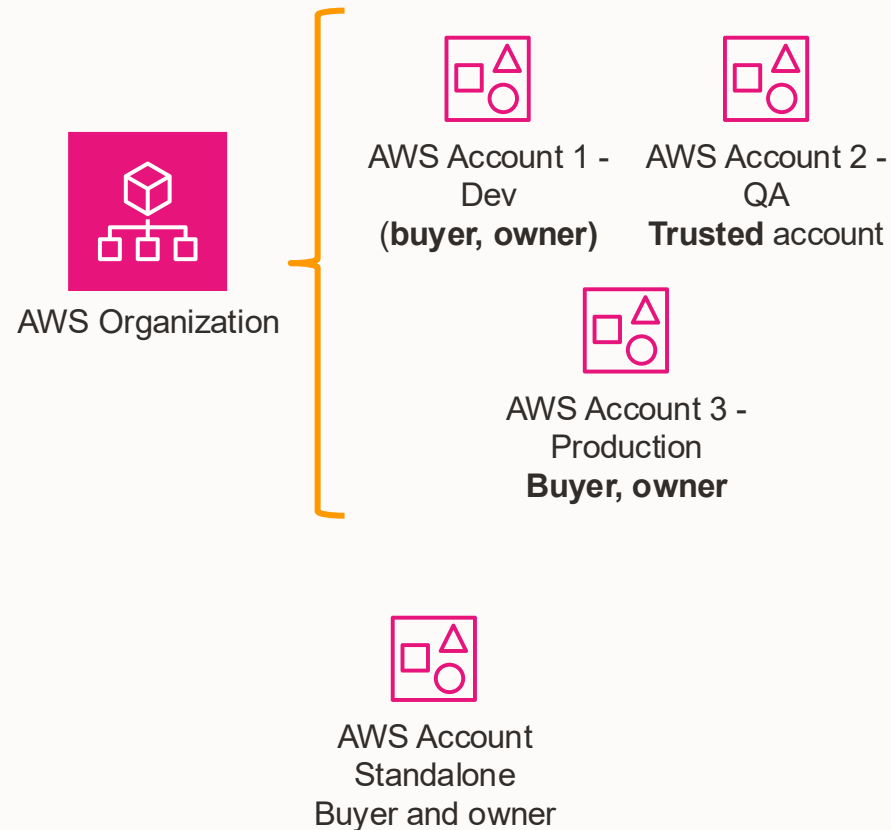


- An **AWS account** can exist as a standalone or as part of an AWS Organization
- An **AWS Organization** can have one or more Accounts, where one Account is designated as the **buyer** account.
- The **buyer** account **requests** and **accepts** the **private offer**.
- The **owner** account is the AWS account where the **resources** Oracle AI Database@AWS are **deployed**.
- **Trusted** account is **granted** permissions by the owner account.

Resource Sharing (RAM): ODB Network

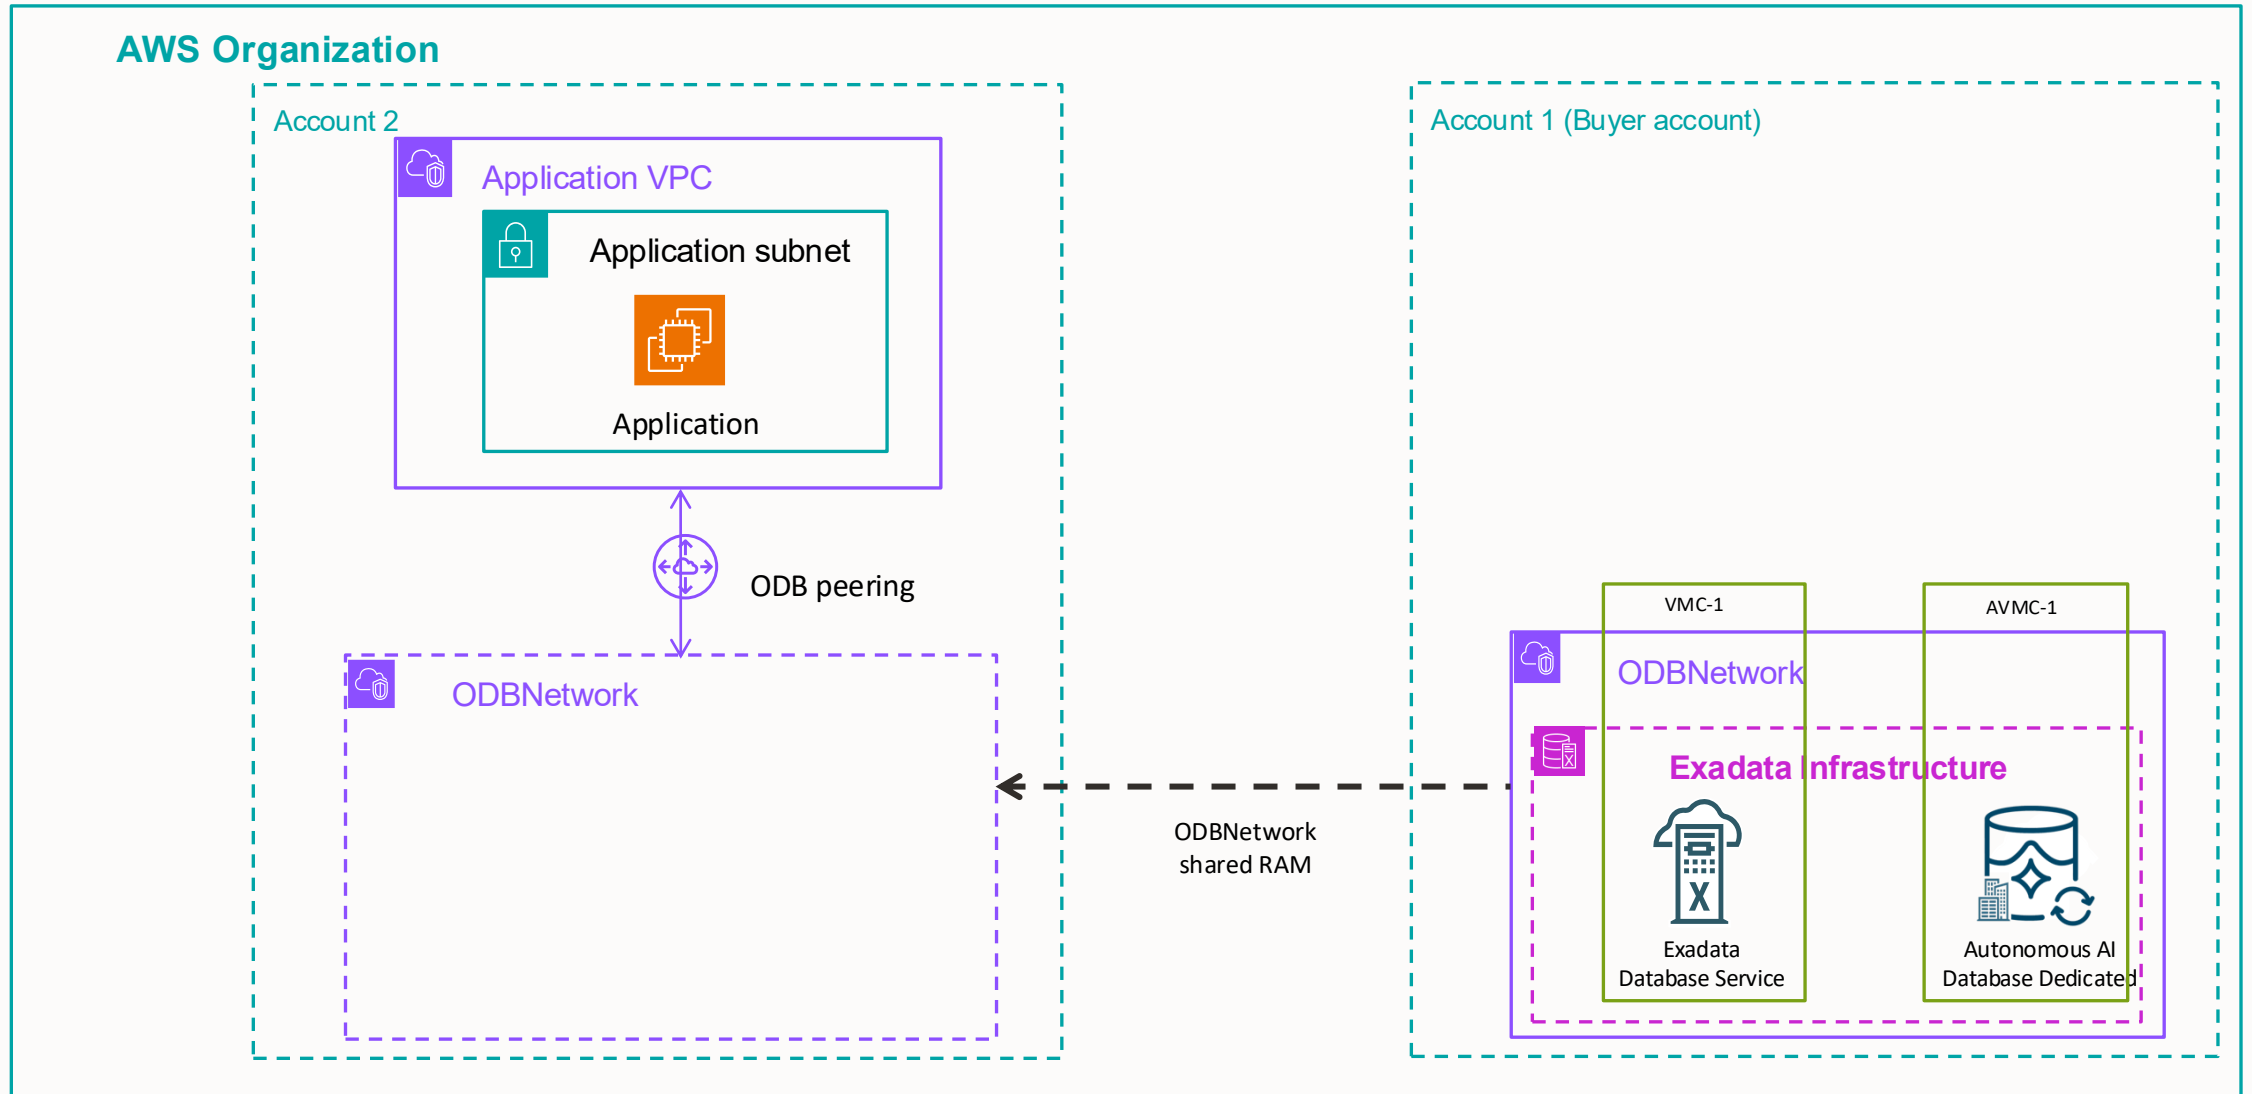


Resource Sharing (RAM): Exadata Infrastructure and ODB Network

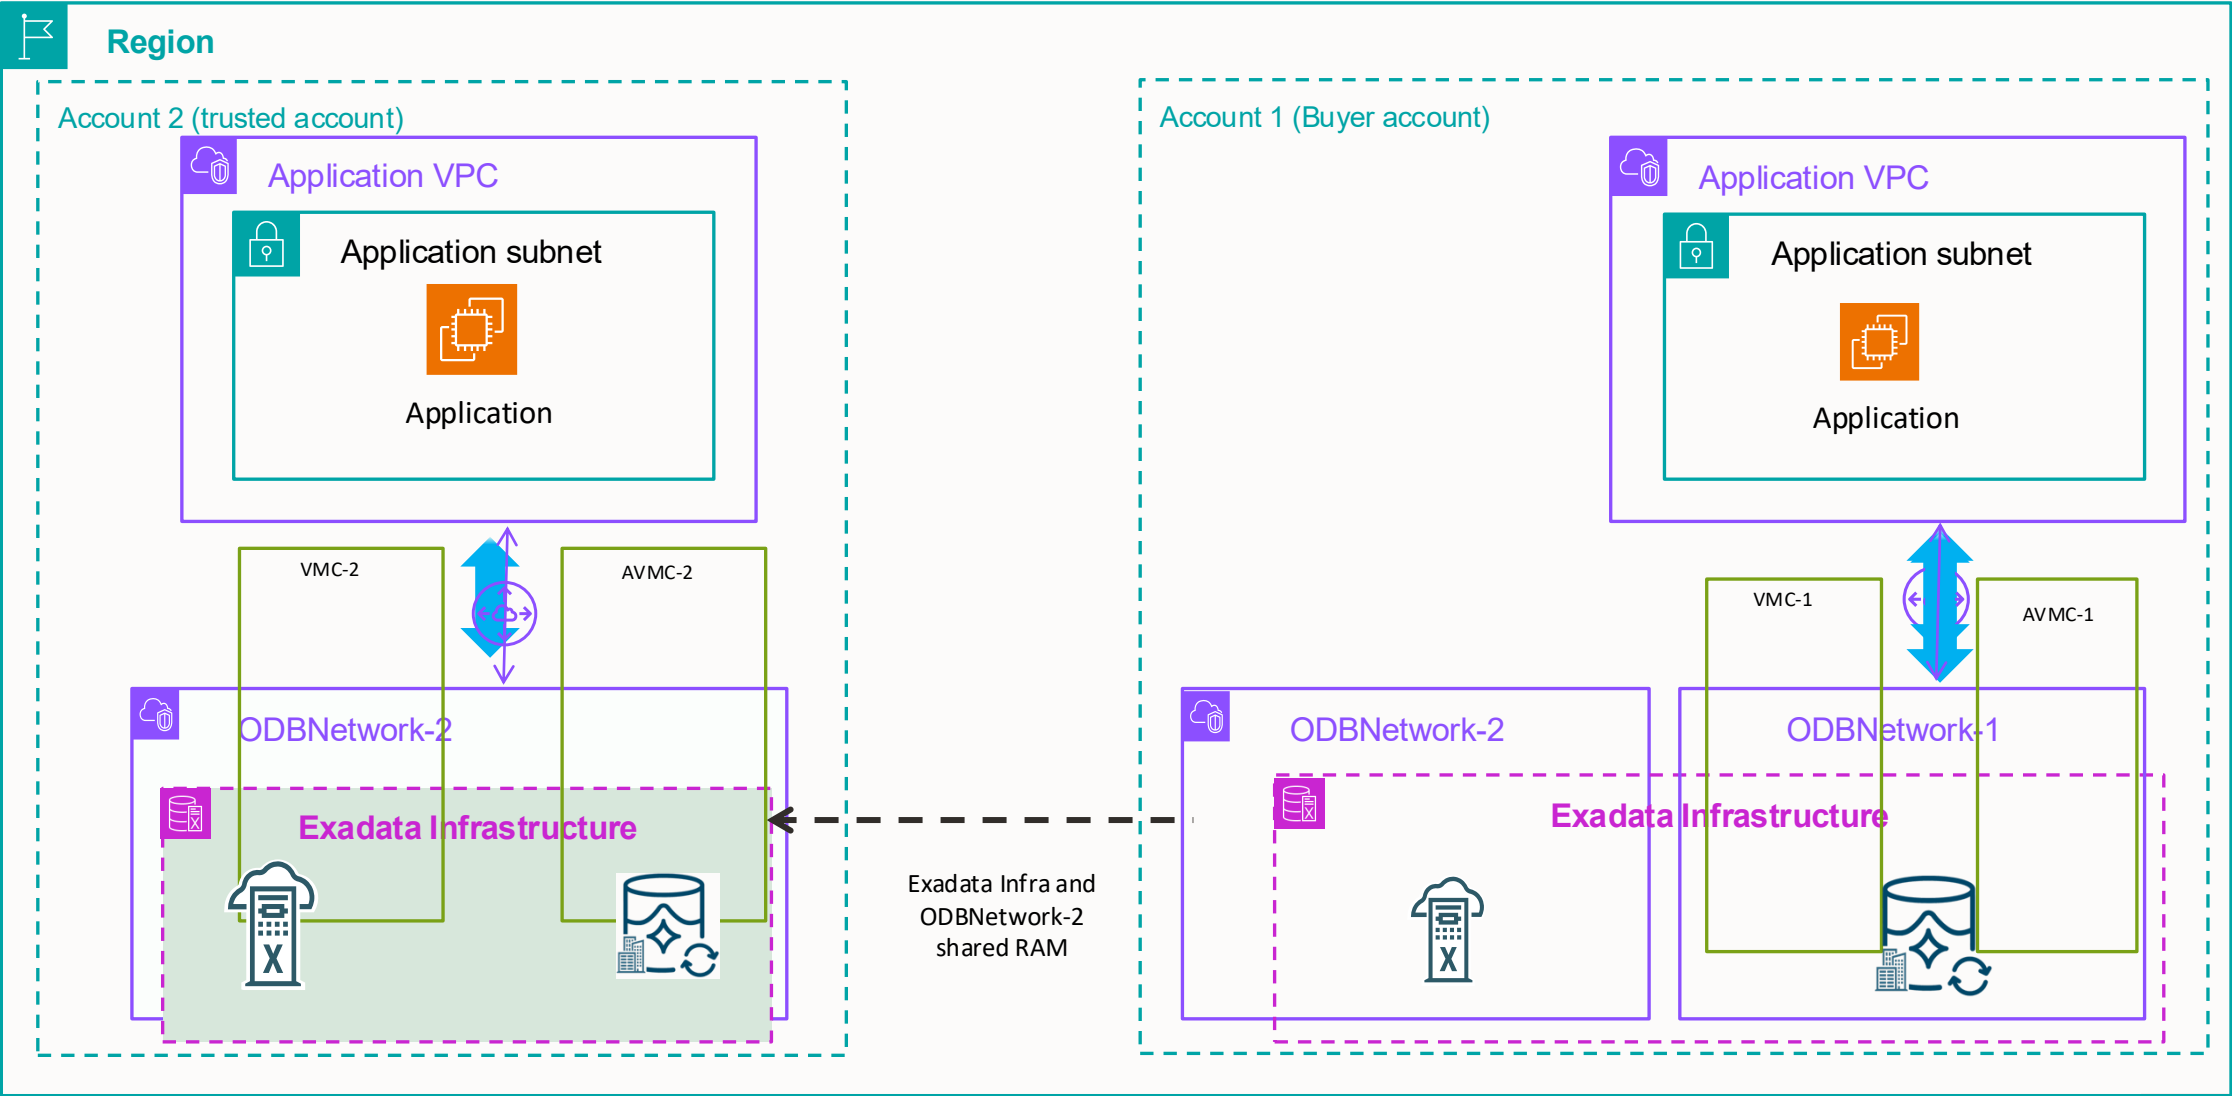


Resource Sharing (RAM) – Cross Account


AWS Accounts/Organizations to OCI Tenancy/Compartments to resource management

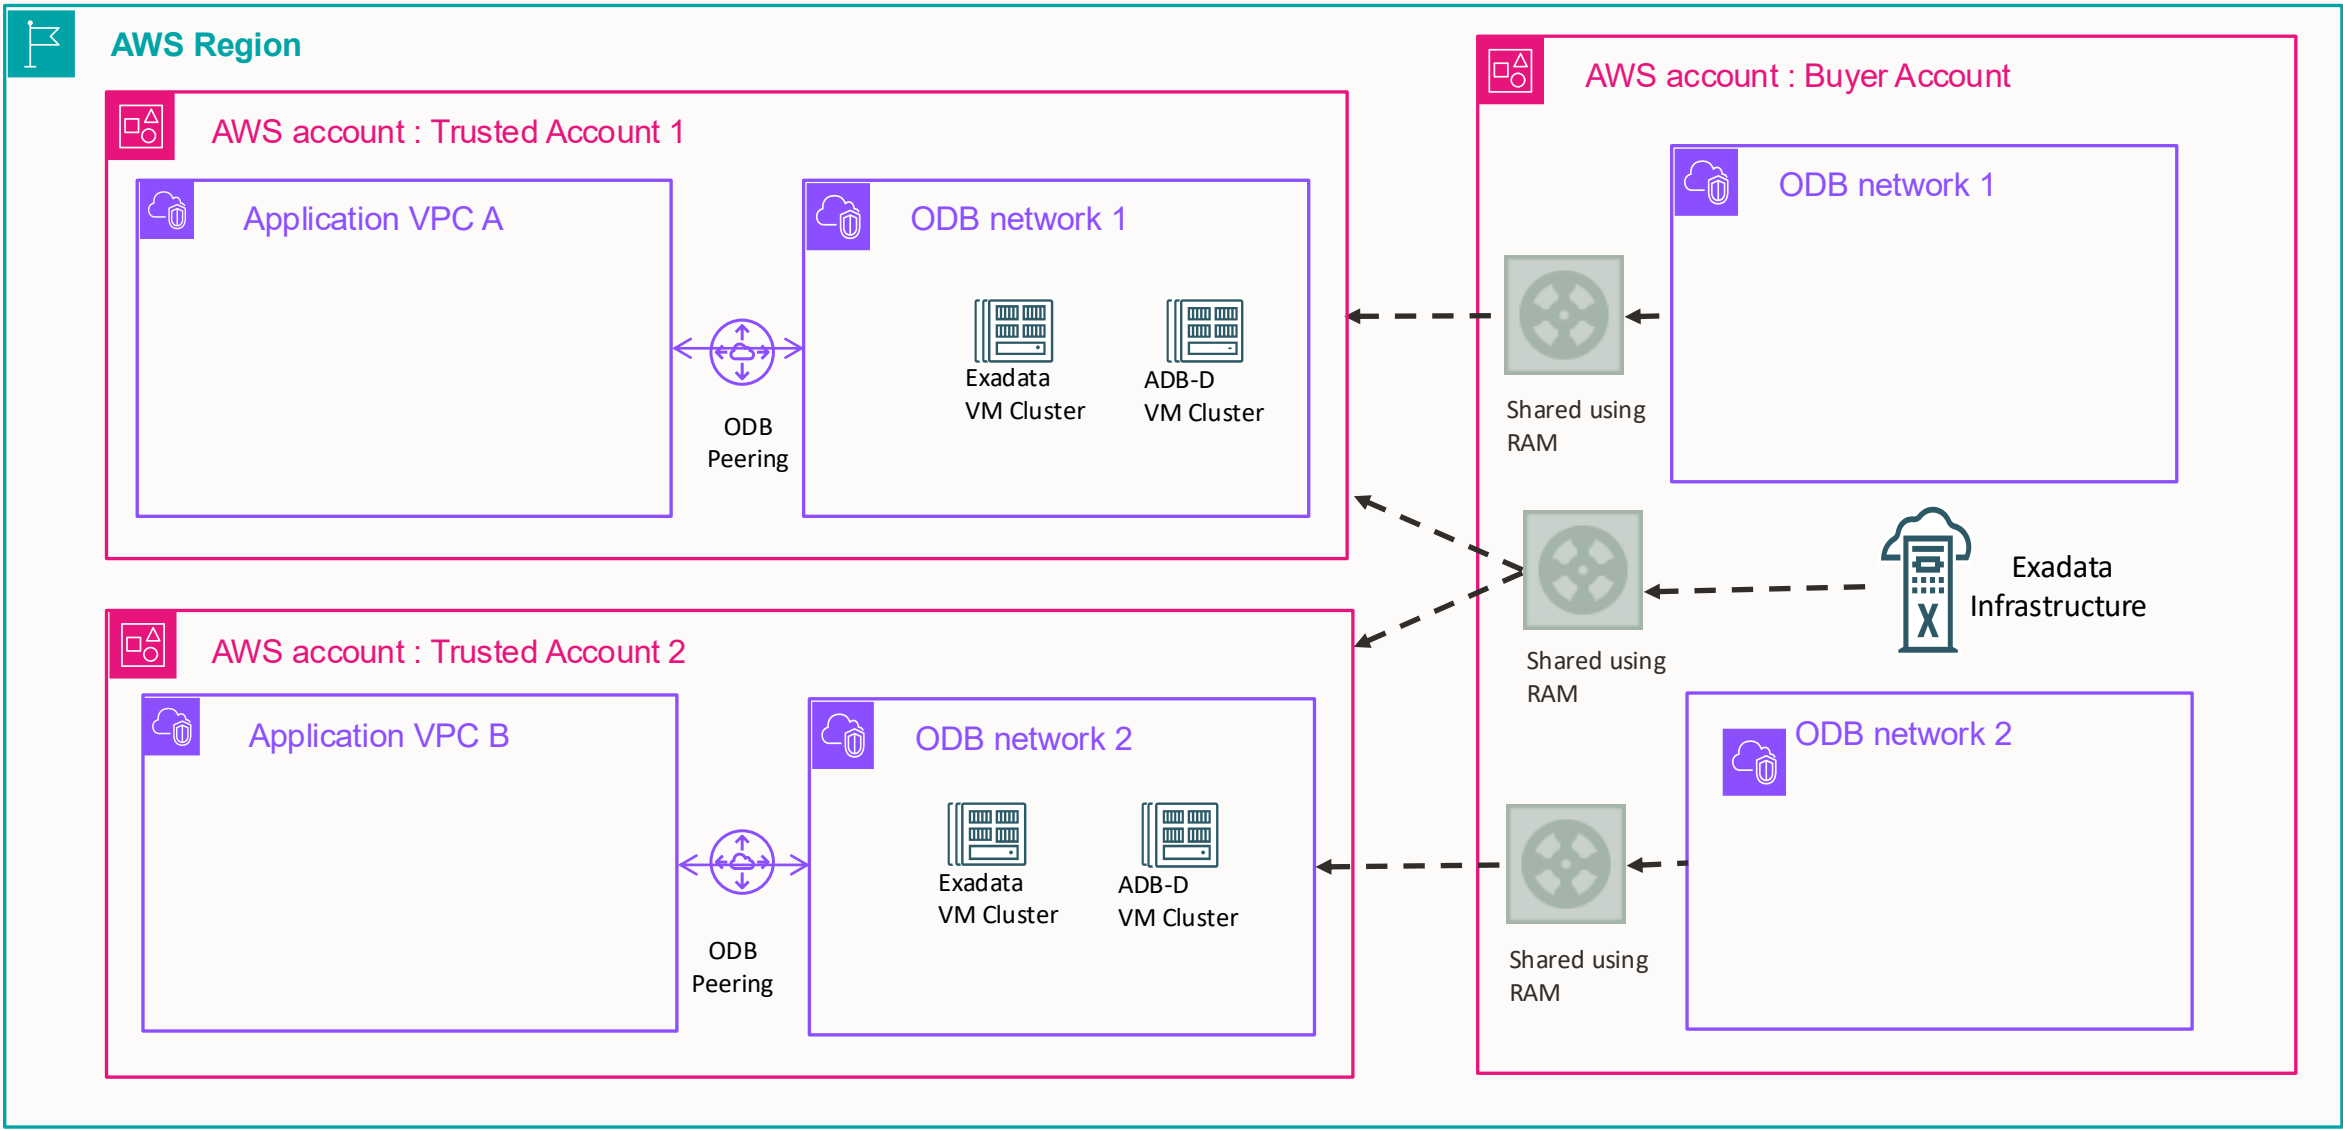

Resource Sharing (RAM) – Resource Isolation

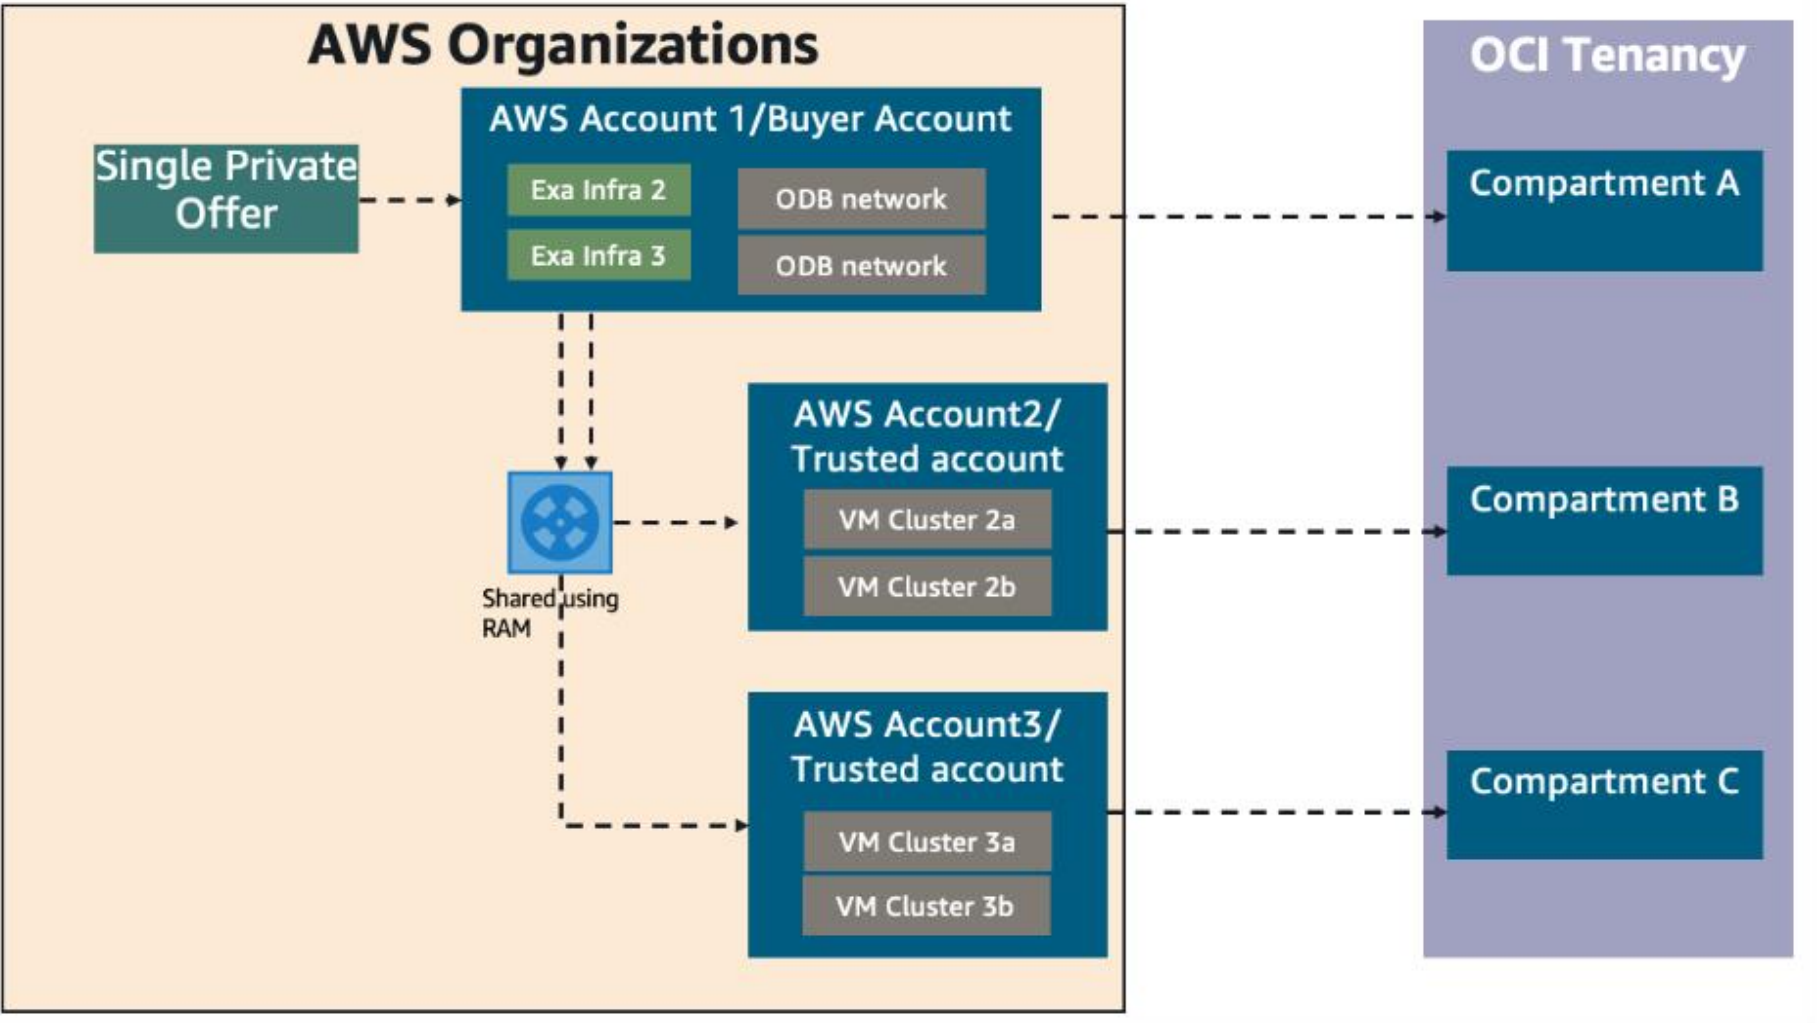


Resource Sharing across AWS Accounts - RAM

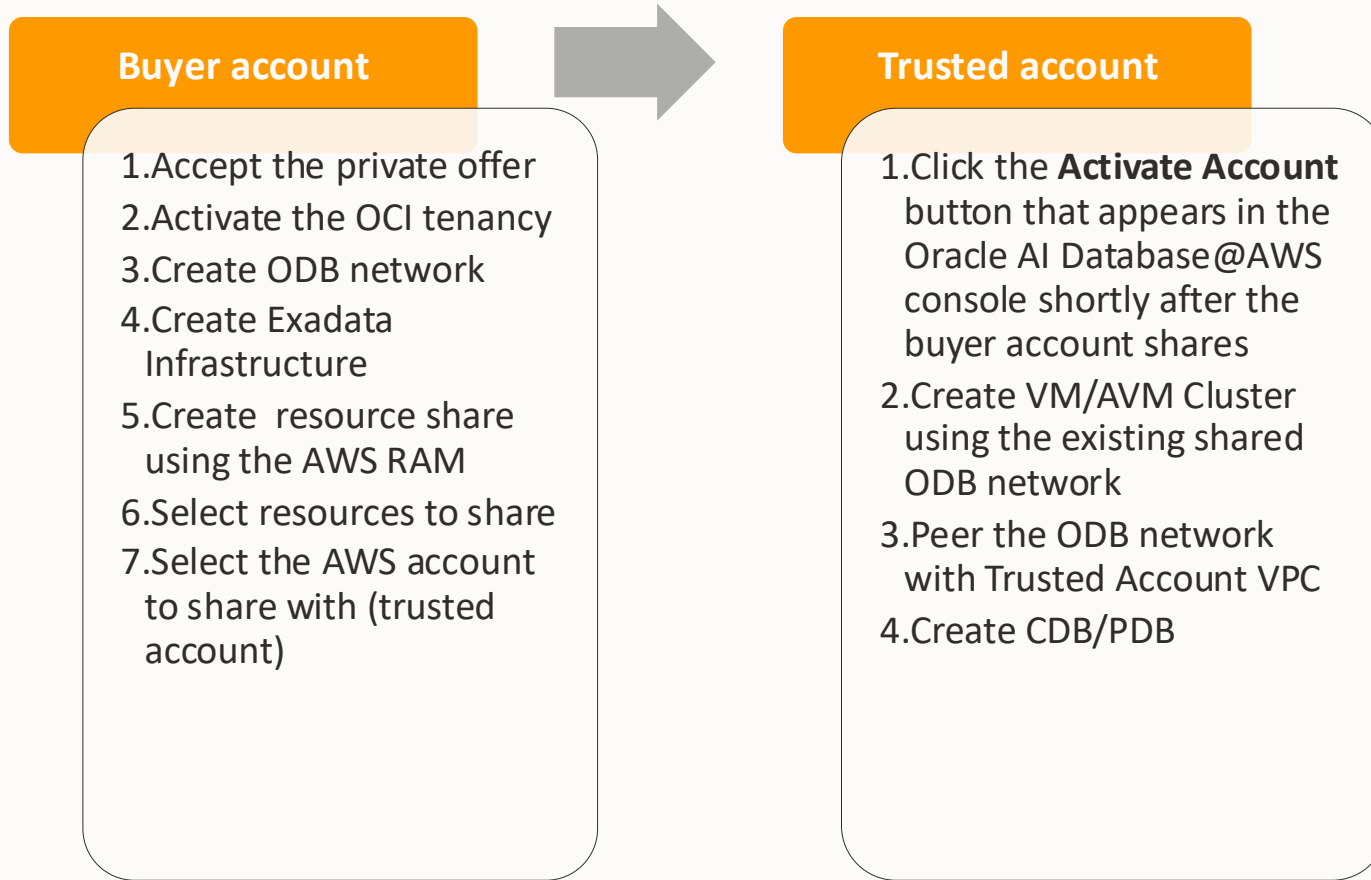


Considerations

- Buyer, owner and trusted accounts must be part of the **same AWS Organization**
 - Only buyer account can create Exadata Infrastructure and ODB network
- The Trusted Account can create ODB-VPC peering with a VPC in its account
 - ODB Network can peer with only one VPC (either from the buyer account or the trusted account)
 - Trusted account cannot create ODB network or Exadata Infrastructure
 - Trusted account can create VM clusters on the shared resources
- Buyer Account can delete sharing with the Trusted Account

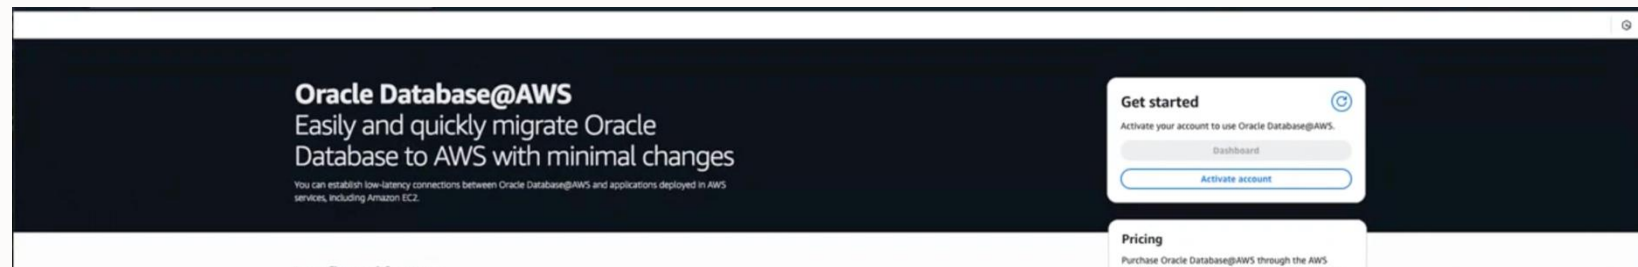


Resource Modeling – Subscription Sharing

AWS Accounts and Organizations

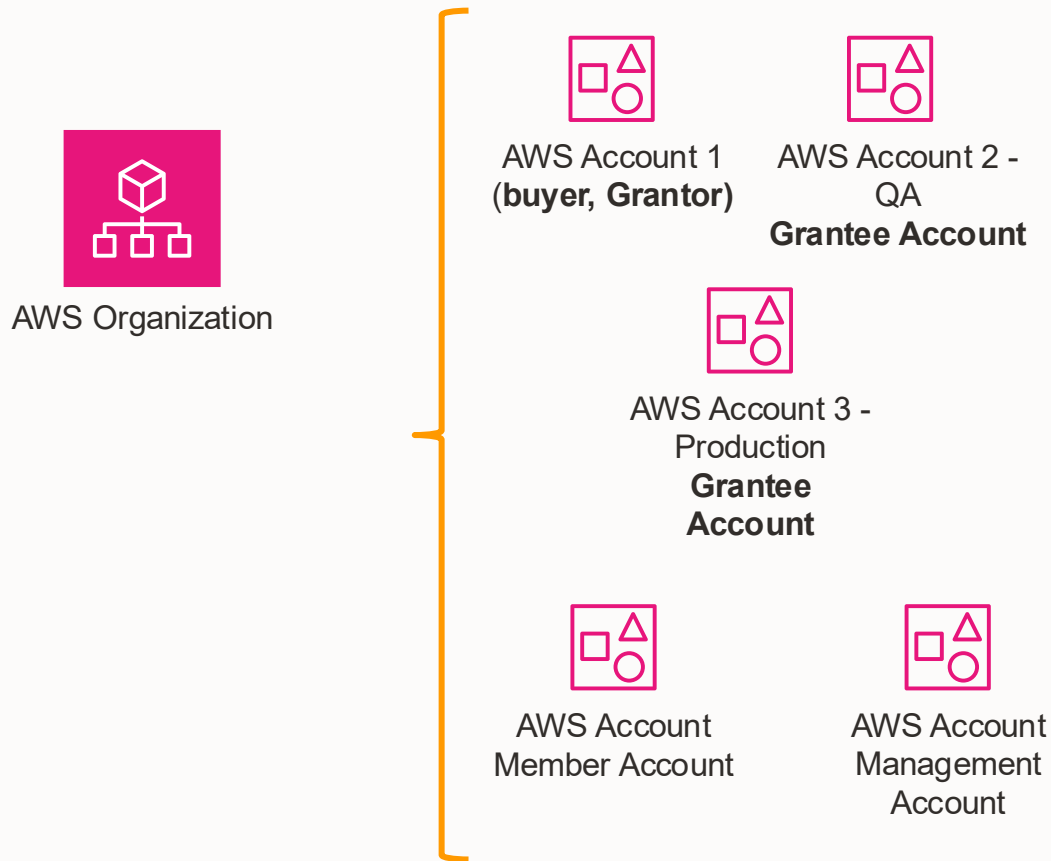


- An **AWS account** can exist as a standalone or as part of an AWS Organization
- An **AWS Organization** can have one or more Accounts, where one Account is designated as the **buyer** account.
- The **buyer** account **requests** and **accepts** the **private offer**.
- The **Grantor** account enables subscription sharing through **License Manager**
- The **Grantee** account receives subscription sharing through **License Manager**
- The **owner** account is the AWS account where the **resources** Oracle AI Database@AWS are **deployed**.
- **Trusted** account is **granted** permissions by the owner account.


Subscription Sharing – Cross Account

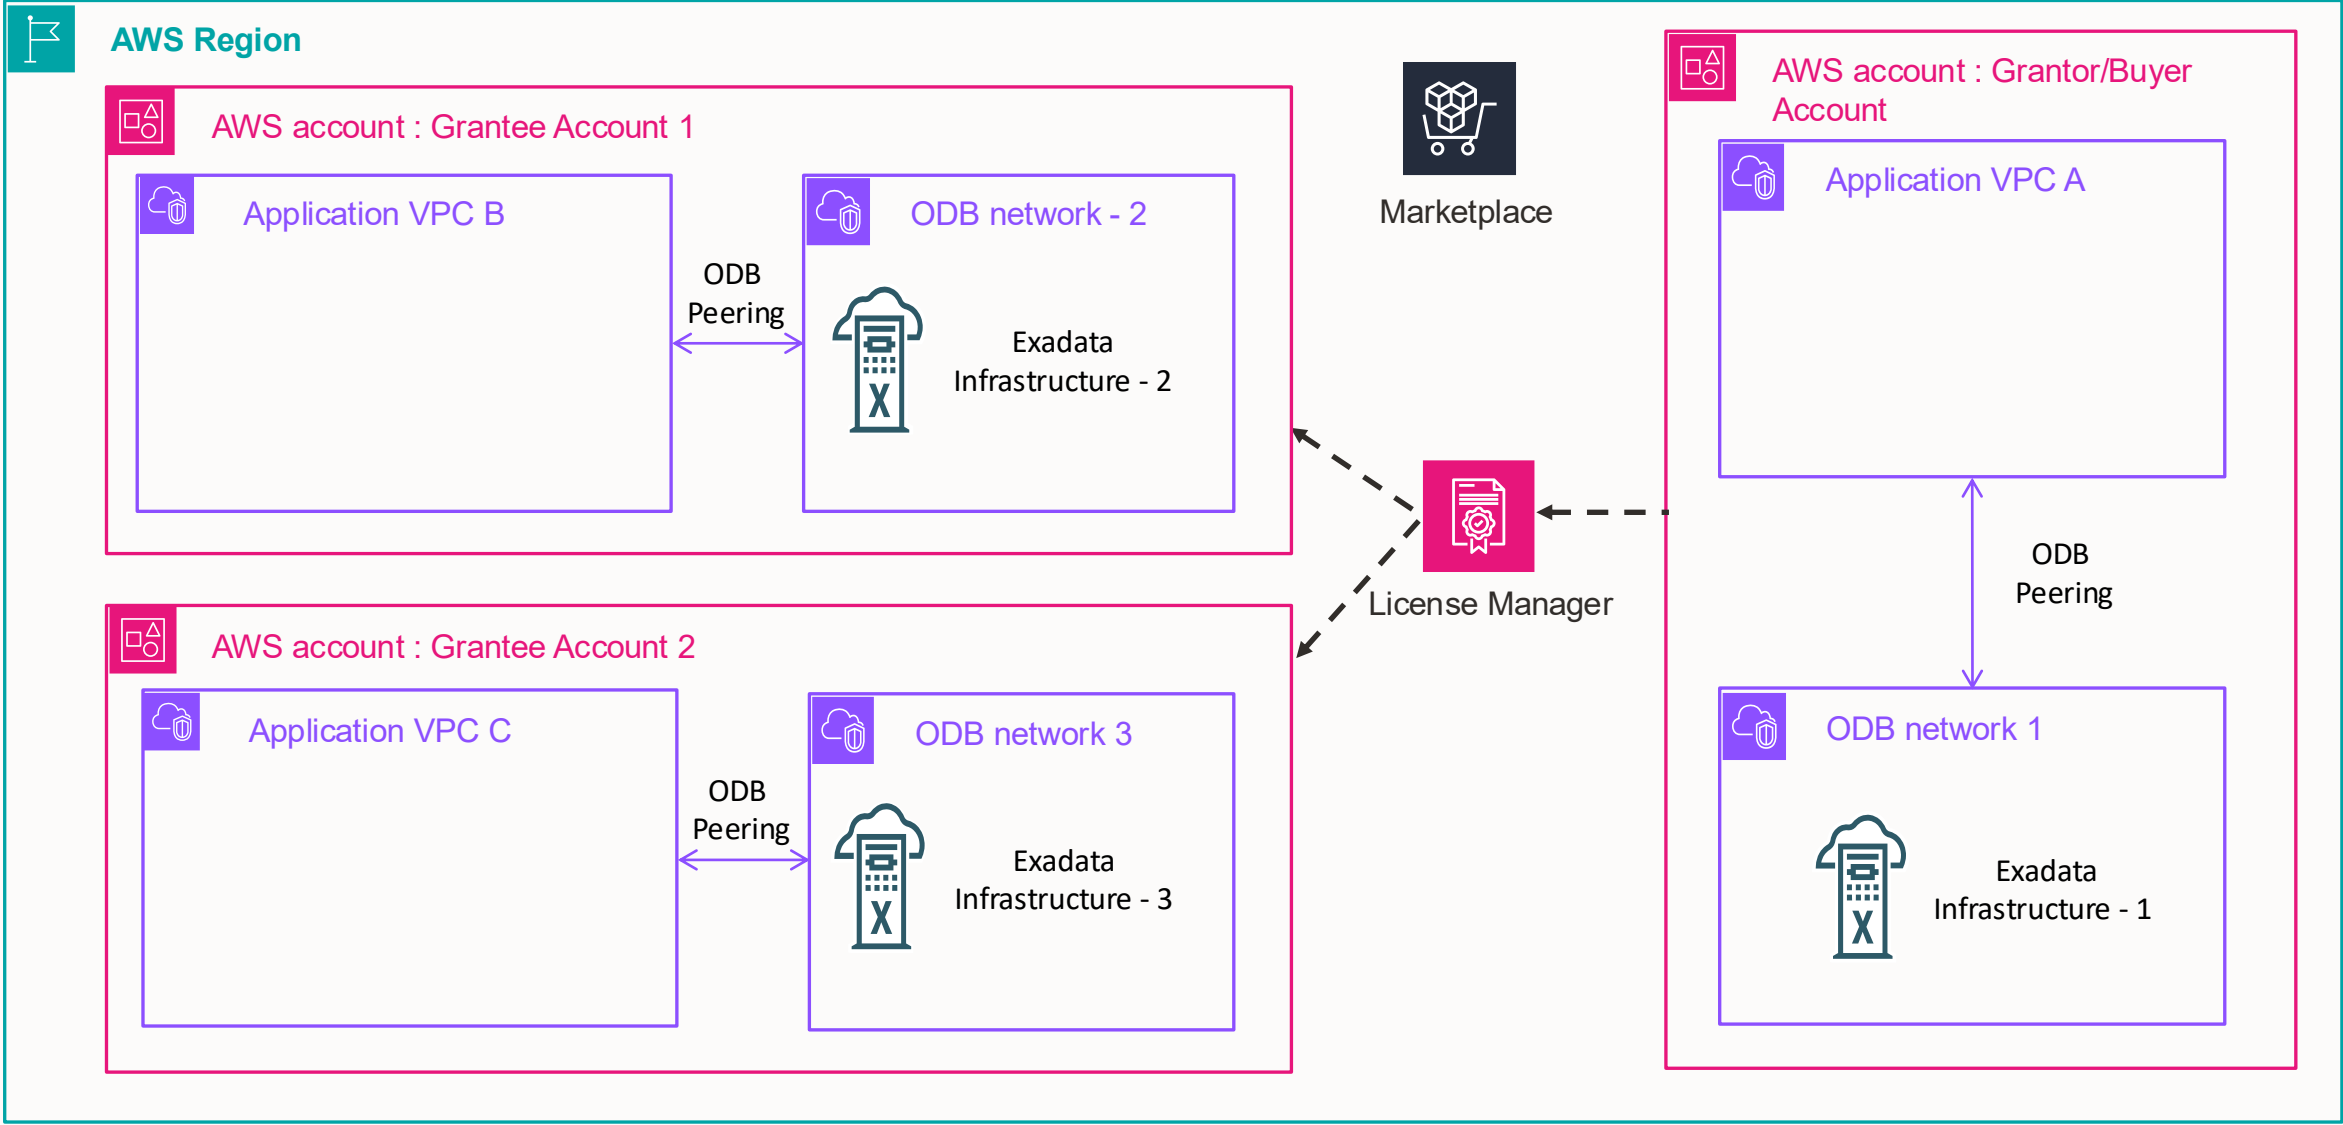

Subscription Sharing – Resource Isolation

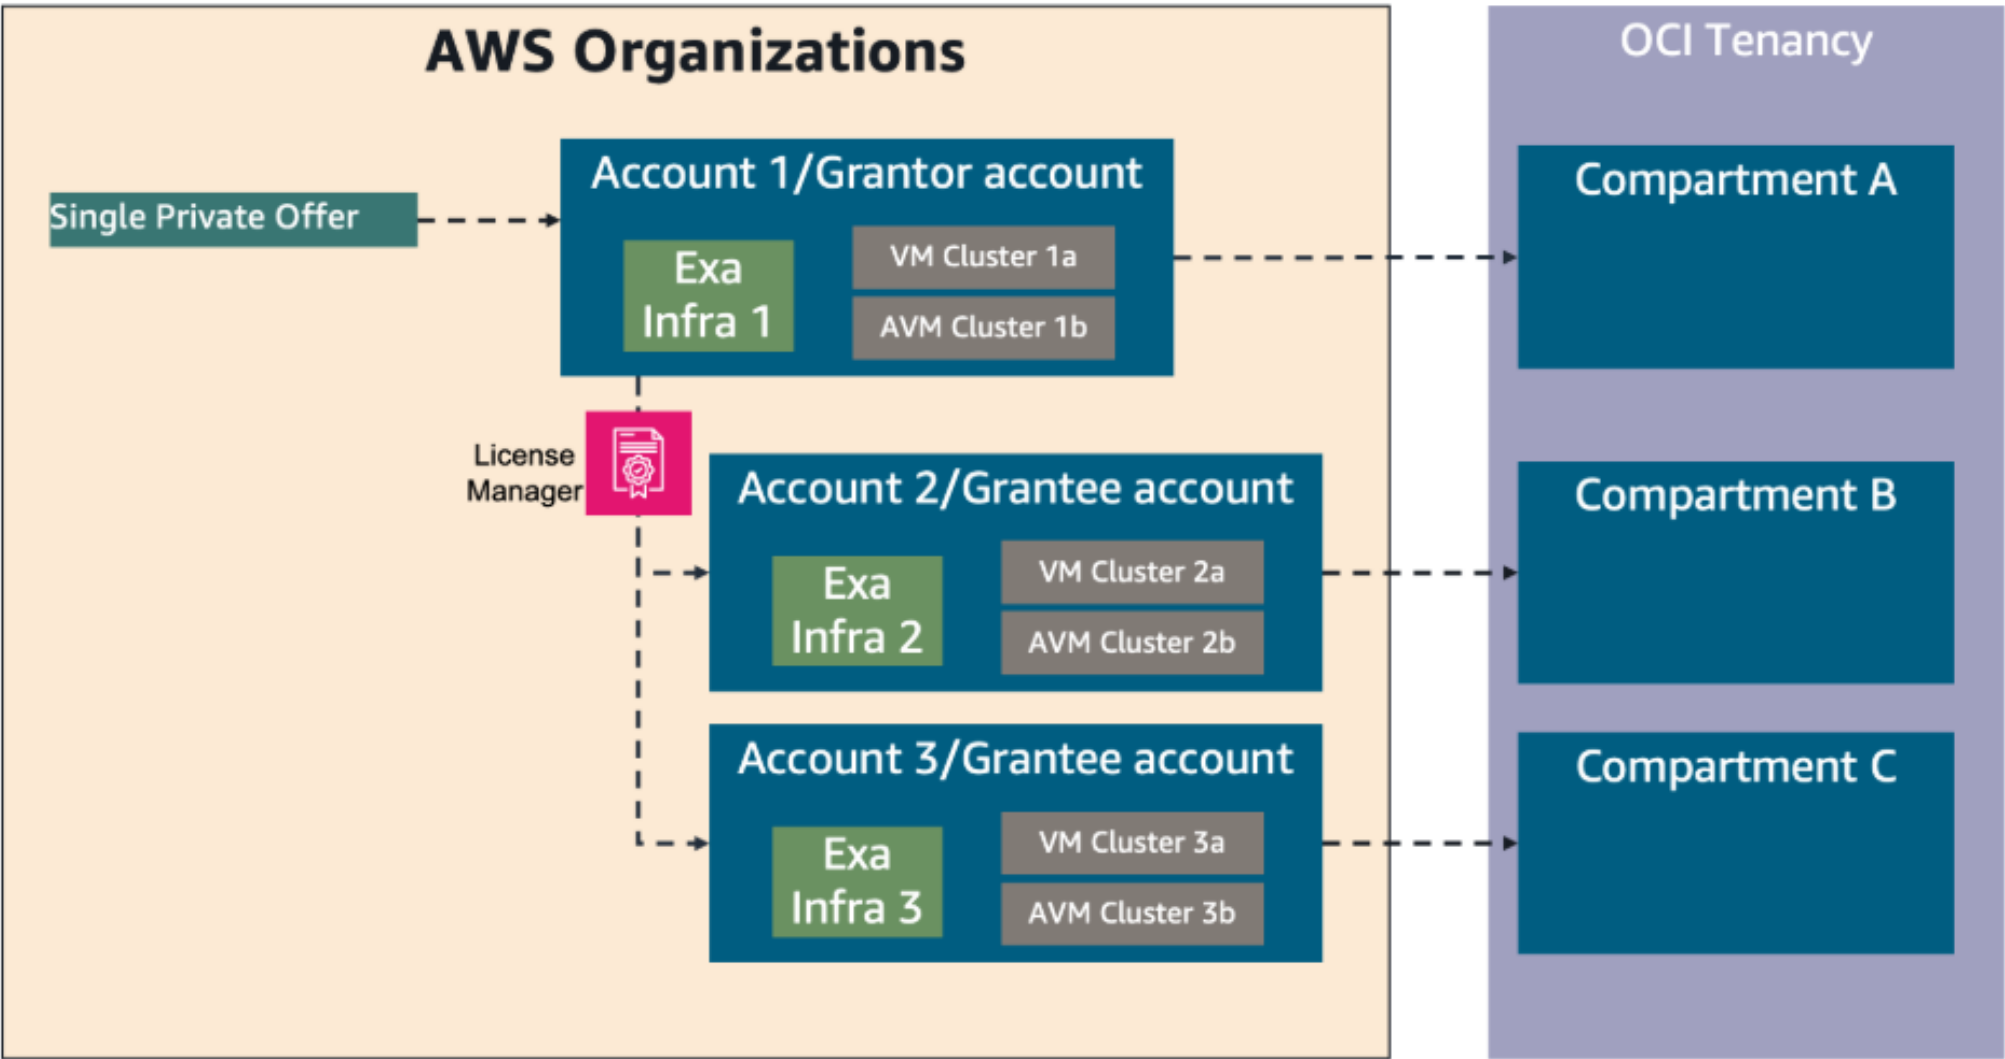


Subscription Sharing across AWS Accounts

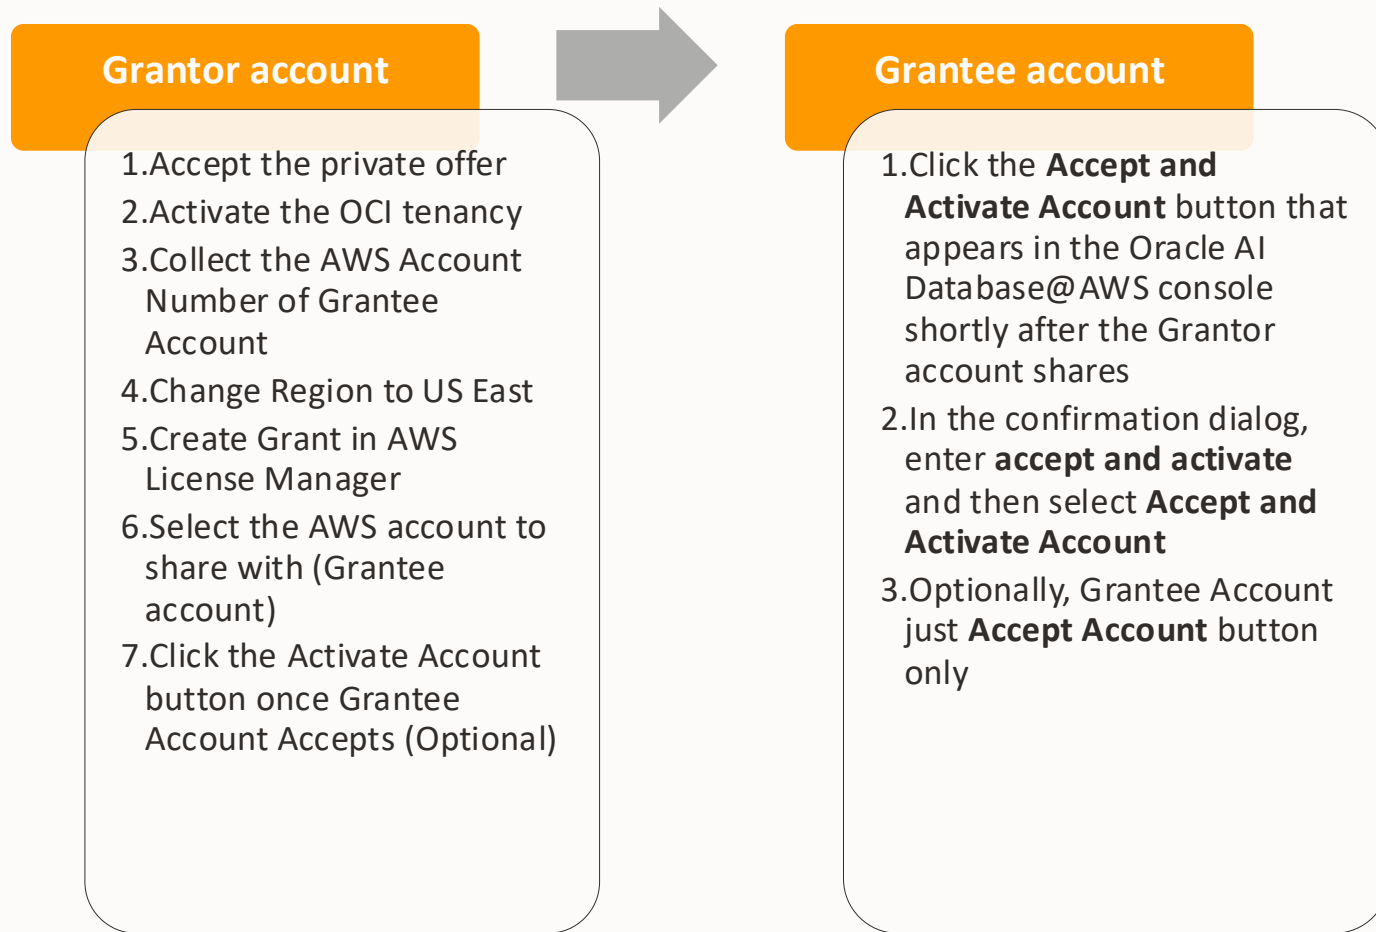

Considerations

- Grantor/Owner and Grantee accounts must be part of the **same AWS Organization**
 - Only buyer account can create grant
 - Each Grantee Account will have child compartment in MCL Compartment
- Only Grantee Account can accept the account
- Grantor Account can revoke Grant at any time
 - Once revoked, Grantee Account won't be able to create any new resources going forward
 - Once revoked, billing for resources in Grantee Account continues until resources are terminated
- Grantor Account can share 50 grants to Grantee Accounts

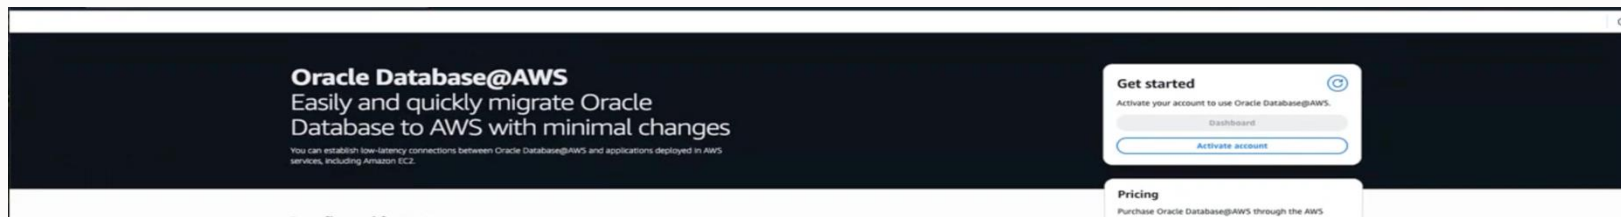


Let's Demystify

Dimension	AWS RAM (Resource Sharing)	Subscription Sharing (License Manager)
What is shared?	Exadata infra & ODB network	Oracle AI Database@AWS subscription
Who owns Private Offer?	Buyer account	Buyer / Grantor account
Who owns resources?	Buyer account (All ODB@AWS resources) Trusted (ONLY VM / AVM clusters)	Buyer / Grantor account (All ODB@AWS resources) Grantee (All ODB@AWS resources)
Billing / Consumption	Private Offer in Buyer account	Private Offer in Buyer/ Grantor account
Limits	AWS RAM Limits	Upto 50 AWS accounts
Key TakeAway	One big Exadata, many AWS accounts using slices of it.	Enterprises want account-level isolation without buying multiple separate Oracle subscriptions.




Hybrid model - Resource Sharing (RAM) + Subscription Sharing

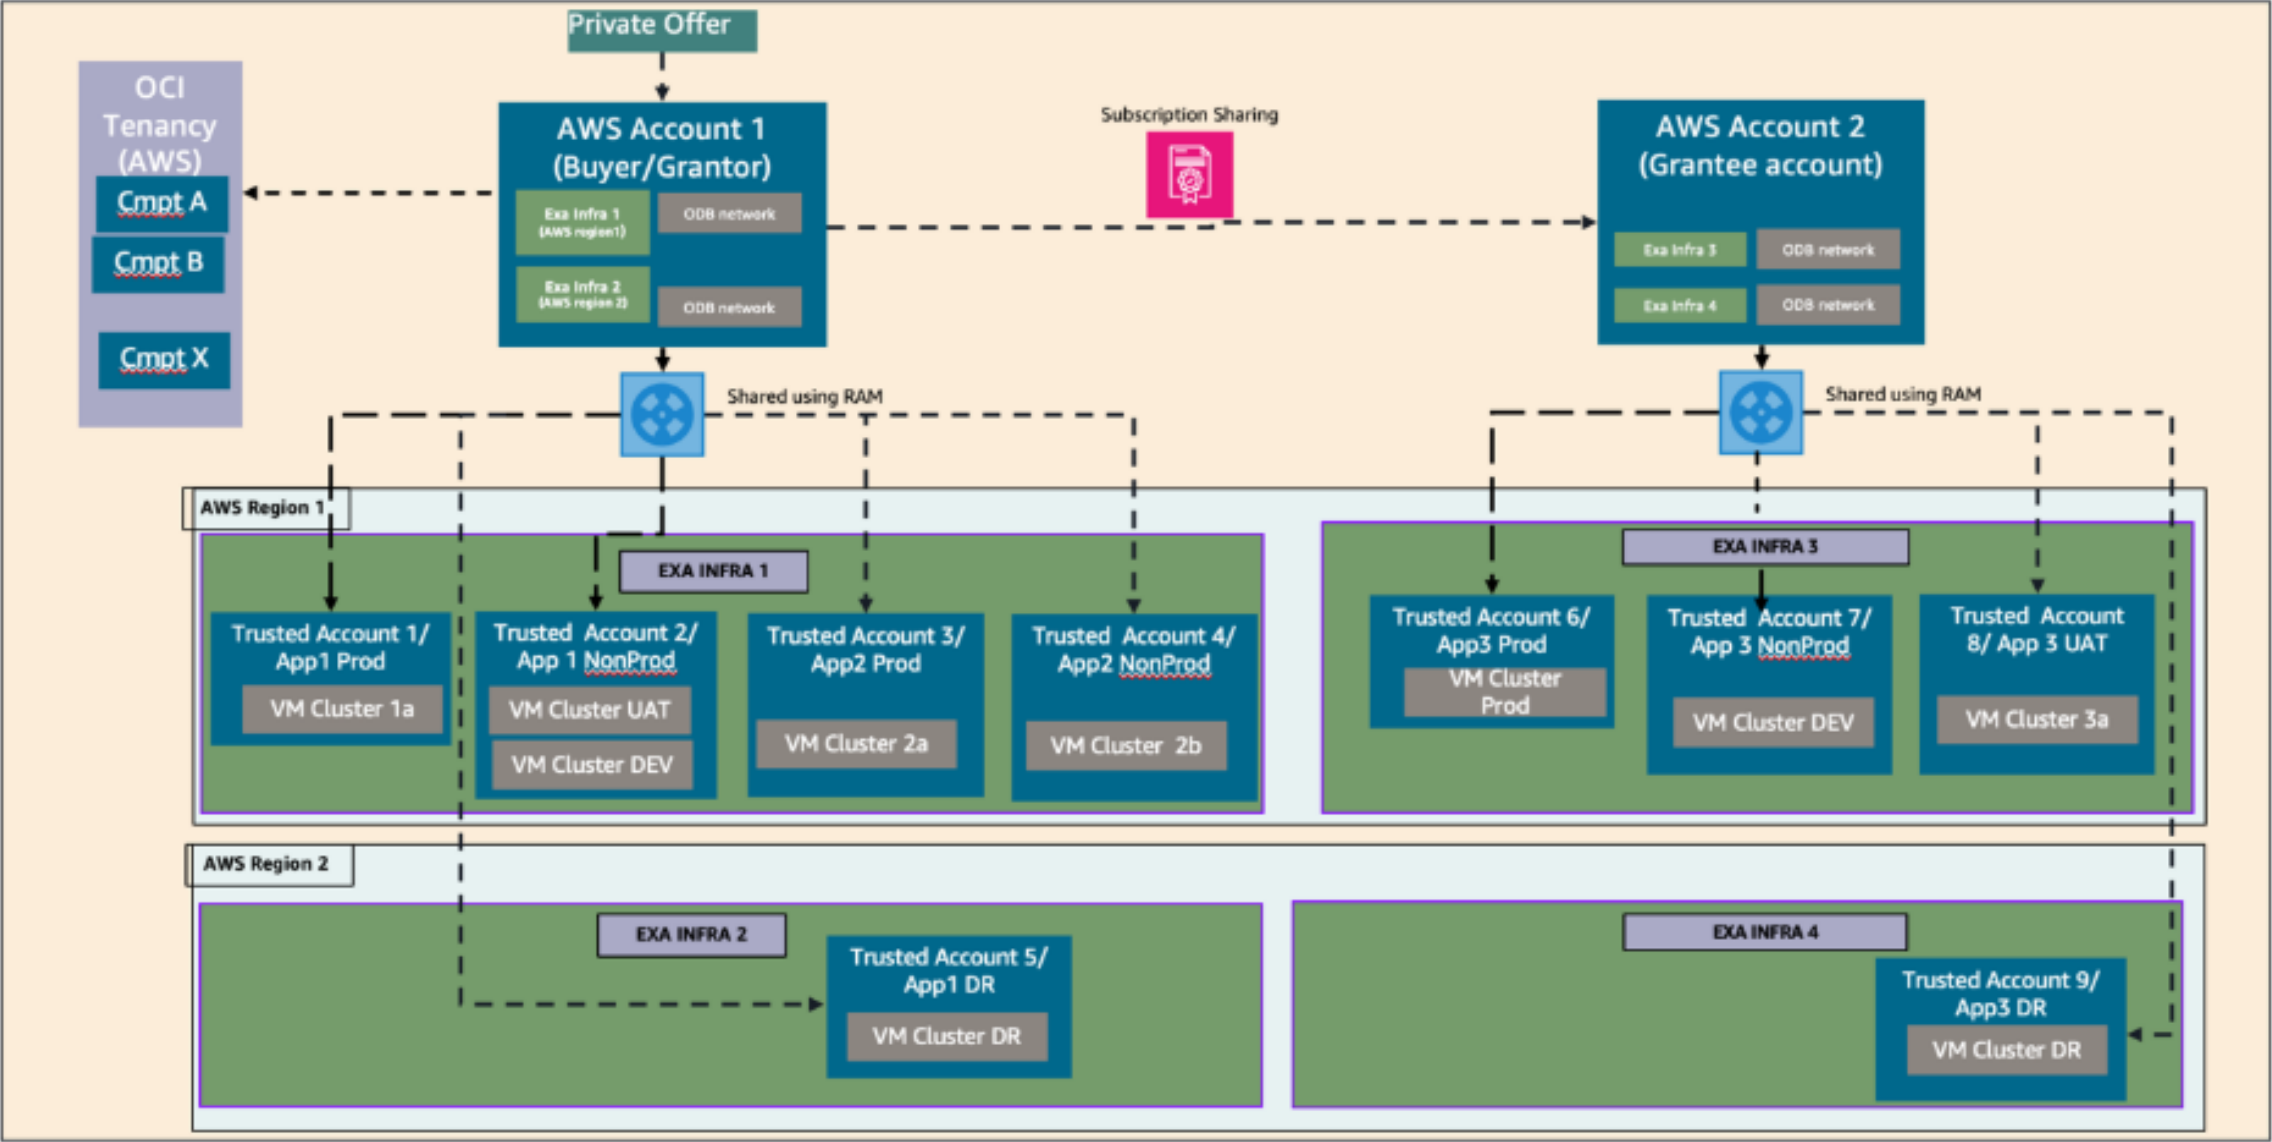

Monitoring & Observability


Options for Observability & Monitoring

- ❖ OCI Database Management & Oracle Enterprise Manager
- ❖ Oracle Cloud Host/Database metrics integrated - Amazon CloudWatch
- ❖ Custom monitoring solutions/agents for Exadata

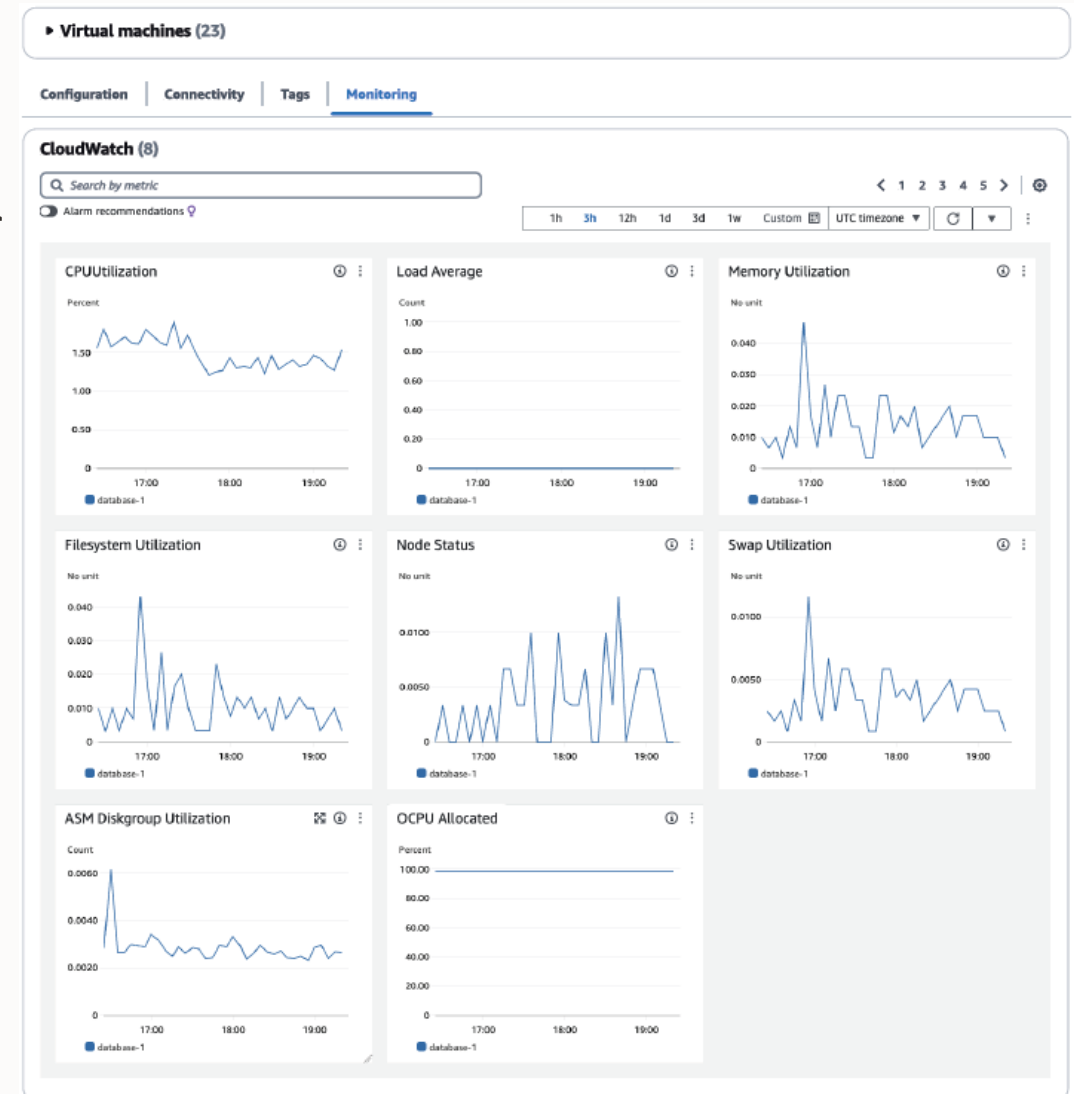

OCI Database Management

- Enable Database Management in OCI
- Provides comprehensive performance diagnostics and management capabilities
- Explicitly enable at database level in OCI console
- Access to Performance Hub
- Integrate with Oracle Enterprise Manager
- UCC/UCM Subscription

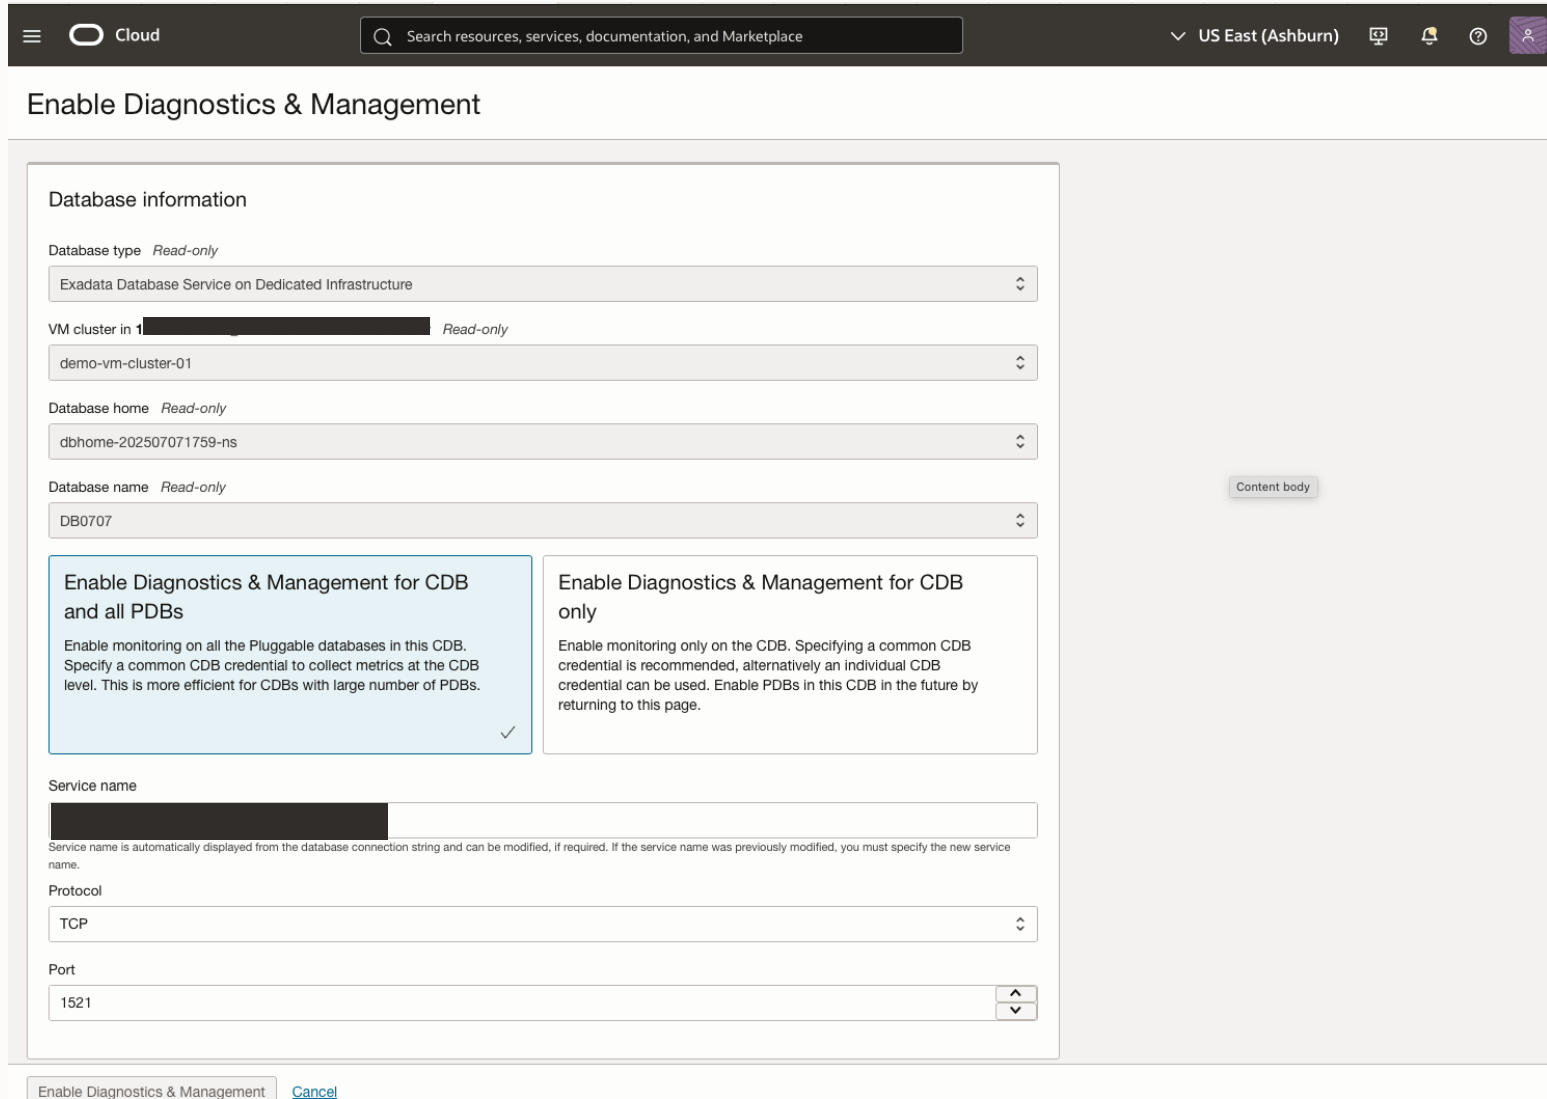

The screenshot shows the OCI console interface for enabling diagnostics and management for a database. The page title is "Enable Diagnostics & Management". The top navigation bar includes the OCI logo, a search bar, and the region "US East (Ashburn)".

The main content area is titled "Database information" and contains several read-only fields:

- Database type: Read-only, Exadata Database Service on Dedicated Infrastructure
- VM cluster in: Read-only, demo-vm-cluster-01
- Database home: Read-only, dbhome-202507071759-ns
- Database name: Read-only, DB0707

Below these fields, there are two toggle switches for enabling diagnostics and management:

- Enable Diagnostics & Management for CDB and all PDBs** (checked): Enable monitoring on all the Pluggable databases in this CDB. Specify a common CDB credential to collect metrics at the CDB level. This is more efficient for CDBs with large number of PDBs.
- Enable Diagnostics & Management for CDB only** (unchecked): Enable monitoring only on the CDB. Specifying a common CDB credential is recommended, alternatively an individual CDB credential can be used. Enable PDBs in this CDB in the future by returning to this page.

Below the toggles, there are input fields for:

- Service name: [Redacted]
- Protocol: TCP
- Port: 1521

At the bottom, there are two buttons: "Enable Diagnostics & Management" and "Cancel".



Native monitoring in AWS



Amazon CloudWatch

- Metrics for VM Clusters
- Metrics for container databases
- Metrics for pluggable databases
- Tags: AWS/ODB namespace



Event Bridge

- Event bus – aws.partner/odb/
- Events from AWS
 - Creation, deletion of ODB network
- Events from OCI
 - Exa Infra, VM Cluster, CDB/PDB events




Cloud Trail Logs

- Management Operations
- ODB@AWS Control Plane operations such as CreateodbNetwork as management events

CloudWatch Dashboards

- Create Custom Dashboards to segregate and monitor metrics
- Build alarms based on thresholds
- Create notifications using SNS

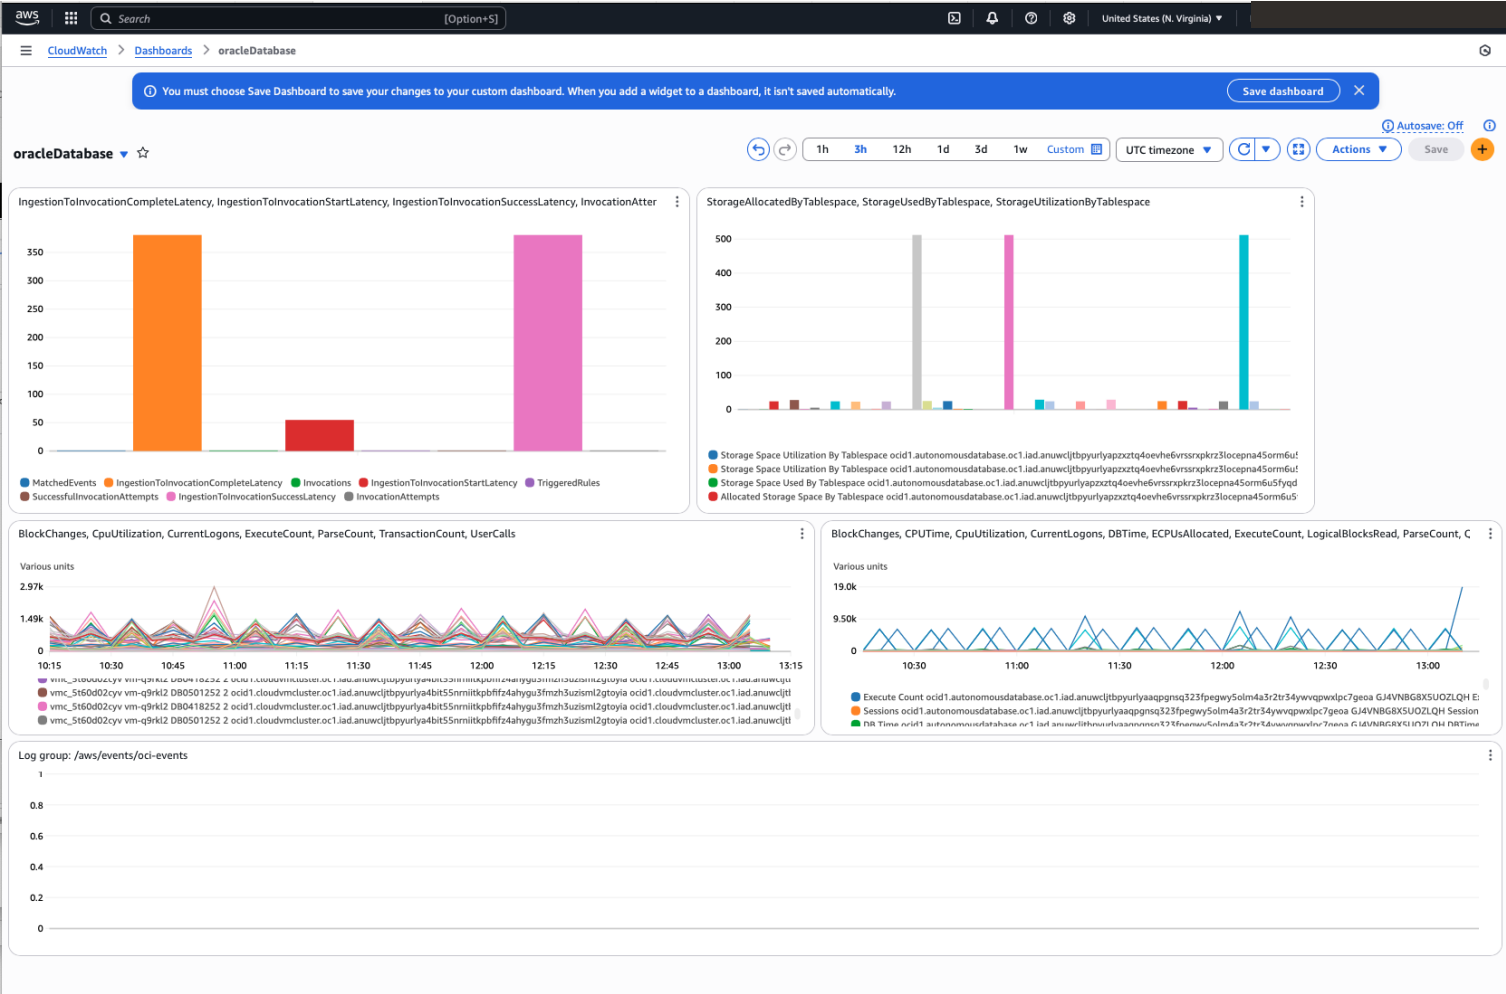

Amazon EventBridge Metrics

Exadata

ASMDiskgroupUtilization
FilesystemUtilization
CpuUtilization

VM Clusters

CpuUtilization
User Calls
CpuUtilization, LoadAverage,
MemoryUtilization, NodeStatus,
SwapUtilization
CurrentLogons
ExecuteCount
ParseCount
TransactionCount

CDB/PDB

BlockChanges
StorageAllocated
CpuUtilization
CpuCount
IOPS
IOThroughputMB

AVM Clusters

CpuUtilization
CurrentLogons
DBTime
ECPUAllocated
ExecuteCount
LogicalBlocksRead
ParseCount
QueuedStatements
RedoSize
RunningStatements
StorageUsed
StorageUtilization
TransactionCount
UserCalls
Sessions StorageAllocated

Amazon EventBridge

Dashboard

Developer resources

Buses

Pipes

Scheduler

Integration

Event buses

Event buses receive events from a variety of sources and match them to rules in your account. Different types of event buses receive events from different sources, including AWS services in your account and other accounts, custom applications and services, and partner applications and services.

Enabling event discovery on an event bus will generate EventBridge Schemas for events on that bus. This may incur a cost (the first five million ingested events in each month is free).

Default event bus

Name	Amazon Resource Name (ARN)	Schema discovery
default	arn:aws:events:us-east-1:182399700237:event-bus/default	Not Initiated

Custom event bus (1)

Name	Amazon Resource Name (ARN)	Schema discovery
aws.partner/odb/MTgyMzk5NzAwMjM3QHVzLWVhc3QtMQ/events	arn:aws:events:us-east-1:182399700237:event-bus/aws.partner/odb/MTgyMzk5NzAwMjM3QHVzLWVhc3QtMQ/events	Not Initiated

Amazon EventBridge

Rules

DemoEventBridge

Rule details

Rule name

DemoEventBridge

Description

DemoEventBridge

Status

Enabled

Rule ARN

arn:aws:events:us-east-1:182399700237:rule/aws.partner/odb/MTgyMzk5NzAwMjM3QHVzLWVhc3QtMQ/events/DemoEventBridge

Event bus name

aws.partner/odb/MTgyMzk5NzAwMjM3QHVzLWVhc3QtMQ/events

Event bus ARN

arn:aws:events:us-east-1:182399700237:event-bus/aws.partner/odb/MTgyMzk5NzAwMjM3QHVzLWVhc3QtMQ/events

Type

Standard

Event pattern

Targets

Monitoring

Tags

Event pattern

```
1 {
2   "account": ["182399700237"]
3 }
```

Copy




Procurement

Procurement


- With a single listing on **AWS Marketplace**, customer will be able to procure **Oracle AI Database@AWS** credits to access Oracle DB services that are available through AWS.
- Customers can purchase **Oracle AI Database@AWS** via a **Private offer** or **Public offer**. A single Private offer will be available per AWS Account.
- **OCI Tenancy** activation links will be natively available in the **AWS** console.
- Customers can **create a new Oracle account** or **link an existing one** after accepting a private offer.
- Customer can replenish existing private offer in case of amendments, upgrades & renewals.



User Journey – Private Offer (Exadata or Autonomous Database – Dedicated)

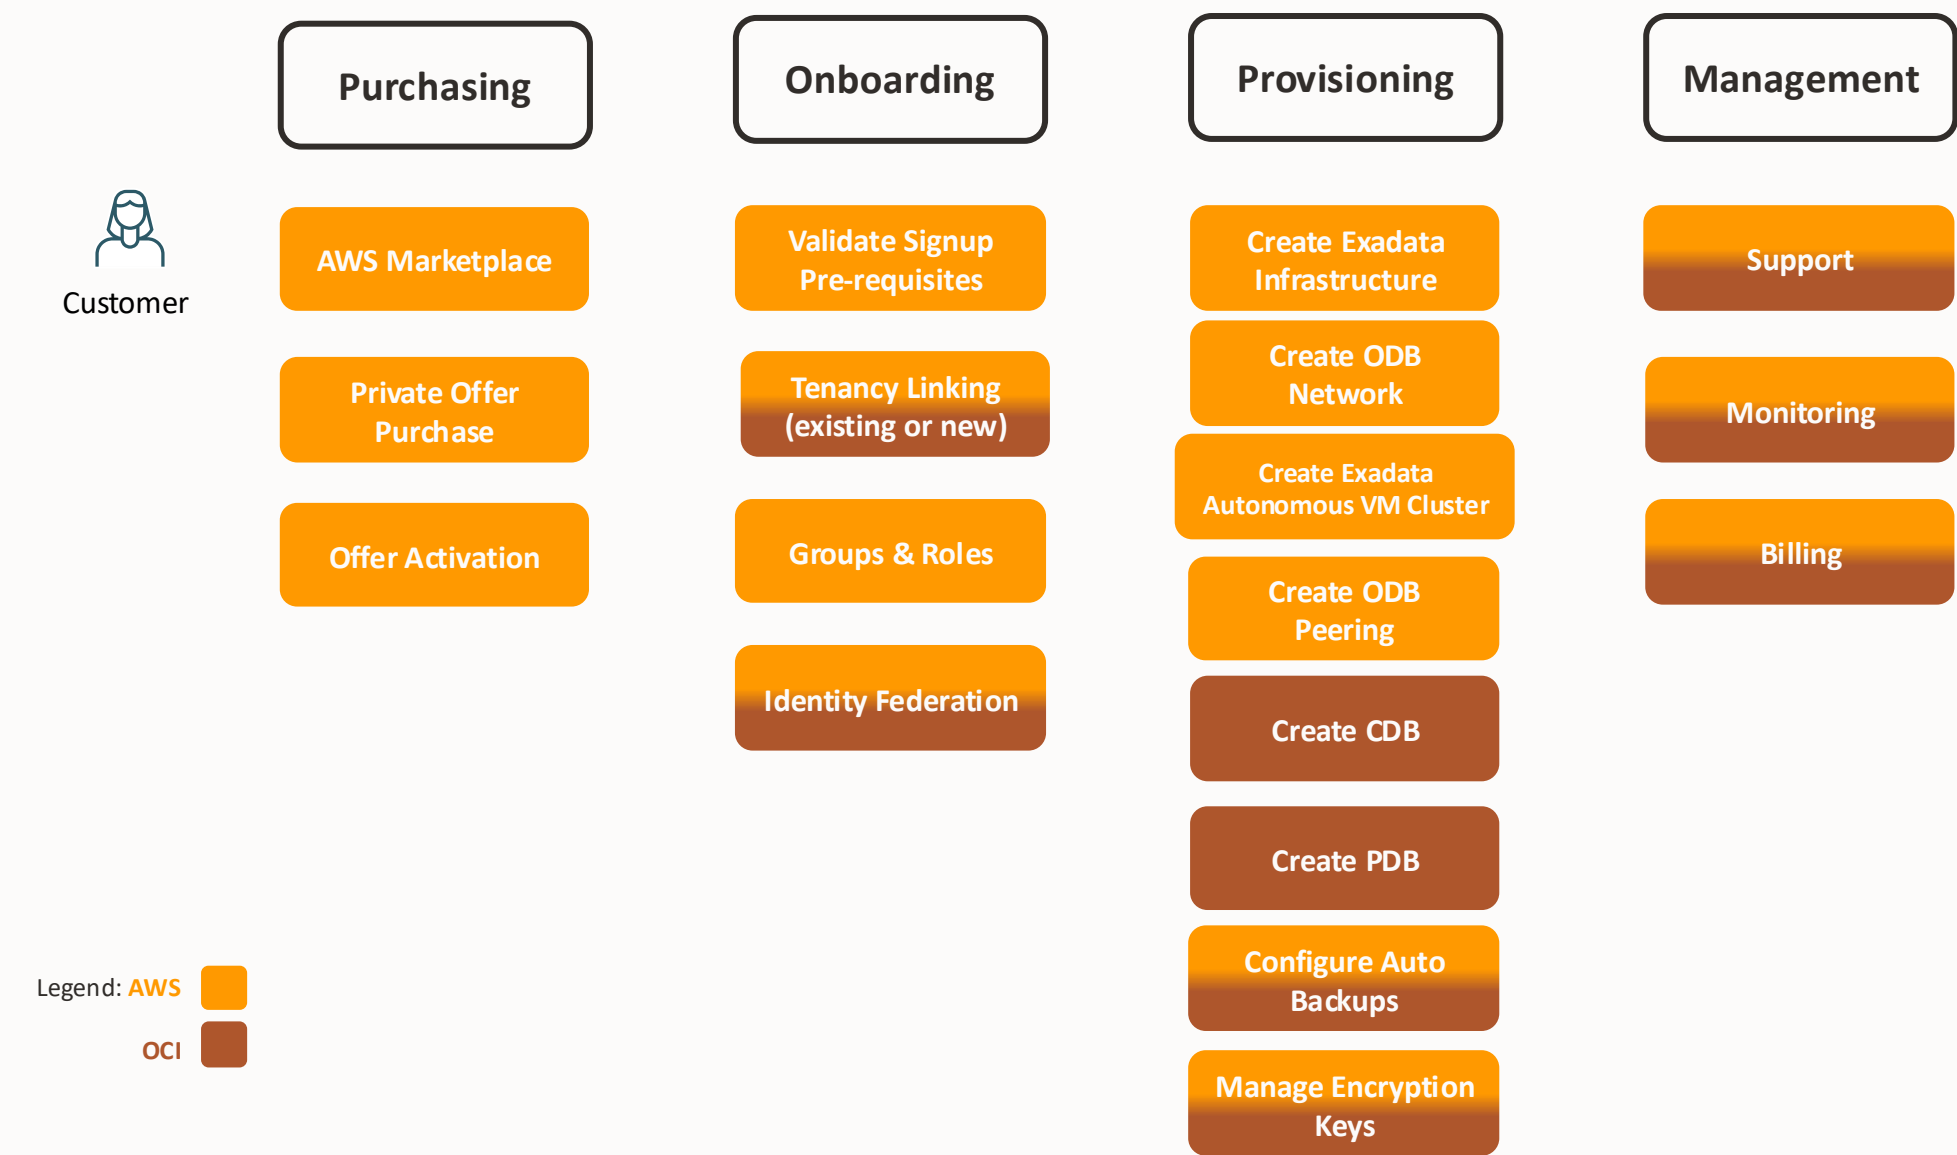

User Journey – Autonomous AI Databases Serverless

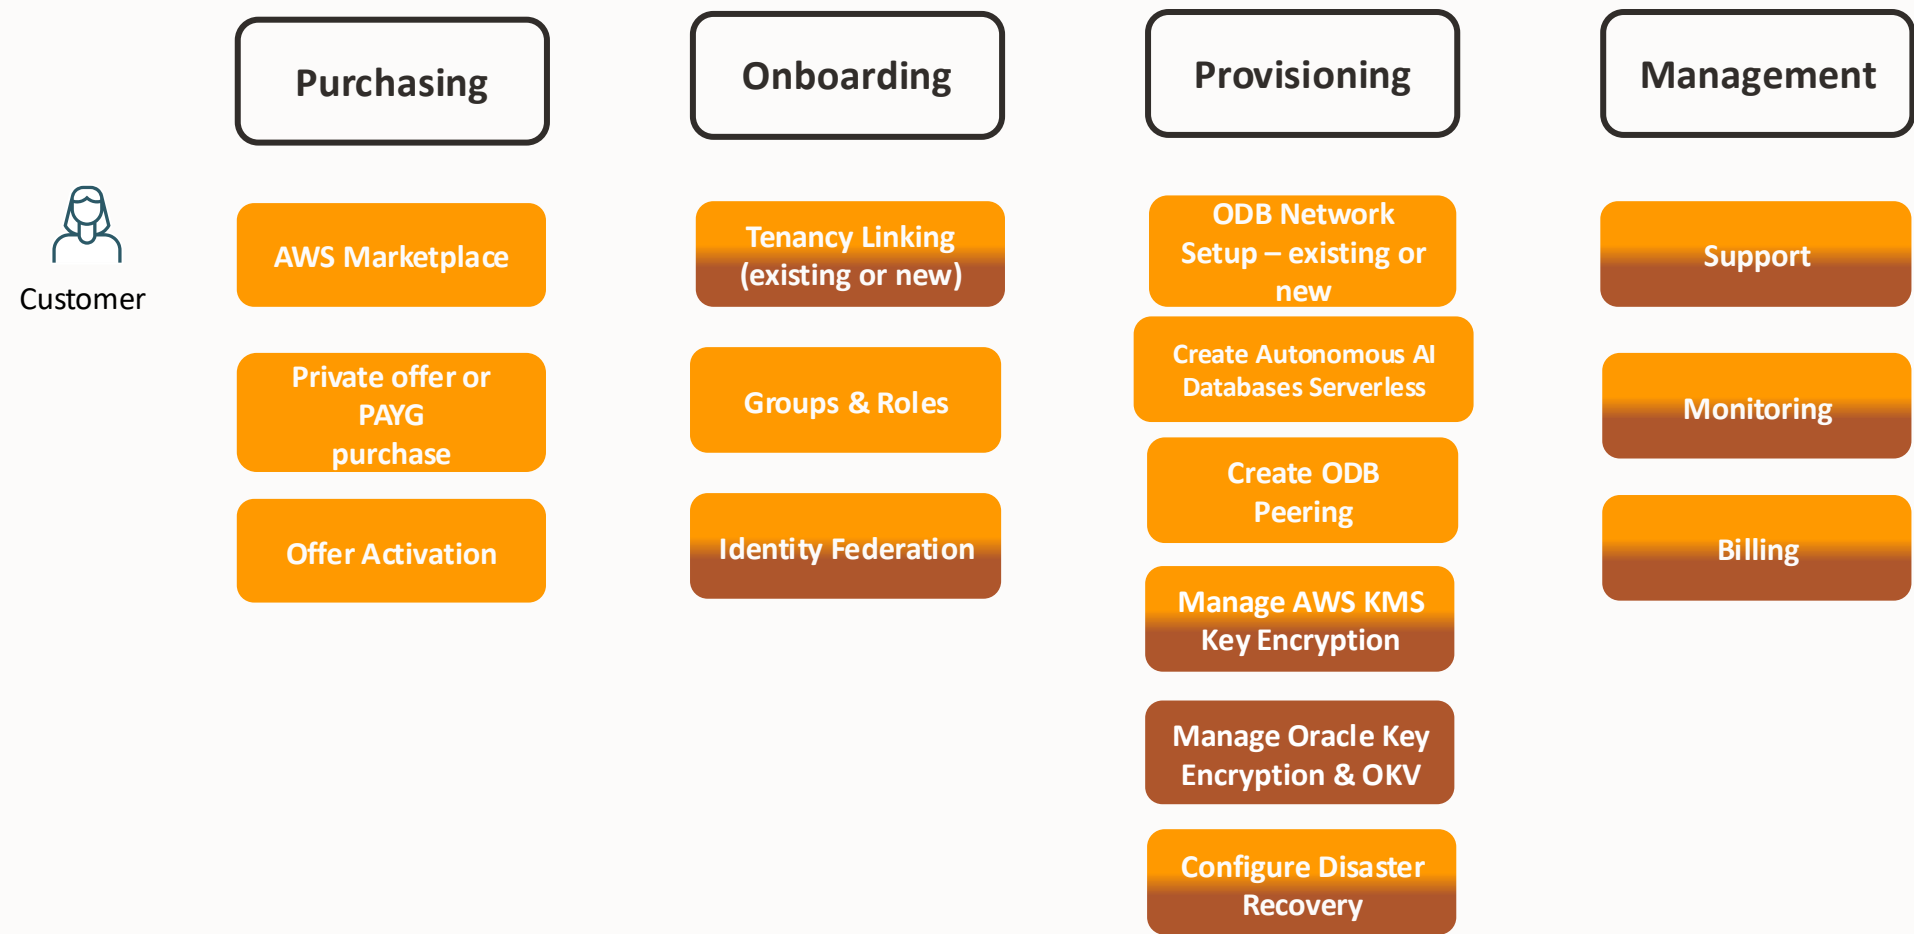

Legend: AWS 
OCI 



Billing

Oracle AI Database@AWS – Usage in AWS bill

Amazon Web Services, Inc. - Marketplace charges by service

info

Expand all

Total active services

1

Total pre-tax service charges in USD

USD 34,873.80

Filter by service name or region name

Description	Usage Quantity	Amount in USD
TestAwsSaaSProductPreProd (sold by AWSMarketplaceTest1)		USD 34,873.80
US East (N. Virginia)		USD 34,873.80
TestAwsSaaSProductPreProd Usage		USD 34,873.80
AWS Marketplace software usage us-east-1 Overage - OracleDB@AWS overage amount charged at USD\$1/credit	348,738 Units	USD 34,873.80
AWS Marketplace software usage us-east-1 Usage - OracleDB@AWS used amount	200,000 Units	USD 0.00
Total tax		USD 2,301.67

Usage and recurring charges for this statement period will be charged on your next billing date. Estimated charges shown on this page, or shown on any notifications that we send to you, may differ from your actual charges for this statement period. This is because estimated charges presented on this page do not include usage charges accrued during this statement period after the date you view this page. Similarly, information about estimated charges sent to you in a notification do not include usage charges accrued during this statement period after the



Usage Monitoring with Cost Allocation Tags

Oracle AI Database@AWS supports cost allocation tags for the following usage groups:

- Exadata Cloud Infrastructure Usage
- Exadata Database Service on Dedicated Infrastructure Usage
- Autonomous AI Database Serverless Usage
- Autonomous AI Database on Dedicated Exadata Infrastructure Usage
- Backup and Recovery Usage
- Data Usage
- Networking Usage



Activate Cost Allocation Tags

aws

Search

[Option+S]

Global

Billing and Cost Management

Cost allocation tags

Billing and Cost Management

Choose billing view

Primary view

Home

Getting Started

Billing and Payments

Bills

Payments

Credits

Purchase Orders

Cost and Usage Analysis

Cost Explorer

Cost Explorer Saved Reports

Cost Anomaly Detection

Free Tier

Data Exports

Customer Carbon Footprint Tool

Cost Organization

Cost Categories

Cost Allocation Tags

Billing Conductor

Cost allocation tags

Cost allocation tags activated: 7

User-defined cost allocation tags

AWS generated cost allocation tags

AWS generated cost allocation tags (1/19)

Find cost allocation tags

5 matches

Product

Clear filters

Undo

Deactivate

Activate

Tag key	Status	Last updated date	Last used month
☒ aws:marketplace:isv:Product	Active	December 10, 2024, 16:26 (UTC+00:00)	November 2024
☐ aws:marketplace:isv:ProductBucket	Inactive	-	January 2025
☐ aws:marketplace:isv:ProductBucketUsage	Inactive	-	January 2025
☐ aws:marketplace:isv:ProductLevelBreakdown	Inactive	-	January 2025
☐ aws:marketplace:isv:SubProduct	Active	December 10, 2024, 16:26 (UTC+00:00)	December 2024



Usage Reports


Cost and usage breakdown		Download as CSV
Find cost and usage data		< 1 > ⚙
aws:marketplace:isv:Product	aws:marketplace:isv:Product total	May 2025*
Total costs	\$10,219.63	\$10,219.63
Total usage	1,021,963.00 Units	1,021,963.00 Units
ODB@AWS Exadata Infrastructure Usage costs	\$8,660.68	\$8,660.68
ODB@AWS Exadata Infrastructure Usage usage	866,068.00 Units	866,068.00 Units
ODB@AWS Autonomous Database Dedicated Usage costs	\$1,351.24	\$1,351.24
ODB@AWS Autonomous Database Dedicated Usage usage	135,124.00 Units	135,124.00 Units
ODB@AWS Exadata Database Cloud Service Usage costs	\$207.71	\$207.71
ODB@AWS Exadata Database Cloud Service Usage usage	20,771.00 Units	20,771.00 Units



Oracle AI Database@AWS Integrations


Integration: With applications running on AWS

- Low latency connectivity to applications running on Amazon EC2 and other AWS services

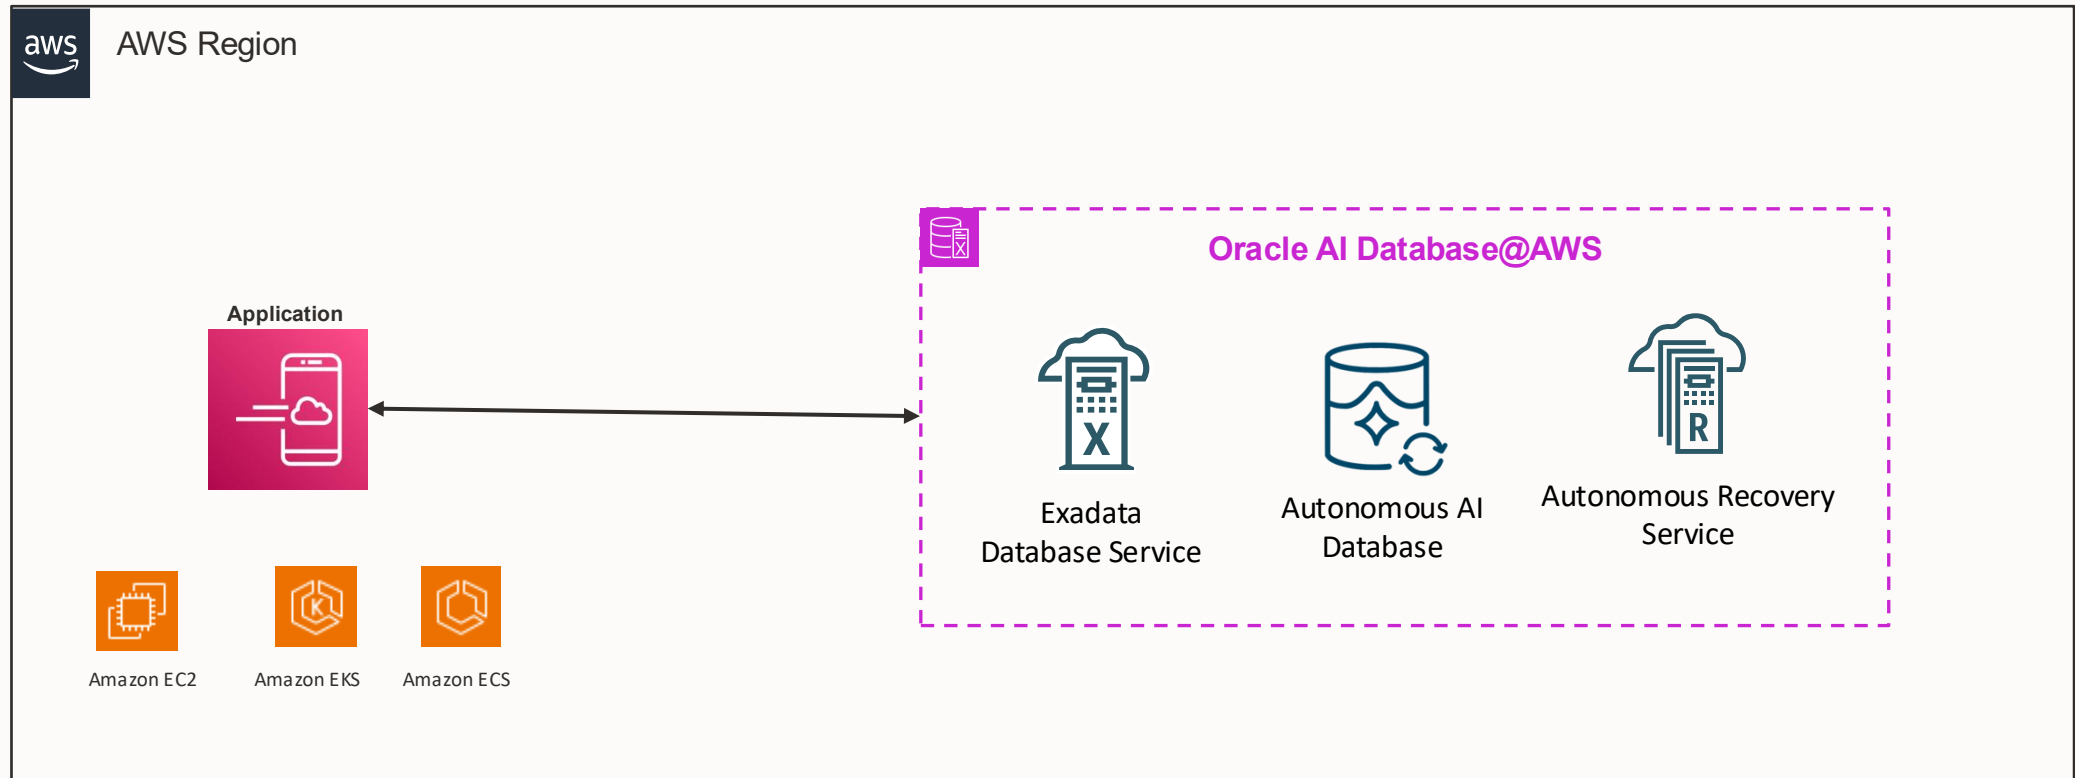


Integration: Generative AI services

Oracle database 26ai vector store/search capabilities and LLM models with AWS AI services

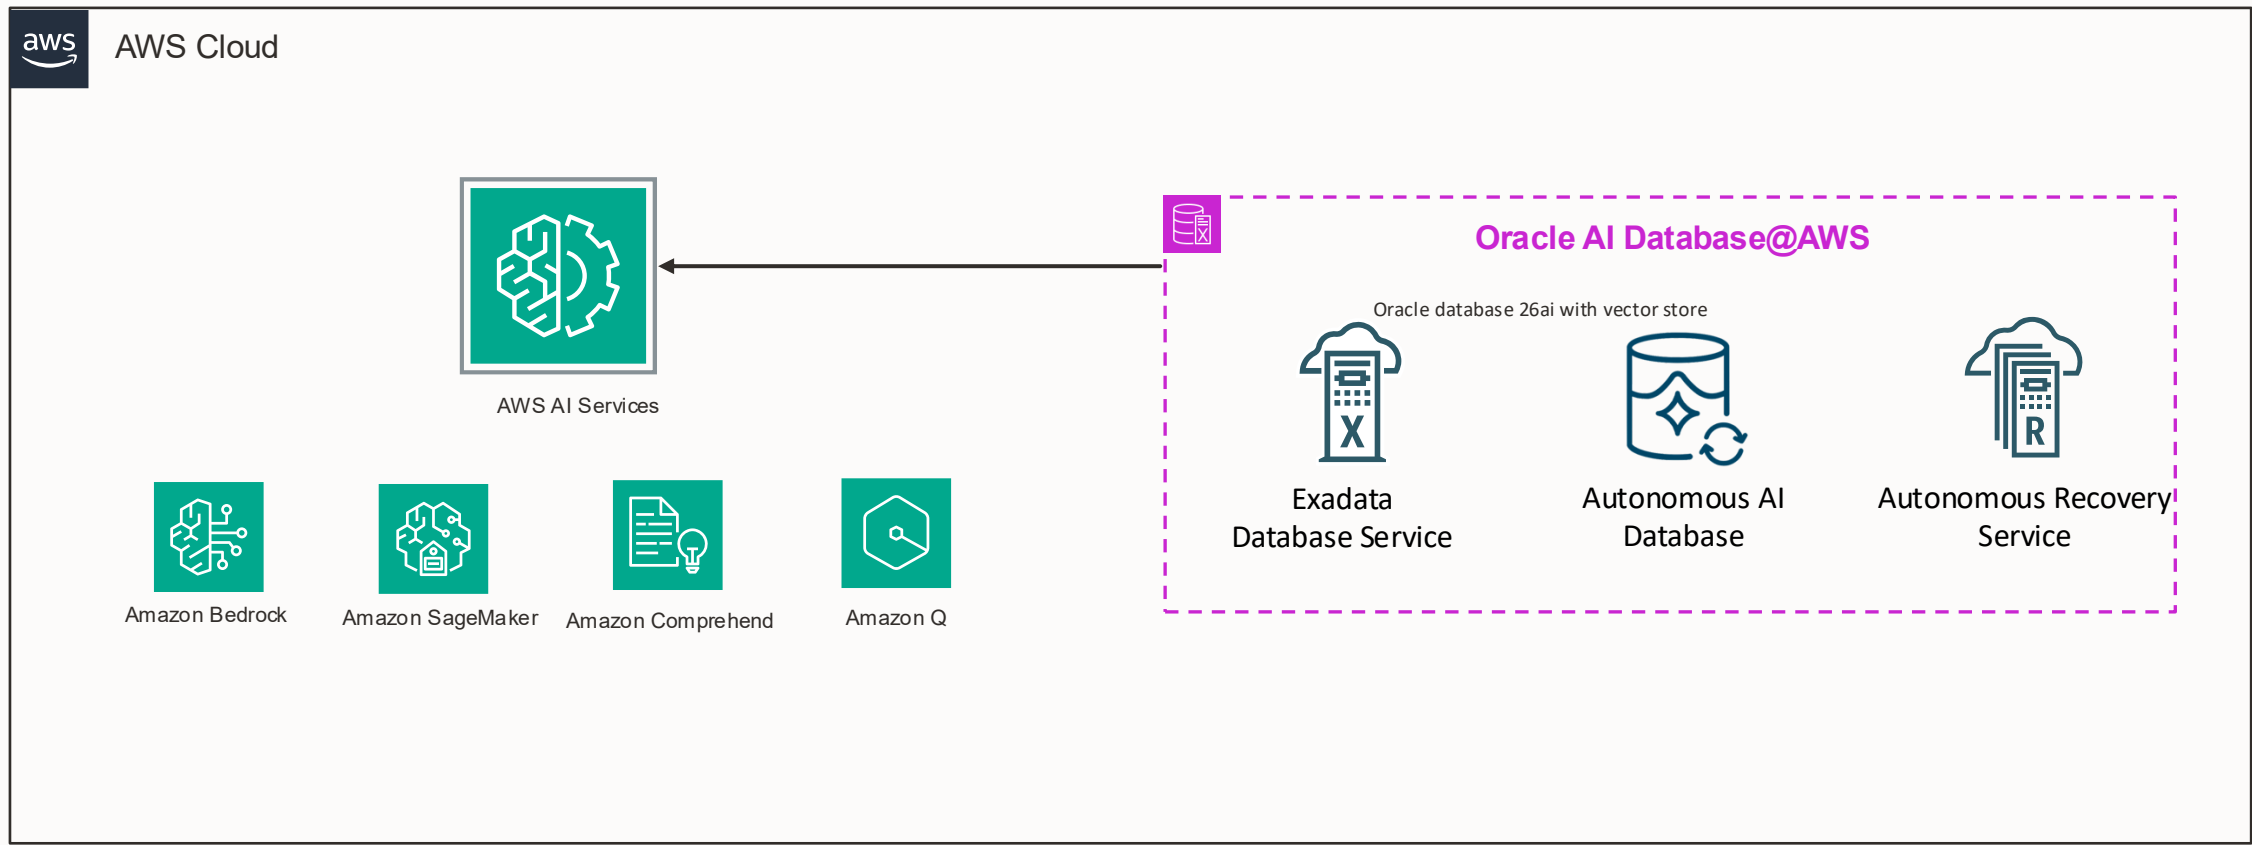

Integration: Amazon CloudWatch

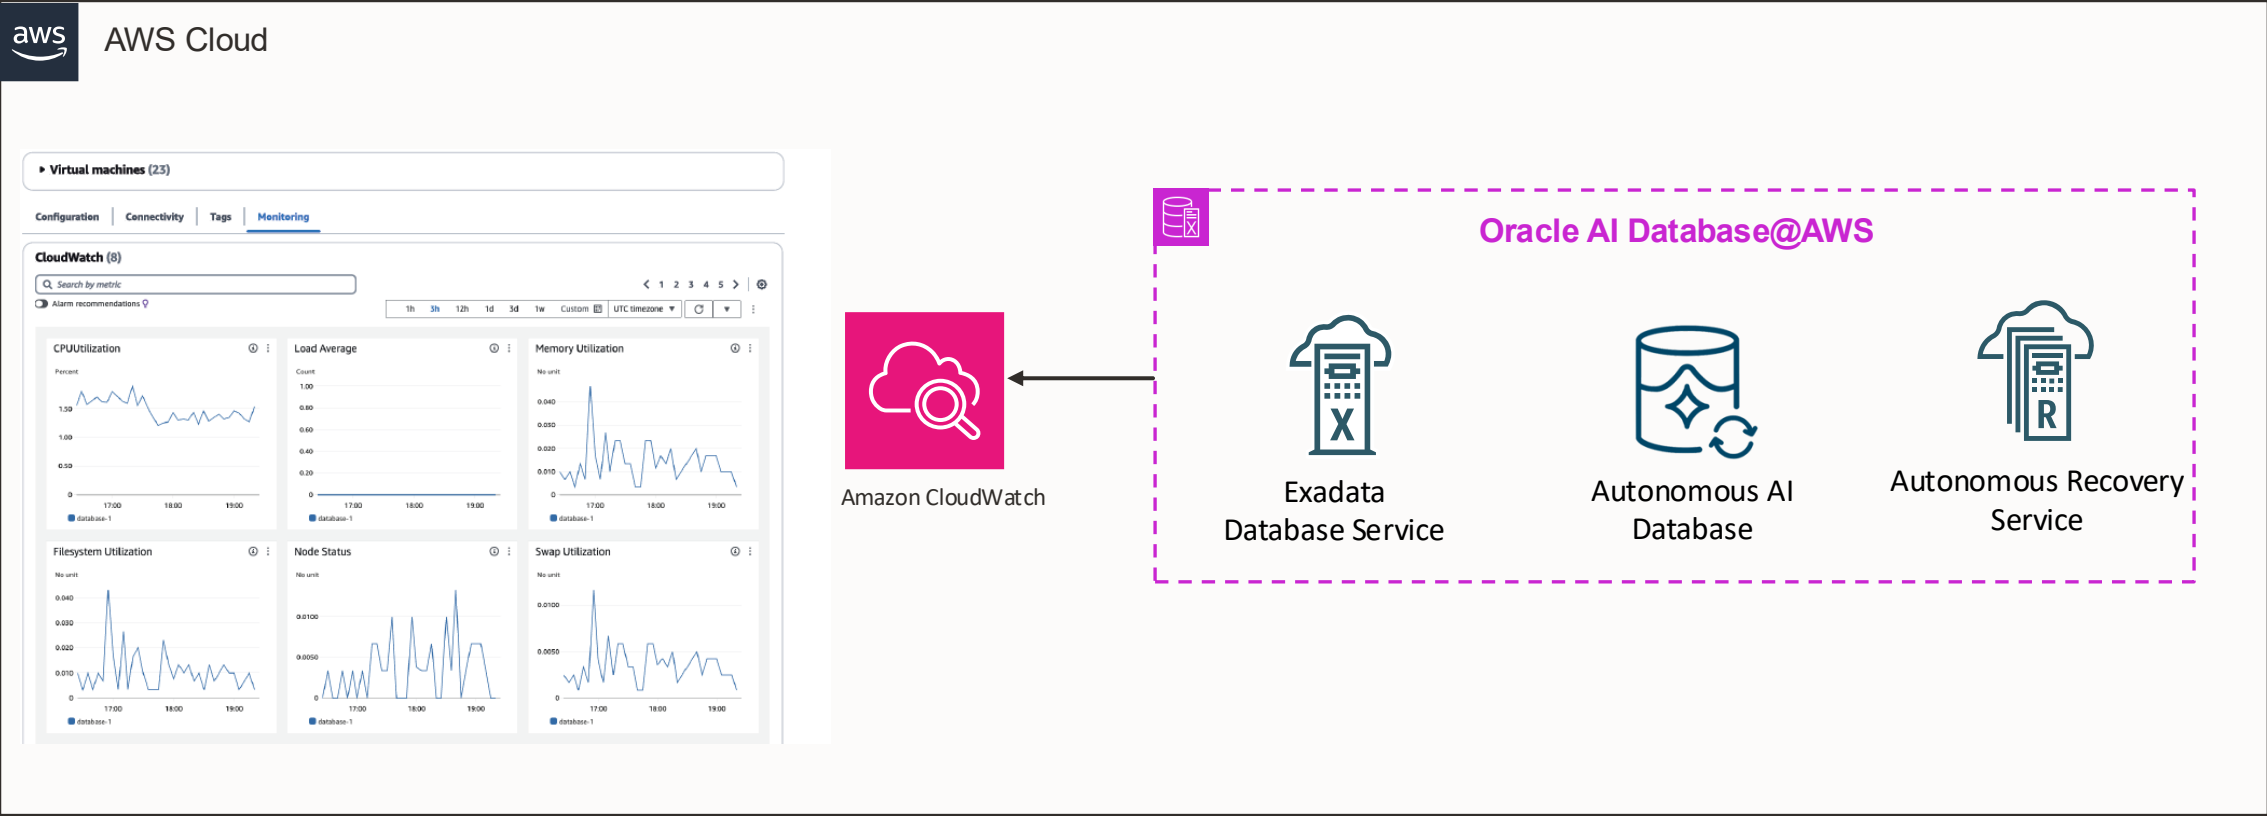

Support

Support

Technical & Limits

- Create Technical and Limits SRs directly in **OCI** Support
- Customer **OCI** tenancy will have Customer Support Identifier (CSI) assigned
- If troubleshooting on **AWS** is required, OCI Support will open service request with **AWS** using an agreed upon support identifier

Billing

- Customer start in **AWS** Support as billing is done through **AWS Billing**.
- If troubleshooting on **OCI** side is required, **AWS** Support will open an SR with **My Oracle Support** using an agreed upon CSI

Issues during Onboarding

- Customers can call **1-800-223-1711** for issues during onboarding as they may not have a Customer Support Identifier (CSI) assigned.
 - Note: Tell your Oracle Support agent that your issue is related to Oracle AI Database@AWS, as support requests for this service are handled by an OCI support team that specializes with these deployments. A member of this team will contact you directly



Provisioning

Oracle AI Database@AWS

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

Easily and quickly migrate Oracle Database to AWS with minimal changes

You can establish low-latency connections between Oracle Database@AWS and applications deployed in AWS services, including Amazon EC2.

Get started

Get started with Oracle Database@AWS.

Dashboard

Benefits and features

Migrate Oracle Databases to AWS

You can easily and quickly migrate your Oracle Exadata workloads to Oracle Exadata Database Service on Dedicated Infrastructure or Oracle Autonomous Database on Dedicated Exadata Infrastructure within AWS with minimal changes.

Unify data across Oracle and AWS Oracle

Database@AWS allows you to generate deeper insights and develop new innovation by using zero-ETL integrations to unify data across Oracle and AWS for analytics, machine learning, and generative AI.

Pricing

Purchase Oracle Database@AWS through the AWS Marketplace. Pricing is the same as for Oracle Exadata Database Service running on OCI.

Documents

[AWS documentation](#)

[OCI documentation](#)

[Contact OCI support](#)

[Contact AWS Support](#)

161 Copyright © 2026, Oracle and/or its affiliates

ODB Network

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Create ODB network

Oracle Database@AWS > ODB networks > Create ODB network

Create ODB network

myfirstodbnetwork

The name must be 1-255 characters, and must start with a letter or underscore and can't contain two consecutive hyphens (-). Valid characters are A-Z, a-z, 0-9, underscores (_), and hyphens (-).

Availability Zone

Choose the AZ in which your subnet will reside.

us-east-1b

us-east-1a

us-east-1b

Backup subnet CIDR - optional

Enter the IP address range for the backup network used for Oracle Exadata Database Service on Dedicated Infrastructure.

10.23.0.0/24

VPC ID - optional

Choose a VPC with which to create an ODB peering connection with your ODB network. This connection enables EC2 instances in this VPC to connect to your Exadata databases.

Choose option

DNS configuration - optional

Set the domain name to use for all resources provisioned for this ODB network, including SCAN and VM host names. The default is oraclevcn.com and you must include your own domain name prefix or choose your own custom domain name.

Default

Custom domain name

Domain name prefix

Enter a custom domain name prefix to use for all resources provisioned with this ODB network, including SCAN names and VM host names.

my-domain-name-prefix

The domain name prefix must be 1-15 letters or numbers, and must start with a letter.

Domain name

oraclevcn.com

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

Add new tag

You can add up to 50 tags.

Cancel

Create ODB Network



Exadata Infrastructure – Step 1 of 4

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

Exadata infrastructures

Create Exadata infrastructure

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Step 1

Configure general settings

Step 2

Configure Exadata infrastructure

Step 3 - optional

Configure maintenance and tags

Step 4

Review and create

Configure general settings

The Exadata cloud infrastructure is the top-level resource of an Exadata system. This resource determines the number of storage and compute servers available to the VM clusters running on the system.

Settings

Exadata infrastructure name

Enter a name to identify the Exadata infrastructure resource. The same name is used for the resource in Oracle Cloud Infrastructure.

myexadata_infra

The name must be 1-255 characters, and must start with a letter or underscore and cannot contain two successive hyphens (-). Valid characters are A-Z, a-z, 0-9, underscores (_), and hyphens (-).

Availability Zone

Choose the AZ in which your Exadata infrastructure will reside.

us-east-1b

Cancel

Next



Exadata Infrastructure – Step 2 of 4

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

Exadata infrastructures

Create Exadata infrastructure

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Step 1

Configure general settings

Step 2

Configure Exadata infrastructure

Step 3 - optional

Configure maintenance and tags

Step 4

Review and create

Configure Exadata infrastructure

Choose the Exadata system model and the number of database and storage servers.

Exadata system model

Exadata.X11M

Exadata.X11M

Exadata.X9M

760 ECPUS, 1.5 TB RAM per server

Database servers

2

32

Storage server type

X11M-HC

80 TB per server

Storage servers

You can choose 3-64 storage servers.

3

64

aws

Search

[Option+S]

United States (N. Virginia)

Multicloud-Engineering/nishanth.x.sodum@oracle.com

Oracle Database@AWS

Exadata infrastructures

Create Exadata infrastructure

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Step 1

Configure general settings

Step 2

Configure Exadata infrastructure

Step 3 - optional

Configure maintenance and tags

Step 4

Review and create

Configure Exadata infrastructure

Choose the Exadata system model and the number of database and storage servers.

Exadata system model

Exadata.X11M

Database server type

X11M

760 ECPUS, 1.5 TB RAM per server

Database servers

You can choose 2-32 database servers.

2

32

Storage server type

X11M-HC

80 TB per server

Storage servers

You can choose 3-64 storage servers.

3

64

Cancel

Previous

Next



Exadata Infrastructure – Step 3 of 4

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS > Exadata infrastructures > Create Exadata infrastructure

Oracle Database@AWS

<

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters New

Oracle support

Oracle documentation

Step 1

● Configure general settings

Step 2

● Configure Exadata infrastructure

Step 3 - optional

● **Configure maintenance and tags**

Step 4

○ Review and create

Configure maintenance and tags - optional

Maintenance settings

These settings control when and how maintenance occurs on your Exadata infrastructure.

Window type

☒ Oracle-managed schedule

The system assigns a date and start time for Exadata infrastructure maintenance.

☐ Customer-managed

Choose a date and start time for Exadata infrastructure maintenance.

Patching mode

☐ Non-rolling

The system shuts down and updates the servers in parallel. This method minimizes maintenance time but incurs a full system downtime.

☒ Rolling

The system updates the servers one at a time with no downtime.

☒ Enable timeout before performing maintenance on DB servers.

30

Minimum 15 minutes. Maximum 120 minutes.

Enable this option to set a waiting period before server maintenance begins.

OCI maintenance notification contacts

[Info](#)

You can enter up to 10 email addresses for notification about maintenance updates. AWS forwards the addresses to Oracle, who emails the notification.

john_doe@example.com

165 Copyright © 2026, Oracle and/or its affiliates

Exadata Infrastructure – Step 4 of 4

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

> Exadata infrastructures

> Create Exadata infrastructure

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Step 1

Configure general settings

Step 2

Configure Exadata infrastructure

Step 3 - optional

Configure maintenance and tags

Step 4

Review and create

Review and create

Step 1: General settings

Settings

Exadata infrastructure name

myexadata_infra

Availability Zone

us-east-1b

Step 2: Exadata Infrastructure

Exadata system model

Exadata.X11M

Database server type

X11M

Storage server type

X11M-HC

Database servers

2

Storage servers

3

Step 3: Maintenance and tags

Maintenance settings

Window type

Oracle-managed schedule

Patching mode

Rolling

OCI maintenance notification contacts

No email addresses have been added.

Timeout (minutes)

30

Tags

No tags have been added.



Exadata VM Clusters – Step 1 of 5

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

Exadata VM clusters

Create Exadata VM cluster

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Step 1

Configure general settings

Step 2

Configure infrastructure settings

Step 3

Configure connectivity

Step 4 - optional

Configure diagnostics and tags

Step 5

Review and create

Configure general settings

A VM cluster is a set of tightly coupled virtual machines. You can install Oracle Exadata databases on a VM cluster.

Settings

VM cluster name

Enter a user-friendly name for your VM cluster.

ns_vmcluster

The name must be 1-255 characters, and must start with a letter or underscore and cannot contain two successive hyphens (-). Valid characters are A-Z, a-z, 0-9, underscores (_), and hyphens (-).

Grid Infrastructure cluster name - optional

My GI name

The name must be 1-11 characters, must start with a letter or underscore, and can't contain two consecutive hyphens (-). Valid characters are A-Z, a-z, 0-9, and hyphens (-).

Time zone

EST

License options

Choose the Oracle license model to apply to the VM cluster.

Bring Your Own License (BYOL)

Bring Your Own License (BYOL)

License Included

Cancel

Next



Exadata VM Clusters – Step 2 of 5

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

Exadata VM clusters

Create Exadata VM cluster

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Step 1

Configure general settings

Step 2

Configure infrastructure settings

Step 3

Configure connectivity

Step 4 - optional

Configure diagnostics and tags

Step 5

Review and create

Configure infrastructure settings

Info

Infrastructure

Exadata infrastructure name

Choose an Exadata infrastructure for your VM cluster. An Exadata infrastructure is the underlying architecture of servers and networking that run Oracle databases.

tt-exa-infra-01

Grid infrastructure version

Choose the Grid infrastructure version for your VM cluster that matches the Oracle Database version you are using.

23.0.0.0

Exadata image version

We recommend that you choose the default, which is the highest available version.

25.1.5.0.0.250530

Database servers (0/2)

You must select a minimum of one database server.

Find resources

< 1 >

☐	DB server name	Status	Available OCPUs	Available memory (GB)	Available local storage (GB)	Hosted VMs
☐	dbServer-2	Available	54	990	203	5
☐	dbServer-1	Available	54	990	203	5



Exadata VM Clusters – Step 2 of 5

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

Exadata VM clusters

Create Exadata VM cluster

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Configuration

Per VM

OCPUs

2

0126

OCPU core count

Memory

30

301390

GB

Local storage

60

602243

GB

Per cluster

Exadata storage

2

2192

TB

Storage allocation

You can't change the storage allocation after you create the VM cluster.

Enable storage allocation for local backups

Enable storage allocation for Exadata sparse snapshots

Usable storage allocation: Data: 80%, Reco: 20%, Sparse: 0%

CancelPreviousNext



Exadata VM Clusters – Step 3 of 5

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

Exadata VM clusters

Create Exadata VM cluster

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Step 1

Configure general settings

Step 2

Configure infrastructure settings

Step 3

Configure connectivity

Step 4 - optional

Configure diagnostics and tags

Step 5

Review and create

Configure connectivity

Connectivity

ODB network

The list includes only networks in the same AZ.

tt-odb-01

Host name prefix

Enter a unique host name for the VM cluster.

The host name must not exceed 12 characters and must start with a letter. Valid characters are A-Z, a-z, 0-9, and hyphen (-).

Host domain name

The domain name for the VM cluster. You can't change the host domain name. [Learn more](#)

client.lpiif6.oraclevcn.com

You can't change the host domain name. For more information, see DOC (link to show section about using VCN resolver for object storage)

Host and domain name URL

The fully qualified domain name (FQDN) for the VM cluster.

client.lpiif6.oraclevcn.com

SCAN listener port (TCP/IP) - optional

1521

Permissible range 1024 - 8999. Exceptions: 2484, 6100, 6200, 7060, 7070, 7085, 7879

SSH key pairs

Specify the public key for each SSH key pairs that you want to use to access your VM cluster. [Learn more](#)



Exadata VM clusters – Step 4 of 5

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

Exadata VM clusters

Create Exadata VM cluster

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Step 1

Configure general settings

Step 2

Configure infrastructure settings

Step 3

Configure connectivity

Step 4 - optional

Configure diagnostics and tags

Step 5

Review and create

Configure diagnostics and tags - optional

OCI diagnostic collection

By enabling OCI diagnostics collection and notifications, you can investigate and resolve VM issues more efficiently.

☒ Diagnostic events

Allow Oracle to collect and send fault notifications about critical, warning, and information events to me.

☒ Health monitor

Allow Oracle to collect health metrics/events such as Oracle Database up/down, disk space usage, etc., and share them with Oracle Cloud operations. You might receive some event notifications.

☒ Incident logs and trace collections

Allow Oracle to collect incident logs and traces to enable fault diagnosis and issue resolution.

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

Add new tag

You can add up to 50 tags.

Cancel

Previous

Next

171 Copyright © 2026, Oracle and/or its affiliates

Exadata VM clusters – Step 5 of 5

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

Exadata VM clusters

Create Exadata VM cluster

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Step 1

Configure general settings

Step 2

Configure infrastructure settings

Step 3

Configure connectivity

Step 4 - optional

Configure diagnostics and tags

Step 5

Review and create

Review and create

Step 1: Get started

Settings

VM cluster name

ns_vmcluster

Cluster name

-

Time zone

EST

License options

Bring Your Own License (BYOL)

Step 2: Infrastructure settings

Infrastructure

Exadata infrastructure name

tt-exa-infra-01

Exadata image version

25.1.5.0.0.250530

Grid infrastructure version

23.0.0.0

Database servers (2)

Find resources

< 1 >

DB server name	Status	Available OCPUs	Available memory (GB)	Available local storage (GB)	Hosted VMs
dbServer-2	Available	54	990	203	5
dbServer-1	Available	54	990	203	5



Autonomous VM Cluster

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

Autonomous VM clusters

Create Autonomous VM cluster

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Step 1

Configure general settings

Step 2

Configure infrastructure settings

Step 3

Configure connectivity

Step 4

Configure maintenance and tags

Step 5

Review and create

Configure general settings

An autonomous VM cluster is a set of tightly coupled virtual machines. You can provision Autonomous databases on an Autonomous VM cluster.

Settings

Autonomous VM cluster name

Enter a user-friendly name for your Autonomous VM cluster.

nish_mpm_adbvm

The name must be 1-255 characters, and must start with a letter or underscore and cannot contain two successive hyphens (-). Valid characters are A-Z, a-z, 0-9, underscores (_), and hyphens (-).

Description - optional

example-use

The description must be 1-400 characters

Time zone

EST

License options

Choose the Oracle license model to apply to the Autonomous VM cluster.

Bring Your Own License (BYOL)

Cancel

Next



Autonomous VM Cluster

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

Autonomous VM clusters

Create Autonomous VM cluster

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Step 1

Configure general settings

Step 2

Configure infrastructure settings

Step 3

Configure connectivity

Step 4

Configure maintenance and tags

Step 5

Review and create

Configure infrastructure settings

Infrastructure

Exadata infrastructure name

Choose an Exadata infrastructure for your Autonomous VM cluster. An Exadata infrastructure is the underlying architecture of servers and networking that run Oracle databases.

tt-exa-infra-01

Database servers (2/2)

You must select a minimum of two database servers.

Find resources

	DB server name	Status	Available EC2Us	Available memory (GB)	Available local storage (GB)	Hosted VMs	Hosted Autonomous VMs
☒	dbServer-1	Available	256	1110	543	5	0
☒	dbServer-2	Available	256	1110	543	5	0

Configuration

Exadata unallocated resources

Exadata storage	Local storage	Memory	EC2Us
176 TB	359 GB	1110 GB	256

EC2U count per VM

40

256

40

256

40

256

40 EC2Us

Database memory per EC2U

2

5

2

5

2 GB

Database storage

5

140.51

5

140.51

5 TB

Maximum number of Autonomous Container Databases

1

1

1

1

1



Autonomous VM Cluster

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

Autonomous VM clusters

Create Autonomous VM cluster

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Step 1

Configure general settings

Step 2

Configure infrastructure settings

Step 3

Configure connectivity

Step 4

Configure maintenance and tags

Step 5

Review and create

Configure connectivity

Connectivity

ODB network

The list includes only networks in the same AZ.

tt-odb-01

Scan listener port settings

Port (non-TLS) - optional

The default value is 1521.

1521

Permissible range 1024 - 8999. Exceptions: 1522, 1525, 5000, 6100, 6200, 7060, 7070, 7879, 8080, 8181, 8888, 8895.

Port (TLS) - optional

The default value is 2484.

2484

Permissible range 1024 - 8999. Exceptions: 1522, 1525, 5000, 6100, 6200, 7060, 7070, 7879, 8080, 8181, 8888, 8895.

☐ Enable mutual TLS (mTLS) authentication

Cancel

Previous

Next



Autonomous VM Cluster

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

Autonomous VM clusters

Create Autonomous VM cluster

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

Oracle support

Oracle documentation

Step 1

Configure general settings

Step 2

Configure infrastructure settings

Step 3

Configure connectivity

Step 4

Configure maintenance and tags

Step 5

Review and create

Configure maintenance and tags

Maintenance configuration

Window type

Oracle-managed schedule

The system assigns a date and start time for Autonomous VM cluster maintenance.

Customer-managed

Choose a date and start time for Autonomous VM cluster maintenance.

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

No tags associated with the resource.

Add new tag

You can add up to 50 tags.

Cancel

Previous

Next



Autonomous VM Cluster

aws

Search

[Option+S]

United States (N. Virginia)

Oracle Database@AWS

Autonomous VM clusters

Create Autonomous VM cluster

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters New

Oracle support

Oracle documentation

Step 1

Configure general settings

Step 2

Configure infrastructure settings

Step 3

Configure connectivity

Step 4

Configure maintenance and tags

Step 5

Review and create

Review and create

Step 1: General settings

Settings

Autonomous VM cluster name

nish_mpm_adbvm

Time zone

EST

Description

-

License options

Bring Your Own License (BYOL)

Step 2: Infrastructure settings

Infrastructure

Exadata infrastructure name

tt-exa-infra-01

Database servers (2)

Find resources

DB server name	Status	Available EC2Us	Available memory (GB)	Available local storage (GB)	Hosted VMs
dbServer-1	Available	256	1110	543	0
dbServer-2	Available	256	1110	543	0

Configuration

EC2U count per VM

40 EC2Us

Database memory per EC2U

2 GB

Maximum number of Autonomous Container Databases

1

Database storage

5 TB

Step 3: Connectivity

ODB network name

tt-odb-01

SCAN listener port (TLS)

2484



Autonomous AI Database Serverless 1 of 9

aws

Search

[Alt+S]

United States (N. Virginia)

Oracle Database@AWS

Oracle Database@AWS

Autonomous AI Databases Serverless

Create Autonomous AI Database Serverless

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

ODB peering connections

Autonomous AI Databases Serverless New

Settings

Oracle support

Oracle documentation

Step 1

General settings

Step 2

Database configurations

Step 3

Permissions

Step 4 - optional

Advanced configurations

Step 5

Review and create

General settings

Settings

Display name

adbs-demo-01

The name must be 1-255 characters, must start with a letter or underscore, can't end with a hyphen (-), and can't contain two consecutive hyphens (-). Valid characters are A-Z, a-z, 0-9, underscores (_), and hyphens (-).

Database name

ADBSDEMO

The name must be 1-30 characters and consist of letters and numbers only. Must start with a letter.

Cancel

Next



Autonomous AI Database Serverless 2 of 9

aws

Search

[Alt+S]

United States (N. Virginia)

Oracle Database@AWS

Oracle Database@AWS

Autonomous AI Databases Serverless

Create Autonomous AI Database Serverless

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

ODB peering connections

Autonomous AI Databases Serverless New

Settings

Oracle support

Oracle documentation

Step 1

General settings

Step 2

Database configurations

Step 3

Permissions

Step 4 - optional

Advanced configurations

Step 5

Review and create

Database configurations

Configuration

Workload type

Lakehouse

Built for analytics and AI. Fast insights from a single lakehouse for all your data.

Transaction process

Built for transactional workloads. High concurrency for short-running queries and transactions.

JSON

Built for JSON-centric application development. Developer-friendly document APIs and native JSON storage.

APEX

Built for Oracle APEX application development. Creation and deployment of low-code applications, with database included.

Database version

Choose the Oracle Database version.

19c

ECPUs

2

512

ECPUs

Compute auto-scaling

Allows system to expand up to three times the specified ECPUs count as demand increases.

Enable

Storage

20

393216

1024

GB

Storage auto-scaling

Allows system to expand up to three times the reserved storage.

Enable

179 Copyright © 2025, Oracle and/or its affiliates

Autonomous AI Database Serverless 3 of 9

aws

Search

[Alt+S]

United States (N. Virginia)

Oracle Database@AWS

Oracle Database@AWS > Autonomous AI Databases Serverless > Create Autonomous AI Database Serverless

Oracle Database@AWS <

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

ODB peering connections

Autonomous AI Databases Serverless New

Settings

Oracle support

Oracle documentation

Advanced options

Elastic pool

☒ Enable

Elastic pools require ECPU compute model, and ECPU auto scaling must be disabled.

Pool options

☒ Join an existing elastic pool

Connect this database to an already established elastic pool by selecting the pool leader.

☐ Create an elastic pool

Create a new shared resource pool with configurable ECPU capacity for cost-efficient database consolidation.

Existing elastic pool databases

adbs-demo10

Compute model

The unit that is used to measure and bill for compute resources, such as storage and database services.

ECPU

Bring your own license (BYOL)

☐ Enable



Autonomous AI Database Serverless 4 of 9

aws

Search

[Alt+S]

United States (N. Virginia)

Oracle Database@AWS

Oracle Database@AWS

Autonomous AI Databases Serverless

Create Autonomous AI Database Serverless

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

ODB peering connections

Autonomous AI Databases Serverless [New](#)

Settings

Oracle support

Oracle documentation

Pool options

☒ Join an existing elastic pool

Connect this database to an already established elastic pool by selecting the pool leader.

☐ Create an elastic pool

Create a new shared resource pool with configurable ECPU capacity for cost-efficient database consolidation.

Existing elastic pool databases

adbs-demo10

Compute model

The unit that is used to measure and bill for compute resources, such as storage and database services.

ECPU

Bring your own license (BYOL)

☐ Enable

Backup settings

Automatic backup (days)

Automatic backup retention period in days.

10

Backup retention lock

Enabling this option locks the backup retention period, preventing any further changes. Use this retention lock feature as a security measure to protect backups from accidental changes or ransomware.

☒ Enable

Automatic backups are managed by Oracle. Backup storage is billed separately and in addition to database storage. When a backup ages beyond the backup retention setting, it is deleted.

Cancel

Previous

Next

181 Copyright © 2025, Oracle and/or its affiliates

Autonomous AI Database Serverless 5 of 9

aws

Search

[Alt+S]

United States (N. Virginia)

Oracle Database@AWS

Oracle Database@AWS > Autonomous AI Databases Serverless > Create Autonomous AI Database Serverless

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

ODB peering connections

Autonomous AI Databases Serverless New

Settings

Oracle support

Oracle documentation

Step 2

Database configurations

Step 3

Permissions

Step 4 - optional

Advanced configurations

Step 5

Review and create

Admin user credentials

Username

ADMIN

Admin user password

The password of the admin user.

Must be 12-30 characters long. Must contain at least one uppercase letter, one lowercase letter and one number. Can be any printable ASCII character except "/", "", or "@".

Confirm password

Show password

Network access

Access type

Secure access from everywhere

Allow users with database credentials to access the database from the internet.

Secure access from allowed IPs and CIDR blocks only

Restrict access to specified IP addresses and CIDR blocks.

Private endpoint access only

Restrict access to a private endpoint within an ODB Network.

Require mutual TLS (mTLS) authentication

If you select this option, mTLS will be required to authenticate connections to your Autonomous AI Database.

Contacts for operational notifications and announcements

OCI maintenance notification contacts

You can enter up to 10 email addresses for notification about maintenance updates. AWS forwards the addresses to Oracle, who emails the notification.

john_doe@example.com X

Cancel

Previous

Next



Autonomous AI Database Serverless 6 of 9

aws

Search

[Alt+S]

Ask Amazon Q

United States (N. Virginia)

Oracle Database@AWS

Oracle Database@AWS > Autonomous AI Databases Serverless > Create Autonomous AI Database Serverless

Oracle Database@AWS <

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

ODB peering connections

Autonomous AI Databases Serverless New

Settings

Oracle support

Oracle documentation

Step 1

General settings

Step 2

Database configurations

Step 3

Permissions

Step 4 - optional

Advanced configurations

Step 5

Review and create

Advanced configurations - optional

▼ Encryption

You can encrypt your data using a customer-managed key or an Oracle-managed key.

☒ Oracle managed key
Oracle manages the encryption key

☐ Customer managed key
You must have access to a valid encryption key.

Customer-managed key encryption is not available during the creation of an Autonomous AI Database Serverless instance. After the database is created, you can enable customer-managed key encryption by navigating to the database details page and editing the encryption settings.

▼ Maintenance

Obtain information about system events, maintenance, and other important information for the operation of your Autonomous AI Database instance.

Patch level

Choose the patch level for maintenance updates.

Early

▼ Management

Choose character set and national character sets.

Character set

Choose the character set for the database.

AL32UTF8

National character set

Choose the national character set for the database.

AL16UTF16



Autonomous AI Database Serverless 7 of 9

aws

Search

[Alt+S]

Ask Amazon Q

United States (N. Virginia)

Oracle Database@AWS

Oracle Database@AWS > Autonomous AI Databases Serverless > Create Autonomous AI Database Serverless

Oracle Database@AWS <

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

ODB peering connections

Autonomous AI Databases Serverless [New](#)

Settings

Oracle support

Oracle documentation

▼ Tools

Enable or disable Autonomous AI Database built-in tools.

Oracle APEX

Oracle APEX is a low-code development platform that you can use to build scalable, secure enterprise applications that can be deployed anywhere.

☐ Enable

Database actions

Oracle AI Database actions is a web-based interface that uses Oracle REST Data Services (ORDS) to provide development, data tools, administration, and monitoring features for an Oracle Autonomous AI Database.

☐ Enable

Graph Studio

Graph Studio automates the creation of knowledge (RDF) and property graphs and includes interactive tooling for query, analysis, and visualization of these graphs in the Autonomous AI Database. You must log in as a graph-enabled user to access Graph Studio. Create this user in database actions.

☐ Enable

Oracle Machine Learning user interface

The Oracle Machine Learning user interface provides immediate access to the Oracle Machine Learning components and functionality on Autonomous AI Database, including OML Notebooks, OML AutoML UI, OML Models, and template example notebooks.

☐ Enable

Data transforms

Oracle data transforms allows you to design graphical data transformations in the form of data flows and workflows. The data flows define how the data is moved and transformed between different systems, while the workflows define the sequence in which the data flows are executed.

☐ Enable

Web Access (ORDS)

Oracle REST Data Services (ORDS) provides HTTPS interfaces for working with the contents of your Oracle AI Database in one or more REST enabled schemas.

☐ Enable

MongoDB API

Oracle AI Database API for MongoDB enables MongoDB-compatible clients and drivers to connect directly to Autonomous AI Database.

☐ Enable

Data Lake Accelerator

Data Lake Accelerator enhances the performance and scalability of external data processing on Autonomous AI Database. It automatically allocates additional CPU resources to speed up external data scans from Object Stores based on query needs. This integration enables efficient resource utilization, faster query responses, and easy scaling for large data volumes.

☐ Enable

Spatial Studio

Oracle Spatial Studio provides a web-based interface for self-service spatial analysis and visualization of spatial data in the Autonomous AI Database.

☐ Enable

SODA drivers

Simple Oracle Document Access (SODA) is a set of APIs that let you work with JSON documents managed by the Oracle AI Database without needing to use SQL. SODA drivers are available for REST, Java, Node.js, Python, PL/SQL, and C.

☐ Enable



Autonomous AI Database Serverless 8 of 9

aws

Search

[Alt+S]

Ask Amazon Q

United States (N. Virginia)

Oracle Database@AWS

Oracle Database@AWS

Autonomous AI Databases Serverless

Create Autonomous AI Database Serverless

Oracle Database@AWS

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

ODB peering connections

Autonomous AI Databases Serverless

Settings

Oracle support

Oracle documentation

Step 1

General settings

Step 2

Database configurations

Step 3

Permissions

Step 4 - optional

Advanced configurations

Step 5

Review and create

Advanced configurations - optional

Encryption

You can encrypt your data using a customer-managed key or an Oracle-managed key.

Maintenance

Obtain information about system events, maintenance, and other important information for the operation of your Autonomous AI Database instance.

Management

Choose character set and national character sets.

Tools

Enable or disable Autonomous AI Database built-in tools.

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key

owner

Value - optional - optional

Finance

Remove

Add new tag

You can add up to 49 more tags.

Cancel

Previous

Next



Autonomous AI Database Serverless 9 of 9

aws

Search

[Alt+S]

Ask Amazon Q

United States (N. Virginia)

Oracle Database@AWS

Oracle Database@AWS > Autonomous AI Databases Serverless

Oracle Database@AWS <

Dashboard

ODB networks

Exadata infrastructures

Exadata VM clusters

Autonomous VM clusters

ODB peering connections

Autonomous AI Databases Serverless [New](#)

Settings

Oracle support

Oracle documentation

Autonomous AI Databases Serverless (20)

Actions

Database connections

Create Autonomous AI Database Serverless

Find resources

< 1 2 >

	Database name	Status	ECPU	Storage	Workload type	Disaster recovery	Elastic pool	Created
	adbs-demo-01	Provisioning	2	20 (GB)	Transaction Processing	Primary	-	Jun 2, 2026, 08:50:52 GMT-05:00
	adbs-demo10	Available	16	1024 (GB)	Transaction Processing	Primary	-	May 27, 2026, 10:38:42 GMT-05:00



Docs

Technical Resources (1 of 2)

Press Release:

- <https://www.oracle.com/news/announcement/oracle-database-at-aws-available-in-limited-preview-2024-12-02/>

Blogs:

- <https://blogs.oracle.com/cloud-infrastructure/post/announcing-general-availability-oracle-db-at-aws>
- <https://blogs.oracle.com/database/post/getting-started-with-exadata-database-service-on-oracle-databaseaws>
- <https://blogs.oracle.com/database/post/getting-started-with-autonomous-database-on-dedicated-exadata-infrastructure-on-oracle-databaseaws>

re:Invent breakout session on Oracle Database @ AWS preview launch:

- <https://www.youtube.com/watch?v=Q7fAAcGgO-c>

Demos

- Provisioning Exadata Database Service: <https://youtu.be/cHJZuZZvPD0>
- Provisioning Autonomous Database Service: <https://youtu.be/vJXKlfBVbRo>
- Monitor via OCI Metrics: <https://youtu.be/3HgqNfIGHdu>
- Monitor via Amazon CloudWatch: <https://youtu.be/F6brMocrD3o>



Technical Resources (2 of 2)

AWS:

- Product on AWS Marketplace: <https://aws.amazon.com/marketplace/pp/prodview-qks5dl3hr7nfw>
- Product on AWS Console: <https://us-east-1.console.aws.amazon.com/odb/home?region=us-east-1>
- AWS Marketplace Featured Seller page: <https://aws.amazon.com/marketplace/featured-seller/oracle/>
- AWS What's New post: <https://aws.amazon.com/about-aws/whats-new/2024/12/oracle-database-aws-limited-preview/>

Oracle:

- Oracle Docs page: <https://docs.oracle.com/en-us/iaas/Content/database-at-aws/oaaws.htm>
- Oracle Product page: <https://www.oracle.com/cloud/aws/>
- Public Pricing page: <https://www.oracle.com/cloud/aws/pricing/>
- Onboarding Documentation page: <https://docs.oracle.com/iaas/Content/database-at-aws/oaaws-onboard.htm>
- Reference Architecture: Deploy Oracle AI Database@AWS: <https://docs.oracle.com/en/solutions/deploy-oracle-db-aws/>
- Solution Playbook: Learn about network topologies for Oracle AI Database@AWS: <https://docs.oracle.com/en/solutions/network-topology-oracle-database-at-aws/>
- Tutorial: Provision Oracle Exadata Database Service in Oracle AI Database@AWS: <https://docs.oracle.com/en/learn/exadb-provisioning-aws/#introduction>



Thank you – Next Steps?

Oracle AI Database@AWS

