

Lab - Parsing JSON with a Python Application

Objectives

- Obtain a MapQuest API Key.
- Import necessary modules.
- Create API request variables and construct a URL.
- Add user input functionality.
- Add a quit feature so that the user can end the application.
- Display trip information for time, distance, and fuel usage.
- Iterate through the JSON data to extract and output the directions.
- Display error messages for invalid user input.

Background / Scenario

In this lab, you will create an application that retrieves JSON data from the MapQuest Directions API, parses the data, and formats it for output to the user. You will use the GET Route request from the MapQuest Directions API. Review the GET Route Directions API documentation here:

<https://developer.mapquest.com/documentation/directions-api/route/get/>

Note: If the above link no longer works, search for “MapQuest API Documentation”.

Required Resources

- Computer with Python installed according to the **Lab - PC Setup for Workshop**.
- Access to the internet.

Instructions

Step 1: Demonstrate the MapQuest Directions API application.

Your instructor may demonstrate the application and show you the script used to create it. In addition, your instructor may allow you to have the solution script, **08_parse-json_sol.py**. However, you will create this script step-by-step in this lab.

The application asks for a starting location and a destination. It then requests JSON data from the MapQuest Directions API, parses it, and displays useful information.

```
>>>
Starting Location: Washington
Destination: Baltimore
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&from=Washington&to=Baltimore
API Status: 0 = A successful route call.

Directions from Washington to Baltimore
```

```
Trip Duration:    00:49:19
Kilometers:      61.32
Fuel Used (Ltr): 6.24
=====
Start out going north on 6th St/US-50 E/US-1 N toward Pennsylvania Ave/US-1 Alt N.
(1.28 km)
Turn right onto New York Ave/US-50 E. Continue to follow US-50 E (Crossing into
Maryland). (7.51 km)
Take the Balt-Wash Parkway exit on the left toward Baltimore. (0.88 km)
Merge onto MD-295 N. (50.38 km)
Turn right onto W Pratt St. (0.86 km)
Turn left onto S Calvert St/MD-2. (0.43 km)
Welcome to BALTIMORE, MD. (0.00 km)
=====

Starting Location: quit
>>>
```

Note: To see the JSON for the above output, you will need to replace **your_api_key** with the MapQuest API key you obtained in Step 3.

Step 2: Authenticating a RESTful request.

Before building the application, you will need to obtain a key from MapQuest developer site, which you will do in the next step. Previously, you used no authentication to access the ISS Pass Predictions API. However, many APIs require some form of authentication.

Authenticating a RESTful request is done in one of four ways. Describe each method below:

- **None:** El servidor permite solicitudes sin necesidad de credenciales.
 - **Basic HTTP:** El cliente envía las credenciales, estas se envían en texto claro y podrían ser interceptadas, no es segura para datos sensibles, ya que las credenciales se envían en texto claro y podrían ser interceptadas.
 - **Token:** Se obtiene un token de acceso único y seguro del proveedor. Este token se incluye en el encabezado de la solicitud RESTful para autenticar la solicitud. Los tokens son eficaces porque no contienen información sensible y pueden tener una caducidad, lo que mejora la seguridad.
 - **Open Authorization (OAuth):** Es un protocolo estándar de la industria para la autorización. Permite a las aplicaciones obtener acceso limitado a las cuentas de un usuario en otro servicio, como Facebook, Google o Twitter, sin revelar las credenciales del usuario. En lugar de compartir las credenciales, las aplicaciones obtienen un token de acceso que representa la autorización del usuario para acceder a sus datos.
-
- For the MapQuest API, you will use token authentication.

Step 3: Get a MapQuest API key.

Complete the following steps to get a MapQuest API key:

- Go to: <https://developer.mapquest.com/>.
- Click **Sign Up** at the top of the page.
- Fill out the form to create a new account. For **Company**, enter **Cisco Networking Academy Student**.

- d. After clicking **Sign Me Up**, you are redirected to the **Manage Keys** page.
- e. Click **Approve All Keys** and expand **My Application**.
- f. Copy your **Consumer Key** to Notepad for future use. This will be the key you use for the rest of this lab.

Note: MapQuest may change the process for obtaining a key. If the steps above are no longer valid, search for “steps to generate mapquest api key”.

Step 4: Importing modules for the application.

To begin your script for parsing JSON data, you will need to import two modules from the Python library: **requests** and **urllib.parse**. The **request** module provides functions for retrieving JSON data from a URL. The **urllib.parse** module provides a variety of functions that will enable you to parse and manipulate the JSON data you receive from a request to a URL.

- a. Open a blank script file and save it **08_parse-json1.py**.
- b. Import the **urllib.parse** and **requests** modules.

```
import urllib.parse
import requests
```

Step 5: Create variables for API request.

The first step in creating your API request is to construct the URL that your application will use to make the call. Initially, the URL will be the combination of the following variables:

- **main_api** – This is the main URL that you are accessing.
 - **orig** – This is the parameter to specify your point of origin.
 - **dest** – This is the parameter to specify your destination.
 - **key** – This is the MapQuest API key you retrieved from the developer website.
- a. Create variables to build the URL that will be sent in the request. Copy your MapQuest key to the key variable.

```
main_api = "https://www.mapquestapi.com/directions/v2/route?"
orig = "Washington"
dest = "Baltimore"
key = "your_api_key"
```

- b. Combine the four variables **main_api**, **orig**, **dest**, and **key** to format the requested URL. Use the **urlencode** method to properly format the address value. This function builds the parameters part of the URL and converts possible special characters in the address value (e.g. space into “+” and a comma into “%2C”).

```
url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest})
```

- c. Create a variable to hold the reply of the requested URL and print the returned JSON data. The **json_data** variable holds a Python’s Dictionary representation that is the **json** reply of the **get** method of the **requests** module. The **print** statement is used to check the returned data.

```
json_data = requests.get(url).json()
print(json_data)
```

Step 6: Test the URL request.

- a. Run your **08_json-parse1.py** script and verify that it works. Troubleshoot your code, if necessary. Although your output might be slightly different, you should get a JSON response similar to the following:


```
{'route': {'distance': 38.089, 'hasHighway': True, 'hasUnpaved': False,
'hasAccessRestriction': False, 'options': {'mustAvoidLinkIds': []},
```

```
'maxWalkingDistance': -1, 'manmaps': 'true', 'urbanAvoidFactor': -1,
'stateBoundaryDisplay': True, 'cyclingRoadFactor': 1, 'routeType': 'FASTEST',
'countryBoundaryDisplay': True, 'drivingStyle': 2, 'highwayEfficiency': 22,
'narrativeType': 'text', 'routeNumber': 0, 'tryAvoidLinkIds': [], 'generalize': -1,
'returnLinkDirections': False, 'doReverseGeocode': True, 'avoidTripIds': [],
'timeType': 0, 'sideOfStreetDisplay': True, 'filterZoneFactor': -1, 'walkingSpeed': -
1, 'useTraffic': False, 'unit': 'M', 'tr
[output omitted]
>>>
```

- b. Change the **orig** and **dest** variables. Rerun the script to get different results.

```
16 url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest})
17 json_data = requests.get(url).json()
18 print(json_data['route']['sessionId'])
19
```

- c.

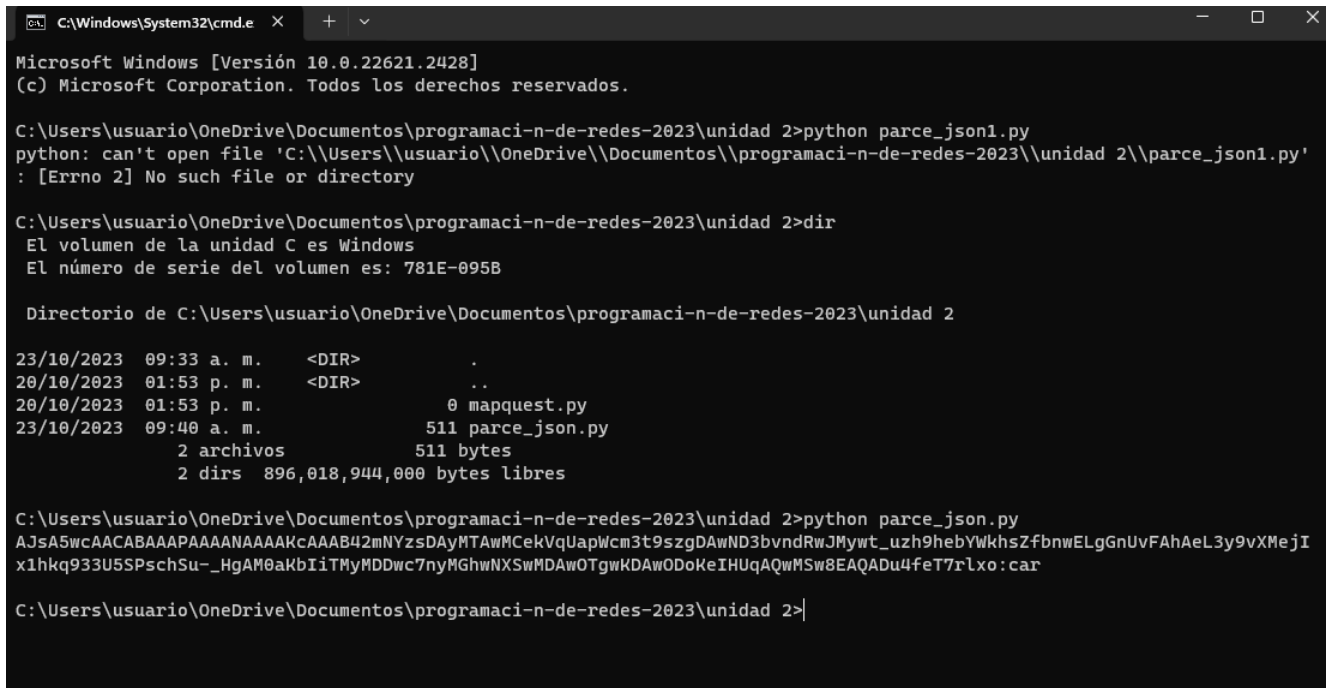

```
C:\Windows\System32\cmd.e X + v
Microsoft Windows [Versión 10.0.22621.2428]
(c) Microsoft Corporation. Todos los derechos reservados.

C:\Users\usuario\OneDrive\Documentos\programaci-n-de-redes-2023\unidad 2>python parce_json1.py
python: can't open file 'C:\\Users\\usuario\\OneDrive\\Documentos\\programaci-n-de-redes-2023\\unidad 2\\parce_json1.py'
: [Errno 2] No such file or directory

C:\Users\usuario\OneDrive\Documentos\programaci-n-de-redes-2023\unidad 2>dir
El volumen de la unidad C es Windows
El número de serie del volumen es: 781E-095B

Directorio de C:\Users\usuario\OneDrive\Documentos\programaci-n-de-redes-2023\unidad 2

23/10/2023 09:33 a. m. <DIR> .
20/10/2023 01:53 p. m. <DIR> ..
20/10/2023 01:53 p. m. 0 mapquest.py
23/10/2023 09:40 a. m. 511 parce_json.py
2 archivos 511 bytes
2 dirs 896,018,944,000 bytes libres

C:\Users\usuario\OneDrive\Documentos\programaci-n-de-redes-2023\unidad 2>python parce_json.py
AJsA5wcAACABAAAPAAAAAANAkAAAB42mNYzsDAyMTAwMCekVqUapWcm3t9szgDAwND3bvndRwJMywt_uzh9hebYwKhsZfbnwELGnUvFAhAeL3y9vXMejI
x1hkq933U5SPschSu-_HgAM0akbIiThMyMDDwc7nyMGhwNXSwMDAwOTgwKDAwODoKeIHUqAQwMSw8EAQADu4feT7rlxo:car

C:\Users\usuario\OneDrive\Documentos\programaci-n-de-redes-2023\unidad 2>
```

- d.

- e.

```
19
20 #Extrae la distancia y el tiempo
21 print(json_data['route']['distance'])
22 print(json_data['route']['time'])
23
24 #Extraer del primer elemento legs el campo formattedtime
25 print(json_data['route']['formattedTime'])
```

```
C:\Users\usuario\OneDrive\Documentos\programaci-n-de-redes-2023\unidad 2>python parce_json.py
AJsA5wcAACABAAAPAAAANAAAKcAAAB42mNYzsDAYMTAwMCekVqUapWcm3t9szgDAwND3bvndRwJMywt_uzh9hebYWKhsZfbnwELgGnUvFAhAeL3y9vXMejI
x1hkq933U5SPschSu-_HgAM0akbIiTMyMDDwc7nyMGhwNXSwMDAwOTgwKDAwODoKeIHUqAQwMSw8EAQADu4feT7rLxo:car
25.214
2485
00:41:25
```

Step 7: Print the URL and check the status of the JSON request.

Now that you know the JSON request is working, you can add some more functionality to the application.

- Save your script as **08_json-parse2.py**.
- Delete the **print(json_data)** statement because you no longer need to test that the request is properly formatted.
- Add the statements below, which will do the following:
 - Print the constructed URL so that the user can see the exact request made by the application.
 - Parse the JSON data to obtain the **statuscode** value.
 - Start an **if** loop that checks for a successful call, which has a value of 0. Add a print statement to display the **statuscode** value and its meaning. The **\n** adds a blank line below the output.

```
print("URL: " + (url))
```

```
json_data = requests.get(url).json()
json_status = json_data["info"]["statuscode"]
```

```
if json_status == 0:
    print("API Status: " + str(json_status) + " = A successful route call.\n")
```

Later in this lab, you will add **elif** and **else** statements for different **statuscode** values.

Step 8: Test status and URL print commands.

Run your **08_json-parse2.py** script and verify that it works. Troubleshoot your code, if necessary. You should get output similar to the following:

```
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&to=Baltimore&from=Was
hington
API Status: 0 = A successful route call.

>>>
```

```
import urllib.parse
import requests      Import "requests" could not be resolved from source

main_api = "https://www.mapquestapi.com/directions/v2/route?"
orig = "Dolores Hidalgo"
dest = "San Miguel de allende"
key = "XxL9wmf7qb4t0P3QY2uB8UpVwo0TaCHV"

url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest})
json_data = requests.get(url).json()

#imprimir la URL
print("URL: " + (url))

json_data = requests.get(url).json()
json_status = json_data["info"]["statuscode"]

if json_status == 0:
    print("API Status: " + str(json_status) + " = A successful route call.\n")
```

```
C:\Users\usuario\OneDrive\Documentos\programaci-n-de-redes-2023\unidad 2>python parce_json1.py
URL: https://www.mapquestapi.com/directions/v2/route?key=XxL9wmf7qb4t0P3QY2uB8UpVwo0TaCHV&from=Dolores+Hidalgo&to=San+Miguel+de+allende
API Status: 0 = A successful route call.
```

```
7
8 import urllib.parse
9 import requests      Import "requests" could not be resolved from source
10
11 main_api = "https://www.mapquestapi.com/directions/v2/route?"
12 orig = "San ocote "
13 dest = "San Miguel de allende"
14 key = "XxL9wmf7qb4t0P3QY2uB8UpVwo0TaCHV"
15
16 url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest})
17 json_data = requests.get(url).json()
18
19 #imprimir la URL
20 print("URL: " + (url))
21
22 json_data = requests.get(url).json()
23 json_status = json_data["info"]["statuscode"]
24
25 if json_status == 0:
26     print("API Status: " + str(json_status) + " = A successful route call.\n")
27
28 elif json_status == 0:
29     print("API Status: " + str(json_status) + " = A failuer route call.\n")
```

```
1 {
2   "route": {
3     "routeError": {
4       "errorCode": 2,
5       "message": ""
6     }
7   },
8   "info": {
9     "statusCode": 402,
10    "copyright": {
11      "text": "© 2023 MapQuest, Inc.",
12      "imageUrl": "http://api.mqcdn.com/res/mqlogo.gif",
13      "imageAltText": "© 2023 MapQuest, Inc."
14    },
15    "messages": [
16      "We are unable to route with the given locations."
17    ]
18  }
19 }
```

Step 9: Add user input for starting location and destination.

Up to this point, you have used Washington and Baltimore as the static values for the location variables. However, the application requires that the user input these. Complete the following steps to update your application:

- Save your script as **08_json-parse3.py**.
- Delete the current **orig** and **dest** variables.
- Rewrite the **orig** and **dest** to be within a **while** loop in which it requests user input for the starting location and destination. The **while** loop allows the user to continue to make requests for different directions.
- Be sure all the remaining code is indented within the **while** loop.

while True:

```
    orig = input("Starting Location: ")
    dest = input("Destination: ")
    url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest})
    print("URL: " + (url))

    json_data = requests.get(url).json()
    json_status = json_data["info"]["statusCode"]

    if json_status == 0:
        print("API Status: " + str(json_status) + " = A successful route call.\n")
```

```
1 '''
2 Nombre: Monserrat Orduña Basaldua
3 Fecha: 23 de octubre 2023
4 Descripción: Invocando
5
6 '''
7 import urllib.parse
8 import requests  # Import "requests" could not be resolved from source
9
10 while True:
11     orig = input("Starting Location: ")
12     dest = input("Destination: ")
13     main_api = "https://www.mapquestapi.com/directions/v2/route?"
14     key = "XxL9wmf7qb4t0P3QY2uB8UpVwo0TaCHV"
15     url = main_api + urllib.parse.urlencode({"key": key, "from": orig, "to": dest})
16     json_data = requests.get(url).json()
17     #imprimir la URL
18     print("URL: " + (url))
19     json_data = requests.get(url).json()
20     json_status = json_data["info"]["statuscode"]
21     if json_status == 0:
22         print("API Status: " + str(json_status) + " = A successful route call.\n")
23
24     elif json_status == 0:
25         print("API Status: " + str(json_status) + " = A failuer route call.\n")
```

```
C:\Users\usuario\OneDrive\Documentos\programaci-n-de-redes-2023\unidad 2>python parce_json2.py
Starting Location: dolores hidalgo
Destination: san miguel de allende
URL: https://www.mapquestapi.com/directions/v2/route?key=XxL9wmf7qb4t0P3QY2uB8UpVwo0TaCHV&from=dolores+hidalgo&to=san+mi
guel+de+allende
API Status: 0 = A successful route call.

Starting Location: |
```

Step 10: Test user input functionality.

Run your **08_json-parse3.py** script and verify that it works. Troubleshoot your code, if necessary. You should get output similar to what is shown below. You will add quit functionality in the next step. For now, enter **Ctrl+C** to quit the application.

```
Starting Location: Washington
Destination: Baltimore
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&from=Washington&to=Ba
ltimore
API Status: 0 = A successful route call.
```

```
Starting Location: <Ctrl+C>
```

Step 11: Add the quit functionality to the application.

Instead of entering **Ctrl+C** to quit the application, you will add the ability for the user to enter **q** or **quit** as keywords to quit the application. Complete the following steps to update your application:

- Save your script as **08_json-parse4.py**.
- Add an **if** statement after each location variable to check if the user enters **q** or **quit**, as shown below:


```
while True:
    orig = input("Starting Location: ")
    if orig == "quit" or orig == "q":
        break
    dest = input("Destination: ")
    if dest == "quit" or dest == "q":
        break

4 Nombre:Monserrat Orduña Basaldua
5 '''
6 import urllib.parse
7 import requests    Import "requests" could not be resolved from source
8 while True:
9     orig = input("Starting Location: ")
10    if orig == "quit" or orig == "q":
11        break
12    dest = input("Destination: ")
13    #Agregar condicion para dest
14    #un mensaje hasta luego
15    if dest == "quit" or dest == "q":
16        break
17    print ("Hasta luego ")
18    main_api = "https://www.mapquestapi.com/directions/v2/route?"
19    key = "XxL9wmf7qb4t0P3QY2uB8UpVwo0TaCHV"
20    url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest})
21    json_data = requests.get(url).json()
22    #imprimir la URL
23    print("URL: " + (url))
24    json_data = requests.get(url).json()
25    json_status = json_data["info"]["statuscode"]
26    if json_status == 0:
27        print("API Status: " + str(json_status) + " = A successful route call.\n")
28    elif json_status == 0:
29        print("API Status: " + str(json_status) + " = A failuer route call.\n")
```

```
C:\Users\usuario\OneDrive\Documentos\programaci-n-de-redes-2023\unidad 2>python parce_json3.py
Starting Location: dolores hidalgo
Destination: san miguel de allende
Hasta luego
```

Step 12: Test the quit functionality.

Run your **08_json-parse4.py** script four times to test each location variable. Verify that both **quit** and **q** will end the application. Troubleshoot your code, if necessary. You should get output similar to the following:

```
Starting Location: q
>>>
Starting Location: quit
>>>
Starting Location: Washington
Destination: q
>>>
Starting Location: Washington
Destination: quit
```

>>>

Step 13: Parse and display some data about the trip.

- Copy your URL into your web browser. If you collapse all the JSON data, you will see that there are two root dictionaries: **route** and **info**.
- Expand the **route** dictionary and investigate the rich data. There are values to indicate whether the route has toll roads, bridges, tunnels, highways, closures, or crosses into other countries. You should also see values for distance, the total time the trip will take, and fuel usage, as highlighted below. To parse and display this, specify the **route** dictionary and select key/value pair you want to print.

```
{
  - route: {
    hasTollRoad: false,
    hasBridge: true,
    + boundingBox: {...},
    distance: 38.089,
    hasTimedRestriction: false,
    hasTunnel: false,
    hasHighway: true,
    computedWaypoints: [ ],
    + routeError: {...},
    formattedTime: "00:49:19",
    sessionId: "5bc20e76-03aa-6750-02b4-1daf-0a1a4c2d1adc",
    hasAccessRestriction: false,
    realTime: 3309,
    hasSeasonalClosure: false,
    hasCountryCross: false,
    fuelUsed: 1.65,
    - legs: [
```

- Save your script as **08_json-parse5.py**.
- Below the API status print command, add print statements that display the from and to locations, as well as the **formattedTime**, **distance**, and **fuelUsed** keys.
- Add a print statement that will display a double line before the next request for a starting location as shown below.

```
if json_status == 0:
    print("API Status: " + str(json_status) + " = A successful route call.\n")
    print("=====")
    print("Directions from " + (orig) + " to " + (dest))
    print("Trip Duration:    " + (json_data["route"]["formattedTime"]))
    print("Miles:                " + str(json_data["route"]["distance"]))
    print("Fuel Used (Gal):      " + str(json_data["route"]["fuelUsed"]))
    print("=====")
```

- Run **08_json-parse5.py** to see the following output:

```
Starting Location: Washington
Destination: Baltimore
```

Lab - Parsing JSON with a Python Application

URL:
https://www.mapquestapi.com/directions/v2/route?to=Baltimore&key=Your_api_key&from=Washington
API Status: 0 = A successful route call.

```
=====
Directions from Washington to Baltimore
Trip Duration:    00:49:19
Miles:            38.089
Fuel Used (Gal):  1.65
=====
```

Starting Location: q

>>>

```
ad 2 > parce_json4.py > ...
#un mensaje hasta luego
if dest == "quit" or dest == "q":
    break
print("Hasta luego ")
main_api = "https://www.mapquestapi.com/directions/v2/route?"
key = "XxL9wmf7qb4t0P3QY2uB8UpVwo0TaCHV"

url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest})
json_data = requests.get(url).json()

#imprimir la URL
print("URL: " + (url))

json_data = requests.get(url).json()
json_status = json_data["info"]["statusCode"]

if json_status == 0:
    print("API Status: " + str(json_status) + " = A successful route call.\n")

    print("=====")
    print("Directions from " + (orig) + " to " + (dest))
    print("Trip Duration:   " + (json_data["route"]["formattedTime"]))
    print("Miles:            " + str(json_data["route"]["distance"]))
    #print("Fuel Used (Gal): " + str(json_data["route"]["fuelUsed"]))
    print("=====")
    print("Kilometers:        " + str("{:.2f}".format((json_data["route"]["distance"])*1.61)))
else:
    print("API Status: " + str(json_status) + " = A failure route call.\n")
```

```
C:\Users\usuario\OneDrive\Documentos\programaci-n-de-redes-2023\unidad 2>python parce_json4.py
Starting Location: dolores hidalgo
Destination: guanajuato
Hasta luego
URL: https://www.mapquestapi.com/directions/v2/route?key=XxL9wmf7qb4t0P3QY2uB8UpVwo0TaCHV&from=dolores+hidalgo&to=guanajuato
API Status: 0 = A successful route call.

=====
Directions from dolores hidalgo to guanajuato
Trip Duration:    01:03:13
Miles:            36.2595
=====
Kilometers:       58.38
Starting Location: dolores hidalgo
Destination: guanajuato
Hasta luego
URL: https://www.mapquestapi.com/directions/v2/route?key=XxL9wmf7qb4t0P3QY2uB8UpVwo0TaCHV&from=dolores+hidalgo&to=guanajuato
API Status: 0 = A successful route call.
```

- g. MapQuest uses the imperial system and there is not a request parameter to change data to the metric system. Therefore, you should probably convert your application to display metric values, as shown below.

```
print("Kilometers: " + str((json_data["route"]["distance"])*1.61))
print("Fuel Used (Ltr): " + str((json_data["route"]["fuelUsed"])*3.78))
```

- h. Run the modified **08_json-parse5.py** script to see the following output:

```
Starting Location: Washington
Destination: Baltimore
URL:
https://www.mapquestapi.com/directions/v2/route?key=Your_api_key&to=Baltimore&from=Washington
API Status: 0 = A successful route call.

=====
Directions from Washington to Baltimore
Trip Duration: 00:49:19
Kilometers: 61.32329
Fuel Used (Ltr): 6.236999999999999
=====
Starting Location: q
>>>
```

- i. Use the **"{: .2f} ".format** argument to format the float values to 2 decimal places before converting them to string values, as shown below. Each statement should be on one line.

```
print("Kilometers: " +
str("{: .2f} ".format((json_data["route"]["distance"])*1.61)))
print("Fuel Used (Ltr): " +
str("{: .2f} ".format((json_data["route"]["fuelUsed"])*3.78)))
```

Step 14: Test the parsing and formatting functionality.


Run your **08_json-parse5.py** script to verify that it works. Troubleshoot your code, if necessary. Make sure you have all the proper opening and closing parentheses. You should get output similar to the following:

```
Starting Location: Washington
Destination: Baltimore
URL:
https://www.mapquestapi.com/directions/v2/route?key=Your_api_key&to=Baltimore&from=Washington
API Status: 0 = A successful route call.

=====
Directions from Washington to Baltimore
Trip Duration: 00:49:19
Kilometers: 61.32
Fuel Used (Ltr): 6.24
=====
Starting Location: q
>>>
```

Step 15: Inspect the maneuvers JSON data.

- Now you are ready to display the step-by-step directions from the starting location to the destination. Locate the **legs** list inside the route dictionary. The **legs** list includes one big dictionary with most of the JSON data.
- Find the **maneuvers** list and collapse each of the seven dictionaries inside, as shown below.

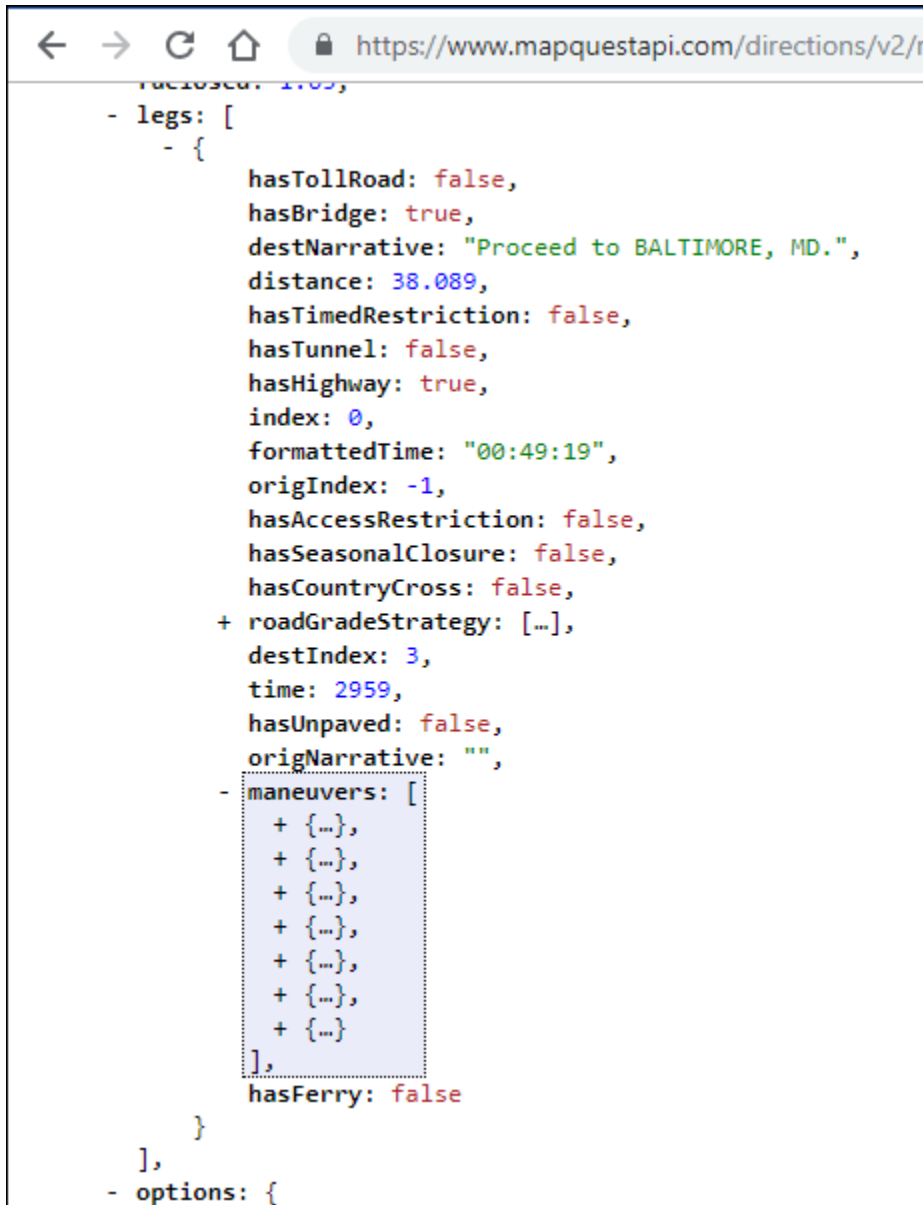

```

- legs: [
  - {
    hasTollRoad: false,
    hasBridge: true,
    destNarrative: "Proceed to BALTIMORE, MD.",
    distance: 38.089,
    hasTimedRestriction: false,
    hasTunnel: false,
    hasHighway: true,
    index: 0,
    formattedTime: "00:49:19",
    origIndex: -1,
    hasAccessRestriction: false,
    hasSeasonalClosure: false,
    hasCountryCross: false,
    + roadGradeStrategy: [...],
    destIndex: 3,
    time: 2959,
    hasUnpaved: false,
    origNarrative: "",
    - maneuvers: [
      + {...},
      + {...},
      + {...},
      + {...},
      + {...},
      + {...},
      + {...},
    ],
    hasFerry: false
  },
],
- options: {

```

- c. Expand the first dictionary in the **maneuvers** list. Each dictionary contains a **narrative** key with a value, such as "Start out going north...", as shown below. You need to parse the JSON data to extract the value for the **narrative** key to display inside your application.



```
time: 2959,
hasUnpaved: false,
origNarrative: "",
- maneuvers: [
  - {
    distance: 0.792,
    - streets: [
      "6th St",
      "US-50 E",
      "US-1 N"
    ],
    narrative: "Start out going north on 6th St",
    turnType: 0,
    - startPoint: {
      lng: -77.019913,
      lat: 38.892063
    },
    index: 0,
    formattedTime: "00:02:05",
    directionName: "North",
    maneuverNotes: [ ],
    linkIds: [ ],
    - signs: [
      - {
```

Step 16: Add a for loop to iterate through the maneuvers JSON data.

Complete the following steps to update your application:

- Save your script as **08_json-parse6.py**.
- Add a **for** loop below the second double line print statement. The **for** loop iterates through each **maneuvers** list and does the following:
 - Prints the **narrative** value.
 - Converts miles to kilometers with ***1.61**.
 - Formats the kilometer value to print only two decimal places with the **"{: .2f} ".format** function.
- Add a print statement that will display a double line before the next request for a starting location, as shown below.

Note: The second double line print statement is not indented within the **for** loop. Therefore, it is part of the previous **if** statement that checks the **statuscode** parameter.

```
print("Fuel Used (Ltr): " + str("{: .2f}".format((json_data["route"]["fuelUsed"])*3.78)))
print("=====")
for each in json_data["route"]["legs"][0]["maneuvers"]:
    print((each["narrative"]) + " (" + str("{: .2f}".format((each["distance"])*1.61) + " km)"))
print("=====\\n")
```

```
C:\Users\usuario\OneDrive\Documentos\programaci-n-de-redes-2023\unidad 2>python parce_json5.py
Starting Location: dolores hidalgo
Destination: guanajuato
Hasta luego
URL: https://www.mapquestapi.com/directions/v2/route?key=XxL9wmf7qb4t0P3QY2uB8UpVwo0TaCHV&from=dolores+hidalgo&to=guanajuato
API Status: 0 = A successful route call.

=====
Directions from dolores hidalgo to guanajuato
Trip Duration: 01:03:13
Miles: 36.2595
=====
Kilometers: 58.38
=====
Head toward Calle México on Calle Querétaro. Go for 0.2 mi. (0.32 km)
Turn left onto Avenida Norte. Go for 0.4 mi. (0.68 km)
Turn right onto Avenida José Alfredo Jiménez. Go for 1.0 mi. (1.68 km)
Turn left onto Libramiento toward Guanajuato/León. Go for 1.8 mi. (2.87 km)
Turn right onto Carretera Guanajuato-Dolores Hidalgo (MEX-110) toward Guanajuato/León/Irapuato. Go for 30.3 mi. (48.73 km)
Turn right onto Calle Subida a Los Filtros. Go for 0.1 mi. (0.19 km)
Turn left toward Carretera Panorámica. Go for 154 ft. (0.05 km)
Take the 1st exit from roundabout onto Carretera Guanajuato-Dolores Hidalgo. Go for 446 ft. (0.14 km)
Continue on Carretera Guanajuato-Dolores Hidalgo toward Guanajuato Centro. Go for 0.2 mi. (0.30 km)
Turn right onto Calzada Alhóndiga. Go for 0.4 mi. (0.67 km)
Take the 1st exit from Calzada Alhóndiga roundabout onto Antigua Calle de Salgado toward Z Centro/León. Go for 492 ft. (0.15 km)
Turn right onto Túnel Miguel Hidalgo. Go for 0.1 mi. (0.17 km)

Turn right onto Túnel Miguel Hidalgo. Go for 0.1 mi. (0.17 km)
Continue on Calle Insurgencia. Go for 161 ft. (0.05 km)
Take the 2nd exit from roundabout onto Avenida Miguel Hidalgo toward Zona de Museos/Presas-Pastita. Go for 361 ft. (0.11 km)
Continue on Túnel Miguel Hidalgo. Go for 0.3 mi. (0.55 km)
Turn left onto Túnel Miguel Hidalgo toward Presa de la Olla/Centro Histórico/Universidad de Guanajuato/Zona Hotelera Centro. Go for 0.3 mi. (0.52 km)
Keep left onto Túnel Miguel Hidalgo. Go for 0.4 mi. (0.67 km)
Turn right onto Avenida Manuel Doblado toward Zona Centro. Go for 253 ft. (0.08 km)
Continue on Calle Cantarranas. Go for 0.2 mi. (0.30 km)
Turn left onto Calle Ayuntamiento. Go for 154 ft. (0.05 km)
Turn right onto Calle Ayuntamiento. Go for 131 ft. (0.04 km)
Turn left onto Calle Ponciano Aguilar. Go for 308 ft. (0.09 km)
Arrive at Calle Ponciano Aguilar. (0.00 km)
=====
```

```

    break
print("Hasta luego ")
main_api = "https://www.mapquestapi.com/directions/v2/route?"
key = "XxL9wmf7qb4t0P3QY2uB8UpVwo0TaCHV"

url = main_api + urllib.parse.urlencode({"key": key, "from":orig, "to":dest})
json_data = requests.get(url).json()

#imprimir la URL
print("URL: " + (url))
json_data = requests.get(url).json()
json_status = json_data["info"]["statuscode"]
if json_status == 0:
    print("API Status: " + str(json_status) + " = A successful route call.\n")
    print("=====")
    print("Directions from " + (orig) + " to " + (dest))
    print("Trip Duration:   " + (json_data["route"]["formattedTime"]))
    print("Miles:           " + str(json_data["route"]["distance"]))
    #print("Fuel Used (Gal): " + str(json_data["route"]["fuelUsed"]))
    print("=====")
    print("Kilometers:        " + str("{:.2f}".format((json_data["route"]["distance"])*1.61)))
    print("=====")
    for each in json_data["route"]["legs"][0]["maneuvers"]:
        print((each["narrative"] + " (" + str("{:.2f}".format((each["distance"])*1.61) + " km)"))
    print("=====\n")
else:
    print("API Status: " + str(json_status) + " = A failuer route call.\n")

```

Step 17: Activity - Test the JSON iteration.

Run your **08_json-parse6.py** script and verify that it works. Troubleshoot your code, if necessary. You should get an output similar to the following:

```

Starting Location: Washington
Destination: Baltimore
URL:
https://www.mapquestapi.com/directions/v2/route?key=Your_api_key&to=Baltimore&from=Was
hington
API Status: 0 = A successful route call.

Directions from Washington to Baltimore
Trip Duration:   00:49:19
Kilometers:      61.32
Fuel Used (Ltr): 6.24
=====
Start out going north on 6th St/US-50 E/US-1 N toward Pennsylvania Ave/US-1 Alt N.
(1.28 km)
Turn right onto New York Ave/US-50 E. Continue to follow US-50 E (Crossing into
Maryland). (7.51 km)
Take the Balt-Wash Parkway exit on the left toward Baltimore. (0.88 km)
Merge onto MD-295 N. (50.38 km)
Turn right onto W Pratt St. (0.86 km)
Turn left onto S Calvert St/MD-2. (0.43 km)
Welcome to BALTIMORE, MD. (0.00 km)

```



```
=====
```

```
Starting Location: q
>>>
```

Step 18: Check for invalid user input.

Now you are ready to add one final feature to your application to report an error when the user enters invalid data. Recall that you started an **if** loop to make sure the returned **statuscode** equals 0 before parsing the JSON data:

```
json_status = json_data["info"]["statuscode"]

if json_status == 0:
    print("API Status: " + str(json_status) + " = A successful route call.\n")
```

- a. But what happens if the **statuscode** is not equal to 0? For example, the user might enter an invalid location or might not enter one or more locations. If so, then the application displays the URL and asks for a new starting location. The user has no idea what happened. Try the following values in your application. You should see results similar to the following:

```
Starting Location: Washington
Destination: Beijing
URL:
https://www.mapquestapi.com/directions/v2/route?to=Beijing&key=your_api_key&from=Washingt
on
Starting Location: Washington
Destination: Balt
URL:
https://www.mapquestapi.com/directions/v2/route?to=Balt&key=your_api_key&from=Washingt
on
Starting Location: Washington
Destination:
URL:
https://www.mapquestapi.com/directions/v2/route?to=&key=your_api_key&from=Washington
Starting Location: q
```

- b. Save your script as **08_jsont-parse7.py**.
- c. To provide error information when this happens, add **elif** and **else** statements to your **if** loop. After the last double line print statement under the **if json_status == 0**, add the following **elif** and **else** statements:

```
for each in json_data["route"]["legs"][0]["maneuvers"]:
    print((each["narrative"]) + " (" +
str("{:.2f}".format((each["distance"])*1.61) + " km"))
    print("=====\n")
elif json_status == 402:
    print("*****")
    print("Status Code: " + str(json_status) + "; Invalid user inputs for one or both
locations.")
    print("*****\n")
else:
    print("*****")
    print("For Status Code: " + str(json_status) + "; Refer to:")
    print("https://developer.mapquest.com/documentation/directions-api/status-codes")
```

```
print("*****\n")
```

The **elif** statement prints if the **statuscode** value is 402 for an invalid location. The **else** statement prints for all other **statuscode** values, such as no entry for one or more locations. The **else** statement ends the **if/else** loop and returns the application to the **while** loop.

Step 19: Activity - Test full application functionality.

Run your **08_json-parse7.py** script and verify that it works. Troubleshoot your code, if necessary. Test all the features of the application. You should get output similar to the following:

```
Starting Location: Washington
Destination: Baltimore
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&from=Washington&to=Baltimore
API Status: 0 = A successful route call.

Directions from Washington to Baltimore
Trip Duration:    00:49:19
Kilometers:      61.32
Fuel Used (Ltr): 6.24
=====
Start out going north on 6th St/US-50 E/US-1 N toward Pennsylvania Ave/US-1 Alt N. (1.28 km)
Turn right onto New York Ave/US-50 E. Continue to follow US-50 E (Crossing into Maryland). (7.51 km)
Take the Balt-Wash Parkway exit on the left toward Baltimore. (0.88 km)
Merge onto MD-295 N. (50.38 km)
Turn right onto W Pratt St. (0.86 km)
Turn left onto S Calvert St/MD-2. (0.43 km)
Welcome to BALTIMORE, MD. (0.00 km)
=====

Starting Location: Moscow
Destination: Beijing
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&from=Moscow&to=Beijing
API Status: 0 = A successful route call.

Directions from Moscow to Beijing
Trip Duration:    84:31:10
Kilometers:      7826.83
Fuel Used (Ltr): 793.20
=====
Start out going west on Кремлёвская набережная/Kremlin Embankment. (0.37 km)
Turn slight right onto ramp. (0.15 km)
Turn slight right onto Воровицкая площадь. (0.23 km)
[output omitted]
Turn left onto 广场东侧路/E. Guangchang Rd. (0.82 km)
广场东侧路/E. Guangchang Rd becomes 东长安街/E. Chang'an Str. (0.19 km)
```

Lab - Parsing JSON with a Python Application

```
Welcome to BEIJING. (0.00 km)
=====

Starting Location: Washington
Destination: Beijing
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&from=WashingtonTurn+right+onto+%E5%89%8D%E9%97%A8%E8%A5%BF%E5%A4%A7%E8%A1%97%2FQianmen+West+Street.+%281.01+km%29&to=Beijing

*****
Status Code: 402; Invalid user inputs for one or both locations.
*****

Starting Location: Washington
Destination: Balt
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&from=Washington&to=Balt

*****
Status Code: 602; Refer to:
https://developer.mapquest.com/documentation/directions-api/status-codes
*****

Starting Location: Washington
Destination:
URL:
https://www.mapquestapi.com/directions/v2/route?key=your_api_key&from=Washington&to=

*****
Status Code: 611; Refer to:
https://developer.mapquest.com/documentation/directions-api/status-codes
*****

Starting Location: q
>>>
```

```
C:\Users\usuario\OneDrive\Documentos\programaci-n-de-redes-2023\unidad 2>python parce_json6.py
Starting Location: san ocote
Destination: guanajuato
Hasta luego
URL: https://www.mapquestapi.com/directions/v2/route?key=XxL9wmf7qb4t0P3QY2uB8UpVwo0TaCHV&from=san+ocote&to=guanajuato
*****
Status Code: 402; Invalid user inputs for one or both locations.
*****
Starting Location:
```

Nombre: Monserrat Orduña Basaldua

...

import urllib.parse

import requests Import "requests" could not be resolved from source

while True:

orig = input("Starting Location: ")

if orig == "quit" or orig == "q":

break

dest = input("Destination: ")

#Agregar condicion para dest

#un mensaje hasta luego

if dest == "quit" or dest == "q":

break

print("Hasta luego ")

main_api = "https://www.mapquestapi.com/directions/v2/route?"

key = "XxL9wmf7qb4t0P3QY2uB8UpVwo0TaCHV"

url = main_api + urllib.parse.urlencode({"key": key, "from": orig, "to": dest})

json_data = requests.get(url).json()

#imprimir la URL

print("URL: " + (url))

if json_status == 0:

print("API Status: " + str(json_status) + " = A successful route call.\n")

print("=====")

print("Directions from " + (orig) + " to " + (dest))

print("Trip Duration: " + (json_data["route"]["formattedTime"]))

print("Miles: " + str(json_data["route"]["distance"]))

#print("Fuel Used (Gal): " + str(json_data["route"]["fuelUsed"]))

print("=====")

print("Kilometers: " + str("{:.2f}".format((json_data["route"]["distance"])*1.61)))

print("=====")

for each in json_data["route"]["legs"][0]["maneuvers"]:

print((each["narrative"]) + " (" + str("{:.2f}".format((each["distance"])*1.61) + " km"))

print("=====\n")

elif json_status == 402:

print("*****")

print("Status Code: " + str(json_status) + "; Invalid user inputs for one or both locations.")

print("*****\n")

else:

print("*****")

print("For Status Code: " + str(json_status) + "; Refer to:")

print("https://developer.mapquest.com/documentation/directions-api/status-codes")

print("*****\n")