
TC ARBITRARY METADATA

Jamal Hadi Salim

Motivation

- P4 calls for ability to produce/consume arbitrary metadata
- Kernel has only global static metadata
- *skb* has no space for more metadata
- Scope is only for tc pipeline

Scope

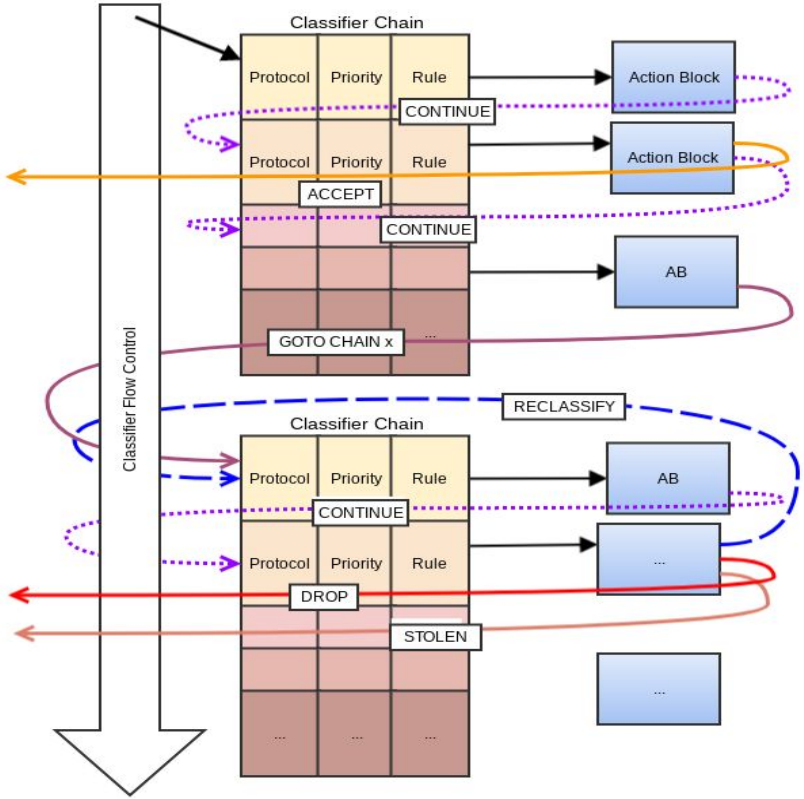


```
struct qdisc_skb_cb {
        unsigned int            pkt_len;
        u16                     slave_dev_queue_mapping;
        u16                     tc_classid;
#define QDISC_CB_PRIV_LEN 20
        unsigned char           data[QDISC_CB_PRIV_LEN];
};
```

Cb struct and Helpers

- Borrow heavily from IFE action
- void *skb_meta_get(skb, metaid)
- int skb_meta_set(skb, metaid, len, void *metaval)