
TDC Update







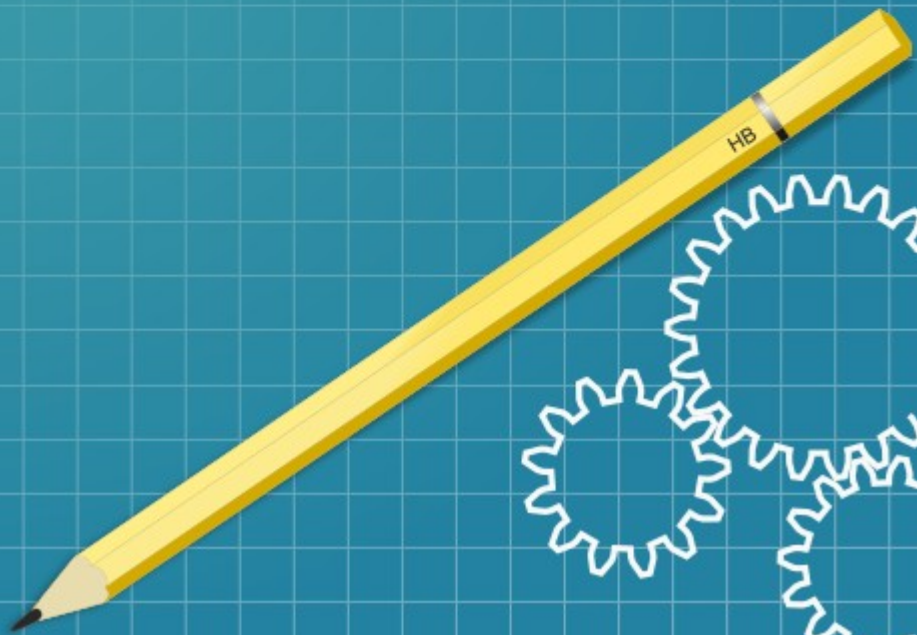

Add tdc to Kselftests

```
diff --git a/tools/testing/selftests/Makefile b/tools/testing/selftests/Makefile
index 1195bd85af38..f4522e0a2cab 100644
--- a/tools/testing/selftests/Makefile
+++ b/tools/testing/selftests/Makefile
@@ -54,6 +54,7 @@ TARGETS += splice
 TARGETS += static_keys
 TARGETS += sync
 TARGETS += sysctl
+TARGETS += tc-testing
 TARGETS += timens
```

- Work was done to align with requirements outlined by Shuah Khan* and to comply with kselftest documentation.
- Goal is to make traffic control testing available to developers testing for regressions.
- Increase awareness of tdc, encourage contribution of new test cases.
- Opportunity to be run by bigger CI projects.

* link to discussion: https://lkml.org/lkml/2020/2/27/2221

Makefile

```
# SPDX-License-Identifier: GPL-2.0

top_srcdir = $(abspath ../../../..)
APIDIR := $(top_scrdir)/include/uapi
TEST_GEN_FILES = action.o

KSFT_KHDR_INSTALL := 1
include ../lib.mk

CLANG ?= clang
LLC   ?= llc
PROBE := $(shell $(LLC) -march=bpf -mcpu=probe -filetype=null /dev/null 2>&1)

ifeq ($(PROBE),)
  CPU ?= probe
else
  CPU ?= generic
endif

CLANG_SYS_INCLUDES := $(shell $(CLANG) -v -E - </dev/null 2>&1 \
        | sed -n '/<...> search starts here:/,/End of search list./{ s| \(/.*\)|-idirafter \1|p }')

CLANG_FLAGS = -I. -I$(APIDIR) \
              $(CLANG_SYS_INCLUDES) \
              -Wno-compare-distinct-pointer-types

$(OUTPUT)/%.o: %.c
        $(CLANG) $(CLANG_FLAGS) \
                 -O2 -target bpf -emit-llvm -c $< -o - |      \
        $(LLC) -march=bpf -mcpu=$(CPU) $(LLC_FLAGS) -filetype=obj -o $@

TEST_PROGS += ./tdc.sh
TEST_FILES := tdc*.py Tdc*.py plugins plugin-lib tc-tests
```


Wrapper Script

```
1 #!/bin/sh
2 # SPDX-License-Identifier: GPL-2.0
3
4 ./tdc.py -c actions --nobuildebpf
5 ./tdc.py -c qdisc
```

-
-

Future Goals

-



This work is licensed under a Creative Commons Attribution-ShareAlike 3.0 Unported License.
It makes use of the works of Mateus Machado Luna.