PAR Laboratory Assignment

Lab 4: Parallel Task Decomposition
Implementation and Analysis

Oriol Valencia

Eduardo Hernández

Universitat Politècnica de Catalunya

Departament d'Arquitectura de Computadors

Spring 2025–2026

Contents

1 Iterative Task Decomposition **2**
1.1 Iterative: Tile Task Decomposition . . . 2
1.1.1 Implementation . . . 2
1.1.2 Modelfactor Analysis . . . 3
1.1.3 Paraver Analysis . . . 3
1.1.4 Strong Scalability . . . 3
1.2 Iterative: Fine Grain Task Decomposition . . . 4
1.2.1 Implementation . . . 4
1.2.2 Modelfactor Analysis . . . 5
1.2.3 Paraver Analysis . . . 5
1.2.4 Strong Scalability . . . 5

2 Recursive Task Decomposition **6**
2.1 Recursive: Leaf Task Decomposition . . . 6
2.1.1 Implementation . . . 6
2.1.2 Modelfactor Analysis . . . 7
2.1.3 Paraver Analysis . . . 9
2.1.4 Strong Scalability . . . 10
2.2 Recursive: Improved Leaf Task Decomposition . . . 11
2.2.1 Implementation . . . 11
2.2.2 Modelfactor Analysis . . . 12
2.2.3 Paraver Analysis . . . 12
2.2.4 Strong Scalability . . . 13
2.3 Recursive: Tree Task Decomposition . . . 14
2.3.1 Implementation . . . 14
2.3.2 Modelfactor Analysis . . . 15
2.3.3 Paraver Analysis . . . 16
2.3.4 Strong Scalability . . . 17

A Final Comparison Between All Parallel Strategies **18**
A.1 Summary of Elapsed Execution Times . . . 18
A.2 Best Implementation Discussion . . . 18

Chapter 1

Iterative Task Decomposition

1.1 Iterative: Tile Task Decomposition

1.1.1 Implementation

The **original tile iterative** strategy maps the $ROWS \times COLS$ image onto a grid of square tiles of size $TILE \times TILE$ pixels. The outer double loop iterates over tile origins with stride `TILE`; each iteration body is wrapped in a single `#pragma omp task`, so all tiles are eligible for parallel execution. The task takes `x` and `y` as `firstprivate` to avoid the data-race that would arise if the loop variables were shared across concurrently executing tasks.

The parallel region is opened with `#pragma omp parallel` followed immediately by `#pragma omp single`, so only one thread generates the tasks while all others are available to execute them.

```
#pragma omp parallel
#pragma omp single
for (int y = 0; y < ROWS; y += TILE)
    for (int x = 0; x < COLS; x += TILE) {
        #pragma omp task firstprivate(x, y)
        {
            int equal = 1;
            // --- Check vertical TILE borders ---
            int ref = pixel_dwell(..., x, y, ...);
            for (int py = y; py < y + TILE; py++) {
                M[py][x]          = pixel_dwell(..., x,          py, ...);
                M[py][x+TILE-1]   = pixel_dwell(..., x+TILE-1,  py, ...);
                equal &= (ref == M[py][x]);
                equal &= (ref == M[py][x+TILE-1]);
            }
            // --- Check horizontal TILE borders ---
            for (int px = x; px < x + TILE; px++) {
                M[y][px]          = pixel_dwell(..., px, y, ...);
                M[y+TILE-1][px]   = pixel_dwell(..., px, y+TILE-1, ...);
                equal &= (ref == M[y][px]);
                equal &= (ref == M[y+TILE-1][px]);
            }
            if (equal) {
                fill_tile(M, y, x, TILE, M[y][x]);   // uniform colour
```

```
            } else {
                compute_tile(M, y, x, TILE, ...);      // full computation
            }
        }
    }
```

Listing 1.1: Key parallel section of `mandel-omp-iter.c` (Tile strategy).

Dependencies and data-sharing between tasks are avoided by construction: each task writes only to the memory region $[y, y + TILE) \times [x, x + TILE)$, which is disjoint from every other task's region. Histogram updates use `#pragma omp atomic` to protect the shared counter array.

1.1.2 Modelfactor Analysis

Insert Modelfactors table for `mandel-omp-iter` (16 threads) and identify the main bottlenecks (e.g. scheduling overhead, load imbalance, synchronisation).

1.1.3 Paraver Analysis

Insert Paraver screenshots (16 threads) and comment on the task creation pattern, load distribution, and any visible idle periods.

1.1.4 Strong Scalability

Insert the strong scalability (speedup vs. number of threads) plot for `mandel-omp-iter` and explain the observed trend.

1.2 Iterative: Fine Grain Task Decomposition

1.2.1 Implementation

The **fine grain iterative** strategy extends the Tile version by exploiting the additional parallelism that exists *inside* each tile. Rather than completing the border check and fill/compute sequentially within each tile task, the fine grain version exposes three independent sub-tasks per tile:

1. A task that computes the *vertical* borders of the tile (left and right columns), setting `eV`.
2. A task that computes the *horizontal* borders (top and bottom rows, including all four corners), setting `eH`.
3. A task (spawned after `#pragma omp taskgroup` ensures both border tasks have finished) that either fills the tile uniformly or, in the non-uniform case, spawns one child task per row to compute all interior pixels.

The outer tile task from the Tile version is **kept** as a wrapper; the three inner tasks are created inside it.

```
#pragma omp parallel
#pragma omp single
for (int y = 0; y < ROWS; y += TILE)
    for (int x = 0; x < COLS; x += TILE) {
        #pragma omp task firstprivate(x, y)
        {
            int eV, eH;

            #pragma omp taskgroup
            {
                // Task 1: vertical borders (left & right columns)
                #pragma omp task shared(eV)
                {
                    eV = 1;
                    int ref = pixel_dwell(..., x, y, ...);
                    for (int py = y; py < y + TILE; py++) {
                        M[py][x]         = pixel_dwell(..., x, py, ...);
                        M[py][x+TILE-1] = pixel_dwell(..., x+TILE-1, py, ...);
                        eV &= (ref == M[py][x]);
                        eV &= (ref == M[py][x+TILE-1]);
                    }
                }
                // Task 2: horizontal borders (top & bottom rows)
                #pragma omp task shared(eH)
                {
                    eH = 1;
                    for (int px = x; px < x + TILE; px++) {
                        M[y][px]         = pixel_dwell(..., px, y, ...);
                        M[y+TILE-1][px] = pixel_dwell(..., px, y+TILE-1, ...);
                        eH &= (M[y][x] == M[y][px]);
```

```
                        eH &= (M[y][x] == M[y+TILE-1][px]);
                    }
                }
            } // implicit taskwait -- eH and eV are ready here

            // Task 3: fill or compute (spawns per-row child tasks)
            #pragma omp task
            {
                if (eH & eV) {                          // uniform tile
                    for (int py = y; py < y + TILE; py++)
                        #pragma omp task
                        fill_row(M, py, x, TILE, M[y][x], ...);
                } else {                                // non-uniform tile
                    for (int py = y; py < y + TILE; py++)
                        #pragma omp task
                        compute_row(M, py, x, TILE, ...);
                }
            }
        }
    }
```

Listing 1.2: Key parallel section of `fine-grain.c` – inner tasks for each tile.

The `#pragma omp taskgroup` enforces that the result tasks begin only after *both* border tasks complete, because the fill/compute decision depends on `eV` and `eH`. Histogram increments remain protected by `#pragma omp atomic`. Display updates use `#pragma omp critical` to serialize X11 calls.

Comparison with Iterative Tile. The Tile version creates $\left(ROWS/TILE\right)^2$ tasks in total. The Fine Grain version creates up to $3 + 2 \cdot TILE$ tasks *per tile*, increasing the task count by roughly $2 \cdot TILE$ fold. This exposes more parallelism at the cost of higher task-creation and synchronisation overhead; whether the trade-off is beneficial depends on tile size and thread count.

1.2.2 Modelfactor Analysis

Insert Modelfactors table for `fine-grain` (16 threads). Compare with Iterative Tile: does finer granularity improve useful parallelism or does scheduling overhead dominate?

1.2.3 Paraver Analysis

Insert Paraver screenshots (16 threads) for Fine Grain and compare with the Tile trace. Comment on whether the extra tasks reduce idle time or introduce additional overhead.

1.2.4 Strong Scalability

Insert the strong scalability plot for Fine Grain and compare with the Tile speedup curve. Discuss whether additional task granularity improves or hurts scalability at high thread counts.

Chapter 2

Recursive Task Decomposition

2.1 Recursive: Leaf Task Decomposition

2.1.1 Implementation

The **leaf recursive** strategy implements the Mandelbrot computation through a divide-and-conquer quadtree recursion. Starting from the full $ROWS \times COLS$ matrix, each call to `mandel_tiled_rec` inspects the four borders of its sub-tile:

- If all border pixels share the same iteration count (`equal = 1`), the entire sub-tile is filled with that value via a **leaf task**.
- If the sub-tile is at or below the minimum tile size (`NCols <= TILE`), all interior pixels are computed individually via a **leaf task**.
- Otherwise the sub-tile is split into four quadrants (or two halves when only columns remain to be halved) and `mandel_tiled_rec` is called recursively for each quadrant – *sequentially*, with no task at the recursive call sites.

Tasks are therefore created only at the *leaves* of the recursion tree.

```
#pragma omp parallel
#pragma omp single
mandel_tiled_rec(M, ROWS, COLS, 0, 0, ...);

// Inside mandel_tiled_rec:
void mandel_tiled_rec(int M[][COLS], int NRows, int NCols,
                      int start_fil, int start_col, ...)
{
    int non_first_call = (NRows != ROWS) | (NCols != COLS);
    int equal = non_first_call;
    // ... compute borders, update equal ...

    if (equal) {
        // Leaf task: fill uniform sub-tile
        #pragma omp task
        {
            for (int py = y; py < y + NRows; py++)
                for (int px = x; px < x + NCols; px++) {
                    M[py][px] = M[y][x];
                    // display / histogram ...
                }
```

```
        }
    } else if (NCols <= TILE) {
        // Leaf task: compute smallest sub-tile
        #pragma omp task firstprivate(y, x)
        {
            for (int py = y; py < y + NRows; py++)
                for (int px = x; px < x + NCols; px++) {
                    M[py][px] = pixel_dwell(...);
                    // histogram / display ...
                }
        }
    } else {
        // Recurse into four quadrants (no task here -- leaf strategy)
        if (NRows > TILE) {
            mandel_tiled_rec(M, NRows/2, NCols/2, y,          x,
                        ...);
            mandel_tiled_rec(M, NRows/2, NCols/2, y+NRows/2,  x,
                        ...);
            mandel_tiled_rec(M, NRows/2, NCols/2, y,
               x+NCols/2,  ...);
            mandel_tiled_rec(M, NRows/2, NCols/2, y+NRows/2,
               x+NCols/2,  ...);
        } else {
            mandel_tiled_rec(M, NRows,   NCols/2, y, x,          ...);
            mandel_tiled_rec(M, NRows,   NCols/2, y, x+NCols/2,  ...);
        }
    }
}
```

Listing 2.1: Key parallel section of `mandel-omp-rec(1).c` – leaf tasks.

Because the recursive calls are sequential, only one thread walks the tree and generates leaf tasks; all other threads execute those tasks. Data races are avoided: each leaf task writes an exclusive region of `M`. Shared histogram updates use `#pragma omp atomic`.

Limitation. With the leaf strategy, task creation is inherently *serial* – only the thread executing the single region can recurse and spawn. This means that at the start of execution, while the tree is being traversed, most threads remain idle waiting for tasks. The Improved Leaf version (Section 2.2) addresses this bottleneck.

2.1.2 Modelfactor Analysis

Overview of whole program execution metrics										
Number of threads	1	2	4	8	12	16	20	24	28	32
Elapsed time (sec)	1.83	1.41	1.41	1.41	1.41	1.41	1.41	1.41	1.41	1.41
Speedup	1.00	1.30	1.30	1.30	1.30	1.30	1.30	1.29	1.29	1.30
Efficiency	1.00	0.65	0.32	0.16	0.11	0.08	0.06	0.05	0.05	0.04

Figure 2.1: Model factor 1 (Leaf).

Overview of the Efficiency metrics in parallel fraction, ϕ=99.98%										
Number of threads	1	2	4	8	12	16	20	24	28	32
Global efficiency	99.96%	64.92%	32.43%	16.21%	10.80%	8.10%	6.47%	5.39%	4.62%	4.05%
Parallelization strategy efficiency	99.96%	65.00%	32.52%	16.27%	10.86%	8.16%	6.54%	5.47%	4.70%	4.13%
Load balancing	100.00%	65.18%	32.63%	16.33%	10.90%	8.19%	6.57%	5.49%	4.72%	4.15%
In execution efficiency	99.96%	99.74%	99.68%	99.65%	99.61%	99.62%	99.59%	99.62%	99.60%	99.53%
Scalability for computation tasks	100.00%	99.87%	99.71%	99.62%	99.42%	99.26%	98.95%	98.63%	98.41%	98.05%
IPC scalability	100.00%	99.85%	99.77%	99.76%	99.73%	99.72%	99.73%	99.72%	99.70%	99.74%
Instruction scalability	100.00%	100.07%	100.07%	100.06%	100.06%	100.06%	100.06%	100.06%	100.06%	100.06%
Frequency scalability	100.00%	99.95%	99.88%	99.79%	99.62%	99.48%	99.16%	98.85%	98.65%	98.25%

Figure 2.2: Model factor 2 (Leaf).

Statistics about explicit tasks in parallel fraction										
Number of threads	1	2	4	8	12	16	20	24	28	32
Number of explicit tasks executed (total)	3013.0	3013.0	3013.0	3013.0	3013.0	3013.0	3013.0	3013.0	3013.0	3013.0
LB (number of explicit tasks executed)	1.0	0.54	0.71	0.85	0.8	0.79	0.79	0.79	0.76	0.8
LB (time executing explicit tasks)	1.0	0.5	0.65	0.82	0.76	0.62	0.69	0.56	0.52	0.46
Time per explicit task (average us)	141.33	141.85	142.05	142.14	142.12	142.04	142.13	142.14	142.18	142.13
Overhead per explicit task (synch %)	0.0	229.79	887.45	2202.34	3519.47	4839.37	6154.17	7471.72	8783.98	10094.43
Overhead per explicit task (sched %)	0.18	0.68	0.75	0.81	0.77	0.79	0.79	0.78	0.78	0.82
Number of taskwait/taskgroup (total)	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0

Figure 2.3: Model factor 3 (Leaf).

A la primera de les taules podem veure diversos aspectes que ens reflecteixen que no serà una implementació "molt bona". Veiem que l'Elapsed time, no baixa a partir de l'execució amb 2 threads amb un valor de 1.41 s, i que el Speedup no millora a partir de 2 threads, mantenint-se al voltant de 1.3. Això es veu reflectit en una eficiència molt baixa.
Això es deu a què el coll d'ampolla en aquest cas és la creació de tasques, que es fa de manera serial, i això provoca que la resta de threads estiguin inactius durant aquest procés. Per tant una execució amb 2 threads ja és suficient per mantenir ocupat el thread que crea les tasques i un altre que les executa, i afegir més threads no aporta cap millora.
Veiem a la taula 2 que el load balancing no es bo. Amb 2 threads és de 65% i cau fins al 4.15%, reduint-se a la meitar al duplicar el nombre de threads. Això es deu a la desigualtat en la creació de tasques, i a què hi ha tasques que tenen més cost que d'altres, els tiles de l'interior, i això provoca desequilibris.
De la tercera taula es destaca el nombre de tasques executades, que és 3013. Es compararà amb el nombre de tasques creat en altres apartats.

2.1.3 Paraver Analysis

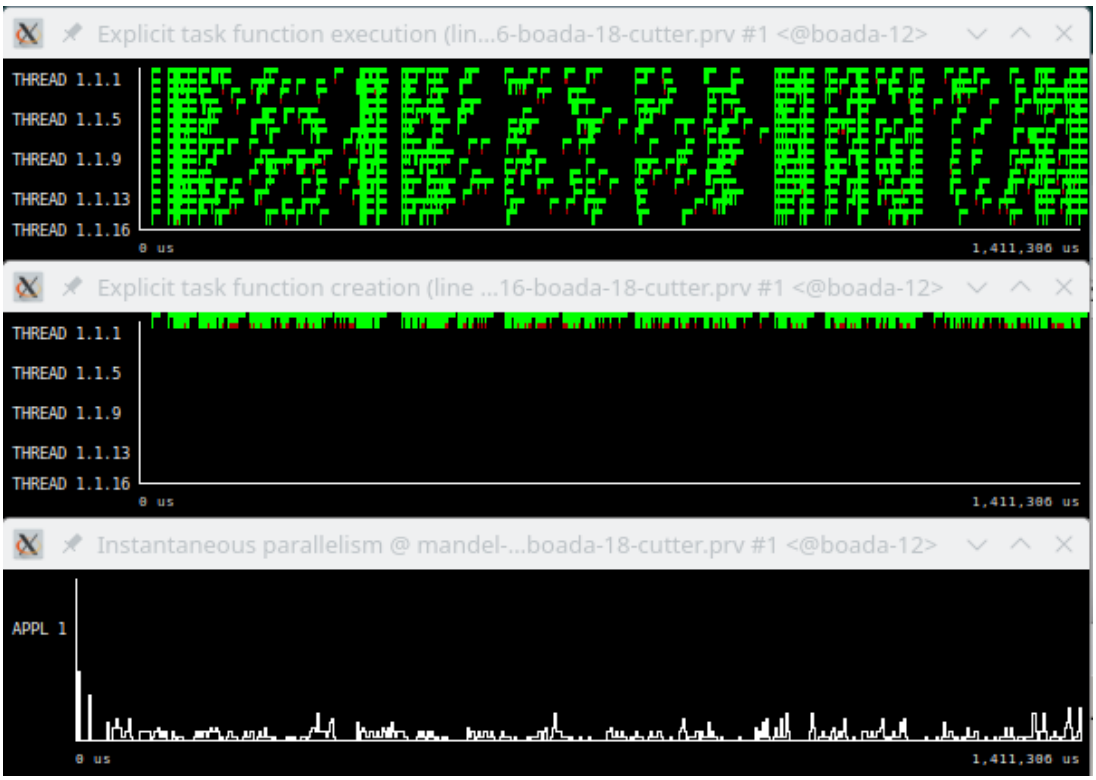

Figure 2.4: Paraver trace for Recursive Leaf (16 threads): task creation and useful parallelism.

A les traces obtingudes de Paraver, es pot observar, d'una banda, que la creació de tasques es fa únicament en un fil, i que la resta de fils es mantenen inactius fins que aquestes tasques es creen i s'assignen. Això es concorde amb l'anàlisi fet a la pràctica 3, on es va observar un desequilibri de càrrega entre la creació de tasques i la seva execució. Podem veure però, que a l'hora de l'execució de les tasques, els 16 threads es mantenen actius, el que indica que la paralelització a nivell de tasques és efectiva un cop les tasques han estat creades. A la tercera traça, es reflexa que el pararelisme és molt irregular, amb períodes de paralelisme útils seguits de períodes d'inactivitat. Això es deu a què, d'una banda a l'estratègia leaf no es creen totes les tasques a l'hora, i hi ha moments on no hi ha tasques disponibles per executar. D'altra banda, hi ha tasques que tenen més cost que d'altres, els tiles de l'interior, i això també provoca desequilibris. Tot això reflexa la baixa eficiència del model de tasques en aquesta implementació, ja que 15 dels 16 threads estan inactius durant la creació de tasques i només es mantenen ocupats una vegada que les tasques han estat creades, i ho fan de manera irregular.

2.1.4 Strong Scalability

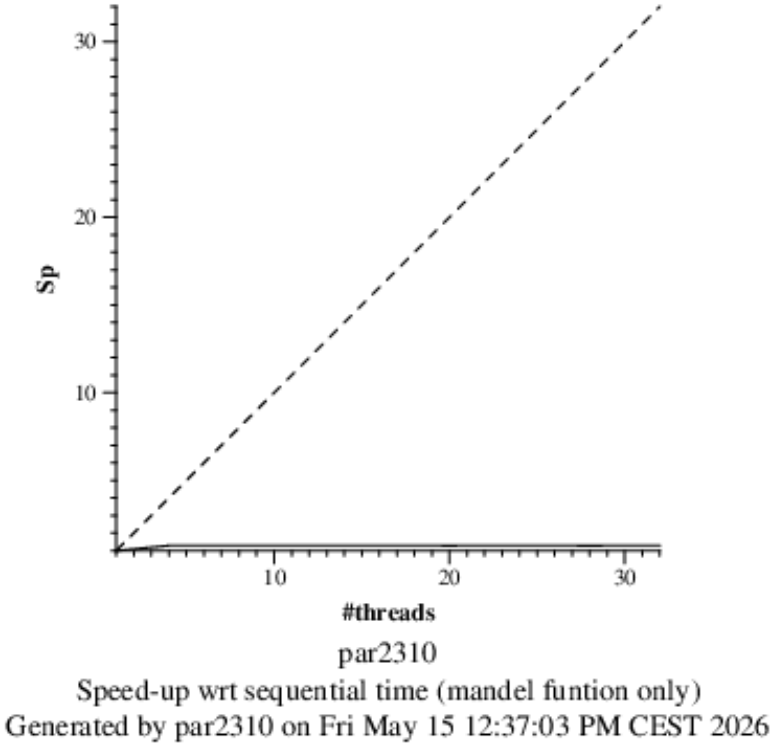

Figure 2.5: Strong scalability (elapsed time vs. threads) for the Recursive Leaf implementation.

De la figura prèvia en podem analitzar que l'increment de l'SpeedUp en relació al nombre de threads és nul, com ja haviem vist amb les taules modelfactor. Si que hi ha un increment de l'SpeedUp quan es passa de 1 a 2 threads, però a partir d'aquí no hi ha cap millora, mantenint-se al voltant de 1.3.

2.2 Recursive: Improved Leaf Task Decomposition

2.2.1 Implementation

The **improved leaf** version addresses the main bottleneck of the plain leaf strategy: serial task generation. In the leaf version, the entire recursion is driven by a single thread, so threads sit idle until enough leaf tasks have accumulated. The improvement introduces a *depth cutoff* parameter `d` (initialised to `0` at the top-level call) and a compile-time constant `CUTOFF`.

- When the current recursion depth satisfies `d` $<$ `CUTOFF`, each recursive quadrant call is wrapped in a `#pragma omp task`, allowing multiple threads to explore different branches of the recursion tree *concurrently*.
- When `d` $\geq$ `CUTOFF`, the recursive calls are sequential again, cutting off task proliferation at deep levels where the overhead would dominate.
- Leaf tasks (fill or compute) are only spawned when `d` $\leq$ `CUTOFF`; beyond the cutoff they run inline to avoid the overhead of tiny tasks.

The value `CUTOFF = 16` was chosen empirically so that the number of tasks at the cutoff level matches or exceeds the number of available threads.

```c
#define CUTOFF 16

void mandel_tiled_rec(int M[][COLS], int NRows, int NCols,
                      int start_fil, int start_col, ..., int d)
{
    // ... border check, equal computation (unchanged) ...

    if (equal) {
        if (d <= CUTOFF) {
            #pragma omp task firstprivate(y, x, NRows, NCols)
            { /* fill uniform sub-tile */ }
        } else {
            /* fill inline -- avoid task overhead at deep levels */
        }
    } else if (NCols <= TILE) {
        if (d <= CUTOFF) {
            #pragma omp task firstprivate(y, x, NRows, NCols)
            { /* compute leaf sub-tile */ }
        } else {
            /* compute inline */
        }
    } else {
        #pragma omp taskgroup
        {
            if (NRows > TILE) {
                if (d < CUTOFF) {
                    /* tasks for all four quadrants */
                    #pragma omp task firstprivate(NRows, NCols,
                        start_fil, start_col, d)
                    mandel_tiled_rec(M, NRows/2, NCols/2, start_fil,
                                     start_col,          ..., d+1);
                    #pragma omp task firstprivate(NRows, NCols,
                        start_fil, start_col, d)
```

```
                    mandel_tiled_rec(M, NRows/2, NCols/2, start_fil+NRows/2, start_col,          ..., d+1);
                    #pragma omp task firstprivate(NRows, NCols, start_fil, start_col, d)
                    mandel_tiled_rec(M, NRows/2, NCols/2, start_fil,
                                start_col+NCols/2, ..., d+1);
                    #pragma omp task firstprivate(NRows, NCols, start_fil, start_col, d)
                    mandel_tiled_rec(M, NRows/2, NCols/2, start_fil+NRows/2, start_col+NCols/2, ..., d+1);
                } else {
                    /* sequential -- beyond cutoff */
                    mandel_tiled_rec(M, NRows/2, NCols/2, start_fil,
                                start_col,          ..., d+1);
                    mandel_tiled_rec(M, NRows/2, NCols/2, start_fil+NRows/2, start_col,          ..., d+1);
                    mandel_tiled_rec(M, NRows/2, NCols/2, start_fil,
                                start_col+NCols/2, ..., d+1);
                    mandel_tiled_rec(M, NRows/2, NCols/2, start_fil+NRows/2, start_col+NCols/2, ..., d+1);
                }
            } else {
                /* similar for column-only split */
            }
        }
    }
}
```

Listing 2.2: Key changes in the Improved Leaf version (depth-cutoff mechanism).

The `#pragma omp taskgroup` ensures that all four quadrant tasks (and their descendants) finish before control returns to the caller, preserving the border-read correctness that the leaf version relies on.

Improvements over plain Leaf.

- Multiple threads now explore the recursion tree in parallel down to depth `CUTOFF`, eliminating the serial task-generation bottleneck.
- Tasks beyond `CUTOFF` run sequentially, avoiding excessive fine-grained task overhead at the bottom of the tree.
- The result is speedups larger than 2× for more than 2 threads.

2.2.2 Modelfactor Analysis

Insert Modelfactors table for Improved Leaf (16 threads). Compare with the plain Leaf table (Section 2.1.2): has the useful computation fraction increased? Has scheduling overhead decreased?

2.2.3 Paraver Analysis

Insert Paraver screenshots (16 threads) for Improved Leaf. Include both the non-improved and the improved traces for direct comparison.

2.2.4 Strong Scalability

Insert the strong scalability plot for Improved Leaf and compare with plain Leaf. Confirm that speedups larger than 2× are achieved for more than 2 threads.

2.3 Recursive: Tree Task Decomposition

2.3.1 Implementation

The **tree recursive** strategy removes the leaf restriction entirely: tasks are created at *every* level of the recursion tree, not only at the leaves. Every recursive quadrant call becomes a task, so the task graph mirrors the full quadtree structure of the computation.

In the implementation used here (`mandel-omp-rec(2).c`), the tree strategy shares the same depth-cutoff infrastructure as the Improved Leaf version. The crucial difference is that task creation at *internal* nodes (the recursive calls) is enabled throughout the upper portion of the tree ($d <$ `CUTOFF`), and leaf tasks are also created in this region ($d \leq$ `CUTOFF`). Below the cutoff depth, both recursive and leaf calls revert to inline execution to control total task count.

```c
#define CUTOFF 16

void mandel_tiled_rec(int M[][COLS], int NRows, int NCols,
                      int start_fil, int start_col, ..., int d)
{
    // ... border check (unchanged) ...

    if (equal) {
        if (d <= CUTOFF) {
            #pragma omp task firstprivate(y, x, NRows, NCols)
            { /* fill uniform sub-tile */ }
        } else {
            /* inline fill */
        }
    } else if (NCols <= TILE) {
        if (d <= CUTOFF) {
            #pragma omp task firstprivate(y, x, NRows, NCols)
            { /* compute leaf sub-tile */ }
        } else {
            /* inline compute */
        }
    } else {
        // Internal node: tasks for each quadrant (tree strategy)
        #pragma omp taskgroup
        {
            if (NRows > TILE) {
                if (d < CUTOFF) {
                    // Four tasks -- parallel tree expansion
                    #pragma omp task firstprivate(NRows, NCols, start_fil, start_col, d)
                    mandel_tiled_rec(M, NRows/2, NCols/2,
                                     start_fil,         start_col,
                                                   ..., d+1);
                    #pragma omp task firstprivate(NRows, NCols, start_fil, start_col, d)
                    mandel_tiled_rec(M, NRows/2, NCols/2,
                                     start_fil+NRows/2, start_col,
                                                   ..., d+1);
                    #pragma omp task firstprivate(NRows, NCols, start_fil, start_col, d)
                    mandel_tiled_rec(M, NRows/2, NCols/2,
                                     start_fil,
                                        start_col+NCols/2, ..., d+1);
```

```
                    #pragma omp task firstprivate(NRows, NCols, start_fil, start_col, d)
                    mandel_tiled_rec(M, NRows/2, NCols/2,
                                     start_fil+NRows/2, start_col+NCols/2, ..., d+1);
                } else {
                    // Sequential beyond cutoff
                    mandel_tiled_rec(M, NRows/2, NCols/2,
                                     start_fil, start_col, ..., d+1);
                    mandel_tiled_rec(M, NRows/2, NCols/2,
                                     start_fil+NRows/2, start_col, ..., d+1);
                    mandel_tiled_rec(M, NRows/2, NCols/2,
                                     start_fil, start_col+NCols/2, ..., d+1);
                    mandel_tiled_rec(M, NRows/2, NCols/2,
                                     start_fil+NRows/2, start_col+NCols/2, ..., d+1);
                }
            } else {
                /* Similar two-way split for column-only case */
            }
        }
    }
}
```

Listing 2.3: Tree recursive version – task creation at internal nodes.

The `#pragma omp taskgroup` at each internal node enforces that all four child tasks (and their entire subtrees) complete before the enclosing task terminates, preserving the sequential semantics of the recursion.

Comparison with Improved Leaf. Both versions use the same cutoff mechanism; the only semantic difference is that the Tree version exposes quadrant-level parallelism from the very first recursion level ($d = 0$), giving all threads work to do immediately. In contrast, the Improved Leaf version also does this (because it too uses tasks at internal nodes when $d <$ `CUTOFF`); the distinction lies in the definition of "leaf": in the Tree version, *every* node with children is an internal task node, whereas the Improved Leaf restricts task creation to a shallower region. In practice, with `CUTOFF = 16`, both versions create tasks up to the same depth.

2.3.2 Modelfactor Analysis

Overview of whole program execution metrics										
Number of threads	1	2	4	8	12	16	20	24	28	32
Elapsed time (sec)	1.84	0.93	0.48	0.26	0.19	0.15	0.13	0.12	0.11	0.10
Speedup	1.00	1.97	3.84	7.13	9.81	11.98	13.80	15.47	16.73	17.93
Efficiency	1.00	0.99	0.96	0.89	0.82	0.75	0.69	0.64	0.60	0.56

Figure 2.6: Model factor 1 (Tree).

Overview of the Efficiency metrics in parallel fraction, ϕ=99.98%										
Number of threads	1	2	4	8	12	16	20	24	28	32
Global efficiency	99.71%	98.26%	95.72%	88.98%	81.63%	74.82%	68.98%	64.42%	59.75%	55.98%
Parallelization strategy efficiency	99.71%	98.31%	95.79%	89.22%	82.09%	75.48%	69.88%	65.44%	60.91%	57.28%
Load balancing	100.00%	99.10%	97.45%	96.51%	91.50%	82.02%	81.81%	86.48%	74.19%	81.63%
In execution efficiency	99.71%	99.20%	98.30%	92.45%	89.72%	92.03%	85.42%	75.66%	82.10%	70.17%
Scalability for computation tasks	100.00%	99.96%	99.92%	99.73%	99.44%	99.12%	98.70%	98.45%	98.09%	97.72%
IPC scalability	100.00%	99.82%	99.80%	99.67%	99.54%	99.40%	99.34%	99.32%	99.36%	99.28%
Instruction scalability	100.00%	100.26%	100.27%	100.26%	100.26%	100.26%	100.26%	100.26%	100.26%	100.26%
Frequency scalability	100.00%	99.87%	99.86%	99.79%	99.64%	99.46%	99.09%	98.87%	98.47%	98.17%

Figure 2.7: Model factor 2 (Tree).

Statistics about explicit tasks in parallel fraction										
Number of threads	1	2	4	8	12	16	20	24	28	32
Number of explicit tasks executed (total)	12050.0	12050.0	12050.0	12050.0	12050.0	12050.0	12050.0	12050.0	12050.0	12050.0
LB (number of explicit tasks executed)	1.0	0.99	0.59	0.39	0.55	0.62	0.56	0.44	0.61	0.53
LB (time executing explicit tasks)	1.0	0.99	0.94	0.89	0.85	0.74	0.76	0.72	0.71	0.8
Time per explicit task (average us)	116.84	117.34	117.39	119.07	120.35	123.75	125.03	127.22	129.82	131.84
Overhead per explicit task (synch %)	0.18	1.96	5.27	14.52	25.25	35.8	47.74	55.7	65.04	76.19
Overhead per explicit task (sched %)	0.19	0.24	0.27	0.52	1.45	2.77	4.01	5.44	7.31	8.65
Number of taskwait/taskgroup (total)	4017.0	4017.0	4017.0	4017.0	4017.0	4017.0	4017.0	4017.0	4017.0	4017.0

Figure 2.8: Model factor 3 (Tree).

2.3.3 Paraver Analysis

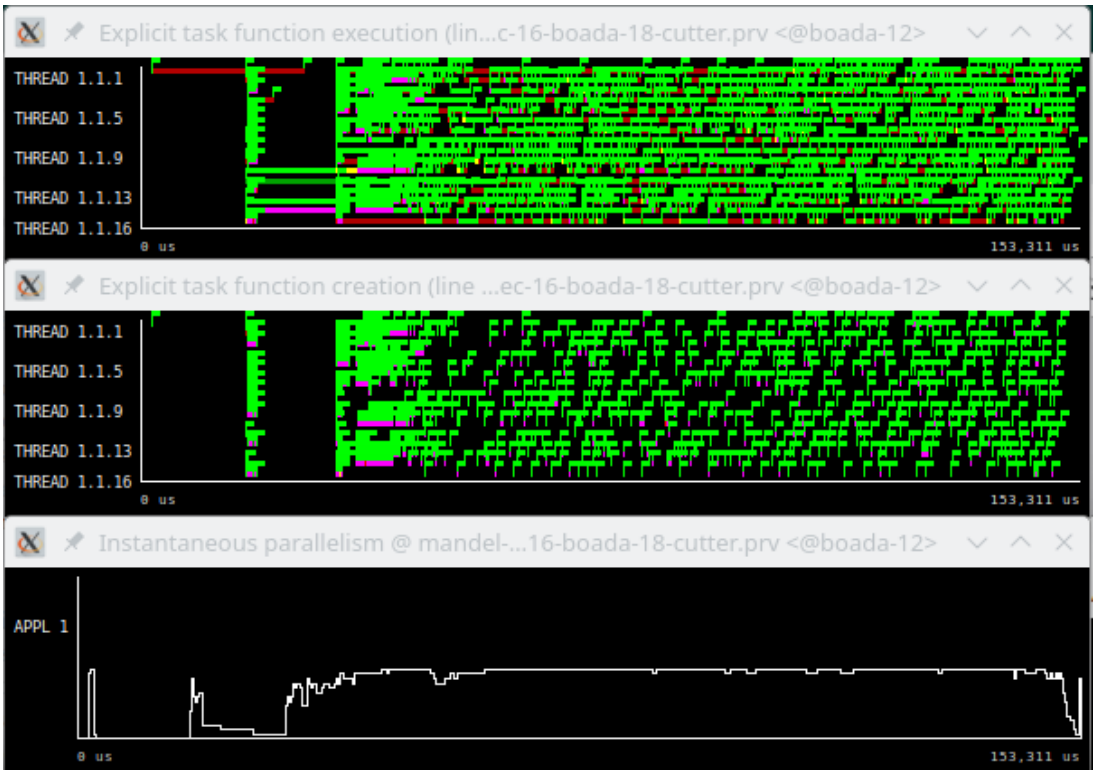

Figure 2.9: Paraver trace for Recursive Tree (16 threads): task density and execution.

2.3.4 Strong Scalability

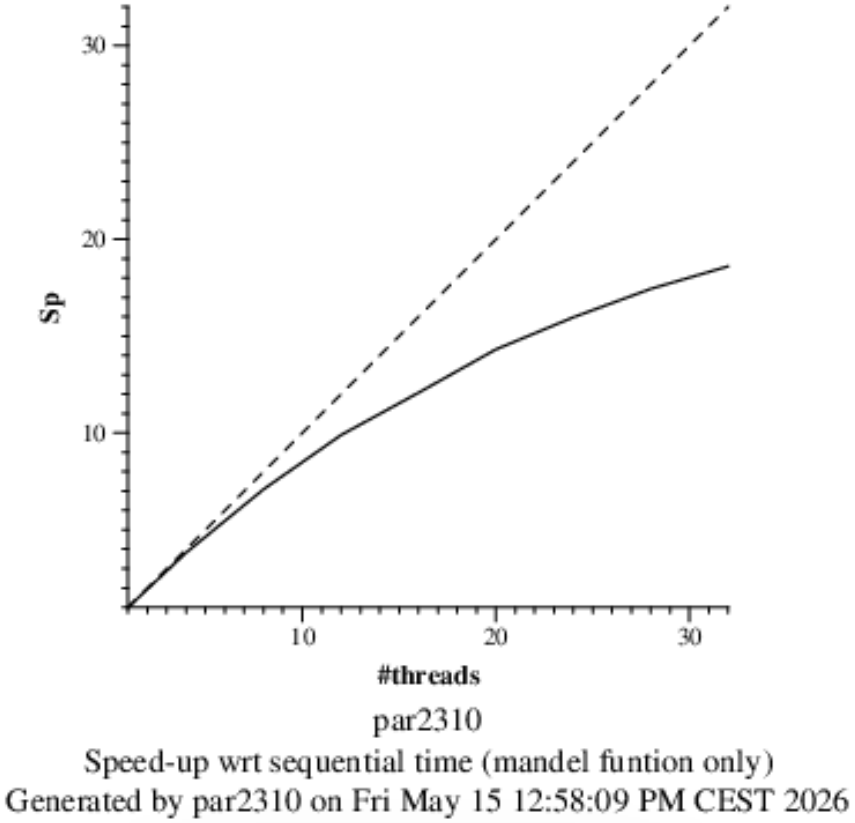

Figure 2.10: Strong scalability (elapsed time vs. threads) for the Recursive Tree implementation.

Appendix A

Final Comparison Between All Parallel Strategies

A.1 Summary of Elapsed Execution Times

Table A.1 presents the elapsed execution times (in seconds) for all five parallel versions, obtained from the output files generated by `submit-strong-omp.sh`.

Table A.1: Elapsed execution times (seconds) for each version and number of threads.

Version	**Number of threads**					
	1	**4**	**8**	**12**	**16**	**32**
Iterative: Tile (provided, completed)						
Iterative: Fine grain						
Recursive: Leaf (provided, completed)	1.83	1.41	1.41	1.41	1.41	1.41
Recursive: Improved Leaf						
Recursive: Tree	1.84	0.48	0.26	0.19	0.15	0.10
Best parallel implementation		*Version:*		*Reason why:*		

A.2 Best Implementation Discussion

Fill in Table A.1 and write the discussion once experiments are complete.