

ing a specific json
determined(like the

on

arts of
r:

```
/*personalizeTagNames() = read the  
names(like 'a' or 'p' or 'img') changes from  
the profile and apply them to relevant  
elements*/  
personalizeTagNames(profile.tagNames);
```


```
TagNames().  
gname- a  
me  
me(tagname)
```

```
/*personalizeAttributes() = read the attributes  
(like aui-destination = "home" ) from the profile  
and apply them to relevant elements*/  
personalizeAttributes(profile.attributes);
```

```
/**  
* change settings for all element in the DOM  
that have certain attri  
bute  
* @param{*}attribute  
*/
```

```
/**  
* this function iterates over the scopes section of  
the profile and runs funcitons  
to personalize the scoped elements.  
*/  
function personalizeAllScopedElements(scopes)
```


```
/**  
* @param{*the parent attribute is the attribute that in its scope we s  
attribute'}parentAttr  
* @param{*the settings of the this scope attribute}single
```

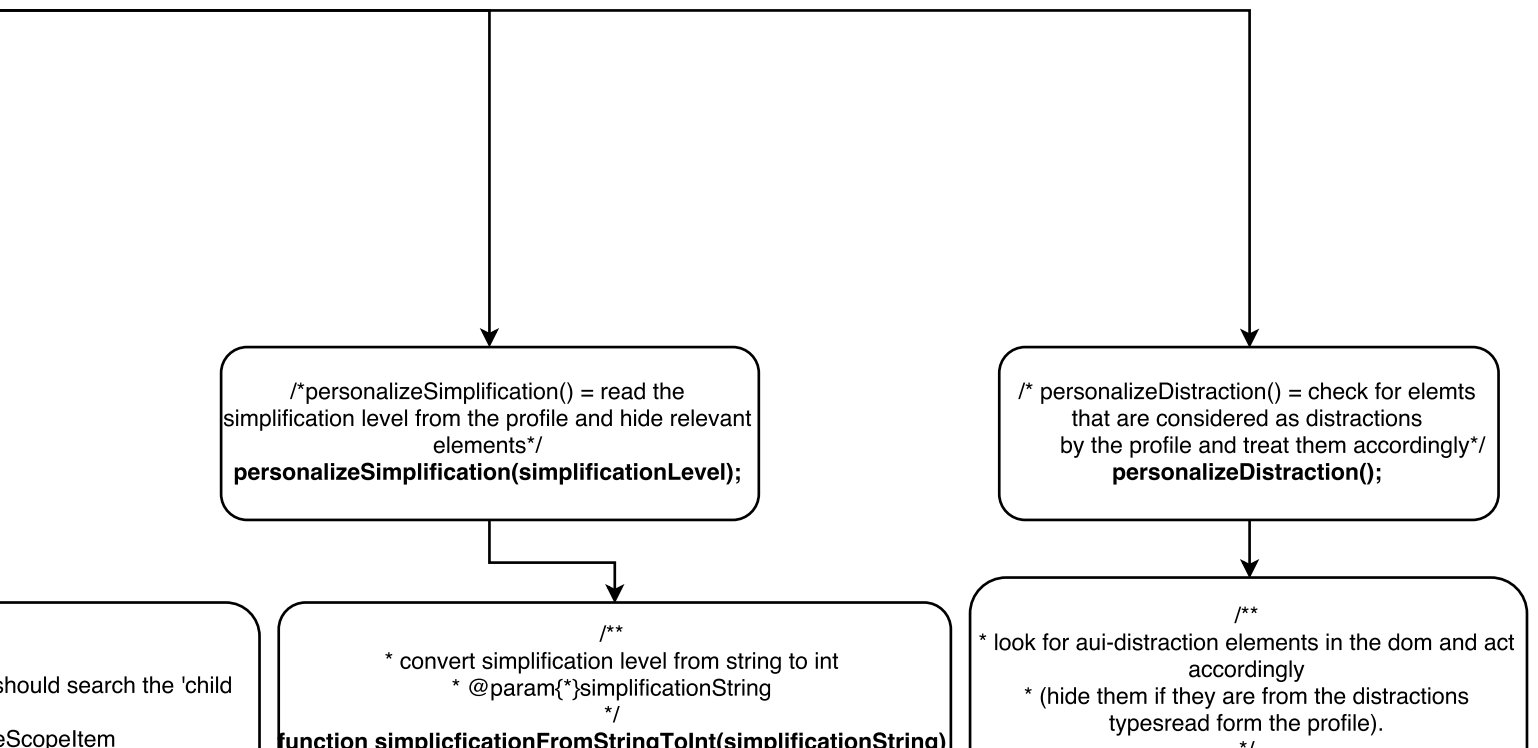


*

* show

f

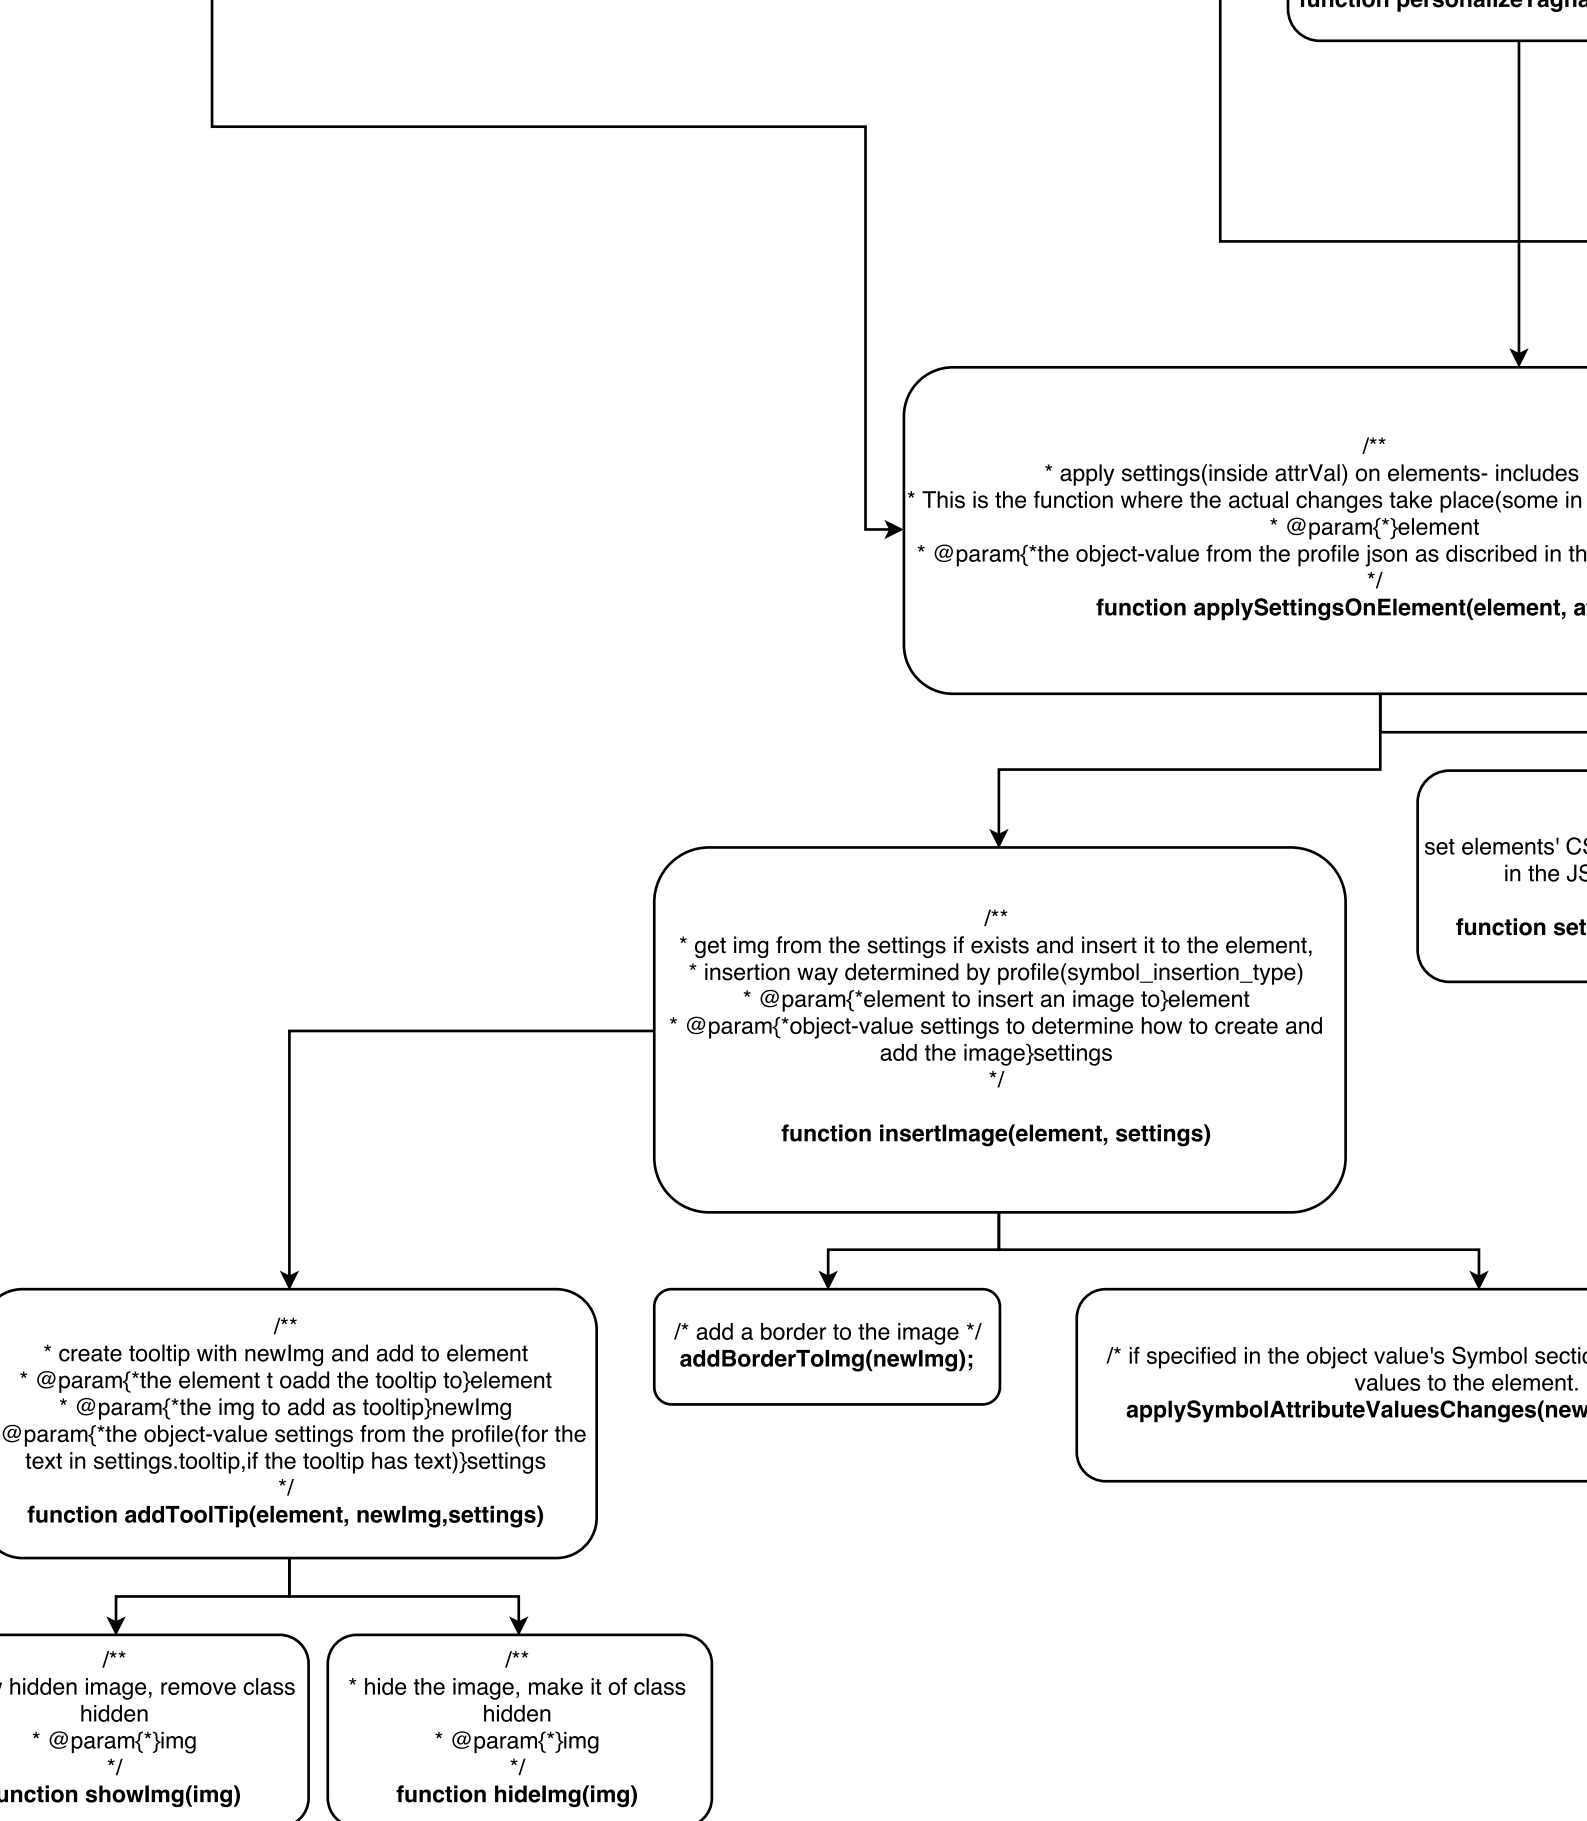

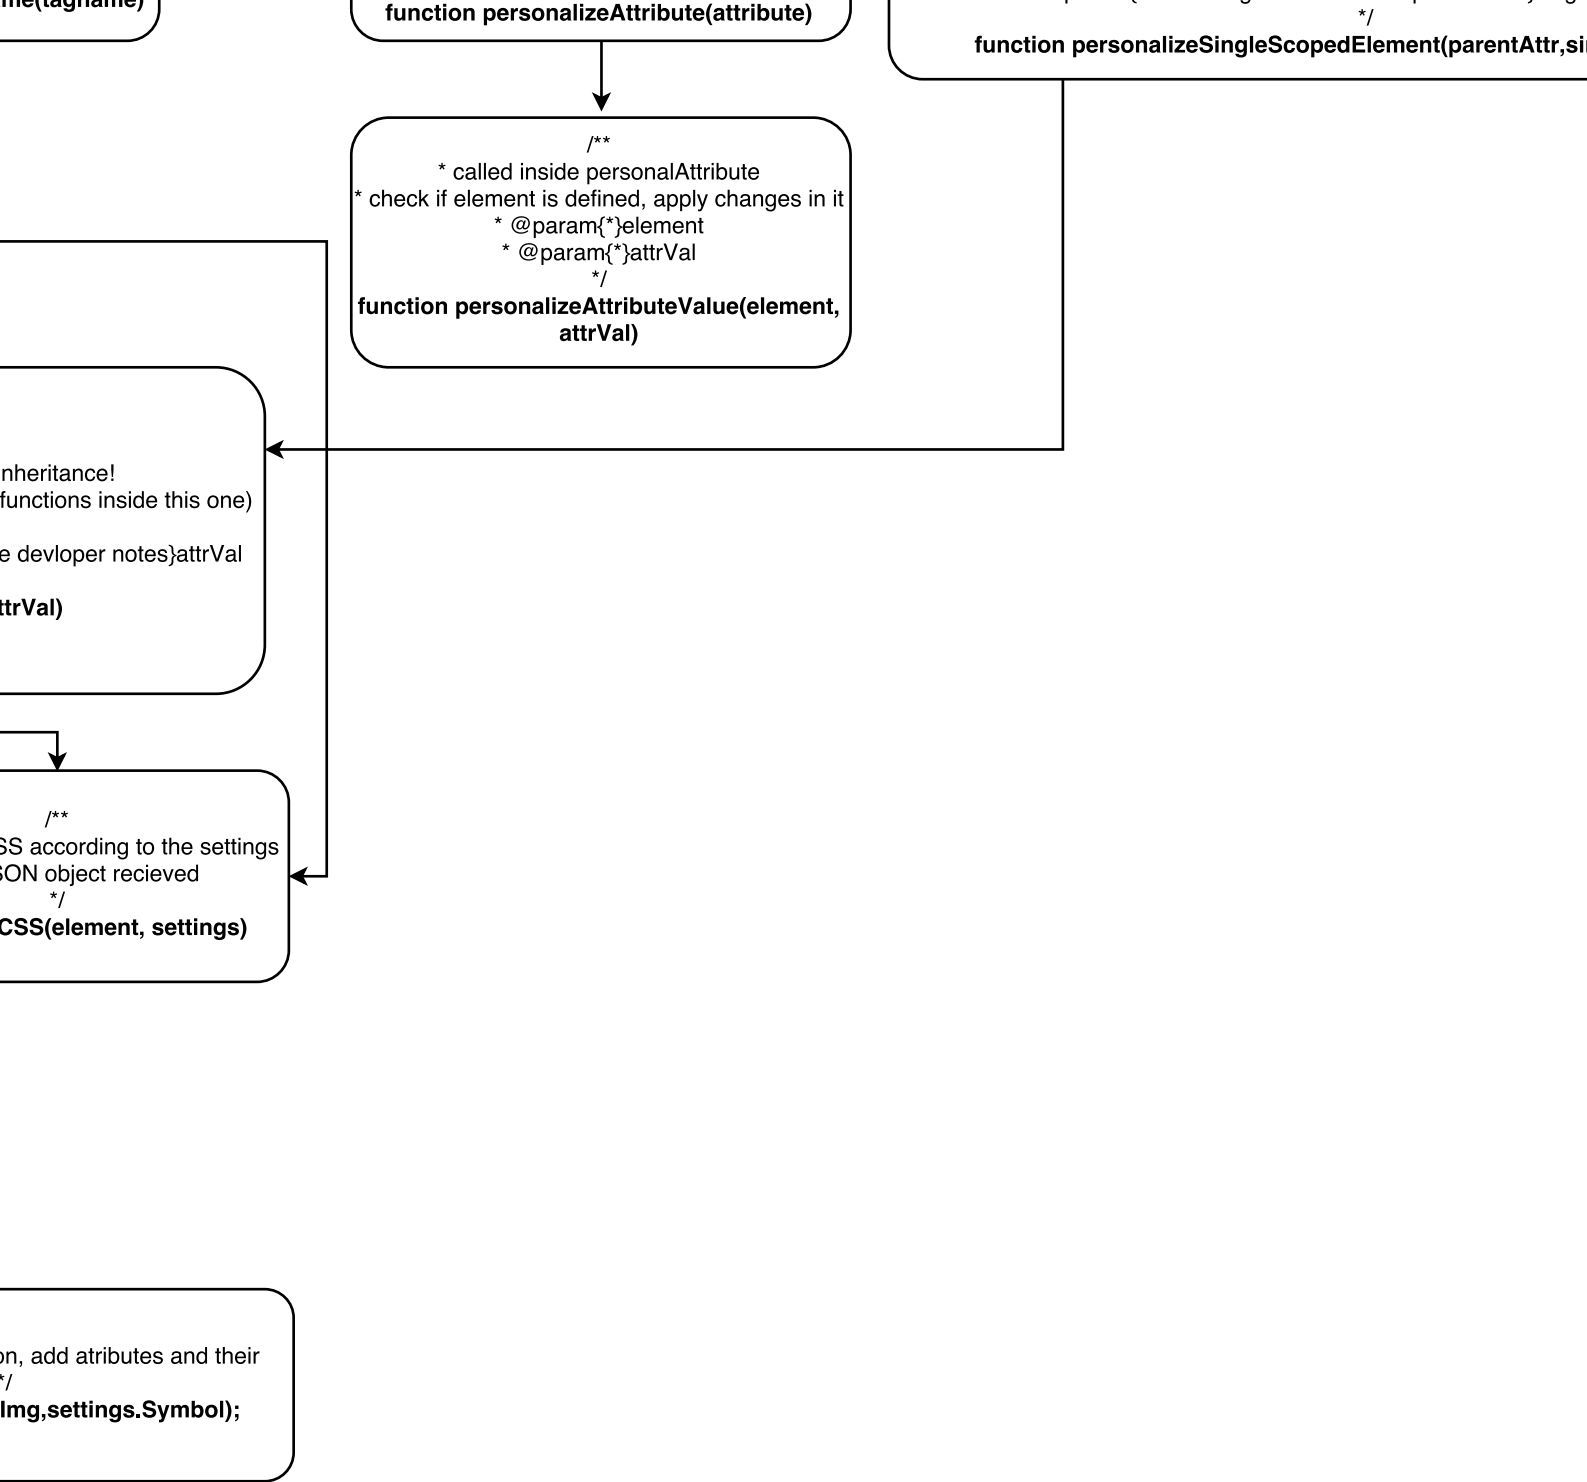

ngleScopeItem)

function simplifyExpression(simplifyString(simplifyExpressionString,

function personalizeDistraction()