# Near-matched resources: QAOA decoding under calibrated noise

128 fresh groups | 16 qubits, p = 1 | 1,024 samples | saved IBM Fez calibration | local simulation

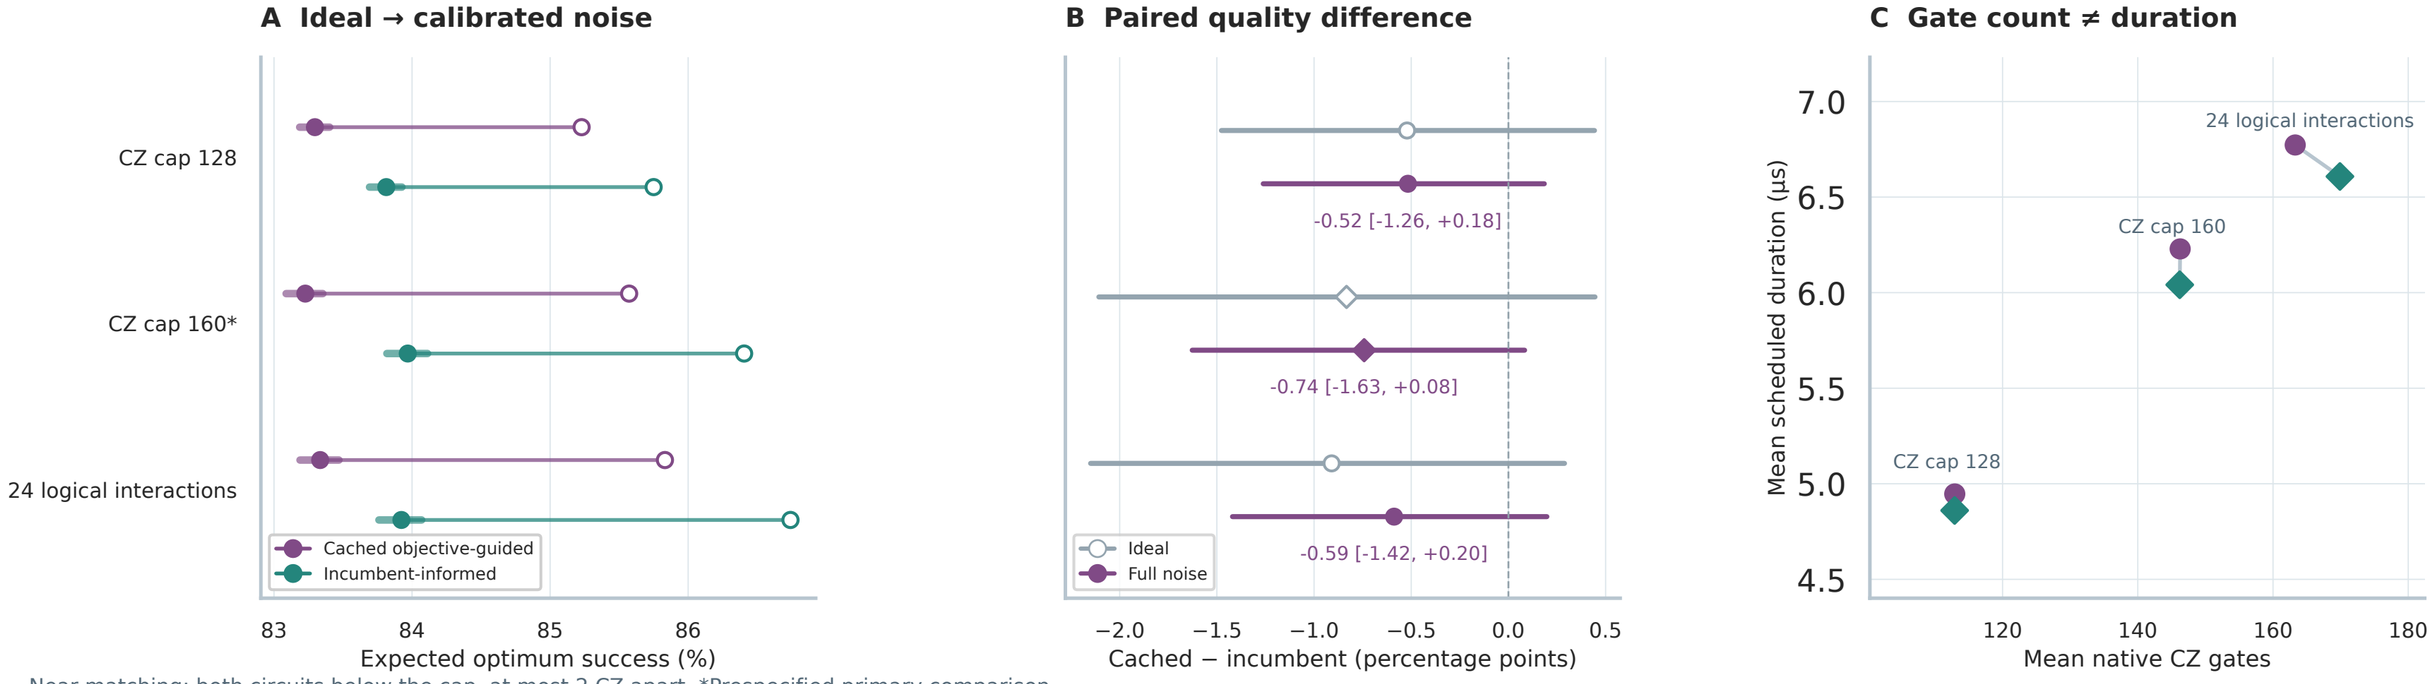


Near matching: both circuits below the cap, at most 2 CZ apart. *Prespecified primary comparison.

A: open = ideal, filled = noisy; bars show fixed-cohort Monte Carlo intervals. B: paired 95% group + Monte Carlo intervals.

Noise model: native gate errors, gate/idle relaxation and readout; 64 trajectories per simulated circuit. No hardware execution.