

Supplementary Material: Hierarchical Transformer Preconditioning for Interactive Physics Simulation

CARL OSBORNE, MIT CSAIL, USA
MINGHAO GUO, MIT CSAIL, USA
CRYSTAL OWENS, MIT CSAIL, USA
WOJCIECH MATUSIK, MIT CSAIL, USA

ACM Reference Format:

Carl Osborne, Minghao Guo, Crystal Owens, and Wojciech Matusik. 2026. Supplementary Material: Hierarchical Transformer Preconditioning for Interactive Physics Simulation. *ACM Trans. Graph.* 45, 6, Article 1 (December 2026), 5 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

This document collects the implementation details, dataset construction, per-scale performance numbers, full train $\times$ eval generalization grid behind Table 6, and the precision/apply-path discussion that did not fit the main-paper page budget. Section numbering is independent of the main paper.

1 Experimental Setup — Full Details

Hardware. All GPU experiments run under a batch scheduler on a shared institutional GPU cluster. Each job allocates one NVIDIA H200 (140 GB HBM3), eight Intel Xeon Platinum 8580 host cores, and 32 GiB host DRAM alongside the device (partial-node slice on dual-socket nodes with eight GPUs per node). CPU baselines use the same eight host cores.

Software stack. GPU code is built with the CUDA 12 toolchain and a PyTorch 2.6.x build from a fixed Conda environment, using `torch.compile` for graph capture. CPU baselines use Eigen, SciPy, and PyAMG. Sparse matrix-vector products on the GPU use the CSR layout produced by the dataset generator (Sec. 4). PCG timing uses single-graph CUDA Graph replay for methods that admit it (unpreconditioned CG, Jacobi, AMGX SPAI, neural SPAI, ours); IC- and AMG-class methods are timed per launch since their sequential triangular solves and V-cycle synchronization preclude single-graph capture.

Default model configuration. Unless noted, our model uses $d = 128$, $n_l = 3$, $L = 128$, $p_{\text{diag}} = 1$, $p_{\text{off}} = 4$ (so $L_s = 32$), $n_{\text{gcn}} = 2$, $h = 8$ attention heads, highways enabled (d128_L3_hw in figures). This single checkpoint is reused at every N in the main performance table. Sec. 2 expands the per-stage shapes and Sec. 3 the optimizer and probe details.

Baseline tuning. GPU IC (MULTICOLOR_DILU) and GPU AMG settings follow AMGx vendor defaults. At $N = 8192$ we additionally swept the nearest neighboring AMGx hyperparameter configurations (smoother type, coarsening strategy, maximum levels) and

Authors' Contact Information: Carl Osborne, MIT CSAIL, Cambridge, USA, osbo@mit.edu; Minghao Guo, MIT CSAIL, Cambridge, USA, guomh2014@gmail.com; Crystal Owens, MIT CSAIL, Cambridge, USA, crystal@mit.edu; Wojciech Matusik, MIT CSAIL, Cambridge, USA, wojciech@csail.mit.edu.

2026. ACM 1557-7368/2026/12-ART1
<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

verified that none meaningfully reduces total time relative to the default. CPU PyAMG uses its default classical AMG cycle. AMGx SPAI is included as the sparse-approximate-inverse data point; we keep its vendor defaults because the neural SPAI baseline whose public implementation does not currently support our problem class (main paper, footnote in §7.1) would be the natural learned comparison, not AMGx SPAI's hand-tuned variants.

Convergence criterion. All reported solve times and iteration counts are to a relative residual tolerance of $\|\mathbf{r}_k\|_2 / \|\mathbf{r}_0\|_2 \leq 10^{-8}$. This is two to three orders of magnitude tighter than the $\sim 10^{-3}$ accuracy typical of graphics-grade pressure projection. We chose the tighter tolerance so per-method comparisons reflect preconditioner quality rather than early termination; at 10^{-3} every method finishes in fewer iterations, but the relative ordering and ratios we report are preserved.

Precision. PCG scalar accumulators (dot products, residual norms, step sizes) use float64; preconditioner weights and the apply path use float32. Sec. 7 discusses why this split is sufficient on stiff systems at our target tolerance and where each component sits within the apply-path memory budget.

2 Network Architecture Details

This section expands the four-stage pipeline of main-paper §4 with the exact tensor shapes and module-level choices needed to reproduce the network.

Encoder (Sec. 4.1). The per-node feature vector concatenates the simulator-exposed scalar fields (density, pressure, geometric position, boundary indicators) with a broadcast global context of dimension $d_{\text{glob}} = 12$ summarizing per-frame statistics of the assembled system. A two-layer MLP with GELU activations lifts this to width d . The encoder then applies $n_{\text{gcn}} = 2$ residual graph-convolutional layers [Kipf and Welling 2017] that use A itself (normalized by $\text{diag}(A)$) as the message-passing weight. The encoder is the only stage that touches individual edges; downstream stages consume only the per-node embedding tensor of shape (N, d) .

Diagonal attention stack (Sec. 4.2). Encoder embeddings are reshaped from (N, d) to (K, L, d) and fed through n_l transformer blocks with attention restricted to within-leaf token pairs (the Swin-style local window of [Liu et al. 2021; Vaswani et al. 2017] adapted to a one-dimensional index range). Each block uses $h = 8$ heads, head dimension $d/h = 16$, a GELU-activated FFN with $4d$ hidden width, pre-norm LayerNorm, and residual connections. Attention logits carry a learned per-head bias produced by a two-layer MLP from the four-dimensional edge descriptor $(\Delta \mathbf{x}_{ij}, A_{ij})$.

Off-diagonal attention stack (Sec. 4.2). The same encoder embeddings are pooled along each tile’s row- and column-strip $\mathcal{I}_m, \mathcal{J}_m$ to obtain per-leaf coarse summaries, then condensed along the in-strip axis to $L_s = L/p_{\text{off}} = 32$ tokens per tile via uniform mean-pooling. Tile-grouped tokens then arrive at the attention stack with shape $(M_{\mathcal{H}}, L_s, d)$, independent of the physical tile size $S_m L$, and are processed by n_l transformer blocks identical in form to the diagonal stack (same head count, FFN width, normalization). Edge biases for each in-tile token pair are computed from the mean of $(\Delta \mathbf{x}_{ij}, A_{ij})$ over all node pairs spanning the corresponding sub-strips.

Highway buffers (Sec. 4.3). After every attention sublayer in either stack, block-token embeddings are scatter-added into per-layer row, column, and global buffers $\mathbf{r}_{\text{hw}}, \mathbf{c}_{\text{hw}} \in \mathbb{R}^{B \times N \times d}$ and $\mathbf{g}_{\text{hw}} \in \mathbb{R}^{B \times d}$ (off-diagonal tile tokens are first repeat-interleaved back to full L -leaf resolution so each tile contributes uniformly across its S leaves). Before the FFN sublayer, each token’s row, column, and global highway slices are concatenated with its own d -dim embedding and the resulting $4d$ -wide vector is fed through the FFN input projection. The four-channel mix (2D local + 1D row + 1D column + 0D broadcast) is repeated independently in every transformer block; the buffers themselves are not residual across blocks.

Decoder heads (Sec. 4.4). Three lightweight heads project token embeddings to the factor tensors that the apply path consumes. The leaf head is a two-layer MLP per diagonal-stream token followed by a reshape into $F_k \in \mathbb{R}^{L \times L}$. The two off-diagonal heads are single linear layers producing $U_m, V_m \in \mathbb{R}^{L_s \times L_s}$ from the off-diagonal-stream tokens (L_s tokens per tile, one head emits U_m , the other V_m). The two node heads are single linear layers producing the bridge matrices $\tilde{U}_k, \tilde{V}_k \in \mathbb{R}^{L \times L_s}$ from the diagonal-stream per-node embeddings. A final scalar gate produces the Jacobi-residual weight λ_i .

Apply-path tensor layout. The decoder outputs are concatenated into a single packed tensor of width $P = KL^2 + M_{\mathcal{H}}L_s^2 + 2NL_s + N$ with strides aligned to the $\mathcal{H}$ -matrix partition. With the weak-admissibility $\mathcal{H}$ -matrix partition at admissibility parameter $\eta = 1$, the number of unique off-diagonal tiles satisfies $M_{\mathcal{H}} = K - 1$ (geometric sum $K/2 + K/4 + \dots + 1$ over the strict upper triangle); the symmetric lower triangle reuses the same B_m via the transposed apply $\mathbf{t}_m^c = B_m^T \mathbf{s}_m^r$ from the main-paper Sec. 5 equations. Concrete factor-tensor sizes at the scales of the main paper’s performance table (main paper Table 4) are listed in Sec. 7.

Explicit off-diagonal apply equations (main paper Sec. 5). For leaf residual $\mathbf{r}_k \in \mathbb{R}^L$ and tile leaf-ranges $\mathcal{R}_m, \mathcal{C}_m$, the off-diagonal contribution follows the same FMM-style chain used in the main text:

$$\hat{\mathbf{u}}_k = \tilde{U}_k^T \mathbf{r}_k, \quad \hat{\mathbf{v}}_k = \tilde{V}_k^T \mathbf{r}_k \quad (\text{restriction}) \quad (1)$$

$$\mathbf{s}_m^r = \sum_{k \in \mathcal{R}_m} \hat{\mathbf{u}}_k, \quad \mathbf{s}_m^c = \sum_{k \in \mathcal{C}_m} \hat{\mathbf{v}}_k \quad (\text{strip aggregation}) \quad (2)$$

$$\mathbf{t}_m^c = B_m^T \mathbf{s}_m^r, \quad \mathbf{t}_m^r = B_m \mathbf{s}_m^c \quad (\text{coarse coupling}) \quad (3)$$

$$\Delta \mathbf{y}_k = \tilde{U}_k \sum_{m: k \in \mathcal{R}_m} \mathbf{t}_m^r + \tilde{V}_k \sum_{m: k \in \mathcal{C}_m} \mathbf{t}_m^c \quad (\text{prolongation}). \quad (4)$$

The stage-wise shape progression for one tile of span $S_m L$ is $S_m L \rightarrow S_m L_s \rightarrow L_s \rightarrow L_s \rightarrow S_m L_s \rightarrow S_m L$. In implementation this is four batched GEMMs with shapes $(K, L, L_s), (M_{\mathcal{H}}, L_s, L_s), (K, L, L_s)$ (restriction, coupling, prolongation; two directional bridge passes

share the same launch shape), plus two partition-indexed scatter-adds for strip aggregation and redistribution.

3 Training Procedure

Optimizer and schedule. We train with AdamW (PyTorch defaults for $\beta_1, \beta_2, \epsilon$, weight decay 10^{-4}) at initial learning rate 2×10^{-4} . Learning rate is reduced on plateau with ReduceLROnPlateau (factor 0.5, patience 5 log steps, relative threshold 5×10^{-3} , minimum $\max(\text{lr} \times 10^{-3}, 10^{-6})$). Gradients are globally clipped to ℓ_2 norm 1 before each AdamW step.

Auto-stop. Training proceeds for at most 10^5 optimizer steps but is terminated early once the LR scheduler reaches `min_lr` and the cosine-Hutchinson loss has failed to improve by the same 5×10^{-3} relative threshold over 10 consecutive log steps (twice the LR-scheduler patience). At our default configuration this fires at roughly 24 300 steps (main paper, §7.3).

Probe vectors. At each step we draw a batch of $K_z = \max(64, \lceil \sqrt{N} \rceil)$ probe vectors $\mathbf{Z} \sim \mathcal{N}(0, I)$ and apply two damped-Jacobi smoothing sweeps with $\omega = 0.6$ (main paper, Eq. 8) to redistribute probe energy toward lower spatial frequencies. Probes are detached after smoothing, so no gradient flows back through the smoother. The constant 64 floor on K_z keeps gradient noise bounded at the smallest scales; the $\sqrt{N}$ growth keeps the per-step gradient signal-to-noise ratio approximately constant as N grows.

Gradient accumulation. Each optimizer step aggregates gradients over four random cached training contexts (graph, A , masks, padded sizes, smoothed probes). Contexts are precomputed once and cached on disk so the per-step cost is dominated by the forward/backward through the network rather than dataset assembly.

$\mathcal{H}$ -matrix partition. The weak-admissibility partition is constructed once per scale at training start with admissibility parameter $\eta = 1$ and the leaf count $K = N/L$ determined by the scale. The partition is keyed to N and reused unchanged on every test frame at that scale; no part of the partition depends on A or the right-hand side.

Wall-clock budget. End-to-end training of the default configuration is ~ 16 min on one H200 at $N = 8192$, with the model overtaking GPU Jacobi at step ~ 2000 (~ 1.3 min) and dropping under 200 PCG iterations by step ~ 12000 (~ 8 min). The training profile is plotted in main paper Fig. 4.

4 Multiphase Poisson Benchmark Generation

This appendix gives the precise procedure for generating each frame of the multiphase Poisson benchmark used throughout the main paper.

Grid and ordering. Each frame targets N degrees of freedom on a 2D structured grid of dimensions $W \times H$ with $W \cdot H \geq N$ and W, H chosen as close to square as possible. All $W \cdot H$ cells are sorted by Morton (Z-order) code and truncated to the first N cells, giving a contiguous Morton-ordered index set. Edges and density values follow the same ordering. We use a structured grid (rather than a particle cloud) so that the assembled A has the canonical 5-point

Laplacian sparsity pattern, isolating the effect of the heterogeneous coefficient field on conditioning.

Density field. Per frame the heavy density ρ_{heavy} is drawn log-uniformly from $[5, 100]$ with $\rho_{\text{light}} = 1$. We then sample $n_b \sim \text{Uniform}\{1, 2, 3\}$ barriers; each barrier is independently

- (1) assigned an orientation (vertical or horizontal, equiprobable);
- (2) given a center coordinate drawn uniformly from $[0.2, 0.8]$ along the cross axis, in normalized grid coordinates;
- (3) given a thickness drawn uniformly from $[0.05, 0.20]$;
- (4) given a gap topology drawn uniformly from $\{\text{top, bottom, middle_hole, closed}\}$.

A cell is heavy iff it lies in the heavy region of *any* barrier, so multiple barriers can overlap to form cross- or L-shaped inclusions. Each cell's density is finally multiplied by $1 + \mathcal{N}(0, 0.05^2)$ for fine-grain symmetry breaking.

Operator assembly. A is the standard 5-point pressure-Poisson Laplacian with harmonic-mean face conductance $w_{ij} = 2\rho_i\rho_j/(\rho_i + \rho_j)$, evaluated on cell-cell faces. Boundary cells use zero-flux (Neumann) boundary conditions, as is standard for incompressible pressure-projection in graphics-grade fluid simulators. We do *not* apply a zero-mean constraint to the resulting null-space mode; CG handles it implicitly when the right-hand side is consistent.

Right-hand side. For each frame we draw $\mathbf{b} \sim \mathcal{N}(0, I)$ projected onto the orthogonal complement of the constant vector ($\mathbf{1}^\top \mathbf{b} = 0$ to ensure consistency with the Neumann null-space). This is a worst-case right-hand-side distribution from a preconditioner's perspective: it weights all spatial frequencies equally, including the low ones that are hardest for local preconditioners.

Per-scale dataset sizes. For each of five scales, spanning $N = 1\,024$ to $N = 16\,384$, we generate 100 training frames and 20 test frames with disjoint seeds. Training and test split the same generator distribution.

5 Per-frame Iteration-count Variability

The consolidated per-scale times and mean iteration counts have moved to the main paper, Table 4. This section reports the across-frame variability ($\pm 1\sigma$ over the same 20 test frames per scale) that the main table omits to fit the column budget.

Table 1. Per-frame mean $\pm$ std PCG iteration counts on the multiphase Poisson benchmark ($\text{rtol} = 10^{-8}$, 20 frames per scale). Bold row marks the proposed method.

Method	$N=1\,024$	$N=2\,048$	$N=4\,096$	$N=8\,192$	$N=16\,384$
Unprec. CG (GPU)	497 $\pm$ 144	650 $\pm$ 240	1153 $\pm$ 434	1765 $\pm$ 1744	2103 $\pm$ 1113
Jacobi (GPU)	325 $\pm$ 83	429 $\pm$ 112	839 $\pm$ 476	968 $\pm$ 261	1543 $\pm$ 1137
IC / DILU (GPU)	11 $\pm$ 1	15 $\pm$ 1	22 $\pm$ 4	30 $\pm$ 5	40 $\pm$ 4
AMG / AMGX (GPU)	1 $\pm$ 0	1 $\pm$ 0	1 $\pm$ 1	2 $\pm$ 0	3 $\pm$ 0
Neural SPAI (GPU) [Yang et al. 2025]	118 $\pm$ 6	167 $\pm$ 8	246 $\pm$ 41	338 $\pm$ 24	496 $\pm$ 107
IC (CPU)	59 $\pm$ 18	96 $\pm$ 23	113 $\pm$ 31	170 $\pm$ 47	254 $\pm$ 61
AMG (CPU)	5 $\pm$ 6	9 $\pm$ 6	5 $\pm$ 7	7 $\pm$ 8	10 $\pm$ 8
Ours (GPU)	47$\pm$9	66$\pm$16	80$\pm$24	168$\pm$26	394$\pm$68

The neural SPAI baseline is re-trained per scale (one network per N) using the SAI loss of [Yang et al. 2025] on the same training

distribution as ours; the row reports mean $\pm$ std across the same per-scale test-frame evaluation as the other methods.

6 Generalization Robustness

Table 6 in the main paper reports four cells of a wider train $\times$ eval grid that probes within-family robustness at $N=4\,096$. Table 2 reports the full grid for *our* method, adding both the in-distribution row (*Full* training, evaluated on closed-only and high-contrast subsets) and a fourth, compositional training distribution that excludes closed barriers *and* restricts contrast to $\rho_{\text{heavy}} \in [5, 25]$.

Table 2. Within-family generalization grid for the proposed method at $N=4\,096$ ($\text{rtol}=10^{-8}$, 20 frames per cell). Each cell reports mean $\pm$ std PCG iterations; dashes mark cells that are in-distribution for the corresponding training set (so the entry would duplicate the leftmost column). The fourth training row is a compositional distribution that excludes closed barriers *and* restricts contrast to $\rho_{\text{heavy}} \in [5, 25]$; the rightmost column evaluates it on the joint shift (closed barriers + high contrast).

Train distribution	Eval distribution			
	Full (id)	Closed only	High contrast	Closed + high
Full	82 $\pm$ 28	—	—	—
Excl. closed barriers	78 $\pm$ 19	68 $\pm$ 16	—	—
Low contrast	78 $\pm$ 26	—	142 $\pm$ 126	—
Excl. closed + low ρ	95 $\pm$ 29	89 $\pm$ 20	153 $\pm$ 97	147 $\pm$ 102
Mean total solve (ms)	8.2–9.5	7.4–9.0	13.1–13.9	13.5
Δ_{OOD} (iters)	1.00 (def.)	0.87–0.94	1.82, 1.61	1.55

Δ_{OOD} is the ratio of iterations in the cell to the in-distribution cell of the same training row (lower is better). Row 1 (*Full*) is included so the in-distribution operating point is on the same page as the OOD numbers; we omit its trivial OOD columns.

The grid shows that topology shift is inexpensive ($\Delta_{\text{OOD}}=0.87\text{--}0.94$), while contrast shift is the dominant OOD cost ($\Delta_{\text{OOD}}=1.55\text{--}1.82$). Even in the compositional shift cell (closed + high contrast), the model remains at $1.9\times$ Jacobi-relative speedup.

7 Precision and Hardware Efficiency

This section expands the precision and apply-path arguments referenced from main paper §5 and §7.1.

Mixed precision split and its motivation. The apply path consists of dense batched GEMMs of shapes (K, L, L) , (M_H, L_s, L_s) , and (K, L, L_s) (main paper §5). At $L=128, L_s=32$ each individual matmul has condition number bounded by the singular-value spread of its factor (typically $\leq 10^3$ in our trained models), well within float32's $\sim 10^7$ representable range. PCG's scalar accumulators, by contrast, run over the whole residual vector and accumulate $O(N)$ terms per iteration; on stiff multiphase systems we observed residual norms drift by 1–2 orders of magnitude over a few hundred iterations when those accumulators were held at float32, which can cause spurious early termination at $\text{rtol}=10^{-8}$. Holding only the scalar accumulators (dot products, residual norms, step sizes) at float64 eliminates that drift without paying float64's $2\times$ memory/throughput penalty on the bulk GEMMs. This is the same precision split used in CG implementations in cuSPARSE and AMGX.

Factor-tensor memory footprint. The packed factor tensor of width $P = KL^2 + M_H L_s^2 + 2NL_s + N$ (main paper §4.4) determines the apply-path memory budget. With $L = 128$, $L_s = 32$, and $M_H = K - 1$ at $\eta = 1$ weak admissibility, Table 3 lists the absolute numbers at the scales in Table 1.

Table 3. Factor-tensor breakdown for the default configuration ($L = 128$, $L_s = 32$, $p_{\text{off}} = 4$). $K = N/L$ is the leaf count; $M_H = K - 1$ is the unique off-diagonal tile count under weak admissibility ($\eta = 1$); P is the total packed width in float32 elements; “MB” is the resulting on-device footprint.

N	K	M_H	KL^2	P	MB
1 024	8	7	0.131 M	0.20 M	0.82
2 048	16	15	0.262 M	0.41 M	1.64
4 096	32	31	0.524 M	0.82 M	3.29
8 192	64	63	1.049 M	1.65 M	6.58
16 384	128	127	2.097 M	3.29 M	13.2

The factor tensor scales linearly in N at fixed L and stays below 10 MB through $N = 8\,192$; at $N = 16\,384$ it reaches 13.2 MB and still fits comfortably in a single H200’s HBM. The dominant term at every scale is KL^2 (the dense diagonal leaves), not $M_H L_s^2$: distant tiles are compressed so aggressively that the entire off-diagonal contribution costs less than the diagonal even though it covers $1 - 1/K$ of the matrix.

Apply-path kernel breakdown. Main paper Table 3 reports the kernel-family split at $N = 8\,192$: CUTLASS Tensor-Op GEMMs (31%) plus CUTLASS fused attention (14%) account for $\sim 45\%$ of device time; the remaining $\sim 55\%$ is elementwise operations, layout reshapes, and small bookkeeping kernels.

What would have to change for tighter tolerance. The float32 apply path supports $\text{rtol} \leq 10^{-8}$ across all scales we evaluate. For graphics applications this is two to three orders of magnitude tighter than typical pressure-projection tolerances and is therefore sufficient. For scientific applications requiring $\text{rtol} \leq 10^{-10}$ or stricter, the apply path would either need a full float64 pass (doubling device-memory and halving Tensor-Core throughput) or an outer iterative refinement loop that uses the float32 apply as an inner preconditioner. We did not implement either since they fall outside the regime we target.

8 Additional Figures and Tables Referenced from the Main Paper

This section provides optional figures and detailed-breakdown tables for readers who want additional clarity on the method and results. Main-paper cross-references resolve to the *Figure/Table* number shown next to each caption below.

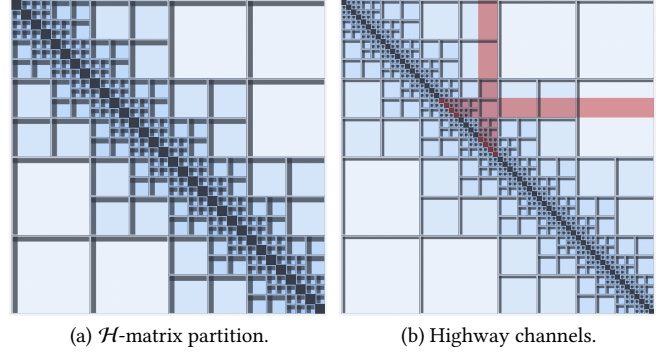


Fig. 1. *Left*: weak-admissibility $\mathcal{H}$ -matrix partition. Dense diagonal leaves along the main diagonal; admissible off-diagonal tiles double in size with separation. *Right*: per-layer highway channels. One red overlay marks the row- and column-index sets of a representative off-diagonal tile; this tile contributes scatter-adds to those strips and to a single global token — four communication channels of dimensions $2D / 1D / 1D / 0D$ per layer.

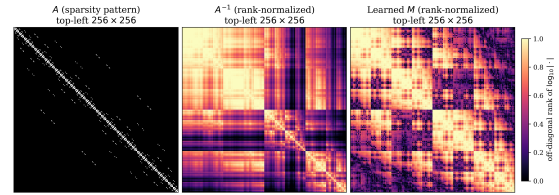


Fig. 2. The sparse operator A , its dense inverse A^{-1} , and the assembled learned $M \approx A^{-1}$ (top-left 256×256) on a multiphase pressure-Poisson frame, on a shared rank-normalized color scale. All three share the weak-admissibility block-and-tile pattern: full-rank diagonal blocks plus off-diagonal tiles whose magnitude decays with separation. This pattern is exactly the prior quantified by main paper Fig. 3.

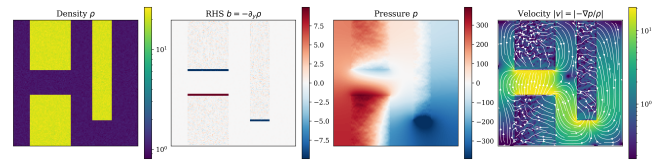


Fig. 3. A representative frame from our multiphase pressure-Poisson benchmark at $N = 16\,384$. *Left*: heterogeneous density p with $27\times$ contrast, separated by closed and partially-closed barriers (yellow). *Middle*: buoyancy-driven right-hand side $b = -\partial_y p$, concentrated on horizontal density interfaces. *Right*: recovered pressure p with velocity $-\nabla p/p$ overlaid.

Table 4. Hyperparameter ablations on multiphase Poisson ($\text{rtol} = 10^{-8}$, 20 frames per scale, neural preconditioner only). Train = wall-clock to convergence; Infer. = preconditioner forward pass; lters = mean PCG iters; Total = inference + PCG solve; Δ solve time = fractional change vs. the “—” row.

Configuration	Train (min)	Infer. (ms)	lters	Total (ms)	Δ solve time
<i>Width</i> (avg. $N \in \{2048, 4096, 8192\}$):					
$d=64$, $n_l=3$, hw	9.5	3.0	147	15.4	+28%
$d=128$, $n_l=3$, hw	10.7	3.1	105	12.0	—
$d=256$, $n_l=3$, hw	12.3	3.2	191	19.3	+61%
<i>Depth</i> ($N=8192$):					
$d=128$, $n_l=1$, hw	6.1	1.3	421	36.9	+106%
$d=128$, $n_l=2$, hw	9.6	2.3	218	20.8	+16%
$d=128$, $n_l=3$, hw	16.2	3.4	168	17.9	—
<i>Highways</i> ($N=2048$):					
$d=128$, $n_l=3$, hw	6.0	3.3	66	8.8	—
$d=128$, $n_l=3$, no-hw	4.8	2.2	149	13.8	+58%

Table 5. Neural-method runtime components by scale: preconditioner inference and PCG solve time (ms), plus total time and iterations aligned with the main-paper performance table. Neural SPAI uses the re-trained-per-scale CUDA apply path of [Yang et al. 2025].

Scale N	Infer. (ms)	Solve (ms)	Total (ms)	lters
<i>Neural SPAI (GPU, CUDA apply) [Yang et al. 2025]</i>				
1 024	4.6	13.8	18.4	118
2 048	3.8	22.2	26.0	167
4 096	6.6	31.7	38.3	246
8 192	4.4	43.8	48.1	338
16 384	4.9	66.0	70.9	496
<i>Ours (GPU)</i>				
1 024	1.9	5.1	7.0	47
2 048	1.9	6.9	8.8	66
4 096	2.2	7.0	9.2	80
8 192	4.0	13.9	17.9	168
16 384	17.0	30.6	47.6	394

References

- Thomas N. Kipf and Max Welling. 2017. Semi-Supervised Classification with Graph Convolutional Networks. In *International Conference on Learning Representations (ICLR)*.
- Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. 2021. Swin Transformer: Hierarchical Vision Transformer using Shifted Windows. *arXiv preprint arXiv:2103.14030* (2021). <https://arxiv.org/abs/2103.14030>
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention Is All You Need. In *Advances in Neural Information Processing Systems 30 (NIPS 2017)*. 5998–6008.
- Zherui Yang, Zhehao Li, Kangbo Lyu, Yixuan Li, Tao Du, and Ligang Liu. 2025. Learning Sparse Approximate Inverse Preconditioners for Conjugate Gradient Solvers on GPUs. *arXiv preprint arXiv:2510.27517* (2025). <https://arxiv.org/abs/2510.27517>