



Full Service ATM Online Messages

Technical Specifications

Effective: 21 October 2024

Visa Supplemental Requirements

© 2021–2024 Visa. All Rights Reserved.

Notice on Confidentiality, Intellectual Property Rights and Disclaimers (“Notice”)

Confidentiality. This document and any information, data, representations, materials, recommendations, exhibits, appendices or glossaries contained herein or attached hereto (collectively, the “Material”) is proprietary and confidential to Visa. The Material is furnished to you solely in your capacity as a client and/or potential client of Visa and/or a participant in the Visa payments system. You agree to keep the Material confidential and not to use or disclose the Material for any purpose other than in such capacity. By accepting the Material, you agree that the Material is intended for use by you solely subject to the confidentiality restrictions in (i) the Visa Charter Documents (as applicable), (ii) the Visa Core Rules and Visa Product and Service Rules, the Visa Payment System Operating Regulations – Russia, Visa International Travelers Cheque Operating Regulations, V PAY Core Rules and V PAY Product and Service Rules and Visa Supplemental Requirements (collectively, the “Visa Rules”) (as applicable), (iii) for VisaNet Processors, an executed and valid VisaNet Letter of Agreement on file with Visa, and (iv) for other third parties, a current participation agreement that includes applicable confidentiality provisions, other non-disclosure agreement with Visa that covers disclosure and use of the Material, and/or other confidentiality agreements that limit your use and disclosure of the Material. The Material may only be disseminated within your organization on a need-to-know basis to enable your participation in the product, service and/or program described herein and/or in the Visa payments system.

Please be advised that the Material may constitute material non-public information under U.S. federal securities laws and that purchasing or selling securities of Visa Inc. while being aware of material non-public information would constitute a violation of applicable U.S. federal securities laws.

Intellectual Property Rights. The Material is protected by copyright. The Material and/or any part of the Material must not be duplicated, reproduced, published, distributed or disclosed, in whole or in part, in any form by any means without Visa’s prior written authorization, including to any third party. Visa owns the trademarks, logos, trade names and service marks, whether registered or unregistered, contained in the Material. Third-party trademarks not attributed to Visa are the property of their respective owners, are used for identification purposes only, and do not necessarily imply product endorsement or affiliation with Visa.

Disclaimers. THE MATERIAL HEREIN IS PROVIDED ON AN “AS IS,” “WHERE IS,” BASIS, “WITH ALL FAULTS” KNOWN AND UNKNOWN. THE MATERIAL HEREIN IS INTENDED FOR INFORMATIONAL PURPOSES ONLY AND SHOULD NOT BE RELIED UPON FOR OPERATIONAL, MARKETING, LEGAL, REGULATORY, TECHNICAL, TAX, FINANCIAL OR OTHER ADVICE. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, VISA EXPLICITLY DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, REGARDING THE MATERIAL HEREIN, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT (INCLUDING, BUT NOT LIMITED TO, NON-INFRINGEMENT OF THIRD-PARTY INTELLECTUAL PROPERTY RIGHTS). VISA DOES NOT MAKE ANY WARRANTIES, REPRESENTATIONS, GUARANTEES OR INDEMNITIES AS TO THE COMPLETENESS, ACCURACY AUTHENTICITY, USEFULNESS, TIMELINESS, RELIABILITY OR APPROPRIATENESS OF THE MATERIAL HEREIN OR OF THE INFORMATION OR MATERIALS REFERENCED HEREIN. VISA IS NOT LIABLE OR RESPONSIBLE FOR YOUR USE OR DISCLOSURE OF OR RELIANCE ON THE MATERIAL HEREIN, INCLUDING ERRORS OF ANY KIND, CONTAINED IN THE MATERIAL. NOTHING IN THIS NOTICE OR THE MATERIAL HEREIN SHALL BE DEEMED TO EXCLUDE OR LIMIT LIABILITY THAT CANNOT BE EXCLUDED OR LIMITED AS A MATTER OF LAW.

USE OF THE MATERIAL HEREIN IS AT YOUR OWN RISK. THE MATERIAL HEREIN SHOULD BE INDEPENDENTLY EVALUATED IN LIGHT OF YOUR SPECIFIC BUSINESS NEEDS AND ANY APPLICABLE LAWS AND REGULATIONS. THE

MATERIAL HEREIN IS NOT INTENDED AS INVESTMENT OR LEGAL ADVICE, AND READERS AND RECIPIENTS OF THE MATERIAL ARE ENCOURAGED TO SEEK THE ADVICE OF A COMPETENT PROFESSIONAL WHERE SUCH ADVICE IS REQUIRED.

THE MATERIAL HEREIN MAY CONTAIN DEPICTIONS AND DESCRIPTIONS OF A PRODUCT, SERVICE AND/OR PROGRAM CURRENTLY IN THE PROCESS OF DEVELOPMENT AND DEPLOYMENT, AND SHOULD BE UNDERSTOOD AS A REPRESENTATION OF THE POTENTIAL FEATURES OF THE FULLY-DEPLOYED PRODUCT, SERVICE AND/OR PROGRAM. ANY FINAL VERSION OF SUCH PRODUCT, SERVICE AND/OR PROGRAM MAY NOT CONTAIN ALL OF THE FEATURES DESCRIBED IN THE MATERIAL. WHERE POTENTIAL FUTURE FUNCTIONALITY IS HIGHLIGHTED, VISA DOES NOT PROVIDE ANY WARRANTY ON WHETHER SUCH FUNCTIONALITY WILL BE AVAILABLE OR IF IT WILL BE DELIVERED IN ANY PARTICULAR MANNER OR MARKET. PARTICIPATION IN PRODUCTS, SERVICES AND/OR PROGRAMS, IF AND WHEN OFFERED, MAY BE SUBJECT TO VISA'S TERMS AND CONDITIONS.

THE MATERIAL HEREIN COULD INCLUDE TECHNICAL INACCURACIES OR TYPOGRAPHICAL ERRORS. CHANGES MAY BE PERIODICALLY MADE TO THE MATERIAL. SUCH CHANGES WILL BE INCORPORATED IN NEW EDITIONS OF THE MATERIAL. VISA MAY MAKE IMPROVEMENTS AND/OR CHANGES IN OR TO THE PRODUCT(S), SERVICE(S) AND/OR PROGRAM(S) DESCRIBED IN THE MATERIAL HEREIN AT ANY TIME AT VISA'S SOLE DISCRETION. VISA MAY MODIFY, REPLACE OR RECALL THE MATERIAL HEREIN AT ANY TIME WITHOUT NOTICE TO ANY PARTY AND AT VISA'S SOLE DISCRETION.

Forward-Looking Statements. The Material contains forward-looking statements within the meaning of the U.S. Private Securities Litigation Reform Act of 1995 that relate to, among other things, Visa's future operations, prospects, developments, strategies, business growth and financial outlook. Forward-looking statements generally are identified by words such as "believes," "estimates," "expects," "intends," "may," "projects," "could," "should," "will," "continue" and other similar expressions. All statements other than statements of historical fact could be forward-looking statements, which speak only as of the date they are made, are not guarantees of future performance and are subject to certain risks, uncertainties and other factors, many of which are beyond our control and are difficult to predict. Visa describes risks and uncertainties that could cause actual results to differ materially from those expressed in, or implied by, any of these forward-looking statements in Visa's filings with the SEC. Except as required by law, Visa does not intend to update or revise any forward-looking statements as a result of new information, future events or otherwise.

Reservation of Rights. Any Visa features, functionality(ies), implementation(s), and/or branding, may be amended, updated or canceled at Visa's discretion. The timing of availability of programs and functionality described herein is subject to a number of factors outside Visa's control, including but not limited to overall levels of anticipated participation and deployment of necessary infrastructure by issuers, acquirers, and other system participants. Participation in programs and services, if and when offered, will be subject to Visa's terms and conditions.

Additional disclaimers and/or notifications may be found in the "Additional Notices" section of this document and/or in the Material herein.

Relationship to the Visa Rules. The Material is a supplement to the Visa Rules. In the event of any conflict between the Material, any document referenced herein or any communications concerning the Material, and any content in the Visa Rules, the Visa Rules shall govern and control.

Definitions. Capitalized terms not otherwise defined herein have the meanings given to them in the Visa Core Rules and Visa Product and Service Rules.

As used in this Notice, the terms "you" or "your" refer to (i) the person using the Material in any way, (ii) your organization and/or (iii) your or your organization's Sponsor.

"Visa" refers to the relevant Visa entity that has entered into an agreement with you governing the subject matter of the Material, being only *one* of the following Visa entities, and any of its current and former affiliates, employees, successors or assigns:

- Visa Canada Corporation;
- Visa do Brasil Empreendimentos Ltda.;
- Visa Europe Limited;
- Visa International Service Association;
- Visa International Servicios de Pagos Espana, S.R.L.U.;
- Visa U.S.A. Inc.;
- Visa Worldwide Pte Limited; OR
- Another Visa entity that is an affiliate of any of the foregoing entities.

* * *

If you have questions about a Visa product, service, program or capability, please contact your Visa representative.

Contents

Chapter 1 • Message Matching

Message Matching Examples.	57
Transaction Sets.	58
Cash Disbursement Set.	59
ATM Deposits Set.	59
Balance Inquiry Set.	59
Account Transfer Set.	60
Key Data Fields.	60
Financial Messages.	61
Originals.	61
Reversals.	61
Adjustments.	62
Dispute Financial.	64
Dispute Financial Reversals.	65
Dispute Response Financial.	65
Life Cycle Tracing Data Elements.	66
Administrative Messages.	66
Administrative Text.	66
Fraud Notification.	67
Network Management Messages.	68
Message Matching to Authorization-Only Clients.	68
Full Service Acquirer Sends Transaction to Authorization-Only Issuer.	69
Full Service Acquirer Receives Transaction From Authorization-Only Issuer.	69
Full Service Issuer Receives Transaction From Authorization-Only Acquirer.	70
Full Service Issuer Sends Transaction to Authorization-Only Acquirer.	71

Chapter 2 • Message Structure and Header Fields

VisaNet Data Message Structure.	72
---	----

Message Type Specifications.	73
Message Type Identifier.	74
Visa-Unique Specifications.	74
Programming Rules.	75
Message Length.	75
Data Representation.	75
Field Alignment.	76
Field Lengths.	76
ISO-Defined Numeric Field Example.	76
ISO-Defined Character Field Example.	77
Private-Use Numeric Field Example.	77
Padding Unused Positions.	78
Message Transmission.	78
Fields With Optional Subfields.	78
ISO TLV Format.	79
TLV Processing.	82
Bitmap Specifications.	82
First, or Primary, Bitmap.	83
Second Bitmap.	84
Third Bitmap.	85
Field Bitmaps.	86
Header Field 13.	86
Data Field 62.0.	87
Data Field 63.0.	87
VSDC Data Fields.	88
Message Header Field Specifications.	89
Standard Message Header.	89
Reject Message Header.	90
Constructing Message Headers.	91

Key to Header Field Descriptions.	92
Sequence.	92
Bit Numbers.	92
Header Field Description Components.	92
Header Field Descriptions.	93
Header Field 1 – Header Length.	93
Header Field 1 – Attributes.	93
Header Field 1 – Generated by.	93
Header Field 1 – Description.	94
Header Field 1 – Usage.	94
Header Field 1 – Field Edits.	94
Header Field 1 – Reject Codes.	94
Header Field 2 – Header Flag and Format.	94
Header Field 2 – Attributes.	94
Header Field 2 – Generated by.	94
Header Field 2 – Description.	95
Header Field 2 – Usage.	95
Header Field 2 – Field Edits.	95
Header Field 2 – Reject Codes.	95
Header Field 3 – Text Format.	95
Header Field 3 – Attributes.	95
Header Field 3 – Generated by.	96
Header Field 3 – Description.	96
Header Field 3 – Usage.	96
Header Field 3 – Field Edits.	96
Header Field 3 – Reject Codes.	97
Header Field 3 – Valid Values.	97
Header Field 4 – Total Message Length.	97
Header Field 4 – Attributes.	97

Header Field 4 – Generated by.	97
Header Field 4 – Description.	98
Header Field 4 – Usage.	98
Header Field 4 – Field Edits.	98
Header Field 4 – Reject Codes.	98
Header Field 5 – Destination Station ID.	99
Header Field 5 – Attributes.	99
Header Field 5 – Generated by.	99
Header Field 5 – Description.	99
Header Field 5 – Usage.	99
Header Field 5 – Field Edits.	99
Header Field 5 – Reject Codes.	99
Header Field 6 – Source Station ID.	100
Header Field 6 – Attributes.	100
Header Field 6 – Generated by.	100
Header Field 6 – Description.	100
Header Field 6 – Usage.	100
Header Field 6 – Field Edits.	100
Header Field 6 – Reject Codes.	101
Header Field 7 – Round-Trip Control Information.	101
Header Field 7 – Attributes.	101
Header Field 7 – Generated by.	101
Header Field 7 – Description.	101
Header Field 7 – Usage.	101
Header Field 7 – Field Edits.	102
Header Field 7 – Reject Codes.	102
Header Field 8 – V.I.P. Flags.	102
Header Field 8 – Attributes.	102
Header Field 8 – Generated by.	102

Header Field 8 – Description.	102
Header Field 8 – Usage.	102
Header Field 8 – Field Edits.	102
Header Field 8 – Reject Codes.	103
Header Field 9 – Message Status Flags.	103
Header Field 9 – Attributes.	103
Header Field 9 – Generated by.	103
Header Field 9 – Description.	103
Header Field 9 – Usage.	107
Header Field 9 – Field Edits.	107
Header Field 9 – Reject Codes.	107
Header Field 10 – Batch Number.	108
Header Field 10 – Attributes.	108
Header Field 10 – Generated by.	109
Header Field 10 – Description.	109
Header Field 10 – Usage.	109
Header Field 10 – Field Edits.	109
Header Field 10 – Reject Codes.	109
Header Field 11 – Reserved.	109
Header Field 11 – Attributes.	110
Header Field 11 – Generated by.	110
Header Field 11 – Description.	110
Header Field 11 – Usage.	110
Header Field 11 – Field Edits.	110
Header Field 11 – Reject Codes.	110
Header Field 12 – User Information.	110
Header Field 12 – Attributes.	111
Header Field 12 – Generated by.	111
Header Field 12 – Description.	111

Header Field 12 – Usage.	111
Header Field 12 – Field Edits.	111
Header Field 12 – Reject Codes.	111
Header Field 13 – Bitmap.	111
Header Field 13 – Attributes.	112
Header Field 13 – Generated by.	112
Header Field 13 – Description.	112
Header Field 13 – Usage.	112
Header Field 13 – Field Edits.	112
Header Field 13 – Reject Codes.	112
Header Field 14 – Bitmap, Reject Data Group.	112
Header Field 14 – Attributes.	113
Header Field 14 – Generated by.	113
Header Field 14 – Description.	113
Header Field 14 – Usage.	113
Header Field 14 – Field Edits.	113
Header Field 14 – Reject Codes.	113

Chapter 3 • Field Attributes

Field 127 Subfields.	114
Field 127 Subfields – Alphabetical Order.	115
Field Attributes.	116
Field Attributes.	117
Unused Message Fields.	127

Chapter 4 • Data Field Descriptions

Acronyms Used in Data Field Descriptions.	130
Definition of the Term "Mandatory".	135
Field 2 – Primary Account Number.	136
Field 2 – Attributes.	136

Field 2 – Description.	136
Field 2 – Usage.	136
Field 2 – Field Edits.	137
Field 2 – Reject Codes.	138
Field 2 – File Edits.	138
Field 2 – File Maintenance Error Codes.	138
Field 3 – Processing Code.	139
Field 3 – Attributes.	139
Field 3 – Description.	139
Field 3 – Usage.	139
Field 3 – Field Edits.	141
Field 3 – Reject Codes.	142
Field 3 – Valid Values.	142
Field 4 – Amount, Transaction.	144
Field 4 – Attributes.	144
Field 4 – Description.	144
Field 4 – Usage.	145
Field 4 – Field Edits.	146
Field 4 – Reject Codes.	147
Field 5 – Amount, Settlement.	148
Field 5 – Attributes.	148
Field 5 – Description.	148
Field 5 – Usage.	148
Field 5 – Field Edits.	149
Field 5 – Reject Codes.	149
Field 6 – Amount, Cardholder Billing.	150
Field 6 – Attributes.	150
Field 6 – Description.	150
Field 6 – Usage.	151

Field 6 – Field Edits.	151
Field 6 – Reject Codes.	152
Field 7 – Transmission Date and Time.	153
Field 7 – Attributes.	153
Field 7 – Description.	153
Field 7 – Usage.	153
Field 7 – Field Edits.	154
Field 7 – Reject Codes.	154
Field 9 – Conversion Rate, Settlement.	156
Field 9 – Attributes.	156
Field 9 – Description.	156
Field 9 – Usage.	156
Field 9 – Field Edits.	157
Field 9 – Reject Codes.	157
Field 10 – Conversion Rate, Cardholder Billing.	158
Field 10 – Attributes.	158
Field 10 – Description.	158
Field 10 – Usage.	158
Field 10 – Field Edits.	159
Field 10 – Reject Codes.	159
Field 11 – System Trace Audit Number.	160
Field 11 – Attributes.	160
Field 11 – Description.	160
Field 11 – Usage.	160
Field 11 – Field Edits.	161
Field 11 – Reject Codes.	161
Field 12 – Time, Local Transaction.	162
Field 12 – Attributes.	162
Field 12 – Description.	162

Field 12 – Usage.	162
Field 12 – Field Edits.	163
Field 12 – Reject Codes.	163
Field 13 – Date, Local Transaction.	164
Field 13 – Attributes.	164
Field 13 – Description.	164
Field 13 – Usage.	164
Field 13 – Field Edits.	165
Field 13 – Reject Codes.	165
Field 14 – Date, Expiration.	166
Field 14 – Attributes.	166
Field 14 – Description.	166
Field 14 – Usage.	166
Field 14 – Field Edits.	166
Field 14 – Reject Codes.	167
Field 14 – STIP Edits.	167
Field 15 – Date, Settlement.	168
Field 15 – Attributes.	168
Field 15 – Description.	168
Field 15 – Usage.	168
Field 15 – Field Edits.	169
Field 15 – Reject Codes.	169
Field 16 – Date, Conversion.	170
Field 16 – Attributes.	170
Field 16 – Description.	170
Field 16 – Usage.	170
Field 16 – Field Edits.	170
Field 16 – Reject Codes.	171
Field 18 – Merchant Type.	172

Field 18 – Attributes.	172
Field 18 – Description.	172
Field 18 – Usage.	172
Field 18 – Field Edits.	173
Field 18 – Reject Codes.	173
Field 18 – File Edits.	173
Field 18 – File Maintenance Error Codes.	174
Field 19 – Acquiring Institution Country Code.	175
Field 19 – Attributes.	175
Field 19 – Description.	175
Field 19 – Usage.	175
Field 19 – Field Edits.	176
Field 19 – Reject Codes.	176
Field 19 – File Edits.	176
Field 19 – File Maintenance Error Codes.	176
Field 20 – PAN Extended, Country Code.	177
Field 20 – Attributes.	177
Field 20 – Description.	177
Field 20 – Usage.	177
Field 20 – Field Edits.	178
Field 20 – Reject Codes.	178
Field 22 – Point-of-Service Entry Mode Code.	179
Field 22 – Attributes.	179
Field 22 – Description.	179
Field 22 – Usage.	179
Field 22 – Field Edits.	181
Field 22 – Reject Codes.	181
Field 22 – Valid Values.	182
Field 23 – Card Sequence Number.	183

Field 23 – Attributes.	183
Field 23 – Description.	183
Field 23 – Usage.	183
Field 23 – Field Edits.	184
Field 23 – Reject Codes.	184
Field 25 – Point-of-Service Condition Code.	185
Field 25 – Attributes.	185
Field 25 – Description.	185
Field 25 – Usage.	185
Field 25 – Field Edits.	186
Field 25 – Reject Codes.	186
Field 25 – Valid Values.	187
Field 26 – Point-of-Service PIN Capture Code.	188
Field 26 – Attributes.	188
Field 26 – Description.	188
Field 26 – Usage.	188
Field 26 – Field Edits.	188
Field 26 – Reject Codes.	188
Field 28 – Amount, Transaction Fee.	189
Field 28 – Attributes.	189
Field 28 – Description.	189
Field 28 – Usage.	189
Field 28 – Field Edits.	192
Field 28 – Reject Codes.	192
Field 32 – Acquiring Institution Identification Code.	193
Field 32 – Attributes.	193
Field 32 – Description.	193
Field 32 – Usage.	193
Field 32 – Field Edits.	194

Field 32 – Reject Codes.	195
Field 33 – Forwarding Institution Identification Code.	196
Field 33 – Attributes.	196
Field 33 – Description.	196
Field 33 – Usage.	196
Field 33 – Field Edits.	197
Field 33 – Reject Codes.	197
Field 34 – Acceptance Environment Data (TLV Format).	199
Field 34 – Attributes.	199
Field 34 – Description.	199
Field 34 – Usage.	200
Field 34 – Dataset ID 02	200
Field 34 – Field Edits.	200
Field 34 – Reject Codes.	200
Field 35 – Track 2 Data.	201
Field 35 – Attributes.	201
Field 35 – Description.	201
Field 35 – Usage.	201
Field 35 – Field Edits.	202
Field 35 – Reject Codes.	202
Field 37 – Retrieval Reference Number.	204
Field 37 – Attributes.	204
Field 37 – Description.	204
Field 37 – Usage.	204
Field 37 – Field Edits.	206
Field 37 – Reject Codes.	206
Field 38 – Authorization Identification Response.	207
Field 38 – Attributes.	207
Field 38 – Description.	207

Field 38 – Usage.	207
Field 38 – Field Edits.	208
Field 38 – Reject Codes.	208
Field 39 – Response Code.	209
Field 39 – Attributes.	209
Field 39 – Description.	209
Field 39 – Usage.	209
Field 39 – Field Edits.	212
Field 39 – Reject Codes.	214
Field 39 – Valid Values.	214
Field 41 – Card Acceptor Terminal Identification.	219
Field 41 – Attributes.	219
Field 41 – Description.	219
Field 41 – Usage.	219
Field 41 – Field Edits.	220
Field 41 – Reject Codes.	220
Field 42 – Card Acceptor Identification Code.	221
Field 42 – Attributes.	221
Field 42 – Description.	221
Field 42 – Usage.	221
Field 42 – Field Edits.	222
Field 42 – Reject Codes.	222
Field 43 – Card Acceptor Name/Location.	223
Field 43 – Attributes.	223
Field 43 – Description.	223
Field 43 – Usage.	224
Field 43 – Field Edits.	224
Field 43 – Reject Codes.	225
Field 44 - Additional Response Data.	226

Field 44 - Attributes.	226
Field 44 - Description.	226
Field 44 - Usage.	228
Field 44 - Field Edits.	228
Field 44 - Reject Codes.	228
Field 44.1 – Response Source/Reason Code.	229
Field 44.1 – Attributes.	229
Field 44.1 – Description.	229
Field 44.1 – Usage.	229
Field 44.1 – Field Edits.	229
Field 44.1 – Reject Codes.	230
Field 44.1 – Valid Values.	230
Field 44.4 – Extended STIP Reason Code.	231
Field 44.4 – Attributes.	231
Field 44.4 – Description.	231
Field 44.4 – Usage.	231
Field 44.4 – Field Edits.	231
Field 44.4 – Reject Codes.	231
Field 44.4 – Valid Values.	232
Field 44.5 – CVV/iCVV Results Code.	233
Field 44.5 – Attributes.	233
Field 44.5 – Description.	233
Field 44.5 – Usage.	233
Field 44.5 – Field Edits.	233
Field 44.5 – Reject Codes.	234
Field 44.5 – Valid Values.	234
Field 44.8 – Card Authentication Results Code.	235
Field 44.8 – Attributes.	235
Field 44.8 – Description.	235

Field 44.8 – Usage.	.235
Field 44.8 – Field Edits.	.236
Field 44.8 – Reject Codes.	.236
Field 44.8 – Valid Values.	.236
Field 44.11 – Original Response Code.	.237
Field 44.11 – Attributes.	.237
Field 44.11 – Description.	.237
Field 44.11 – Usage.	.237
Field 44.11 – Field Edits.	.238
Field 44.11 – Reject Codes.	.238
Field 44.11 – Valid Values.	.238
Field 46 – Amounts, Fees.	.239
Field 46 – Attributes.	.239
Field 46 – Description.	.239
Field 46 – Usage.	.240
Field 46 – Field Edits.	.241
Field 46 – Reject Codes.	.241
Field 48 – Additional Data - Private.	.242
Field 48 – Attributes.	.242
Field 48 – Description.	.242
Field 48 – Usage.	.243
Field 48 – Field Edits.	.243
Field 48 – Reject Codes.	.244
Field 48, Usage 1b – Error Codes in 0312 Responses.	.245
Field 48, Usage 1b – Attributes.	.245
Field 48, Usage 1b – Description.	.245
Field 48, Usage 1b – Usage.	.245
Field 48, Usage 1b – Field Edits.	.245
Field 48, Usage 1b – Reject Codes.	.246

Field 48, Usage 1c – Reserved.	247
Field 48, Usage 1c – Attributes.	247
Field 48, Usage 2 – Unformatted Text in Authorization/Reversal Messages.	248
Field 48, Usage 2 – Attributes.	248
Field 48, Usage 2 – Description.	248
Field 48, Usage 2 – Usage.	248
Field 48, Usage 2 – Field Edits.	249
Field 48, Usage 2 – Reject Codes.	249
Field 48, Usage 5 – Visa Fee Collections/Funds-Disbursements	250
Field 48, Usage 5 – Attributes.	250
Field 48, Usage 5 – Description.	250
Field 48, Usage 5 – Usage.	250
Field 48, Usage 5 – Field Edits.	251
Field 48, Usage 5 – Reject Codes.	251
Field 48, Usage 6b – VSS Funds Transfer Totals (0620).	252
Field 48, Usage 6b – Attributes.	252
Field 48, Usage 6b – Description.	252
Field 48, Usage 6b – Usage.	252
Field 48, Usage 6b – Field Edits.	253
Field 48, Usage 6b – Reject Codes.	253
Field 48, Usage 6b – Valid Values.	253
Field 48, Usage 7a – Adjustments, Non-Visa Dispute Financials and Dispute Response Financials.	254
Field 48, Usage 7a – Attributes.	254
Field 48, Usage 7a – Description.	254
Field 48, Usage 7a – Usage.	255
Field 48, Usage 7a – Field Edits.	256
Field 48, Usage 7a – Reject Codes.	256
Field 48, Usage 9a – Text Messages.	257
Field 48, Usage 9a – Attributes.	257

Field 48, Usage 9a – Description.	257
Field 48, Usage 9a – Usage.	257
Field 48, Usage 9a – Field Edits.	258
Field 48, Usage 9a – Reject Codes.	258
Field 48, Usage 14 – Dynamic Key Exchange Working Key Check Value.	259
Field 48, Usage 14 – Attributes.	259
Field 48, Usage 14 – Description.	259
Field 48, Usage 14 – Usage.	259
Field 48, Usage 14 – Field Edits.	260
Field 48, Usage 14 – Reject Codes.	260
Field 48, Usage 31 – FRS-Supplied Error and Warning Data.	261
Field 48, Usage 31 – Attributes.	261
Field 48, Usage 31 – Description.	261
Field 48, Usage 31 – Usage.	262
Field 48, Usage 31 – Field Edits.	262
Field 48, Usage 31 – Reject Codes.	262
Field 48, Usage 39a – Dispute Detail.	263
Field 48, Usage 39a – Attributes.	263
Field 48, Usage 39a – Description.	263
Field 48, Usage 39a – Usage.	264
Field 48, Usage 39a – Field Edits.	264
Field 48, Usage 39a – Reject Codes.	264
Field 48, Usage 39a – Valid Values.	264
Field 48, Usage 39b – Dispute Detail.	265
Field 48, Usage 39b – Attributes.	265
Field 48, Usage 39b – Description.	265
Field 48, Usage 39b – Usage.	266
Field 48, Usage 39b – Field Edits.	266
Field 48, Usage 39b – Reject Codes.	266

Field 48, Usage 39b – Valid Values.	266
Field 49 – Currency Code, Transaction.	268
Field 49 – Attributes.	268
Field 49 – Description.	268
Field 49 – Usage.	268
Field 49 – Field Edits.	269
Field 49 – Reject Codes.	269
Field 50 – Currency Code, Settlement.	270
Field 50 – Attributes.	270
Field 50 – Description.	270
Field 50 – Usage.	270
Field 50 – Field Edits.	271
Field 50 – Reject Codes.	271
Field 51 – Currency Code, Cardholder Billing.	272
Field 51 – Attributes.	272
Field 51 – Description.	272
Field 51 – Usage.	272
Field 51 – Field Edits.	273
Field 51 – Reject Codes.	273
Field 52 – Personal Identification Number (PIN) Data.	274
Field 52 – Attributes.	274
Field 52 – Description.	274
Field 52 – Usage.	274
Field 52 – Field Edits.	274
Field 52 – Reject Codes.	275
Field 53 – Security-Related Control Information.	276
Field 53 – Attributes.	276
Field 53 – Description.	276
Field 53 – Usage.	276

Field 53 – Field Edits.	277
Field 53 – Reject Codes.	278
Field 53 – Valid Values.	278
Field 53, Usage 2 – Security-Related Control Information.	279
Field 53, Usage 2 – Attributes.	279
Field 53, Usage 2 – Description.	279
Field 53, Usage 2 – Usage.	280
Field 53, Usage 2 – Field Edits.	282
Field 53, Usage 2 – Reject Codes.	283
Field 54 – Additional Amounts.	284
Field 54 – Attributes.	284
Field 54 – Description.	284
Field 54 – Usage.	287
Field 54 – Field Edits.	287
Field 54 – Reject Codes.	288
Field 54 – Valid Values.	289
Field 55 – Integrated Circuit Card (ICC)-Related Data.	292
Field 55 – Attributes.	292
Field 55 – Description.	292
Field 55 – Usage.	292
Field 55 – Field Edits.	292
Field 55 – Reject Codes.	292
Field 55, Usage 1 – VSDC Chip Data.	292
Field 55, Usage 1 – Attributes.	293
Field 55, Usage 1 – Description.	293
Field 55, Usage 1 – Usage.	299
Field 55, Usage 1 – Field Edits.	299
Field 55, Usage 1 – Reject Codes.	299
Field 56 – Customer Related Data.	300

Field 56 – Attributes.	300
Field 56 – Description.	300
Field 56 – Usage.	301
Field 56 – Field 56 Dataset ID 01.	302
Field 56 – Field 56 Dataset ID 02.	303
Field 56 – Field 56 Dataset ID 03.	303
Field 56 – Field 56 Dataset ID 05.	303
Field 56 – Field Edits.	306
Field 56 – Reject Codes.	306
Field 59 – National Point-of-Service Geographic Data.	307
Field 59 – Attributes.	307
Field 59 – Description.	307
Field 59 – Usage.	308
Field 59 – Field Edits.	310
Field 59 – Reject Codes.	310
Field 59 – Valid Values.	311
Field 60 – Additional POS Information.	314
Field 60 – Attributes.	314
Field 60 – Description.	314
Field 60 – Usage.	315
Field 60 – Field Edits.	318
Field 60 – Reject Codes.	318
Field 60 – Valid Values.	318
Field 61 – Other Amounts.	321
Field 61 – Attributes.	321
Field 61 – Description.	321
Field 61 – Usage.	322
Field 61 – Field Edits.	322
Field 61 – Reject Codes.	322

Field 62 – Custom Payment Service (CPS) Fields Bitmap.	323
Field 62 – Attributes.	323
Field 62 – Description.	323
Field 62 – Usage.	324
Field 62 – Field Edits.	324
Field 62 – Reject Codes.	324
Field 62.0 – Field 62 Bitmap.	325
Field 62.0 – Attributes.	325
Field 62.0 – Description.	325
Field 62.0 – Usage.	326
Field 62.0 – Field Edits.	326
Field 62.0 – Reject Codes.	327
Field 62.1 – Authorization Characteristics Indicator (Bitmap Format).	328
Field 62.1 – Attributes.	328
Field 62.1 – Description.	328
Field 62.1 – Usage.	328
Field 62.1 – Field Edits.	330
Field 62.1 – Reject Codes.	330
Field 62.1 – Valid Values.	330
Field 62.2 – Transaction Identifier (Bitmap Format).	331
Field 62.2 – Attributes.	331
Field 62.2 – Description.	331
Field 62.2 – Usage.	331
Field 62.2 – Field Edits.	332
Field 62.2 – Reject Codes.	333
Field 62.21 – Online Risk Assessment Risk Score and Reason Codes.	334
Field 62.21 – Attributes.	334
Field 62.21 – Description.	334
Field 62.21 – Usage.	334

Field 62.21 – Field Edits.	335
Field 62.21 – Reject Codes.	335
Field 62.22 – Online Risk Assessment Condition Codes.	336
Field 62.22 – Attributes.	336
Field 62.22 – Description.	336
Field 62.22 – Usage.	336
Field 62.22 – Reject Codes.	337
Field 62.22 – Valid Values.	337
Field 62.23 – Product ID.	339
Field 62.23 – Attributes.	339
Field 62.23 – Description.	339
Field 62.23 – Usage.	339
Field 62.23 – Field Edits.	340
Field 62.23 – Reject Codes.	340
Field 62.23 – File Edits.	340
Field 62.23 – File Maintenance Error Codes.	340
Field 62.23 – Valid Values.	340
Field 62.24 – Program Identifier.	343
Field 62.24 – Attributes.	343
Field 62.24 – Description.	343
Field 62.24 – Usage.	343
Field 62.24 – Field Edits.	344
Field 62.24 – Reject Codes.	344
Field 62.24 – File Edits.	344
Field 62.24 – File Maintenance Error Codes.	344
Field 62.24 – Valid Values.	344
Field 62.27 – ATM Routing Table Unique Identifier.	345
Field 62.27 – Attributes.	345
Field 62.27 – Description.	345

Field 62.27 – Usage.	345
Field 62.27 – Field Edits.	346
Field 62.27 – Reject Codes.	346
Field 63 – V.I.P. Private-Use Fields.	347
Field 63 – Attributes.	347
Field 63 – Description.	347
Field 63 – Usage.	348
Field 63 – Field Edits.	348
Field 63 – Reject Codes.	348
Field 63.0 – Field 63 Bitmap.	349
Field 63.0 – Attributes.	349
Field 63.0 – Description.	349
Field 63.0 – Usage.	350
Field 63.0 – Field Edits.	350
Field 63.0 – Reject Codes.	350
Field 63.1 – Network Identification Code.	351
Field 63.1 – Attributes.	351
Field 63.1 – Description.	351
Field 63.1 – Usage.	351
Field 63.1 – Field Edits.	353
Field 63.1 – Reject Codes.	353
Field 63.1 – Valid Values.	354
Field 63.3 – Message Reason Code.	355
Field 63.3 – Attributes.	355
Field 63.3 – Description.	355
Field 63.3 – Usage.	355
Field 63.3 – Field Edits.	356
Field 63.3 – Reject Codes.	357
Field 63.3 – Valid Values.	357

Field 63.4 – STIP/Switch Reason Code.	.366
Field 63.4 – Attributes.	.366
Field 63.4 – Description.	.366
Field 63.4 – Usage.	.366
Field 63.4 – Field Edits.	.367
Field 63.4 – Reject Codes.	.367
Field 63.4 – Valid Values.	.367
Field 63.6 - Chargeback Reduction/BASE II Flags.	.371
Field 63.6 – Attributes.	.371
Field 63.6 – Description.	.371
Field 63.6 – Usage.	.372
Field 63.6 – Field Edits.	.372
Field 63.6 – Reject Codes.	.372
Field 63.6 – Valid Values.	.372
Field 63.8 – Visa Acquirer's Business ID.	.374
Field 63.8 – Attributes.	.374
Field 63.8 – Description.	.374
Field 63.8 – Usage.	.374
Field 63.8 – Field Edits.	.374
Field 63.8 – Reject Codes.	.374
Field 63.9 – Fraud Data.	.375
Field 63.9 – Attributes.	.375
Field 63.9 – Description.	.375
Field 63.9 – Usage.	.375
Field 63.9 – Field Edits.	.376
Field 63.9 – Reject Codes.	.376
Field 63.9 – Valid Values.	.376
Field 63.11 – Reimbursement Attribute.	.378
Field 63.11 – Attributes.	.378

Field 63.11 – Description.	378
Field 63.11 – Usage.	378
Field 63.11 – Field Edits.	378
Field 63.11 – Reject Codes.	378
Field 63.11 – Valid Values.	379
Field 63.12 – Sharing Group Code.	381
Field 63.12 – Attributes.	381
Field 63.12 – Description.	381
Field 63.12 – Usage.	381
Field 63.12 – Field Edits.	381
Field 63.12 – Reject Codes.	381
Field 63.12 – Valid Values.	382
Field 63.13 – Decimal Positions Indicator.	383
Field 63.13 – Attributes.	383
Field 63.13 – Description.	383
Field 63.13 – Usage.	384
Field 63.13 – Field Edits.	384
Field 63.13 – Reject Codes.	384
Field 63.13 – Valid Values.	384
Field 63.14 – Issuer Currency Conversion Data.	386
Field 63.14 – Attributes.	386
Field 63.14 – Description.	386
Field 63.14 – Usage.	386
Field 63.14 – Field Edits.	387
Field 63.14 – Reject Codes.	387
Field 63.15 – Reserved	388
Field 63.15 – Attributes.	388
Field 63.15 – Description.	388
Field 63.15 – Usage.	388

Field 63.15 –Field Edits.	388
Field 63.15 – Reject Codes.	388
Field 63.19 – Fee Program Indicator	389
Field 63.19 – Attributes.	389
Field 63.19 – Description.	389
Field 63.19 – Usage.	389
Field 63.19 – Field Edits.	391
Field 63.19 – Reject Codes.	391
Field 63.21 – Charge Indicator.	392
Field 63.21 – Attributes.	392
Field 63.21 – Description.	392
Field 63.21 – Usage.	392
Field 63.21 – Field Edits.	394
Field 63.21 – Reject Codes.	394
Field 63.21 – Valid Values.	394
Field 66 – Settlement Code.	395
Field 66 – Attributes.	395
Field 66 – Description.	395
Field 66 – Usage.	395
Field 66 – Field Edits.	395
Field 66 – Reject Codes.	395
Field 66 – Valid Values.	396
Field 68 – Receiving Institution Country Code.	397
Field 68 – Attributes.	397
Field 68 – Description.	397
Field 68 – Usage.	397
Field 68 – Field Edits.	397
Field 68 – Reject Codes.	397
Field 69 – Settlement Institution Country Code.	398

Field 69 – Attributes.	398
Field 69 – Description.	398
Field 69 – Usage.	398
Field 69 – Field Edits.	398
Field 69 – Reject Codes.	398
Field 70 – Network Management Information Code.	399
Field 70 – Attributes.	399
Field 70 – Description.	399
Field 70 – Usage.	399
Field 70 – Field Edits.	400
Field 70 – Reject Codes.	400
Field 70 – Valid Values.	401
Field 73 – Date, Action.	403
Field 73 – Attributes.	403
Field 73 – Description.	403
Field 73 – Usage.	403
Field 73 – Field Edits.	404
Field 73 – Reject Codes.	404
Field 73 – File Edits.	404
Field 73 – File Maintenance Error Codes.	404
Field 74 – Credits, Number.	405
Field 74 – Attributes.	405
Field 74 – Description.	405
Field 74 – Usage.	405
Field 74 – Field Edits.	405
Field 74 – Reject Codes.	405
Field 75 – Credits, Reversal Number.	406
Field 75 – Attributes.	406
Field 75 – Description.	406

Field 75 – Usage.	406
Field 75 – Field Edits.	406
Field 75 – Reject Codes.	406
Field 76 – Debits, Number.	407
Field 76 – Attributes.	407
Field 76 – Description.	407
Field 76 – Usage.	407
Field 76 – Field Edits.	407
Field 76 – Reject Codes.	407
Field 77 – Debits, Reversal Number.	408
Field 77 – Attributes.	408
Field 77 – Description.	408
Field 77 – Usage.	408
Field 77 – Field Edits.	408
Field 77 – Reject Codes.	408
Field 86 – Credits, Amount.	409
Field 86 – Attributes.	409
Field 86 – Description.	409
Field 86 – Usage.	409
Field 86 – Field Edits.	409
Field 86 – Reject Codes.	409
Field 87 – Credits, Reversal Amount.	410
Field 87 – Attributes.	410
Field 87 – Description.	410
Field 87 – Usage.	410
Field 87 – Field Edits.	410
Field 87 – Reject Codes.	410
Field 88 – Debits, Amount.	411
Field 88 – Attributes.	411

Field 88 – Description.	411
Field 88 – Usage.	411
Field 88 – Field Edits.	411
Field 88 – Reject Codes.	411
Field 89 – Debits, Reversal Amount.	412
Field 89 – Attributes.	412
Field 89 – Description.	412
Field 89 – Usage.	412
Field 89 – Field Edits.	412
Field 89 – Reject Codes.	412
Field 90 – Original Data Elements.	413
Field 90 – Attributes.	413
Field 90 – Description.	413
Field 90 – Usage.	414
Field 90 – Field Edits.	415
Field 90 – Reject Codes.	415
Field 91 – File Update Code.	416
Field 91 – Attributes.	416
Field 91 – Description.	416
Field 91 – Usage.	416
Field 91 – Field Edits.	416
Field 91 – Reject Codes.	416
Field 91 – File Edits.	417
Field 91 – File Maintenance Error Codes.	417
Field 91 – Valid Values.	417
Field 92 – File Security Code.	418
Field 92 – Attributes.	418
Field 92 – Description.	418
Field 92 – Usage.	418

Field 92 – Field Edits.	.418
Field 92 – Reject Codes.	418
Field 92 – File Edits.	418
Field 92 – File Maintenance Error Codes.	.418
Field 95 – Replacement Amounts.	.419
Field 95 – Attributes.	.419
Field 95 – Description.	419
Field 95 – Usage.	419
Field 95 – Field Edits.	.420
Field 95 – Reject Codes.	420
Field 96 – Reserved.	.421
Field 96 – Reserved.	421
Field 96 – Description.	421
Field 96 – Usage.	421
Field 96 – Field Edits.	.421
Field 96 – Reject Codes.	421
Field 97 – Amount, Net Settlement.	.422
Field 97 – Attributes.	.422
Field 97 – Description.	422
Field 97 – Usage.	422
Field 97 – Field Edits.	.422
Field 97 – Reject Codes.	422
Field 99 – Settlement Institution Identification Code.	423
Field 99 – Attributes.	.423
Field 99 – Description.	423
Field 99 – Usage.	423
Field 99 – Field Edits.	.424
Field 99 – Reject Codes.	424
Field 100 – Receiving Institution Identification Code.	425

Field 100 – Attributes.	425
Field 100 – Description.	425
Field 100 – Usage.	425
Field 100 – Field Edits.	426
Field 100 – Reject Codes.	426
Field 101 – File Name.	427
Field 101 – Attributes.	427
Field 101 – Description.	427
Field 101 – Usage.	427
Field 101 – Field Edits.	428
Field 101 – Reject Codes.	428
Field 101 – File Edits.	428
Field 101 – File Maintenance Error Codes.	428
Field 101 – Valid Values.	428
Field 102 – Account Identification 1.	430
Field 102 – Attributes.	430
Field 102 – Description.	430
Field 102 – Usage.	430
Field 102 – Field Edits.	433
Field 102 – Reject Codes.	433
Field 102 – Valid Values.	433
Field 103 – Account Identification 2.	434
Field 103 – Attributes.	434
Field 103 – Description.	434
Field 103 – Usage.	434
Field 103 – Field Edits.	436
Field 103 – Reject Codes.	436
Field 103 – Valid Values.	436
Field 104, Usage 2 – Transaction-Specific Data.	437

Field 104, Usage 2 - Attributes.	437
Field 104, Usage 2 – Description.	437
Field 104, Usage 2 – Usage.	438
Field 104, Usage 2 – Dataset ID 57.	439
Field 104, Usage 2 - Dataset ID 5D.	440
Field 104, Usage 2 - Dataset ID 64.	444
Field 104, Usage 2 - Dataset ID 6C.	444
Field 104, Usage 2 - Dataset ID 6D.	447
Field 104, Usage 2 - Dataset ID 70.	447
Field 104, Usage 2 – Field Edits.	449
Field 104, Usage 2 – Reject Codes.	449
Field 104, Usage 2 – File Maintenance Error Codes.	449
Field 104, Usage 2 – Valid Values.	449
Field 105 – Double-Length DES Key (Triple DES).	450
Field 105 – Attributes.	450
Field 105 – Description.	450
Field 105 – Usage.	450
Field 105 – Field Edits.	450
Field 105 – Reject Codes.	450
Field 110 – Encryption Data (TLV Format).	451
Field 110 – Attributes.	451
Field 110 – Description.	451
Field 110 – Usage.	452
Field 110 – Field Edits.	454
Field 110 – Reject Codes.	455
Field 110 – File Maintenance Error Codes.	455
Field 111 – Additional Transaction Specific Data (TLV Format).	456
Field 111 – Attributes.	456
Field 111 – Description.	456

Field 111 – Usage.	457
Field 111 – Dataset ID 01.	457
Field 111 – Dataset ID 02.	460
Field 111 – Dataset ID 07.	461
Field 111 – Dataset ID 56.	462
Field 111 – Field Edits.	462
Field 111 – Reject Codes.	463
Field 114 – Domestic and Localized Data (TLV Format).	464
Field 114 – Attributes.	464
Field 114 – Description.	464
Field 114 – Usage.	465
Field 114 – Dataset ID 6C.	465
Field 114 – Dataset ID 6D.	467
Field 114 – Dataset ID 70.	469
Field 114 – Field Edits.	469
Field 114 – Reject Codes.	470
Field 115 – Additional Trace Data.	471
Field 115 – Attributes.	471
Field 115 – Description.	471
Field 115 – Usage.	471
Field 115 – Field Edits.	472
Field 115 – Reject Codes.	472
Field 117 – National Use.	473
Field 117 – Attributes.	473
Field 117 – Description.	473
Field 117 – Usage.	474
Field 117 – Field Edits.	474
Field 117 – Reject Codes.	474
Field 117, Usage 2 – Turkish National Data.	475

Field 117, Usage 2 – Attributes.	475
Field 117, Usage 2 – Description.	475
Field 117, Usage 2 – Usage.	476
Field 117, Usage 2 – Field Edits.	476
Field 117, Usage 2 – Reject Codes.	476
Field 117, Usage 3 – Sweden National Data (ATM).	477
Field 117, Usage 3 – Attributes.	477
Field 117, Usage 3 – Description.	477
Field 117, Usage 3 – Usage.	477
Field 117, Usage 3 – Field Edits.	478
Field 117, Usage 3 – Reject Codes.	478
Field 117, Usage 4 – Colombia National Data.	479
Field 117, Usage 4 – Attributes.	479
Field 117, Usage 4 – Description.	479
Field 117, Usage 4 – Usage.	479
Field 117, Usage 4 – Field Edits.	480
Field 117, Usage 4 – Reject Codes.	480
Field 118 – Intra-Country Data.	481
Field 118 – Attributes.	481
Field 118 – Description.	481
Field 118 – Usage.	481
Field 118 – Field Edits.	482
Field 118 – Reject Codes.	482
Field 118, Usage 3 - Sweden (ATM).	483
Field 118, Usage 3 - Attributes.	483
Field 118, Usage 3 - Description.	483
Field 118, Usage 3 - Usage.	484
Field 118, Usage 3 - Field Edits.	484
Field 118, Usage 3 - Reject Codes.	484

Field 118, Usage 3 - Valid Values.	484
Field 119 – Settlement Service Data.	487
Field 119 – Attributes.	487
Field 119 – Description.	487
Field 119 – Usage.	488
Field 119 – Field Edits.	488
Field 119 – Reject Codes.	488
Field 119, Usage 1 - Client-Calculated IRF.	489
Field 119, Usage 1 - Attributes.	489
Field 119, Usage 1 - Description.	489
Field 119, Usage 1 - Usage.	489
Field 119, Usage 1 - Field Edits.	490
Field 119, Usage 1 - Reject Codes.	490
Field 119, Usage 2 - Mexico Client-Calculated IRF.	491
Field 119, Usage 2 - Attributes.	491
Field 119, Usage 2 - Description.	491
Field 119, Usage 2 - Usage.	492
Field 119, Usage 2 - Field Edits.	492
Field 119, Usage 2 - Reject Codes.	493
Field 119, Usage 3 - Colombia Domestic Data.	494
Field 119, Usage 3 - Attributes.	494
Field 119, Usage 3 - Description.	494
Field 119, Usage 3 - Usage.	496
Field 119, Usage 3 - Field Edits.	496
Field 119, Usage 3 - Reject Codes.	497
Field 119, Usage 4 - Brazil National Data.	498
Field 119, Usage 4 - Attributes.	498
Field 119, Usage 4 - Description.	498
Field 119, Usage 4 - Usage.	499

Field 119, Usage 4 - Field Edits.	499
Field 119, Usage 4 - Reject Codes.	499
Field 119, Usage 5 - Argentina Domestic Data.	500
Field 119, Usage 5 - Attributes.	500
Field 119, Usage 5 - Description.	500
Field 119, Usage 5 - Usage.	502
Field 119, Usage 5 - Field Edits.	502
Field 119, Usage 5 - Reject Codes.	503
Field 119, Usage 6 - Chile Domestic Data.	504
Field 119, Usage 6 - Attributes.	504
Field 119, Usage 6 - Description.	504
Field 119, Usage 6 - Usage.	507
Field 119, Usage 6 - Field Edits.	507
Field 119, Usage 6 - Reject Codes.	508
Field 121 – Issuing Institution Identification Code.	509
Field 121 – Attributes.	509
Field 121 – Description.	509
Field 121 – Usage.	509
Field 121 – Field Edits.	510
Field 121 – Reject Codes.	510
Field 121 – File Edits.	510
Field 121 – File Maintenance Error Codes.	510
Field 123—Verification Data.	511
Field 123—Attributes.	511
Field 123—Description.	511
Field 123—Usage.	511
Field 123—Field Edits.	511
Field 123—Reject Codes.	511
Field 123—Verification Data (Fixed Format).	512

Field 123—Attributes.	512
Field 123—Description.	512
Field 123—Usage.	513
Field 123—Field Edits.	514
Field 123—Reject Codes.	514
Field 123, Usage 2—Verification & Token Data (TLV Format).	515
Field 123, Usage 2—Attributes.	515
Field 123, Usage 2—Description.	515
Field 123, Usage 2—Usage.	516
Field 123, Usage 2—Dataset ID 66.	516
Field 123, Usage 2—Dataset ID 67.	518
Field 123, Usage 2—Dataset ID 68.	520
Field 123, Usage 2—Dataset ID 69.	526
Field 123, Usage 2—Dataset ID 70.	528
Field 123, Usage 2—Field Edits.	529
Field 123, Usage 2—Reject Codes.	529
Field 125 – Supporting Information.	530
Field 125 – Attributes.	530
Field 125 – Description.	530
Field 125 – Usage.	530
Field 125 – Field Edits.	530
Field 125 – Reject Codes.	530
Field 125, Usage 2 – Supporting Information (TLV Format).	531
Field 125, Usage 2 – Attributes.	531
Field 125, Usage 2 – Description.	531
Field 125, Usage 2 – Usage.	531
Field 125, Usage 2 – Dataset ID 01.	532
Field 125, Usage 2 – Dataset ID 02.	533
Field 125, Usage 2 – Dataset ID 03.	536

Field 125, Usage 2 – Dataset ID 67.	539
Field 125, Usage 2 – Dataset ID 69.	540
Field 125, Usage 2 – Dataset ID 70.	540
Field 125, Usage 2 – Dataset ID 6B.	542
Field 125, Usage 2 – Field Edits.	542
Field 125, Usage 2 – Reject Codes.	542
Field 125, Usage 5 – Additional Fraud Information.	543
Field 125, Usage 5 – Attributes.	543
Field 125, Usage 5 – Description.	543
Field 125, Usage 5 – Usage.	547
Field 125, Usage 5 – Field Edits.	547
Field 125, Usage 5 – Reject Codes.	547
Field 126 – Visa Private-Use Fields.	548
Field 126 – Attributes.	548
Field 126 – Description.	548
Field 126 – Usage.	549
Field 126 – Field Edits.	549
Field 126 – Reject Codes.	549
Field 126.0 – Field 126 Bitmap.	550
Field 126.0 – Attributes.	550
Field 126.0 – Description.	550
Field 126.0 – Usage.	551
Field 126.0 – Field Edits.	551
Field 126.0 – Reject Codes.	551
Field 126.12 – Service Indicators.	552
Field 126.12 – Attributes.	552
Field 126.12 – Description.	552
Field 126.12 – Usage.	552
Field 126.12 – Field Edits.	553

Field 126.12 – Reject Codes.	553
Field 126.19 – Dynamic Currency Conversion Indicator.	554
Field 126.19 – Attributes.	554
Field 126.19 – Description.	554
Field 126.19 – Usage.	554
Field 126.19 – Field Edits.	555
Field 126.19 – Reject Codes.	555
Field 127 – File Maintenance.	556
Field 127 – Attributes.	556
Field 127 – Description.	556
Field 127 – Usage.	556
Field 127 – Field Edits.	558
Field 127 – Reject Codes.	558
Field 127C.1 – State Province Region Code Identifier.	559
Field 127C.1 – Applies to.	559
Field 127C.1 – Attributes.	559
Field 127C.1 – Description.	559
Field 127C.1 – Usage.	559
Field 127C.1 – Field Edits.	559
Field 127C.1 – Reject Codes.	559
Field 127C.1 – File Edits.	560
Field 127C.1 – File Maintenance Error Codes.	560
Field 127C.1 – Valid Values.	560
Field 127C.2 – State Province Region Code	561
Field 127C.2 – Applies to.	561
Field 127C.2 – Attributes.	561
Field 127C.2 – Description.	561
Field 127C.2 – Usage.	561
Field 127C.2 – Field Edits.	561

Field 127C.2 – Reject Codes.	561
Field 127C.2 – File Edits.	562
Field 127C.2 – File Maintenance Error Codes.	562
Field 127E.1 – Action Code.	563
Field 127E.1 – Applies to.	563
Field 127E.1 – Attributes.	563
Field 127E.1 – Description.	563
Field 127E.1 – Usage.	563
Field 127E.1 – Field Edits.	564
Field 127E.1 – Reject Codes.	564
Field 127E.1 – Valid Values.	564
Field 127E.2 – Region Coding.	566
Field 127E.2 – Applies to.	566
Field 127E.2 – Attributes.	566
Field 127E.2 – Description.	566
Field 127E.2 – Usage.	566
Field 127E.2 – Field Edits.	567
Field 127E.2 – Reject Codes.	567
Field 127E.2 – File Maintenance Error Codes.	567
Field 127E.2 – Valid Values.	567
Field 127E.3 – Cardholder Spending Amount Limit.	568
Field 127E.3 – Applies to.	568
Field 127E.3 – Attributes.	568
Field 127E.3 – Description.	568
Field 127E.3 – Usage.	568
Field 127E.3 – Field Edits.	569
Field 127E.3 – Reject Codes.	569
Field 127E.3 – File Edits.	569
Field 127E.3 – File Maintenance Error Codes.	569

Field 127E.4 – Cardholder Spending Count Limit.	.570
Field 127E.4 – Applies to.	.570
Field 127E.4 – Attributes.	.570
Field 127E.4 – Description.	.570
Field 127E.4 – Usage.	.570
Field 127E.4 – Field Edits.	.571
Field 127E.4 – Reject Codes.	.571
Field 127E.4 – File Edits.	.571
Field 127E.4 – File Maintenance Error Codes.	.571
Field 127P.1 – PIN Verification Data.	.572
Field 127P.1 – Applies to.	.572
Field 127P.1 – Attributes.	.572
Field 127P.1 – Description.	.572
Field 127P.1 – Usage.	.572
Field 127P.1 – Field Edits.	.573
Field 127P.1 – Reject Codes.	.573
Field 127P.1 – File Edits.	.573
Field 127P.1 – File Maintenance Error Codes.	.573
Field 127P.1 – Valid Values.	.574
Field 127R.1 Through 127R.5 – Filler.	.575
Field 127R.1 Through 127R.5 – Applies to.	.575
Field 127R.1 Through 127R.5 – Attributes.	.575
Field 127R.1 Through 127R.5 – Description.	.575
Field 127R.1 Through 127R.5 – Usage.	.575
Field 127R.1 Through 127R.5 – Field Edits.	.575
Field 127R.1 Through 127R.5 – Reject Codes.	.575
Field 127R.6 Through 127R.23 – Activity Limits.	.576
Field 127R.6 Through 127R.23 – Applies to.	.576
Field 127R.6 Through 127R.23 – Attributes.	.576

Field 127R.6 Through 127R.23 – Description.	576
Field 127R.6 Through 127R.23 – Usage.	577
Field 127R.6 Through 127R.23 – Field Edits.	577
Field 127R.6 Through 127R.23 – Reject Codes.	577
Field 127.L1 – ALP Product File Maintenance (Inquire only).	578
Field 127.L1 – Attributes.	578
Field 127.L1 – Description.	578
Field 127.L1 – Usage.	578
Field 127.L1 – Field Edits.	579
Field 127.L1 – Reject Codes.	579
Field 127.L1 – File Edits.	579
Field 127.L1 – File Maintenance Error Codes.	579
Field 130 – Terminal Capability Profile.	580
Field 130 – Attributes.	580
Field 130 – Description.	580
Field 130 – Usage.	581
Field 130 – Field Edits.	582
Field 130 – Reject Codes.	582
Field 131 – Terminal Verification Results (TVR).	583
Field 131 – Attributes.	583
Field 131 – Description.	583
Field 131 – Usage.	587
Field 131 – Field Edits.	587
Field 131 – Reject Codes.	587
Field 132 – Unpredictable Number.	588
Field 132 – Attributes.	588
Field 132 – Description.	588
Field 132 – Usage.	588
Field 132 – Field Edits.	588

Field 132 – Reject Codes.	589
Field 133 – Reserved for Future Use.	590
Field 133 – Attributes.	590
Field 133 – Description.	590
Field 133 – Usage.	590
Field 133 – Field Edits.	590
Field 133 – Reject Codes.	590
Field 134 – Visa Discretionary Data.	591
Field 134 – Attributes.	591
Field 134 – Description.	591
Field 134 – Usage.	592
Field 134 – Field Edits.	592
Field 134 – Reject Codes.	593
Field 134 – Format 1, Standard Format.	594
Field 134 – Format 1, Attributes.	594
Field 134 – Format 1, Description.	594
Field 134 – Format 1, Usage.	596
Field 134 – Format 1, Field Edits.	596
Field 134 – Format 1, Reject Codes.	596
Field 134 – Format 2, Expanded Format.	597
Field 134 – Format 2, Attributes.	597
Field 134 – Format 2, Description.	597
Field 134 – Format 2, Usage.	597
Field 134 – Format 2, Field Edits.	598
Field 134 – Format 2, Reject Codes.	598
Field 134 – Format 2, Valid Values.	598
Field 135 – Issuer Discretionary Data.	599
Field 135 – Attributes.	599
Field 135 – Description.	599

Field 135 – Usage.	599
Field 135 – Field Edits.	600
Field 135 – Reject Codes.	600
Field 136 – Cryptogram.	601
Field 136 – Attributes.	601
Field 136 – Description.	601
Field 136 – Usage.	601
Field 136 – Field Edits.	602
Field 136 – Reject Codes.	602
Field 137 – Application Transaction Counter.	603
Field 137 – Attributes.	603
Field 137 – Description.	603
Field 137 – Usage.	603
Field 137 – Field Edits.	604
Field 137 – Reject Codes.	604
Field 138 – Application Interchange Profile.	605
Field 138 – Attributes.	605
Field 138 – Description.	605
Field 138 – Usage.	606
Field 138 – Field Edits.	606
Field 138 – Reject Codes.	607
Field 139 – ARPC Response Cryptogram and Code.	608
Field 139 – Attributes.	608
Field 139 – Description.	608
Field 139 – Usage.	608
Field 139 – Field Edits.	609
Field 139 – Reject Codes.	609
Field 139 – Format 1, ARPC Response Cryptogram and Code.	610
Field 139 – Format 1, Attributes.	610

Field 139 – Format 1, Description.	610
Field 139 – Format 1, Usage.	611
Field 139 – Format 1, Field Edits.	611
Field 139 – Format 1, Reject Codes.	611
Field 139 – Format 2, Issuer Authentication Data.	612
Field 139 – Format 2, Attributes.	612
Field 139 – Format 2, Description.	612
Field 139 – Format 2, Usage.	613
Field 139 – Format 2, Field Edits.	614
Field 139 – Format 2, Reject Codes.	614
Field 140 – Issuer Authentication Data.	615
Field 140 – Attributes.	615
Field 140 – Description.	615
Field 140 – Usage.	616
Field 140 – Field Edits.	616
Field 140 – Reject Codes.	616
Field 140 – Format 1, Issuer Authentication Data.	617
Field 140 – Format 1, Attributes.	617
Field 140 – Format 1, Description.	617
Field 140 – Format 1, Usage.	618
Field 140 – Format 1, Field Edits.	618
Field 140 – Format 1, Reject Codes.	618
Field 140 – Format 2, Issuer Authentication Data.	619
Field 140 – Format 2, Attributes.	619
Field 140 – Format 2, Description.	619
Field 140 – Format 2, Usage.	620
Field 140 – Format 2, Field Edits.	620
Field 140 – Format 2, Reject Codes.	620
Field 140 – Format 3, Issuer Authentication Data.	621

Field 140 – Format 3, Attributes.	621
Field 140 – Format 3, Description.	621
Field 140 – Format 3, Usage.	622
Field 140 – Format 3, Field Edits.	622
Field 140 – Format 3, Reject Codes.	622
Field 142 – Issuer Script.	623
Field 142 – Attributes.	623
Field 142 – Description.	623
Field 142 – Usage.	624
Field 142 – Field Edits.	624
Field 142 – Reject Codes.	624
Field 143 – Issuer Script Results.	625
Field 143 – Attributes.	625
Field 143 – Description.	625
Field 143 – Usage.	625
Field 143 – Field Edits.	625
Field 143 – Reject Codes.	626
Field 144 – Cryptogram Transaction Type.	627
Field 144 – Attributes.	627
Field 144 – Description.	627
Field 144 – Usage.	627
Field 144 – Field Edits.	627
Field 144 – Reject Codes.	628
Field 145 – Terminal Country Code.	629
Field 145 – Attributes.	629
Field 145 – Description.	629
Field 145 – Usage.	629
Field 145 – Field Edits.	629
Field 145 – Reject Codes.	629

Field 146 – Terminal Transaction Date.	630
Field 146 – Attributes.	630
Field 146 – Description.	630
Field 146 – Usage.	630
Field 146 – Field Edits.	630
Field 146 – Reject Codes.	631
Field 147 – Cryptogram Amount.	632
Field 147 – Attributes.	632
Field 147 – Description.	632
Field 147 – Usage.	632
Field 147 – Field Edits.	632
Field 147 – Reject Codes.	632
Field 148 – Cryptogram Currency Code.	633
Field 148 – Attributes.	633
Field 148 – Description.	633
Field 148 – Usage.	633
Field 148 – Field Edits.	633
Field 148 – Reject Codes.	633
Field 149 – Cryptogram Cashback Amount.	634
Field 149 – Attributes.	634
Field 149 – Description.	634
Field 149 – Usage.	634
Field 149 – Field Edits.	634
Field 149 – Reject Codes.	634
Field 152 – Secondary PIN Block.	635
Field 152 – Attributes.	635
Field 152 – Description.	635
Field 152 – Usage.	635
Field 152 – Field Edits.	635

Field 152 – Reject Codes.	636
-----------------------------------	-----

Chapter 5 • Message Formats

Interpreting Tables.	637
Definition of the Term "Mandatory".	638
Use of M (Mandatory), C (Conditional), and O (Optional) in Tables.	639
Field Name Abbreviations.	639
Original Financial Transactions.	645
0200 Cash Disbursement.	646
0200 Balance Inquiry.	650
0200 Account Transfer.	653
0200 ATM Deposits.	656
Financial Reversals	659
0420 Reversal.	660
0420 Account Transfer Reversal	663
0420 ATM Deposits Reversal.	666
System-Generated Financial Transactions.	669
0220 Cash Disbursement Adjustment	669
0220 ATM Deposits: Adjustment.	673
Exception Transactions.	676
0220 Back-Office Adjustment.	676
Dispute Financial and Dispute Financial Status Advice (0422 and 0480).	680
ATM Deposits Dispute Financial and Dispute Financial Status Advice (0422 and 0480)	683
Dispute Financial Reversal and Dispute Financial Reversal Status Advice (0422 and 0480).	686
Dispute Response Financial and Dispute Response Financial Status Advice (0220 and 0282).	689
ATM Deposits Dispute Response Financial and Dispute Response Financial Status Advice (0220 and 0282).	692
0220/0422 Fee Collection/Funds Disbursement	695
0220 Visa-Generated Funds Disbursement Transactions (Visa and Plus).	701

File Maintenance	.703
0302/0322 File Maintenance	.703
Cardholder Available Balance File Maintenance Messages (0302/0312).	.708
Payment Fraud Disruption File Maintenance (0302 and 0312).	.709
Cardholder Database 0120 Advice and 0130 Response for Issuers.	.710
Reconciliation (0520).	.714
Network Management Message.	.715
Station Status Messages (Field 70=0071/0072) and Advice Recovery Messages (Field 70=0078/0079) from Full Service Clients to V.I.P..	.715
Station Status Messages (Field 70=0081/0082) and Advice Recovery Messages (Field 70=0088/0089) from Full Service Clients to V.I.P..	.716
Echo Message from Full Service Client to V.I.P..	.717
Echo Message from V.I.P. to Full Service Client.	.718
Dynamic Key Exchange.	.719
Chip-Based Transactions.	.720
Chip-Based Cash Disbursement.	.721
Chip-Based Balance Inquiry.	.725
Chip-Based PIN Change and Unblock Request.	.728
Chip-Based PIN Change and Unblock Reversal Request.	.731
Chip-Based Account Transfer.	.733
Chip-Based Account Transfer Reversal.	.737
Chip-Based Financial Reversal.	.740
Chip-Based Cash Disbursement Adjustment Misdispense.	.743
Chip-Based Back-Office Adjustment.	.746
Chip-Based Dispute Financial and Dispute Financial Status Advice (0422 Chargeback) .	.749
Chip-Based Dispute Financial Reversal and Dispute Financial Reversal Status Advice.	.753
Chip-Based Dispute Response Financial and Dispute Response Financial Status Advice (0220 Representation).	.756
Chip-Based Authentication Failure and Script Update Results.	.760
Chip-Based ATM Fraud Advice.	.762
Client-Generated Chip-Based ATM Fraud Advice.	.762

Visa-Generated Chip-Based ATM Fraud Advice.	764
Settlement Position Query (0600/0610) and Advice (0620/0630).	767
Collection-Only Transactions (9240/9250 and 9242/9252).	768
Acquirer-Generated Collection-Only Transaction-Mandatory Fields.	769
Issuer-Generated Collection-Only Transaction-Mandatory Fields.	771
Fraud Reporting (9620/9630).	772
Client-Generated Fraud Advice and Response Message Format (Visa Network 0002).	773
Client-Generated Fraud Advice and Response Message Format (Plus Network 0004).	775
Visa- and Plus-Generated Fraud Advice and Response Message Format.	777
CDB Inquiry for Account-Level Processing Issuers.	780
ALP Product Inquiry (0302/0312).	781
Token Messages.	782
Visa Resolve Online Messages.	783
Dispute Response Financial Status Advice and Dispute Response Financial Reversal Status Advice.	783
Dispute Financial Status Advice and Dispute Financial Reversal Status Advice.	785

Appendix A • Files

Overview.	787
Data Files.	787
Report Files.	788
How Files Are Delivered.	789
Deliveries Through BASE II Connection.	789
VSS Report Delivery.	790
Raw Data Records.	790
Routing Tables.	790
Delivery Schedules.	791
Delivery Options.	792
BASE II Connection	792
Record Formats.	793

Plus Identifier Table Record Layouts.	796
Combined Visa/Plus Routing Table Record Layouts.	797
Routing Table File Search Procedures.	800
Searching a Sample Routing Table File.	801
U.S. Routing Table Format and File Options.	802
Routing Table Options.	803
Distribution Options.	804
Weekly Full Replacements.	804
Weekly Full Replacements With Daily Updates.	804
Daily Full Replacement.	804
Routing Table File Format Layouts.	805
Record Layouts.	814
Visa Point-of-Sale Authorization (POSA) File.	814
High-Level Requirements.	815
Service Parameters.	815
File Delivery and Availability.	817
POSA File Layout.	818
Header Record.	818
Detail Records.	818
Record Layout for POS/PSR and (TC33 Format).	819
Point of Sale Authorization Report (Generic Format).	844
Trailer Record.	855
Batch File Maintenance.	855
Effective Date Time and Example Record Formats.	856
Effective Date Time for Records.	856
Example Record Formats.	856
Account Screen Authorization File (ASAF) Report Layouts.	866
TC 33 Record Format for ASAF Data.	867
OFD Record Format For ASAF Data.	871

Appendix B • File Maintenance Error Codes

Error Code Descriptions.	.875
Error Codes.	875
PVV Batch Response File Detail - Error Codes.	877

Appendix C • Reject Codes

Reject Codes Descriptions.	.880
------------------------------------	------

Appendix D • GMT Conversion

Converting GMT to Local Time and Date.	901
--	-----

Appendix E • Country and Currency Codes

Currency to Country Cross-Reference.	905
Country and Currency Codes.	913

Appendix F • Visa Smart Debit/Smart Credit (VSDC) Fields - Additional Information

Field 55, Tags 71 and 72.	.927
Field 134—Visa Discretionary Data.	.928
Format 1, (Standard Format) Examples by Card Type.	.928
VIS and CCD Data.	.928
Format 2, (Expanded Format) Examples by Card Type.	930
Content Breakdown by CVN.	934
Field 142—Issuer Script.	.941

Appendix G • VisaNet Terminology

VisaNet System Terminology.	942
VisaNet Business Terminology.	.944

Chapter 1

Message Matching

Clients must match messages in transaction set sequences. They use key data fields to identify how transactions are linked. Key fields enable message initiators and VisaNet to match responses to requests and later requests or advices (and their responses) to original requests.

Clients submit later requests when they identify transactions processed incorrectly or posted incorrectly to cardholders' accounts.

Message Matching Examples

Corrections are determined at different times in transaction life cycles, such as:

- Automated Teller Machine (ATM) devices can result in reversals, or reversals immediately followed by adjustments.
- Acquirer systems results in reversals.
- Acquirer back-office reconciliation results in debit or credit adjustments.
- Cardholder or issuer back-office reconciliation results in dispute financials.
- Acquirer reviews of dispute financials results in dispute response financials.

This table shows how messages link to earlier messages.

Table 1: ATM Transactions

Cardholder Transaction Set	Transactions Allowed	System Transactions				
			Messages Related to Cardholder Transaction			
		Req.	Rev.	Dispute Financial	Dispute Financial Rev.	Dispute Response Financial
Automated Teller Machine (ATM) Cash Disbursement ATM Deposit	Cash Disbursement	✓	✓	✓	✓	✓
	ATM Deposit					
	Cash Disbursement Adjustment	✓		✓	✓	✓
	ATM Deposit Service Adjustment					
	Back-Office Adjustment	✓		✓	✓	✓
ATM Mini Statements (PLUS 0004 only)	ATM Mini Statements (PLUS 0004 only)	✓				
ATM VSDC PIN Change and Unblock	ATM VSDC PIN Change and Unblock	✓	✓			
Balance Inquiry	Balance Inquiry	✓				
Account Transfer	Account Transfer	✓	✓			

Transaction Sets

V.I.P. manages original financial messages using cardholder transaction sets. *Transaction sets* consist of messages relating to using cards at ATMs. The set concept enables acquirers to establish relationships between messages and enables VisaNet and issuers to recognize those relationships. It provides controls needed for real-time account posting and settlement accumulator updating.

Sets consist of one or more cardholder transactions. *Cardholder transactions* consist of one or more system transactions. *System transactions* comprise pairs of messages: requests and responses, or advices and advice responses.


Within transaction sets, only certain cardholder transactions are allowed. Within cardholder transaction sets, only certain system transactions are allowed. ATM transactions include:

Cash Disbursement Set

At minimum, sets consist of one cash disbursement cardholder transaction. At maximum, they contain any number of cardholder transactions: one original cash disbursement plus one or more adjustments to withdrawal amounts.

This figure shows only primary message types and primary messages permitted, not those used for typical transactions.

Cash Disbursement Transaction Set

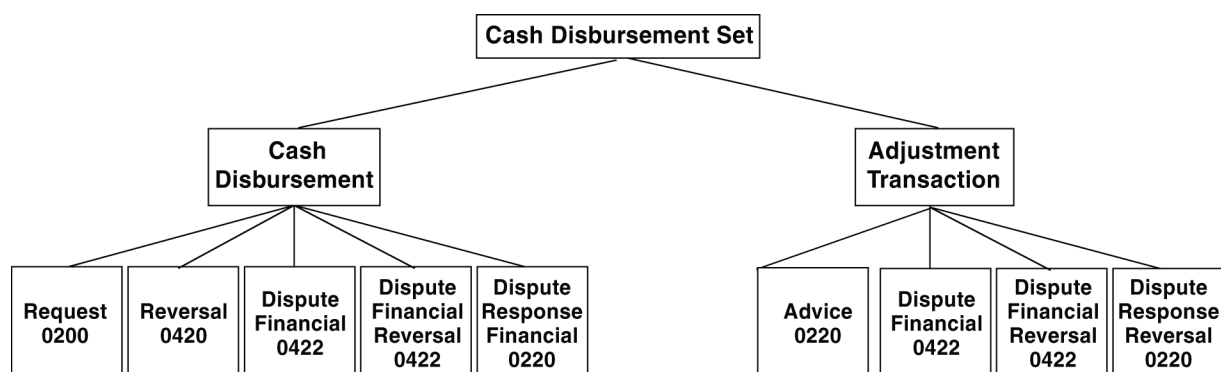

ATM Deposits Set

High-level flows for this transaction set are the same as cash disbursements (withdrawals).


At minimum, the ATM Deposits set consists of one deposit cardholder transaction.

At maximum, they contain any number of cardholder transactions: one original deposit and one or more adjustments to deposit amounts.

Balance Inquiry Set

Balance inquiry sets contain one cardholder transaction processed with 0200 requests. Dispute financials and dispute response financials do not apply. Primary messages permitted:


Balance Inquiry Transaction Set

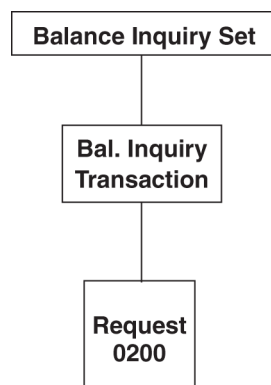

Account Transfer Set

Account transfer sets contain one cardholder transaction processed with 0200 requests. Acquirers may reverse transfers with 0420 advices. Transfers cannot be disputed or re-presented. Primary message types permitted:

Account Transfer Transaction Set

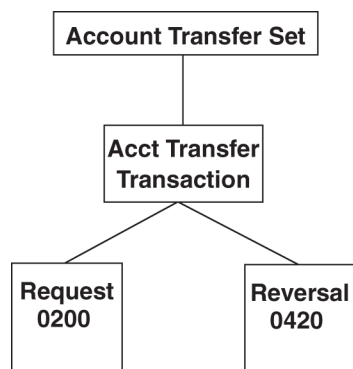

Key Data Fields

Tables show when key data field values must match those in previous messages and when values must be assigned to indicate messages are not part of previous groups of messages. Bold values in cells indicate values are from another message. At clients' discretion, they can use additional fields to match messages.

Key fields for message matching are shown for:

- Financial Messages
- Administrative text messages, including fraud notification advices
- Network management, including Dynamic Key Exchange (DKE)

Financial Messages

Originals

Standard 0200 financial messages contain requests and responses. Original financial transactions include cash disbursements, ATM deposits, balance inquiries, and account transfers.

This table shows acquirers how to use key data fields to match financial responses to earlier requests and shows issuers how to use key data fields to build responses to financial messages.

Bold values indicate values are from another message.

Table 2: Cash Disbursement - ATM Deposits - Balance Inquiry - Account Transfer Messages

	KEY DATA FIELDS					
Message Type	System Trace Audit Number (Field 11)	Acquiring Institution Identification Code (Field 32)	Retrieval Reference Number (Field 37)	Card Acceptor Terminal ID (Field 41)	Card Acceptor ID (CAID) (Field 42)	Network ID (NID) (Field 63.1)
Original Automated Teller Machine (ATM) transaction: 0200	Assign value	Use value for entity dispensing cash	Assign value for transaction	Use value that identifies the automated teller machine (ATM)	Use value that identifies name of institution operating the automated teller machine (ATM)	Assign valid NID value or 0000 <i>if participating in the Priority Routing service</i>
Response: 0210	Value from 0200	Value from 0200	Value from 0200	Value from 0200	Value from 0200	Network ID value as received in 0200

Value in field 37 cannot be used again for 48 hours or transaction may be rejected with reject code **600**.

Reversals

Acquirers create reversal advices to notify VisaNet and issuers of error conditions regarding earlier financial transactions:

- Approved transaction is cancelled at ATM.
- Acquirer does not receive response to financial request.

- Acquirer cannot send approved response to ATM.
- Acquirer does not receive completion or acknowledgment message from ATM.

This table shows acquirers how to use key data fields to build reversal advices identifying earlier financial transactions and match reversal responses to corresponding reversal advices.

It also shows issuers how to use key data fields to match reversal advices to earlier financial requests and build reversal responses.

In addition to key fields, fields 41 and 42 are required in reversals and must contain values from 0200 requests.

Table 3: Reversals of Cash Disbursement - ATM Deposit - Account Transfer Messages

		KEY DATA FIELDS				
Message Type	System Trace Audit Number (Field 11)	Acquiring Institution Identification Code (Field 32)	Retrieval Reference Number (Field 37)	Card Acceptor Terminal ID (Field 41)	Card Acceptor ID (CAID) (Field 42)	Network ID (NID) (Field 63.1)
Reversal of 02xx: 0420	Value from original 0200 request	Value from original 0200 request	Value from original 0200 request	Use value that identifies the automated teller machine (ATM)	Use value that identifies name of institution operating the automated teller machine (ATM)	Use the value as received in the 0210, if known. Otherwise assign a valid NID, or 0000 if participating in the Priority Routing service
Reversal response: 0430	Value from 0420 (from 0200)	Value from 0420 (from 0200)	Value from 0420 (from 0200)	Value from 0420 (from 0200)	Value from 0420 (from 0200)	Value from 0420

Adjustments

Categories of adjustment messages for ATM transactions:

- Cash disbursement adjustments
- ATM deposit adjustments (excludes international cash deposits)
- Back-office adjustments

Cash Disbursement Adjustments

Cash disbursement adjustments adjust values of ATM cash disbursements, usually within two minutes of original transactions. Adjustments can be for debit or credit amounts.

- **Partial Dispense or Misdispense:** Amount dispensed by ATM did not match amount approved by issuer. Credit or debit adjustment for difference is needed so cardholder's account can be adjusted.
- **Late Completion:** Acquirer received approval and passed it to ATM but could not confirm transaction was completed and reversed transaction. After reversal was processed, acquirer determined transaction was completed at ATM.
- **Partial Dispense Detected, Previously Reversed** (*Plus only*): Acquirer reversed transaction and after reversal was processed, acquirer determined partial dispense occurred at ATM.

Adjustments cannot be reversed by acquirers but can be charged back by issuers. Under normal conditions, acquirers send 0220 adjustment advices to issuers, and issuers acknowledge with 0230 advice responses.

ATM Deposit Adjustments

ATM deposit adjustments adjust value of ATM deposits. Adjustments can be for debit or credit amounts.

Back-Office Adjustments

Acquirers use back-office adjustments when they identify processing errors during or after ATM reconciliation. For instance, during reconciliation, they discover misdisburses or duplications of transactions. Acquirers' operations staff enter adjustments. They can be *debit* or *credit* adjustments and cannot be reversed by acquirers.

Acquirers use debit adjustments when ATMs dispense more than transaction amounts. Acquirers use credit adjustments when ATMs dispense less than transaction amounts or when cardholders are charged for invalid transactions. These can apply to ATM deposits (excludes international cash deposits).

Acquirers send 0220 adjustment advices. Issuers or Stand-In Processing (STIP) return 0230 advice responses to acknowledge adjustment advices were successfully received. Issuers cannot decline adjustments, although they can dispute them if dispute and return rights exist. Issuer approvals indicate adjustments have been received; they do not indicate issuers agree with adjustments.

In addition to key fields specified in this table, VisaNet requires fields 41 and 42 in partial dispense or misdispense transactions and must contain values from 0200 requests.

Table 4: Cash Disbursement Adjustments - ATM Deposit Adjustments (excludes international cash deposits) - Back-Office Adjustments

Message Type	KEY DATA FIELDS					
	System Trace Audit Number (Field 11)	Acquiring Institution Identification Code (Field 32)	Retrieval Reference Number (Field 37)	Card Acceptor Terminal ID (Field 41)	Card Acceptor ID (CAID) (Field 42)	Network ID (NID) (Field 63.1)
Adjustment: 0220	Assign value for adjustment transaction	Value from original 0200 request	Value from original 0200 request	Value from original 0200 request	Value from original 0200 request	Valid NID Value from the 0210 or 0230
Adjustment response: 0230	Value from 0220 adjustment	Value from 0220 adjustment (from original 0200)	Value from 0220 adjustment (from original 0200)	Value from 0220 adjustment	Value from 0220 adjustment	Value from 0220 adjustment

Dispute Financial

Issuers, or VROL on behalf of an issuer creates dispute financials to correct incorrect postings to cardholders' accounts.

This table shows acquirers how to use key data fields to match dispute financial messages to earlier financial transactions and build 0432 responses. It also shows issuers how to use key data fields to build dispute financial messages identifying earlier financial transactions and match 0432 responses to corresponding dispute financial requests.

Table 5: Dispute Financials

Message Type	KEY DATA FIELDS					
	System Trace Audit Number (Field 11)	Acquirer Institution ID (Field 32)	Retrieval Reference Number (Field 37)	Card Acceptor Terminal ID (Field 41)	Card Acceptor ID (CAID) (Field 42)	Network ID (NID) (Field 63.1)
Dispute Financial: 0422	Value from 0200 or 0220	Value from 0200 or 0220	Value from 0200 or 0220	Value from 0200 or 0220, if applicable	Value from 0200 or 0220	Valid NID value from the 0210 or 0230
Dispute Financial: 0432	Value from 0422 (from 0200 or 0220)	Value from 0422 (from 0200 or 0220)	Value from 0422 (from 0200 or 0220)	Value from 0422 (from 0200 or 0220)	Value from 0422 (from 0200 or 0220)	Value from 0422 (from original 0200 or 0220)

Dispute Financial Reversals

If issuers determine dispute financials were incorrectly sent, issuers or VROL on behalf of an issuer must send dispute financial reversals.

This table shows acquirers how to use key data fields to match dispute financial reversals to earlier dispute financials and build 0432 responses. It also shows issuers how to use key data fields to build dispute financial reversals (0422) identifying earlier dispute financials and match 0432 responses to corresponding dispute financial reversal requests.

Table 6: Dispute Financial Reversals

Message Type	KEY DATA FIELDS					
	System Trace Audit Number (Field 11)	Acquirer Institution ID (Field 32)	Retrieval Reference Number (Field 37)	Card Acceptor Terminal ID (Field 41)	Card Acceptor ID (CAID) (Field 42)	Network ID (NID) (Field 63.1)
Dispute Financial Request: 0422	Value from 0200 or 0220	Value from 0200 or 0220	Value from 0200 or 0220	Value from 0200 or 0220, if applicable	Value from 0200 or 0220	Use the value as received in the 0200/0220.
Dispute Financial Request: 0432	Value from 0422 (from 0420 or 0220)	Value from 0420 (from 0200 or 0220)	Value from 0420 (from 0200 or 0220)	Value from 0420 (from 0200 or 0220)	Value from 0420 (from 0200 or 0220)	Value from 0422

VisaNet requires matching in these reversals and responses.

Dispute Financial Reversal Request: 0422	Value from dispute financial 0422 (from 0200 or 0220)	Value from dispute financial 0422 (from 0200 or 0220)	Value from dispute financial 0422 (from 0200 or 0220)	Value from dispute financial 0422 (from 0200 or 0220), if applicable	Value from dispute financial 0422 (from 0200 or 0220)	Use the value as received in the 0422.
Dispute Financial Response: 0432	Value from 0422 (from 0200 or 0220)	Value from 0422 (from 0200 or 0220)	Value from 0422 (from 0200 or 0220)	Value from 0422 (from 0200 or 0220)	Value from 0422 (from 0200 or 0220)	Value from 0422

Dispute Response Financial

If acquirers determine transactions were incorrectly disputed, acquirers or VROL on behalf of an acquirer can submit dispute response financial's.

This table shows acquirers how to use key data fields to build dispute response financial messages identifying earlier dispute financial's and match the 0230 response to the corresponding dispute response financial requests.

This table also shows issuers how to use key data fields to match dispute response financial's to earlier dispute financial's and build 0230 responses.

Table 7: Dispute Response Financial Messages

Message Type	KEY DATA FIELDS					
	System Trace Audit Number (Field 11)	Acquirer Institution ID (Field 32)	Retrieval Reference Number (Field 37)	Card Acceptor Terminal ID (Field 41)	Card Acceptor ID (CAID) (Field 42)	Network ID (NID) (Field 63.1)
Dispute Response Financial: 0220	Value from 0422 (from original 0200 or 0220)	Value from 0422 (from original 0200 or 0220)	Value from 0422 (from original 0200 or 0220)	Value from 0422 (from original 0200 or 0220), if applicable	Value from 0422 (from original 0200 or 0220)	Use the value as received in the 0422.
Adjustment response: 0230	Value from dispute response financial 0220 (from original 0200 or 0220)	Value from dispute response financial 0220 (from original 0200 or 0220)	Value from dispute response financial 0220 (from original 0200 or 0220)	Value from dispute response financial 0220 (from original 0200 or 0220)	Value from dispute response financial 0220 (from original 0200 or 0220)	Value from 0422

Life Cycle Tracing Data Elements

Transaction Identifier

Visa assigns a transaction identifier to all authorized original transactions processed through the V.I.P. System. Subsequent messages (following the original submitted by the acquirer) in a transaction lifecycle must contain the transaction identifier in field 62.2.

Administrative Messages

Administrative Text

Clients use administrative text messages (0600s) to send unformatted messages to clients.

This table shows clients how to use key fields to:

- *Build* administrative text messages
- *Build* administrative text message responses
- *Match* administrative text message responses to earlier requests

Clients can also use Field 70—Network Management Information Code to match messages.

Table 8: Administrative Text Messages

Message Type	System Trace Audit Number (Field 11)	Retrieval Reference Number (Field 37)	Network ID (NID) (Field 63.1)	Network Management Information Code (Field 70)
Administrative Text Message: 0600	Assign value	Assign value	Assign value	Assign value
Administrative Text Message Response: 0610	Value from 0600	Value from 0600	Value from 0600	Value from 0600

Fraud Notification

Clients send fraud notification messages to VisaNet to report confirmed fraud transactions. VisaNet-generated fraud notifications contain information about dispositions of client-generated fraud reports. Clients acknowledge notifications in responses.

This table shows clients how to use key data fields to match responses to earlier advices. VisaNet supports client-generated fraud advices for network **0002** (Visa) and **0004** (Plus).

Table 9: Fraud Notification Messages

Message Type	System Trace Audit Number (Field 11)	Acquirer Institution ID (Field 32)	Retrieval Reference Number (Field 37)	Card Acceptor Terminal ID (Field 41)	Card Acceptor ID (CAID) (Field 42)	Network ID (NID) (Field 63.1)	Network Management Information Code (Field 70)
Fraud Notification Message: 9620	Value from Original Txn	Value from Original Txn	Value from Original Txn	Value from Original Txn	Value from Original Txn	Assign value of 0002	Assign value
Fraud Notification Message Response: 9630	Value from 9620	Value from 9620	Value from 9620	Value from 9620	Value from 9620	Value from 9620	Value from 9620

Network Management Messages

Network management messages are used for:

- System sign-on and sign-off (Station Status).
- Advice recovery control.
- Key management Dynamic Key Exchange (DKE).
- Echo test (initiated by VisaNet or client).

Clients or VisaNet initiate network management messages. Clients must be able to initiate network management messages and respond to VisaNet-originated messages.

This table shows clients how to use key data fields to build network management:

- Messages and match network management responses to corresponding network management requests
- Responses

Clients can also use Field 70-Network Management Information Code to match messages.

Table 10: Network Management Messages

Message Type	System Trace Audit Number (Field 11)	Network Management Information Code (Field 70)
Client-initiated network management: 0800	Assign value	Assign value
Response: 0810	Value from 0800	Value from 0800
VisaNet-initiated network management: 0800	Assign value	Assign value
Response: 0810	Value from 0800	Value from 0800

Message Matching to Authorization-Only Clients

Messages are matched to authorization-only clients:

Full Service Acquirer Sends Transaction to Authorization-Only Issuer

This table shows key data fields mapped from online messages to clearing messages for authorization-only issuers.

Table 11: Full Service Acquirer Sends Transaction to Authorization-Only Issuer

Key Data Fields From Full Service Acquirer	Key Data Fields to Authorization-Only Issuer	Comments
Field 32 – Acquiring Institution ID Code	Moved to Acquiring Institution Identification Code subfield of Acquirer Reference Number (ARN)	n/a
Field 37 – Last eight digits of Retrieval Reference Number (RRN)	Moved to last eight digits of Film Locator subfield of ARN VisaNet sets first three digits of Film Locator subfield to zeros for full financial transactions	n/a
Field 11 – System Trace Audit Number	Not carried on BASE II records unless embedded in last six digits of RRN	Acquirers requiring system trace audit number returned on subsequent messages should use recommended approach for building RRN (embedding system trace audit number as last six digits)
Field 7 – Transmission Date and Time	n/a	Not key data field for subsequent transactions

This table does not show these subfields of ARN:

- Format code: determined by VisaNet
- Date: set to value contained in date subfield of Field 37 – Retrieval Reference Number
- Check digit: calculated by VisaNet

Full Service Acquirer Receives Transaction From Authorization-Only Issuer

This table shows key data fields mapped to online financial messages from clearing messages sent by authorization-only issuers. Transactions from authorization-only issuers include dispute financials.

Table 12: Full Service Acquirer Receives Transaction From Authorization-Only Issuer

Key Data Fields From Authorization-Only Issuer	Key Data Fields to Full Service Acquirer	Comments
Acquiring identifier subfield of <i>ARN</i>	Moved to Field 32 – Acquiring Institution ID Code	n/a
1. Last eight digits of Film Locator subfield of <i>ARN</i> 2. Date subfield of <i>ARN</i>	1. Moved to last eight digits of Field 37 – Retrieval Reference Number (RRN) 2. Moved to first four digits of Field 37 – Retrieval Reference Number (RRN)	Original date corresponds to date from field 7 and, therefore, date may not correspond to contents returned in subsequent messages
0 followed by positions 18-22 of <i>ARN</i>	Moved to Field 11 – System Trace Audit Number	Corresponds to system trace audit number when acquirer uses Visa recommendation for building RRN
n/a	Field 7 – Transmission Date and Time	VisaNet sets value and corresponds to time of sending message to acquirer

Full Service Issuer Receives Transaction From Authorization-Only Acquirer

This table shows key data fields mapped to online messages from clearing messages submitted by authorization-only acquirers. Transactions from authorization-only acquirers include deferred clearing requests and dispute response financials.

Table 13: Full Service Issuer Receives Online Clearing Transaction From Authorization-Only Acquirer

Key Data Fields From Authorization-Only Acquirer	Key Data Fields to Full Service Issuer	Comments
Acquiring identifier subfield of <i>ARN</i>	Field 32 – Moved to Acquiring Institution ID Code	n/a
1. Date subfield of <i>ARN</i> 2. Format Code subfield of <i>ARN</i> 3. Check Digit subfield of <i>ARN</i> 4. First six digits of Film Locator subfield of <i>ARN</i>	1. Moved to first four digits of Field 37 – Retrieval Reference Number (RRN) 2. Moved to fifth position of field 37 3. Moved to sixth position of field 37 4. Moved to last six digits of field 37	Date subfield moved to Field 13 – Date, Local Transaction

Table 13: Full Service Issuer Receives Online Clearing Transaction From Authorization-Only Acquirer

Key Data Fields From Authorization-Only Acquirer	Key Data Fields to Full Service Issuer	Comments
Last five digits of Film Locator subfield of ARN	Moved to last five digits of Field 11 – System Trace Audit Number VisaNet sets first digit to zero	n/a
n/a	Field 7 – Transmission Date and Time	VisaNet sets value and corresponds to time of sending message to issuer

Full Service Issuer Sends Transaction to Authorization-Only Acquirer

This table shows key data fields mapped from issuers' online messages back to clearing messages for authorization-only acquirers.

Table 14: Full Service Issuer Sends Transaction to Authorization-Only Acquirer

Key Data Fields From Full Service Issuer	Key Data Fields to Authorization-Only Acquirer	Comments
Field 32 – Acquiring Institution ID Code	Moved to Acquiring identifier subfield of ARN	n/a
1. Field 13 – Date, Local Transaction 2. Last six digits of Field 37 – Retrieval Reference Number (RRN)	1. Moved to Date subfield of ARN 2. Moved to first six digits of Film Locator subfield of ARN	VisaNet determines format code and recalculates Check Digit subfield
Last five digits of Field 11 – System Trace Audit Number	Moved to last five digits of Film Locator subfield of ARN	n/a
Field 7 – Transmission Date and Time	n/a	Issuer sets value, which corresponds to time of sending message

Chapter 2

Message Structure and Header Fields

This chapter identifies components of VisaNet Integrated Payment (V.I.P.) messages and provides descriptions of header fields. It includes information about International Standards Organization (ISO) compliance and variations, and specifications about message types, bitmaps, and Visa programming rules.

VisaNet Data Message Structure

VisaNet Integrated Payment (V.I.P.) interactive messages are based on International Standards Organization (ISO) 8583; 1987 (E): *"Bank Card Organizational Messages-Interchange Message Specifications-Content for Financial Transactions."* Data messages transmitted between client host stations and VisaNet connection methods have four basic components:

Table 15: Data Message Components

Component	Content
Message Header	Contains system ID and routing information, message processing control codes, and flags. Defined by Visa.
Message Type ID	Highest level message type definition. First data element is International Standards Organization (ISO) 8583 message. Specifies general message category (for instance, financial or administrative).
Bitmap	Specifies data fields present. Defined by International Standards Organization (ISO) 8583: Bitmap 1 = Fields 2–64 Bitmap 2 = Fields 66–128 Bitmap 3 = Fields 130–192
Data Fields	Comprise messages. Majority of fields defined by ISO 8583; others defined by Visa or used nationally and adopted by Visa.

Anatomy of Messages

The **message header** specifications are in the “Message Header Field Specifications” section of this chapter.

Every message has a Primary Bitmap for fields 2–64, and may have a Secondary Bitmap for fields 66–128 and a third Bitmap for fields 130–192. (Not applicable to Interlink.)


The **message bitmap** specifications are in the “Programming Rules” section of this chapter.

This chapter also has **field bitmap** specifications for message header field 13, data field 62.0, and data field 63.0.

The **data field** descriptions are in Chapter 4. Chapter 3 contains a list of all Single Message System data fields.

Fields required for each message type are in Chapter 5.

Key data elements required for each message are summarized in Chapter 1.

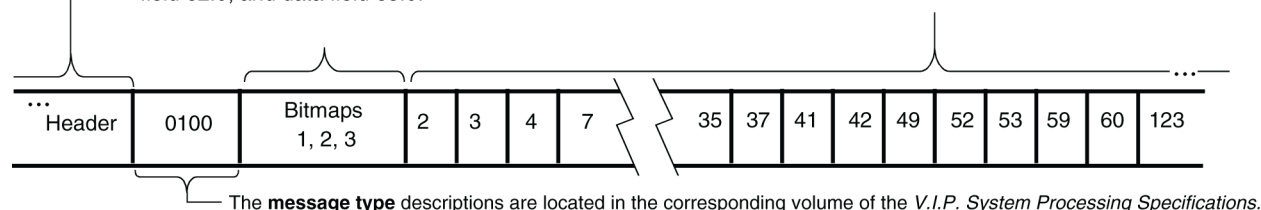

Message Type Specifications

This section describes message type identifiers and message type use.

Message Header	Message Type ID	Bitmap	Data Fields
----------------	-----------------	--------	-------------

Bitmap 1 = Fields 2–64

Bitmap 2 = Fields 66–128

Bitmap 3 = Fields 130–192

Message Type Identifier

In Binary-Coded Decimal Notation (BCD) notation, message type identifiers are four digits (two bytes) long. Required in messages, they are located between message headers and primary bitmaps.

Message type identifiers precede primary bitmaps and data fields of messages and immediately follow message headers:

Table 16: Message Type Identifier Structure

Attributes	4 N, 4-bit BCD (unsigned packed), fixed length, 2 bytes
Description	Message type identifies highest level identifier of message type and processing requirements. Indicates content of message.
Usage	Must be present in messages. Values must comply with requirements described here and detailed in applicable V.I.P. processing specifications.
Field Edits	Message type identifiers must be numeric and codes defined in applicable V.I.P. processing specifications.
Reject Codes	0005 = Invalid value 0270 = Field missing 0400 = Parse error (for instance, invalid length, missing code)

Visa-Unique Specifications

ISO message types are defined in terms of sources and destinations. ISO standards cover acquirer messages flowing to issuers, and issuer messages flowing to acquirers. They do not address usage of intermediate entities like VisaNet. Visa has implemented message types approximating flows between clients and VisaNet:

- Message type 0200, defined by ISO, are from acquirers to card issuers. Visa uses these for financial requests routed from acquirers to issuers or VisaNet stand-in processor (STIP).
- Message type 0220 are from acquirers to issuers. Visa uses these for cash disbursement adjustments (misdispenses), back-office adjustments, and dispute response financials.
- Message type 0422 are issuer reversal advices. Visa uses these dispute financials and dispute financial reversals.

- Message types 0302/0312 and 0322 are messages passed between issuers and acquirers. Visa uses these file-related messages for use between issuers and VisaNet for file management functions.
- Message type 0600 are exchanged between two communicating parties.

Table 17: Visa Private-Use Message Types

Message Type	Description
9620	Fraud Notification
9630	Fraud Notification Response

Programming Rules

Visa rules concerning encoding and transmitting data messages:

Message Length

V.I.P.-format messages cannot exceed 800 bytes. Incoming reject messages created by VisaNet can be longer. See “Header Field 4—Total Message Length.”

Data Representation

VisaNet treats numeric fields (defined by ISO 8583) as four-bit BCD (unsigned packed) fields. These fields appear as:

n N, 4-bit BCD (unsigned packed)

fixed length, *x* bytes

VisaNet treats alphanumeric fields as Extended Binary Coded Decimal Interchange Code (EBCDIC) (character) fields. These fields appear as:

n AN, EBCDIC

fixed length, *x* bytes

Sometimes, even though fields are defined as alphanumeric, field contents may be limited to numeric values, as for Field 37-Retrieval Reference Number (RRN).

Alphanumeric fields labeled “Alphanumeric and Special Characters (ANS)” indicate special characters (dash, slash, and so on) are allowed in addition to alphabetic and numeric characters.

The country code for Field 43-Card Acceptor Name/Location must be in uppercase (for instance, **CA** for Canada).

Field Alignment

Fields are aligned on byte boundaries. Some fields, like Field 90—Original Data Elements, have subfields with lengths involving half bytes.

Field Lengths

Length subfields must be encoded in one-byte or two-byte binary. Values in length subfields never includes their own lengths. Visa limits the maximum length for a one-byte variable length field to not exceed 255 positions.

Lengths are specified depending on field type:

- **ISO-defined field**—Number of positions in field.
 - Positions can be characters, digits, or bits depending on field attributes.
 - Leading **zero** pads first half-byte of odd-length, four-bit BCD: value is *not counted* in length.
- **Private-use field**—Number of bytes in field.
 - Private-use fields are associated with bits 48, 60–63, and 120–127.
 - Convention permits networks and systems to skip these fields correctly.

All bit-string fields (for instance, bitmap and Personal Identification Number (PIN)) must be constructed as bit strings, which are integral numbers of 8-bit bytes.

Binary fields have integrals of full byte lengths.

ISO-Defined Numeric Field Example

Chapter 4 gives length information for Field 2—Primary Account Number (PAN).

Attributes

1 byte, binary +

19 N, 4-bit BCD (unsigned packed)

maximum: 11 bytes

Because account number digits are encoded as four-bit BCD values, 19-digit account numbers require 11 bytes, but are shown in length subfields as **19** for number of positions:

First cell, bolded numbers identifies number of positions.

Byte:	1	2	3	4	5	6	7	8	9	10	11
	19	01	23	45	67	89	01	23	45	67	89

- Byte 1 for length (binary representation of **19**)
- Bytes 2–11 for account number (with leading **zero** to pad first unused half-byte)

16-digit account numbers require nine bytes:

Byte:	1	2	3	4	5	6	7	8	9
	16	12	34	56	78	90	12	34	56

- 1 byte (Byte 1) for length (binary representation of **16**)
- 8 bytes (Bytes 2–9) for account number

ISO-Defined Character Field Example

Chapter 4 gives length information for Field 44—Additional Data, Private.

Attributes

variable length

1 byte, binary +

25 ANS, EBCDIC

maximum: 26 bytes

When requests include Card Verification Value (CVV) or Integrated Circuit Card Card Verification Value (iCVV) results codes (field 44.5) but no other field 44 subfields, this field requires five bytes:

Byte:	1	2	3	4	5
					2

- Byte 1 for length (binary representation of **5**)
- Bytes 2–4 are blank; not applicable
- Byte 5 for CVV/iCVV results code

Private-Use Numeric Field Example

Chapter 4 gives length information for Field 60—Additional Point of Sale (POS) Information.

Attributes

variable length

1 byte, binary +

2 N, 4-bit BCD (unsigned packed)

1 byte total

When acquirers generate this field for 0200 requests, it requires two bytes. Values in length subfields are number of *bytes*, not positions:

Byte:	1	
	Pos 1	Pos 2
	2	2

- 1 byte for length (binary representation of **1**)
- 1 byte for terminal type and terminal capability

0400 or 0420 requests to reverse these transaction have identical specifications for this field.

Padding Unused Positions

Conventions apply to fixed-length fields when data entered does not fill fields:

- If numeric, field requires left **zero**-fill.
- If not numeric, requires right **space**-fill.

Odd-length numeric values, in fixed and variable-length fields, must contain leading **zeros**. Exception: coding in Field 22—POS Entry Mode Code has a *trailing* rather than leading **zero**.

Message Transmission

Messages are encoded in combinations of binary, 4-bit BCD (unsigned packed), and EBCDIC characters; centers must transmit messages in EBCDIC Transparent Mode. Client processing centers communicating with VisaNet must use transparent communication protocols.


Fields With Optional Subfields

If fields are with subfields and not all subfields are required in messages, bits for those fields in bitmaps must be set to **1** if subfield is present.

ISO TLV Format

In Basic Encoding Rules (BER), Tag Length Value (TLV) format is an ISO convention treating field contents as datasets. VisaNet supports ISO 8583, 2003 Standard for TLV Format, which applies to composite fields. These fields conform to ISO 8825 tag structure for TLV dataset identifiers 01–70. VisaNet does not support dataset identifiers 71–FE in bitmap format (although VisaNet does support Dataset ID 71 in TLV format for field 104, usage 2). The dataset IDs and tag IDs shown in the manual are always expressed in hexadecimal notation.

Composite TLV Field Structure Example

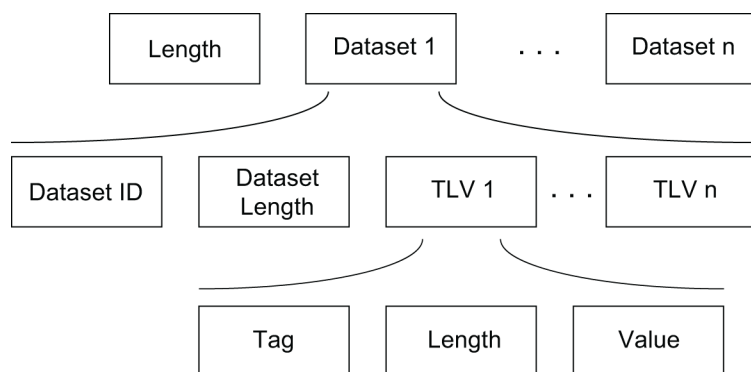

Elements of TLV-formatted fields:

- **Length:** 1-byte or 2-byte binary subfield containing number of bytes in field after length subfield. Includes total length of dataset IDs and dataset lengths, and TLV element lengths. Does not describe length of each TLV dataset.
- **Dataset ID:** 1-byte binary identifier for each dataset within TLV-formatted fields. Dataset ID is first component in dataset. TLV-formatted fields can contain 256 different datasets maximum.

Data associated with dataset IDs depends on fields datasets are used in. For instance, Dataset 01 in field 104 contains different information than Dataset 01 in field 55.
- **Dataset Length:** 2-byte binary subfield containing total length of TLV elements within dataset.
- **Dataset TLV Elements:** TLV1, TLV2, and so on.

TLV elements contain:

- Tag Field contains variable-length hexadecimal codes, or IDs, identifying content of Value field. VisaNet assigns tags one or two bytes long. For instance, **C0** = 1-byte tag; **DF01** = 2-byte tag.

If VisaNet does not assign a tag identifier, it may be longer than two bytes. For example, EMV defines three-byte tag identifiers for some field 55 TLV chip elements. In accordance with TLV best practices, if VisaNet receives such tags, it forwards them without any edits.

Data type specified by tag ID depends on the dataset. For instance, **01** specifies the type of data in one dataset and can specify a different type of data in another dataset.

- Length field is variable-length defining length of Value field. VisaNet supports Length fields one to three bytes long.
- Value field is variable-length containing data specified by tag.

In a TLV (Tag-Length-Value) structured element, the value component should contain significant data and should not be expanded to the maximum length of the element. The value must not be prefixed or appended with special characters or spaces that do not contribute to the actual value. For example, if the value is **ABC** and the TLV element has a maximum limit of 10 bytes, the value component of the TLV element must use length of 3 characters and contain **ABC**, it should not be padded with spaces or special characters to use up all 10 bytes.

Determining Number of Bytes in Tag Field: Tag field identifies data represented by TLV elements. Consists of one or more bytes. Right-most 5 bits of first byte specify whether tag consists of more than one byte: If 5 bits are on, tag is greater than one byte in length.

When tags are greater than one byte, left-most bits of subsequent bytes are set to **1** unless they are last bytes of tags.

Here, low-order bits b5 through b1 are set to **1**, indicating next byte is part of tag.

Table 18: Tag Code Binary Settings Example

b8	b7	b6	b5	b4	b3	b2	b1	Meaning
0	0							Universal class
0	1							Application class
1	0							Context-specific class
1	1							Private class
		0						Primitive object
		1						Constructed object
			1	1	1	1	1	See next byte (part of tag)
			Other value					Tag number

Determining Number of Bytes in Length Field: Length field represents number of bytes in Value field. One or more bytes long and uses short or long form. First bit indicates form.

Short Form: Left-most bit *off* indicates Length field is short form, consisting of one byte in which right-most 7 bits contain number of bytes in Value field as unsigned binary integer. Form supports data lengths of 127 bytes.

For instance, length **126** is encoded as binary **01111110** (hexadecimal equivalent of **7E**).

Long Form: Left-most bit *on* indicates Length field is long form, consisting of initial byte and one or more subsequent bytes in which right-most 7 bits of initial byte contain number of subsequent bytes in Length field as an unsigned binary integer. Bits of the subsequent bytes contain unsigned binary integers equal to number of bytes in Value field:

- Length **254** can be encoded as binary **11111110** (hexadecimal equivalent of **81FE**).
- Length **382** can be encoded as binary **00000001 01111110** (hexadecimal equivalent of **82017E**).
- Length **510** can be encoded as binary **00000001 11111110** (hexadecimal equivalent of **8201FE**).

TLV dataset used in address verification: Address is 800 METRO, 94404. Values in hexadecimal.

			Postal TLV			Address TLV		
F123 Length	Dataset ID	Dataset Length	Tag Postal Code	Length	Value	Tag Address	Length	Value
15	66	0012	C0	05	F9F4F4F0F4	CF	09	F8F0F040D4C5E3D9D6

- Length: one byte binary **21** (shown as hex **15**)
- Dataset ID: one byte binary **66**
- Dataset Length: two bytes binary **18** (shown as hex **12**)
- Tag Postal Code: one byte binary **C0**
- Length: one byte binary **5**
- Value: five bytes hex **F9F4F4F0F4**
- Tag Address: one byte binary **CF**
- Length: one byte binary **9**
- Value: nine bytes hex **F8F0F040D4C5E3D9D6**

TLV dataset structures can be constructed in “simple tokenized” or abbreviated form.

TLV Processing

For endpoints to correctly process TLV fields:

- TLV-format fields can contain multiple dataset IDs.
- Dataset IDs in composite fields can occur in any order.
- TLV-format fields can contain multiple occurrences of same datasets and tags. For instance, messages containing itemized statements may contain multiples of same dataset IDs, each possibly having same TLV elements for line items of statements or receipts. Value information for tags are unique to line-item details.
- Endpoints should ignore received dataset IDs that they do not recognize or expect and continue processing remaining dataset IDs in field.
- TLV elements within datasets can occur in any order.
- Endpoints should ignore tags that they do not recognize or expect and should continue processing remaining tags within datasets.
- Tag identifiers are not unique across datasets. For instance, field 104, usage 2 has several dataset IDs; each of these may have tag 01. Information in each tag 01 is different and unique to its associated dataset ID. Tags and dataset IDs combined define data elements.
- Endpoints should not send tags with lengths of zero bytes. V.I.P. passes through tags of any length it receives. Endpoints who receive zero-byte lengths must ignore such tags.

Bitmap Specifications

Message text segments of messages transmitted through VisaNet are variable length, with bitmaps specifying which fields are present and not.

If fields are present in messages but are not needed, clients should discard them. For instance, if acquirers receive field 14 in dispute financials, they should discard it because field 14 is not needed in dispute financials.

Message has one or more of three bitmaps. This section describes those bitmaps.

Message Header	Message Type ID	Bitmap	Data Fields
		Bitmap 1 = Fields 2–64	
		Bitmap 2 = Fields 66–128	
		Bitmap 3 = Fields 130–192	

The combinations of bitmaps in a VisaNet message are:

- The first bitmap
- The first and second bitmap
- The first, second, and third bitmap

This section also describes three field bitmaps: one in message header field 13, one in data field 62.0, and one in data field 63.0. These bitmaps indicate what information is present in those fields.

First, or Primary, Bitmap


Every message includes the bitmap, Primary. It is a control field consisting of 64 bits (8 bytes) located after the message type identifier. Except for the first bit, each bit is associated with the corresponding data field, that is, with data fields 2 through 64. The value in the bit indicates whether the data field is present in the message, as follows:

- If a bit is **0**, the field associated with that bit is not present.
- If a bit is **1**, the field associated with that bit is included in the message.

Data field number 1 does not exist. The first bit of the primary map is used to indicate if another bitmap, called the Secondary Bitmap, immediately follows this primary one. (See the next section.)

This figure illustrates the location and function of the primary bitmap. In this example, the first bit is **0**, meaning that no bitmap follows. The second, third, and fourth bits are **1**, meaning that fields 2, 3, and 4 are present in the message. The fifth and sixth bits are **0** (fields 5 and 6 not present); the seventh bit is **1** (field 7 is present), and so forth.

Example of Primary Bitmap

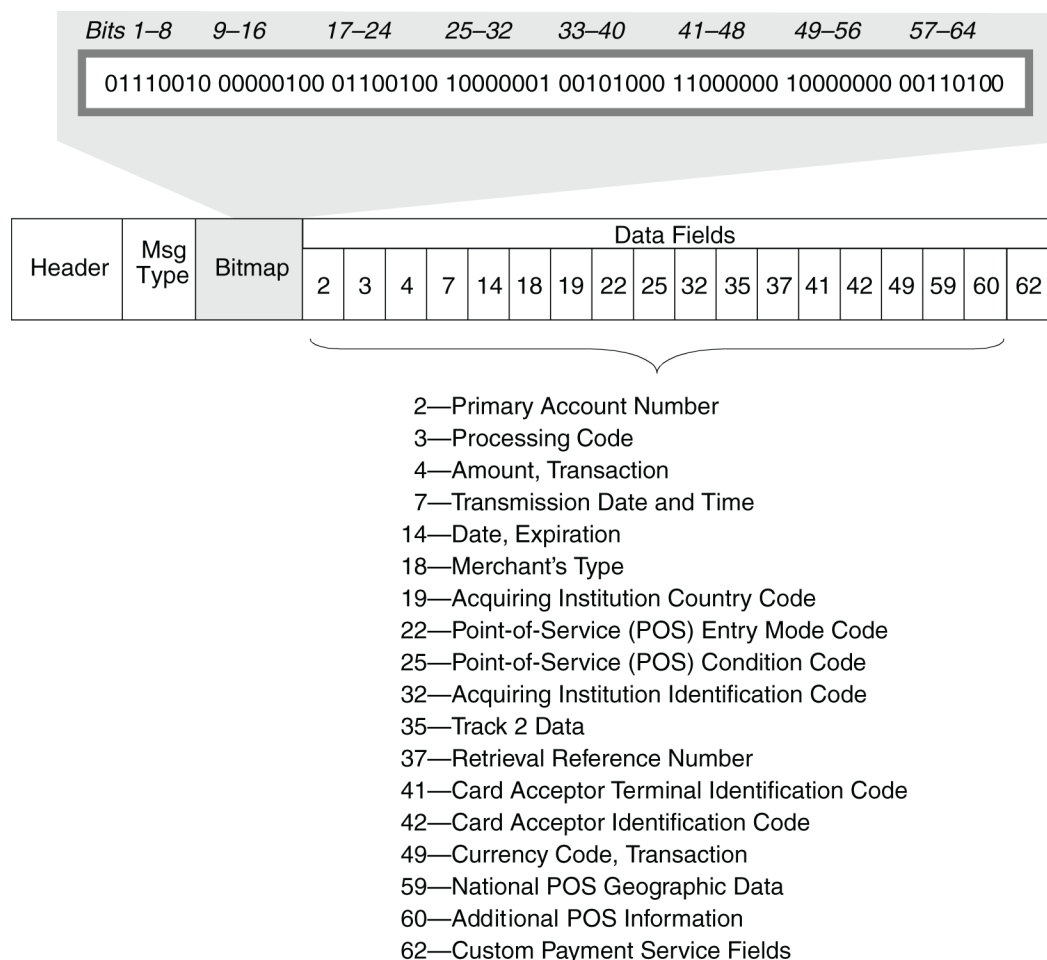

Second Bitmap

The first bit of the Bitmap, Primary indicates the presence or absence of a second map called the Bitmap, Secondary.

Like the primary map, the secondary map is a control field consisting of 64 bits (8 bytes). It is an extension of the primary map, because it is associated with fields 66 through 128. Data field 65 does not exist. This position (like that of field 1 in the primary map) is used to indicate the presence of another bitmap.

When no third bitmap is defined, the first bit of the secondary bitmap must be 0.

The secondary bitmap is included only when the message contains information in fields from 66 through 128. When present, the secondary map immediately follows the primary one and precedes the data fields.

Example of Secondary Bitmap illustrates the location and function of the secondary bitmap. In this example, the message includes field 90 in addition to those shown in the Primary Bitmap.

Example of Secondary Bitmap




The third bitmap is for Visa Smart Debit/Credit (VSDC) processing and includes fields 130–149 and field 192, as shown in this figure. This data is referred to as the *audit trail* and includes cryptograms and the fields required to generate the cryptograms.

The diagram illustrates a 192-bit field structure. It is divided into four main sections: **Bitmap 1**, **Bitmap 2**, **Bitmap 3**, and **Data Elements**. The **Data Elements** section is further labeled as **Fields 2–192**.

Each bitmap section contains a single bit, indicated by an upward arrow from the bit value to the text below:

- Bitmap 1:** The first bit is **1**. Below it, an arrow points to the text: "Bit 1 = 1 indicates second bitmap is present". The range **Bits 1–64** is indicated below the first bit.
- Bitmap 2:** The first bit is **1**. Below it, an arrow points to the text: "Bit 65 = 1 indicates third bitmap is present". The range **Bits 65–128** is indicated below the first bit.
- Bitmap 3:** The first bit is **0**. Below it, an arrow points to the text: "Bit 129 = 0 indicates fourth bitmap is not present". The range **Bits 129–192** is indicated below the first bit.

85

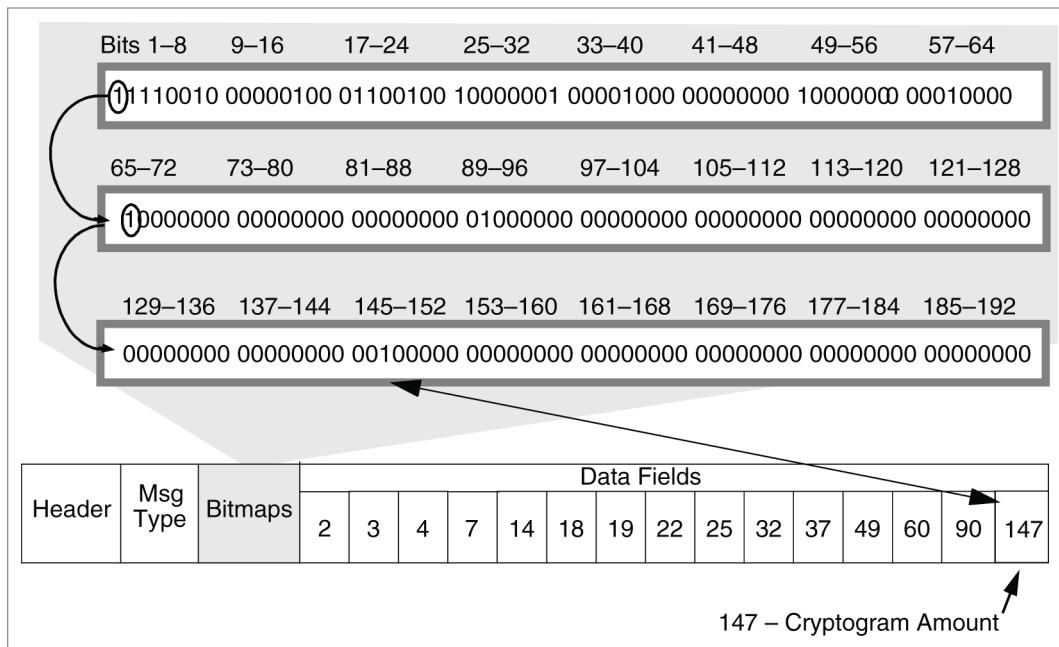

Field Bitmaps

Bitmaps can also be used to describe the content of a field within the message. Bitmap fields include header field 13 and data fields 62.0 and 63.0. In addition, several bitmap fields are defined for VSDC.

Header Field 13


Field 13 of the Message Header is defined as a bitmap consisting of 16 bits (two bytes). This bitmap indicates how many optional header fields follow the map. Currently, only one optional field (Header Field 14—Reject Code) has been established.

This figure illustrates the location and function of the bitmap.

This bitmap and the field after it are system-generated. Users may not insert this information in message headers; only VisaNet can create reject messages.

This figure illustrates the location and function of the bitmap. For details, see the description in Data Field Descriptions.

Field 63 Bitmap Example

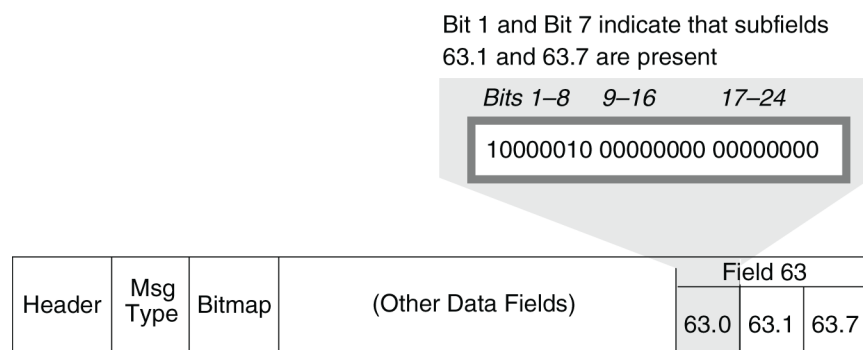

VSDC Data Fields

These VSDC fields are bit string fields. *Bitmap* is a concept under which each field in a message is assigned a position indicator in a control field, the “bitmap.” The control field is a bit string; each bit is associated with a field. If a bit is on, that field is present; if a bit is off, the corresponding field is absent.

Field 130—Terminal Capability Profile is a fixed-length VSDC field consisting of 3 bytes. Each byte contains several subfields. For details, see the “Field 130” description in Data Field Descriptions.

Field 131—Terminal Verification Results is a fixed-length VSDC field consisting of 5 bytes. Each byte contains several subfields. For details, see the “Field 131” description in Data Field Descriptions.

Field 134.3—Card Verification Results (CVR) is a variable-length VSDC bitmap subfield with a maximum of 4 bytes. Each byte contains several subfields. For details, see the “Field 134.3” description in Data Field Descriptions.

Field 138—Application Interchange Profile is a fixed-length VSDC field consisting of 2 bytes. Each byte contains several subfields. For details, see the “Field 138” description in Data Field Descriptions.

Field 143—Issuer Script Results is a variable-length VSDC field with a maximum of 21 bytes. The length subfield specifies the number of bytes present in this field, and each byte contains one or more subfields. For details, see the “Field 143” description in Data Field Descriptions.

Message Header Field Specifications

This section describes the Visa-developed message header that is required in all online messages processed by VisaNet.

Message Header	Message Type ID	Bitmap	Data Fields
----------------	-----------------	--------	-------------

Bitmap 1 = Fields 2–64

Bitmap 2 = Fields 66–128

Bitmap 3 = Fields 130–192

This header length is variable. It contains 12 mandatory, fixed-length header fields, plus a bitmap in the 13th header field that specifies the number of fields present after that bitmap. Currently, only one optional header field has been defined and reserved for Visa in reject headers. There are two types of headers:

- A standard header contains 12 header fields (22 bytes) that specify lengths, routing IDs, and other system-related processing data.
- A reject message header, generated only by VisaNet, contains 14 header fields (26 bytes). This includes the 22-byte standard header plus four additional bytes for the bitmap and reject information.

Visa can modify the header to accommodate new flags for VisaNet.

Under no circumstance should a processor adopt for its own use what may appear to be an unused bit in the header.

Standard Message Header

This figure illustrates the header fields that comprise a standard message header. This header is generated by the client processing center for all outgoing messages.

Standard Message Header Fields


Field 1	Field 2	Field 3	Field 4	Field 5	Field 6	Field 7
Header Length	Header Format	Text Format	Total Message Length	Destination ID	Source ID	Round-Trip Control Info
Byte 1	Byte 2	Byte 3	Bytes 4-5	Bytes 6-8	Bytes 9-11	Byte 12

Field 8	Field 9	Field 10	Field 11	Field 12
Flags	Message Status Flags	Batch Number	Reserved for Visa Use	User Information
Bytes 13-14	Bytes 15-17	Byte 18	Bytes 19-21	Byte 22

Reject Message Header

VisaNet generates the reject message header when V.I.P. finds a syntax or message-construction error. An incoming rejected message contains the reject message header followed by the original message header and data, as shown in this figure.

Structure of a Rejected Message

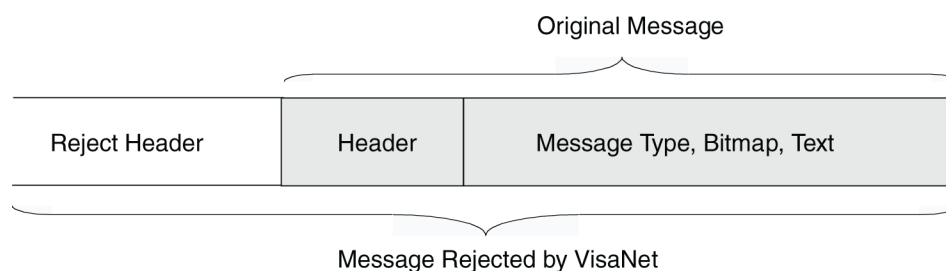

The reject message header has two extra header fields: a bitmap, and a reject data group field that contains a 4-digit reject code describing the error. To determine if an incoming message contains a reject message header, the processor must check two header fields as follows:

- Header field 1 length must be **26** or higher.
- Header field 13 bit one must be **1** (which means that the header includes header field 14).

A client processing center never creates a reject header but should be prepared to receive it in incoming messages. This figure illustrates the header fields that comprise a reject message header.

Reject Message Header Fields

Field 1	Field 2	Field 3	Field 4	Field 5	Field 6	Field 7
Header Length	Header Format	Text Format	Total Message Length	Destination ID	Source ID	Round-Trip Control Info
Byte 1	Byte 2	Byte 3	Bytes 4-5	Bytes 6-8	Bytes 9-11	Byte 12

Field 8	Field 9	Field 10	Field 11	Field 12	Field 13	Field 14
Flags	Message Status flags	Batch Number	Reserved	User Information	Bitmap	Reject Data Group
Bytes 13-14	Bytes 15-17	Byte 18	Bytes 19-21	Byte 22	Bytes 23-24	Bytes 25-26

This header is followed by the header from the original message being rejected.

Constructing Message Headers

When a client processing center creates a request or advice message, the header is built using the information for the data message being sent. When a client processing center receives a request or advice, it must preserve certain information from the header because it must be returned in the reply. This involves header fields 5, 6, 7, 8, 9, 10, 11, and 12.

When a client processing center creates a response or advice response, it must process the header information saved from the incoming request or advice, as follows:

- Switch the information in Header Field 5—Destination Station ID and Header Field 6—Source Station ID—unless the reply is being returned from a station other than the one that received the request. In that case, Header Field 6—Source Station ID must contain the ID of the station that transmits the reply.
- Return these header fields unchanged:
 - Header Field 7—Round-Trip Control Information
 - Header Field 8—V.I.P. Flags
 - Header Field 10—Batch Number
 - Header Field 11—Reserved
 - Header Field 12—User Information
- Return the settings of all bits in Header Field 9—Message Status Flags unchanged.
- Create the values for the remaining header fields.

Key to Header Field Descriptions


This key explains how to interpret the header field descriptions in this chapter.

Sequence

The header fields in a message header are numbered sequentially; they are presented here in that order.

Bit Numbers

VisaNet counts bits from left to right, starting with 1.

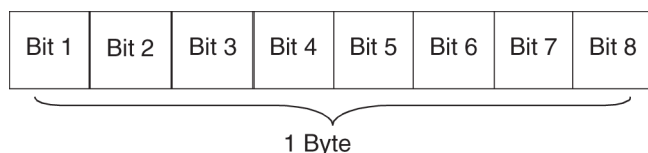

Header Field Description Components

This table describes the information components for the header field descriptions.

Table 19: Information Components

Component Label	Type of Information
Attributes	Header field length and format
Generated By	Indicates which entities can set non-zero values for the header field: a client processing center or VisaNet
Description	Intended content of the header field and code definitions when applicable
Usage	Special considerations applicable to processing of the header field
Comments	Additional information
Field Edits	The rules for header field content and presence; failure to comply results in message rejection
Reject Code	Codes that appear in reject message headers when this header field is in error

Header Field Descriptions

This section specifies header field formats, describes header field contents and use, and gives the reject code that signifies invalid data in a header field. The values for certain header fields are set by the user; values for other header fields are determined by Visa.

- Header fields 1 through 12 are mandatory.
- Header fields 13 and 14 are conditional.

Header Field 1 – Header Length

Header Field 1 – Attributes

1B (binary)

1 byte

Header Field 1 – Generated by

Header field 1 is generated by the processor or VisaNet.

Header Field 1 – Description

Header field 1 specifies the number of bytes in this header in hexadecimal.

Header Field 1 – Usage

Rather than coding header lengths explicitly, such as 22 or 26, users should check the value in this field to find the start of the message text. This practice permits future expansion of the header with minimal software impact.

Do not assume that this header field is a reject header based on the content of this field alone. In a reject header, the length must be **26** or higher, and the first bit of header field 13 must be **1**.

Header Field 1 – Field Edits

The field edits must be between 22 and 32 bytes.

Header Field 1 – Reject Codes

0012 = Invalid value

Header Field 2 – Header Flag and Format

Header Field 2 – Attributes

8 N, bit string

1 byte

Header Field 2 – Generated by

Header field 2 is generated by the processor or VisaNet.

Header Field 2 – Description

Header field 2 specifies the presence or absence of a message header following this header field, and the format of this message header.

The first bit is a flag:

0 = No header follows this one

1 = Another header follows this one

The last seven bits contain a binary value that identifies the format of this message header:

1 = The VisaNet format, as specified in this chapter. (Additional codes may be assigned by Visa, if necessary.)

Header Field 2 – Usage

None.

Header Field 2 – Field Edits

In all processor-generated outgoing messages, field 2 must be the binary value **0000 0001**.

In an incoming reject message, field 2 must be the binary value **1000 0001**.

Header Field 2 – Reject Codes

0013 = Invalid value

Header Field 3 – Text Format

Header Field 3 – Attributes

1B (binary)

1 byte

Header Field 3 – Generated by

Header field 3 is generated by the processor or VisaNet.

Header Field 3 – Description

Header field 3 is a code that specifies the message data field format. These codes, or flags, apply:

- **1** = V.I.P. Text Format: Debit ISO format.
- **2** = V.I.P. Text Format: Field 62, if present, is in bitmap format.
- **x'1A'** = V.I.P. Text Format: Expanded Variable Length Format. (Field 62, if present, is in bitmap format.)

Header Field 3 – Usage

For the initiator of a request or advice, V.I.P. returns the header field 3 value from the request in the response. For example, if the value in the request is **2**, the value in the response sent back to the initiator is **2**.

For an endpoint that is receiving a request or advice, V.I.P. determines the value to be used in the message by the option specified in the endpoint's Processor Center Record (PCR). In the associated reply, an endpoint must return the value that it received in the request or advice. For example, if the endpoint receives a **2** in the request or advice, it must return a **2** in the response.

In requests and responses that use text format **1**, the endpoint must be configured for message text format.

In requests and responses that include field 62, an endpoint must use text format **2** or hexadecimal **1A** (x'1A'). The endpoint should use the value in all request and advice messages that it originates, including messages that do not contain field 62.

When header field 3 is set to **2** or x'1A', field 62 and all its subfields may be present, as indicated in the bitmap, and acquirers and issuers must be able to receive the subfields in messages that carry them.

Header field 3 is a retain-and-return field. Acquirers and issuers must return the value received in header field 3 in response messages.

Header Field 3 – Field Edits

The value in this field must be **1**, **2** or x'1A'. Otherwise, V.I.P. rejects the message.

Header Field 3 – Reject Codes

0015 = Invalid value

Header Field 3 – Valid Values

This table describes the text format codes for header field 3.

Table 20: Header Field 3 Text Format Codes

Code	Definition
1	Debit ISO format
2	Visa implementation of the ISO standard format: Field 62 bitmap format (or not present) Note: This format is required for Automated Teller Machine (ATM) transactions containing field 62.
x'1A'	Visa ISO expanded variable length format.

Header Field 4 – Total Message Length

Header Field 4 – Attributes

2B (binary)


2 bytes

Header Field 4 – Generated by


Header field 4 is generated by the processor or VisaNet.

Header Field 4 – Description

Header field 4 specifies the total number of bytes in this message and reflects the length of this message from the start of this header to the end of the message, as shown below.

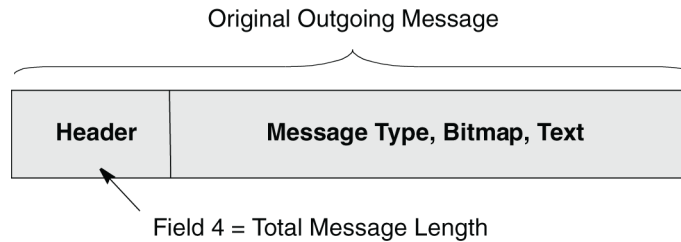

If this is a reject message header (followed by the original standard message header and text), header field 4 of the reject message header reflects the length of the entire message. The value in header field 4 in the original message header reflects the original length.

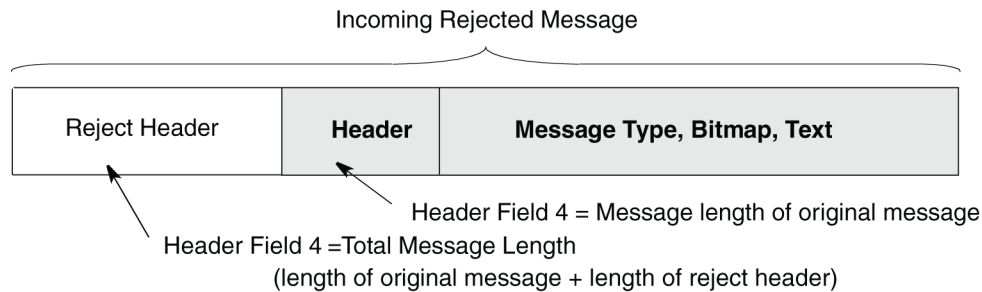

Header Field 4 – Usage

There is no usage for header field 4.

Header Field 4 – Field Edits

In standard VisaNet (non-reject) messages, the value must be greater than **32** and not more than **0800**.

Header Field 4 – Reject Codes

0016 = Invalid value

Header Field 5 – Destination Station ID

Header Field 5 – Attributes

6 N, 4-bit Binary-Coded Decimal Notation (BCD) (unsigned packed)

3 bytes

Header Field 5 – Generated by

Header field 5 is generated by the processor or VisaNet.

Header Field 5 – Description

Header field 5 identifies the station to which the message is routed.

Header Field 5 – Usage

When a processor creates a request or advice, it zero-fills this field. The client's VisaNet connection, along with VisaNet, replaces the **zeros** with the station ID.

When a processor replies to a request or advice, the processor inserts the ID from Header Field 6–Source Station ID of the incoming message.

Header Field 5 – Field Edits

In outgoing user-created requests and advices, the value must be zeros.

In all responses and advice responses, the field must contain a station ID.

Header Field 5 – Reject Codes

0003 = Invalid value

0524 = Destination station in the header is not **zero**.

Header Field 6 – Source Station ID

Header Field 6 – Attributes

6 N, 4-bit BCD (unsigned packed)

3 bytes

Header Field 6 – Generated by

Header field 6 is generated by the processor or VisaNet.

Header Field 6 – Description

Header field 6 identifies the station that introduced the message into the network. The station may or may not be the station that initially collected the transaction data.

Header Field 6 – Usage

Normally, when the station receiving an incoming request or advice creates a reply, the ID in Header Field 5—Destination Station ID is preserved as the source station ID in the reply.

If a different station is creating the reply, header field 6 contains the source station ID of the station creating the reply. In this instance, however, the ID from header field 5 of the request is not used.

Header Field 6 – Field Edits

Every outgoing message must contain a ID that reflects the station assigned to the endpoint by VisaNet. The source station must be signed on. If the source station ID does not identify a network endpoint, the message is logged and no further processing occurs.

In acquirer-initiated requests, advices, dispute financial responses, and dispute financial reversal responses, the source must be an acquirer station.

In issuer-initiated advices, responses, and advice responses, source must be a issuer station. In issuer-initiated requests and advices that include an account number, source must be associated with the center that authorizes for that account.

Header Field 6 – Reject Codes

0004 = Invalid value; source station ID in header

0021 = Source PCR must be authorized.

0606 = Not signed on

*Under certain conditions authorization-only acquirers may not receive a reject code **0606**.*

Header Field 7 – Round-Trip Control Information

Header Field 7 – Attributes

8 N, bit string

1 byte

Header Field 7 – Generated by

Header field 7 is generated by VisaNet.

Header Field 7 – Description

Header field 7 is reserved for Visa and is set by VisaNet. It contains additional information that must be returned in a reply.

Header Field 7 – Usage

The processor does not code this header field when it generates a request or advice. When a request or advice is received, the center *must preserve the value received in this field and return that value unchanged* in the response message. If the values in a response are zeros rather than the value received, the message is not rejected, but it cannot be routed back to the requestor.

In an incoming request or advice, this field identifies where the request originated.

Header Field 7 – Field Edits

In client-generated outgoing responses, the field edits must be the values from the corresponding request or advice.

Header Field 7 – Reject Codes

None.

Header Field 8 – V.I.P. Flags

Header Field 8 – Attributes

16 N, bit string

2 bytes

Header Field 8 – Generated by

Header field 8 is generated only by VisaNet.

Header Field 8 – Description

As defined and used by V.I.P.

Header Field 8 – Usage

The values received in this field of the request must be preserved and returned unchanged in the response.

Header Field 8 – Field Edits

There are no field edits for header field 8.

Header Field 8 – Reject Codes

There are no reject codes for header field 8.

Header Field 9 – Message Status Flags

Header Field 9 – Attributes

24 N, bit string


3 bytes

Header Field 9 – Generated by

Header field 9 is generated by VisaNet.

Header Field 9 – Description

This field is used to control processing of the message. The flags that are currently defined are identified with check marks in the figure.



V.I.P. sets these bits to the acquirer's region code in messages.

This flag is set to **1** to indicate that VisaNet has settlement responsibility for this transaction. This flag does not indicate that the transaction is settled.

This flag is set to **1** indicating this transaction has financial impact and the value of the transaction (if approved) is included in the settlement accumulation during processing of this request-response or advice-advice response message pair.

Note that this flag does not indicate that online reconciliation totals are updated if Field 63.4—STIP/Switch Reason Code contains **9101**.

This flag is set to **1** indicating this transaction has financial impact, but VisaNet has updated its reconciliation totals for the value of this transaction. Thus, reconciliation totals were not changed during the processing of this request-response (or advice-advice response) message pair. When the flag is **1**, the settlement date and batch number are the original date and batch. (This flag is used for duplicates.)

This flag is set to **0** if the transaction is ineligible for settlement processing.

Byte 2, Bit 4, Advice-Created-By Flag: This flag is set by VisaNet. It is meaningful only in advice messages.

This flag indicates where an advice message originated.

It is set to **1** for advices generated by STIP.

It is set to **0** in advices generated by a user (even when VisaNet must place the advices in the Advice File for later delivery).

Byte 2, Bit 5, Advices-Pending Flag: This flag is set by VisaNet.

The Visa Authorisation System does not set reliable information for this flag.

This flag indicates if there are advices in the Advice File awaiting recovery. When advices are pending for the destination of a message, VisaNet sets this flag to **1** before forwarding the message. Thus, this flag is set in every incoming message until all advices have been recovered. This flag is intended primarily to tell an issuer that STIP is processing on its behalf because its responses are exceeding the Assured Transaction Response (ATR) time-out limit.

Byte 2, Bit 6, Reserved: This flag is set by VisaNet.

VisaNet sets this flag with a value of **0** or **1**.

Byte 2, Bit 8, Advice-Transaction Flag: This flag is set by VisaNet and is meaningful only in advice messages.

This flag is set to **1** to identify advices retrieved from the Advice File when the receiving station is in “recovery mode” (that is, it has activated advice transmission). This identification is needed in case the message is returned to VisaNet by the receiving station.

Byte 3, Bit 1, Returned Message Flag: this flag is set by a VisaNet connection.

This flag is set to **1** to identify a message being returned because the destination is unavailable.

Byte 3, Bits 2, 3, and 4, Settlement Flag: This flag is set by the client.

The combined value of bits **2**, **3**, and **4** is used to define the settlement flag.

Table 21: Header Field Settlement Flag Bit Settings

Bits				
2	3	4	Description	Clearing Equivalent
0	0	1	International Settlement	Settlement flag of 0
0	1	0	National Bilateral Settlement	Settlement flag of 6
1	0	0	National Net Settlement	Settlement flag of 8

The originator of a request or advice can default all three bits to **zero** (which means the originator of the transaction lets VisaNet decide the settlement service or that a settlement service is not applicable for this transaction).

NNSS are available for countries whose issuers and acquirers have negotiated an agreement for domestic transactions. To participate in this service, the ATM location, the acquirer, and the issuer must be in the same country. The transaction currency is the local currency.

The settlement service, National Net or International, can be requested by the acquirer in original transactions. The settlement service is determined by VisaNet and may be different from the service requested by the acquirer. For example, an acquirer requests NNSS on a given transaction, but because it does not qualify, the transaction is processed through International Settlement; in this case, the value of bits 2–4 of byte 3 is changed from **100** to **001**.

An originator of a subsequent message related to an original transaction must use the value of the Settlement Flag supplied by VisaNet in the original transaction.

If the client provides an invalid value or a value for which the transaction is not qualified, one of these processes occur:

- For online transactions, VisaNet selects and uses the International Settlement Service. The Settlement Flag is changed accordingly (bits 2–4 of byte 3 contain **001**).
- For back-office transactions, Visa returns (rejects) the transaction back to the originator of the request message with a reject code of **147**, **624**, or **625** (see “Reject Codes”).

Table 22: Message Types and Transactions

Message Type	Transaction
02xx Message Types (Except for Balance Inquiry and Account Transfer)	Cash Disbursements Adjustments (Cash Disbursement and Back Office) Dispute Response Financials Fee Collections/Funds Disbursements
04xx Messages	Reversals (Except for Dispute Financial Reversals and Account Transfer Reversals) Dispute Financials Fee Collections/Funds Disbursements
05xx Reconciliation Messages	All 05xx Reconciliation Messages

For these message types, the default value of the Settlement Flag is zero in bits 2–4 of byte 3.

Clients can leave the selection of the settlement service to VisaNet, in which case bits 2–4 of byte 3 also contain zero. If the transaction type is one listed in the Settlement Flag Usages table, the default settlement service for the country is National Net Settlement, and if the NNSS criteria are satisfied, the transaction settles through National Net. If the National Net Settlement Service criteria are not satisfied, the transaction settles through International Settlement. The Settlement Flag is changed accordingly by VisaNet.

Authorization-only clients may receive populated settlement flags if V.I.P. determines the transaction settled in the National Net Settlement Service (NNSS).

This table demonstrates the possible change in values of the Settlement Flag in all affected 02xx and 04xx messages.

Table 23: Settlement Flag Usages for 02xx and 04xx Messages

Request/Advice Originator	1 —>	VisaNet	2 —>	Request/Advice Recipient
	<— 4		<— 3	

This list describes the actions illustrated in Settlement Flag Usages:

1. The originator of the request or advice submits the requested settlement service, and VisaNet determines the settlement service.
2. The settlement service is passed in the request to the recipient of the request or advice.
3. The recipient sends the settlement service back in the response.
4. VisaNet sends the settlement service back to the originator in the response.

Header Field 9 – Usage

When a client's processing center generates a normal request or advice, this entire field should be filled with **zeros**, except as noted above in the description for byte 3. (For the case when a request or advice is being returned, see the description of the Returned Message Flag.)

When a client's processing center generates a normal response or advice response, this field must contain the values received in the corresponding request or advice.

When a host-direct center must return a message because it cannot deliver it to the center host, it must set the Returned Message Flag to **1** and return every other bit unchanged.

The values received in this field of the request must be preserved and returned unchanged in the response.

Header Field 9 – Field Edits

Byte 1, bit 8 must be **0**.

For back-office transactions, the transaction must qualify for the settlement service specified in the settlement flag (byte 3, bits 2–4).

Header Field 9 – Reject Codes

0025 = Invalid value; response does not match request

0147 = Invalid settlement service value in byte 3, bits 2–4

0527 = Invalid value in byte 1, bit 8

0601 = Consistency error; message is part of a known transaction, but one or more of these sets contain elements that do not match:

- First two digits of processing code, except the code is different for a dispute financial reversal
- Transaction amount, except the amount may be different in a dispute financial, dispute financial reversal, or dispute response financial
- Type of cardholder function
- Transaction group (financial transaction or adjustment)

0602 = Consistency error; message is out of sequence with previously processed messages for same cardholder transaction

0603 = Consistency error; possible conditions can be:

- Response or advice response is inconsistent with request or advice. One of these fields does not match:
 - Account number
 - Transaction amount
 - Processing code
 - Original data elements message type, or POS condition code (if **13**, **17**, or **54**).
- The time value is present in the request/advice **OR** response/advice response.
- The message type in the response/advice response is not the proper one for the request or advice.

0604 = Consistency error; duplicate response

0625 = National Bilateral requested but transaction does not qualify for the service (used only on a back-office transaction)

Header Field 10 – Batch Number

Header Field 10 – Attributes

1B (binary)

1 byte

Header Field 10 – Generated by

Header field 10 is generated by VisaNet.

Header Field 10 – Description

This field contains the VisaNet-assigned batch number for this message. As each new request or advice is received at VisaNet, the current reconciliation batch number is inserted in this field.

When a duplicate message that was previously processed is received at VisaNet, the batch number, and the settlement date in field 15, are set to the value established in the earlier processing.

VisaNet assigns batch number 255 to advices created for transactions coming from clearing endpoints.

Header Field 10 – Usage

When clients' processing centers generate outgoing requests or advices, they set this field to **zeros**. Client processing centers receive non-**zero** values in this field for all incoming messages.

The values received in this field of the request must be preserved and returned unchanged in the response.

Header Field 10 – Field Edits

In a client-generated outgoing request or advice, this field must contain zeros. In a client-generated response or advice response, this field must contain the values received in the corresponding request or advice. Although this field is not edited, Visa monitors transactions for endpoint compliance.

Header Field 10 – Reject Codes

There are no reject codes for header field 10.

Header Field 11 – Reserved

Header Field 11 – Attributes

3B (binary)

3 bytes

Header Field 11 – Generated by

Header field 11 is generated by VisaNet.

Header Field 11 – Description

Header field 11 is used internally by VisaNet. Byte 1, bits 2 through 8, are used for routing information. Bytes 2 and 3 are used by the VisaNet connection.

Header Field 11 – Usage

When processors generate outgoing requests or advices, they set this field to **zeros**.

The value received in this field of the request or advice must be preserved and returned unchanged in the response.

Header Field 11 – Field Edits

In processor-generated requests, this field must be zero-filled.

In a processor-generated response, this field must contain the values received in the corresponding request.

Header Field 11 – Reject Codes

0031 = Invalid value

Header Field 12 – User Information

Header Field 12 – Attributes

1B (binary)

1 byte

Header Field 12 – Generated by

Header field 12 is generated by the client processor.

Header Field 12 – Description

Header field 12 is an acquirer-defined value that can be used, as needed, to facilitate client center processing. For instance, this value could identify the source of a request, such as a CPU identifier or a dial-up line identifier.

This value is for internal use only by the processor. The value has no meaning in the network or for other processors.

Header Field 12 – Usage

In an outgoing request, this field contains the user-defined value at the processor's discretion. If user information is not required, this field must be zero-filled. For an outgoing response, a processor must preserve this field from the request and return it unchanged in the response.

Header Field 12 – Field Edits

There are no field edits for header field 12.

Header Field 12 – Reject Codes

There are no reject codes for header field 12.

Header Field 13 – Bitmap

Header Field 13 – Attributes

16 N, bit string

2 bytes

Header Field 13 – Generated by

Header field 13 is generated by VisaNet.

Header Field 13 – Description

Specifies if header field 14 is present, i.e., if this is a reject message header that contains a reject code in header field 14.

Header field 13 is included only in VisaNet-generated reject message headers. When present, bit 1 is set to **1**, indicating that header field 14 follows.

Header Field 13 – Usage

Client processors must omit this field in all outgoing messages.

Header Field 13 – Field Edits

There are no field edits for header field 13.

Header Field 13 – Reject Codes

There are no reject codes for header field 13.

Header Field 14 – Bitmap, Reject Data Group

Header Field 14 – Attributes

4 N, 4-bit BCD (unsigned packed)

2 bytes

Header Field 14 – Generated by

Header field 14 is generated by VisaNet.

Header Field 14 – Description

When an error in a message prevents it from being sent to its usual destination, the message is returned to the originator, and this field is used to identify the reason for the return.

When a header includes this header field (header field 14), the text after the header consists of the original message header and message text in error. Header field 2 of the reject message header must indicate that another message header follows.

Reject reason codes are listed in the appendix titled “Reject Codes” and also in applicable field descriptions.

Header Field 14 – Usage

None.

Header Field 14 – Field Edits

There are no field edits for header field 14.

Header Field 14 – Reject Codes

There are no reject codes for header field 14.

Chapter 3

Field Attributes

The tables provide VisaNet and ISO data field summary information and are followed by the individual field descriptions:

- The table titled “Message Header and Data Fields—Alphabetical Order” lists current VisaNet data elements alphabetically by name. Data subfield names are included for all fields except field 127.
- The table titled “Field 127 Subfields—Alphabetical Order” lists the subfields of field 127—a Visa-defined, private-use field for file maintenance messages—in alphabetical order by subfield name.
- The table titled “Field Attributes” lists the attributes of all fields used by Visa. Fields defined by ISO 8583 do not include subfields; attributes are defined at the field level.
- The table titled “Unused Message Fields” lists fields defined by ISO 8583 but not yet used by Visa.

Field 127 Subfields

Field 127 Subfields – Alphabetical Order

Table 24: Field 127 Subfields—Alphabetical Order

Field Name	Field Number
Action Code	127E.1
AVV	127A.2
Algorithm Identifier	(See PIN verification data)
ALP Product File Maintenance	127.L1
ATM Cash Activity Limit— “available”	127R.22
ATM Cash Activity Limit— “unavailable”	127R.23
Auto Rental Activity Limit—“available”	127R.10
Auto Rental Activity Limit—“unavailable”	127R.11
Cardholder Spending Amount Limit	127E.3
Cardholder Spending Count Limit	127E.4
Filler	127R.4
Filler	127R.5
File Update Code	—
File Maintenance	127
Lodging Activity Limit—“available”	127R.8
Lodging Activity Limit—“unavailable”	127R.9
Mail/Telephone Activity Limit—“available”	127R.14
Mail/Telephone Activity Limit—“unavailable”	127R.15
Merchant Data 1	127M.2 (n/a)
Merchant Data 2	127M.3 (n/a)
Merchant Data 2	127M.4 (n/a)
Merchant Record Type	127M.1 (n/a)
Filler	127R.2
Filler	127R.3
PIN Verification Data	127P.1
Postal Code (Address Verification)	127A.1
Purge Date	—

Table 24: Field 127 Subfields—Alphabetical Order

Field Name	Field Number
Region Coding	127E.2
Restaurant Activity Limit—"available"	127R.12
Restaurant Activity Limit—"unavailable"	127R.13
Risk Level	127R.1
Risky Purchase Activity Limit—"available"	127R.16
Risky Purchase Activity Limit—"unavailable"	127R.17
Security Data	(See PIN verification data)
State Province Region Code Identifier	127C.1
State Province Region Code	127C.2
Total Cash Activity Limit—"available"	127R.20
Total Cash Activity Limit—"unavailable"	127R.21
Total Purchase Activity Limit—"available"	127R.18
Total Purchase Activity Limit—"unavailable"	127R.19
Travel Activity Limit—"available"	127R.6
Travel Activity Limit—"unavailable"	127R.7

Field Attributes

For the tables in this section, the three columns under the Type, Length, and Attributes headings provide:

Field type	A <i>V</i> can indicate a variable-length BCD field where the length subfield specifies the number of real digits that follow. The lead zero, required when the first half byte of a 4-bit BCD field is not used, is not included in the length count. A <i>V</i> also can indicate variable-length EBCDIC, AN or ANS field where the length subfield specifies the number of bytes that follow. <i>F</i> indicates a fixed-length field.
Field length	The number of bytes for this field. The maximum number of bytes allowed for <i>V</i> fields, including the length subfield. For <i>F</i> fields, this is the fixed length of the field.
Attributes	For <i>V</i> fields, the first byte is a binary value specifying the length of data. This length subfield is shown here as <i>1 B</i>. The remainder of the specification gives the format of the data and the maximum number of positions (digits, characters, bits, and so on) allowed. For <i>F</i> fields, this is the format and number of positions required. For all fields, the format can be: • A (alpha, EBCDIC) • AN (alphanumeric, EBCDIC) • ANS (alphanumeric/special characters, EBCDIC) • B (binary value) • BCD (numeric, 4-bit = unsigned packed) • Bit string • N (numeric, 1 byte per character)

Special characters are characters such as commas, slashes, and dashes.

Field Attributes

This table lists the attributes of all fields used by Visa. Fields defined by ISO 8583 do not include subfields; attributes are defined at the field level.

Visa does not use all ISO fields. This table shows ISO fields and their attributes.

Table 25: Field Attributes

Field Number	Field Name	Type	Length	Attributes
n/a	Message Type Identifier	F	2	4 BCD
n/a	Primary Bitmap	F	8	64-bit string
n/a	Second Bitmap	F	8	64-bit string
n/a	Third Bitmap	F	8	64-bit string
H1	Header Length	F	1	binary

Table 25: Field Attributes

Field Number	Field Name	Type	Length	Attributes
H2	Header Flag and Format	F	1	8-bit string
H3	Text Format	F	1	binary
H4	Total Message Length	F	2	binary
H5	Destination Station ID	F	3	6 BCD
H6	Source Station ID	F	3	6 BCD
H7	Round Trip Control Information	F	1	binary
H8	Authorization-Only Flags	F	2	16-bit string
H9	Message Status Flags	F	3	24-bit string
H10	Batch Number (not used)	F	1	binary
H11	Reserved	F	3	binary
H12	User Information	F	1	binary
H13	Bitmap	F	2	16-bit string
H14	Bitmap	F	2	4 BCD
2	PAN (Primary Account Number)	V	≤11	1 B + 19 BCD ¹
3	Processing Code	F	3	6 BCD
4	Amount, Transaction	F	6	12 BCD
5	Amount, Settlement	F	6	12 BCD
6	Amount, Cardholder Billing	F	6	12 BCD
7	Transmission Date and Time	F	5	10 BCD
8	Amount, Cardholder Billing Fee	F	4	8 BCD (unused)
9	Conversion Rate, Settlement	F	4	8 BCD
10	Conversion Rate, Cardholder Billing	F	4	8 BCD
11	System Trace Audit Number	F	3	6 BCD
12	Time, Local Transaction	F	3	6 BCD
13	Date, Local Transaction	F	2	4 BCD
14	Date, Expiration	F	2	4 BCD
15	Date, Settlement	F	2	4 BCD
16	Date, Conversion	F	2	4 BCD
17	Date, Capture	F	2	4 BCD (unused)

Table 25: Field Attributes

Field Number	Field Name	Type	Length	Attributes
18	Merchant Type	F	2	4 BCD
19	Acquiring Institution Country Code	F	2	3 BCD ¹
20	PAN Extended, Country Code	F	2	3 BCD ¹
22	POS Entry Mode Code	F	2	4 BCD
23	Card Sequence Number	F	2	3 BCD
24	Network International Identifier	F	2	3 BCD ¹ (unused)
25	POS Condition Code	F	1	2 BCD
26	POS PIN Capture Code	F	1	2 BCD
27	Authorization Identification Response Length	F	1	1 BCD ¹ (unused)
28	Amount, Transaction Fee	F	9	1 AN + 8 N
29	Amount, Settlement Fee	F	9	9 AN (unused)
30	Amount, Transaction Processing Fee	F	9	9 AN (unused)
31	Amount, Settlement Processing Fee	F	9	9 AN (unused)
32	Acquiring Institution Identification Code	V	≤7	1 B + 11 BCD ¹
33	Forwarding Institution Identification Code	V	≤7	1 B + 11 BCD ¹
34	Acceptance Environment Data	V	≤1537	2 bytes + 1535 Binary ¹
35	Track 2 Data	V	≤20	1 B + 37 BCD ¹ and hex 'D'
36	Track 3 Data	V	≤53	1 B + 104 BCD (unused)
37	Retrieval Reference Number	F	12	12 AN ²
38	Authorization Identification Response	F	6	6 AN
39	Response Code	F	2	2 AN
41	Card Acceptor Terminal Identification	F	8	8 ANS
42	Card Acceptor Identification Code	F	15	15 ANS
43	Card Acceptor Name/Location	F	40	40 ANS
44	Additional Response Data	V	≤26	1 B + 25 ANS ³
44.1	Response Source/Reason Code	F	1	1 AN
44.2	Address Verification Result Code	F	1	1 AN (n/a)

Table 25: Field Attributes

Field Number	Field Name	Type	Length	Attributes
44.4	Extended STIP Reason Code	F	1	1 AN
44.5	CVV/iCVV Denial Reason Code	F	1	1 ANS
44.6	PACM Diversion-Level Code	F	2	2 ANS (n/a)
44.7	PACM Diversion Reason Code	F	1	1 ANS (n/a)
44.8	Card Authentication Results Code	F	1	1 ANS
44.11	Original Response Code	F	2	2 AN
45	Track 1 Data	V	≤77	1 B + 76 ANS (n/a)
46	Amounts, Fees	V	≤256	1 B + 255 ANS
47	Additional Data–National	V	≤256	1 B + 255 ANS (unused)
48	Additional Data—Private	V	≤256	1 B + 255 ANS ⁴
49	Currency Code, Transaction	F	2	3 BCD ¹
50	Currency Code, Settlement	F	2	3 BCD ¹
51	Currency Code, Cardholder Billing	F	2	3 BCD ¹
52	Personal Identification Number (PIN) Data	F	8	64-bit string
53	Security-Related Control Information	F	8	16 BCD
54	Additional Amounts	V	≤121	1 B + 120 ANS
55	Integrated Circuit Card (ICC) Related Data	V	≤ 256	1 B + 255 ANS
56	Payment Account Reference Data	V	≤256	1 B + 255 ANS
57	Reserved National	V	≤256	1 B + 255 ANS (unused)
58	Reserved National	V	≤256	1 B + 255 ANS (unused)
59	National POS Geographic Data	V	≤15	1 B + 14 ANS
60	Additional POS Information	V	≤7	1 B + 12N, 4 bit BCD
60.1	Terminal Type	F	1	1 N (n/a)
60.2	Terminal Entry Capability	F	1	1N (n/a)
60.3	Chip Condition Code	F	1	1N, 4 bit BCD
60.4	Special Condition Indicator	F	1	1 N (unused)
60.5	Merchant Group Indicator	F	2	2N (n/a)
60.6	Chip Transaction Indicator	F	1	1N

Table 25: Field Attributes

Field Number	Field Name	Type	Length	Attributes
60.7	Chip Card Authentication Reliability Indicator	F	1	1N
60.8	Electronic Commerce	F	2	2N
60.9	Cardholder ID Method Indicator	F	1	1N
61	Other Amounts	V	≤19	1 B + 12, 24, 36 BCD (n/a)
61.1	Other Amount, Transaction	F	6	12 BCD
61.2	Other Amount, Cardholder Billing	F	6	12 BCD (n/a)
61.3	Other Amount, Replacement Billing	F	6	12 BCD (n/a)
62	Custom Payment Service Fields Bitmap	V	≤256	1 B + 255 bytes
62.0	Field 62 Bitmap	F	8	64-bit string
62.1	Authorization Characteristics Indicator	F	1	1 AN
62.2	Transaction Identifier	F	8	15 BCD
62.3	Validation Code	F	4	4 AN (n/a)
62.4	Market-Specific Data Identifier	F	1	1 AN (n/a)
62.5	Duration	F	1	2 BCD (n/a)
62.6	Reserved	F	1	1 AN (n/a)
62.7	Purchase Identifier	F	26	26 AN (n/a)
62.8	Service Date	F	3	6 BCD (n/a)
62.9	No Show Indicator	F	1	1 A (n/a)
62.10	Extra Charges	F	3	6 BCD (n/a)
62.11	Multiple Clearing Sequence Number	F	1	2 BCD
62.12	Multiple Clearing Sequence Count	F	1	2 BCD (n/a)
62.13	Restricted Ticket Indicator	F	1	1 AN (n/a)
62.14	Total Amount Authorized	F	6	12 BCD (n/a)
62.15	Requested Payment Service	F	1	1 AN (n/a)
62.16	Reserved	F	2	2 AN
62.17	Mastercard Interchange Compliance Information	F	15	15 EBCDIC (n/a)
62.18	Excluded Transaction Identifier Reason Code	F	1	1 AN (n/a)

Table 25: Field Attributes

Field Number	Field Name	Type	Length	Attributes
62.21	Online Risk Assessment Risk Score and Reason Codes	F	4	4 AN, EBCDIC
62.22	Online Risk Assessment Condition Codes	F	6	6 AN EBCDIC
62.23	Product ID	F	2	2 AN, EBCDIC
62.24	Program Identifier	F	6	6 AN, EBCDIC
62.25	Spend Qualified Indicator	F	1	1 AN, EBCDIC
63	V.I.P. Private-Use Fields	V	≤256	1 B + 255 bytes
63.0	Bitmap	F	3	24-bit string
63.1	Network Identification Code	F	2	4 BCD
63.2	Time (Preauth Time Limit)	F	2	4 BCD (n/a)
63.3	Message Reason Code	F	2	4 BCD
63.4	STIP/VisaNet Reason Code	F	2	4 BCD
63.6	Chargeback Reduction/BASE II Flags	F	7	7 ANS
63.7	Network Participation Flags	F	8	64-bit string (n/a)
63.8	Visa Acquirer's Business ID	F	4	8 BCD (n/a)
63.9	Fraud Data	F	14	14 ANS
63.10	Gateway Merchant Data	F	13	13 ANS (n/a)
63.11	Reimbursement Attribute	F	1	1 ANS
63.12	Sharing Group Code	F	30	30 ANS (n/a)
63.13	Decimal Positions Indicator	F	3	64 BCD
63.14	Issuer Currency Conversion Data	F	36	36 ANS
63.15	Reserved	F	8	8 ANS
63.16	Reserved for future use	n/a	n/a	n/a
63.17	Reserved for future use	n/a	n/a	n/a
63.18	Merchant Volume Indicator	F	1	4 BCD (n/a)
63.19	Fee Program Indicator	F	3	3 AN
63.21	Charge Indicator	F	1	1 ANS
66	Settlement Code	F	1	1 BCD ¹

Table 25: Field Attributes

Field Number	Field Name	Type	Length	Attributes
67	Extended Payment Code	F	1	2 BCD (unused)
68	Receiving Institution Country Code	F	2	3 BCD ¹
69	Settlement Institution Country Code	F	2	3 BCD ¹
70	Network Management Information Code	F	2	3 BCD ¹
71	Message Number	F	2	4 BCD (unused)
72	Message Number Last	F	2	4 BCD (unused)
73	Date, Action	F	3	6 BCD
74	Credits, Number	F	5	10 BCD
75	Credits, Reversal Number	F	5	10 BCD
76	Debits, Number	F	5	10 BCD
77	Debits, Reversal Number	F	5	10 BCD
78	Transfer, Number	F	5	10 BCD (unused)
79	Transfer, Reversal Number	F	5	10 BCD (unused)
80	Inquiries, Number	F	5	10 BCD (unused)
81	Authorizations, Number	F	5	10 BCD (unused)
82	Credits, Processing Fee Amount	F	6	12 BCD (unused)
83	Credits, Transaction Fee Amount	F	6	12 BCD (unused)
84	Debits, Processing Fee Amount	F	6	12 BCD (unused)
85	Debits, Transaction Fee Amount	F	6	12 BCD (unused)
86	Credits, Amount	F	8	16 BCD
87	Credits, Reversal Amount	F	8	16 BCD
88	Debits, Amount	F	8	16 BCD
89	Debits, Reversal Amount	F	8	16 BCD
90	Original Data Elements	F	21	42 BCD
91	File Update Code	F	1	1 AN
92	File Security Code	F	2	2 AN
94	Service Indicator	F	7	7 AN (unused)
95	Replacement Amounts	F	42	42 AN (n/a)

Table 25: Field Attributes

Field Number	Field Name	Type	Length	Attributes
96	Reserved for future use	n/a	n/a	n/a
97	Amount, Net Settlement	F	17	17 AN
98	Payee	F	25	25 ANS (n/a)
99	Settlement Institution Identification Code	V	≤7	1 B + 11 BCD ¹
100	Receiving Institution Identification Code	V	≤7	1 B + 11 BCD ¹
101	File Name	V	≤18	1 B + 17 ANS
102	Account Identification 1	V	≤29	1 B + 28 ANS
103	Account Identification 2	V	≤29	1 B + 28 ANS
104	Transaction Description	V	≤101	1 B + 100 ANS (n/a)
105	Double-Length DES Key (Triple DES)	F	128	128-bit string
106	Reserved ISO	V	≤256	1 B + 255 ANS (unused)
107	Reserved ISO	V	≤256	1 B + 255 ANS (unused)
108	Data in Local Language	V	≤1537	2 B + 1535 (unused)
109	Reserved ISO	V	≤256	1 B + 255 ANS (unused)
110	Reserved ISO	V	≤256	1 B + 255 ANS (unused)
111	Reserved ISO	V	≤256	1 B + 255 ANS (unused)
112	Reserved National	V	≤256	1 B + 255 ANS (unused)
113	Reserved National	V	≤256	1 B + 255 ANS (unused)
114	Reserved National	V	≤256	1 B + 255 ANS (unused)
115	Additional Trace Data	V	≤25	1 B + 24 ANS
116	Reserved National	V	≤256	1 B + 255 ANS (n/a)
117	National Use	V	≤256	1 B + 3 ANS + 252 ANS (n/a)
118	Intra-Country Data	V	≤256	1 B + 3 ANS + 252 ANS
119	Settlement Service Data	V	≤256	1 B + 255 ANS (International only)
121	Issuing Institution Identification Code	V	≤12	1 B + 3 to 11 AN (n/a)
123	Verification Data	V	≤256	1 byte + 255 binary and ANS, EBCDIC
125	Supporting Information	V	≤256	1 B + 255 ANS

Table 25: Field Attributes

Field Number	Field Name	Type	Length	Attributes
126	Visa Private Use Fields	V	≤256	1 B + 255 ANS
126.0	Field 126 Bitmap	V	8	64-bit string
126.1	Customer Name	V	25	25 AN (n/a)
126.2	Customer Address	V	57	57 AN (n/a)
126.3	Biller Address	V	57	57 AN (n/a)
126.4	Biller Telephone Number	V	18	18 AN (n/a)
126.5	Visa Merchant Identifier	F	8	8 AN (n/a)
126.6	Cardholder Certificate Serial Number (VSEC)	F	17	1 B + 16 bytes (n/a)
126.7	Merchant Certificate Serial Number (VSEC)	F	17	1 B + 16 bytes (n/a)
126.8	Transaction ID (VSEC)	F	20	20 BCD (n/a)
126.9	TransStain (VSEC)	F	20	20 BCD (n/a)
126.10	CVV2 Authorization Request Data	F	6	6 ANS (n/a)
126.12	Service Indicators	F	3	24-bit string
127	File Maintenance	V	≤256	1 B + 255 bytes
127A.1	Postal Code	F	9	9 ANS (n/a)
127A.2	Address Verification Data	F	5	5 ANS (n/a)
127C.1	State Province Region Code Identifier	F	1	1 ANSEBCDIC
127C.2	State Province Region Code	F	2	2 N EBCDIC
127E.1	Action Code	F	2	2 ANS
127E.2	Region Coding	F	9	9 ANS
127E.3	Cardholder Spending Amount Limit	F	6	6 ANS
127E.4	Cardholder Spending Count Limit	F	2	2 ANS
127M.1	Merchant Record Type	F	1	1 AN (n/a)
127M.2	Merchant Data 1	F	4, 15	4 ANS or 15 ANS (n/a)
127M.3	Merchant Data 2	F	1, 9	1 AN or 9 ANS (n/a)
127M.4	Merchant Data 2	F	16	16 ANS (n/a)
127P.1	PIN Verification Data	F	7	7 ANS

Table 25: Field Attributes

Field Number	Field Name	Type	Length	Attributes
127R.1	Risk Level	F	1	1 ANS
127R.2	Filler	F	5	5 ANS
127R.3	Filler	F	5	5 ANS
127R.4	Filler	F	5	5 ANS
127R.5	Filler	F	5	5 ANS (n/a)
127R.6	Travel Activity Limit	F	5	5 ANS
127R.7	Travel Activity Limit	F	5	5 ANS
127R.8	Lodging Activity Limit	F	5	5 ANS
127R.9	Lodging Activity Limit	F	5	5 ANS
127R.10	Auto Rental Activity Limit	F	5	5 ANS
127R.11	Auto Rental Activity Limit	F	5	5 ANS
127R.12	Restaurant Activity Limit	F	5	5 ANS (n/a)
127R.13	Restaurant Activity Limit	F	5	5 ANS
127R.14	Mail/Phone Activity Limit	F	5	5 ANS (n/a)
127R.15	Mail/Phone Activity Limit	F	5	5 ANS
127R.16	Risky Purchase Activity Limit	F	5	5 ANS
127R.17	Risky Purchase Activity Limit	F	5	5 ANS
127R.18	Total Purchase Activity Limit	F	5	5 ANS
127R.19	Total Purchase Activity Limit	F	5	5 ANS (n/a)
127R.20	Total Cash Activity Limit	F	5	5 ANS
127R.21	Total Cash Activity Limit	F	5	5 ANS
127R.22	ATM Cash Activity Limit	F	5	5 ANS
127R.23	ATM Cash Activity Limit	F	5	5 ANS
127.L1	ALP Product File Maintenance	V	≤ 256	1 B + 255 ANS
130	Terminal Capability Profile	F	3	24-bit string
131	Terminal Verification Results (TVR)	F	5	40-bit string
132	Unpredictable Number	F	4	8 hexadecimal digits
133	Reserved for future use	F	8	8 ANS
134	Visa Discretionary Data, Usage 1	V	≤33	1 byte binary + 32 bytes

Table 25: Field Attributes

Field Number	Field Name	Type	Length	Attributes
134	Visa Discretionary Data, Usage 2	V	≤16	1 byte binary + 15 bytes
135	Issuer Discretionary Data	V	≤16	1 byte binary + 30 hexadecimal digits
136	Cryptogram	F	8	16 hexadecimal digits
137	Application Transaction Counter	F	2	4 hexadecimal digits
138	Application Interchange Profile	F	2	16-bit string
139.1	ARPC Response Cryptogram and Code	F	8	16 hexadecimal digits
139.2	ARPC Response Code	F	2	2 bytes, AN
140	Issuer Authentication Data	V	≤ 17	1 byte binary + 8–16 bytes
142	Issuer Script	V	≤256	1 byte + 510 hexadecimal digits
143	Issuer Script Results	V	≤21	1 byte + 40 hexadecimal digits
144	Cryptogram Transaction Type	F	1	2N, 4-bit BCD (unsigned, unpacked)
145	Terminal Country Code	F	2	3N, 4-bit BCD
146	Terminal Transaction Date	F	3	6N, 4-bit BCD
147	Cryptogram Amount	F	6	12N, 4-bit BCD (unsigned, unpacked)
148	Cryptogram Currency Code	F	2	3N, 4-bit BCD
149	Cryptogram Cashback Amount	F	6	12N, 4-bit BCD (n/a)
152	Secondary PIN Block	F	8	64 N, bit string

¹Plus a leading zero to fill the unused first half-byte.

²Contents limited to numerics.

³Currently, only eight positions are defined.

⁴Format varies with message type and card program.

Unused Message Fields

This table shows the ISO fields not used by Visa.

Table 26: Unused Message Fields

Field Number	Field Name	Type	Length	Attributes
8	Amount, Cardholder Billing Fee	F	4	8 BCD
21	Forwarding Institution Country Code	F	2	3 BCD ¹
24	Network International Identifier	F	2	3 BCD ¹
27	Authorization Identification Response Length	F	1	1 BCD ¹
29	Amount, Settlement Fee	F	9	9 AN
30	Amount, Transaction Processing Fee	F	9	9 AN
31	Amount, Settlement Processing Fee	F	9	9 AN
36	Track 3 Data	V	≤53	1 B + 104 BCD
47	Additional Data—National	V	≤256	1 B + 255 ANS
57	Reserved National	V	≤256	1 B + 255 ANS
58	Reserved National	V	≤256	1 B + 255 ANS
67	Extended Payment Code	F	1	2 BCD
71	Message Number	F	2	4 BCD
72	Message Number, Last	F	2	4 BCD
78	Transfer, Number	F	5	10 BCD
79	Transfer, Reversal Number	F	5	10 BCD
80	Inquiries, Number	F	5	10 BCD
81	Authorizations, Number	F	5	10 BCD
82	Credits, Processing Fee Amount	F	6	12 BCD
83	Credits, Transaction Fee Amount	F	6	12 BCD
84	Debits, Processing Fee Amount	F	6	12 BCD
85	Debits, Transaction Fee Amount	F	6	12 BCD
94	Service Indicator	F	7	7 AN
106	Reserved ISO	V	≤256	1 B + 255 ANS
107	Reserved ISO	V	≤256	1 B + 255 ANS
108	Data in local language	V	≤1537	2 B + 1535B
109	Reserved ISO	V	≤256	1 B + 255 ANS
110	Reserved ISO	V	≤256	1 B + 255 ANS
111	Reserved ISO	V	≤256	1 B + 255 ANS

Table 26: Unused Message Fields

Field Number	Field Name	Type	Length	Attributes
112	Reserved National	V	≤256	1 B + 255 ANS
113	Reserved National	V	≤256	1 B + 255 ANS

¹Plus a leading zero to fill the unused first half-byte.

Chapter 4

Data Field Descriptions

This chapter contains the data field descriptions for V.I.P. online messages.

Acronyms Used in Data Field Descriptions

The field descriptions in this chapter use the acronyms shown in this table.

Not all acronyms or services listed in this table are used in this manual.

Table 27: Acronyms Used in Data Field Descriptions

Acronym	Definition
AAC	Application Authentication Cryptogram
ACH	Automated Clearing House
ACI	Authorization Characteristics Indicator
ACS	Access Control Server
AFC	ATM Format Conversion

Table 27: Acronyms Used in Data Field Descriptions

Acronym	Definition
AFD	Automated Fuel Dispenser
AFT	Account Funding Transaction
ALM	Account-Level Management
ALP	Account-Level Processing
AML	Anti-Money-Laundering
ARPC	Authorization Response Cryptogram
ARQC	Authorization Request Cryptogram
ASAF	Account Screen Authorization File
Auto-CDB	Automated Cardholder Database Service
AVS	Address Verification Service
AWK	Acquirer Working Key
B2B	Business-to-Business
B2C	Business-to-Consumer
BCD	Binary-Coded Decimal Notation
BCR	Processing Options Center Record
BER-TLV	Basic Encoding Rules—Tag-Length-Value
CAM	(Online) Card Authentication Method
CAMS	Compromised Account Management System
CAS	Card Authorization System (issuer side)
CAVV	Cardholder Authentication Verification Value
CCDR	Commercial Card Data Repository
CDB	Cardholder Database
CER	Compromised Event Reference (appears as CER ID)
CI	Computer Industry Table
CORE	Customer Online Repository
CPS	Custom Payment Service
CRB	Card Recovery Bulletin
CRC	CVV Result Code
CRM	Copy Request Manager

Table 27: Acronyms Used in Data Field Descriptions

Acronym	Definition
CRS	Chargeback Reduction Service
CSU	Card Status Update
CVM	Card Verification Method
CVN	Cryptogram Version Number
DAS	Direct Access Service
DCC	Dynamic Currency Conversion
dCVV	Dynamic Card Verification Value
DDA	Dynamic Data Authentication
DEX	Direct Exchange
DKE	Dynamic Key Exchange
EAS	Extended Access Server
EBT	Electronic Benefits Transfer (PIN Debit Gateway Service)
EDC	Electronic Data Capture
EIRF	Electronic Interchange Reimbursement Fee
EPS	Express Payment Service
FPI	Fee Program Indicator
FRS	Fraud Reporting Service
FSA	Flexible Spending Account
GCAS	Global Customer Assistance Service
HRA	Healthcare Reimbursement Arrangement
IAD	Issuer Application Data
ICP	Intra Company Purchase
ICS	Interchange Control System
ICS (Fraud)	Issuers' Clearinghouse Service
iCW	Integrated Circuit Card (iCC) CVV
IDS	International Data Standard
IIAS	Inventory Information Approval System—Internal Revenue Service (IRS) terminology
ISA	International Service Assessment

Table 27: Acronyms Used in Data Field Descriptions

Acronym	Definition
ITT	Intertask Table
IWK	Issuer Working Key
MAC	Message Authentication Code
MAS	Multiple Account Selection (for U.S. Plus transactions)
MCC	Multiple Account Selection (for U.S. Plus transactions)
MCFS	Merchant Central File Service
MICR	Magnetic Ink Character Recognition (U.S. Only)
MIS	
MIS/CAS	Merchant Interface System/Card Authorization System
MOTO	Merchant Interface System/Card Authorization System
MS	Merchant Servicer
MSDI	Market-Specific Data Identifier
MVI	Merchant Volume Indicator (Field 63.18)
MVV	Merchant Verification Value
NCRF	National Card Recovery File
NFC	Near Field Communication
NID	Network ID (Field 63.1—Network Identification Code)
NRI	Not Received as Issued
NNSS	National Net Settlement Service
NSR	No Signature Required
OIF	Optional Issuer Fee
OCT	Original Credit Transaction
OTC	Over-the-Counter
P2P	Person-to-Person
PACM	Positive Authorization Capacity Management
PAD	Proprietary Authentication Data
PAN	Primary Account Number
PAR	Payer Authentication Request

Table 27: Acronyms Used in Data Field Descriptions

Acronym	Definition
PCR	Processor Center Record
PIN	Personal Identification Number
PSP	Payment Service Provider
PVKI	PIN Verification Key Index
PVS	PIN Verification Service
PVT	Personalization Validation Tool
PVV	PIN Verification Value
RA	Reimbursement Attribute
RFC	Request for Copy
RPID	Registered Program ID
SDA	Static Data Authentication
SIGIS	Special Interest Group for IAS Standards
SIP	Supermarket Incentive Program
SMF	Select Merchant Fee (Program)
SMS	Single Message Service (replaced by Full Service)
SRP	Stop Recurring Payment
STIP	Stand-In Processing
TADC	Transaction Amount in Destination Currency
T&E	Travel & Entertainment
TC	For VSDC, TC = Transaction Certificate For Clearing, TC = Transaction Code
TID	Transaction Indicator (Field 62.2—Transaction Identifier)
TLV	Tag-Length-Value (Format) (see BER)
TPS	Third-Party Servicer
TVR	Tag-Length-Value (Format) (see BER)
UCAF	Universal Cardholder Authentication Field (Mastercard)
UCAT	Unattended Cardholder-Activated Transaction
URL	Uniform Resource Locator

Table 27: Acronyms Used in Data Field Descriptions

Acronym	Definition
VAT	Value-Added Tax
VCRFS	VisaNet Copy Request and Fulfillment Service
VEPS	Visa Easy Payment Service
VIC	VisaNet Interchange Center
ViC	Visa iCWV Convert
VIDS	VisaPhone Issuer Direct Service
Visa MG	Visa Message Gateway
VMP	Visa Mobile Prepaid
VMT	Visa Money Transfer
VSDC	Visa Smart Debit and Visa Smart Credit
VSEC	Visa Secure Electronic Commerce
VSIL	Visa Information Security Line
VSPS	Visa Stop Payment Service
VSS	Visa Settlement Service
VTM	Visa TravelMoney (card)
VTRS	VisaNet Transaction Research Service
VTs	Visa Test System
XID	Electronic Commerce Transaction Identifier

Definition of the Term "Mandatory"

The term "mandatory" refers to a client requirement and means that a field must be present in a message and must contain certain values. "Conditional" refers to a client requirement that applies under specified conditions. While the VisaNet Integrated Payment (V.I.P.) System enforces edits and rejects transactions for some violations of mandatory requirements, the V.I.P. System does not enforce edits for all mandatory or conditional fields and values.

Visa strongly urges clients and their processors to comply with mandatory field requirements. Failure to do so can result in greater risk to the client or increased processing cost, and may result in exposure to disputes and compliance claims, elevated decline rates, and disqualification for preferential interchange rates. Visa also advises clients not to rely on the V.I.P. System to reject all transactions that do not comply with mandatory or conditional requirements.

Field 2 – Primary Account Number

Field 2 – Attributes

variable length

1 byte, binary +

19 N, 4-bit BCD (unsigned packed); maximum 11 bytes

Field 2 – Description

A number identifying the cardholder account or relationship, that is, a card account number of **19** numeric digits encoded on Track 2 of the magnetic stripe. The length specifies the number of digits in the account number, which is right-justified. If the account number has an odd number of digits, a leading zero is required to pad the first unused half-byte of data. Because this zero is filler and *not* part of the account number, it is not counted for the length subfield.

Field 2 – Usage

Collection Only Transactions: This field must contain an account number from the original transaction.

This field is used in messages related to a cardholder transaction and 0302/0312 file maintenance messages.

The account number may be a cardholder identification number related to one or more of the cardholder's accounts. If this field is not the account to be used for transaction posting, the issuer can optionally send the correct account number in field 102 or 103 of the response.

PIN Management Messages: This field is required in PIN change or unblock requests.

Fee Collections/Funds Disbursements (Visa Only): The field is used in 0220 fee collection and 0422 funds disbursement messages directly related to one cardholder transaction; otherwise, it should not be present.

Visa-Generated Funds Disbursements (Plus): In 0220 funds disbursements, this field contains the account number from the BASE II TC 07 record that did not qualify for the ATM cash disbursement fee.

Auto-CDB (Visa Only): This field is present in an 0322 advice and must be returned in the 0332 response.

Visa Smart Debit/Visa Smart Credit (VSDC): This field is required in 0620 authentication failure or issuer script advices and their 0630 responses.

STIP and Switch Advices: This field is present in these advices and their responses if it were in the request:

STIP-generated 0220 or 0420 advice

Switch-generated 0420 advice

Advices from BASE II Endpoints: Unless otherwise specified, the field length is 19 digits. For Plus (network **0004**) transactions, if the last **3** or **6** digits are zeros, V.I.P. sets the field 2 length as **16** or **13** digits, respectively, and drop zeros accordingly. For Visa (network **0002**) transactions, V.I.P. adjusts the length by referring to system settings.

Fraud Reporting:

- Client-generated including NRI/PS604 and ICS—The field must contain the account number from the original transaction. Must be numeric.
- Visa-generated—The field contains the account number from the original fraud transaction.

Balance Inquiries: This field must be included otherwise V.I.P. rejects the message with reject code **0062** (invalid value).

Payment Fraud Disruption (PFD): This field contains a valid cardholder PAN for 0302 PFD file maintenance messages to add a PAN to the Payment Fraud Disruption Blocking Allow List file. This file bypasses PFD blocking for 72 hours.

If this field is missing, V.I.P. rejects the message with reject code **0251** (Field missing).

See Field 63.4 for STIP/Switch Reason Codes for declined transactions due to PFD blocking.

Field 2 – Field Edits

The length subfield value must be numeric and cannot exceed 19 digits.

Based on issuer-supplied parameters, V.I.P. checks account numbers for:

- Card number check digit modulus 10 is verified at issuer option
- Card length must not exceed length supported by issuer

The number must be within a card number range supported by V.I.P.; otherwise, the request is denied with a response code of **15**.

If the account number is placed in this field in the original request, this field and its original value are required in all subsequent messages for that cardholder transaction. This field is present in a request or advice and must be returned unchanged in the response.

For messages related to one cardholder transaction or in an 0302 request, if this field is present, fields 102 and 103 are ignored. The account number must be in this field if it is not in field 102 or 103.

Field 2 – Reject Codes

0002 = Invalid value

0251 = Field missing

0600 = Consistency error; account number does not match that in transaction set

0601 = Consistency error

Field 2 – File Edits

When this field is present in an 0302 request, VisaNet applies the following additional edits:

Length must be supported by Visa and not exceed maximum length for the issuing identifier.

The account number must fall within the range of numbers used by the issuer and under the control of the issuer. (An issuer can only update records for its own cardholders, not those of other processing centers unless alternate parameters have been invoked.)

For an add, the account number cannot be in the file. For a change or delete, the account number must be present in the file.

Payment Fraud Disruption (PFD): If PAN in Field 2 is invalid in 0302 PFD file maintenance messages, V.I.P. sends response code **06** (Error) in Field 39 and **0570** (The account number (Field 2) has an invalid check digit) in Field 48, Usage 1b.

Field 2 – File Maintenance Error Codes

0558 = Invalid length

0564 = Invalid length

0565 = No record on file (change, delete, or inquiry)

0566 = Record on file, cannot add

0569 = Missing or invalid account number (non numeric)

0570 = Invalid check digit

0571 = Account number not in range for the processing center

Field 3 – Processing Code

Field 3 – Attributes

fixed length

6 N, 4-bit BCD (unsigned packed); 3 bytes

Field 3 – Description

Positions: 1-2	3-4	5-6
transaction type	account type “from”	account type “to”
Byte 1	Byte 2	Byte 3

Positions 1-2, Transaction Type: A two-digit code identifying the cardholder transaction type or the client processing center function being processed.

Positions 3-4, Account Type (From): A two-digit code identifying the account type affected by this transaction.

Positions 5-6, Account Type (To): For ATM account transfers, a two-digit code identifying the account type to which an account transfer is made.

Coding that identifies (1) the cardholder transaction type and (2) the cardholder account types affected by the transaction. This is a fixed-length field for three data elements. The codes are shown in the Valid Values section.

Field 3 – Usage

This field is used in magnetic stripe and chip-based:

- 0200 cash disbursements
- 0200 ATM Deposit
- 0220 adjustments (misdispense or back-office)
- 0200 balance inquiries
- 0420 reversals
- 0422 dispute financials
- 0422 Dispute Financial reversals

- 0220 dispute response financials
- 0220/0422 fee collections/funds disbursements
- 0220 Visa-generated funds disbursements
- 0200 account transfers

For responses, the account type codes in field 54 of the response must match the *from account* codes in this field.

VSDC PIN Change/Unblock Service Requests: Positions 1-2 must be **70** for a PIN change request, and **72** for a PIN unblock request. If positions 1-2 = **70**, field 152 must be present. If positions 1-2 = **72**, fields 52 and 53 must be present *but not* field 152.

Visa Smart Debit/Visa Smart Credit (VSDC): This field is required in 0620 authentication failure or issuer script advices and their 0630 responses.

STIP and Switch Advices: This field is present in these advices if present in the request:

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

Advices From BASE II endpoints: This field is present in 0220 and 0422 advices.

Visa-Generated Funds Disbursement (Plus): The value is **290000**.

Plus Alternate Media (U.S. Domestic Service Only): See "Usage" in the "Field 3" description in *VisaNet Integrated Payment (V.I.P.) System POS (Visa & Visa Electron) Technical Specifications*.

ATM Deposits: Positions 1-2 of this field must contain a code of **21** (deposit) for all original transactions. Positions 3-4 must carry an account type of 00 (not applicable or not specified), 10 (Savings Account), 20 (Checking Account), 30 (Credit Card Account) or 40 (Universal Account). Positions 5-6 must contain a code of **00** (not applicable).

See *V.I.P. System SMS Processing Specifications (U.S.)*.

Visa ReadyLink ATM Load Transactions: One original financial transaction can be used to simultaneously activate and load cards. An activation transaction is not required. ReadyLink loads are domestic only.

These messages support these transactions:

- 0200/0210 cash disbursement and response
- 0220/0230 cash disbursement adjustment and response
- 0220/0230 dispute response financial and response
- 0400/0410 reversal and response
- 0420/0430 reversal advice and response
- 0422/0432 Dispute Financial and response

These messages use a code of **28** in positions 1-2 of this field, except for 0220/0230 adjustments, where **02** or **22** is used, along with a field 63.3 reason code of **2015**, which identifies these messages as load adjustments.

V.I.P. declines a load request with response code **57** (transaction not permitted to cardholder) if:

- V.I.P. receives an 0200 request from an acquirer and the issuer is not participating in Visa ReadyLink ATM load transactions.
- V.I.P. receives an 0200 request from an acquirer and the issuer is participating in Visa ReadyLink ATM load transactions – but the issuer is authorization-only.

Depending on STIP parameters, V.I.P. declines a message with a response code of **05** (do not honor) or **91** (destination unavailable or time out when no stand-in) and send an 0220 STIP advice to the issuer if:

- V.I.P. receives an 0200 request message from an acquirer, the issuer is participating in Visa ReadyLink load transactions, and the issuer is unavailable.

See the field 54 description. Additional requirements are specified in the descriptions for fields 4, 28, 62.1, 62.2, 63.1, and 63.3.

ATM VSDC PIN Change/Unblock Service Requests: : Positions 1-2 must be **70** for a PIN change request, and **72** for a PIN unblock request. If positions 1-2 = **70**, field 152 must be present. If positions 1-2 = **72**, fields 52 and 53 must be present but not field 152.

Fraud Reporting: This field is present in 9620 fraud advice messages. This field contains the original processing code from AFT/OCT transactions in fraud advices.

Field 3 – Field Edits

This field is required in all 02xx and 04xx messages.

Rules for Positions 1-2:

In a cash disbursement transaction set, the code must be **01** throughout the set, except in adjustments, dispute financials on adjustments, and Dispute Financial reversals.

The code in responses must match that in the request or advice. The code in an 0220 adjustment must be **02** or **22**.

The code in a reversal request or advice must match that in the original request being reversed.

The code in a Dispute Financial reversal should be **02** or **22**.

V.I.P. rejects ATM transactions submitted with processing code 20 if field 18 contains **6011**.

For ATM cash withdrawal (MCC **6011**) and manual cash disbursement (MCC **6010**) the value in positions 1-2 must be **01**; otherwise, V.I.P. rejects the transaction with reject code **0610**.

For ATM Mini Statements, the code must be **34**.

Rules for Positions 3-4:

The *from account* code in the response to all ATM transactions must match that in the request or advice unless the code in the request or advice was **00** (no account selected).

The *from account code* for account transfers may not be 00.

Rules for Positions 5-6:

The *to account* code in the response to all ATM account transfer transactions must match that in the request or advice.

Visa ReadyLink ATM Load Transactions: This field must contain a value of 28. ReadyLink acquirers must be a V.I.P. Full Service endpoint. Issuers may be an Authorization Only or Full Service endpoint.

Collection-Only Transactions: In 9240/9250 and 9242/9252 collection-only transactions, this code must be **00**, **01**, **11**, or **20** otherwise V.I.P. declines the transaction with reject code **06**. Acquirer-submitted collection-only transactions must be purchase, cash withdrawal, quasi-cash, or original adjustment transactions, or related reversals.

Issuer-submitted, collection-only transactions must be Dispute Financial of purchase, cash withdrawal, quasi-cash, or original adjustment transactions, or related reversals.

Field 3 – Reject Codes

0008 = Invalid value (Processing code)

0274 = Field missing

0492 = Field missing for bill payment or auto-substantiation transaction

0517 = Field missing

0528 = Invalid *from account* code (positions 3-4)

0610 = First two digits not compatible with field 18

Field 3 – Valid Values

Table 28: Field 3 Processing Codes

Code	Definition
Positions 1-2: Transaction Type	
01	Cash Disbursement
02	Adjustment-Debit
19	Fee Collection-Debit (Visa and Plus)
21	Deposit

Table 28: Field 3 Processing Codes

Code	Definition
22	Adjustment-Credit
28	• Activation and Load • Load
29	Funds Disbursement-Credit (Visa and Plus) Visa-Generated Funds Disbursement (Visa and Plus)
30	Balance Inquiry
34	ATM Mini Statement
40	Cardholder Account Transfer
70	PIN Change
72	PIN Unblock
Positions 3-4: Account Type (from)	
00	Not Applicable or Not Specified
10	Savings Account
20	Checking Account
30	Credit Card Account
40	Universal Account
Positions 5-6: Account Type (to)¹	
00	Not Applicable
10	Savings Account
20	Checking Account
30	Credit Card account
40	Universal Account

¹Positions 5-6 are applicable to account transfers.

Field 4 – Amount, Transaction

Field 4 – Attributes

fixed length

12 N, 4-bit BCD (unsigned packed); 6 bytes

Field 4 – Description

No decimal point appears in this field; the decimal place is implicit based on the currency. For currency requirements for multicurrency participants, see Field 4 Currency Type Per Message Type.

The amount of Automated Teller Machine (ATM) funds requested by the cardholder, expressed in the local currency (specified by the currency code in field 49). No decimal point appears in this field; the decimal place is assumed, based on the currency. For currency requirements for multicurrency participants, see Currency Type per Message Type.

Visa uses a buy rate or a sell rate for currency conversion, depending on the message type and the exchange direction. Visa uses U.S. dollar-based buy/sell rate pairs and also selected buy/sell cross rate pairs of currencies other than the U.S. dollar. See Multicurrency Service in *V.I.P. System Overview and Services*.

The Currency Precision Service is optionally available to multicurrency participants. This service uses Field 63.13—Decimal Positions Indicator to specify the number of decimal positions included in the amount.

Table 29: Currency Type per Message Type

Message Type	Message Direction	Field 4 Contents
Cash Disbursement, Cash Disbursement Adjustment (Misdispense), Back-Office Adjustment, Dispute Response Financial (0200 or 0220)	Acquirer to issuer	Transaction Currency. Transaction currency. For dispute response financials, the amount must match or be less than the amount in the original dispute financial. For dispute response financial reversals, the amount must match or be less than the amount in the original dispute response financial.
Reversal Request/Advice (0400/0420)	Acquirer to issuer	Transaction Currency. For reversals, the amount must match that in the original request. Partial reversals are not allowed, except for transactions from V.I.P. Authorization-Only endpoints.

Table 29: Currency Type per Message Type

Message Type	Message Direction	Field 4 Contents
Dispute Financial, Dispute Financial Reversal, Issuer-generated Fee Collection/Funds Disbursement (0422)	Issuer to acquirer	Issuer can use the cardholder billing currency. For dispute financials, the issuer may dispute the full or partial transaction amount. For dispute financial reversals, the amount must match, or be less than, the dispute amount in the dispute financial. For fee collections/funds disbursements (Visa only), this is the fee amount to be collected/dispensed.
Acquirer-generated Fee Collection/Funds Disbursement (0220)	Acquirer to issuer	Transaction Currency. For fee collections/funds disbursements (Visa only), this is the fee amount to be collected/dispensed.

Field 4 – Usage

This field is used in most messages related to a cardholder transaction.

When this field is present in a message, the transaction currency code must be present in field 49.

This is a fixed-length field; lead-zero fill is required.

For participating multicurrency issuers, this field contains the amount submitted by the acquirer. For nonparticipating multicurrency issuers, this field contains a U.S. dollar amount.

For ATM transactions, the currency dispensed as reflected in the message, and not necessarily the currency amount physically dispensed from the ATM machine. The amount in this field must include the acquirer-assessed access fee. Misdispense or back-office adjustments may have partial amounts.

This field is not used in balance inquiries. Balances are returned in Field 54-Additional Amounts.

Visa Smart Debit/Visa Smart Credit (VSDC): This field is required in 0620 authentication failure or issuer script advices.

STIP and Switch Advices: This field is present in these advices if it was in the original request. It is not used in advice responses.

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

Advices From BASE II Endpoints: This field is present in 0220 and 0420 advices.

Fraud Reporting: These points apply.

- Client-generated – The field is required for fraud advices. Must contain a numeric entry and may be **0** (zero).

This should be the billing amount, in the issuer's billing currency from the original transaction or the amount in U.S. dollars. Only when the fraud is reported by the acquirer (Fraud Type = **9**) may it be the purchase amount in the currency of the merchant's country. Additional Fraud Reporting System edits exist with respect to transactions exceeding US\$50,000.

FRS no longer rejects transactions with a value of US\$0.95 or less, including \$0. Issuers should submit all fraud transactions regardless of amount.

- Visa-generated – The field contains the transaction amount from the original fraud transaction. The field may be present if reported in the original fraud transaction. The field is not present if the original fraud transaction was ICS or NRI/PS604.

Collection-Only Transactions: In 9240 and 9242 messages, this field must contain the transaction amount from the original transaction. This field is not used in 9250 or 9252 responses.

Visa-Generated Funds Disbursement (Plus): This field contains the amount of the fee credit.

ATM Deposits: This field contains the amount of ATM funds that are deposited by the cardholder, expressed in the local currency (specified by the currency code in field 49).

Dispute Financials: Domestic and international dispute financials (0422) should not include Optional Issuer Fees (OIFs) in the field 4 amount.

If an OIF was included in the original transaction, V.I.P. does not remove it from the dispute financial.

For VROL Dispute Transactions, refer to the Visa Core Rules and Visa Product and Service Rules for further dispute amount requirements.

Visa ReadyLink ATM Load Transactions: This field contains the cash load amount.

See Visa Core Rules and Visa Product and Service Rules for countries that optionally allow acquirers and their merchants to support cashback transactions that do not include a purchase.

Manual Cash Disbursement: The amount in this field is the sum of the manual cash disbursement amount and the access fee amount.

Field 4 – Field Edits

The value in this field must be numeric, right-justified with leading zeros, and cannot exceed USD\$99,999.99. If a currency has three decimal places, the last digit of this field must be **zero**.

Required in messages related to cardholder transaction except STIP advice response messages (0230, 0430, and 0432), balance inquires, and PIN Change/Unblock requests and reversals.

For a non-multicurrency participant, if the currency code is not **840**, the transaction is rejected with reject code **0009**.

V.I.P. rejects all request messages that have **zero** with reject code **0009**, unless one of these conditions is present (in which case an amount of **zero** is allowed).

- Field 25 = **51** (zero-amount account verification).
- Field 3, positions 1-2, is **39** (eligibility message), **70** (PIN change/unblock), or **72** (PIN unblock or activation).

In addition, an amount of **zero** is allowed in 9620 fraud advices.

Issuers must include this field in 0110 responses and 0410 reversal responses, except when field 3 contains **30**, **70**, or **72**. Otherwise, V.I.P. rejects the response messages with reject code **0275**.

Field 4 – Reject Codes

0009 = Invalid value

0275 = Field missing

0613 = Invalid value in U.S. dispute financial

Field 5 – Amount, Settlement

Field 5 – Attributes

fixed length

12 N, 4-bit BCD (unsigned packed); 6 bytes

Field 5 – Description

Field 5 is a multicurrency field. It contains the transaction amount (the value in Field 4—Amount, Transaction) converted to settlement currency. The value placed in this field does not include the optional issuer fee. The conversion rate is in field 9. No decimal point appears in this field; the decimal place is implied based on the currency.

Visa uses a buy rate or a sell rate for currency conversion, depending on the message type and the exchange direction. Visa uses U.S. dollar-based buy/sell rate pairs and also selected buy/sell cross rate pairs of currencies other than the U.S. dollar. See Multicurrency Service in *V.I.P. System Overview and Services*.

The Currency Precision Service is optionally available to multicurrency participants and uses Field 63.13—Decimal Positions Indicator.

The currency of the amount in this field is identified by the code in Field 50—Currency Code, Settlement.

The number of decimal places assumed for this field depends on the currency. The locations of the implied decimal place (and the currency codes) for each currency are listed in Appendix E, Country and Currency Codes.

Field 5 – Usage

Multicurrency Participants This field is present with field 4 in incoming messages to processing centers only for financial transactions that qualify for settlement.

(Flags in field 9 of the message header identify messages qualifying for settlement. See Message Structure and Header Fields.)

Request originators and response providers do not provide this field. It is added to the request and the response by VisaNet before the message is delivered to the recipient. If it is present, these fields are also present:

- Field 9—Conversion Rate
- Field 16—Date, Conversion
- Field 50—Currency Code, Settlement

The value in this field may not exceed US\$99,999.99 for normal settled transactions.

The value in this field is the one added to reconciliation totals in settled transactions.

STIP and Switch Advices: This field is present in these advices if it was in the request:

- STIP-generated 0220 or 0420 advice
- Switch-generated 0400/0420 advice

This field is not used in advice responses.

Advices From BASE II Endpoints: This field is present in advices with field 4 if the recipient of the advice is participating in multicurrency processing and the transaction qualifies for settlement.

Field 5 – Field Edits

None.

Field 5 – Reject Codes

None.

Field 6 – Amount, Cardholder Billing

Field 6 – Attributes

fixed length

12 N, 4-bit BCD (unsigned packed); 6 bytes

Field 6 – Description

Field 6 is a multicurrency field. It contains the transaction amount (field 4), converted to the currency used to bill the cardholder's account. This converted transaction amount is called the Transaction Amount in Destination Currency (TADC). The conversion rate is in field 10. Besides the TADC, field 6 may contain the OIF. Issuers can increase or decrease the amount in this field when billing cardholders.

Visa uses a buy rate or a sell rate for currency conversion, depending on the message type and the exchange direction. Visa uses U.S. dollar-based buy/sell rate pairs and also selected buy/sell cross rate pairs of currencies other than the U.S. dollar. See Multicurrency Service in *V.I.P. System Overview and Services*.

For transactions to which an International Service Assessment (ISA) applies, a currency conversion fee amount is not included in field 6. However, Optional Issuer Fees (OIFs) defined by the issuer still apply on transactions when the transaction currency is different from the cardholder billing currency.

In Europe region, Visa does not include the Optional Issuer Fees (OIFs) in cross-border non-money transfer OCTs.

No decimal point appears in this field; the decimal place is implied based on the currency. The locations of the implied decimal place (and the currency codes) for each currency are listed in the appendix titled "Country and Currency Codes."

If field 6 is present, these fields also are present:

- Field 10—Conversion Rate, Cardholder Billing
- Field 51—Currency Code, Cardholder Billing. Field 51 identifies the currency in field 6.

The Currency Precision Service is optionally available to multicurrency participants and uses Field 63.13-Decimal Positions Indicator.

Field 6 – Usage

Multicurrency participants receive an amount in this field even if the billing currency and transaction currency are the same.

Visa-Generated Funds Disbursements (Plus): This field contains the transaction amount in field 4 converted to the currency used to credit the issuer.

Multicurrency Participants: Acquirers do not provide this field. It is added by VisaNet and delivered to the issuer if the issuer is a multicurrency participant. Multicurrency issuers should not return this field in a response.

The currency of the amount in this field is identified by the code in Field 51-Currency Code, Cardholder Billing.

The number of decimal places assumed for this field depends on the currency. The locations of the implied decimal place (and the currency codes) for each currency are listed in the appendix titled “Country and Currency Codes.”

This field is not used in dispute financials; the disputed amount is placed in field 4 even though it is expressed in the cardholder billing currency.

Visa Smart Debit/Visa Smart Credit (VSDC): VisaNet adds this field to 0620 authentication failure or issuer script advices.

STIP and Switch Advices: This field is present in these advices if it was in the request:

- STIP-generated 0220, or 0420 advice
- Switch-generated 0420 advices

Advices From BASE II Endpoints: Except for dispute financials, the Switch provides this amount if the recipient of the advice is participating in multicurrency processing and the transaction qualifies for settlement. Flags in field 9 of the message header identify messages that qualify for settlement. See Message Structure and Header Fields.

Non-Multicurrency Participants: Not applicable.

Account verification includes token activation requests (TAR).

Field 6 – Field Edits

Acquirers and issuers using the Currency Precision Service (which is available only for full service clients) must include field 63.13. If the decimal place indicated in positions 5-6 of field 63.13 does not match the decimal place in field 6 (which is derived from field 51), V.I.P. issues reject code **0133** for field 6.

Field 6 – Reject Codes

0133 = Invalid value. This field's amount is shown in field 63.13 as three decimals but ends in a number other than **zero**.

Field 7 – Transmission Date and Time

Field 7 – Attributes

fixed length

10 N, 4-bit BCD (unsigned packed); 5 bytes

format: *MMDDhhmmss*

Field 7 – Description

Field 7 contains the date and time the request or advice was submitted to VisaNet by the acquirer. The date and time must be in *mmdd* format. GMT (Greenwich mean time) can be used. See the appendix titled “GMT Conversion” for time zones.

Field 7 – Usage

ISO specifies that transmission date and time is a key data element used to match a response to its request or advice. This field indicates when a transaction entered the network. The sender of a transaction enters a new date and time with each request. The receiving client saves the field and returns it in the response message.

This field is used in every message generated by acquirers and issuers and is present in every message generated by VisaNet. The value in responses, including those for STIP/Switch advices, must match that in requests or advices.

The value from this field is also used in Field 90-Original Data Elements.

0100 Message to 0200 Message Conversions: Assuming Automated Teller Machine (ATM) format conversion, field 12 and field 13 in the issuer's 0200 financial request reflect the field 7 time the authorization request entered VisaNet: the last three bytes of the 0100's field 7 becomes field 12 in the 0200 message, and the first two bytes of the 0100's field 7 becomes field 13 in the 0200 message.

Dynamic Key Exchange: This field value is assigned by the 0800 message originator and must be returned unchanged in the 0810 response.

Auto-CDB (Visa Only): This field is present in an 0322 advice and must be returned in the 0332 response.

Visa Smart Debit/Visa Smart Credit (VSDC): This field is required in 0620 authentication failure or issuer script advices and their 0630 responses.

Visa-Generated Funds Disbursements (Plus): This field contains the date and time in GMT that the advice was sent by BASE II.

STIP and Switch Advices: This field contains the date and time from the original message.

Advices From BASE II Endpoints: This field is present. The value in the response must match that in the advice.

Fraud Reporting: The following points apply.

- Client-generated-This field is mandatory in a 9620 advice and must contain the current date and time.
- VisaNet-generated-This field contains the current date and time and must be retained and returned in the 9630 response.

Collection-Only Transactions: This field must contain a date and time from the original transaction.

Field 7 – Field Edits

Field 7 is required in all messages. Value must be in date and time format:

MM must be **01-12**

DD must be **01-31**

hh must be **00-23**

mm must be **00-59**

ss must be **00-59**

The *DD* (day) value cannot be greater than the maximum number of days for the month identified below.

January = 31	April = 30	July = 31	October = 31
February = 28 (leap year = 29)	May = 31	August = 31	November = 30
March = 31	June = 30	September = 30	December = 31

The field 7 value in an 0420 reversal message should be different from the value in the 0200 message. V.I.P. does not have relational edits between 0200 and 0420 messages.

Field 7 – Reject Codes

0010 = Invalid value

0276 = Field missing

Field 9 – Conversion Rate, Settlement

Field 9 – Attributes

fixed length

8 N, 4-bit BCD (unsigned packed); 4 bytes

Field 9 – Description


Field 9 is a multicurrency field. It contains the rate used by Visa to convert the transaction amount (field 4) to the settlement amount (field 5).

The value in field 9, which is a computed value and not a pre-established rate, is obtained by dividing the value in field 5 by the value in field 4, and thus may be different for different amounts in field 4.

The leftmost digit denotes the number of positions the decimal separator is moved from the right (may contain values **0-9**). Positions 2-8 of the field are the rate.

Example

69985022 = 9.985022, as shown in this illustration.

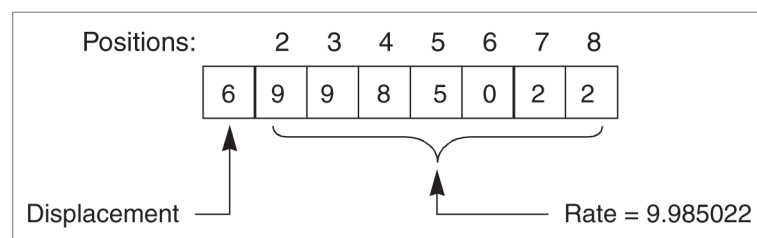

Field 9 – Usage

Multicurrency Participants: This field is present whenever the transaction amount (field 4) and settlement amount (field 5) are present. It is not provided by the message originator but is added by VisaNet and delivered to the recipient.

Visa uses a buy rate or a sell rate for currency conversion, depending on the message type and the exchange direction. Visa uses U.S. dollar-based buy/sell rate pairs and also selected buy/sell cross rate pairs of currencies other than the U.S. dollar. See Multicurrency Service in *V.I.P. System Overview and Services*.

STIP and Switch Advices: This field is included in these advices if it was in the request.

- STIP-generated 0220 or 0420 advice
- Switch-generated 0400 or 0420 advice

This field is not used in the advice response.

Advices From BASE II Endpoints: This field is present if the advice recipient is participating in online multicurrency processing and the transaction qualifies for settlement. Flags in field 9 of the message header identify messages that qualify for settlement. See Message Structure and Header Fields.

Field 9 – Field Edits

None.

Field 9 – Reject Codes

None.

Field 10 – Conversion Rate, Cardholder Billing

Field 10 – Attributes

fixed length

8 N, 4-bit BCD (unsigned packed); 4 bytes

Field 10 – Description


Field 10 contains the rate used by VisaNet to convert the transaction amount (field 4) to the cardholder billing amount (field 6). The value is plus or minus optional issuer fees. The optional issuer fee, expressed as a percentage, can be positive or negative; that is, the field 4 amount multiplied by this rate equals the field 6 amount.

Visa uses a buy rate or a sell rate for currency conversion, depending on the message type and the exchange direction. Visa uses U.S. dollar-based buy/sell rate pairs and also selected buy/sell cross-rate pairs of currencies other than the U.S. dollar. See Multicurrency Service in *V.I.P. System Overview and Services*.

The left-most digit denotes the number of positions the decimal separator is moved from the right (may contain values **0–9**). Positions 2–8 of the field are the rate.

Example

69985022 = 9.985022, as shown in this illustration.

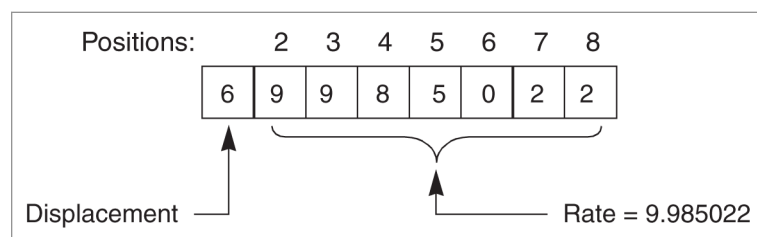

Field 10 – Usage

Visa-Generated Funds Disbursements (Plus): This field contains the rate used to convert the transaction amount in field 4 (amount of fee credit) to the amount in field 6 (field 4 amount converted to currency used to credit issuer).

This includes Token Activation Requests.

Multicurrency Participants: This field is present if the cardholder billing amount (field 6) is present. It is added by V.I.P. and delivered to participating multicurrency issuers. The multicurrency issuer does not return this field in a response.

Visa Smart Debit/Visa Smart Credit (VSDC): This field is added to 0620 authentication failure or issuer script advices.

STIP and Switch Advices: This field is included in these advices.

- STIP-generated 0220 or 0420 advice
- VisaNet-generated 0420 advice

Advices From BASE II Endpoints: This field is present in an 0220 advice for multicurrency participants.

Field 10 – Field Edits

Field must be numeric.

Field 10 – Reject Codes

0032 = Invalid value

Field 11 – System Trace Audit Number

Field 11 – Attributes

fixed length

6 N, 4-bit BCD (unsigned packed); 3 bytes

Field 11 – Description

A number assigned by the message initiator that uniquely identifies a cardholder transaction and all message types (also known as system transactions) that comprise it, per individual program rules. See tracing elements in the chapter titled Message Matching.

In 02xx and 04xx messages, one unique number that appears in all system transaction messages linked to one cardholder transaction.

In 03xx, 05xx, 06xx, and 08xx messages, a number used to match a reply to the request or advice.

Field 11 – Usage

Dynamic Key Exchange: This field is required in 0800/0810 Dynamic Key Exchange messages to request and deliver working keys for PIN encryption and to acknowledge their receipt. The trace number is assigned by the 0800 message originator, which can be a participating acquirer or issuer, or full financial. It must be returned unchanged in the 0810 response. If a request has to be resent, its trace number is from the original message.

The trace number is a key data element, used to match a response to its request or to match a message to others for a given cardholder transaction set. The value assigned to the original request should appear in all subsequent messages for that cardholder transaction set, except for cash disbursement and misdispense or back-office adjustments.

This field is used in every full financial message that is generated by acquirers and issuers and is present in every message generated by VisaNet, including STIP and Switch advices.

Visa-Generated Funds Disbursements (Plus): This number, which is assigned by VisaNet and is unique to this transaction, is not tied to the original transaction. The value in the response must match.

Visa Smart Debit/Visa Smart Credit (VSDC): This field is required in 0620 authentication failure or issuer script advices and their 0630 responses.

Fraud Reporting:

- Client-generated – The field must contain the System Trace Audit Number from the original transaction. If there is no original transaction, the field must be generated.
- Visa-generated – A value is generated by V.I.P. for each transaction. The field does not match the value in the original fraud transaction. The field must not be used to match this transaction with the original fraud transaction.

Advices From BASE II Endpoints: This field is present. The values in this field for messages originating from BASE II endpoints might not fully reflect the values of the original financials. See “Message Matching.”

Collection-Only Transactions: This field must contain the value from the original transaction.

Field 11 – Field Edits

This field must be present with a non-zero value in messages. The value in a response must match that in the request or advice.

Values in reversals (including ATM account transfer reversals) must match those in the original requests.

Field 11 – Reject Codes

0011 = Invalid value

0277 = Field missing

0514 = Unsolicited response (value changed in response message)

0597 = Consistency error

Field 12 – Time, Local Transaction

Field 12 – Attributes

fixed length

6 N, 4-bit BCD (unsigned packed); 3 bytes

format: hhmmss

Field 12 – Description

Field 12 contains the time the transaction takes place, expressed in the local time of the card acceptor location. The time is in *hhmmss* format, where: *hh* = hours, *mm* = minutes, and *ss* = seconds.

Field 12 – Usage

Acquirers must submit this field in 0200 requests, 0220 advices, 0400 requests, and 0420 reversals. It is not used in dispute financials, dispute financial reversals, or dispute response financials. It is not present in responses and advice responses.

The value in subsequent messages is from the original request or advice. However, the value in misdispenses or back-office adjustments is the time the adjustment was made. The value of this field does not change if there are delays in conveying the transaction to the issuer.

VisaNet Integrated Payment (V.I.P.) does not ensure that the value in the subsequent messages matches the original request or advice.

0100 Message to 0200 Message Conversions: Assuming ATM format conversion, field 12 and field 13 in the issuer's 0200 financial request reflect the field 7 time the authorization request entered VisaNet: the last three bytes of the 0100's field 7 becomes field 12 in the 0200 message, and the first two bytes of the 0100's field 7 becomes field 13 in the 0200 message.

Advices From BASE II Endpoints: This field contains zeros when present.

STIP and Switch Advices: This field is included in these advices if it was in the request:

- STIP-generated 0220, or 0420 advice
- Switch-generated 0420 advice

Collection-Only Transactions: In 9240 and 9242 messages, this field must contain the value from the original transaction. It is not used in 9250 or 9252 responses.

Field 12 – Field Edits

The value must be in this format:

- hh **00-23**
- mm **00-59**
- ss **00-59**

Field 12 – Reject Codes

0090 = Invalid value

0278 = Field missing

Field 13 – Date, Local Transaction

Field 13 – Attributes

fixed length

4 N, 4-bit BCD (unsigned packed); 2 bytes

format: mmdd

Field 13 – Description

Field 13 contains the local month and day on which the cardholder originated the transaction. The date is in mmdd format, where: mm = month and dd = day.

- mm = **01** through **12**
- dd = **01** through **31**

Field 13 – Usage

This field is used in all financial requests and advices related to a cardholder transaction. It is not present in responses.

The value in subsequent messages is from the original request or advice. In a misdispense or back-office adjustment and its subsequent requests or advices, the value is from the date of the adjustment. The value of this field does not change if there are delays in conveying the transaction to the issuer.

VisaNet Integrated Payment (V.I.P.) does not ensure that the value in the later messages matches the original request or advice.

STIP and Switch Advices: This field is included in these advices if it was in the request:

- STIP-generated 0220 and 0420 advices
- Switch-generated 0400/0420 advices

0100 Message to 0200 Message Conversions: Assuming ATM format conversion, field 12 and field 13 in the issuer's 0200 financial request reflect the field 7 time the authorization request entered VisaNet: the last three bytes of the 0100's field 7 becomes field 12 in the 0200 message, and the first two bytes of the 0100's field 7 becomes field 13 in the 0200 message.

Advices from BASE II Endpoints: Field is present.

Fraud Reporting:

- Client-generated – If entered, the field must match date in the original transaction. For ICS and NRI/PS604 only, the field is not required.
- VisaNet-generated – If present, the field contains the date and time from the original fraud transaction. The field is not present if the original fraud transaction was ICS or NRI/PS604.

Collection-Only Transactions: In 9240 and 9242 messages, this field must contain the value from the original transaction. This field is not used in 9250 or 9252 responses.

Field 13 – Field Edits

Required in 02xx requests and advices for card transactions, in related 04xx reversal requests and advices, in 04xx dispute financials and dispute financial reversals.

Date format:

- mm must be **01-12**
- dd must be **01-31**

Field 13 – Reject Codes

0091 = Invalid value

0279 = Field missing

Field 14 – Date, Expiration

Field 14 – Attributes

fixed length

4 N, 4-bit BCD (unsigned packed); 2 bytes

format: *yymm*

Field 14 – Description

Field 14 contains the year and the month after which the card expires. The date is in *yymm* numeric format, where *yy* = year (**00-99**) and *mm* = month (**01-12**).

The card expiration date is contained in the card's magnetic stripe (field 35).

Field 14 – Usage

When present, this field is used in requests and advices related to an acquirer-initiated cardholder transaction. This field is not required because the expiration date is in the magnetic stripe. It is not used in responses. It is present in reversals and misdispense advices if it was in the original request.

Issuers must use the value 4912 in Field 35-Track 2 Data to designate a non-expiring card.

STIP and Switch Advices: This field is present in these advices if it was in the request:

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

Fraud Reporting:

- Client-generated – The field must contain the card expiration date of the issued card, if available. If the card expiration date is not available, enter **4912** or omit field.
- Visa-generated – The field contains the expiration date from the original fraud transaction.

Field 14 – Field Edits

If this field is present, it must contain a numeric date in *yymm* format.

If the year and month are other than **00-99** and **01-12** respectively, the request is rejected (**0014** invalid value).

In financial requests, the date can be the current date for CVV/iCVV and non-CVV transactions.

Determining Century: Visa determines expiration date century based on where the year (yy) falls with respect to 1949 and 1950.

- If yy equals a year between 1950 and 1999, the century is considered to be the Twentieth, or the 1900s through 1999.
- If yy equals a year between 1900 and 1949, the century is considered to be the Twenty-First, or year 2000 and beyond.

STIP applies the following processing rules to Field 14-Expiration Date:

- Cards with expiration dates in the range of current year/current month to **4912** (YYMM) are considered “not expired.”
- Cards with expiration dates in the range of **5001** (YYMM) through current year/prior month are considered “expired.”

Field 14 – Reject Codes

0014 = Invalid value

Field 14 – STIP Edits

STIP responds to the acquirer with a field 39 response code **54** if the date is greater than the maximum date allowed and less than the current date. The date **4912** is considered a nonexpiring date.

Field 15 – Date, Settlement

Field 15 – Attributes

fixed length

4 N, 4-bit BCD (unsigned packed); 2 bytes

format: *mmdd*

Field 15 – Description

Field 15 contains the month and day for which this message becomes part of a transaction's full service settlement between the acquirer and issuer. The date is in *mmdd* format, where: *mm* = month and *dd* = day.

Field 15 – Usage

The value is assigned by VisaNet and should **not** be entered by the originator of a request or advice. The originator of a response must return this date unchanged in the response or advice response.

VisaNet inserts a settlement date in every 02xx, 04xx, 05xx, and 06xx message, whether or not that message has impact on settlement totals. (Flags in field 9 of the message header identify messages eligible for settlement. See Message Structure and Header Fields.

In an 0302/0312 file update and inquiry, VisaNet returns a value in the 0312 response.

This field is present in 0322 Auto-CDB file advices. The same value is returned in 0332 responses.

VisaNet ignores data received in this field of a request or advice. If this is the first message of a new cardholder transaction, VisaNet sets this field to the current settlement date before sending the message to its destination. The value in the request or advice is returned in the response to the acquirer.

Before sending a response or advice response to the acquirer, VisaNet sets this field to the value in the request or advice.

Visa Smart Debit/Visa Smart Credit (VSDC): V.I.P. adds this field to 0620 authentication failure or issuer script advices. The field appears in 0630 responses.

STIP and Switch Advices: This field is present and contains the date the advice was created, not the date the advice is retrieved from the Advice File.

Advices From BASE II Endpoints: This field is present, even in a text message advice. It contains the date from the BASE II record.

Fraud Reporting: This field is inserted by V.I.P. in the Visa-generated 9620 message and in the 9630 response to client-generated 9620 message.

Visa Debit Gateway-Mastercard and Cirrus Same-Day Reversals: Visa processes a full or partial reversal as a same-day reversal, provided the reversal contains a field 15 value from Mastercard that matches the field 15 value of the original transaction. If this requirement is met, Visa assigns field 63.19 FPIs (one for the original and one for the reversal) that correspond to same-day processing.

In Mastercard and Cirrus Automated Teller Machine (ATM) transactions, 0220 cash disbursement adjustment messages are used for partial reversals.

If the field 15 value of the reversal does not match that of the original, Visa processes the transaction as a reversal that did not occur on the same day and will assign FPIs that do not correspond to same-day processing.

Field 15 – Field Edits

Date format must be as follows:

- *mm* must be 01-12
- *dd* must be 01-31

Field 15 – Reject Codes

0038 = Invalid value

Field 16 – Date, Conversion

Field 16 – Attributes

fixed length

4 N, 4-bit BCD (unsigned packed); 2 bytes

format: *mmdd*

Field 16 – Description

Field 16 contains the effective date of the conversion rate used to convert the transaction amount (Field 4-Amount, Transaction) to the settlement amount (Field 5-Amount, Settlement). The date is in *mmdd* format, where: *mm* = month and *dd* = day.

Field 16 – Usage

Multicurrency Participants: This field is included in a cardholder transaction message only when the settlement amount (Field 5-Amount, Settlement) is present. It is not provided by the request or advice originator, and is not returned by the response provider. It is added by VisaNet and delivered to the message recipient.

STIP and Switch Advices: This field is present in these advices for participants. It is not used in their responses.

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

Advices From BASE II Endpoints: This field is present if the advice recipient participates in online multicurrency processing and the transaction qualifies for settlement. Flags in field 9 of the message header identify messages that qualify for settlement. See Message Structure and Header Fields.

Field 16 – Field Edits

None.

Field 16 – Reject Codes

None.

Field 18 – Merchant Type

Field 18 – Attributes

fixed length

4 N, 4-bit BCD (unsigned packed); 2 bytes

Field 18 – Description

Field 18 contains a code describing the merchant's type of business product or service, also known as the merchant category code (MCC). These codes are listed in the *Merchant Data Standards*, as amended by additions and changes published in *VisaNet Business Enhancements* and in Technical Letters for clients.

Field 18 – Usage

See the *Visa Core Rules and Visa Product and Service Rules* for MCC requirements and restrictions.

This field is used in all requests and advices related to a cardholder transaction. The value in a reversal must match the request. This field is not used in responses.

The merchant category code must be **6011** for all Automated Teller Machine (ATM) transactions.

To ensure correct routing, **6011** should be included for Automated Teller Machine (ATM)-related fee collections and funds disbursements.

If the first two digits of Field 3-Processing Code = **01**, this code must be **6011**. If this field is **6011**, field 3 cannot be **20**.

VSDC PIN Change/Unblock Service Requests: The code must be **6011**; otherwise, VisaNet Integrated Payment (V.I.P.) rejects the request with reject code **0017**.

Visa Smart Debit/Visa Smart Credit (VSDC): This field is required in 0620 authentication failure or issuer script advices.

STIP and Switch Advices: This field is present in these advices if it was in the request. It is not used in advice responses.

- STIP-generated 0220 and 0420 advice
- Switch-generated 0420 advice

Advices From BASE II Endpoints: This field is present except in fee collections/funds disbursements (Visa only).

Fraud Reporting:

- Client-generated-The field must contain a merchant category code (MCC). If the Reimbursement Attribute is **1** or **2**, the field must contain **6011**. The field must match MCC in the original transaction. For ICS and NRI/PS604, this field may be omitted.
- VisaNet-generated-The field contains the merchant type from the original fraud transaction. The field may be present if reported in the original fraud transaction.

Plus Alternate Media (U.S. Domestic Service Only): See "Usage" in "Field 18" in *V.I.P. System POS (Visa & Visa Electron) Technical Specifications*.

Collection-Only Transactions: In 9240 and 9242 messages, this field must contain the value from the original transaction. The value must be numeric. This field is not used in 9250 or 9252 responses.

Field 18 – Field Edits

This field is required in these requests and advices for cardholder transactions:

- 0200, 0220
- 0400/0420, 0422
- 0600, 0620

Value must be numeric; otherwise V.I.P. rejects the transaction with reject code **0017**.

For ATM PLUS, network **0004** transactions, MCC must be **6011**, otherwise, V.I.P. rejects the transaction with reject code **0017** (Invalid value).

If the value in field 3, position 1-2 (transaction type) and the value in field 18 (MCC) creates an invalid transaction type/MCC combination, V.I.P. rejects the transaction with reject code **0610** (processing code not compatible with MCC).

Field 18 – Reject Codes

0017 = Invalid value

0283 = Field missing

0610 = First two digits of processing code in field 3 not compatible with MCC in field 18.

Field 18 - File Edits

Field 18 - File Maintenance Error Codes

Field 19 – Acquiring Institution Country Code

Field 19 – Attributes

fixed length

3 N, 4-bit BCD (unsigned packed); 2 bytes

Field 19 – Description

This code identifies the country of the acquiring institution for the ATM.

The values for field 19 are the numeric codes listed in the appendix titled “Country and Currency Codes.” A leading zero is required to pad the first unused half-byte of this field. This leading zero is *not* part of the country code.

Field 19 – Usage

This field is used in all messages related to a customer transaction. The value in the original must be used in subsequent messages including responses.

If the card acceptor and acquiring institution are in different countries, the code for the country of the card acceptor must be placed in Field 43 – Card Acceptor Name/Location.

For U.S. military bases, embassies, consulates, and overseas traveling merchants, this field must be **840**. Field 43, positions 39-40, must contain a country code, and field 59 positions 1-2 must be **99**.

Visa Smart Debit/Visa Smart Credit (VSDC): This field is required in 0620 authentication failure or issuer script advices and their 0630 responses.

VSDC PIN Change/Unblock Service Requests: This field is required in 0200 messages. V.I.P. forwards it to the issuer.

0302 and 0322 File Maintenance Messages: This field is optional in 0302 requests. It is not used in 0322 requests.

Visa-Generated Funds Disbursements (Plus): The value in this field is **0000**.

STIP and Switch Advices: This field is present in these advices if it was in the request:

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

Advices From BASE II Endpoints: This field is present except in fee collections/funds disbursements (Visa only).

Collection-Only Transactions: This field must contain the value from the original transaction.

Field 19 – Field Edits

Except as noted, this field is required in all messages related to a cardholder. The value in this field must be one of the 3-digit numeric codes listed in the appendix titled “Country and Currency Codes.”

This field is optional in Plus (NID 0004) messages.

Field 19 – Reject Codes

0033 = Invalid country code

0306 = Field missing

Field 19 – File Edits

None.

Field 19 – File Maintenance Error Codes

0591 = Field is missing

Field 20 – PAN Extended, Country Code

Field 20 – Attributes

fixed length

3 N, 4-bit BCD (unsigned packed); 2 bytes

Field 20 – Description

Field 20 contains a code that identifies the country of the card issuer institution. Values for this field are the numeric codes in the appendix titled “Country and Currency Codes”. A leading zero is required to pad the first unused half-byte of this field. The zero is a filler, *not* part of the country code.

Field 20 – Usage

This field is used to determine whether regional or international rules apply for processing the transaction. If VisaNet Integrated Payment (V.I.P.) receives an 0200 full-financial request or 0420 reversal advice that contains field 20, V.I.P. does not include the field in the request or advice sent to the issuer. However, V.I.P. adds field 20 in the 0210 or 0430 response sent to the acquirer.

The field is also added to 0230 misdispense or back-office adjustment responses, 0422 dispute financials, dispute financial reversals, and 0230 dispute response financial responses, if it is not provided by the acquirer in the request.

The value in the original must be used in subsequent messages.

Auto-CDB (Visa only): If this field is present in an 0322 advice, it must be returned in the 0332 response.

STIP and Switch Advices: This field is present in these advices if it was in the message being processed:

- STIP-generated 0220 or 0420 advice
- Switch-generated 0400/0420 advice

Advices From BASE II Endpoints: This field is present.

Field 20 – Field Edits

The value must be one of the 3-digit numeric codes listed in the appendix titled Country and Currency Codes.

Field 20 – Reject Codes

0035 = Invalid value

0314 = Field missing

Field 22 – Point-of-Service Entry Mode Code

Field 22 – Attributes

fixed length

4 N, 4-bit BCD (unsigned packed); 2 bytes

Field 22 – Description

Field 22 contains a 4-digit code indicating the method used to enter the account number and card expiration date (positions 1 and 2) and, if an electronic terminal is used, the capability of the terminal to capture online PINs (position 3) for transactions processed through VisaNet. This field is fixed-length with three subfields. The codes for each of the subfields are provided in the Valid Values section. The position assignments are as follows:

Positions: 1- 2	3	4
PAN/date entry mode	PIN entry capability	Fill
Byte 1	Byte 2	n/a

Positions 1-2, PAN and Date Entry Mode: A 2-digit code that identifies the method used to enter the cardholder account number and card expiration date. This code specifies whether the entire magnetic stripe is included in an authorization request.

Position 3, PIN Entry Capability: A 1-digit code that identifies the capability of terminal to capture PINs. This code does not necessarily mean that a PIN was entered or is included in this message.

Position 4, Fill (Unused): This 1-digit subfield is zero-filled. This requirement is an exception to the general rule of using a leading zero to fill a field.

Field 22 – Usage

This field is mandatory in 0200 originals, reversals, system generated cash disbursement adjustments (misdispense), and back-office adjustment messages. When this field is present in reversals and system generated cash disbursement adjustments, it must be populated with the same value that was sent in the original message, except for 0220 credit adjustment

transactions with message reason code **2108** in field 63.3. In this instance, the code in field 22, positions 1-2, must be **01** (manual key entry).

01 (manual key entry) can be used for 0220 back-office adjustment advices. However, Visa recommends that Visa Electrons use **00** for back-office adjustment advices. Issuers can opt to STIP-decline key-entered transactions, which affects the disposition of 0220 adjustments.

This field is not used in 0220 dispute response financial or 0422 dispute financial and dispute financial reversal messages. It is not returned in responses or advice responses.

The coding in this field is related to Position 2 of Field 60-Additional POS Information, which describes the capability of the terminal used.

A reversal contains this field's original value.

For balance inquiries, the POS Entry Mode Code must be 0210, 9010, 0510, or 9510.

VSDC: The first two positions must be **05** or **95**. Code **05** indicates a chip card was read at the terminal and the data transmitted from the chip is considered reliable. Code **95** indicates the chip card was read at the terminal but the data may not be reliable. In addition to the standard usage of this field, this field is required in 0620 authentication failure advices. Data field requirements for advices from BASE II endpoints are identical to those for STIP advices.

Visa Contactless Transactions: The first two positions must be **07** or **91**.

PIN Change/Unblock: The first two positions must be **05** or **95**.

STIP and Switch Advices: This field is present in these advices if it was present in the request:

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

Advices From BASE II endpoints: This field is included if it was present in the BASE II record, except for fee collection/funds disbursement advices (Visa only).

Fraud Reporting: These points apply.

- Client-generated-For POS Entry Mode (in positions 1-2, PAN/date entry mode) and PIN Entry Capability (in position 3), the field must match the entry in the original transaction.

AP, VE, and U.S. only: The field is required. If the POS Entry Mode is not available from the original transaction, enter **00** in positions 1-2. If the PIN Entry Capability is not available from the original transaction, enter **0** in position 3.

- VisaNet-generated-The field contains the POS entry mode from the original fraud transaction. The field may be present if reported in the original fraud transaction.
- ICS and NRI/PS604: This field is not required.

Field 22, position 3 is not returned if field 60, position 1, was not reported in the original 9620 fraud transaction.

Collection-Only Transactions: In 9240 and 9242 messages, this field must contain the code from the original transaction. This field is not used in 9250 or 9252 responses.

Card Verification Value (CVV) and Integrated Circuit Card-Card Verification Value (iCVV): If this field contains **05** or **07** and online Card Authentication Method (CAM) is performed, CVV and iCVV processing is bypassed for Primary Account Number (PAN) and token requests. Field 44.5-CVV/iCVV Results Code is populated with the same value as the CAM result code that is returned in Field 44.8-Card Authentication Results Code.

VSDC ATM PIN Change/Unblock: The first two positions must be **05** or **95**.

Field 22 – Field Edits

Required in all 02xx and 04xx requests and advices except those for dispute financials, dispute financial reversals, dispute response financials, and fee collection/fund disbursements (Visa only).

If field 22 is not present in a message where it is required, V.I.P. rejects the message with reject code **0285**.

The value in this field affects other fields in a message as follows:

For Visa and Plus, if positions 1-2 = **02**, field 35 must be present.

For Visa and Plus, if positions 1-2 = **05**, **90** or **95**, field 35 must be present. Contents are unaltered and can be processed by CVV.

Edits for positions 1-2 do not apply to 04xx reversal messages.

CVV: If positions 1-2 are **90**, field 35 must be present. Code **90** must not be used if:

The full, unaltered magnetic stripe data is not present.

Dispute Financials: V.I.P. returns original U.S.-domestic dispute financial messages that contain a token and field 22, positions 1-2, contain **07** (contactless device-read-originated using VSDC chip data rules) or **91** (contactless device-read-originated using magnetic stripe data rules).

Field 22 – Reject Codes

0019 = Invalid value. This reject can occur when:

- The value does not indicate manual read (**01**) when the transaction includes F63.3 with a value of **2108**.

0142 = Magnetic stripe data missing or acquirer has not successfully completed testing when field 22 = **90**.

0285 = Field missing.

0592 = POS entry mode code 0x20 (no PIN-entry capability and transaction other than preauthorized purchase).

Field 22 – Valid Values

Table 30: Field 22 POS Entry Mode Codes

Code	Definition
Positions 1-2: PAN and Date Entry Mode	
00	Unknown or not applicable.
01	Manual (key entry).
02	Visa: Magnetic stripe read; CVV checking may not be possible. Plus: Exact Track 2 contents read, but transaction not eligible for CVV checking.
05	Contact integrated circuit card read using VSDC chip data rules; Online CAM authentication method; iCVV checking possible.
07	Contactless device-read-originated using qVSDC chip data rules; Online CAM authentication method; iCVV checking possible.
90	Magnetic stripe read and exact contents of Track 2 included; CVV checking possible.
91	Contactless device-read-originated using magnetic stripe data rules; Not allowed at ATMs.
95	Integrated circuit card read; CVV or iCVV checking may not be possible.
Position 3: PIN Entry Capability	
0	Unknown.
1	Indicates terminal can accept and forward online PINs.
Position 4: Fill	
0	Unused.

Field 23 – Card Sequence Number

Field 23 – Attributes

fixed length

3 N, 4-bit BCD (unsigned packed); 2 bytes

Field 23 – Description

Field 23 contains a number assigned to a card when two or more individual cards are associated with the same primary account number, thus enabling issuers to distinguish among different cards linked to the same account. The sequence number can also act as a tracking tool when reissuing cards.

For example, the initial card is issued with sequence number one, and when it expires, the card can be reissued with sequence number two, and so on.

Although not part of the cryptogram, the sequence number is used by the issuer or Visa to derive the Unique Derivation Key (UDK) from the Master Derivation Key (MDK) when using the Online Card Authentication Method (Online CAM).

This field applies only to VSDC transactions and is used only by “Full Data Option” participants. See the *Visa Smart Debit/Visa Smart Credit (VSDC) System Technical Manual*.

Field 23 – Usage

VSDC: If the sequence number is present on the chip card, acquirers must include it without modification in requests to avoid failing Online CAM. If the card sequence number is not present on the chip card, the acquirer can exclude the field entirely from the request message or include it with all **zeros**.

- 0120/0130 STIP advices and responses
- 0120/0130 and 0620/0630 chip-based informational advices and responses

If the card sequence number is present on the chip card, the field must be included in the Visa messages listed below (except as indicated).

- 0200 cash disbursements, balance inquiries, account transfers, and their 0210 responses.
- 0220/0230 misdispense or back-office adjustments and responses

- 0620/0630 authentication failure or issuer script advices and responses
- 9620 fraud advices (except Plus advices); it is optional in 9630 responses

It is optional in these messages:

- 0422/0432 dispute financials, dispute financial reversals, and their responses
- 0220/0230 dispute response financials and their responses

Data field requirements for advices from BASE II endpoints are identical to those for STIP advices. Issuers and acquirers must retain this field for dispute processing.

STIP and Switch Advices: This field is present in these advices if it was present in the request:

- STIP-generated 0220 advice and 0230 response
- Switch-generated 0420 advice

Advices From BASE II Endpoints: This field is present.

Visa iCVV Convert: VisaNet Integrated Payment (V.I.P.) removes this field before forwarding chip-based requests to participating issuers.

Auto CDB: This field is present in a 0322 advice if present in the original.

Field 23 – Field Edits

If this field is present, it must be numeric.

This field is right-justified and zero-filled when it contains less than three digits. The zero is a filler and not part of the sequence number.

Field 23 – Reject Codes

0092 = Invalid value

Field 25 – Point-of-Service Condition Code

Field 25 – Attributes

fixed length

2 N, 4-bit BCD (unsigned packed); 1 byte

Field 25 – Description

Field 25 contains a code identifying transaction conditions at the point-of-sale or point of service. For messages that follow an original request, this code identifies the type of processing being done.

Field 25 – Usage

- For account, address, and CVV2 verification-only requests, without authorization, the code in this field must be **51** and field 4 must have an amount of **zero**.
- For authorization requests that include address verification, this field cannot contain code **51**, also, the transaction must include field 123.
- Address verification supports requests for all merchant categories in field 18 with or without an authorization amount request.
- For account verification requests, field 18 cannot be **6011** (ATM). See Field 104 Usage 2 for account verification AFT or OCT requirements.
- For CVV2 verification-only requests, this field must contain a code of **51**, acquirers must also submit field 4 with an amount of **zero**, and the CVV2 data to be verified in field 126.10.
- Issuers that perform their own CVV2 validation must be prepared to receive CVV2 verification-only requests.
- Issuer 0110 responses must contain a transaction amount of **zero** in field 4, a response code of **85** in this field, and CVV2 results value in field 44.10.
- If V.I.P. performs CVV2 validation on behalf of the issuer, V.I.P. checks the CVV2 in all eligible requests and provide results data in responses.

- For Non-payment authentication CAVV usage 3, version 7 account verification requests that this field must contain a code of **51**.
- For eligibility inquiry request message (Field 3.1 = **39**), if field 25 contains a value of **51** and field 4 does not contain an amount of **zero**, V.I.P. changes field 4 to zero before forwarding to issuer. If the issuer is unavailable, STIP bypasses the amount in field 4 and if the eligibility request meets all verification field requirements, V.I.P. responds with a value of **85** (No reason to decline) in field 39.

This field is used in all messages related to a cardholder transaction. For balance inquiries, the code must be **00**. In several message types that may follow an original transaction, the POS condition code identifies the type of processing performed:

- In a dispute response financial, the code must be **13**.
- In a dispute financial, this code must be **17**.
- In a dispute financial reversal, this code must be **54**.

STIP and Switch Advices: This field is present in these advices:

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

VSDC PIN Change/Unblock Service Requests: This field must contain **00**.

Collection-Only Transactions: In 9240 and 9242 messages and their responses, this field must contain the code from the original transaction.

Adjustments for Duplicate Transactions: Field 25 must contain **00**. Additional requirements are specified in the descriptions for fields 62.2 and 63.3.

Mobile Location Confirmation Service: This field must contain a value of **00** (normal transaction of this type).

Field 25 – Field Edits

Required in all 01xx, 02xx, and 04xx requests and responses except fee collections or funds disbursements. The value in a response must match that in the request. If the code in the response does not match what was in the request, Visa restores the original value.

Adjustments for Duplicate Transactions: If field 3, positions 1-2, is **22**, field 63.3 is **2108**, and field 62.2 is present, but field 25 is not **00**, the transaction is rejected with reject code **0018**.

Field 25 – Reject Codes

0018 = Invalid value.

0284 = Field missing

0593 = Value **05** not compatible with field 22.

0596 = Consistency error; message is for a different cardholder function type than the other records in the transaction set

0598 = Consistency error; message is a primary request or its reversal but an adjustment has been processed for this transaction set

Field 25 – Valid Values

This table lists codes acquirers should use. V.I.P. permits other codes defined by ISO 8583. Issuers should be prepared to receive ISO 8583-defined codes.

Table 31: Field 25 POS Condition Codes

Code	Definition	Edits Associated With Code
00	Normal transaction of this type	Required in 0220 adjustments for duplicate transactions; otherwise n/a.
02	ATM transaction	PIN data (field 52) present.
13	Dispute Response Financial	Message type must be 0220 or 0230.
17	Dispute Financial	Message type must be 0422 or 0432.
54	Dispute Financial reversal	Message type must be 0422 or 0432.

Field 26 – Point-of-Service PIN Capture Code

Field 26 – Attributes

fixed length

2 N, 4-bit BCD (unsigned packed); 1 byte

Field 26 – Description

Field 26 contains a value indicating the maximum number of PIN characters that can be accepted by the point-of-service device.

Field 26 – Usage

This field is used in requests and advices with PINs, only if Field 52-PIN Data is present in cash disbursements, balance inquiries, and account transfers, and the point-of-service device cannot accept the standard maximum PIN length of **12** (as defined in ISO/TC68/SC2/WG6, draft proposal 9546/1). It is not used in responses or advice responses, or misdispense and back-office adjustments.

STIP Advices: This field is present in STIP-generated 0220 advice if it was in the request.

Advices From BASE II Endpoints: Not applicable.

If the PIN is verified by VisaNet as part of the PIN Verification Service, this field is forwarded to the issuer, and its value is not zeroed out by VisaNet. (See also the processing for fields 52 and 53.)

Field 26 – Field Edits

If this field is present, the value must be between **04** and **12**.

Field 26 – Reject Codes

0070 = Invalid value

Field 28 – Amount, Transaction Fee

Field 28 – Attributes

fixed length

1 AN, EBCDIC +

8 N, EBCDIC

total: 9 bytes

Field 28 – Description

Field 28 is used for Automated Teller Machine (ATM) transactions and contains an acquirer-assessed ATM transaction access fee for informational purposes only. The access fee amount is included in field 4. The 1 AN prefix is **C** for credit, or **D** for debit.

The fee designated in field 28 is in the same currency as the field 4 amount. The currency code in field 49 applies.

The number of decimal places assumed for this field depends on the currency. If that currency is defined with three decimal places, the last digit of field 28 must be **zero**. See the appendix titled “Country and Currency Codes” for currency codes and implied decimal places.

Field 28 – Usage

For reversals, the value should be the same as that in the original, because it is the amount in field 4 that is reversed. The access fee amount contained in this field must be incorporated into the value expressed in F4.

The field is used in 0200 cash disbursements, Visa ReadyLink ATM loads, account transfers, and balance inquiries. When present in the original request, it must also be present in subsequent 0220 misdisbursement or back-office adjustment requests and advices, 0400/0420 reversal requests and advices, 0422 dispute financials (if present in the original requests), and 0220 dispute response financials. It is not used in responses or advice responses. It is not used in fee collections/funds disbursement transactions.

Field 28 is required in all international and domestic Visa and Plus ATM transactions, including original requests and their reversals except for PIN Change/Unblock requests and reversals. If an access fee is not assessed on an ATM transaction, the field must be present and populated with zeros. Although acquirers must submit this field in ATM requests, receipt of this field is optional for issuers.

Europe acquirers must populate this field if an ATM access fee is assessed; however, they may populate this field with **zeros** if no access fee is assessed.

Field 28 is for informational rather than settlement purposes—the amount in field 28 must be added to or subtracted from the amount in field 4 in the request to determine the amount dispensed.

A **D** designates that the access fee is a debit to the cardholder's account. For example, a cardholder requests \$20 and the acquirer imposes an access fee of \$1. Field 4 would contain \$21, and field 28 would contain a **D** in byte 1 and \$1 in the amount portion of the field. The cardholder receives \$20 from the ATM but the cardholder's account is debited for \$21.

A **C** is used in the request when the access fee is a credit to the cardholder, such as if the acquirer is paying the cardholder as an incentive to use the ATM. For example, a cardholder requests \$20 and the acquirer access fee is a \$1 credit. Field 4 would contain \$19, and field 28 would contain a **C** in byte 1 and \$1 in the amount portion of the field. The cardholder receives \$20 but the cardholder's account is debited for \$19.

STIP and Switch Advices: This field is present in these advices if it was in the request:

- STIP-generated 0220 or 0420 advice
- Switch-generated 0400/0420 advice

Message Requirements: Field 28 must be included in certain ATM messages with the access fee or zero-filled and submitted as a credit or debit as defined. This table shows messages that must include field 28, the value in the prefix, and the amount that must be submitted.

Table 32: Message Requirements for Field 28

Message Type	Amount in Field 28	Value in Field 28 Prefix	Processing Condition
0200 Balance Inquiry	Must be zero-filled and submitted as a debit or credit <i>The access fee is not supported for these transactions. V.I.P. drops the field before delivery to the issuer.</i>	D or C	Not applicable
0200 Account Transfer	Must be zero-filled and submitted as a debit or credit <i>The access fee is not supported for these transactions. V.I.P. drops the field before delivery to the issuer.</i>	D or C	Not applicable
0200 full-financial	Must contain the access fee amount or zero-filled and be submitted as a debit	D	Not applicable
0220 System-Generated Cash Disbursement Adjustment (Misdispense)	Must be zero-filled and can be submitted as a debit	D	Not applicable

Table 32: Message Requirements for Field 28

Message Type	Amount in Field 28	Value in Field 28 Prefix	Processing Condition
0220 Partial Cash Disbursement Adjustment (Back Office)	Must be zero-filled and can be submitted as a debit	D	Not applicable
0220 Full Cash Disbursement Adjustment (Back Office)	Must contain the access fee amount from the original request and can be submitted as a debit or credit	D	If the processing code in field 3 is 02 (debit), field 28 prefix must be D .
		C	If the processing code in field 3 is 22 (credit), field 28 prefix must be C .
0220 Dispute Response Financial	If present in the dispute financial, must contain the access fee amount from the dispute financial <i>The field 28 prefix should contain the prefix value from the dispute financial. Issuers must be prepared to receive the value of C or D.</i>	D	Not applicable
0420 ATM Cash Transaction Reversal	Must contain the access fee amount from the original request <i>Although reversing the prefix in a reversal request is normal usage for field 28, issuers must be prepared to receive the value of C or D.</i>	C	Not applicable
0422 Full Dispute Financial	If present in the transaction being disputed, must contain the access fee amount from that transaction <i>The field 28 prefix should contain the prefix value from the dispute financial. Issuers must be prepared to receive the value of C or D.</i>	D	Not applicable
0422 Partial Dispute Financial	Must be zero-filled and can be submitted as a debit or credit	D or C	Not applicable
0422 Dispute Financial Reversal	If present in the dispute financial request, must contain the access fee amount from the dispute financial request <i>The field 28 prefix should contain the prefix value from the dispute financial. Issuers must be prepared to receive the value of C or D.</i>	D	Not applicable

For ATM PIN Change/Unblock requests and reversals, V.I.P. drops this field if present.

Collection-Only Transactions: This field is optional in 9240 messages.

Global ATM Access Fee Free Service: This field must contain a surcharge amount. The fee amount in positions 2–9 must contain all zeros. The prefix in position 1 must contain:

- **C** (Credit)
- **D** (Debit)

Field 28 must be included in these messages for Global ATM Access Fee Free Service:

- 0200/0210/0220/0230 Full Financial Request, Acquirer Advice, STIP Advice, BASE II Advice, and Responses
- 0220/0230 Adjustment Advice, STIP Advice, and Responses
- 0220/0230 Dispute Response Financial and Response
- 0220/0230 Dispute Response Financial Reversal and Response
- 0420/0430 Financial Reversal, Acquirer Advice, Issuer STIP Advice, Issuer Switch Advice, and Responses
- 0422/0432 Dispute Financials and Responses
- 0422/0432 Dispute Financial Reversals and Responses

Field 28 – Field Edits

The prefix must be **D** to designate that the access fee is a debit to a cardholder's account or **C** to designate that the access fee is a credit to a cardholder's account. The eight digits for the fee amount must be numeric; all **zeros** allowed.

If the access fee amount in this field is greater than or equal to the amount in Field 4, V.I.P. rejects the transaction with reject code **0134**.

Except as noted, if an acquirer submits an international or domestic Visa/Plus ATM authorization or full-financial message without field 28, the message is rejected with reject code **0308**.

This field must be present in all financial transactions from acquirers and issuers; otherwise, the transaction rejects with code **0308**. This edit applies to all ATM networks: NID **0002, 0004, 0006, 0007, 0030, 0040, 0041** and **0042**. Field 28 can contain all **zeros**.

Field 28 – Reject Codes

0134 = Invalid value

0308 = Field missing (ATM)

Field 32 – Acquiring Institution Identification Code

Field 32 – Attributes

variable length

1 byte, binary +

11 N, 4-bit BCD (unsigned packed); maximum 7 bytes

Field 32 – Description

This code identifies the financial institution acting as the acquirer of this cardholder transaction. The acquirer is the client or system user that installed the ATM.

The ID can be a Visa acquiring identifier or another code that identifies the financial institution. Visa acquiring identifiers are six digits. U.S. clients use 6-digit Routing IDs (RIDs) that begin with a **2**. Codes other than Visa acquiring identifiers can be supported; for example, a routing and transit number, but this must be prearranged with Visa.

When a client processing center operates for multiple acquirers, this is the code for the processing center.

The value specifies the number of digits in the ID code. If the ID code contains an odd number of digits, a leading zero is required to pad the first unused half-byte of data. Because this zero is filler, *not* part of the ID, it is *not* counted for the length subfield.

Field 32 – Usage

This field is a key data element used to match a message with others in a given transaction set. The value in the original request must be the same in the response and all other messages in that transaction set. Additional information about key data elements is located in Chapter 1, Message Matching.

The value in the original request must be the same in the response and all other messages in that set, including dispute financials, dispute financial reversals, dispute response financials, misdisbursements, or back-office adjustments.

If a request contains a Personal Identification Number (PIN), the acquiring identifier in the field is the one associated with the Acquirer Working Key (AWK) used to encrypt the Personal Identification Number (PIN). If the Acquirer Working Key (AWK)s are not present in the acquiring identifier, VisaNet Integrated Payment (V.I.P.) uses the keys from the source PCR.

This field is one element of the transaction key and transaction set key.

Visa-Generated Funds Disbursements (Plus): The value in this field is **400015**.

STIP and Switch Advices: This field is present in these advices if it was in the request:

- Stand-In Processing (STIP)-generated 0220 or 0420 advice
- Switch-generated 0420 advice

Advices From BASE II Endpoints: This field is included if it was present in the clearing record.

Fraud Reporting:

- Client-generated – The field is required for fraud reporting and must match the value in the original transaction. For ICS and NRI/PS604, the field is not required.
- VisaNet-generated – The field contains the value from the original fraud transaction. The field may be present if reported in the original fraud transaction.

Automated Teller Machine (ATM) Format Conversion (AFC) Service: This field is present in a Visa-generated 0220 adjustment message and contains the value **400015**.

The acquiring identifier value of the original acquirer is located in field 90.4. In addition, field 3 contains processing code **22** (credit adjustment) or **02** (debit adjustment).

Collection-Only Transactions: In 9240 and 9242 messages and their responses, this field is required. The value must be from the original transaction and must be a Visa acquiring identifier consistent with the network identification code in field 63.1 if field 33 is not present.

ASAF Maintenance Advices: For Auto-CDB (Visa Only), this field is present in an 0322 advice and must be returned in the 0332 response. The value is **400004**.

Authorization-Only issuers receive this field in 0120 and 0322 advices, where it indicates which Visa service initiated the file update. Values are **400004** (Auto-CDB) or **400085** (GCAS).

Visa-Generated Funds Disbursements (Plus): The value in this field is **400015**.

Settlement Corrections: Visa sends a value of **406160** in fee collection and funds disbursement messages when they are used for settlement corrections. The value indicates that Visa initiated the message. These transactions also require:

- Field 3 = **19** or **29** (fee collection or funds disbursement, respectively).
- Field 63.3 = **5040** (miscellaneous fees or charges).

Visa uses the 0220 acquirer-generated deferred clearing advice format to send fee collections and funds disbursements for settlement corrections to issuers and uses the 0422 issuer-generated deferred clearing advice format to send these corrections to acquirers.

Field 32 – Field Edits

Required in all 02xx and 04xx messages, and in all 06xx messages except text and funds transfer totals messages.

This field must contain a 6-digit Visa acquiring identifier or an ID code. If the value is other than a Visa acquiring identifier, it must be prearranged with Visa.

The header field 6 source station ID must be authorized to use the source PCR. Violation of this requirement results in reject code **0021**.

Field 32 – Reject Codes

0020 = Invalid length

0021 = Invalid value

0287 = Field missing

0514 = Unsolicited response (value changed in response message)

Field 33 – Forwarding Institution Identification Code

Field 33 – Attributes

variable length

1 byte, binary +

11 N, 4-bit BCD (unsigned packed); maximum 7 bytes

Field 33 – Description

For Automated Teller Machine (ATM) transactions without a PIN, (for example, reversals, adjustments, and so forth) this is a code that identifies the institution that forwards a request to VisaNet, that is, to the message originator. The ID code can be a Visa issuing or acquiring identifier or a prearranged institution ID. The length specifies the number of digits in the ID code. If the ID code contains an odd number of digits, a leading zero is required to pad the first unused half-byte of data. Because this zero is filler, not part of the ID, it is *not* counted for the length subfield.

If present in these message types, this field contains the ID of the institution that originates the request or advice:

- 0422 dispute financial
- 0480 dispute financial status advice
- 0422 issuer fee collection or funds disbursement (Visa only)
- 0600/0620 text message

Field 33 – Usage

When this field is present in an original request, it is also present in related advices. VisaNet Integrated Payment (V.I.P.) drops field 33 from 0400/0420 reversal requests to issuers (including 0420 reversal advices).

This field is required in 0600 and 0620 text messages. It is optional in an 0422 dispute financial. It is required in a dispute response financial if it was present in the dispute financial.

Fee Collections/Funds Disbursements (Visa Only): This field is required in an 0422 issuer-generated fee collection/funds disbursement advice and must be returned unchanged in the

0432 response. It is not used in 0220 acquirer-generated fee collection funds disbursement advices.

Dynamic Key Exchange: This field is required in 0800/0810 acquiring identifier/issuing identifier/routing identifier based Dynamic Key Exchange messages to request and deliver new working keys for PIN encryption and to acknowledge their receipt. This field contains the identification code of the entity to which the new working key applies. The identification code can be the acquirer ID, issuer ID, or a routing ID. Visa-assigned acquirer IDs, or issuer IDs are six digits. Routing IDs can be 11 digits. The value in the 0800 request must be returned unchanged in the 0810 response.

This field is not used for station-level or PCR-level DKE processing.

Fraud Reporting: These points apply.

- Client-generated – This field must contain the issuing identifier or acquiring identifier of the issuer or acquirer submitting the fraud transaction. For ICS and NRI/PS604, the field must contain the issuing identifier of the issuer submitting the fraud transactions.
- VisaNet-generated – The field contains **400050**.

STIP and Switch Advices: This field is present in these advices if it was in the request.

- STIP-generated 0220 or 0420 advice
- Switch-generated 0400, 0420 advice

Advices From BASE II Endpoints: This field may be present in administrative messages.

Collection-Only Transactions: If present in 9240 and 9242 messages and their responses, this field must be from the original transaction and contain a Visa issuing identifier or acquiring identifier consistent with the network identification code in Field 63.1 – Network Identification Code.

Field 33 – Field Edits

The length subfield value must not exceed **11**. If this field is present the value must be a 6 digit issuing identifier/acquiring identifier, an 11 digit routing identifier or the prearranged institution ID.

If an authorization message is submitted with an invalid value in this field, Visa rejects the message.

Field 33 – Reject Codes

0056 = Invalid length

0057 = Invalid value

0333 = Field missing (fraud reporting)

0455 = Field missing

Field 34 – Acceptance Environment Data (TLV Format)

Field 34 – Attributes

variable length

2 bytes, binary

1535 bytes, variable by usage, maximum 1537 bytes

Note: ISO definition supports 9999 bytes.

Field 34 – Description

This field contains acceptance environment data.

The datasets, which are in TLV format, can have multiple subelements. The TLV format is shown below.

Positions:			
1	2-3	4-1535	
Subfield 1: length	Subfield 2: dataset ID	Subfield 3: dataset length	Subfield 4: TLV Subfields
Byte 1-2	Byte 3	Byte 4-5	Byte 6-1537

Length Subfield: 2-byte binary subfield that contains the number of bytes in this field.

Field 34 has the capacity to hold up to 9999 bytes. However, V.I.P. currently only supports a maximum length of 1535 bytes.

Position 1, Dataset ID: This one-byte binary subfield contains a hexadecimal value that identifies the TLV data that follows. Values:

- Dataset ID 02, Acceptance Environment Additional Data

Positions 2-3, Dataset Length: This 2-byte binary subfield specifies the total length of the TLV fields present in the dataset. The length is variable, depending on the data that follows.

Positions 4-1535, TLV Data: Each subfield of a dataset has a defined tag, length, and value. The tag is used with the dataset ID value. The dataset subfields can be present in any order with other TLV subfields.

The TLV format is used by all clients regardless of region.

Field 34 – Usage

These subsections describe the usage for this field.

Endpoints that support this field in TLV format must be able to receive dataset IDs and tags defined for this field in any order, including those they do not recognize or expect. Endpoints can receive multiple datasets in this field. Endpoints must ignore dataset IDs or tags they do not recognize and continue to process the field.

Field 34 – Dataset ID 02

Table 33: Dataset ID 02, Acceptance Environment Additional Data

Tag	Length	Value	Format	Content of Sub-Element
C0	1-99	Acceptor Street Address	ANS, EBCDIC	Contains merchant street address. Contains card acceptor street address (DE 122, Subelement 001, Subfield 001) for Mastercard transactions.
C8	16	Acceptor Customer Service Phone Number	ANS, EBCDIC	Contains acceptor customer service phone number (DE 122, Subelement 001, Subfield 004) for Mastercard transactions.
C9	16	Acceptor Phone Number	ANS, EBCDIC	Contains acceptor phone number (DE 122, Subelement 001, Subfield 005) for Mastercard transactions.
CA	256	Acceptor Additional Contact Information	ANS, EBCDIC	Contains acceptor additional contact information (DE 122, Subelement 001, Subfield 006) for Mastercard transactions.
CB	35	Acceptor Tax ID	ANS, EBCDIC	Contains acceptor tax ID (DE 122, Subelement 001, Subfield 007) for Mastercard transactions. If present, Visa adds the value of Y in the last position as required by Mastercard.

V.I.P. drops this dataset when issuer sends it in response messages.

Field 34 – Field Edits

Issuers that do not participate in receiving Field 34—Acceptance Environment Data do not receive this field.

Field 34 – Reject Codes

Field 35 – Track 2 Data

Field 35 – Attributes

variable length

1 byte, binary +

37 N, 4-bit BCD (unsigned packed); maximum 20 bytes

Field 35 – Description

Field 35 contains the information encoded on Track 2 of the magnetic stripe, including field separators but excluding beginning and ending sentinels and LRC characters.

The Track 2 delimiter/separator character (^) must be encoded as X'D' (binary 1101).

The length is the total number of hexadecimal digits (not bytes). If this field's Track 2 data equals an odd number of digits, one leading zero is required in the first unused half-byte of data for padding.

The length indicated above includes the field delimiter, but not leading **zeros**.

See the *Payment Technology Standards Manual*.

Field 35 – Usage

ATM acquirers must send Track 2 (field 35) in its entirety in original financial requests, per the Visa Rules. If acquirers submit Track 2 (field 35) and Track 1 (field 45), VisaNet ignores Track 1 and passes it as received to issuers. It is not used in responses. Acquirers and issuers must not submit it in non-originals or exception items.

VSDC: If field 22 contains **05** or **95**, it must contain track data from the chip image, not the magnetic stripe. If Track 1 and Track 2 are present in messages, VisaNet Integrated Payment (V.I.P.) gives preference to Track 2.

Visa Cloud-based payment token data elements are:

- Token
- Token expiration date

- Service code
- Issuer discretionary data in *hhhhccaaaaxx* format where: *hhhh* = timestamp received as part of account parameter index *cc* = counter received as part of account parameter index *aaaa* = application transaction counter *xxx* = magnetic-stripe verification value

VisaNet-generated track data elements are:

- Primary account number (PAN)
- PAN expiry date
- Service code with value assigned by VisaNet
- CVV
- PVV
- Issuer discretionary data

The issuer discretionary data does not contain issuer data if present in the magnetic-stripe or chip card.

Visa iCVV Convert: If a request is submitted to a participating issuer and chip data for Online CAM is present in the request message, V.I.P. performs Online CAM validation. If the transaction passes Online CAM validation, V.I.P. replaces the iCVV in the track data of field 35 with a V.I.P.-generated CVV. In this instance, iCVV checking is not performed. However, if the transaction fails Online CAM validation, V.I.P. declines the transaction with response code **05**.

If chip data for Online CAM validation is not present in the request message, V.I.P. performs iCVV validation. If the transaction passes iCVV validation, V.I.P. replaces the iCVV in the track data of field 35 with a V.I.P.-generated CVV. However, if the transaction fails iCVV validation, V.I.P. declines the transaction with response code **05**.

Field 35 – Field Edits

This field is required in 0200 requests.

If this field is present, the value in the length subfield must not exceed 37.

For all ATM transactions, the account number in this field must agree with the account number in field 2; otherwise, reject code **0521**.

Non-originals and Exceptions: If track data is present in non-originals or exception items, the message is rejected with reject code **0699**.

Field 35 – Reject Codes

0024 = Invalid length (track data too long)

0027 = Invalid track data

0142 = Magnetic stripe data missing when field 22 = **90** or **91**

0291 = Field missing

0521 = Track 2 account number is missing or does not agree with field 2

0699 = Presence of PIN/Track/AVS data inconsistent with message type

AVS does not apply to ATM.

Field 37 – Retrieval Reference Number

Field 37 – Attributes

fixed length

12 AN [content limited to numerics], EBCDIC; 12 bytes

normal format: *ydddnnnnnnnn*

Field 37 – Description

This field contains a number that is used with other data elements as a key to identify and track all messages related to a given cardholder transaction; that is, to a given transaction set.

These sets are:

- Cash disbursement
- Balance inquiry
- Account transfer

This is a two-part field. The first four digits are normally a *yddd* date (Julian date format). The date is defined to be the same day as the date in Field 7-Transmission Date/Time of the original request. The last eight digits are a *numeric* transaction identification number.

Field 37 – Usage

The retrieval reference number is a key data element for matching a message to others within a given transaction set. The retrieval reference number also contains key matching data for messages between full service acquirers and authorization-only issuers. The reference number must be the same in all messages for the set. For example, a new retrieval number is assigned when a financial transaction is processed. The same number appears in all related messages: cash disbursement, response, advice, reversal, misdispense and back-office adjustments, dispute financial, dispute financial reversal, or dispute response financial.

*The value in field 37 cannot be used again for 48 hours or the transaction may be rejected with reject code **0600**.*

This field is **mandatory** in all 01xx, 02xx, 03xx, 04xx, and 06xx messages. The field is not used in 05xx messages. It is not required in 08xx messages.

Echo test 0800 Messages: For Visa initiated echo messages field 37 is always included. It is optional for clients to include field 37 in the response.

For client initiated echo messages field 37 is optional. If included, V.I.P. returns field 37 back in the response.

The values in this field for messages originating from BASE II endpoints might not fully reflect the values of the original financials. See “Message Matching to Authorization-Only Clients” in Message Matching.

For originals, positions 1 through 12 should contain these types of data to facilitate key data matching for messages between full service and authorization-only issuers:

- Positions 1-4 = the *yddd* equivalent of the message. The last digit of the year, *y*, is obtained from the date of message entry. The month and day are obtained from field 7, which has the format *mmdd* and is converted to the *ddd* format.
- Positions 5-6 = the *hh* equivalent of field 7.
- Positions 7-12 = the value from field 11.

For DRB-generated advices, the values for positions 1 through 12 are as follows:

- Positions 1-4 = the *yddd* equivalent of the settlement date found in the DRB record. The settlement date is present in the form of *yymmdd* in the DRB record and converted to the *yddd* format.

In a full-financial message, the settlement date in field 15 has the format *mmdd* and not *yymmdd*.

- Positions 5-6 = **00**.
- Positions 7-12 = the value from field 11.

Auto-CDB (Visa Only): This field is present in an 0322 advice and must be returned in the 0332 response.

Visa Smart Debit/Visa Smart Credit (VSDC): This field is required in 0620 authentication failure or issuer script advices and their 0630 responses.

Visa-Generated Funds Disbursements (Plus): The value in this field is based on information from the BASE II draft data.

STIP and Switch Advices: This field is present in these advices:

- STIP-generated 0220 or 0420 advice
- Switch generated 0420 advice

Advices From BASE II Endpoints: This field is present.

Fraud Reporting:

- Client-generated-The field is required for fraud reporting and must match the value in the original transaction. For ICS and NRI/PS604, if there is no original transaction, the field must be generated.
- VisaNet-generated-The field contains the Retrieval Reference Number from the original fraud transaction. The field may be present if reported in the original fraud transaction.

Collection-Only Transactions: This field is required. Its value must be numeric and must be from the original transaction.

Field 37 – Field Edits

Field 37 must be unique per acceptance location as identified by the values in:

- Field 32 – Acquiring Institution Identification Code
- Field 41 – Card Acceptor Terminal Identification
- Field 42 – Card Acceptor Identification Code

If a message is determined to have improperly reused a retrieval reference number value, V.I.P. rejects the message.

The value must be numeric. If present in the request, it must be in the response and the values must match.

The value in field 37 cannot be used again for 48 hours or the transaction may be rejected with reject code 0600.

The first four digits must be in Julian date format, *yddd*, where the first digit = **0-9** and the next three digits = **001-366**.

Field 37 – Reject Codes

0094 = Invalid value in first four digits

0095 = Invalid value

0310 = Field missing

0514 = Response value does not match request value

Field 38 – Authorization Identification Response

Field 38 – Attributes

fixed length

6 AN, EBCDIC; 6 bytes

Field 38 – Description

Field 38 contains the authorization code provided by the issuer when a transaction is approved, partially approved, or a “no reason to decline” code provided for successful verifications.

For Mastercard and Discover the 6th position in this field indicates product information.

In STIP, an authorization code is derived from the retrieval reference number, account number, date, and time, and the algorithm can generate 99,999 unique combinations. It is, therefore, possible to receive identical authorization numbers for different transactions.

Field 38 – Usage

The issuer must provide 6 positions for field 38, even when fewer than 6 positions are meaningful. The values assigned to field 38 should be as unique as possible to verify that the issuer approved the transaction.

Acceptable characters are A-Z in uppercase, 0-9, and spaces. This field should not contain all spaces or all zeros, however recipients of this field must be able to receive all spaces or all zeros. No special characters allowed.

Visa strongly recommends that issuers populate Field 38 with an authorization code, not all zeros or all spaces.

This field is used in (1) approval responses for original financial requests, (2) subsequent reversal requests or advices, and (3) dispute financials and dispute financial reversals. (The presence of this field is optional in 0220 dispute response financials and adjustments. It is not present in 0230 responses.) This field is not used in reversal responses.

For reversals, the value should be that from the original request.

This field is not mandatory in full-financial timed-out reversals. A reversal of a financial transaction can be sent before receiving the response to the original; therefore, the reversal may not have field 38.

STIP and Switch Advices: When STIP or the Switch generates an 0220 or 0420 advice, this field is included if it was in an 0210 approval response or the 0400 request. STIP includes this field in an 0220 advice only if it approves the transaction.

Advices From BASE II Endpoints: This field is included if it was present in the BASE II record, except for funds transfer advices and fee collection advices (Visa only).

Fraud Reporting:

- Client-generated-If entered, the field must match the authorization code in the original transaction.
- VisaNet-generated-The field contains the authorization code from the original fraud transaction. The field may be present if reported in the original fraud transaction.

Account-Level Processing: U.S. issuers are not required to send the product ID in position 6 of field 38. Acquirers must use field 62.23 to identify the applicable product ID for a transaction.

Field 38 – Field Edits

Characters must be uppercase. No special characters allowed.

For Plus (network 0004) transactions, this field is optional in an 0210 approval response when field 39 is **00** (approval). Visa recommends that network 0004 issuers return field 38 in 0210 approval responses.

For Visa (network 0002) transactions, this field is required in 0210 approval responses when field 39 is **00** (approval). It is required in an 0400/0420 reversal or an 0422 dispute financial or dispute financial reversal if it was present in the 0210 response.

In the case of an 0210 balance inquiry response; however, field 38 is not required even if the transaction is approved by the issuer.

Field 38 – Reject Codes

0293 = Field missing

Field 39 – Response Code

Field 39 – Attributes

fixed length

2 AN, EBCDIC; 2 bytes

Field 39 – Description

Field 39 contains a code that defines the response to a request or the message disposition and acknowledgement that a transaction or a message was received. The codes for this field are defined in the Valid Values section.

Field 39 – Usage

This field is used in all responses except those for reconciliation and most network management functions.

Network Management Responses (0810): This field may be present in some 0810 network management responses. Response code **00** is used to acknowledge receipt of an 0800 network management message. V.I.P. includes field 39 in Visa-generated 0810 response messages. Acquirers and issuers can send this field in these responses.

V.I.P. centers must approve (**00**) most advices.

VisaNet returns response code **12** (invalid transaction) in field 39 whenever the Plus Switch rejects an adjustment, reversal, dispute financial, dispute response financial, or administrative message. Examples of error conditions that result in response code **12** are:

A reversal occurred with a Plus settlement date that is not the current Plus processing date.

The reversal request timestamp did not match the original request.

A duplicate reversal was sent (and was not detected by VisaNet).

A text message routed to an invalid Plus client processing center.

The adjustment request occurred outside the allowable timeframe.

A transaction sequence error occurred (that is, checking consistency so that a dispute response financial does not occur without a prior dispute financial, and so on).

CVV or iCVV: If Visa performs CVV or iCVV checking and detects an invalid CVV or iCVV, the authorization request forwarded to the issuer contains this field with code **82** if the issuer elects

to receive CVV or iCVV results using field 39. When the CVV or iCVV is invalid, the issuer should use the pickup code **04** or the decline code **05**.

PIN Change/Unblock: These table lists the Visa or Plus ATM response codes that support this service.

Code	Definition
12	Invalid transaction. For the PIN Change/Unblock Service, the acquirer and the issuer must also participate in the VSDC service, and the content of the transaction must carry the required VSDC data.
57	Issuer not participating in the PIN Change/Unblock Service.
58	Acquirer not participating in the PIN Change/Unblock Service.
85	This is an approval. However, the response message must contain field 55, tag 71 or 72 (issuer script). If the issuer script is not present, Visa rejects the response back to the issuer.
91	Issuer not available. STIP responds to the acquirer with response code 91 if: the issuer is unavailable, the issuer's response is late, or if the issuer fails to include field 142 in an approved response. Responses from issuers without field 142 are rejected back to the issuer.
P5	Denied PIN unblock. This code indicates that the PIN change or PIN unblock request was declined by the issuer.
P6	Denied PIN change. This code indicates that the requested new PIN is unsafe.

Dynamic Key Exchange: This field is present in 0810 responses to request for new working keys. VisaNet uses Response Code **00** (request acknowledged, will comply) when it accepts the client's request for a key change. The client must use this response code in the 0810 response to indicate that the key has been accepted and is ready for use.

VisaNet uses code **06** (request acknowledged, unable to comply) when it cannot accept a key change request. This occurs if the identifying institution is not listed at Visa as a Dynamic Key Exchange participant, or if the request was received while a key change was in progress, or if the value in Field 53-Security-Related Control Information in the request is incorrect. The client must use code **06** when it cannot accept the new key.

If VisaNet encounters PIN block errors during normal message processing, it returns a response code of **81** in the 0210 response message and initiates an automatic acquirer key change. If the issuer encounters a PIN block error during verification, it returns a response code of **81** in the 0210 response. VisaNet initiates an automatic working issuer key change.

STIP and Switch Advices: This field is present in these advices:

STIP-generated 0220 or 0420 advice

Switch-generated 0420 advice

Advices From BASE II Endpoints: This field is not present in BASE II advices. It must contain **00** in advice responses.

Fraud Reporting:

- Client-generated-The field contains the code provided by V.I.P to acknowledge the receipt of the 9620 message. The value is **00** (two **zeros**).
- Visa-generated-The field contains a code provided by the client to acknowledge receipt of 9620 messages. It must be **00**.

Suspected Fraud: When declining a transaction due to suspected fraud, all issuers (including those with fraud mitigation systems that work with their online authorization systems) must use response code **59**-suspected fraudulent transaction.

When issuers that participate in Visa Advanced Authorization use response code **59** to decline authorizations for suspicious activity or fraud-related reasons, the product (in collaboration with the issuer's risk control systems) uses this information to identify and forecast risk trends and patterns.

Unlike other response code values for fraudulent transactions that automatically update the Cardholder Database (CDB), code **59** does not cause the card to be added to the CDB.

When Real Time Decisioning (RTD) determines that an original request meets issuer-provided criteria, V.I.P. includes response code **59** (suspected fraud) or a more severe response code in 0200 forward referrals, and 0220 STIP advices, sent to the issuer.

Issuers must also support a value of **9047** (declined by RTD processing) or **9057** (STIP approved transaction due to RTD) in field 63.4.

Visa iCVV Convert: If a request is submitted to a participating issuer but the issuer's MDK encryption key (Online CAM) and CVK (CVV) are not present and no card validation takes place, V.I.P. declines the transaction with response code **05**.

VisaNet does not send Online CAM results (response code **82**, **Q1**) or offline approval (**Y1**, **Y3**) and decline (**Z1**, **Z3**) response codes to participating issuers. V.I.P. converts the response codes of **Y1** and **Y3** to **00** (approved) and **Z1** and **Z3** to **05** (do not honor) in advices to participating issuers. However, CVV results are sent in field 44.5 if the issuer chooses to receive them.

If a request is submitted to a participating issuer and chip data for Online CAM is present in the request message, V.I.P. performs Online CAM validation. If the transaction passes Online CAM validation, V.I.P. replaces the iCVV in the track data of field 35 with a V.I.P.-generated CVV value. In this instance, iCVV checking is not performed. However, if the transaction fails Online CAM validation, V.I.P. declines the transaction with response code **05**.

If chip data for Online CAM validation is not present in the request message, V.I.P. performs iCVV validation. If the transaction passes iCVV validation, V.I.P. replaces the iCVV in the track data of field 35 with a V.I.P.-generated CVV. However, if the transaction fails iCVV validation, V.I.P. declines the transaction with response code **05**.

VSDC Alternative PAN Transactions: V.I.P. declines a transaction with response code **59** (suspected fraud) if all these apply:

- The account range of the chip card indicates that it supports an alternative PAN.
- Field 22 does not contain **05**, **07**, **91**, or **95**.
- Chip data is not present in field 55 or the third bitmap fields.

Visa Token Service: Issuers who participate in Visa Token Service must send response code **59** (Suspected fraud) to identify that a token provisioning request is declined because issuer suspects the request as fraudulent.

V.I.P. requires a response code of **00** or **85** for 0620 Token Notification Advice and 0630 Token Notification Advice responses that contain message reason code **3700** (Token create).

V.I.P. requires a response code of **00**, **06**, or **85** for 0620 Token Notification Advice responses that contain message reason code **3711** (Device provisioning result).

This field must contain a value of **00** or **06** for 0620 Token Notification Advices that contain message reason code **3701** (Token deactivate), **3702** (Token suspend), and **3703** (Token resume), (OTP verification result) and **3714** (Mobile banking app activation).

This field must contain the value of **00** for 0630 Token Notification Advice responses that contain message reason code **3700** (Token create), **3701** (Token deactivate), **3702** (Token suspend), **3703** (Token resume), and **3711** (Device provisioning result).

This field must contain a value of **00** or **06** for 0620 Token Notification Advices that contain message reason code **3712** (OTP verification result) and **3714** (Mobile banking app activation).

For a description of the error in response code **06 (Error)**, see "Field 123, Usage 2, Dataset ID 67, Tag 03."

This field must contain the value of **00** for 0630 Token Notification Advice responses that contain message reason code **3712** and **3714**.

If an issuer does not respond to the 0120 acquirer confirmation advice with an 0130 response, V.I.P. sends a 0130 back to acquirer and a STIP advice to issuer through the normal advice recovery process, with the value of **9020** (response timed out) in Field 63.4 -STIP/Switch Reason Code.

- 0120/0130 and 0620/0630 chip-based informational advices and their responses

Collection-Only Transactions: In 9240 messages, this field must contain the value from the response to the original transaction.

Issuers can use response code **6P** if cardholder-supplied government identification number (for example, driver's license, tax id, etc.) does not match the issuers records.

Velocity Amount Limits for ATM Cash Deposits: If the accumulated amount of ATM cash deposit for a PAN within a 30-day period exceeds the velocity amount limit of that country, V.I.P. declines the transaction with response code **N4** in field 39. V.I.P. generates an issuer advice with STIP reason code **9061** (There is an internal system error or other switch-detected error condition) in field 63.4 for declined transactions.

Field 39 – Field Edits

Required in all responses and advice responses except 0510, 0530, and 0810 messages.

This code must be **00** in an 0410, 0430, 0432, 0610, or 0630 response. However, a client processing center may receive code **12** in certain advice responses from the Plus Switch and may receive code **79** in 0410 or 0430 responses from VisaNet.

In addition, codes **76** and **94** can be used.

Table 34: V.I.P. Processing Rules for Response Codes 76 and 94 in Field 39

Condition	V.I.P. Processing Rule
V.I.P. is unable to match the reversal request to a previously submitted original message.	V.I.P. returns the transaction with Response Code 76 -Unsolicited Reversal.
A transaction is submitted that contains values in the tracing data fields that duplicate the values in a previously submitted transaction.	V.I.P. returns the transaction with Response Code 94 -Duplicate Transmission.
A response is received by VisaNet that contains the value 76 or 94 .	V.I.P. returns the response with Reject Code 0087 -Invalid Value. Only V.I.P. can use the new response codes.

Table 35: V.I.P. Messages That Can Include Response Codes 76 and 94

Type of Client	Response Code (Field 39)	Message Type
Acquirer	76	0410-Reversal of Financial Response 0430-Reversal of Financial Advice Response
	94	0210-Financial Response 0230-Financial Advice Response0230-Fee Collection/Funds Disbursement Response0430-Reversal of Financial Advice Response
Issuer	94	0420-Reversal of Financial Advice0432-Dispute Financial Response0432-Dispute Financial Reversal Response

Responses containing **94** in this field may also include field 44.11, which contains the response code from the original transaction.

PIN Tries Exceeded: If the number of allowable invalid PIN attempts is exceeded, the interim response code **75** is assigned and converted to code **05**, although the code **75** is forwarded to the issuer in the advice. If the issuer returns response code **75** in field 39 of the 0110/0210 response, V.I.P. forwards the field 39 code unchanged to the acquirer; otherwise, V.I.P. inserts the response code **05** in field 39 before forwarding the response to the acquirer.

Field 39 codes must be one of those listed in Field 39 V.I.P. Visa ATM and Plus Response Codes, subject to the restrictions in the table footnotes.

Field 39 – Reject Codes

0087 = Invalid value

0294 = Field missing

0590 = Invalid value (not **00** or **55**)

Field 39 – Valid Values

Table 36: Key to Field 39 V.I.P. Response Codes

Usage	Usage Definition
Client	✓ means allowed for use by issuer or acquirer subject to restrictions noted.
Visa Use	✓ means used in response generated by STIP when acting for the issuer.
	✓ means used when V.I.P. detects an error in a cardholder transaction message or V.I.P. generates a response or cardholder transaction status advice.
File Update or Inquiry	✓ means used for file update or file inquiry responses.
Retry Allowed	Indicates whether merchants can retry to send a cardholder transaction with the timeframes specified in Response Code Category table.

Table 37: Response Code Category

Category	Issuer	Acquirer/Merchant
1: Issuer never approves	Limit use to transactions that are never approved. Consistently send the same decline response code after sending a category 1 decline.	After receiving a category 1 decline response code a merchant must never resubmit an authorization/ full financial request or account verification for the same payment credential
2: Issuer cannot approve at this time	Use most descriptive value to indicate the decline condition.	Retry up to 15 times over 30 days.
3: Data quality/revalidate payment information	Use most descriptive value to indicate the data element requiring correction.	Revalidate payment information before retry. Retry up to 15 times over 30 days.
4: Generic response codes	Limit use to transactions where no descriptive value applies.	Retry up to 15 times over 30 days.

Table 38: Field 39 V.I.P. Visa ATM and Plus Response Codes

Code	Definition	Response Code				
		Client	Visa Use	File Update or File Inquiry	Category	Reattempt Allowed
00¹	Approved and completed successfully Accepted and processed	✓	✓	✓	Approval	
03	Invalid merchant	✓			2	
04	Pick up card (no fraud)	✓	✓		1	N
05	Do not honor	✓	✓		4	
06²	Error	✓	✓	✓	4	
07	Pick up card, special condition (fraud account)	✓	✓		1	N
11³	Approved (VIP)		✓		Approval	
12⁴	Invalid transaction	✓	✓		1	N
14⁵	Invalid account number (no such number): - No modulus-10 check - Length not allowed for issuer - Not in positive PIN Verification File - Separator in wrong position	✓	✓	✓	1	N
15	No such issuer (first 8 digits of account number do not relate to an issuing identifier)		✓	✓	1	N
19	Re-enter transaction	✓	✓		2	
21	No action taken		✓		Not applicable	
25	Unable to locate record in file			✓	Not applicable	
28	File temporarily not available for update or inquiry			✓	Not applicable	
39	No credit account	✓			2	
41	Lost card, pick up (fraud account)	✓	✓		1	N
43	Stolen card, pick up (fraud account)	✓	✓		1	N

Table 38: Field 39 V.I.P. Visa ATM and Plus Response Codes

Code	Definition	Response Code				
		Client	Visa Use	File Update or File Inquiry	Category	Reattempt Allowed
46	Closed account	✓	✓		1	N
51	Insufficient funds	✓			2	
52	No checking account	✓			2	
53	No savings account	✓			2	
54	Expired card or expiration date missing	✓	✓		3	
55	Incorrect or missing PIN	✓	✓		3	
57	Transaction not permitted to cardholder Used by V.I.P. when function requested not allowed for card type Issuer not participating in PIN Change/Unblock Service	✓	✓		1	N
58	Transaction not permitted to terminal Acquirer not participating in PIN Change/Unblock Service		✓		4	
59	Suspected fraud	✓	✓		2	
61	Exceeds approval amount limit	✓	✓		2	
62	Restricted card (card invalid in this region or country)	✓	✓		2	
63	Security violation (source is not correct issuer)			✓	Not applicable	
65	Exceeds withdrawal frequency limit	✓	✓		2	
68	Late or invalid response		✓		Not applicable	Y
75	Allowable number of PIN-entry tries exceeded	✓	✓		2	
76	Unsolicited reversal (reversal with no original transaction in history)		✓		Not applicable	

Table 38: Field 39 V.I.P. Visa ATM and Plus Response Codes

Code	Definition	Response Code				
		Client	Visa Use	File Update or File Inquiry	Category	Reattempt Allowed
78	Blocked, first used or special condition—new cardholder not activated or card is temporarily blocked	✓			2	
79	Reversed (by VisaNet)		✓		4	
80⁶	No financial impact (used in reversal responses to declined originals)	✓	✓		4	
81	Cryptographic error in PIN (used for cryptographic error condition found by security module during PIN decryption)	✓	✓		4	
82⁷	Negative online CAM, dCVV, iCVV, CVV, CAVV, dCVV2, TAVV, or DTVV results	✓	✓		3	
85	Approved (no reason to decline)	✓	✓		Not applicable	
86	Cannot verify PIN; for instance, no PVV	✓	✓		2	
91	Either: - V.I.P. sends this when destination unavailable or transaction times out when no STIP. - Issuers can respond with this, which V.I.P. passes to acquirer without invoking STIP. Issuers use code to indicate they cannot perform authorization on issuer's behalf. Code causes decline at POS.	✓	✓		2	
92	Financial institution or intermediate network facility cannot be found for routing (receiving institution ID invalid).		✓		Not applicable	
93	Transaction cannot be completed—violation of law	✓	✓		2	

Table 38: Field 39 V.I.P. Visa ATM and Plus Response Codes

Code	Definition	Response Code				
		Client	Visa Use	File Update or File Inquiry	Category	Reattempt Allowed
94	Duplicate transmission. Transaction submitted containing values in tracing data fields that duplicate values in another transaction.		✓		Not applicable	
96	System malfunction	✓	✓	✓	2	
6P	Verification data failed	✓			3	
N0	Force STIP. Issuers can respond with this, which routes transaction to STIP. Issuers use code when they cannot perform authorization but want STIP to perform it.	✓			4	
N4	Cash request exceeds issuer or approved limit (for ATM transactions).	✓	✓		2	
P5	Denied PIN unblock-PIN change or unblock request declined by issuer	✓			Not applicable	
P6	Denied PIN change-requested PIN unsafe	✓			Not applicable	
R2	Transaction does not qualify for Visa PIN		✓		Not applicable	

¹**00** is the only response from an issuer station for a reversal or advice. PVS uses **00** to inform issuer that the PIN is correct.

²In 0312 responses containing code **06**, Field 48 — Additional Data-Private, identifies the error reason. If multiple error conditions exist refer to Field 127.PF — Portfolio File, Dataset ID 69, Tag DF17. Field 48, Usage 1b, contains the first occurrence of Field 127.PF — Portfolio File, Dataset ID 69, Tag DF17. For 0810 Dynamic Key Exchange responses, VisaNet uses code to mean it cannot accept a client's key change request.

³Not returned in response; converted to **00** instead. For security reasons, this code should not be used by the issuer. If code **11** is received by VisaNet, it is changed to 00 before the response is returned to the acquirer.

⁴Plus Switch reversals: the Plus Switch allows 24 hours after its end-of-day settlement cutoff, after which the Plus Switch issues the denial response code **12**.

⁵Check digits are verified only at issuer request.

⁶Credit issuer can use **80** in originals to indicate invalid date.

⁷Code allowed only in advices.

Field 41 – Card Acceptor Terminal Identification

Field 41 – Attributes

fixed length

8 ANS, EBCDIC; 8 bytes

Field 41 – Description

This field contains a code that identifies the automated teller machine (ATM). The code must be unique to a terminal within the acquirer's network.

An identification code of fewer than 8 positions must be left-justified and the remainder of the field space-filled.

Field 41 – Usage

If present in original requests, this field must be returned unchanged in their responses. Field 41 is a key data field used to match responses to request messages.

This field is required in all messages related to a cardholder transaction (including dispute financials, dispute financial reversals, and dispute response financials) except fee collection/funds disbursements (Visa only). If present in requests, this field must be preserved and returned in responses and must contain a non-zero value.

In 0420 reversals of 0200s, the value in this field must be from the original request. If the value in the reversal is different from that of the original, the transaction may be declined with response code **76** (Unsolicited Reversal).

This is a retain and return field. In addition to being required in reversals, the original value must be included in subsequent messages, including dispute financials and dispute response financials. When such messages do not include the original value in this field, V.I.P. treats them as stand-alone messages that do not belong to the transaction set.

VSDC: When an 0620 chip-based informational advice contains **0951** (issuer authentication failure or issuer script results advice) in Field 70 – Network Management Information Code, the advice must include these fields:

- Field 41 – Card Acceptor Terminal Identification
- Field 42 – Card Acceptor Identification Code
- Field 43 – Card Acceptor Name/Location

VSDC ATM PIN Change/Unblock Requests: This field must be present with a non-zero value per ATM submission requirements.

STIP and Switch Advices: The field is present in these advices if it was in the request:

- STIP-generated 0220, and 0420 advice
- Switch-generated 0420 advice

Advices From BASE II Endpoints: This field is present if it was in the BASE II record except in funds transfer and fee collection (Visa only) advices.

Fraud Reporting:

- Client-generated – This field is required. The field must match the value in the original transaction. If the field was not present in the original transaction, the field must be populated with **N** (not provided in original transaction).
- VisaNet-generated – The field contains the value from the original fraud transaction. The field may be present if reported in the original fraud transaction.
- ICS and NRI/PS604: This field is not required.

Collection-Only Transactions: Optional in 9240 messages.

Field 41 – Field Edits

If field 41 is missing, V.I.P. rejects the request with reject code **0289** (Field missing). If field 41 contains all **spaces** or all **zeros**, V.I.P. inserts all nines before forwarding messages to issuers. Issuers must return contents of field 41 in response messages or V.I.P. rejects response with Reject Code **0514**-Unsolicited Response (Value Changed in Response Message). V.I.P. restores field 41 in response messages sent to acquirers if V.I.P. has populated it with all **nines**.

Field 41 – Reject Codes

0170 = Invalid value

0289 = Field missing (ATM only)

0514 = Unsolicited response (value changed in response message)

Field 42 – Card Acceptor Identification Code

Field 42 – Attributes

fixed length

15 ANS, EBCDIC; 15 bytes

Field 42 – Description

This field contains the name of the institution operating the automated teller machine (ATM). If the ID code is less than 15 positions, it must be left-justified and space-filled.

Field 42 – Usage

This field is used in all messages related to a cardholder transaction except fee collections/funds disbursements (Visa only). The value must be returned unchanged in the response. Field 42 is a key data field used to match a response to its request.

In addition, the value from the original is required in subsequent messages, including reversals, dispute financials, and dispute response financials. If present in the request it must contain a non-zero value. When such messages do not include the original value in this field, they are treated as stand-alone messages that do not belong to the transaction set. If the value in an 0420 reversal of an 0200 is different from that of the original, the transaction may be declined with response code **76** (unsolicited reversal).

VSDC PIN Change/Unblock Service Requests: This field must be present with a non-zero value per ATM submission requirements.

STIP and Switch Advices: This field is present in these advices if it was in the request. It must be returned unchanged in their responses.

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

Advices From BASE II Endpoints: This field is present if it was in the BASE II record except in funds transfer and fee collection (Visa only) advices.

Fraud Reporting:

- Client-generated – This field is required. The field must match the value in the original transaction. If the field was not present in the original transaction, the field must be populated with **N** (not provided in original transaction).
- VisaNet-generated – The field contains the value from the original fraud transaction. The field may be present if reported in the original fraud transaction.
- ICS and NRI/PS604: This field is not required.

VSDC: When an 0620 chip-based informational advice contains **0951** (issuer authentication failure or issuer script results advice) in Field 70 – Network Management Information Code, the advice must include all these fields:

- Field 41 – Card Acceptor Terminal Identification
- Field 42 – Card Acceptor Identification Code
- Field 43 – Card Acceptor Name/Location

Collection-Only Transactions: This field is optional in 9240 messages.

Field 42 – Field Edits

For POS and ATM transactions issuers must retain and return the exact contents of field 42 in response messages otherwise VIP rejects the response with reject code **0514** (Unsolicited Response (value changed in response message)).

If this field is missing, contains all **spaces** or all **zeros**, V.I.P. rejects the message with reject code **0311** (Field missing).

CPS: For CPS/ATM transactions, V.I.P. edits for the presence of field 42. If field 42 is absent, V.I.P. rejects the transaction with reject code **0311**.

Field 42 – Reject Codes

0096 = Invalid value (Discover)

0311 = Field missing

0514 = Unsolicited response (value changed in response message)

Field 43 – Card Acceptor Name/Location

Field 43 – Attributes

fixed length

40 ANS, EBCDIC; 40 bytes

Field 43 – Description

The location of the automated teller machine (ATM). This field identifies the ATM location, while field 19 identifies the location of the acquirer.

Positions: 1-25	26-38	39-40
Automated Teller Machine (ATM) Location	City Name	Country Code

Positions 1-25, ATM Location: Except as noted, the ATM location expressed as an ATM branch number, street address, or equivalent (for example, “1 Camden Passage” or “4th and Main”). (Field 42 identifies the institution operating the ATM.)

For Visa and Plus transactions from U.S. military bases, embassies and consulates located outside the 50 U.S. states and District of Columbia, these positions must contain words such as Base Exchange, BX, US Embassy, US Consulate, or a similar description. If a military base, the name of the base must be included.

Positions 26-38, City Name: Except as noted, the name of the city where the ATM is located.

For a U.S. military base, embassy, or consulate, these positions must contain the name of the country where the installation is located.

Positions 39-40, Country Code: The two-character alpha code for the country where the ATM is located. See the appendix titled “Country and Currency Codes”. Country codes must be upper case.

For U.S. military bases, embassies, or consulates, the country code must be US. Field 59, positions 1-2 (merchant state), must be **99**.

See the Visa Merchant Data Standards Manual for field 43 data requirements.

Field 43 – Usage

This field is used in all messages related to a cardholder transaction except fee collections/funds disbursements (Visa only). The value from the original must be used in subsequent transactions. It is not used in responses or advice responses.

The field is required in all 0200 and 0420 originals and their 0220 and 0422 advices. For Visa ATM and Plus ATM, the card acceptor name (positions 1-25) and city name (positions 26-38) must not contain all **zeros** or **spaces**.

Field 43 and field 19 are required in 02xx and 04xx messages even if the ATM location and acquirer are in the same country.

Fraud Reporting:

- Client-generated – The values in this field must match those in the original transaction. For ICS and NRI/PS604, the field is not present.
- VisaNet-generated – The field contains the Card Acceptor Name/Location from the original fraud transaction. The field may be present if reported in the original fraud transaction.

Collection-Only Transactions: This field is required in 9240 and 9242 messages but not in their responses. The code must be from the original transaction.

Visa Smart Debit/Credit (VSDC): When an 0620 chip-based informational advice contains **0951** (issuer authentication failure or issuer script results advice) in Field 70-Network Management Information Code, the advice must include all following fields:

- Field 41-Card Acceptor Terminal Identification
- Field 42-Card Acceptor Identification Code
- Field 43-Card Acceptor Name/Location

VSDC ATM PIN Change/Unblock Service Requests: This field must be present with a non-zero value per ATM submission requirements.

STIP and Switch Advices: This field is present in these advices if it was in the request: STIP-generated 0220 or 0420 advice.

Advices From Clearing Endpoints: This field is included except in funds transfer and fee collection (Visa only) advices.

Field 43 – Field Edits

This field is required in all messages related to a cardholder transaction (02xx, 04xx). It is not used in responses. It is not used in fee collection or funds disbursement transactions.

Positions 39-40 must contain an ISO alpha country code. (See the appendix titled “Country and Currency Codes.”) These positions are edited. If the country code is missing (if the positions are

filled with **zeros**, **spaces**, or **slashes**, for example) or if the country code is invalid, V.I.P. rejects the transaction.

Positions 1-25 and 26-38 must not contain all **zeros** or all **spaces**.

In Plus original financial requests, reversals, exception items, and administrative text messages, V.I.P. rejects the transaction if positions 1-25 or 26-38 contain all **zeros** or **spaces**.

For exception transactions requesting National Net Settlement, the acquirer and issuer country must be the same as the country code specified in this field.

Field 43 – Reject Codes

0169 = Invalid value

0312 = Field missing

Field 44 - Additional Response Data

Field 44 - Attributes

variable length

1 byte, binary +

25 ANS, EBCDIC; maximum 26 bytes

Field 44 - Description

This field has two different applications: Visa and Plus. In the U.S. region, this field has been standardized for Visa and Plus, which use subfields 44.1, 44.5, 44.8, and 44.1.

Visa (and Plus in U.S. Only): Miscellaneous data needed in a response. VisaNet uses this field for special codes as follows:

44.1 Response Source/Reason Code

44.2 Not applicable

44.3 Not applicable

44.4 Extended STIP Reason Code

44.5 CVV/iCVV Results Code (responses and requests; Visa and Plus)

44.6 Not applicable

44.7 Not applicable

44.8 Card Authentication Results Code

44.9 Not applicable

44.10 Not applicable

44.11 Original Response Code

44.12 Not applicable

44.13 Not applicable

44.14 Not applicable

44.15 Not applicable

44.16 Not applicable

The length subfield specifies the number of bytes present in this field. The field format is illustrated in the figure below. Each subfield is described in the detailed discussions that follow this general field write-up.

	Positions: 1	2	3	4
	Field 44.1	Field 44.2	Field 44.3	Field 44.4
Length	Response source/ Reason code	Not applicable	Not applicable	Extended STIP Reason Code
5	6-7	8	9	10
Field 44.5	Field 44.6	Field 44.7	Field 44.8	Field 44.9
CVV/iCVV results code	Not applicable	Not applicable	Card Authentication Results Code	Not applicable
11	12-13	14	15	16-19
Field 44.10	Field 44.11	Field 44.12	Field 44.13	Field 44.14
Not applicable	Original Response Code	Not applicable	Not applicable	Not applicable
20-23	24	25		
44.15	44.16	Reserved		
Not applicable	Not applicable	Not applicable		

Length: The number of *bytes* follows the length subfield.

Field 44 content depends on message usage. Unused subfields between response source (44.1) and the first value-filled subfield must be spaces and passed with the message; all unused subfields following the last value-filled subfield, including all trailing spaces, are truncated.

Plus (Non-U.S. Only): This field is used for CVV processing in financial requests and responses. Otherwise, it is used for processing exception items only. These items contain a contact name and fax number.

In the U.S. region, contact information for adjustments is carried in field 48, usage 7a.

If a non-U.S. issuer connected to the Plus Switch does not return a contact name in this field, VisaNet inserts the issuer's Proprietary Member Center (PMC) ID, using this field format.

	Positions: 1-4	5-7
length	identifier: PMC 0	PMC ID

Length: Number of bytes following the length subfield: 7.

Positions 1-4, Data Identifier: Four-position entry routing identifier: PMC 0.

Positions 5-7, PMC: The three-digit numeric PMC ID code for the issuer.

ATM Transaction Standardization Option (Plus): This field does not apply to Plus transactions.

Field 44 - Usage

Visa (and Plus in U.S. Only): An issuer includes this field in an 0210 response only when it must supply field 44 subfields. Otherwise, it is omitted. The individual subfield descriptions explain when VisaNet adds this field to requests and responses.

This field is not required for dispute financials, dispute response financials, or adjustments.

Advices From BASE II Endpoints: Field 44 is present if the response source was in the BASE II record, except for Visa funds transfer or fee collection (Visa only) advices.

Plus (Non-U.S. Only): An issuer includes this field in an 0210 response only when it must supply field 44 subfields. Otherwise, it is omitted. The individual subfield descriptions explain when VisaNet adds this field to requests and responses.

This field is required in all 0422 dispute financials, all 0220 dispute response financials, 0220 adjustments with reason code **2004**, and adjustment reversals with message reason code **2006** or **2008**.

Field 44 - Field Edits

The value in the length subfield must not exceed **25**.

Field 44 - Reject Codes

0071 = Invalid length

0379 = Field missing

Field 44.1 – Response Source/ Reason Code

Field 44.1 – Attributes

fixed length

1 ANS, EBCDIC; 1 byte

Field 44.1 – Description

Field 44.1 is used by Visa only and contains the response source/reason code that identifies the source of the field 39 response decision. For example, an approval response code of **00** in field 39 might have been issued by Stand-In Processing (STIP), which would be shown in field 44.1 as 1. The codes and their definitions are in the table titled “Field 44.1 Response Source/Reason Codes” in the Valid Values section.

Issuers must refer to field 63.4 for additional STIP processing information.

Field 44.1 – Usage

V.I.P. inserts this subfield and its code in 0210, 0410, and 0430 responses from full service issuers.

An acquirer that only processes full financial messages should plan to accept any value in this subfield, not just those defined for full financial processing. Responses come from authorization-only and full service issuers.

STIP and Switch Advices: This subfield is present in the following advices:

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

V.I.P. Authorization Only: In 0120 file maintenance advices, a value of **0** indicates a GCAS or Auto-CDB update.

Field 44.1 – Field Edits

None.

Field 44.1 – Reject Codes

None.

Field 44.1 – Valid Values

Table 39: Field 44.1 Response Source/Reason Codes

Code	Definition
0	Advice of ASAF change initiated by the Auto-CDB. For Authorization-Only issuers, a value of 0 in an 0120 file maintenance advice indicates a GCAS or Auto-CDB update.
1	Response provided by STIP: request timed out by VisaNet (Assured Transaction Response) or the response contained invalid data.
2	Response provided by STIP, or in a response to a verification request.
4	Response provided by STIP because issuer not available for processing.
5	Response provided by issuer.
7¹	Reversal message matched to the original authorization request message.
8	Reversal advice provided by VisaNet to identify a probable duplicate authorization (including returned reference number).
C	Response provided by STIP for conditions not listed. <i>See field 63.4 for additional information regarding the reason for STIP.</i>
H	Exceeds acquirer settlement exposure cap.
V	Authorization obtained via VisaNet (issuer or STIP response.)
^2	Data not present.

¹Value **7** only appears on issuer advices, never in responses to acquirers.

²^ = Space

The reason code **1**, **2**, **4**, **5**, and **C** are not returned to acquirers. Acquirers receive **V** instead of these reason codes.

Field 44.4 – Extended STIP Reason Code

Field 44.4 – Attributes

fixed length

1 AN, EBCDIC; 1 byte

Field 44.4 – Description

Field 44.4 identifies stand-in processing (STIP) reason codes in issuer STIP-generated advice messages.

This field contains Extended STIP Reason codes. V.I.P. includes field 44.4 in STIP advice when field 39 - Response Code contains **05** (Do not honor). This field is also populated in STIP advice for transactions approved or declined by Visa Smarter STIP.

Field 44.4 – Usage

This subfield is only present in STIP advices when field 39 contains a response code of **05**.

Stand-In Processing (STIP) Advices: Field 44.4 is used in issuer STIP-generated 0120 and 0220 advice messages. This field is not required in 0130 or 0230 advice responses.

Field 44.4 – Field Edits

None.

Field 44.4 – Reject Codes

None.

Field 44.4 – Valid Values

Table 40: Field 44.4 Extended STIP Reason Codes

Value	Description
2	Missing expiration date
3	VSDC default response code decline
4	CVV2 default response code decline
5	Declined key-entered transaction in STIP
6	Risky country response code
7	Interlink pre-auth completion history
8	OCT rule decline
9	Domestic PIN at POS set to decline in STIP
A	AA score greater than value specified by issuer
B	AA score greater than STIP MCC threshold
C	Processed by Smarter STIP
F	Amount exceeds cardholder available balance

Field 44.5 – CVV/iCVV Results Code

Field 44.5 – Attributes

fixed length1 ANS, EBCDIC; 1 byte

Field 44.5 – Description

Field 44.5 contains a Visa-defined code indicating Card Verification Value (CVV) or iCVV (Integrated Chip Card CVV) verification results. The system assumes that the CVV is from the chip and not the magnetic stripe if field 22 is **05** or **95**.

Field 44.5 – Usage

CVV is not checked in account verification messages during Stand in processing (STIP).

Requests: This field is used in 0200 financial requests, balance inquiries, and in 0220 advices.

If Visa validates the CVV or iCVV on the issuer's behalf, V.I.P. forwards the positive or negative results to the issuer in this field if the issuer elects to receive them here rather than in field 39.

Issuers must have successfully completed testing to receive verification results in this field.

Responses: Field 44.5 is used in 0210 full-financial responses by the issuer to communicate its verification results to the acquirer. If the issuer does not perform the validation and Visa does, V.I.P. inserts the result in this field and forwards it in the response to the acquirer.

Acquirers must have successfully completed testing to receive verification results in this field.

If Visa performs authentication on the issuer's behalf under issuer-unavailable conditions, V.I.P. inserts the results of the verification in the response to the acquirer.

STIP and Switch Advices: Field 44.5 is present in 0220 advices if CVV or iCVV authentication was performed.

PIN Change/Unblock: This field can be present in 0200 requests and may be present in reversals.

Field 44.5 – Field Edits

None.

Field 44.5 – Reject Codes

None.

Field 44.5 – Valid Values

Table 41: Field 44.5 CVV Verification Results Codes

Code	Definition
(Blank) or not present	CVV or iCVV was not verified.
0	CVV or iCVV could not be verified
1	CVV or iCVV failed verification.
2	CVV or iCVV passed verification.
3	n/a

Field 44.8 – Card Authentication Results Code

Field 44.8 – Attributes

Fixed length

1 ANS, EBCDIC; 1 byte

Field 44.8 – Description

Field 44.8 is a Visa Smart Debit/Credit (VSDC) field that contains a Visa-defined code to indicate Online Card Authentication Method (CAM) results.

Online CAM results are also known as EMV Online Cryptogram check results or Chip Authenticate results.

Field 44.8 – Usage

Visa Smart Debit/Credit (VSDC): V.I.P. uses this subfield in these messages to the issuer to communicate Online CAM results when V.I.P. has performed Online CAM validation on the issuer's behalf:

- Visa or Plus 0200 cash disbursements
- Visa or Plus 0200 balance inquiries
- Visa or Plus 0200 account transfers
- 0420 STIP advices

This subfield is used in Visa or Plus ATM 0210 when the issuer or V.I.P. has performed Online CAM. This subfield is passed to acquirers that have elected to receive Online CAM results.

Full chip issuers must include validation results of the EMV online cryptogram in field 44.8 of the response message. If full chip issuer requests V.I.P. validate EMV online cryptogram, the issuer must receive the result in field 44.8 of the request message.

Early chip issuers do not receive F44.8 unless it is a token-based message. An early chip issuer may optionally return this field in the token response message.

Does not apply to results for MSD CVN 17 Card Authentication results. The pass or fail status for Early-Chip Data and Full-Chip Data issuers is in field 44.5. Field 44.8 is not used.

Visa iCC Card Verification Value (iCVV) Converts: V.I.P. removes this field before forwarding chip-based requests to participating issuers.

Visa Token Convert Service: V.I.P. removes this field before forwarding requests to participating issuers. This applies to both full and early chip issuers.

VSDC ATM PIN Change/Unblock: This field can be present in 0200 requests and can be present in reversals.

Field 44.8 – Field Edits

None.

Field 44.8 – Reject Codes

None.

Field 44.8 – Valid Values

Table 42: Field 44.8 Card Authentication Results Code

Code	Definition
Blank or not present	Online CAM was not performed, or some other situation or problem prevented verification. For example, issuer is not participating in Online CAM, or a system or cryptographic error occurred.
1	The Authorization Request Cryptogram (ARQC) was checked but failed verification.
2	The ARQC was checked and passed verification.

Field 44.11 – Original Response Code

Field 44.11 – Attributes

fixed length

2 ANS, EBCDIC; 2 bytes

Field 44.11 – Description

When VisaNet Integrated Payment (V.I.P.) encounters a duplicate transaction, this field contains the field 39 response code from the original transaction.

Field 44.11 – Usage

Acquirers and issuers that choose to receive the Original Response Code must be prepared to receive field 44.11 in responses returned with a field 39 response code of **94** (duplicate transaction). V.I.P. inserts this field in responses.

Acquirers can receive field 44.11 in these responses:

- 0210 financial response
- 0230 financial advice response
- 0230 fee collection/funds disbursement response (Visa Automated Teller Machine (ATM) only, not Plus, except in the U.S. region, where field 44.11 is supported in these responses for ATM and Plus)
- 0410 reversal of financial response
- 0430 reversal of financial advice response

Issuers can receive field 44.11 in these responses:

- 0432 dispute financial response or dispute financial reversal response
- 0432 fee collection/funds disbursement response (Visa ATM only, not Plus, except in the U.S. region, where field 44.11 is supported in these responses for ATM and Plus)
- 0420 reversal of financial advice

Field 44.11 – Field Edits

None.

Field 44.11 – Reject Codes

None.

Field 44.11 – Valid Values

See “Field 39.”

Field 46 – Amounts, Fees

Field 46 – Attributes

variable length

1 byte, binary +

216 bytes ANS, EBCDIC; maximum 217 bytes

Subfield format = 36 ANS, EBCDIC

Field 46 – Description

This field can carry an optional International Service Assessment (ISA) data for issuers in the LAC region .

The optional issuer ISA amount in this field is not included in the destination amount. Optional issuer ISA amounts are calculated in conjunction with ISA processing, but, unlike the ISA amounts in the “Field 63.21” description, they are not included in settlement amounts or subject to acquirer allocation.

The field layout displays how this field can be used for multiple fees. Positions 1-2 of each fee amount (Fee Amount 1, for example) specify the fee type to which the remaining positions apply.

length	Fee Amount 1		Fee Amount 2			
	Positions 1-2	3-5	6	7	8-15	16-23
	fee type	currency code-amount, fee	minor unit-amount, fee	sign- amount, fee	value-amount, fee	unused
Byte 1	Bytes 2-3	Bytes 4-6	Byte 7	Byte 8	Bytes 9-16	Bytes 17-24
	24-26	27	28	29-36	37- <i>nn</i>	
	unused	unused	unused	unused	not present	
	Bytes 25-27	Byte 28	Byte 29	Bytes 30-37		

Length: This value contains the total length of the field, including all subfields.

Positions 1-2, Fee Type: This value is a 2-digit code identifying the fee type.

Positions 3-5, Currency Code-Amount, Fee: This value is a 3-digit code that defines the currency used in positions 8-15.

Position 6, Minor Unit-Amount, Fee: This 1-digit value indicates the implied decimal to the amount field in positions 8-15.

Position 7, Sign-Amount, Fee: This value is a one-digit code that defines whether the fee amount is credit or debit, where: **C** = credit; **D** = debit.

Positions 8-15, Value-Amount, Fee: This value is an 8-character amount that is right-justified and contains leading zeros. The amount also includes an implied decimal as specified in position 6.

Positions 16-23: These positions contain **zeros**.

Positions 24-26: These positions contain **zeros**.

Position 27: This position contains a **zero**.

Position 28: This position contains a **zeros**.

Positions 29-36: These positions contain **zeros**.

Field 46 – Usage

Table 43: Fee Type

Value	Fee Type	Description
70	Optional issuer ISA	

Table 44: Fee Type 70

Position Name	Position	Length	Format	Description
Fee Type	1-2	2	ANS	70
Currency code - Optional issuer ISA	3-5	3	ANS	Three-digit code that defines the currency used in positions 8-15.
Minor unit - Optional issuer ISA	6	1	ANS	One-digit code that indicates the implied decimal to the amount field in positions 8-15.
Sign - Optional issuer ISA	7	1	ANS	C (Credit) D (Debit)
Value - Optional issuer ISA	8-15	8	ANS	Eight-character amount that is right-justified and contains leading zeros. The amount also includes an implied decimal as specified in position 6. These positions contain the optional issuer ISA amount applied to the transaction.
Reserved	16-36	21	ANS	Reserved for future use. Contains zeros.

Issuer ISA Amount: One use of this field is the calculation of an optional issuer ISA amount on regional and interregional single-currency transactions (fee type 70). Visa performs this calculation when all these conditions are met:

- The issuer region is LAC.
- The issuer country is different from the merchant country.
- The transaction currency is the same as the cardholder billing currency.

At the issuer's option, Visa inserts this field in these full financial message types:

- 0200/0220 full-financial requests and advices
- 0420 financial request reversals

The optional issuer ISA amount is reversed on reversal transactions and is not calculated on exception items.

This field applies to clearing messages only. If field 46 is submitted in an authorization request message, V.I.P. drops the field from the authorization response message.

Issuers that choose to participate must register their selected optional issuer ISA rates that apply to regional and interregional transactions with Visa.

Field 46 – Field Edits

None.

Field 46 – Reject Codes

None.

Field 48 – Additional Data - Private

Field 48 – Attributes

variable length

1 byte, binary +

255 bytes, variable by usage; maximum 256 bytes

Field 48 – Description

This is a VisaNet private-use field for miscellaneous information. Visa has defined multiple uses and field formats for different types of transactions and messages. Here is a list of usages, which are detailed on subsequent pages.

Usage 1b: Error Codes in 0312 Responses

Usage 1c: Cardholder Maintenance File Reject Codes

Usage 2: Unformatted Text in Authorization/Reversal Messages

Usage 3: Not applicable

Usage 4: Not applicable

Usage 5: Fee Collection/Funds Disbursement

Usage 6b: VSS Funds Transfer Totals (0620)

Usage 7a: Non-Visa Dispute Financials and Dispute Response Financials

Usage 7b: Not applicable

Usage 8a: Not applicable

Usage 8b: Not applicable

Usage 9a: Text Messages

Usage 9b: Not applicable

Usage 10: Not applicable

Usage 11: Not applicable

Usage 12: Not applicable

Usage 13: Reserved for future use by Visa

Usage 14: Dynamic Key Exchange Working Key Check

Usage 15: Not applicable

Usage 16 through Usage 18: Reserved for future use by Visa

Usage 19: Not applicable

Usage 20: Not applicable

Usage 21: Not applicable

Usage 22a: Not applicable

Usage 22b: Not applicable

Usage 22c: Not applicable

Usage 22d: Not applicable

Usage 22e: Not applicable

Usage 23: Not applicable

Usage 24: Not applicable

Usage 25: Not applicable

Usage 26: Not applicable

Usage 27: Not applicable

Usage 28: Not applicable

Usage 29: Not applicable

Usage 30: Not applicable

Usage 31: FRS-Supplied Error and Warning Data

Usage 39a: Dispute Financial

Usage 39b: Dispute Financial

Regardless of the usage, the length subfield specifies the number of bytes that follow the length subfield.

Field 48 – Usage

See usage descriptions.

Field 48 – Field Edits

Acquirers must not submit any transaction with @ symbol in position 1 of any usage in field 48; otherwise, V.I.P. drops the field before sending the transaction to issuer.

Field 48 – Reject Codes

See usage descriptions.

Field 48, Usage 1b – Error Codes in 0312 Responses

Field 48, Usage 1b – Attributes

variable length

1 byte, binary +

4 N, 4-bit BCD (unsigned packed); maximum 3 bytes

Field 48, Usage 1b – Description

When the response code in an 0312 response is **06**, this field describes the first error found by VisaNet in an ASAF Maintenance Request or PIN Verification File update message. The field has one subfield following the length subfield and is defined as follows.

Positions: 1– 4	
length	error code

Length Subfield: Number of bytes following the length subfield.

Positions 1–4, Error Code: A 4-digit code for the error found in the 0302 request message. See Appendix B, File Maintenance Error Codes, for possible error codes.

Field 48, Usage 1b – Usage

This field usage applies only to 0312 responses generated by VisaNet.

Field 48, Usage 1b – Field Edits

None.

Field 48, Usage 1b – Reject Codes

None.

Field 48, Usage 1c – Reserved

Field 48, Usage 1c – Attributes

variable length

1 byte, binary +

2 AN, EBCDIC; maximum 3 bytes

Field 48, Usage 2 – Unformatted Text in Authorization/Reversal Messages

Field 48, Usage 2 – Attributes

variable length

1 byte, binary +

255 ANS, EBCDIC; maximum 256 bytes

Field 48, Usage 2 – Description

Endpoints can use this field to send and receive comments. The field has two subfields following the length subfield as shown in the following layout.

Positions: 1		2-255
length	identifier:*	unformatted text
Byte 1	Byte 2	Byte 3-256

Length Subfield: This value is the number of bytes following the length subfield.

Position 1, Field Identifier: This is a 1-position code, *(asterisk). This code indicates that this field contains unformatted, user-determined text for the destination acquirer or issuer.

Positions 2-255, Text: In authorization or reversal requests, the input consists of acquirer comments for the issuer. In authorization or reversal request responses, the input consists of issuer comments for the acquirer, such as a referral telephone number.

Stand-In Processing (STIP) ignores text comments when making authorization decisions on behalf of the issuer.

Field 48, Usage 2 – Usage

Endpoints can optionally send this usage in Point of Sale (POS) and Automated Teller Machine (ATM) messages. VisaNet Integrated Payment (V.I.P.) passes the text value in this field from the sender to the receiver.

Visa recommends not using the percent sign (%) anywhere in the text-there are conditions when the VisaNet Interchange Center (VIC) truncates text following this character.

For responses, the issuer can optionally include new text in this field. If the issuer does not include the field, V.I.P. inserts the value from the request in the response to the acquirer.

Field 48, Usage 2 – Field Edits

If this field is present, the length subfield value must not exceed **255**. When this field is generated by an acquirer or an issuer, position 1 must be an asterisk (*).

Field 48, Usage 2 – Reject Codes

0061 = Invalid value in position 1

0063 = Invalid length

Field 48, Usage 5 – Visa Fee Collections/Funds-Disbursements

Field 48, Usage 5 – Attributes

variable length

1 byte, binary +

255 ANS, EBCDIC; maximum 256 bytes

Field 48, Usage 5 – Description

This field usage applies to Visa and Plus.

In an 0220 or 0422 advice of fee collection or funds disbursement, this field explains the reason for the message. In this case, the field has one subfield following the length subfield, as follows. Note that there is no field identifier.

Positions: 1-255	
length	explanatory text (positions 1-255)

Length Subfield: Number of bytes following the length subfield.

Positions 1-x, Text: This is unformatted text that explains the purpose of the message and expands on the reason code.

Field 48, Usage 5 – Usage

This field usage applies only to acquirer and issuer fee collection and funds disbursement advices.

In addition, participating issuers and acquirers must support field 63.3 message reason codes of **6000**, **6010**, **6020**, and **6030** used in these transactions. See "Field 63.3."

Visa-Generated Funds Disbursements (Plus): The value in this field is ATM NON QUAL ISSUER CREDIT.

Advices From BASE II Endpoints: This field is present.

Field 48, Usage 5 – Field Edits

Required in 0220 and 0422 messages when positions 1 and 2 of field 3 = **19** or **29**. The value in the length subfield must not exceed **255**.

Field 48, Usage 5 – Reject Codes

0061 = Field missing

0063 = Invalid length

Field 48, Usage 6b – VSS Funds Transfer Totals (0620)

Field 48, Usage 6b – Attributes

variable length

1 byte, binary +

143 AN, EBCDIC; maximum 144 bytes

Field 48, Usage 6b – Description

In an 0620 Funds Transfer Totals message, this field contains the settlement totals for the day. A series of subfields after the length subfield are defined for acquirer, issuer, and other totals, plus the net funds transfer total, VSS funds transfer SRE, and settlement service identifier. Note that there is no field identifier. Format of VSS Funds Transfer Totals defines the codes for this field.

	Positions:					
	1-39	40-78	79-117	118-130	131-140	141-143
length	acquirer totals	issuer totals	other totals	net funds transfer amount	funds transfer SRE	settlement service identifier

Length Subfield: Number of bytes following the length subfield.

Positions 1-143: Funds Transfer Totals: The totals included in this reporting are formatted as shown in Format of VSS Funds Transfer Totals. Each amount subfield has a sign (**C** for credit or **D** for debit) followed by a right-justified and zero-filled amount of 8 or 12 digits. All amounts are expressed in settlement currency. Decimal places are assumed based on the currency.

Field 48, Usage 6b – Usage

The usage described here applies to funds transfer totals messages for VSS.

Field 48, Usage 6b – Field Edits

None.

Field 48, Usage 6b – Reject Codes

None.

Field 48, Usage 6b – Valid Values

Table 45: Format of VSS Funds Transfer Totals

Positions	Length (S = sign)	Content
Acquirer Totals		
1-8	8 digits	Acquirer Gross Interchange Value Count
9-21	S + 12 digits	Acquirer Gross Interchange Value
22-30	S + 8 digits	Acquirer Reimbursement Fees Amount
31-39	S + 8 digits	Acquirer Visa Charges Amount
Issuer Totals		
40-47	8 digits	Issuer Gross Interchange Value Count
48-60	S + 12 digits	Issuer Gross Interchange Value
61-69	S + 8 digits	Issuer Reimbursement Fees Amount
70-78	S + 8 digits	Issuer Visa Charges Amount
Other Totals		
79-86	8 digits	Other Gross Interchange Value
87-99	S + 12 digits	Other Gross Interchange Value
100-108	S + 8 digits	Other Reimbursement Fees Amount
109-117	S + 8 digits	Other Visa Charges Amount
Net Funds Transfer		
118-130	S + 12 digits	Net Funds Transfer Amount
131-140	10 digits	Funds Transfer SRE
141-143	3 digits	Settlement Service Identifier

Field 48, Usage 7a – Adjustments, Non-Visa Dispute Financials and Dispute Response Financials

Field 48, Usage 7a – Attributes

variable length

1 byte, binary +

255 ANS, EBCDIC; 4 bytes total

maximum: 256 bytes

Field 48, Usage 7a – Description

This field contains descriptors for the processing of adjustments, Non-Visa dispute financials, and dispute response financials. Five subfields follow the length subfield:

For Visa and PLUS transactions please refer to field 48, Usage 39a and 39b for dispute status advices.

Positions: 1 2		3	4-9		10-x
length	identifier: V	usage code	documentation indicator	chargeback reference #	message text

Length Subfield: Number of bytes following the length subfield.

Position 1, Field Identifier: This is a 1-character code, **V**. Subfield is required.

Position 2, Usage Code: A 1-digit code that identifies the type of exception item. This subfield is required. Values:

0 = adjustment

1 = dispute financials

2 = dispute response financials

The usage code and documentation indicator in a dispute financial reversal are those from the dispute financial being reversed.

Only one dispute financial and one dispute response financial are allowed.

Position 3, Documentation Indicator: A 1-position code identifying the status of supporting documentation. This subfield is required.

Table 46: Field 48, Usage 7a Documentation Indicator

Code	Definition
Space	No supporting documentation required
0	No supporting documentation provided
1	Supporting documentation to follow
2	Invalid acquirer reference number, and no supporting documentation was required or received
3	Invalid acquirer reference number, and supporting documentation was received
4	No supporting documentation received

Positions 4-9, Chargeback Reference Number: This is a 6-digit control number assigned by issuers to dispute financials in compliance with the Visa Rules. Acquirers that submit Visa dispute response financials must include the number in the dispute response financial message. For adjustments, this subfield is not applicable and must be zero-filled.

Positions 10-59, Message Text: This is a text subfield with two usages based on the usage code defined in position 2.

For usage codes 1 and 2: This subfield is required in all VisaNet and Plus (NID **0002** and NID **0004**) dispute financials, dispute financial reversals, and dispute response financials.

For usage code 0: This subfield is required in VisaNet and Plus (NID **0002** and NID **0004**) back-office adjustments.

- Positions 10-34: This alphanumeric subfield contains the name of the person who submits the exception item transaction at the originating institution, along with the phone number used to contact that person.
- Positions 35-59: This alphanumeric subfield includes additional information about the transaction.

Positions: 10-24	25-34	35-59
contact name	contact phone number	message text

Field 48, Usage 7a – Usage

This field 48 usage applies to non-Visa dispute financials, dispute financial reversals, and dispute response financials. It also applies to adjustments from U.S. acquirers.

Field 48, Usage 10-Time Stamp (Plus Only) is no longer used for these messages.

The exact value of the message text subfield is specified in the Visa Rules.

Field 48, Usage 7a – Field Edits

If field 63.1 is **0002** (VisaNet), this field is required in 0422 dispute financials and dispute financial reversals and in 0220 dispute response financials.

The value in the length subfield must be between **10** and **59**.

Position 1: Field Identifier: This value must be **V**.

Position 2, Usage Code: This code must be **0 1** or **2**. Code **3** causes a reject.

Position 3, Documentation Indicator: This subfield must contain **space, 0, 1, 2, 3, or 4**.

For an adjustment transaction, the documentation indicator must be a space. Otherwise, the transaction is rejected.

Positions 4-9, Chargeback Reference Number: This subfield must be numeric.

Positions 10-34, Contact Name and Phone Number: If a transaction has a value of **0** (adjustment) in position 2 but no contact name and contact phone number in positions 10-34, the transaction is rejected with code **0061**.

Positions 10-59, Message text: This subfield is required in all dispute financial, dispute financial reversals, and Visa dispute response financials.

Field 48, Usage 7a – Reject Codes

0061 = Invalid value or field missing

0143 = ATM dispute usage code not 1

Field 48, Usage 9a – Text Messages

Field 48, Usage 9a – Attributes

variable length

1 byte, binary +

255 ANS, EBCDIC; maximum 256 bytes

Field 48, Usage 9a – Description

Endpoints can use this field to send and receive unformatted general information in certain types of messages. Two subfields are defined after the length subfield as shown in the following layout.

Positions: 1		2-255
length	identifier: #	unformatted text
Byte 1	Byte 2	Byte 3-256

Length Subfield: This value is the number of bytes following the length subfield.

Position 1, Field Identifier: This 1-position code, number sign (#), identifies the type of information in this field. It also signifies that the content is passed to the destination center.

Positions 2-x, Text: This subfield contains the information the sender conveys to the recipient, which can be a client or VisaNet.

Field 48, Usage 9a – Usage

Endpoints can optionally send this usage in ATM messages. V.I.P. passes the text value in this field from the sender to the receiver.

For responses, the issuer can optionally include new text in this field. If the issuer does not include the field, V.I.P. inserts the value from the request in the response to the acquirer.

STIP and Switch Advices: This field is present in a switch-generated 0620 advice if it was in the request.

Advices From BASE II Endpoints: This field is present in text message advices.

Field 48, Usage 9a – Field Edits

Required in an 0600 or 0620 message if field 70 is **883**. The value in the length subfield must not exceed **255**. The field identifier must be the **#** character.

Field 48, Usage 9a – Reject Codes

0061 = Invalid value or field missing

0063 = Invalid length

Field 48, Usage 14 – Dynamic Key Exchange Working Key Check Value

Field 48, Usage 14 – Attributes

fixed length

1 byte, binary + "&"

4 ANS, EBCDIC; maximum 5 bytes

Field 48, Usage 14 – Description

VisaNet generates this field when Dynamic Key Exchange Service participants request new acquirer/issuer working keys, or when VisaNet is instructed to automatically send new ones. It contains a four-digit check value used by clients to verify the receipt of a new working key. The format is:

Positions: 1		2-4
length	field identifier: &	working key check digits
Byte 1	Byte 2	Byte 3-5

Length: The number of bytes following the length subfield: 4.

Position 1, Field Identifier: This is a one-position code: **&**. It identifies the type of information in this field. The ampersand (**&**) means that this field contains the working key digits to be checked.

Positions 2-4, Working Key Digits: The first four hexadecimal digits of the output resulting from encrypting zeros with the newly issued key in Field 105-Double-Length DES Key(Triple DES).

Field 48, Usage 14 – Usage

This field is present in 0800 messages if Field 70-Network Management Information Code reflects a request for a new acquirer or issuer working key; Field 70 is **162** (deliver a new acquirer working key) or **163** (deliver a new issuer working key). If present in the request, it is not used in the 0810 response. Field 53-Security-Related Control Information indicates which key is being changed.

Clients should ensure that the check digits from their security module match those in the 0800 message. For mismatches, clients should return **06** (error) response code in field 39 of the 0810 response.

Field 48, Usage 14 – Field Edits

None.

Field 48, Usage 14 – Reject Codes

None.

Field 48, Usage 31 – FRS-Supplied Error and Warning Data

Field 48, Usage 31 – Attributes

variable length

1 byte, binary +

255 ANS, EBCDIC; maximum 256 bytes

Field 48, Usage 31 – Description

This field is used in the Fraud Reporting System in Visa-generated FRS messages.

Positions: 1		2-3	4-7	8-10	11-13
Length	Application Identifier	Fraud Response Code	Duplicate Sequence Number	Error 1	Error 2
14-16	17-19	20-22	23-25	26-28	29-31
Error 3	Error 4	Error 5	Error 6	Error 7	Error 8
32-34	35-37	38-255			
Error 9	Error 10	Not used			

Length Subfield: This value indicates the number of bytes following the length subfield.

Position 1, Application Identifier: The field indicates usage of the field. Contains **F** (Fraud data).

Positions 2-3, Fraud Response Code: The field identifies the type of response contained in the transaction. Values are:

- **TR** = Transaction rejected
- **TW** = Transaction warning
- **TC** = Transaction confirmed
- **MC** = Transaction confirmed (merchant perspective)

Positions 4-7, Duplicate Sequence Number: If the warning reason indicates that the transaction would result in a partial duplicate (all fields equal except the sequence number and one other), the field contains the sequence number of the matching transaction previously added to the fraud master file.

Positions 8-10, Error 1: The field contains an error code, if applicable. Otherwise, the field contains spaces.

Positions 11-13, Error 2: The field contains an error code, if applicable. Otherwise, the field contains spaces.

Positions 14-16, Error 3: The field contains an error code, if applicable. Otherwise, the field contains spaces.

Positions 17-19, Error 4: The field contains an error code, if applicable. Otherwise, the field contains spaces.

Positions 20-22, Error 5: The field contains an error code, if applicable. Otherwise, the field contains spaces.

Positions 23-25, Error 6: The field contains an error code, if applicable. Otherwise, the field contains spaces.

Positions 26-28, Error 7: The field contains an error code, if applicable. Otherwise, the field contains spaces.

Positions 29-31, Error 8: The field contains an error code, if applicable. Otherwise, the field contains spaces.

Positions 32-34, Error 9: The field contains an error code, if applicable. Otherwise, the field contains spaces.

Positions 35-37, Error 10: The field contains an error code, if applicable. Otherwise, the field contains spaces.

Positions 38-255: Not used.

Field 48, Usage 31 – Usage

This field contains reject status codes and warning status codes from the Fraud Reporting System. See the *Fraud Reporting System (FRS) User's Guide* for reject and warning status codes.

This field is used only in Visa-generated FRS messages.

Field 48, Usage 31 – Field Edits

None.

Field 48, Usage 31 – Reject Codes

None.

Field 48, Usage 39a – Dispute Detail

Field 48, Usage 39a – Attributes

variable length

1 byte, binary +

59 ANS, EBCDIC; maximum 60 bytes

Field 48, Usage 39a – Description

Contains Visa Resolve Online (VROL) information.

	Positions: 1	2	3	4-6	7-17
length	identifier V	usage code	space	dispute condition	VROL financial ID
	18-27	28-37	38-57	58-59	
	VROL case number	VROL bundle case number	endpoint case number	dispute status	

Length Subfield: Indicates number of bytes following length subfield. Entry must be **59**.

Position 1, Field Identifier: Required, 1-character code **V**.

Position 2, Usage Code: Contains **9** (dispute financial).

Position 3, space: Contains **space**.

Positions 4-6, Dispute Condition: Contains dispute condition assigned by VROL.

Positions 7-17, VROL Financial ID: Contains Visa Resolve Online (VROL) financial ID assigned during VROL.

Positions 18-27, VROL Case Number: Contains VROL case number assigned during VROL.

Positions 28-37, VROL Bundle Case Number: Contains VROL bundle case number assigned as part of dispute bundle.

Positions 38-57, Endpoint Case Number: Contains endpoint case number assigned during VROL dispute.

Positions 58-59, Dispute Status: Contains dispute status assigned by VROL.

Field 48, Usage 39a – Usage

Contains VROL dispute detail case information in VROL dispute financial and advice messages for disputes initiated using VROL. Values from dispute case details in VROL must be included in dispute financial messages, dispute response financial messages, and their reversal messages.

Field 48, Usage 39a – Field Edits

None.

Field 48, Usage 39a – Reject Codes

0728 = Dispute financial cannot be submitted for a non-VCR jurisdiction

0729 = Legacy exception message cannot be submitted by a VCR-eligible country

0785 = VROL case number request is zeros, missing, or not numeric

Field 48, Usage 39a – Valid Values

Message	Dispute Status	Definition
Dispute Financial	F1	Dispute Financial
Dispute Financial Reversal	R1	Dispute Financial Reversal-Recall
	R2	Dispute Financial Reversal-Pre-Arbitration Acceptance
	R3	Dispute Financial Reversal-Arbitration Decision
Dispute Response Financial	P1	Dispute Response Financial
Dispute Response Financial Reversal	L1	Dispute Response Financial Reversal-Recall
	L2	Dispute Response Financial Reversal-Pre-Arbitration Acceptance
	L3	Dispute Response Financial Reversal-Arbitration Decision

Field 48, Usage 39b – Dispute Detail

Field 48, Usage 39b – Attributes

variable length

1 byte, binary +

74 ANS, EBCDIC; maximum 75 bytes

Field 48, Usage 39b – Description

Contains Visa Resolve Online (VROL) information.

	Positions: 1	2	3	4-6	7-17
length	identifier V	usage code	space	dispute condition	VROL financial ID
	18-27	28-37	38-57	58-59	60-74
	VROL case number	VROL bundle case number	endpoint case number	dispute status	return reason code

Length Subfield: Indicates the number of bytes following the length subfield. Required entry must be **74**.

Position 1, Field Identifier: V-Required.

Position 2, Usage Code: 9 (dispute financial).

Position 3, space: Space.

Position 4-6, Dispute Condition: Dispute condition assigned by VROL.

Positions 7-17, VROL Financial ID: VROL financial ID assigned by VROL.

Positions 18-27, VROL Case Number: VROL case number assigned by VROL.

Positions 28-37, VROL Bundle Case Number: VROL bundle case number assigned as part of dispute bundle.

Positions 38-57, Endpoint Case Number: Endpoint case number assigned during VROL dispute process.

Positions 58-59, Dispute Status: Dispute status assigned by VROL.

Positions 60-74, Return Reason Code: May contain 1-5 variable length, left-justified, 3-digit return reason codes.

Field 48, Usage 39b – Usage

For VROL case information in returned status advices for endpoint-initiated Visa Resolve Online (VROL) dispute financial transactions failing VROL validation. Fields containing VROL case information are same as Field 48, Usage 39a-Dispute Detail with additional field for return reason codes.

Used in 0282 dispute response financial status advice and 0480 dispute financial status advice for returned financial messages.

Field 48, Usage 39b – Field Edits

None.

Field 48, Usage 39b – Reject Codes

None.

Field 48, Usage 39b – Valid Values

Message	Dispute Status	Definition
Dispute Financial	F1	Dispute Financial
Dispute Financial Reversal	R1	Dispute Financial Reversal-Recall
	R2	Dispute Financial Reversal-Pre-Arbitration Acceptance
	R3	Dispute Financial Reversal-Arbitration Decision
Dispute Response Financial	P1	Dispute Response Financial
Dispute Response Financial Reversal	L1	Dispute Response Financial Reversal-Recall
	L2	Dispute Response Financial Reversal-Pre-arbitration Acceptance
	L3	Dispute Response Financial Reversal-Arbitration Decision

Table 47: Return Reason codes

Code	Description
V01	Case number not found in VROL
V02	Duplication message; this dispute message was previously processed
V03	Primary account number (PAN) doesn't match original
V04	Dispute amount doesn't match dispute amount in VROL
V05	Dispute amount currency doesn't match dispute amount currency in VROL
V06	Reason code doesn't match reason code in VROL
V07	VROL bundle case number doesn't match VROL bundle case number in VROL
V08	Transaction identifier doesn't match transaction identifier on original
V09	Acquirer reference number doesn't match acquirer reference number on original
V10	Card acceptor identification code doesn't match card acceptor identification code on original
V11	Merchant category code (MCC) doesn't match MCC on original
V12	Merchant city doesn't match merchant city on original
V13	Merchant country code doesn't match merchant country code on original
V14	Purchase date doesn't match purchase date on original
V15	Reimbursement attribute doesn't match reimbursement attribute on original
V23	Payment token does not match the payment token on the original
V24	Acquiring institution ID code does not match the acquiring institution ID code on the original
V25	Full dispute identified as a partial dispute via the special chargeback indicator field.

These return reason codes are used in V.I.P. 0282 and 0480 dispute status advice messages.

Field 49 – Currency Code, Transaction

Field 49 – Attributes

fixed length

3 N, 4-bit BCD (unsigned packed); 2 bytes

Field 49 – Description

Field 49 contains a code that identifies the currency of these amount fields:

- Field 4-Amount, Transaction
- Field 28-Amount, Transaction Fee
- Field 119-Member-Calculated Interchange Reimbursement Fee (IRF)

VisaNet Integrated Payment (V.I.P.) uses the 3-digit numeric code in field 49 to determine the number of decimal places in the above fields. A leading zero is required to pad the first unused half-byte of this field. The zero is a filler, and is not part of the currency code.

Field 49 – Usage

Field 49 is used in messages related to a customer transaction that contains amount fields, even when the amount is **zero** (as in verification requests).

This field is used in 0200 balance inquiry requests, even though field 4 is not present, and even if the requestor does not participate in multicurrency (the currency code specifies the currency in which the acquirer wants the balance amount).

For currencies with 3 decimal places, the last digit of the amount in fields 4, 28, or 119 must be zero; that is, the amount must be rounded to two decimal places with a trailing **zero**.

Multicurrency Participants: Message originators can use codes listed in the appendix titled “Country and Currency Codes.” For multicurrency processing, the currency code and country code may not match.

Non-Multicurrency Participants: Message originators must use **840** (U.S. dollars).

Collection-Only Transactions: This field is required in 9240 and 9242 messages but is not present in their responses. The currency code must be from the original transaction.

Visa Smart Debit/Credit (VSDC): This field is required in 0620 issuer authentication failure or issuer script results advices.

VSDC ATM PIN Change & Unblock: This field is optional for 0200 messages, reversals, and their corresponding advice messages.

Visa-Generated Funds Disbursements (Plus): The value in this field is **840** (U.S. dollars).

STIP and Switch Advices: This field is present in these advices if it was in the request. It is not used in advice responses.

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

Advices From Clearing Endpoints: This field is present if field 4, 28, or 119 is present.

Non-Multicurrency Participants: Message originator must use **840** (U.S. dollars).

Fraud Reporting: These guidelines apply.

- Client-generated – The field must contain a currency code. For issuer-reported fraud, the currency code must be the issuer's billing currency or U.S. dollars if the fraud amount represented is in U.S. dollars. For acquirer-reported fraud, the currency code must be the original transaction currency or U.S. dollars. For client-generated Interchange Control Systems (ICS) and Not Received as Issued (NRI)/PS604 messages only, the currency code must be entered if Field 4-Amount, Transaction is present.
- VisaNet-generated – The field contains the currency code from the original fraud transaction. The field may be present if reported in the original fraud transaction.

Field 49 – Field Edits

This code must be **840** if the message originator does not participate in multicurrency processing. Other values must be one of the 3-digit numeric codes listed in the appendix titled "Country and Currency Codes."

Required in every message and message response containing field 4, 28, or 119.

For National Net Settlement Service (NNSS) transactions, this field must contain the country code.

In dispute response financial, the acquirer must use the amount from the dispute financial; therefore, field 49 in the dispute response financial must match field 49 in the dispute financial.

Field 49 – Reject Codes

0037 = Invalid value

0315 = Field missing

Field 50 – Currency Code, Settlement

Field 50 – Attributes

fixed length

3 N, 4-bit BCD (unsigned packed); 2 bytes

Field 50 – Description

Field 50 is a multicurrency-only field. It contains a 3-digit numeric code identifying the currency used for settlement. This code also identifies the currency in these amount fields:

- Field 5-Amount, Settlement
- Field 48, Usage 6b: VSS Funds Transfer Totals
- Field 86-Credits, Amount
- Field 87-Credits, Reversal Amount
- Field 88-Debits, Amount
- Field 89-Debits, Reversal Amount
- Field 97-Amount, Net Settlement

VisaNet uses this code to determine the number of decimal places in the listed amount fields. See the appendix titled “Country and Currency Codes,” for a list of settlement currency codes. A leading zero is required to pad the first unused half-byte of this field. The zero is filler, not part of the currency code.

Field 50 – Usage

Multicurrency Participants: This field is added by VisaNet and is required when one or more of the amount fields listed above is present. It is not returned in responses to acquirers. Note that the currency code and country code may not match.

This field is present in 0520 reconciliation messages for multicurrency participants. The field must be returned in a 0520/0530 response only if the recipient is including its own reconciliation totals in fields 86-89.

STIP and Switch Advices: This field is present in these advices if it was in the request. It is not used in advice responses.

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

Advices From BASE II Endpoints: This field is present if the recipient of the advice is participating in online multicurrency processing and the transaction qualifies for settlement. (Flags in field 9 of the message header identify messages that qualify for settlement. See Chapter 2, Message Structure and Header Field Specifications.)

Non-Multicurrency Participants: This field is omitted; the value is assumed to be **840**.

VSS Participants: This field is present in 0620 funds transfer total messages.

Field 50 – Field Edits

This value must be one of the 3-digit numeric codes listed in the appendix titled, “Country and Currency Codes.”

Field 50 – Reject Codes

0037 = Invalid value

Field 51 – Currency Code, Cardholder Billing

Field 51 – Attributes

fixed length

3 N, 4-bit BCD (unsigned packed); 2 bytes

Field 51 – Description

This is a multicurrency-only field. It contains a 3-digit numeric code that identifies the currency used by the issuer to bill the cardholder's account in this amount field:

Field 6 Amount, Cardholder Billing

VisaNet uses this code to determine the number of decimal places in this amount field. See the appendix titled “Country and Currency Codes,” for codes. A leading **zero** is required to pad the first unused half-byte of this field. The **zero** is filler, not part of the currency code.

Field 51 – Usage

Multicurrency Participants: If field 6 is present in a response, this field must be present.

VisaNet adds this field in messages for issuers (see field 6).

This field is not used in dispute financials.

Visa Smart Debit/Visa Smart Credit (VSDC): This field is present in 0620 issuer authentication failure or issuer script results advices.

STIP and Switch Advices: This field is present in these advices if it was in the request. It is not used in advice responses.

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

Advices From BASE II Endpoints: VisaNet provides this code if the advice recipient participates in online multicurrency processing and the transaction qualifies for settlement. (Flags in field 9 of the message header identify messages that qualify for settlement. See Chapter 2, Message Structure and Header Field Specifications.)

Field 51 – Field Edits

None.

Field 51 – Reject Codes

0037 = Invalid value

Field 52 – Personal Identification Number (PIN) Data

Field 52 – Attributes

fixed length

64 N, bit string; 8 bytes

Field 52 – Description

Field 52 contains a Personal Identification Number (PIN), encrypted and formatted as a block of 16 hexadecimal digits. (A PIN is a number assigned to a cardholder for unique identification at the point of service or Automated Teller Machine (ATM).)

The format of this field in an outgoing request must be that indicated by the PIN Block Format Code in Field 53-Security-Related Control Information, of the request. In an incoming request or advice, the format conforms to the PIN Block Format of the issuer as specified by Visa.

A cardholder PIN is never logged, not even in an encrypted form.

Field 52 – Usage

A PIN is required in an ATM cash disbursement, Visa ReadyLink ATM load, balance inquiry, or account transfer request. It is not used in other transactions including dispute financials, dispute financial reversals, dispute response financials, or adjustments.

If this field is present, Field 53-Security-Related Control Information must also be present. It is not used in reversal requests, advices, or responses.

Visa Smart Debit/Credit (VSDC) PIN Change/Unblock Service Requests: This field and field 53 must be present with the current PIN information in PIN change and unblock requests. Field 152 contains the new PIN for PIN change requests.

Field 52 – Field Edits

Field content is edited by the VisaNet security module during PIN translation and PIN verification. If there is an error, the request message is not rejected; instead, a response code in field 39 of the 0210 response is returned. (The most common response code is **81**, which indicates an acquirer key problem.)

This field is required if field 18 is **6011** and the message is an 0200 financial transaction request, where the processing code is an **01**, **30**, or **40**.

Nonoriginals and Exceptions: If PIN data is present in nonoriginals or exception items, the message is rejected with reject code **0699**.

If this field is present in an advice, reversal, or response, V.I.P. rejects the message with reject code **0752**.

Field 52 – Reject Codes

0295 = Field missing

0592 = Field present when not allowed

AVS does not apply to ATM.

0752 = Consistency error-field 52 PIN not allowed on this transaction type

Field 53 – Security-Related Control Information

Field 53 – Attributes

fixed length

16 N, 4-bit BCD (unsigned packed); 8 bytes

Field 53 – Description

Data needed by the issuer or the VisaNet security module to process PINs entered at an ATM. This is a fixed-length field with six subfields:

Positions: 1-2	3-4	5-6	7-8	9-10	11-16
security format code	algorithm ID	PIN block format	zone key index	n/a	n/a

Positions 1-2, Security Format Code (field 53.1): This code defines the security technique used.

Positions 3-4, PIN Encryption Algorithm Identifier (field 53.2): This code defines the encryption technique used.

Positions 5-6, PIN Block Format Code (field 53.3): This code defines the format of field 52.

Positions 7-8, Zone Key Index (field 53.4): This index indicates which key was used to encrypt the PIN. In Dynamic Key Exchange (DKE) messages, this subfield is used to indicate which key is being changed.

Positions 9-10, PIN Data Type (field 53.5): Not applicable.

Positions 11-16: Visa Reserved (field 53.6): Not applicable.

Field 53 – Usage

This field is required in messages containing a PIN (field 52) or in a dynamic key exchange message. Otherwise, it is not used. Acquirers must place **zeros** in positions 9-16. Issuers receive values set by VisaNet.

Positions 1-2, Security Format Code: This subfield 53.1 code must be **20** (Zone Encryption) or **02** (issuer Plus ISO) for ATM transactions.

Positions 5-6, PIN Block Format Code: If VisaNet validates the PIN as part of the PVS service, this field contains the original values inserted by the acquirer.

PIN pads for VisaNet transactions must use ANSI format 0 to create the PIN block before encryption. ANSI PIN block format **0** (zero) and Visa PIN block format 1 are identical.

Positions 7-8, Zone Key Index: If the PIN in field 52 is zeroed out before the request reaches the issuer, this code is the original for the acquirer's key.

Dynamic Key Exchange: Positions 1-8 are used for DKE requests. Positions 1-6 contents are not used for DKE processing. Positions 7-8 subfield is used to indicate which of the two possible working keys is to be changed.

- **01:** Working Key 1
- **02:** Working Key 2

This subfield is required in all VisaNet-initiated or client-initiated 0800 DKE messages. The client must indicate which key is to be changed in 0800 request for key messages. VisaNet also uses this subfield in outgoing 0800 deliver new key messages to indicate which key is to be updated. This subfield is not used in 0810 responses.

Visa Smart Debit/Credit (VSDC) PIN Change/Unblock Service Requests: This field and field 52 must be present with the current PIN information in PIN change and unblock requests. Field 152 contains the new PIN for PIN change requests.

Advices From Clearing Endpoints: Not applicable.

Field 53 – Field Edits

This field is required if field 52 is present.

- Positions 1-2 must be **20**
- Positions 3-4 are not edited
- Positions 5-6 must be **01**, **02**, or **03**
- Positions 7-8 must be **01** or **02**
- Positions 9-16 must be zeros in outgoing requests

Nonoriginals and Exceptions: If PIN-related data is present in nonoriginals or exception items, the message is rejected with reason code **0699**.

Other Edits: Visa rejects a message with reject code **0753** if:

- An original request is submitted with field 53 but there is no PIN data in field 52.
- Field 53 is present in an advice, a reversal, or a response message.

Field 53 – Reject Codes

0088 = Invalid value

0384 = Field missing

0621 = Invalid value

0699 = Presence of PIN/Track/AVS data inconsistent with message type

AVS does not apply to ATM .

0753 = Consistency error-invalid use of field 53

Field 53 – Valid Values

Table 48: Field 53 Security Codes

Code	Definition
Positions 1-2: Security Format Code	
20	Zone encryption
Positions 3-4: PIN Encryption Algorithm Identifier	
01	ANSI DES
Positions 5-6: PIN Block Format Code	
01	Format is based on the PIN, the PIN length, the selected rightmost digits of the account number, and the pad characters 0 and F-combined through an exclusive OR operation
02	Format is based on the PIN, the PIN length, and a user-specified numeric pad character
03	Format is based on the PIN and the F pad character
04	PIN Block Format
Positions 7-8: PIN Zone Key Index	
00	Reserved for Plus for future use
01	Working key 1 is to be changed/used
02	Working key 2 is to be changed/used

Field 53, Usage 2 – Security-Related Control Information

Field 53, Usage 2 – Attributes

variable length

1 byte, binary +

255 bytes; variable by usage; maximum 256 bytes

Field 53, Usage 2 – Description

This field is used by issuers and acquirers for encryption attributes and encrypted data.

Positions: 1		2-3	4-255
Subfield 1: length	Subfield 2: dataset ID	Subfield 3: dataset length	Subfield 4: TLV sub-elements
Byte 1	Byte 2	Byte 3-4	Byte 5-256

Length Subfield: This is a one-byte binary subfield that contains the number of bytes in this field after the length subfield.

Position 1, Dataset ID: This is a one-byte binary identifier given to each dataset. The identifier is hexadecimal **01**.

Positions 2-3, Dataset Length: This is a 2-byte binary subfield that contains the total length of all Tag Length Value (TLV) elements that follow.

Positions 4-255, TLV Data Elements: This is a 252-maximum byte subfield that contains encryption data elements in Tag Length Value (TLV) format as follows.

Tag: The tag can be one or two bytes long. The number of bytes used for the tag is determined by the last five bits (bits 4-8) of the first byte of the tag position. If these five bits are all set to 1, the next byte is part of the tag. If all five bits are not set to 1, the tag is only 1 byte long.

Length: The length can be one or two bytes long. The number of bytes used to specify the length is determined by the first bit of the first byte of the length position. If the first bit of the length position is zero (0), the length is carried in the next seven bits of the first byte and the length position is only one byte long. The length of the data element is in the range of 1-127.

If the first bit of the length position is 1, the next seven bits contain the number of subsequent bytes used for the length. The length of the data element is in the range of 1-255.

Value: This is security-related control information data in hexadecimal format.

Field 53, Usage 2 – Usage

Endpoints that support this field must be able to receive dataset IDs and tags defined for this field in any order, including those that they do not recognize or expect. Endpoints can receive multiple datasets in this field. Endpoints must ignore dataset IDs or tags they do not recognize and should continue to process the field.

The usage of this field applies to Derived Unique Key per Transaction (DUKPT), Acquirer Working Key (AWK), and Issuer Working Key (IWK).

The usage definitions are:

- **DUKPT:** This option is used for point-of-sale transactions when no zone encryption translation has occurred.
- **AWK and IWK:** This option is used when zone encryption translation has been performed. It is applicable for PIN blocks in Point-of-Sale (POS) and Automated Teller Machine (ATM) environments.

Field 53, Usage 2 is not used for Dynamic Key Exchange (DKE) messages.

Acquirers must use Visa-provided AWK or endpoint-provided AWK for testing in VisaNet Certification Management Service (VCMS). Acquirers that use Visa Test System (VTS-V.I.P.) must use Visa-provided test encryption keys in their VTS-V.I.P. configuration.

Dataset ID 01, Encryption Data: This dataset contains VisaNet Integrated Payment (V.I.P.) tag processing requirements for encrypted data and encryption attributes.

This table displays the sub-element contents for encryption data. This field may contain one or more of the tags listed.

Table 49: Dataset ID 01, Encryption Data

Tag	Name	Length	Format	Description
01	Key management	1	B	Identifies key management scheme for encryption data in dataset. 01 = Fixed key (static key) 05 = Derived unique key per transaction (DUKPT) Required for PIN data with AWK, IWK, and DUKPT encryption messages.
02	Key Set Identifier	3-6	6-11 N, 4-bit BCD	Specifies identifier for encryption key. Required for PIN data with DUKPT encryption.

Table 49: Dataset ID 01, Encryption Data

Tag	Name	Length	Format	Description
03	Device ID and Transaction Counter	5	B	Contains 19-bit device ID and 21-bit transaction counter. Required for PIN data with DUKPT encryption.
04	Algorithm	1	2 N, 4-bit BCD	Identifies encryption algorithm used to encipher encrypted data elements in dataset or keys in associated key management data element. 03 = Triple DES encryption algorithm TDEA Optional when using TDEA. Required for PIN data with AWK, IWK, and DUKPT messages.
05	Zone Key Index	1	B	Identifies zone key index: 01 = Working key 1 to be changed or used 02 = Working key 2 to be changed or used Required for PIN data with AWK and IWK encryption messages.
06	PIN Block Format Code	1	B	Carries code defining encrypted PIN data format and describing PIN block format. 01 = Format based on PIN, length, selected rightmost digits of account number, and pad characters 0 and F -combined through exclusive OR operation. Conforms to ISO Format 0. 02 = Format based on PIN, PIN length, and user-specified numeric pad character (Docutel). 03 = Format based on PIN and F pad character (Diebold-IBM). Required for PIN data with AWK and IWK encryption.

Table 49: Dataset ID 01, Encryption Data

Tag	Name	Length	Format	Description
1F1F	Encrypted PIN Data	8	64 N, Bit string	Required for PIN data with AWK, IWK, and DUKPT encryption.
1F24	Replacement PIN	8	64 N, Bit String	Contains PIN change transactions for issuers not supporting field 55 or field 152. ATM only.

Encryption data can be submitted in these requests:

- 0100 authorization
- 0100 preauthorization
- 0200 full-financial
- 0200 merchandise
- 0800 dynamic key exchange

Acquirers must submit the encrypted PIN data, if present, in this field in VisaNet Integrated Payment (V.I.P.) request messages. Acquirers must no longer use Field 52-Personal Identification Number (PIN) Data to submit the encrypted PIN, if present.

Acquirers that use the 0800 Dynamic key exchange message to change working keys can use this field.

Issuers that choose to receive this field will get it with the PIN block and PIN block attributes in V.I.P. request messages. These messages include the format that conforms to the issuer's PIN block format for the issuer key. Issuers no longer receive field 52 with the PIN block and PIN block attributes in this field.

Issuers using this field must also use this format for the 0800 Dynamic key exchange message to change working keys.

The processing rules for PIN data in field 52 and field 53 apply to the encrypted PIN data in this field.

Field 53, Usage 2 – Field Edits

Field length is edited but content is not.

Non-originals and Exceptions: If PIN-related data is present in non-originals or exception items, V.I.P. rejects the message with reject code **0699**.

Field 53, Usage 2 – Reject Codes

0088 = Invalid value

0384 = Field missing

0621 = Invalid value

0699 = Presence of PIN/Track/AVS data inconsistent with message type

0753 = Consistency error-invalid use of field 53

Field 54 – Additional Amounts

Field 54 – Attributes

variable length

1 byte, binary +

20 ANS, EBCDIC; 21 bytes total

or 40 ANS, EBCDIC; 41 bytes total

or 60 ANS, EBCDIC; 61 bytes total

or 80 ANS, EBCDIC; 81 bytes total

or 100 ANS, EBCDIC; 101 bytes total

or 120 ANS, EBCDIC; 121 bytes total

maximum: 121 bytes

Field 54 – Description

This field contains account balance information for ATM balance inquiries or cash disbursements. Balance information is for cardholder benefit. Acquirers can display balances at the terminal, print them on the receipt, or both. The field can be used regardless if the issuer and acquirer are multicurrency participants.

V.I.P. uses this field for returning account balance information. After the length subfield, there are four possible sets of these subfields:

Positions: 1-2		3-4	5-7	8	9-20
length	account type	amount type	currency code	amount, sign	amount

Length: Number of bytes following the length subfield.

Positions 1-2, Account Type: A 2-digit code (field 54.1) identifying the account type affected by the balance inquiry.

Positions 3-4, Amount Type: A 2-digit code (field 54.2) describing the use of the amount.

Positions 5-7, Currency Code: A 3-digit code (field 54.3) that defines the currency used in positions 9-20. See the appendix titled “Country and Currency Codes,” for a currency code list.

If an issuer provides spaces or zeros in field 54.3 of the response, Visa assumes the value of Field 51-Currency Code, Cardholder Billing.

Position 8, Amount, Sign: A 1-digit code (field 54.4) that defines the value of the amount as positive or negative, where:


- **C** = Positive balance or fee amount
- **D** = Negative balance or fee amount

Positions 9-20, Amount: A twelve-character amount (field 54.5) that is right-justified and contains leading zeros. The amount also includes an implied decimal relative to the currency code specified in positions 5-7.

Cardholder Billing and Transaction Currency Considerations

The issuer responding to a balance inquiry or cash disbursement can provide one balance (in the first set, Set A, positions 1-20), and can also provide a second balance (in the second set, Set B, positions 21-40). Balances are in the cardholder billing currency.


V.I.P. converts the amounts provided by the issuer to their transaction currency amounts before it forwards the response to the acquirer. If the currencies are the same, it forwards only Set A.

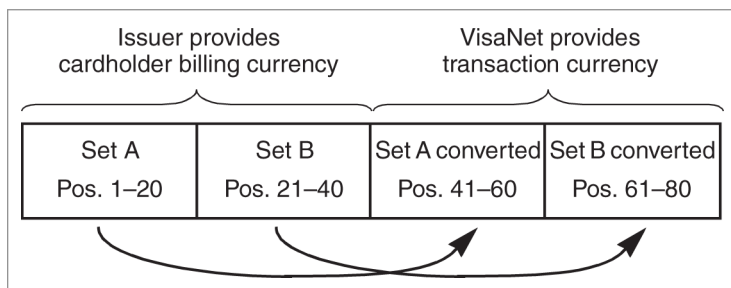

Number of Account Balances Considerations

One Balance Example:

If the issuer provides one account balance amount, V.I.P. initializes the amount sign (position 8) in Set B to **C**, zero-fills the remaining positions in Set B (positions 21-40), and provides the third set of fields (positions 41-60) in the transaction currency.

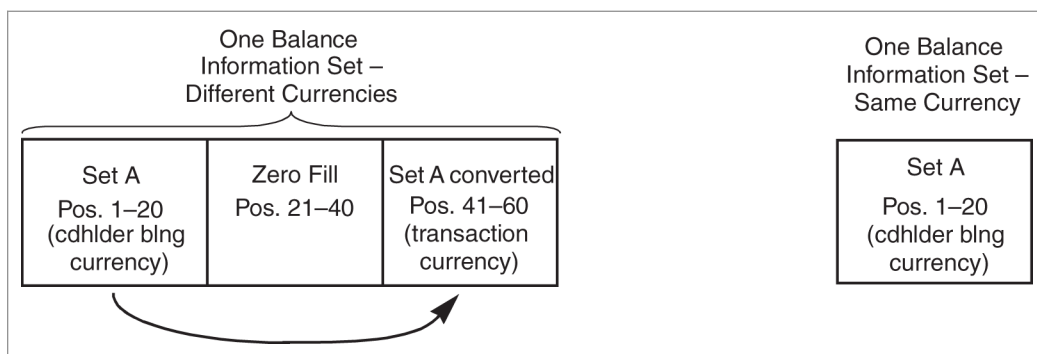


The acquirer receives the balance expressed in the issuer currency (Set A) and in the transaction currency (Set A converted).

If the cardholder billing and transaction currencies are the same, the acquirer receives only one account balance amount (only Set A).

Two Balances Example:


If the issuer provides two account balance amounts (positions 1-20 and 21-40), the transaction currency equivalent of the first amount goes in positions 41-60 and the second amount goes in positions 61-80.

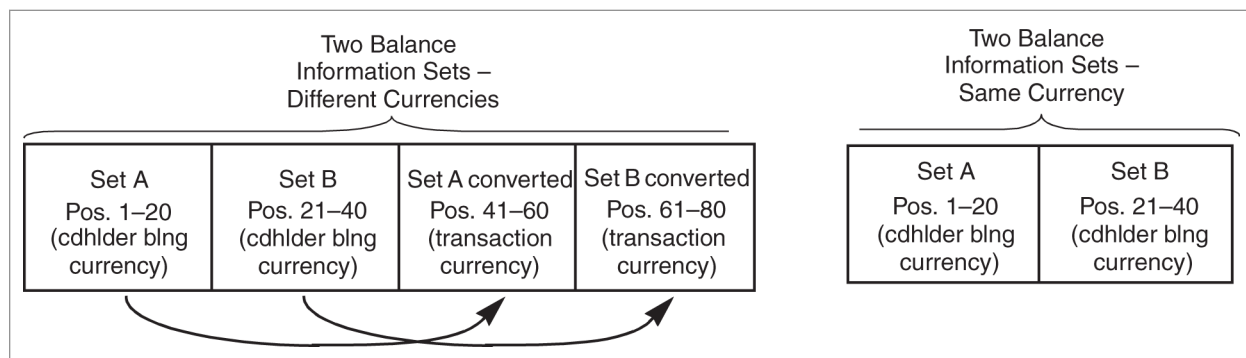

The acquirer receives those balances expressed in the issuer-provided currency (Set A and Set B) and in the transaction currency (Set A converted and Set B converted).

If the two currencies are the same, the acquirer receives only two account balance amounts (only Set A and Set B).

Non-Multicurrency Participating Acquirer: VisaNet replaces the cardholder billing amount in positions 1-20 (and positions 21-40, if present) with the equivalent transaction currency amounts.

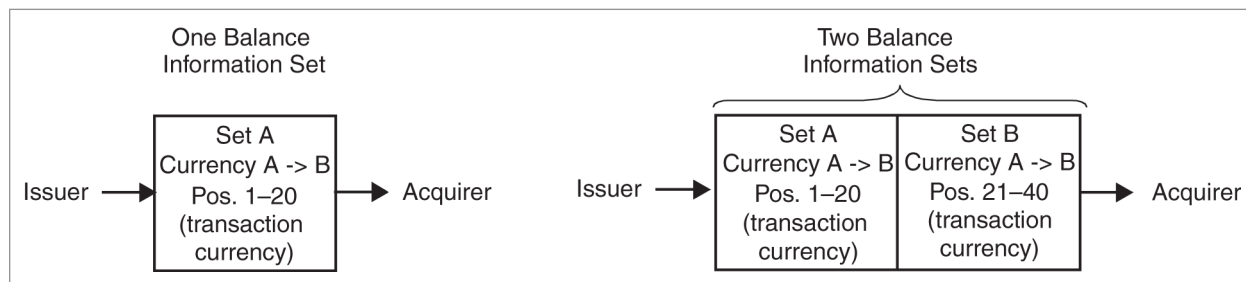

Non-multicurrency acquirers receive positions 1-20 and 21-40 in the transaction currency and do not receive positions 41-60 and 61-80.

If the cardholder billing currency and transaction currency are the same, VisaNet forwards this field to the acquirer as received from the issuer (no conversion is necessary).

Overflow Amount: If the field 54 converted amount in transaction currency overflows 12-Character Amount field in converted Set, the converted amount is shown as **999999999999**.

Field 54 – Usage

This field applies to clients participating in the International Balance Inquiry Service. It is used in:

- 0210 approval responses to ATM balance inquiry requests and 0210 ATM cash disbursement responses.
- Visa ReadyLink ATM load responses, ATM access fees, and ATM cash deposits.
- Original Credit Transactions (OCTs) destined to issuers in India.

Field 54 balances can be sent in 0210 cash disbursement responses, regardless of whether the issuer participates in Balance Inquiry.

For account type coding, the account type subfield code of every dataset in this field must be the account type code in field 3 of the response.

If only one balance is included, Visa recommends that it is the current account ledger balance. Because issuers can return negative balances, acquirers must be capable of receiving positive or negative balances.

Switch Advices: This field is present in an 0400/0420 advice if it was in the response.

Using Multiple Sets: When an issuer populates a field 54 set, the first available set must be used. There is no prescribed order of field 54 sets. When an acquirer receives a field 54 set, the acquirer must use the Account Type, Amount Type, and Currency Code subfields to determine the use of the set.

ATM Access Fee Data: For issuers that choose to receive this field (and that process multicurrency transactions), Visa populates this field with an amount set containing access fee data from field 28, in the cardholder billing currency. Issuers receive field 54 in originals, reversals, adjustments, and dispute response financials of all Visa and Plus ATM domestic and international messages.

Acquirers do not receive this field 54 amount set in messages.

ATM Cash Deposit transactions: This field must be present when field 104 usage 2, dataset ID 57 tag 02 source of funds indicator contains a value of 4 (cash and check).

STIP Available Balance Service: Field 54 supports balance information for STIP Available Balance Service. Issuers can send 0110/0210 authorization response message with the value of **05** in positions 3-4 and an amount in positions 9-20 of this field. V.I.P. uses this data to update cardholder available balance record in database. V.I.P. drops this field from responses before sending it to acquirers.

Field 54 – Field Edits

The length subfield value must be **20, 40, 60, or 80**.

Every account type code in this field of the response must match field 3 positions 3-4 of that response.

The value in the currency code subfield must be one listed in the appendix titled “Country and Currency Codes.”

The amount sign must be **C** or **D**.

This field is required in all 0210 balance inquiry approval responses.

Currency Precision Service: If the amount in this field is shown in field 63.13 as three decimals but ends in a value other than zero, the transaction receives reject code **150**.

Empty Set Between Populated Sets: If an empty field 54 set exists between two populated sets, V.I.P. rejects the transaction back to the issuer with reject code **0150**.

Cash Amount of Deposit for ATM Deposit Transactions: Acquirers can optionally send cash amount of deposit in this field if field 104, usage 2, dataset ID 57, tag 02 contains **4** (Cash and Check). If the amount is greater than the amount in field 4, V.I.P. rejects the transaction with reject code **0150** (Invalid value).

If an acquirer submits an ATM deposit transaction without field 104, usage 2, dataset ID 57, tag 02, V.I.P. rejects the transaction with reject code **0494** (Field or data missing or invalid).

If an acquirer submits an ATM deposit transaction where:

- Field 54 does not contain:
 - **00** in positions 1-2
 - **40** in positions 3-4
- and Field 104, usage 2, dataset ID 57 = **4**

V.I.P. rejects the transaction with reject code **0250** (Field missing).

Visa & PLUS ATM Balance Inquiry/ATM Cash withdrawal with balance information: If field 54, positions 1-2, account type contains invalid values, V.I.P. rejects the transaction with reject code **0150**.

Field 54 – Reject Codes

0150 = Invalid value

0250 = Field is missing

0517 = Value for account type does not match value in field 3 *account type*.

0494 = Field or data missing or invalid

Field 54 – Valid Values

Table 50: Field 54 Balance Inquiry Account and Amount Type Codes

Position	Name	Description
1-2	Account Type	00 = Not applicable or not specified 10 = Savings account 20 = Checking account 30 = Credit card account
3-4	Amount Type	01 = Deposit Accounts: Current ledger (posted) balance or Credit Card Accounts: Credit amount remaining for customer (open to buy) 02 = Deposit Accounts: Current available balance (typically, ledger balance less outstanding authorizations. Some depository institutions also include pending deposits and the credit or overdraft line associated with the account.) Or Credit Card Accounts: Customer's credit limit.

Table 51: Field 54 Values for Visa ReadyLink ATM Load Responses

Position	Name	Description
1-2	Account Type	28 = Load transaction.
3-4	Amount Type	00 = Code for payment transactions.
5-7	Currency Code	Contains the alpha currency code of the transaction.
8	Amount, Sign	C = Positive balance.
9-20	Amount	Contains the account balance amount, with two implied decimals.

Table 52: Field 54 ATM Access Fee Data

Position	Name	Description
1-2	Account Type	Account type is not applicable and is set to zeros (0).
3-4	Amount Type	These positions contain the value: 42 = Amount surcharge
5-7	Currency Code	Contain a currency code for the cardholder billing currency.

Table 52: Field 54 ATM Access Fee Data

Position	Name	Description
8	Amount, Sign	Contains one of these values: D = Negative fee amount C = Positive fee amount
9-20	Amount	Contain the access fee amount. The amount includes an implied decimal relative to the currency code specified in positions 5-7. Right-justified leading zeros (0).

Table 53: Field 54 ATM Deposit

Position	Name	Description
1-2	Account Type	Contains account type, with value: 00 = Not applicable or not specified
3-4	Amount Type	Contains amount type, with value: 40 = Cash
5-7	Currency Code	Contains currency code of the transaction from Field 49.
8	Amount, Sign	Contains amount, sign, with value: C = Positive balance
9-20	Amount	Contains the cash portion amount from the mixed ATM deposit transaction amount. This value must be lesser than the amount in Field 4–Amount, Transaction.

Table 54: STIP Available Balance Service

Position	Name	Description
1-2	Account Type	Contains a valid value.
3-4	Amount Type	05 : Cardholder available balance
5-7	Currency Code	Contains existing currency code value 840 (U.S.)
8	Amount, Sign	C = Positive balance
9-20	Amount	Contains cardholder balance amount.

Table 55: Pre-Currency Conversion Amounts (for OCTs with Recipient Issuers in India)

Position	Name	Description
1-2	Account Type	Must be 00 .
3-4	Amount Type	Must be 45 = Amount, pre-currency conversion.

Table 55: Pre-Currency Conversion Amounts (for OCTs with Recipient Issuers in India)

Position	Name	Description
5-7	Currency Code	Contains the numeric currency code of the amount in positions 9–20.
8	Amount, Sign	C = Positive balance.
9-20	Amount	Contains amount in positions 3–4 in the currency specified.

Field 55 – Integrated Circuit Card (ICC)-Related Data

Field 55 – Attributes

variable length

1 byte binary +

255 bytes, variable by usage; maximum 256 bytes

Field 55 – Description

This field contains integrated circuit card (ICC)-related data that is transmitted from the ICC to the card issuer and from the card issuer to the ICC. The format of the field is a special form of a composite data element that uses three subfields after the length subfield.

Field 55 – Usage

Field 55 usages and formats are described in the respective field descriptions.

- Usage 1-VSDC Chip Data

Field 55 – Field Edits

Field edits vary depending on the usage.

Field 55 – Reject Codes

The reject codes vary depending on the usage.

Field 55, Usage 1 – VSDC Chip Data

Field 55, Usage 1 – Attributes

variable length

1 byte binary +

255 bytes, variable by usage; maximum 256 bytes

Field 55, Usage 1 – Description

This field is carried in VSDC transactions and supports ICC data in TLV format. Depending on the tag, some of the data elements are used by VisaNet for processing the transaction and other data elements contain issuer proprietary information. Data elements that are used by VisaNet have a corresponding field in the third bitmap. The tags for data elements that contain issuer proprietary information cannot be mapped into third bitmap and are handled by VisaNet as supplemental data that can be included in the message depending on client options.

VSDC full data acquirers and issuers can choose to use field 55 or the third bitmap fields to exchange chip data. Acquirers and issuers that use the third bitmap can also use field 55 for supplemental data to send and receive issuer proprietary information.

Issuers of Generic EMV cards must use field 55.

Acquirers and issuers that use field 55 to exchange all chip data should be aware that the usage rules for the equivalent third bitmap fields also apply to the TLV data elements in field 55, but the field 55 data must not be replicated in the equivalent third bitmap fields. That is, if field 55 is being used to transport the VSDC data, the equivalent of all mandatory third bitmap fields must be in field 55.

This field 55 VSDC chip data usage contains three subfields after the length subfield.

Positions: 1		2-3	4-255
Subfield 1: length	Subfield 2: dataset ID	Subfield 3: dataset length	Subfield 4: Chip Card TLV data elements
Byte 1	Byte 2	Byte 3-4	Byte 5-256

Length Subfield: This is a one-byte binary subfield that contains the number of bytes in this field after the length subfield.

Position 1, Dataset ID: This is a one-byte binary identifier given to each dataset. The identifier is hexadecimal **01**.

Positions 2-3, Dataset Length: This is a 2-byte binary subfield that contains the total length of all TLV elements that follow.

Positions 4-255, Chip Card TLV Data Elements: This is a 252-maximum byte subfield that contains chip data elements in TLV format as follows.

Tag: The tag can be one or two bytes long. The number of bytes used for the tag is determined by the last five bits (bits 4-8) of the first byte of the tag position. If these five bits are all set to 1, the next byte is part of the tag. If all five bits are not set to 1, the tag is only 1 byte long.

Length: The length can be one or two bytes long. The number of bytes used to specify the length is determined by the first bit of the first byte of the length position. If the first bit of the length position is zero (0), the length is carried in the next seven bits of the first byte and the length position is only one byte long. The length of the data element is in the range of 1-127.

If the first bit of the length position is 1, the next seven bits contain the number of subsequent bytes used for the length. The length of the data element is in the range of 1-255.

Value: Chip card data in hexadecimal format.

This table displays the tags that are recognized by VisaNet and can be mapped into third bitmap fields. See the equivalent third bitmap field about the information and construction of the value component carried in each of the data elements.

Table 56: Field 55 Tags and Mappings

Tag	Data Element	Attributes	Description
71	Issuer Script Template 1	Variable length 1 byte + 510 hexadecimal digits, maximum 256 bytes	These tags map to Field 142-Issuer Script The format of these tags varies slightly from the layout provided in the description of field 142. See Appendix F-VSDC Fields-Additional Information for the layout of field 55, tags 71 and 72.
72	Issuer Script Template 2		
82	Application Interchange Profile	Fixed length 16 bit string; 2 bytes	This tag maps to Field 138-Application Interchange Profile

Table 56: Field 55 Tags and Mappings

Tag	Data Element	Attributes	Description
84	Dedicated File Name	Variable length 5 bytes to maximum 16 bytes	This tag contains the Application ID (AID) that was selected for transaction routing. This data element can be used to support proper routing. Although the Automated Teller Machine (ATM) also contains an AID (x'9F06') that is used during the selection process, the Dedicated File Name tag fully identifies the application selected. For routing purposes, only the RID portion of the dedicated file name must be examined. U.S. acquirers must submit the selected AID in 0100 authorization requests and in 0200 full-financial requests for VSDC EMV contact chip and qVSDC contactless transactions. Entities between the ATM and VisaNet, such as acquirer processors, networks, and gateways, need this field to ensure that transactions initiated with the Visa AID are properly routed to a Visa-affiliated network. If Tag 84 is not present, the transaction is routed to the issuers network. If the Visa AID is selected, the transaction is routed to a Visa network.

Table 56: Field 55 Tags and Mappings

Tag	Data Element	Attributes	Description
91	Issuer Authentication Data	Field 139: - Fixed length 16 hexadecimal digits + 2 AN EBCDIC; 10 bytes total Field 140: - Variable length 1 byte binary + 16 bytes, maximum 17 bytes	This tag maps to various formats of Field 139-ARPC and ARPC Response Code or Field 140-Issuer Authentication Data, depending on client preference as follows: - Acquirer options: - Third bitmap, expanded format: Field 140 For acquirers, the bytes following the ARPC cryptogram are defined as binary, coded as ASCII equivalent. Acquirers do not convert the content of these bytes to other formats. - Issuer option: - Third bitmap, standard format: Field 139 Field 55 is required for issuers using Proprietary Authentication Data with CCD cards or with CVN 18 or CVN 22 VIS cards. The format of tag 91 for these issuers must be the equivalent of third bitmap, expanded format: Field 140.
95	Terminal Verification Results	Fixed length 40 bit string; 5 bytes	This tag maps to Field 131-Terminal Verification Results
9A	Transaction Date	Fixed length 6N, 4 bit BCD; 3 bytes	This tag maps to Field 146-Terminal Transaction Date
9C	Transaction Type	Fixed length 2N, 4 bit BCD (unsigned packed); 1 byte	This tag maps to Field 144-Cryptogram Transaction Type
C0	Secondary PIN Block	8 bytes	This tag maps to Field 152-Secondary PIN Block
5F2A	Transaction Currency Code	Fixed length 3N, 4 bit BCD, 2 bytes	This tag maps to Field 148-Cryptogram Currency Code
9F02	Amount, Authorized	Fixed length 12 N, 4 bit BCD (unsigned packed) 6 bytes	This tag maps to Field 147-Cryptogram Amount

Table 56: Field 55 Tags and Mappings

Tag	Data Element	Attributes	Description
9F10	Issuer Application Data	Variable length 1 byte binary + 32 bytes; maximum 33 bytes	This tag maps to various formats of Field 134-Visa Discretionary Data and Field 135-Issuer Discretionary Data, depending on the client preference of the recipient of the transactions as follows: • Acquirer Options: – Field 134, standard format + Field 135, or – Field 134, expanded format • Issuer Option: – Field 134, standard format + Field 135 See appendix in this manual for additional information.
9F1A	Terminal Country Code	Fixed length 3N, 4 bit BCD; 2 bytes	This tag maps to Field 145-Terminal Country Code
9F26	Application Cryptogram	Fixed length 16 hexadecimal digits; 8 bytes	This tag maps to Field 136-Cryptogram
9F33	Terminal Capability Profile	Fixed length 24 bit string; 3 bytes	This tag maps to Field 130-Terminal Capability Profile
9F36	Application Transaction Counter	Fixed length 4 hexadecimal digits, 2 byte binary value	This tag maps to Field 137-Application Transaction Counter
9F37	Unpredictable Number	Fixed length 8 hexadecimal digits; 4 bytes	This tag maps to Field 132-Unpredictable Number
9F5B	Issuer Script Results	Variable length 1 byte binary + 40 hexadecimal; 21 bytes	This tag maps to Field 143-Issuer Script Results

Tags Without Third Bitmap Equivalents: This field may contain tags that are processed by V.I.P. for which there are no equivalent fields defined in the third bitmap. Details about these tags are documented in the respective VSDC and VCPS program documentation.

- **Tag 9F6E, Form Factor:** This tag is fixed length, 4 bytes, and is personalized on the card or device and carries additional information about the contactless device, its security features, and the technology used to acquire the transaction. Acquirers who process contactless transactions must support this tag.

See the *Visa Contactless Payment Specification (VCPS)* manual for details.

In tap-to-phone contactless transactions, byte 4, bit 8, is set to one of these values:

- **0** = The transaction did not originate from a tap-to-phone acceptance device.
- **1** = The transaction originated from a tap-to-phone acceptance device.
- **Tag 9F7C, Customer Exclusive Data (U.S. Only):** This tag is variable length 1 byte binary to 32 bytes hexadecimal with a maximum 33 bytes and can be contained in U.S. contactless transactions and contains issuer proprietary information in TLV format. The tag is personalized on the card or device. If present in an interregional transaction, the tag is treated as supplemental data.

Exclusion of Sensitive Cardholder Information: Although Visa allows non-Visa, non-EMV tags to be sent in field 55, there are tags that must not be sent in this field because they include sensitive cardholder information that may be inadvertently logged by systems that do not expect field 55 to contain sensitive cardholder information.

Acquirers and issuers must **not** include these tags in field 55:

Tag	Chip Data	Equivalent Data Sent in:
56 ¹	Track 1 Equivalent Data	Not sent in chip transactions
57	Track 2 Equivalent Data	Field 35
5A	Application PAN	Field 2
5F20	Cardholder Name	Not sent in chip transactions
5F24	Application Expiration Date	Field 14
99	Transaction PIN	Field 52
9F0B	Cardholder Name-Extended	Not sent in chip transactions
9F1F	Track 1 Discretionary Data	Not sent in chip transactions
9F20 ²	Track 2 Discretionary Data	Field 35

¹This is an ISO tag (not an EMV tag) and is not personalized on Visa card applications. It is included in the above list for completeness.

²This is an EMV tag and is not personalized on Visa card applications. It is included in the list for completeness.

EMV® is a registered trademark in the U.S. and other countries and an unregistered trademark elsewhere. The EMV trademark is owned by EMVCo."

Field 55, Usage 1 – Usage

Endpoints that support this field must be able to receive dataset IDs and tags defined for this field in any order, including those they do not recognize or expect. Endpoints can receive multiple datasets in this field. Endpoints must ignore dataset IDs or tags they do not recognize and continue to process the field.

VSDC Full Transactions: For acquirers and issuers that use field 55 to carry full chip data, this field should be included in these messages:

- Visa and Plus 0200/0210 cash disbursements, balance inquiries, account transfers and responses
- 0220 STIP advices
- 0422 dispute financials and dispute financial reversals, 0220 dispute response financials

This field is optional in 0620 chip-based informational advices

See the latest version of the *VSDC System Technical Manual*.

Early Data Issuers: V.I.P. removes this field before forwarding chip-based requests to Early Data issuers.

Visa iCVV Convert Service: V.I.P. removes this field before forwarding chip-based requests to issuers participating in the iCVV Convert Service.

Visa Contactless Transactions: Acquirers must submit this field or the expanded third bitmap.

Visa recommends that acquirers use this field to support chip data processing. However, acquirers that currently use the expanded third bitmap can continue to use their format to process Visa Contactless ATM transactions.

Field 55, Usage 1 – Field Edits

Field edits vary depending on the usage and the tag. See the corresponding third bitmap field.

Field 55, Usage 1 – Reject Codes

The reject codes vary depending on the usage and the tag. See the corresponding third bitmap field.

0192 = Invalid value

Field 56 – Customer Related Data

Field 56 – Attributes

variable length

1 byte, binary +

255 ANS, EBCDIC; maximum: 256 bytes

or

variable length

2 byte, binary +

1535 bytes, variable by usage, maximum 1537 bytes

Note: ISO definition supports 9999 bytes in two-byte format.

Field 56 – Description

This field description contains transaction-datasets presented in hex number order. The dataset IDs listed for position 1 can be used as a guide to the Usage section, which specifies the content for each dataset.

The datasets, which are in TLV format, can have multiple sub-elements. The TLV format is shown below.

This dataset contains customer data in one-byte format.

	Positions: 1	2-3	4-255
Subfield 1: length	Subfield 2: dataset id	Subfield 3: dataset length	Subfield 4: TLV subfields
Byte 1	Byte 2	Byte 3-4	Byte 5-256

or

This dataset contains customer data in two-byte format.

	Positions: 1	2-3	4-1535
Subfield 1: length	Subfield 2: dataset id	Subfield 3: dataset length	Subfield 4: TLV subfields
Byte 1-2	Byte 3	Byte 4-5	Byte 6-1537

Length Subfield: One-Byte Format One-byte binary subfield that contains the number of bytes following the length subfield. The maximum is 255.

or

Length Subfield: Two-Byte Format Two-byte binary subfield that contains the number of bytes following the length subfield. The maximum is 1535.

Position 1, Dataset ID: This one-byte binary subfield contains a hexadecimal value that identifies the TLV data.

- Dataset ID 01, Account Data
- Dataset ID 02, Contact Information
- Dataset ID 03, Customer Identification Data
- Dataset ID 05, Account Owner Data

Positions 2-3, Dataset Length: This two-byte binary subfield specifies the total length of the TLV fields present in the dataset. The length is variable, depending on the data that follows.

Positions 4-255, TLV Data: One-Byte Format Each subfield of a data set has a defined tag, length, and value. The tag is used in conjunction with the dataset ID value. The dataset subfields can be present in any order with other TLV subfields.

or

Positions 4-1535, TLV Data: Two-Byte Format Each subfield of a data set has a defined tag, length, and value. The tag is used in conjunction with the dataset ID value. The dataset subfields can be present in any order with other TLV subfields.

Field 56 – Usage

These subsections (in hex number order) describe the usages for this field.

Endpoints that support this field must be able to receive dataset IDs and tags defined for this field in any order, including those that they do not recognize or expect. Endpoints can receive multiple datasets in this field. Endpoints must ignore dataset IDs or tags they do not recognize and continue to process the field.

Field 56 – Field 56 Dataset ID 01

Table 57: Dataset ID 01, Account Data

Tag	Length	Value	Format	Content of Sub-Element
01	29	Payment account reference	AN	Payment account reference: Positions 1-4 contain the BIN controller identifier, a four-character registered value assigned by EMVCo Positions 5-29 contain a 25-alphanumeric character uppercase unique value linked to a PAN Positions 5-7 contain 001 if Visa generates this value, otherwise, the value is provided to the issuer that generated the PAR by Visa product.
02	5	Payment account reference creation date	N	Julian date in YYDDD format.
82	2	Account Identifier Reference Code	N	Contains values to identify if the account belongs to the sender or recipient. 05 = Payer (sender) 06 = Payee (recipient) In an AFT message, if this tag contains 06, V.I.P. sends it to the recipient issuer. If this tag contains 05, V.I.P. does not send it to the recipient issuer.
83	34	Account Identifier Value	ANS	Contains account identifier value of the sender or the recipient. V.I.P. sends tag 83 to recipient issuer only if tag 82 contains 06.
84	2	Account Identifier Type Code	AN	Contains account identifier type. 00 = Other 01 = Routing transit number (RTN) and bank account 02 = IBAN 03 = Card account 04 = Email 05 = Phone number 06 = Bank account number (BAN) and bank identification code (BIC) 07 = Wallet ID 08 = Social network ID V.I.P. sends tag 84 to recipient issuer only if tag 82 contains 06.

Field 56 – Field 56 Dataset ID 02

Table 58: Dataset ID 02, Contact Information

Tag	Length	Value	Format	Content of Sub-Element
83	16	Other phone number	ANS	Contains phone number.
86	99	Other email address	ANS	Contains email address.
87	2	Account Reference Code	ANS	Contains any of these values to identify if account or entity belongs to the sender or the recipient: 05 = Payer (Sender) 06 = Payee (Recipient)
C0	2	Entity Type	ANS	Contains any of these values to identify if account or entity belongs to a business or an individual: 0B = Payer (Sender) 0I = Individual

Field 56 – Field 56 Dataset ID 03

Table 59: Dataset ID 03, Customer Identification Data

Tag	Length	Value	Format	Content of Sub-Element
80	99	Customer Identification (unspecified)	ANS	Contains market-specific customer identification.
82	35	National Identification	ANS	Contains country-issued national ID number.
85	35	Passport Number	ANS	Contains country-issued passport number.
86	35	Driver License	ANS	Contains country-issued driver's license number.
8A	35	Tax Identification	ANS	Contains country-issued tax ID number.

Usage of Customer Identification Data varies by region. For details, contact your Visa representative.

Field 56 – Field 56 Dataset ID 05

Acquirers must submit account owner data in this dataset in a two-byte length format. If acquirer submits account owner data in one-byte length format, V.I.P. ignores and drops this dataset for AFT and OCT requests.

Table 60: Dataset ID 05, Account Owner Data

Tag	Length	Value	Format	Content of Sub-Element
C0	2	Entity Type	ANS	Contains any of these values to identify if entity belongs to a business or an individual: 0B = Business 0I = Individual
80	2	Account Reference Code	N	Identifies the account or entity that owns the name data. Contains either: 05 (Sender name) 06 (Recipient name) If 05 and 06 are sent, they must each be in different Dataset ID 05. Acquirers can send and issuers can receive multiple instances of Dataset ID 05 based on the value in this tag.
81	2	Account Owner Type	ANS	Identifies the account owner type, in an Account Name Inquiry response, that the issuer populates in the 0110 account verification response. Values are: • 01 (Primary account owner) • 02 (Secondary account owner) The issuer may respond with up to two complete names using Tags 83, 84, and 85 for each name. If the issuer responds with only one name, the value 01 should be populated. If the issuer responds with an additional second name, the value 02 should be populated for that name. The value 02 should only be sent if 01 is also sent.
83	35	Account Owner Name, Given	ANS	Identifies first name of account or entity. Must not contain: All spaces All zeros All numerics Any question mark
84	35	Account Owner Name, Middle	ANS	Identifies middle name of account or entity. Must not contain: All spaces All zeros All numerics Any question mark

Table 60: Dataset ID 05, Account Owner Data

Tag	Length	Value	Format	Content of Sub-Element
85	35	Account Owner Name, Last	ANS	Identifies last name of account or entity. Must not contain: All spaces All zeros All numerics Any question mark
86 ^{1,3}	99	Account Owner Address Line 1	ANS	Contains the first line of the recipient address.
87 ^{2,3}	99	Account Owner Address Line 2	ANS	Contains the second line of the recipient address.
88 ^{2,3}	99	Account Owner Street Name	ANS	Contains the street name of the recipient address.
89 ^{2,3}	16	Account Owner Building Number	ANS	Contains the house or building number of the recipient address.
8A ^{2,3}	16	Account Owner Postal Code	ANS	Contains the postal code of the recipient address.
8B ^{1,3}	25	Account Owner City Name	ANS	Contains the city name of the recipient address.
8C ^{2,3}	16	Account Owner Country Subdivision Code, Minor	ANS	Contains the country ISO subdivision code of the recipient address.
8D	3	Account Owner Country Subdivision Code, Major	ANS	Contains the state or province ISO subdivision code of the recipient address. For Canadian Account Owner Data cross-border OCTs this tag is required if tag 8E contains the value of CAN or USA.
8E ¹	3	Account Owner Country Code	A	Contains the fixed length alpha-3 ISO country code of the recipient address.
8F	3	Account Owner Nationality	A, EBCDIC	Contains alpha country code for account owner's nationality.
90	3	Account Owner Country of Birth	A, EBCDIC	Contains alpha country code for account owner's country of birth.
91	1-35	Account Owner Occupation	ANS, EBCDIC	Contains account owner's occupation.
92	8	Account Owner Date of Birth	N, EBCDIC	Contains account owner's date of birth in <i>ccyyymmdd</i> format, where: cc = 01-99 (century) yy = 00-99 (year) mm = 01-12 (month) dd = 01-31 (day)

Table 60: Dataset ID 05, Account Owner Data

Tag	Length	Value	Format	Content of Sub-Element
97	1-99	Account Owner Email Address Personal	ANS, EBCDIC	Contains account owner's personal email address.

¹ This tag is required to comply with applicable law.

² This tag is optional.

³ If tag is received in one-byte format, V.I.P. drops the tag only.

TLV Field 56, Dataset ID 05 can be sent alone or in addition to existing TLV Field 104, Usage 2, Dataset ID 5F—Sender Data. If both fields are present, V.I.P. maps sender and recipient name data from TLV Field 56, Dataset ID 05, Tags 83, 84, and 85 to TLV Field 104, Usage 2, Dataset ID 5F, Tags 03 and 0A, and forwards both the fields.

A separate TLV Field 56, Dataset ID 05 for sender and recipient data must be present for mapping to occur.

In TLV Field 104, Usage 2, Dataset ID 5F, maximum length of Tag 03 and 0A is 30 alphanumeric characters. If mapped, data from TLV Field 56, Dataset ID 05 tags 83, 84, and 85 is truncated to the first 30 alphanumeric characters. Data is formatted in order of last name, space, first name, space, followed by middle name.

If an acquirer submits account owner data in one-byte format, V.I.P. ignores it. Account owner data must be submitted in two-byte format.

For all Canadian cross-border OCTs, acquirers must submit account owner data in two-byte format, otherwise, V.I.P. declines the transaction with response code **64** (Transaction does not fulfill AML requirement).

Canadian issuer recipients of cross-border Canadian OCTs must support two-byte length; otherwise, V.I.P. declines the transaction with response code **57** (Transaction not permitted to cardholder).

Field 56 – Field Edits

TLV Format: The field must be correctly formatted.

Field 56 – Reject Codes

0494 = Field or data missing or invalid

Field 59 – National Point-of-Service Geographic Data

Field 59 – Attributes

variable length

1 byte, binary +

14 ANS, EBCDIC; maximum 15 bytes

Field 59 – Description

A national-use field to identify an intra-country geographical location. Visa uses this field to describe the location of a cardholder transaction within the country of the card acceptor. (The card acceptor country is identified in Field 43-Card Acceptor Name Location.) Field 59 contains this data:

- For U.S. card acceptors, this field contains a numeric state code (except for U.S. embassies and consulates) or numeric state code and numeric ZIP code.
- For Canadian card acceptors, this field contains a numeric province code or numeric province code and alphanumeric postal code.
- For card acceptors from other countries, if this field is sent, the value must be a 1-14 position alphanumeric postal code left-justified and truncated with no padding.

If the card acceptor is located in the U.S. or Canada, this field conforms to the ANSI X9A2 definition of U.S. and Canadian geographic data.

This field has three subfields after the length subfield, as defined below.

	Positions: 1-2	3-5	6-10, -11, -13, or -14
length	card acceptor state or province code	card acceptor county code	card acceptor ZIP or postal code
Byte 1	Byte 2-3	Byte 4-6	Byte 7-15

Length: Number of bytes following the length subfield.

Card Acceptor State or Province Code (Positions 1-2): This subfield contains zeros if not applicable; or for a U.S. card acceptor, contains a 2-digit numeric state code defined by ANSI X3.38-1972 (revised 1977).

U.S. Card Acceptor County Code (Positions 3-5): This optional subfield (county not country code) is omitted if not applicable and no ZIP code is present. The subfield is present if:

- It contains a county code and a ZIP or postal code is present.
- It contains zeros if not applicable and a ZIP or postal code is present.
- For a U.S. card acceptor, it contains a 3-digit numeric county code as defined in FIPS PUB 6.3, 1979 (Federal Information Processing Standards Publication-Counties and County Equivalents of the States of the United States).

This subfield does not apply to Canadian transactions. It must be zero-filled by Canadian card acceptors that are providing a postal code.

U.S. or Canadian Card Acceptor Postal Code or ZIP (Positions 6-10, 6-11, 6-13, or 6-14): This optional subfield is omitted if not applicable.

If present in a U.S. transaction, it contains the 5-digit or 9-digit ZIP Code (5-digit ZIP code plus 4-digit extension) for the location of this cardholder transaction.

If present in a Canadian transaction, it contains the 6- or 9-character alphanumeric postal code (the 9-character alphanumeric Canadian postal code is the 6-character alphanumeric postal code followed by three zeros). Typical field uses are shown below.

With State/Province Code only:	Length = 2	State/Province Code = NN
---------------------------------------	------------	--------------------------

With State Code and 5-Digit ZIP Code:	Length = 10	State Code = NN	000	ZIP Code = NNNNN
--	-------------	-----------------	-----	------------------

With State Code and 9-Digit ZIP Code:	Length = 14	State Code = NN	000	ZIP Code = NNNNNNNNN
--	-------------	-----------------	-----	----------------------

With 5-Digit ZIP Code only:	Length = 10	00	000	ZIP Code = NNNNN
------------------------------------	-------------	----	-----	------------------

With 9-Digit ZIP Code only:	Length = 14	00	000	ZIP Code = NNNNNNNNN
------------------------------------	-------------	----	-----	----------------------

With Province Code and 6-Digit Postal Code:	Length = 11	Prov. Code = NN	000	ZIP Code = NNNNNN
--	-------------	-----------------	-----	-------------------

With Province Code and 9-Digit Postal Code:	Length = 14	Prov. Code = NN	000	ZIP Code = NNNNNN000
--	-------------	-----------------	-----	----------------------

Field 59 – Usage

This field is required in U.S., and Canada.

Card acceptors in U.S. and Canada: State code is required in requests containing field 43 with a **US** (United States) country code. Province code is required in messages containing field 43 with a **CA** (Canada) country code.

When required, this field is used in all requests and advices related to a cardholder transaction. It is not used in responses or advice responses.

County and ZIP/postal codes are optional. If the acquirer chooses to submit ZIP/postal codes, the ZIP Code may be five or nine digits; that is, the total field length must be 10 or 14. The first five ZIP Code subfield positions must not be all **spaces** or all **zeros**, and cannot have embedded spaces. The ZIP Code extension can be **0000**.

The Canadian postal code may be six or nine alphanumeric characters; that is, the total field length must be 11 or 14. The 9-character alphanumeric version is the 6-character alphanumeric code followed by three **zeros**. The county code subfield (positions 3-5) should be zero-filled.

Positions 3-5 are used for a county code, not a country code; that is, country codes 840 or 124 are not allowed in these positions.

CPS: For U. S.-acquired CPS/Automated Fuel Dispenser transactions and CPS/ATM card transactions, if field 43 is present, a state code and ZIP Code are required. For Canadian-acquired CPS/ATM transactions, if field 43 is present, a province code is required. The CPS downgrade reason code is IS.

Visa Smart Debit/Visa Smart Credit (VSDC): This field is optional in 0620 issuer authentication failure or issuer script results advices.

Advices From BASE II Endpoints: This field is present if it was in the BASE II record, except in fee collection/funds disbursement advices (Visa only).

ATM Transaction Standardization Options (Plus): If field 59 is present in requests from Plus acquirers (network ID = **0004**) with 00 in the first two positions, and if field 43.3 (positions 39-40) is not **US** or **CA**, V.I.P. replaces the zeros with spaces, regardless of the acquirer's ATM Network Compatibility settings in CORE.

For ATM Network Compatibility participants, V.I.P. drops field 59 entirely from the request if it encounters zeros or spaces in positions 1 and 2 and if there are no more subfields, regardless of the content of field 43.3.

Card acceptors in other countries:

This field must:

- Be left-justified
- Begin in position 1, up to 14 positions
- Be truncated after last character
- Contain no padding of **zeros** or **spaces**

Fraud Reporting: These points apply.

- Client-generated:
 - Positions 1-2: For Canada or U.S. only, these positions must contain a Canadian Province Code or State Code from the original sales draft transaction. All non-US or non-Canadian messages must contain spaces.
 - Positions 3-5: If present, the field must match the Card Acceptor County Code in the original transaction.
 - Positions 6-10, 6-11, or 6-14: If present, the field must match the card acceptor ZIP or postal code from the original transaction.
- Visa-generated: The field contains national geographic data from the original fraud transaction. The field may be present if reported in the original fraud transaction.

Positions 3-5 are not returned.

Collection-Only Transactions: This field is optional in 9240 messages.

Field 59 – Field Edits

This field must be present when the message includes field 43 and the country in that field is **US** or **CA**, but only the state/province code subfield must be supplied. If present, whether or not field 43 also is, the content is edited.

The length must be **2, 5, 10, 11**, or **14**.

U.S. State code must be one of the codes in the Valid Values section. Canadian Province code must be one of the codes in the Valid Values section.

Field 59 – Reject Codes

0028 = Invalid length

0029 = Invalid geographic data

0301 = Length attribute missing

0302 = Field missing

0643 = Invalid national POS geographic code

0644 = Invalid national POS ZIP code

Field 59 – Valid Values

The ANSI codes for U.S. territories such as Puerto Rico, Guam, the Virgin Islands, and others, are not used in field 59. These entities are coded as countries in field 19 or in field 43 or in both.

Table 61: U.S. State Codes

State Name	Code
Alabama	01
Alaska	02
Arizona	04
Arkansas	05
California	06
Colorado	08
Connecticut	09
Delaware	10
District of Columbia	11
Florida	12
Georgia	13
Hawaii	15
Idaho	16
Illinois	17
Indiana	18
Iowa	19
Kansas	20
Kentucky	21
Louisiana	22
Maine	23
Maryland	24
Massachusetts	25
Michigan	26
Minnesota	27
Mississippi	28

Table 61: U.S. State Codes

State Name	Code
Missouri	29
Montana	30
Nebraska	31
Nevada	32
New Hampshire	33
New Jersey	34
New Mexico	35
New York	36
North Carolina	37
North Dakota	38
Ohio	39
Oklahoma	40
Oregon	41
Pennsylvania	42
Rhode Island	44
South Carolina	45
South Dakota	46
Tennessee	47
Texas	48
Utah	49
Vermont	50
Virginia	51
Washington	53
West Virginia	54
Wisconsin	55
Wyoming	56
U.S. military base, embassies, traveling merchants	99

Table 62: Canada Province Codes

Province Name	Code
Alberta	60
British Columbia	61
Manitoba	62
New Brunswick	63
Newfoundland and Labrador	64
Northwest Territories	65
Nova Scotia	66
Ontario	67
Prince Edward Island	68
Quebec	69
Saskatchewan	70
Yukon	71
Nunavut	72

Field 60 – Additional POS Information

Field 60 – Attributes

variable length

1 byte, binary +

12 N, 4-bit BCD (unsigned packed), 7 bytes total

Field 60 – Description

This is a private-use field defined by Visa to provide additional information about the point of service.

	Positions: 1	2	3	4	5-6
length	F60.1 terminal type	F60.2 terminal entry capability	F60.3 chip condition code	F60.4 unused	F60.5 Not applicable
Byte 1	Byte 2		Byte 3		Byte 4
	Positions: 7	8	9-10	11	12
	F60.6 chip transaction indicator	F60.7 chip card authentication reliability indicator	F60.8 Not applicable	F60.9 cardholder ID method indicator	F60.10 spare
	Byte 5		Byte 6	Byte 7	

Length: Number of bytes following the length subfield.

Position 1, Terminal Type (field 60.1): A 1-digit code that identifies the terminal type.

Position 2, Terminal Entry Capability (field 60.2): This 1-digit code identifies the terminal entry capability to electronically read the magnetic stripe.

Field 22-POS Entry Mode Code indicates how the account number for this transaction was input at the terminal. Codes **0-5** for this subfield parallel the codes for field 22, positions 1-2.

Position 3, Chip Condition Code (field 60.3): This field contains a 1-digit code that provides information about fallback transactions, which are initiated from the magnetic-stripe of VSDC cards at VSDC terminals. Although a value of **0** in the field indicates that the transaction is not a fallback transaction, it may be excluded from VSDC transactions where the chip is read.

Position 4, Special Condition Indicator (field 60.4): Unused.

Position 5-6, Merchant Group Indicator (field 60.5): Not applicable.

Position 7, Chip Transaction Indicator (field 60.6): This 1-digit code is set by full VSDC data acquirers when they receive the message from the terminal that indicates a chip-based transaction. For transaction details, see “Visa SmartDebit/Visa Smart Credit” under “Usage.”

Position 8, Chip Card Authentication Reliability Indicator (field 60.7): This 1-digit code indicates the reliability of card authentication. Full VSDC data acquirers set this code when they are experiencing problems with a merchant or terminal, and Visa sets this code when the acquirer or issuer is inactive for card authentication. For transaction details, see “Visa Smart Debit/Visa Smart Credit” under “Usage.”

Position 9-10, Mail/Phone/Electronic Commerce and U.S. Bill Payment Indicator (field 60.8): Not applicable.

Position 11, Cardholder ID Method Indicator (field 60.9): This 1-digit code identifies the cardholder identification method used for a transaction. Issuers can optionally receive this field in all 0100 authorizations and 0120/0220 advices.

Field 60 – Usage

Field 60 can be used in all requests and advices related to a cardholder transaction, except as noted in discussions of subfields.

If fields 60.1 and 60.2 were present in an original 0200 request or 0220 advice, they are required in subsequent requests or advices.

Issuers choosing to receive field 60.9 receive it in all messages allowing one or more field 60 subfields.

Advices From Clearing Endpoints: This field is present if it was in the clearing record, *except in fee collection/funds disbursement advices*.

Fraud Reporting:

- Client-generated-This field is required. The field must match the value in the original transaction for Terminal Type and Terminal Entry Capability. If the field was not present in the original transaction, the field must be populated with **0**.
- Visa-generated-The field contains the Additional POS Information from the original fraud transaction. The field may be present if reported in the original fraud transaction.
- ICS and NRI/PS604: This field is not required.

Field 60, position 1, is not returned if field 22, position 3, was not on the original fraud transaction.

STIP and Switch Advices: This field is present if it was in the request or was added to the request by VisaNet.

Visa iCVV Convert: V.I.P. masks each of these fields with zero to fill the position if the fields are present, or drops the fields if no subsequent field 60 fields are present.

- Field 60.3 (Chip Condition Code)
- Field 60.6 (Chip Transaction Indicator)
- Field 60.7 (Chip Authentication Reliability Indicator)

VSDC: Fields 60.2, 60.3, 60.6, and 60.7 are used in Visa or Plus Automated Teller Machine (ATM) transactions as follows.

Field 60.2 (position 2): Code **5** in field 60.2 indicates that the terminal has been enabled to read a chip card. The terminal should reflect the highest level of capability. For example, if the terminal is chip and magnetic stripe read capable, it should be identified as a chip-capable terminal.

For all chip transactions processed by chip-capable devices, acquirers must send the value of **5**, along with other necessary chip data, in request messages. V.I.P. adds field 60.2, value **5**, if not present, or converts **0** to **5** in field 60.2 when field 22 contains **05** or **95**.

Acquirers must use **5** only if the device is capable of reading, processing, and sending the chip data on a VSDC card.

This field is required in these messages:

- 0200 cash disbursements, balance inquiries, and account transfers
- 0220 STIP advices
- 0620 chip-based informational advices

It is required in these messages if present in the original:

- 0420 reversal advices

It is optional in these messages:

- 9620 fraud advices

Data field requirements for advices from clearing endpoints are identical to those for STIP advices.

Field 60.3 (position 3): This field applies to magnetic stripe read transactions where the card and terminal are chip capable. The field does not apply to VSDC transactions where the chip is read; it is used only when the chip card's magnetic stripe is read instead of the chip.

- When the transaction is initiated from the magnetic stripe of a VSDC card, the value is **1** or **2**, depending on whether it was preceded by a chip read failure.
- When the transaction is not initiated from the magnetic stripe of a VSDC card, the value in this field, if present, should be **0**. This is the case when the transaction contains chip data from a VSDC card or when the transaction was initiated from a magnetic-stripe-only card.

If this field is present and the value is invalid, or if the issuer does not participate in the VSDC Service, V.I.P. converts it to zero.

For magnetic stripe-read transactions at VSDC ATMs, this field is optional in these full VSDC messages:

- 0200 cash disbursements, balance inquiries, and account transfers
- 0220 STIP advices

Data field requirements for advices from clearing endpoints are identical to those for STIP advices.

Field 60.6 (position 7): This field is required for full VSDC transactions.

The value that acquirers use to populate field 60.6 must be consistent with the format used for chip data. The value **1** indicates that the acquirer used the standard format of the third bitmap or field 55 to submit the chip data. The value **2** indicates that the acquirer submitted the chip data using the expanded third bitmap format. Acquirers must not populate the field with the value **3**.

If field 60.6 is not provided and the transaction contains chip data in field 55 V.I.P. populates field 60.6 with the value of **1**.

Visa Token Service: A value of **4** in field 60.6 is required in messages with token data.

When the chip card type is CCD or Generic EMV Transport and the acquirer is still using the standard third bitmap format to submit chip data, V.I.P. changes the value to **3** in transactions sent to issuers. V.I.P. rejects the transaction if the acquirer populated field 60.6 with the value **3**.

For full VSDC transactions, this field is required in these messages:

- 0200 cash disbursements, balance inquiries, and account transfers
- 0220 STIP advices

Data field requirements for advices from clearing endpoints are identical to those for STIP advices.

Field 60.7 (position 8): This field indicates card authentication reliability. The acquirer or VisaNet can set this field in the field. Acquirers set it when they have problems with the terminal or merchant. VisaNet sets it when the acquirer or issuer is not processing card authentications. For full VSDC transactions, this field is required in these messages:

- 0200 cash disbursements, balance inquiries, and account transfers
- 0220 STIP advices

Data field requirements for advices from clearing endpoints are identical to those for STIP advices.

Cardholder ID Method Indicator

These field 60.9 processing rules apply:

- V.I.P. supplies a value representing the Cardholder ID Method Indicator in field 60.9. Acquirers are not required to submit this value.
- V.I.P. forwards the Cardholder ID Method value to issuers that have chosen to receive it. The field is also present in raw data.

- Field 60.9 is used in these messages:
 - 02xx-All original 02xx messages and original clearing advices
 - 04xx-Original reversals and reversal advices, not dispute financials
- V.I.P. does not return the Cardholder ID Method value to acquirers in responses.

Field 60.9 is not currently used in 9620 Fraud Reporting messages. Clients should continue to use position 219 of field 125 for the cardholder ID method in fraud messages.

Field 60 – Field Edits

The value in the length subfield may not exceed **6**.

VSDC: If an acquirer uses a value of **3** in field 60.6, V.I.P. rejects the transaction with reject code **0105**.

Card Absent transactions E-Commerce: The value in subfield 60.8 must be 05, 06, 07, or 08 for e-commerce authorization transactions.

If the first subfield = **2**, field 52 must be present except in the case of reversals.

Field 60 – Reject Codes

0105 = Invalid value

0360 = Field missing

0733 = Acquirer does not support partial authorization

Field 60 – Valid Values

Table 63: Field 60 Additional POS Information Values

Code	Definition
Subfield 60.1/Position 1: Terminal Type	
0	Unspecified
2	Automated Teller Machine (ATM)
Subfield 60.2/Position 2: Terminal Entry Capability	
0	Unknown
2	Magnetic stripe read capability

Table 63: Field 60 Additional POS Information Values

Code	Definition
5	Contact chip, magnetic-stripe, or proximity-capable terminal, indicating that the terminal can read the chip and the magnetic stripe on the card. If contact chip is supported, a 5 should be used regardless of whether Visa Contactless is also supported.
8	Proximity-read-capable, indicating that the terminal can read a proximity chip using a Visa contactless specification but cannot read a contact chip on a card. For Visa Contactless, an 8 should be used only if Visa Contactless is supported and contact chip is not.
Subfield 60.3/Position 3: Chip Condition Codes	
0	Not applicable to fall back transactions. Not applicable; subsequent field 60 fields are present. For VSDC transactions, field 60.3 must contain a 0 or be excluded from the message.
1	This value applies to fall back transactions. Transaction was initiated from a magnetic stripe with a service code beginning with 2 or 6 and the last read at VSDC terminal was a successful chip read or was not a chip transaction.
2	This value applies to fall back transactions. Transaction was initiated at a chip-capable terminal from a magnetic stripe that contains service code 2 or 6 , and the previous transaction initiated by that terminal was an unsuccessful chip read.
Subfield 60.4/Position 4: Unused	
Subfield 60.5/Positions 5-6: Not Applicable	
Subfield 60.6/Position 7: Chip Transaction Indicator	
0	Not applicable; subsequent subfields are present. When an Early Data option acquirer, or a Full Data Option acquirer, submits Early Data, field 60.6 must contain 0 or be excluded from the message
1	This value is sent by acquirers using the standard third bitmap or field 55 to submit chip data.
2	This value is sent by acquirers using the expanded third bitmap format for their chip data rather than field 55. The value 2 applies only to acquirers; V.I.P. changes it to 1 before the request is forwarded to the issuer.
3	V.I.P. (not the acquirer) inserts this code and also downgrades the transaction by dropping chip data section.
Subfield 60.7/Position 8: Chip Card Authentication Reliability Indicator	
0	Fill for field 60.7 present, or subsequent positions that are present
1	Acquirer indicates that Card Authentication may not be reliable

Table 63: Field 60 Additional POS Information Values

Code	Definition
2	V.I.P. indicates acquirer inactive for Card Authentication
3	V.I.P. indicates issuer inactive for Card Authentication
Subfield 60.8/Positions 9-10: Not Applicable	
Subfield 60.9/Position 11: Cardholder ID Method Indicator	
0	Not specified
1	Signature
2	Online PIN
3	Unattended terminal, no PIN pad
4	Mail/Telephone/Electronic Commerce

Field 61 – Other Amounts

Field 61 – Attributes

variable length

1 byte, binary +

12 N, 4-bit BCD (unsigned packed), 7 bytes total

or 24 N, 4-bit BCD (unsigned packed), 13 bytes total

or 36 N, 4-bit BCD (unsigned packed), 19 bytes total

Field 61 – Description

Field 61 is a private-use field used by Visa for one or more amounts related to a customer transaction. This field has one length subfield followed by three subfields.

The field 61.1 usage shown here is for fraud reporting only. For other uses of field 61.1, see *V.I.P. Full Service POS Online Messages Technical Specifications*.

	Positions: 1-12	13-24	25-36
length	Field 61.1	Field 61.2	Field 61.3
	other amount, transaction-fraud amount	not applicable	other amount, replacement billing

Length Subfield: This value indicates the number of bytes following the length subfield; the value does not include the length subfield itself.

Field 61.1, Positions 1-12-Other Amount, Transaction: This field is used only in fraud reporting messages. Field 61.1 contains the cashback amount expressed in the acquirer transaction currency.

The currency of the amount shown is identified in Field 49-Currency Code, Transaction. The location of the implied decimal point in this value depends on the currency (see the appendix titled “Country and Currency Codes”).

Field 61.2, Positions 13-24-Not applicable.

Field 61.3, Positions 25-36-Other Amount, Replacement Billing: This field, which is supported for VisaNet Integrated Payment (V.I.P.) Authorization-Only endpoints, is for multicurrency only and is added at the VIC in 0400/0420 partial reversals for participating issuers if currency conversion is required; otherwise, the field is not used. The location of the implied decimal point in this value depends on the currency. The currency code is identified in field 51.

Field 61 – Usage

Fraud Reporting: This field is numeric with two decimal places implied. This field must be entered if the cashback field (in position 209 of field 125 in 9620 fraud advices) contains a **Y**. This field is required for fraud reporting and must match the value in the original transaction. If entered, the amount must be in the currency of the reported transaction.

- ICS and NRI/PS604: This field is not required.

Partial Reversals (for V.I.P. Authorization-Only Endpoints): When Visa adds field 61.3 to 0400 and 0420 partial reversals, it contains the field 95.1 amount in cardholder billing currency. The value includes the optional issuer fee.

AFT Transactions: Issuers do not receive Field 61.3 for a partial reversal.

Field 61 – Field Edits

There are no field 61 edits for fraud reporting.

Field 61 – Reject Codes

There are no field 61 reject codes for fraud reporting.

Field 62 – Custom Payment Service (CPS) Fields Bitmap

Field 62 – Attributes

1 byte, binary +
variable by subfield
maximum: 255 bytes

Field 62 – Description

This is a Visa-defined private-use field. Visa has defined field 62 for private use with CPS transactions and some non-CPS transactions as well. CPS participants must have successfully completed testing to receive field 62.

Table 64: Field 62 CPS Bitmapped Subfields

Description	Bytes	No. Pos.	Format
Length Subfield	1	n/a	Binary
62.0 Field 62 Bitmap	8	64	Bit String
62.1 Auth. Characteristics Indicator	1	1	AN
62.2 Transaction Identifier	8	15	N, BCD
62.3-62.20	unused		
62.21 Online Risk Assessment Risk Score and Reason Codes	4	4	AN
62.22 Online Risk Assessment Condition Codes	6	6	AN
62.23 Product ID	2	2	AN
62.24 Program Identifier	6	6	AN
62.25	unused		
62.27 ATM Routing Table Unique Identifier	7	7	N, EBCDIC

Field 62 – Usage

Fields 62.0-62.2 apply for financial messages except fee collections/funds disbursements, balance inquiries, and account transfers.

Not all “Field 62” fields apply only to Custom Payment Services; some also apply to non-CPS applications.

Visa Advanced Authorization: VisaNet Integrated Payment (V.I.P.) inserts field 62.21 in original financial requests destined for participating issuers. V.I.P. also inserts field 62.22 in original financial requests destined for participating issuers only if they elect to receive it. Neither field is returned in responses, nor are they used in reversals.

Field 62 – Field Edits

The value in the length subfield in Automated Teller Machine (ATM) cash disbursements must be **9**, **17**, or **21**.

Field 62 – Reject Codes

0151 = invalid length

Field 62.0 – Field 62 Bitmap

Field 62.0 – Attributes

64 N, bit string, 8 bytes

Field 62.0 – Description

A bitmap specifying which field 62 subfields are present (shown in this table). Currently, only byte 1 applies to Visa and Plus ATM transactions. The rest are set to zero and are reserved for point-of-sale transactions or for future use.

Table 65: Field 62.0 CPS Bitmap

		Byte 1				Byte 2				Byte 3					Byte 4								Bytes 5-8
Field 62.0 Bitmap		1	2	3	4-8	1-2	3	4-8		1-4	5	6	7	8	1	2	3	4	5	6	7	8	Not Applicable
62.1	Auth. Char. Indctr (0200)	✓			n/a	n/a		n/a		n/a			n/a										
62.2	Trans Idtfr (0200)	✓																					
62.3-62.10		Not applicable																					
62.11	n/a						✓																
62.12-62.20		Not applicable																					
62.21	Online Risk Assessment Risk Score and Reason Codes										✓												
62.22	Online Risk Assessment Condition Codes											✓											

Table 65: Field 62.0 CPS Bitmap

		Byte 1				Byte 2				Byte 3					Byte 4								Bytes 5-8
Field 62.0 Bitmap		1	2	3	4-8	1-2	3	4-8		1-4	5	6	7	8	1	2	3	4	5	6	7	8	Not Applicable
62.23	Product ID												✓										
62.24	Program Identifier													✓									
62.25	n/a														✓								
62.27	ATM Routing Table Unique Identifier															✓							

Field 62.0 – Usage

Not all “Field 62” fields apply only to Custom Payment Services. Some apply to non-CPS applications as well.

Field 62.0 must be present if any of its subsequent subfields are present. If no subsequent subfields of 62.0 are present, acquirers should not send field 62.0.

To include bitmapped field 62 in requests or advices or receive 62.xx subfields in related responses, originators must use **2** or x'**1A**' in header field 3 of the request or advice.

For an endpoint that is receiving a request or advice, V.I.P. determines which format to send by the option the endpoint has specified in its PCR setup.

Fraud Reporting: See field 62.2 for fraud reporting requirements.

Visa Advanced Authorization: VisaNet Integrated Payment (V.I.P.) inserts field 62.21 in 0200 requests destined for participating issuers. V.I.P. also inserts field 62.22 in 0200 requests destined for participating issuers only if they elect to receive it. Neither field is returned in responses, nor are they used in reversals.

Field 62.0 – Field Edits

None.

Field 62.0 – Reject Codes

None.

Field 62.1 – Authorization Characteristics Indicator (Bitmap Format)

Field 62.1 – Attributes

fixed length

1 AN, EBCDIC; 1 byte

Field 62.1 – Description

The Authorization Characteristics Indicator (ACI) is a code used by the acquirer to indicate that the complete and unaltered magnetic stripe has been read and sent, and that the owner name and location are present. If applicable, the code is changed by VisaNet to reflect the results of VisaNet's evaluation of the request. This table shows which ACI is submitted by the acquirer in the request and which ACIs are assigned by VisaNet as a result of its evaluation.

Table 66: Field 62.1 CPS Authorization Characteristics Indicators—Bitmap Format

Acquirer sends ACI	Acquirer Receives:		Because...
	Qualified	Not Qualified	
Y (Transaction requests qualification)	E	N	Card present; magnetic stripe read and sent, ATM owner name and location present

Field 62.1 – Usage

International Only: For international transactions, if the transaction does not meet CPS qualification criteria, the transaction is returned with an **N**.

For ATM requests, except those for Visa ReadyLink ATM loads (as explained in a later subsection), the acquirer sets the value to **Y**, and if it qualifies, receives an **E** in the 0210 response. If the request does not qualify or is declined, the acquirer receives an **N** in the response. When the original response is qualified, subfield 62.1 must be included in subsequent related messages, and the value must match the original response. When the

original response contains an N, subfield 62.1 must **not** be included in subsequent related messages.

This field is optional in an 0200 cash disbursement request.

This field is optional in responses, but must match the value from the request when included in the response.

This subfield is required in 0220 misdisbursement or back-office adjustment and 0400/0420 reversals only if it was present in the qualified 0210 response. The value in the advice must match the value in the response. This subfield is optional in an 0410/0430 response if it was present in the 0400/0420 advice, but if included, the value must be from the advice.

If the 0200 request is reversed before receiving the 0210 response, or the original request did not qualify, the reversal must not include subfields of field 62 including the bitmap.

This field is required in an 0422 dispute financials and dispute financial reversals only when the original 0210 qualified. When present in an 0422 dispute financial, the value must match the original 0210 response.

This field is required in an 0220 dispute response financial if present in the 0422 dispute financial, and the value must match the 0422 request.

The subfield 62.1 response value provided to full service acquirers has no bearing on the interchange reimbursement fee for the transaction. Completed and approved Visa and Plus ATM transactions from full service ATM acquirers that are otherwise eligible for the International ATM Tier II interchange reimbursement fee is not impacted by the response value in this field.

STIP and Switch Advices: This subfield is present in the following advices if it was in the request and the issuer has successfully been tested to receive it:

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 or 0620 advice

Visa ReadyLink ATM Load Transactions: V.I.P. inserts a **T** in full financials, to indicate that a CPS program was not available when authorized.

Visa ReadyLink ATM load messages do not qualify for CPS/ATM programs. However, to support traceability, endpoints should provide CPS data fields in response messages.

Acquirers must include the value from full-financial request responses in adjustments and representments. Acquirers are not required to include the value from full-financial request responses in reversals. Issuers must include the value from full-financial requests in dispute financials.

Transactions that do not meet token processing requirements but qualify for CPS processing receive the ACI value corresponding to the qualifying CPS program. Transactions that do not qualify for CPS processing receive ACI values **N** or **T**.

Field 62.1 – Field Edits

This subfield must be present (as described in the “Usage” information above).

Exception requests (reversals, adjustments, dispute financials, dispute financial reversals, or dispute response financials) are rejected if the value in field 62.1 is invalid.

Field 62.1 – Reject Codes

0152 = Invalid value

0483 = Field missing

Field 62.1 – Valid Values

The value **N** is not for exception request messages (reversals, adjustments, dispute financials, dispute financial reversals, or dispute response financials).

See “Description” and “Usage” in this subfield description.

Field 62.2 – Transaction Identifier (Bitmap Format)

Field 62.2 – Attributes

fixed length

15 N, 4-bit BCD (unsigned packed); 8 bytes

Field 62.2 – Description

A right-justified, Visa-generated identifier that is unique for each original financial transaction. The transaction identifier (TID) is a key element that links original messages to subsequent messages, such as related exception messages.

Field 62.2 – Usage

V.I.P. populates this field in all original request and response messages. The acquirer does not include this subfield in 0200 cash disbursements. For these, V.I.P. assigns field 62.2 to all CPS and non-CPS transactions and sends the field to issuers that have successfully completed testing to receive it.

This subfield is optional in 0210 issuer responses. If issuers do not include this subfield in a response, V.I.P. inserts it for participating acquirers. The value in a response must match the value from the request.

V.I.P. includes the TID on fee collection and funds disbursement messages identified as original financial transactions.

For the TID to be present in a message, the CPS fields bitmap in field 62.0 must be present as well, with byte 1, bit 2, set to **1**.

Participating acquirers and issuers must have successfully completed testing to receive field 62.2 in request and response messages.

Domestic and International: Except where indicated otherwise, this field is required in the 0420 reversal advice if it was present in the original 0210 response. Because this is a retain-and-return field, acquirers and issuers must submit the value from the original response in system-generated adjustments, dispute financials, dispute financial reversals, and dispute response financials.

This field is not required in back-office adjustments. However, it is advisable to include this field whenever possible.

Visa ReadyLink ATM Load Transactions: V.I.P. inserts a value for this field in full-financial messages. Acquirers must include the value from full-financial request responses in adjustments and dispute response financials. Acquirers are not required to include the value from full-financial request responses in reversals. Issuers must include the value from full-financial requests in dispute financials.

STIP and Switch Advices: This subfield is present in these advices:

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

Advices From BASE II Endpoints: Field 62.2 is provided if present in the BASE II record, except for non-U.S. fee collection, funds disbursement advices (Visa only).

Fraud Reporting:

- Client-generated – U.S. only: The field contains the transaction identifier from the original transaction. For ICS and NRI/PS604, this field is not required.
- VisaNet-generated – The field contains the transaction identifier from the original fraud transaction. The field may be present if reported in the original fraud transaction.

Adjustments for Duplicate Transactions: Field 62.2 must be present. Additional requirements are specified in the descriptions for fields 25 and 63.3.

For incremental authorizations, V.I.P. places the original transaction identifier from field 62.2 or field 125 in field 62.2 *and* in field 125 and forwards the request to the issuer. If the issuer cannot accept field 125, the original transaction identifier is only sent in field 62.2. V.I.P. does not assign a new transaction identifier.

Field 62.2 – Field Edits

The transaction identifier must be allowed for exception transactions; otherwise, the transaction is rejected with reason code **0153**.

This subfield must be numeric and present in all exception item requests and advices.

If present in the original, the transaction identifier should be copied into the reversals. The value must be from the original request response. Values in this subfield that do not match the original are rejected by V.I.P. with reject code **0153** – invalid value.

If the acquirer is unable to provide the TID in the 0420 reversal request, V.I.P. populates this field.

Adjustments for Duplicate Transactions: If V.I.P. receives an adjustment transaction with a field 3, position 1–2, value of 22, and a field 63.3 value of **2108**, but field 62.2 is not present, the transaction is rejected with reject code **0483**.

Field 62.2 – Reject Codes

0153 = Invalid value

0483 = Field missing

Field 62.21 – Online Risk Assessment Risk Score and Reason Codes

Field 62.21 – Attributes

fixed length

4 AN, EBCDIC, 4 bytes

Field 62.21 – Description

Field 62.21 is a Visa private-use field that contains online risk assessment information from Visa Advanced Authorization. This information assists issuers in the authorization decision-making process.

Visa Advanced Authorization is a global product. Contact your Visa representative.

This field is not part of Custom Payment Services.

The field format is shown below.

Positions: 1–2 3		4
risk score	reason code 1 (reserved)	reason code 2 (reserved)
Byte 1–2	Byte 3	Byte 4

Positions 1–2, Risk Score: This value indicates the degree of risk associated with a transaction. This two-byte transaction risk score is represented by a numeric value from **01–99**.

Position 3, Reason Code 1: This position is reserved for future use.

Position 4, Reason Code 2: This position is reserved for future use.

Field 62.21 – Usage

V.I.P. inserts this field in original financial requests sent to issuers if they elect to receive it. V.I.P. inserts the field after the risk assessment function has returned a score for the request.

The field is not used in responses; V.I.P. drops it if it is present. This field does not apply to reversals.

Visa Advanced Authorization – U.S.: V.I.P. inserts this field in original financial requests sent to issuers.

Visa Advanced Authorization – Canada: Issuer participation is optional and based on client configuration parameters. Canada issuers (processors) that participate in this option must support the use of this field in authorizations, full-financial requests, and related advices. Issuer (processor) support of field 62.22 is also required.

Visa Advanced Authorization – AP, CEMEA, Europe, and LAC: Issuer participation is optional, based on client configuration parameters. V.I.P. scores 0100 and 0200 requests and advices on Visa branded transactions. V.I.P. does not insert this field in 0100 OCT requests.

These transaction types are not scored by Visa Advanced Authorization:

- Visa Prepaid Healthcare and nonreloadable products.
- Visa Eligibility inquiry (processing code = **39**).
- Visa Prepaid activation and load (processing code = **28**).
- PIN Change (processing code = **70**)
- PIN Unblock/Prepaid activation (processing code = **72**).

If V.I.P. does not score the transaction, fields 62.21 and 62.22 are not sent to the issuer.

Field 62.21 – Field Edits

None.

Field 62.21 – Reject Codes

None.

Field 62.22 – Online Risk Assessment Condition Codes

Field 62.22 – Attributes

fixed length

6 AN, EBCDIC, 6 bytes

Field 62.22 – Description

Field 62.22 is a Visa private-use field that contains additional Visa Advanced Authorization online risk assessment information to assist issuers in the authorization decision-making process. The condition codes provide descriptive information for high-risk assessments.

Visa Advanced Authorization is a global product. Contact your Visa representative.

This field is not part of Custom Payment Services.

The field format is shown below.

Positions: 1–2	3–4	5–6
condition code 1	condition code 2	condition code 3 (reserved)
Byte 1–2	Byte 3–4	Byte 5–6

Positions 1–2, Condition Code 1: These positions may contain a Compromised Account Risk Condition Code (CARCC) related to a high-risk event in the Compromised Account Management System (CAMS). Two bytes, alphanumeric.

Positions 3–4, Condition Code 2: These positions may contain a Compromised Event Reference (CER) ID related to a high-risk CAMS event. Two bytes, alphanumeric.

Positions 5–6, Condition Code 3: These positions are reserved for future use.

Field 62.22 - Usage

V.I.P. inserts this field in 0200 requests sent to issuers if they elect to receive it. This field can be received only in conjunction with field 62.21; it cannot be sent separately.

The field is not returned in responses; if present, V.I.P. removes it. This field does not apply to reversals.

STIP and Switch Advices: This field is present in STIP and Switch advices if it was in the original request.

CAMS: When one or more high-risk events exist in CAMS for a given account, V.I.P. assigns a Compromised Account Risk Condition Code to the account and inserts it in positions 1–2 of this field. If an account is involved in multiple high-risk CAMS events, the riskiest condition code is assigned to the account and inserted in positions 1–2. If no high-risk events exist in CAMS for the account, the condition code is not included.

For certain CAMS events, a Compromised Event Reference (CER) ID for the event is included in positions 3–4 of this field. If a CAMS event does not exist, or if a CER ID for the event does not exist, a CER ID is not included. The CER ID allows issuers to identify which accounts were involved in a CAMS event. Thus, issuers can use the CER ID to manage risk assessment at the CAMS event level.

Because the CER ID is present for only some CAMS events, the Compromised Account Risk Condition Code may be present without a CER ID also being present. Issuers (processors) are not required to return field 62.21 or field 62.22 in and 0210 response messages. V.I.P. drops these fields if returned by issuers (processors).

Visa Advanced Authorization—U.S.: This field is optional for issuers. Issuers that wish to receive the CARCC in positions 1–2 or the CER ID in positions 3–4 must receive the field.

Visa Advanced Authorization—Canada: Issuer participation is optional and based on client setup. Canada issuers (processors) that participate in this option must support the use of this field in authorizations, full-financial requests, and related advices. Issuer (processor) support of field 62.21 is also required.

Visa Advanced Authorization—AP, CEMEA, Europe, and LAC: Issuer participation is optional and based on client setup.

Field 62.22 – Reject Codes

None.

Field 62.22 – Valid Values

Table 67: Field 62.22 Valid Values

Valid Values	Description
Positions 1–2: Compromised Account Risk Condition Code	
01–09	A 2-byte alphanumeric value relative to a high-risk CAMS event.
00	No Compromised Account Risk Condition Code assigned.
Positions 3–4: CER ID	

Table 67: Field 62.22 Valid Values

Valid Values	Description
0–9, A–Z	A 2-byte alphanumeric CER ID assigned to a significant CAMS event.
00	No CER ID assigned.
Positions 5–6: Reserved for future use	

Field 62.23 – Product ID

Field 62.23 – Attributes

fixed length

2 AN, EBCDIC, 2 bytes

Field 62.23 – Description

This field is supported for ATM and Plus ATM.

Using issuer-supplied data on file in the Cardholder Database or the product ID on the account range, V.I.P. populates this field with a product identification value. This value can be used to track card-level activity by individual account number. (See Field 62.24—Program Identifier.)

Field 62.23 – Usage

Visa optionally includes this field in all cardholder requests and responses and populates the field with product ID values for cards issued in all countries.

Issuers that support account-level processing (ALP) programs must return the assigned product identification value in this field of full-financial response messages. The product ID must not be sent in position 6 of field 38.

Acquirers that choose to receive product ID values in this field receive them for all transactions and for cards issued in all countries. Participating acquirers must be able to receive this field in responses to full-financial requests. These acquirers must use this field, not position 6 of field 38, to identify the applicable product ID for a transaction.

In some countries, issuers that support account-level processing and acquirers that choose to receive product ID values may be required to include or receive field 62.23 in authorization response messages.

Contact your Visa representative.

Processing Details: In addition to including this field in the request, V.I.P. ensures that the same value is present in the response and passes it to the acquirer, provided the acquirer can receive it.

This field is also sent in reversal requests, related advices, and responses.

This field may optionally be present in exception items and related advices and responses. In reversals and exception items, the field may be populated by the acquirer or the issuer.

This field may be received for programs not identified at the card level, in which case card-level processing rules do not apply.

Online File Maintenance: For V.I.P. authorization-only issuers, this field may be present in CDB 0120 advices and 0130 responses. Issuers that support ALP programs can use this field to inquire the CDB. This field is not used in 0302 inquiries but V.I.P. sends the field in 0312 responses.

Field 62.23 – Field Edits

None.

Field 62.23 – Reject Codes

None.

Field 62.23 – File Edits

None.

Field 62.23 – File Maintenance Error Codes

None.

Field 62.23 – Valid Values

The product IDs in this table are subject to change. To ensure that you are using the latest product IDs, please check with your Visa representative.

Table 68: Global Product ID Values

Product ID	Description
A	Visa Traditional
AX ¹	American Express
B	Visa Traditional Rewards
C	Visa Signature
D	Visa Signature Preferred

Table 68: Global Product ID Values

Product ID	Description
DI ¹	Discover
DN ¹	Diners
E	Proprietary ATM
F	Visa Classic
F2 ⁴	Visa Installment Credential
F3 ⁴	Visa Installment Credential Standard
G ^{^2}	Visa Business
G1	Visa Signature Business
G3	Visa Business Enhanced Visa Platinum Business
G4	Visa Infinite Business
G5	Visa Business Rewards
I	Visa Infinite
I	Visa Infinite Privilege
	Visa Private Credit Consumer Product
	Visa Private Debit Consumer Product
I2	Visa Ultra High Net Worth (UHNW)
J3	Visa Healthcare (U.S. region only)
	Visa Workplace Benefits
JC ¹	JCB
K	Visa Corporate T&E
K1	Visa Government Corporate T&E
L	Visa Electron
M ¹	Mastercard
N	Visa Platinum
N1	Visa Rewards
N2	Visa Select
P	Visa Gold
Q	Private Label
Q2	Private Label Basic

Table 68: Global Product ID Values

Product ID	Description
Q3	Private Label Standard
Q4	Private Label Enhanced
Q5	Private Label Specialized
Q6	Private Label Premium
R	Proprietary
S	Visa Purchasing
S1	Visa Purchasing with Fleet
	Visa Fleet (Canada only)
S2	Visa Government Purchasing
S3	Visa Government Purchasing With Fleet
S4	Visa Commercial Agriculture
S5	Visa Commercial Transport
S6	Visa Commercial Marketplace
U	Visa TravelMoney
V	V PAY
W^{^2}	Visa Direct Payouts to Wallets
W1	Visa Direct Payouts to Bank Accounts
X	Visa Commercial Choice Travel
X1³	Visa Commercial Choice Omni

¹ Authorization transactions only

² ^ denotes a space

³ Product ID **X1** is unavailable for Interlink

⁴Product ID **F2** and **F3** is unavailable for ATM and Interlink. These credit consumer products do not apply to AFTs, ATM cash disbursements, cashback, manual cash disbursements, and mobile push payment OCTs. However, these may apply to OCTs with a BAI value of **LO**.

Field 62.24 – Program Identifier

Field 62.24 – Attributes

fixed length

6 AN, EBCDIC, 6 bytes

Field 62.24 – Description

This field contains a program identification number used with Field 62.23—Product ID. The field identifies the programs associated with a card within a program registered by the issuer with Visa. At the issuer's option, VisaNet Integrated Payment (V.I.P.) or the issuer can populate field 62.24 with eligible program identification numbers. When V.I.P. populates this field, it uses values from the Cardholder Database.

Field 62.24 – Usage

Issuers that elect to support card-level identification have the option of having V.I.P. insert this field in 02xx original financial requests and 04xx requests and also having V.I.P. return this value in responses. Alternatively, issuers may forego V.I.P. insertion of the field and populate the field in request responses themselves. In which case, the RPID must be one registered with Visa.

Participating issuers must test their ability to send or receive this field in request and advice messages.

Acquirers can optionally elect to receive this field in original responses. In which case, testing to receive this field is required.

If present in the original request, this field may optionally be present in the following messages:

- Dispute Financials (0422/0432).
- Adjustments (0220/0230).
- Dispute Response Financials (0220/0230).

Online File Maintenance: For V.I.P. authorization-only issuers, this field may be present in CDB 0120 advices and 0130 responses. Issuers that support ALP programs can use this field to inquire the CDB. This field is not used in 0302 inquiries but V.I.P. sends the field in 0312 responses.

Field 62.24 – Field Edits

None.

Field 62.24 – Reject Codes

None.

Field 62.24 – File Edits

None.

Field 62.24 – File Maintenance Error Codes

None.

Field 62.24 – Valid Values

Field must be 6 bytes and contain a combination of letters (**A–Z**) and/or numbers (**0–9**).

Field 62.27 – ATM Routing Table Unique Identifier

Field 62.27 – Attributes

fixed length

7 N, EBCDIC; 7 bytes

Field 62.27 – Description

Acquirers must use this field to enhance processing integrity for routing of Visa and Plus ATM full-financial transactions.

Field 62.27 – Usage

This field contains a seven-digit numeric value that changes weekly. The same unique identifier is used in full and delta routing tables.

This field is required for acquirers that send Field 63.1—Network Identification Code to V.I.P. for routing Visa (**0002**) and Plus (**0004**) ATM full-financial transactions.

Acquirers requesting V.I.P. determine the network for transmission by sending the value of **0000** (Priority routing) in Field 63.1—Network Identification Code, are not required to send this field.

Acquirers must use a current routing table unique identifier for:

- 0200 ATM full-financial request
- 0420 ATM financial reversal advice

This field applies to the following categories of routing tables:

- Visa Routing Table
- Plus Routing Table

- Combined Visa/Plus Routing Table
- U.S. Routing Tables:
- ATM Routing File
- Consolidated Routing File
- Visa Routing File

U.S. Routing Tables are available to all acquirers globally. Visa no longer supports ATM Routing File (no surcharge) and Consolidated Routing File (no surcharge).

Field 62.27 – Field Edits

Acquirers must submit a valid unique identifier in Field 62.27—ATM Routing Table Unique Identifier for all original ATM full financial messages and their reversals. If this field is not present or contains invalid data, V.I.P. logs the transaction for compliance and if applicable drops Field 62.27—ATM Routing Table Unique Identifier before sending the request to the issuer. The unique identifier is not present in response messages.

Field 62.27 – Reject Codes

None.

Field 63 – V.I.P. Private-Use Fields

Field 63 – Attributes

variable length

1 byte, binary +

255 bytes, variable; maximum: 256 bytes

Field 63 – Description

Field 63 is a private-use field defined by Visa for various kinds of V.I.P. message information. Identifying the acquirer's network ID is one of the primary uses of this field. It is used also for various reason codes.

The length subfield specifies the number of bytes that follow it.

Table 69: Field 63 Layout

Code	Description	Bytes	No. Pos.	Format
n/a	Length Subfield	1	n/a	binary
63.0	Bitmap	3	24	bit string
63.1	Network ID	2	4	N, BCD
63.2	Not applicable	2	4	N, BCD
63.3	Message Reason Code	2	4	N, BCD
63.4	STIP/Switch Reason Code	2	4	N, BCD
63.5	Not applicable	3	6	N, BCD
63.6	Chargeback Reduction/BASE II Flags	7	7	ANS
63.7	Not applicable	8	64	bit string
63.8	Not applicable	4	8	N, BCD
63.9	Fraud Data	14	3	ANS
63.10	Not applicable	13	2	ANS
63.11	Reimbursement Attribute	1	1	ANS
63.12	Sharing Group Code	30	30	ANS
63.13	Decimal Positions Indicator	3	6	N, BCD

Table 69: Field 63 Layout

Code	Description	Bytes	No. Pos.	Format
63.14	Issuer Currency Conversion Data	36	36	ANS
63.15	Bot applicable, reserved for future use	9	9	ANS
63.16	Not applicable	3	6	N, BCD
63.17	n/a, reserved for future use	n/a	n/a	n/a
63.18	n/a	1	1	2N, 4-bit BCD
63.19	Fee Program Indicator	3	3	AN
63.20	Not applicable	1	1	2N, 4-bit BCD
63.21	Not applicable	1	1	ANS

Field 63 – Usage

See 63.xx descriptions.

Field 63 – Field Edits

See field 63.xx descriptions.

Field 63 – Reject Codes

See field 63.xx descriptions.

Field 63.0 – Field 63 Bitmap

Field 63.0 – Attributes

fixed length

24 N, bit string; 3 bytes

Field 63.0 – Description

A bitmap that specifies which of the subfields are present.

Byte 1:

- If Bit 1 = **1**, the Network ID is present; otherwise, Bit 1 = **0**.
- Bit 2 not applicable; Bit 2 = **0**.
- If Bit 3 = **1**, the Message Reason Code is present; otherwise, Bit 3 = **0**.
- If Bit 4 = **1**, the STIP/Switch Reason Code is present; otherwise, Bit 4 = **0**.
- Bit 5 not applicable, reserved for future use; Bit 5 = **0**.
- If Bit 6 = **1**, Chargeback Reduction/BASE II Flags are present; otherwise Bit 6 = **0**.
- Bit 7 not applicable; Bit 7 = **0**
- Bit 8 not applicable; Bit 8 = **0**.

Byte 2:

- If Bit 1 = **1**, Fraud Data is present; otherwise, Bit 1 = **0**.
- Bit 2 not applicable; Bit 2 = **0**.
- If Bit 3 = **1**, the Reimbursement Attribute is present; otherwise, Bit 3 = **0**.
- If Bit 4 = **1**, the Sharing Group Code is present; otherwise, Bit 4 = **0**.
- If Bit 5 = **1**, the Decimal Positions Indicator is present; otherwise, Bit 5 = **0**.
- If Bit 6 = **1**, Issuer Currency Conversion Data is present; otherwise, Bit 6 = **0**.
- Bit 7 not applicable, reserved for future use; Bit 7 = **0**.
- Bit 8 not applicable; Bit 8 = **0**.

Byte 3:

- Bit 1 not applicable; Bit 1 = **0**.
- Bit 2 not applicable; Bit 2 = **0**.
- If bit 3 = **1**, the Fee Program Indicator is present; otherwise, Bit 3 = **0**.
- Bit 4 not applicable; Bit 4 = **0**.
- If bit 5 = **1**, the Charge Indicator is present; otherwise, Bit 5 = **0**.
- Bit 6 not applicable; Bit 6 = **0**.
- Bit 7 not applicable; Bit 7 = **0**.
- Bit 8 not applicable; Bit 8 = **0**.

Field 63.0 – Usage

This field is required in all messages that use its subfields, such as Field 63.1-Network Identification Code.

Fraud Reporting: See field 63.1, field 63.4, and field 63.6 for fraud reporting requirements.

Collection-Only Transactions: See field 63.1, field 63.3, and field 63.8 for collection-only transaction requirements.

Auto-CDB (Visa Only): This field is present in an 0322 advice and must be returned in the 0332 response.

Field 63.0 – Field Edits

See individual subfields.

Field 63.0 – Reject Codes

0400 = Parse error or invalid length. The absence of this field may result in other consistency reject codes.

Field 63.1 – Network Identification Code

Field 63.1 – Attributes

fixed length

4 N, 4-bit BCD (unsigned packed); 2 bytes

Field 63.1 – Description

Field 63.1 contains a code that specifies the network to be used for transmission of the message and determines the program rules that apply to the transaction. All codes for this field are defined in the Valid Values section.

Field 63.1 – Usage

The acquirer originating the first message for a customer transaction may specify the network whose rules are to apply. Visa ATM acquirers must specify network **0002** or network **0004** for PLUS transactions unless they are using priority routing service, then the acquirer must specify network **0000**. For a customer transaction, the same value must appear in every subsequent message.

Issuers can optionally send this field in 0302 file maintenance update and inquiry messages, and optionally receive it in 0312 responses.

Priority Routing: Priority routing (code **0000**) can be requested only for an original financial transaction or its reversal. It is not for an adjustment, dispute financial, dispute financial reversal, or dispute response financial, or messages not directly related to cardholder transactions.

VisaNet checks the programs available to the acquirer and makes a selection based on the acquirer's routing priorities. Once a network has been identified, VisaNet puts the network ID in this field. If the acquirer requests priority routing for a cardholder transaction message, each field in each message must comply with all field requirements for all card programs supported by that acquirer.

Dynamic Key Exchange: This field is required in 0800 Dynamic Key Exchange messages from clients or V.I.P. It contains the network ID code of the acquiring ID or issuing ID or routing ID to which the new key applies. This field must be returned unchanged in the 0810 response. Values are **0002** (Visa and Visa Electron), **0003** (Interlink), and **0004** (Plus). If clients are using the same

working keys for multiple services, they may choose to use one network ID for key exchange, and the keys apply to all applicable services.

Visa Smart Debit/Visa Smart Credit: All 0120 offline decline advices and their 0130 responses must include this field, as must 0620 issuer authentication failure or issuer script results advices and their 0630 responses.

File Maintenance Advices (Visa Only): The following points apply:

- In 0120 file maintenance advices, this field is present and optional in the 0130 response.
- In 0322 file maintenance advices for Authorization-Only clients, this field is not present.
- In 0322 file maintenance advices for Full Service clients, this field is present and must be returned in the 0332 response.

Fraud Reporting: The network ID must be **0002** (Visa) or **0004** (Plus) in all 9620 messages. The field must be returned in 9630 responses.

Collection-Only Transactions: This field is required in 9240 and 9242 transactions and their responses. It must contain a value associated with the originating acquiring ID in Field 32—Acquiring Institution Identification Code or Field 33—Forwarding Institution Identification Code.

Network Management: If this optional field is present it must be set to **0002** (Visa) or **0004** (Plus) in all 08xx network management messages.

Visa-Generated Funds Disbursements (Plus): The value in this field is **0004** (Plus).

STIP and Switch Advices: This field is present. If priority routing was requested, the assigned network code is used.

Advices From BASE II Endpoints: This field is present, set by V.I.P. to **0002** or **0004**.

Generic File Update Service: Generic file updates (value **0000**) may be requested in field 63.1 of an 0302 request. This service supports additions, changes, and deletions for PIN Verification and ASAF Maintenance. (See field 127.)

When the issuer sends **0000** in field 63.1 of the 0302 request, VisaNet determines the network ID based on the account number, and returns it in this field of the 0312 response.

Electronic Benefits Transfer (EBT)—U.S. Only: Acquirers that choose to support EBT ATM transactions must use code **0030** in this field, unless priority routing is specified. V.I.P. supports this code in the following message types for the EBT ATM gateway:

- 0200/0210/0220/0230 full-financial requests, responses, advices, and advice responses.
- 0420/0430 reversals, reversal responses, reversal advices, and reversal advice responses.
- 0422/0432 dispute financials, responses, dispute financial reversals, and responses.
- 0220/0230 dispute response financials and responses.
- 0220/0230 adjustments and responses.

If acquirers using priority routing submit a value of **0000** in this field, they must submit a sharing group code of T in field 63.12.

Acquirers that choose to support EBT ATM transactions must modify their systems to support network 0030 and associated FPI values. Acquirers that choose to support priority routing must modify their systems and successfully complete testing to send field 63.12.

Visa ReadyLink ATM Load Transactions: A value of **0002** (Visa) or **0000** (priority routing) must be used; otherwise, the transaction is rejected with reject code **0062**. If a value of **0000** is present in a request, V.I.P. replaces it with a value of **0002**.

Field 63.1 – Field Edits

Except as noted, this field is required in all messages.

This field is optional in 0302 file maintenance update and inquiry messages and their responses.

If present, the ID must be one of those shown in the Valid Values section.

For issuers, the Network ID in a response or advice response must match that in the request or advice (except for dynamic key exchange messages).

For acquirers, the response may be different if the acquirer originally used network ID **0000**.

If this code is **0000**, the message type must be 0200, 0220, 0302, 0400, or 0420.

Code **0000** is not allowed in an adjustment, dispute financial, dispute financial reversal, or dispute response financial. It is also not allowed in 05xx, 06xx, and 08xx messages.

The value from the original 0210 response must be used in all exception items and their responses.

For 0800 network management messages and 0800 working key requests, the value must be **0002** or **0004**.

Dispute financial reversals and dispute response financials must contain a message reason code or V.I.P. rejects the message.

Field 63.1 – Reject Codes

0062 = Invalid value

0319 = Field missing

0514 = Response value does not match request value

Field 63.1 – Valid Values

Table 70: Field 63.1 Network ID Codes

Code	Definition
0000	Priority routing (Visa determines the network and program rules) or Generic File Update Service (Visa determines the network from the account number)
0002	Visa Network Management (Visa card programs)
0004	Plus, <i>except network management messages, where 0002 must be used</i>
0006	Cirrus
0007	Mastercard
0030	EBT ATM
0040	American Express
0041	Discover

Field 63.3 – Message Reason Code

Field 63.3 – Attributes

fixed length

4N, 4-bit BCD (unsigned packed); 2 bytes

Field 63.3 – Description

Field 63.3 contains a code explaining the reason for sending: a reversal, adjustment.

- Dispute financial, dispute financial reversal, dispute response financial, dispute response financial reversal and their corresponding status advices.
- An acquirer-generated advice or reversal.
- A Visa fee collection or funds disbursement.

In raw data records, field 63.3 contains a MIS/CAS reason code, which identifies the transaction type and indicates whether the raw-data record applies to an acquirer or an issuer. MIS stands for Merchant Interface System (acquirer side). CAS stands for Card Authorization System (issuer side).

Field 63.3 – Usage

This field is used in requests or advices related to a cardholder transaction that follows the original 0200 or 0220 message. It is optional in reversals (except in Plus reversals, where it is required) and not used in responses. If no message reason code is required, this field must be omitted, and its bit in field 63.0 set accordingly.

Collection-Only Transactions: This field may be present in a 9240 message but not its response. If present in a 9240, this field must contain a numeric code from the original transaction. In a 9242 message, this field is required and must contain a code that is for Dispute Financial or Dispute Financial reversals. This field is not present in 9252 responses.

Rules for Using Plus Reason Codes: For Plus Alliance ATM reason codes, refer to the Plus Message Reason Codes table.

ATM Transaction Standardization Options (Plus): Plus message reason codes do not apply. Visa message reason codes are used instead.

Visa-Generated Funds Disbursements (Plus): The value in this field is **5310**.

Retain and Return Processing: The Dispute Financial reason code is a retain and return field. The Dispute Financial reason code from the first Dispute Financial transaction must continue to be returned in Dispute Financial reversal, dispute response financial, and dispute response financial reversal transactions.

STIP and Switch Advices: This field is present in these advices if it was in the request. It is not used in advice responses.

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

Advices From BASE II Endpoints: This field is present if there was a reason code in the BASE II record.

Adjustments for Duplicate Transactions: Acquirers can correct duplicate transactions by submitting an 0220 adjustment message with a code of **2108** in this field. Field 3, positions 1–2, must contain **22**, field 25 must contain **00** or **01**, and field 62.2 must be present.

These adjustments are optional for acquirers but mandatory for issuers, which receive them as full-financial online messages only. They cannot be alternate-routed, reversed, or disputed.

Messages containing code **2108** must be submitted on the network where the duplicate occurred. They are recognized as credit adjustments for duplicate transactions when processed on networks directly connected to Visa.

Visa ReadyLink ATM Load (U.S. Only): Reason code **2015** must be used to make credit and debit adjustments of load transactions. Field 3, positions 1–2, may be:

- **02** = Adjustment-debit, or
- **22** = Adjustment-credit

Partial Reversals (V.I.P. Authorization-Only): If ATM transactions partially complete (misdispense), V.I.P. Authorization-Only acquirers must send 0400 or 0420 partial reversal messages to Visa. The 0400 or 0420 partial reversal message must contain a value of **2504** in this field, a value of **01** (cash disbursement) in field 3, and the amount dispensed in field 95.

When V.I.P. Full Service acquirers submit full-financial transactions that are not successfully completed, they must be corrected using an adjustment, not a partial reversal.

For full service issuers, V.I.P. ATM Format Conversion Service converts 0400 or 0420 partial reversal messages to a 0220 adjustment message with value **22** in field 3, positions 1–2.

Field 63.3 – Field Edits

The value must be a code that is allowed for the message type.

Visa (Network ID 0002): Required in these

- 0220 misdispense or back-office adjustment
- 0422 dispute financial or dispute financial reversal

- 0480 dispute financial or dispute financial reversal status advices
- 0220 dispute response financial or dispute response financial reversal
- 0282 dispute response financial or dispute response financial reversal status advices
- 0220 or 0422 fee collection or funds disbursement

The code must be one of those listed in Visa Message Reason Code table.

Plus (Network ID 0004): Required in these:

- 0220 adjustment
- 0420 reversal; otherwise, rejected with reject code **0479**
- 0422 dispute financial or dispute financial reversal
- 0480 dispute financial or dispute financial reversal status advices
- 0220 dispute response financial or dispute response financial reversal
- 0282 dispute response financial or dispute response financial reversal status advices
- 0220 or 0422 fee collection or funds disbursement

The code must be one of those listed in the Plus Message Reason Code table.

Mastercard and Cirrus: Acquirers cannot re-present Visa-generated dispute financial containing message reason code **2013**. V.I.P. rejects the dispute response financial with reject code **0722**.

Adjustments for Duplicate Transactions: If V.I.P. receives an adjustment message with field 63.3 = **2108** but positions 1–2 of field 3 are not **22**, the message is rejected with reject code **0114**. See related edits in descriptions for fields 25 and 62.2.

Field 63.3 – Reject Codes

0114 = Invalid value

0346 = Field missing

0722 = Transaction not permitted for dispute financials, dispute response financials, or switch-generated adjustments

Field 63.3 – Valid Values

For Visa or Plus message reason codes, see the Visa Message Reason Codes table and the Plus Message Reason Codes table, respectively. The key for the “Other” restrictions column in the Visa Message Reason Codes table is located at the end of the table. A check mark (✓) means the restriction applies; no check mark means the restriction **does not** apply.

Table 71: Field 63.3 Visa Message Reason Codes

	Definition	Restrictions			
Code		U.S. Only	Int'l Only	More than \$10 (U.S. Only)	Other
Adjustment (Cash Disbursement and Back-Office)					
2001	Transaction voided by cardholder (online correction)				
2002	Wrong amount due to ATM misdispense (online correction)				
2004	Acquirer correction ("back-office" adjustment)				
2013	Switch-generated adjustment				8
2015	Load adjustment	✓			
2102	Approved transaction, previously reversed when no confirmation received from point of service, did complete				
2108	Credit adjustment, duplicate correction				
Acquirer Reversal					
2501	Transaction voided by cardholder				
2502	Transaction has not completed (request or advice timed out or ATM malfunctioned)				
2503	No confirmation from point of service				
2504	Partial dispense by ATM (misdispense), for V.I.P. Authorization Only endpoints				
Visa-Generated Reversal Advice					
2547	Potential duplicate financial transaction (Visa ATM Format Conversion issuers only)				
2548	Duplicate (including retrieval reference number) financial transaction (Visa ATM Format Conversion issuers only)				
Dispute Financial and Dispute Financial Reversal for Visa Transactions					
0010	Fraud				
0011	Authorization				

Table 71: Field 63.3 Visa Message Reason Codes

Code	Definition	Restrictions			
		U.S. Only	Int'l Only	More than \$10 (U.S. Only)	Other
0012	Processing error				
0013	Consumer dispute				
Dispute Financial and Dispute Financial Reversal for Non-Visa Transactions					
0062	Counterfeit transaction		✓		1
0074	Late presentment		✓		
0076	Incorrect currency or transaction code or domestic transaction processing violation		✓		
0082	Duplicate processing		✓		
0090	Nonreceipt of cash or load transaction value at ATM or load device		✓		
2662	Counterfeit transaction				1, 7
2674	Late presentment			✓	7
2676	Incorrect transaction code	✓			
2682	Duplicate processing				7
2690	Services not rendered—ATM or Visa TravelMoney program transactions			✓	7
Fee Collection and Funds Disbursement					
0100	Telex, telephone, and cable charges		✓		4
0110	Auto-telex charges		✓		4
0130	Lost/stolen card report fees				
0140	Merchant service fees		✓		4
0150	Recovered card handling fees or rewards				
	ATM Balance Inquiry acquiring direct fee returns				9
0170	Recovery of copy/original or substitute draft fees				

Table 71: Field 63.3 Visa Message Reason Codes

Code	Definition	Restrictions			
		U.S. Only	Int'l Only	More than \$10 (U.S. Only)	Other
0200	Emergency replacement card distribution fee				
0210	Emergency cash disbursement handling fee				
0220	Arbitration/compliance/resolution case decision or request fee				
0230	Incorrect merchant identification/transaction data handling fee	✓			
0240	Funds disbursement transactions				
0250	Invalid dispute financial (chargeback) handling fee	✓			
0350	Prearbitration settlement funds disbursement				
5010	Visa Integrated Billing statement				3
5020	Arbitration request or review				3
5040	Miscellaneous fees or charges				3
5080	Late settlement fee				3
5140	ISO/non-client agent registration fee/annual fee				
5150	Dispute financial (chargeback) handling fee				3
5185	Membership compliance fee				3
5190	Numeric licensing and administration program fee				3
5195	Sponsored client registration fees				3
5290	Corporate indemnification of settlement risk				2
5300	Promotion credit reward funding	✓			2
5310	ATM cash disbursement issuer credit				5
5320	Client-provided reimbursement fee				6

Table 71: Field 63.3 Visa Message Reason Codes

	Definition	Restrictions			
Code		U.S. Only	Int'l Only	More than \$10 (U.S. Only)	Other
Dispute Response Financial and Dispute Response Financial Reversal for Visa Transactions					
In U.S. and International dispute response financial and dispute response financial reversals the code is the same as that of the original dispute financial and dispute financial reversal.					
Dispute Response Financial for Non-Visa Transactions					
In a dispute response financial, the code is the same as that of the original dispute financial.					

Visa Message Reason Codes Table Key

1. The original was a magnetic-stripe or chip-initiated transaction, but the authorization request did not include the required data.
2. For codes **5290** and **5300**: Incoming only with the account number field zero-filled; the transaction is initiated by Visa. Used in Visa-initiated 0220 acquirer fee collections and 0422 issuer fee collections to provide advance funding of settlement obligations. Code **5300** is Visa U.S. only.
3. For code **5040**: Incoming only with the account number field zero-filled; the transaction is initiated by Visa. Mastercard and Cirrus: Code **5040** is used in Visa-generated fee collection and funds disbursement messages.
4. This message reason code should not be used for ATM transactions; however, clients must be able to receive and process this code.
5. V.I.P. adds this code to full financial messages and raw data to identify the transaction as a credit adjustment for:
 - An ATM cash disbursement fee for an ATM Format Conversion (AFC) issuer.
 - A Visa TravelMoney (VTM) fee for an AFC issuer.
 - Full service issuers connected to VisaNet; a Visa-generated funds disbursement message is used to credit ATM Format Conversion (AFC) issuers with a fee for BASE II-acquired ATM transactions that fail the CPS/ATM fee edit criteria.

The field 3 processing code value carried in the transaction is **29** (Funds Disbursement—Credit [Visa only]).
6. Incoming only with account number in the account number field; the transaction is initiated by Visa.
7. U.S. endpoints should use only dispute reason codes **2662**, **2674**, **2682**, or **2690**. International issuers participating in Visa/Plus ATM Compatibility should not use these values.
8. Mastercard and Cirrus: Visa uses code **2013** (normally used for adjustments) in an 0422 dispute financial of a reversed dispute response financial when the acquirer does not submit the dispute response financial documentation in the timeframe required by Mastercard. Acquirers are not allowed to represent this Visa-generated dispute financial.
9. This code is available for ATM Balance Inquiry acquiring direct fee participants in AP region only.

Plus reason codes are listed in the Plus Message Reason Codes table.

Table 72: Field 63.3 Plus Message Reason Codes

Code	Definition	Restrictions
Adjustments (Cash Disbursement and Back-Office)		
2002	Wrong amount due to ATM misdispense.	Online correction.
2004	Acquirer correction (back-office adjustment).	Back-office correction.
2006	Reversal of a previous credit adjustment (used only to back out a 2002).	Back-office correction. Reversals must be completed within 10 days of exception being reversed.
2008	Reversal of a previous debit adjustment (used only to back out a 2004).	Back-office correction. Reversals must be completed within 10 days of exception being reversed.
2108	Credit adjustment, duplicate correction.	Online correction.
Acquirer-Generated Adjustment Advice		
2201	Approved transaction, previously reversed when no confirmation received from point of service, completed.	
2202	Partial dispense detected, previously reversed.	
ATM Deposit Adjustments (excludes international cash deposits) - Network Plus (0004) and Visa (0002)		
2300	Deposit keying error, credit cardholder	Visa (0002) Only
2301	Deposit keying error, debit cardholder	Visa (0002) Only
2302	Deposit missing envelope	
2303	Deposited empty envelope	
2304	Deposited item non-negotiable	Visa (0002) Only
2305	Deposited item not presentable	
2306	Deposited amount differs from entered amount	Visa (0002) Only
2307	Deposited foreign item	Visa (0002) Only
2308	Deposited altered item	
2309	Deposited item missing written amount	
2310	Deposited item missing written date	
2311	Deposited post-dated item	
2312	Deposited stale-dated item	
2313	Deposited item missing endorsement	

Table 72: Field 63.3 Plus Message Reason Codes

Code	Definition	Restrictions
2314	Deposited item missing maker's signature	
2350	Deposit not settled—credit cardholder	
2351	Deposit did not complete—debit cardholder	
2352	Deposited item returned—NSF	
2353	Deposited item returned—stop payment	
2354	Deposited item returned—account closed	
2355	Deposited item returned—no account	
2356	Deposited item returned—refer to maker	
2357	Deposited item returned—3rd-party item	
2358	Deposited item has incorrect endorsement	
2359	Deposited item needs conditional endorse	
2360	Deposited item has invalid payee data	
2361	Deposit duplicate posting	
2362	Deposit canceled by cardholder	
2370	Deposit problem occurred, please call	
Acquirer Reversal		
2501	Transaction voided by cardholder.	
2502	Transaction has not completed (request or advice timed out or the ATM malfunctioned).	
2503	No confirmation from point of service.	
2504	Partial dispense by ATM (mispense)	
2512	Timed out by Plus (definite)	
2513	Unable to send response to acquirer (suspicious)	
2514	Response format error (definite)	
Dispute Financial and Dispute Financial Reversal		
0010	Fraud	
0011	Authorization	
0012	Processing error	
0013	Consumer dispute	

Table 72: Field 63.3 Plus Message Reason Codes

Code	Definition	Restrictions
Dispute Response Financial and Dispute Response Financial Reversal		
In U.S. and International dispute response financial and dispute response financial reversals the code is the same as that of the original dispute financial and dispute financial reversal.		
Fee Collections and Funds Disbursements		
0150	Recovered card handling fees or rewards	
	ATM Balance Inquiry acquiring direct fee returns	This code is available for ATM Balance Inquiry acquiring direct fee participants in AP region only.
0220	Arbitration/compliance/resolution case decision or request fee	
0230	Incorrect merchant identification/transaction data handling fee	
0240	Funds disbursement	
0250	Invalid dispute financial (chargeback) handling fee	This code applies to the U.S. only.
0350	Prearbitration settlement funds disbursement	
5010	Visa Integrated Billing statement ²	
5020	Arbitration request or review ¹	
5040	Miscellaneous fees or charges ¹	
5080	Late settlement fee ²	
5140	ISO/Non-client agent registration fee/annual fee ²	
5150	Dispute financial (chargeback) handling fee ¹	
5185	Membership compliance fees/penalties ²	
5190	Numeric licensing and administration program fees ²	
5195	Sponsored client registration fees ²	
5290	Corporate indemnification of settlement risk ²	
5310	ATM cash disbursement issuer credit	This code is used in an 0220 funds disbursement message to credit ATM Format Conversion (AFC) full service issuers with a fee for BASE II-acquired ATM transactions that fail the CPS/ATM fee edit criteria.

Table 72: Field 63.3 Plus Message Reason Codes

Code	Definition	Restrictions
5320	Client-Provided reimbursement fee ³	

¹Incoming only with the account number field **zero**-filled; the transaction is initiated by VisaNet.

²Incoming only with the Account Number field **zero**-filled; the transaction is initiated by VisaNet. Used in VisaNet-initiated 0220 acquirer fee collections and 0422 issuer fee collections to provide advance funding of settlement obligations.

³Incoming only with account number in the account number field; the transaction is initiated by VisaNet.

Field 63.4 – STIP/Switch Reason Code

Field 63.4 – Attributes

fixed length

4 N, 4-bit BCD (unsigned packed); 2 bytes

Field 63.4 – Description

Field 63.4 contains a code that identifies the reason why STIP responded on behalf of an issuer. This code is the first condition for which VisaNet had to stand-in for the issuer.

Field 63.4 – Usage

This field is present in an advice generated by STIP when STIP has performed authorization processing on behalf of the issuer.

This field is present in a VisaNet-generated advice if the approval response for a cardholder transaction could not be delivered (reversal advices are generated for the acquirer and the issuer).

Auto-CDB (Visa Only): This field is present in an 0322 advice, and the value is **9030**.

Visa Smart Debit/Visa Smart Credit (VSDC): This field is required in 0620 issuer authentication failure or issuer script results advices.

The field may be present in 0220 financial advices when V.I.P. validates Online CAM processing and responds on behalf of the issuer. If Online CAM validation fails, V.I.P. declines the request message and send the issuer an advice with a reason code of **9054**.

Fraud Reporting: This field is used in Visa-generated FRS messages and the value must be 9050.

Visa-Generated Funds Disbursements (Plus): This field is present, set to **9101**.

Advices From Clearing Endpoints: This field is present, set to **9101**.

ASAF Maintenance Advice: When GCAS updates the CDB on the issuer's behalf, Visa sends an ASAF Maintenance Advice to the issuer if the issuer has opted to receive file maintenance update advice messages. For V.I.P. Full Service issuers, the advice contains **9028** (issuer requested CDB update through GCAS) in this field.

Real Time Decisioning: Issuers must support values **9047** (declined by RTD processing) or **9057** (STIP approved transaction due to RTD) in field 63.4 in forward referrals of authorization and full-financial requests, in related advices to issuers, and in responses. A field 39 value of **59** (suspected fraud) must also be supported.

When Real Time Decisioning (RTD) determines that an original request meets issuer-provided criteria, V.I.P. includes response code **59** (suspected fraud) or a more severe response code in 0100 and 0200 forward referrals, and 0120 and 0220 STIP advices, sent to the issuer.

Visa Resolve Online (VROL): Reason code **9091** identifies status advices from VROL for dispute financials.

Field 63.4 – Field Edits

None.

Field 63.4 – Reject Codes

None.

Field 63.4 – Valid Values

Visa supports reason codes not published in the tables below. Endpoints processing this field must accept all codes, including unrecognized and unexpected codes.

Table 73: Field 63.4 STIP/Switch Reason Codes

Code	Definition
STIP processing advice	
9001	The issuer is signed off.
9002	The issuer was signed off by VisaNet.
9011	The line to the issuer is down.
9012	Forced STIP because of N0 (Force STIP) original response from issuer.
9020	The response from the issuer timed out.
9024	Transaction declined due to Visa Payment Controls (VPC) rule.
9025	Declined by Selective Acceptance Service.
9031	Original processed in stand-in.
9033	Declined due to active account management threshold exceeded.

Table 73: Field 63.4 STIP/Switch Reason Codes

Code	Definition
9034	Unable to deliver response to originator.
9037	Declined by Visa CTC (Consumer Transaction Controls) service
9041	There was a PIN verification error.
9045	VisaNet was unable to translate the PIN.
9047	Declined by Real-Time Decisioning (RTD) processing.
9048	An invalid CVV was returned with the All Respond Option.
9050	Source or destination does not participate in this service.
9054	There is an invalid CAM.
9057	STIP approved transaction due to Real Time Decisioning (RTD).
9063	Transaction declined, processing requirements not met. This value is set by V.I.P. when the value in field 39 is 96 and The VIC within the regulated jurisdiction is unavailable Transactions are ineligible to be processed at the VIC within the regulated jurisdiction Transactions that must be processed by a VIC within the regulated jurisdiction are sent to an unregulated VIC V.I.P. does not generate a STIP advice for these declined transactions.
VisaNet-generated file update advice	
9028	The issuer requested CDB update through GCAS.
VisaNet-generated file update advice	
9030	Based on the Issuer response, the account was either listed in the ASAF via the Auto-CDB Service or updated by the ASAF Downgrade feature.
Information only	
9051	Transaction type not supported by authorization-only endpoint; the code can appear in an offline report but does not appear in an online message.
VisaNet-detected error	
9061	The system detected an error condition. (See field 39 response code for an explanation.)
STIP-generated advice	
9062	Exception message failed edits.
9070	Declined by Account Screen; Issuer participates in All Respond.
9091	Dispute financial
BASE II advice from VisaNet	

Table 73: Field 63.4 STIP/Switch Reason Codes

Code	Definition
9101	Transaction or message cleared through the BASE II System, destined to a V.I.P. full service endpoint.
VisaNet-generated reversal advice	
9102	An 0210 approval cannot be delivered to the acquirer. VE only.
9103	An 0210 approval cannot be delivered to the acquirer because the issuer has timed out.
STIP decline advice	
9201	Decline due to VSPS (Visa Stop Payment Service)
9202	Decline due to issuer country exclusion list
9203	Decline due to Office of Foreign Assets Control (OFAC) embargo
9204	Cashback processing error
9205	Invalid CAVV with Visa Verify and decline options (V and W)
9206	Mod-10 check failure
9207	Issuer does not support gambling transactions
9208	Declined because issuing identifier and/or routing identifier and/or token account range is blocked.
9209	Declined because issuer does not support transaction type
9210	Declined because of issuer participation options
9211	Declined because acquirer does not support the service requested
9212	Declined due to fraud condition
9213	Declined because call-out to an external service timed out
9214	Declined because of error return from call-out to external service
9215	Declined because issuer blocked specific POS entry mode
9218	Product subtype is MB (Interoperable mobile branchless) and business application identifier is not MP or business application identifier is MP and product subtype is not MB
9219	Merchant Blocking Service Decline Reason Code
9220	Device binding request could not be completed
9221	Declined due to PFD acquirer-specific ecosystem block.
9222	Declined due to PFD issuer-specific ecosystem block.
9223	Declined due to client-tailored block—acquirer/merchant.
9224	Declined due to client-tailored block—issuer.
9225	Declined due to ecosystem PFD fraud block (non-specific to issuer or acquirer).

Table 73: Field 63.4 STIP/Switch Reason Codes

Code	Definition
9226	Declined due to PFD block for other risk factors (non-specific to issuer or acquirer).
9229	Declined due to domestic regulations
9230	RAM Fraud Rule Decline without advice (Visa internal use only)
9302	Exceeds issuer settlement risk exposure cap
9303	Exceeds acquirer settlement risk exposure cap

Field 63.6 - Chargeback Reduction/ BASE II Flags

Field 63.6 – Attributes

fixed length

7 ANS, EBCDIC; 7 bytes

Field 63.6 – Description

Field 63.6 contains seven indicators. The content of this field is defined as follows.

Clients may receive this field in dispute financials initiated by BASE II endpoints.

Positions: 1	2	3	4	5	6	7
floor limit indicator	CRB indicator	STIP indicator	MOTO/ECI indicator	special chargeback indicator	special condition indicator	
					risk identification	merchant transaction
Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Bytes 6–7	

Position 1, Floor Limit Indicator: This subfield describes the relationship of the transaction amount to the floor limit in effect for that transaction.

Position 2, Card Recovery Bulletin (CRB) Indicator: This subfield describes whether the account number was listed in a Card Recovery Bulletin that was in effect for the merchant location on the purchase date.

Position 3, Stand-In Processing (STIP) Indicator: This subfield indicates that the authorization code was not generated by STIP.

Position 4, Mail/Phone/Electronic Commerce (MOTO/ECI) and Payment Indicator: Not applicable.

Position 5, Special Chargeback Indicator: In a disputed financial transaction, this subfield contains a value that identifies the transaction if the disputed amount is a partial amount of the original transaction.

Position 6, Special Condition Indicator, Risk Identification: This subfield carries risk identification information that must be placed in transactions when a merchant has been identified as “highly suspect.”

Position 7, Special Condition Indicator, Merchant Transaction: Not applicable.

Field 63.6 – Usage

Clients may receive this field in Dispute Financial messages initiated by BASE II endpoints.

Field 63.6 – Field Edits

Position 4 of this field must not contain VSEC values.

Field 63.6 – Reject Codes

0130 = Invalid value

Field 63.6 – Valid Values

Table 74: Field 63.6 Chargeback Reduction Codes and BASE II Indicators

Code	Definition
Position 1: Floor Limit Indicator	
Space	Floor limit validation not applicable
A	Above floor limit by more than 20%
B	Below floor limit by more than 20%
C	Above floor limit by 20% or less
D	Below floor limit by 20% or less
I	Insufficient information to determine floor limit
Z	Zero floor limit
Position 2: CRB Indicator	
Space	Card bulletin validation not applicable
I	Insufficient information to perform bulletin lookup
N	Account number was not listed in merchant region on purchase date.
Y	Account number was listed in merchant region on purchase date.
Position 3: STIP Indicator	
Space	Unknown; does not imply that the authorization was issued by STIP
N	Authorization code was not issued by STIP

Table 74: Field 63.6 Chargeback Reduction Codes and BASE II Indicators

Code	Definition
Position 4: Mail/Phone/Electronic Commerce and Payment Indicator	
Not Applicable	
Position 5: Special Chargeback Indicator	
Space	Not applicable
P	Partial amount in: • A dispute financial containing an amount less than the original amount. • A dispute response financial containing an amount less than the dispute financial amount.
Z	Floor limit bypass The limit for the transaction cannot be determined from the transaction information (for instance, expired or starred card, handwritten draft). Code Z should be used only at the direction of Visa and is closely monitored.
Position 6: Special Condition Indicator, Risk Identification	
Space	Risk identification indicator not required for this merchant
1	Zero floor limit required
2	Terminal capable of reading and transmitting the full unaltered contents of the magnetic stripe or chip in the authorization request
3	Zero floor limit and terminal capable of reading and transmitting the full unaltered contents of the magnetic stripe or chip
Position 7: Special Condition Indicator, Merchant Transaction	
Not Applicable	

Field 63.8 – Visa Acquirer's Business ID

Field 63.8 – Attributes

fixed length

8 N, 4-bit BCD (unsigned packed); 4 bytes

Field 63.8 – Description

U.S.-only field 63.8 contains the Visa-assigned business ID of the acquirer that signed the merchant for processing purchase or mail/phone order transactions. In this case, the acquirer is referred to as the Merchant Sponsor.

Field 63.8 – Usage

Collection-Only Transactions: This field is required in 9240 and 9242 messages but is not present in their responses. The code is from the original transaction.

Field 63.8 – Field Edits

None.

Field 63.8 – Reject Codes

None.

Field 63.9 – Fraud Data

Field 63.9 – Attributes

fixed length

14 ANS, EBCDIC; 14 bytes

Field 63.9 – Description

Field 63.9 contains fraud information for reporting fraudulent activity to the Visa Fraud Reporting System. "Valid Values" defines codes.

Table 75:

Position: 1	Position: 2	Positions: 3-4	Position: 5	Positions: 6-14
Fraud Type	Fraud Notification Code	Fraud Type Classification	Fraud Reporting Entity	Reserved

Positions 1, Fraud Type: This subfield identifies the type of fraud being reported. See "Valid Values" for the fraud type entries.

Position 2, Fraud Notification Code: This subfield identifies whether the transaction is being added, modified, deleted, or reactivated in the Fraud Transaction File. See "Valid Values" for the notification codes.

Positions 3-4, Fraud Type Classification: This subfield identifies classification of fraud types from acquirers and issuers. See "Valid Values" for Fraud Type Classification codes.

Position 5, Fraud Reporting Entity: This subfield identifies entity submitting the fraud. See "Valid Values" for reporting entity codes.

Positions 6-14, Reserved for Future Use.

Field 63.9 – Usage

This field is mandatory in all 9620 messages from issuers or acquirers. It is not returned in 9630 responses. In VisaNet generated messages, the field contains fraud data from the original fraud transaction.

Acquirers that originate OCTs, and issuers that receive AFTs, must submit fraud data for fraudulent transactions.

Fraud Reporting for OCT and AFT Transactions: Must include the fraud type classification in positions 3-4 of this field. (See field 3 for additional OCT/AFT fraud reporting requirements.)

Fraud Reporting for Not Received as Issued (NRI) and Issuers' Clearinghouse Service (ICS):
If fraud type being reported is NRI (position 1 = **2**), position 2 must be **1, 3, or 4**. If fraud type is ICS (position 1 = **7 or 8**), position 2 must be **1**.

- NRI/ICS reporting, position 1 values: **0, 1, 3, 4, 5, 6, 9**.
- NRI/ICS reporting, position 1 values:
 - NRI (U.S. only): **2**
 - ICS (U.S. only): **7 or 8**

Field 63.9 – Field Edits

None.

Field 63.9 – Reject Codes

None

Field 63.9 – Valid Values

Table 76: Field 63.9 Fraud Reporting Codes

Value	Description
Position 1: Fraud Type	
0	Card lost
1	Card reported stolen
2	Card not received as issued (NRI)
3	Card issued on basis of fraudulent application
4	Issuer-reported counterfeit card
5	Miscellaneous Account takeover (U.S. only)
6	Fraudulent use of account number
7	Used by ICS (U.S. only)
8	Used by ICS (U.S. only)

Table 76: Field 63.9 Fraud Reporting Codes

Value	Description
9	Acquirer-reported counterfeit card Note: Code 9 is the only applicable value for acquirer-initiated 9620 messages.
A	Incorrect processing
B	Account or credentials takeover
C	Merchant misrepresentation
D	Manipulation of account holder
Position 2: Fraud Notification Code	
1	Addition
2	Addition of subsequent identical (duplicate) transaction
3	Change/Modification
4	Delete
5	Reactivate
Positions 3-4: Fraud Type Classification	
01	Purchase scam
02	Investment scam
03	Romance scam
04	Advance fee scam
05	Invoice or mandate scam
06	CEO fraud scam
07	Impersonation scam
Spaces	Default
Position 5: Fraud Reporting Entity	
I	Issuing
A	Acquiring
Position 6-14: Reserved	
	Reserved

Field 63.11 – Reimbursement Attribute

Field 63.11 – Attributes

fixed length

1 ANS; 1 byte

Field 63.11 – Description

Field 63.11 contains a code that identifies the applicable interchange reimbursement fee for a purchase transaction.

This field's usage is for fraud reporting only. For other uses of field 63.11, see *V.I.P. System Full Service POS Online Messages Technical Specifications*.

Field 63.11 – Usage

Fraud Reporting: These points apply to client-generated fraud advices.

- **For U.S. only:** The reimbursement attribute must be the same as that of the original transaction. This field must contain an **A–Z** or **0–9**.
- **All others:** For non-U.S. fraud reporting, this field must be **zero**.
- This field is not used in NRI or ICS fraud reporting messages.
- If the reimbursement attribute is **1** or **2**, the MCC in field 18 must be **6011**.

Field 63.11 – Field Edits

There are no field edits in this usage of field 63.11 for fraud reporting.

Field 63.11 – Reject Codes

There are no reject codes in this usage of field 63.11 for fraud reporting.

Field 63.11 – Valid Values

Table 77: Field 63.11 Visa Reimbursement Attribute Codes

Code	Description
0	Standard Issuer's/Interchange Reimbursement Fee or Cash Disbursement Reimbursement Fee
1	Plus ATM Cash Disbursement
2	Visa ATM Cash Disbursement
3	EPS - U.S. only
7	Applies to reduced reimbursement fees for intraregional transactions only
8	JC Penney - U.S. only
9	VPAY Large-Market Petrol – VE Only
A	Payment Service Interchange Reimbursement Fee (PSIRF) - Brazil and U.S.
B	Applies to: Interregional Electronic CEMEA Electronic Asia-Pacific Electronic Reimbursement Fee Latin America-Caribbean Region Electronic Issuer's Reimbursement Fee (EIRF) Canada Chip Fee U.K. Electronic Issuer's Reimbursement Fee (EIRF) '94 U.K. Card Not Present '94 U.K. Electronic Hot Card File '94 International Visa Electron Card U.K. Airline Interim Interchange Reimbursement Fee
C	Reserved
D	Reserved: Delta-only merchant standard Interchange Reimbursement Fee - U.K. only
E	Reserved
F	Delta-only merchant Electronic Interchange Reimbursement Fee (EIRF) - U.K. only
G	Plus ATM Cash Disbursement - Tier II
H	Visa ATM Cash Disbursement – Tier II
I	Reserved for future use: BASE II draft data transactions only
J	Electronic Interchange Reimbursement Fee (EIRF) - U.S. only
K	Key-entered Payment Service Reimbursement Fee - U.S. only (for select developing markets only)
L	Reserved for future use: BASE II Draft data transactions only
N-S	Reserved for future use: BASE II Draft data transactions only

Table 77: Field 63.11 Visa Reimbursement Attribute Codes

Code	Description
T-V	Reserved
W-Z	Not applicable

Field 63.12 – Sharing Group Code

Field 63.12 – Attributes

fixed length, 30 bytes

30 ANS, EBCDIC

Field 63.12 – Description

Acquirers can use this U.S.-only field to specify the priority order to be used for ATM gateway networks. Each terminal may have its own unique sharing priority.

Field 63.12 – Usage

Acquirers that use priority routing and submit a Network ID of **0000** in field 63.1 should include field 63.12 in 0200 full-financial requests and 0400 reversals. When present in the original message, the field should be returned in responses.

Plus and Visa values are required in positions 1 and 2 of this field. Other networks can be in any order determined by the acquirer, and only networks supported by the acquirer must be defined. The sharing group code is left-justified and can contain up to 30 network designations. Unused positions must be right-justified and filled with **spaces**.

For sharing group codes applying to ATM transactions, see the Valid Values section. Acquirers choosing to support priority routing for ATM gateway transactions must modify their systems and test to send field 63.12.

Field 63.12 – Field Edits

Undefined sharing groups are ignored.

Field 63.12 – Reject Codes

None.

Field 63.12 - Valid Values

Table 78: Field 63.12 Sharing Group Codes (with Corresponding Network IDs)

Sharing Group Code	Network	Corresponding Network ID in Field 63.1
V	Visa	0002
B	Plus	0004
O	Cirrus	0006
J	MC	0007
T	EBT ATM	0030
A	American Express	0040
D	Discover	0041

Field 63.13 – Decimal Positions Indicator

Field 63.13 – Attributes

fixed length, 3 bytes

6 N, 4-bit BCD

Field 63.13 – Description

Field 63.13 is part of the optional Visa Currency Precision Service, which requires testing for acquirers and issuers to participate. It contains the number of decimal positions in these amount fields if they are present in the message:

- Field 4 - Amount, Transaction
- Field 5 - Amount, Settlement
- Field 6 - Amount, Cardholder Billing
- Field 54 - Additional Amounts
- Field 86 - Credits, Amounts
- Field 87 - Credits, Reversal Amount
- Field 88 - Debits, Amount
- Field 89 - Debits, Reversal Amount
- Field 97 - Amount, Net Settlement

This field comprises these positions:

Positions: 1–2	3–4	5–6
transaction amounts decimal positions	settlement amounts decimal positions	cardholder amounts decimal positions

Positions 1–2, Transaction Amounts Decimal Position: This subfield indicates the number of decimal positions in field 4 or field 61.1.

Positions 3–4, Settlement Amounts Decimal Position: This subfield indicates the number of decimal positions in field 5, field 86, field 87, field 88, field 89, or field 97.

Positions 5–6, Cardholder Amounts Decimal Position: This subfield indicates the number of decimal positions in field 6 or field 61.2.

Field 63.13 – Usage

Participating acquirers and issuers must include this field in all 02xx, 04xx, and 05xx messages except for fee collections/funds disbursements (Visa only), account transfers, and balance inquiries.

Responses involving positions 1–2, Transaction Amounts Decimal Positions: issuers may return the value from the request or the value **99**.

This field is present if any of these fields are: 4, 5, 6, 54, 86, 87, 88, 89, or 97.

STIP and Switch Advices: This field is present in these advices for participants:

- STIP-generated 0220 or 0420 advice
- Switch-generated 0420 advice

Advices From BASE II Endpoints: For participating clients, this field is present if any of these fields are: 4, 5, or 6.

Field 63.13 – Field Edits

If the client is a Currency Precision Service participant, this field must be present.

Field 63.13 – Reject Codes

0009 = Invalid field 4

0133 = Invalid field 6

0150 = Invalid field 54

0157 = Invalid field 63.13

0487 = Field 63.13 missing

Field 63.13 – Valid Values

The values for each position set (1–2, 3–4, 5–6) are the same:

00 = Currency has no minor units

02 = Currency has two minor units

03 = Currency has three minor units

99 = Currency not applicable in this message

Field 63.14 – Issuer Currency Conversion Data

Field 63.14 – Attributes

fixed length

36 ANS, EDCDIC; 36 bytes

Field 63.14 – Description

This field contains the fees associated with a transaction that undergoes currency conversion. The field has four components.

With the retirement of the Currency Conversion Fee Service, some components have been reserved for future development.

Positions: 1–9 10–18 19–27 28–36

Reserved	Reserved	Reserved	Cardholder Billing Amount, Optional Issuer Fee
----------	----------	----------	--

Positions 1–9, Reserved

Positions 10–18, Reserved

Positions 19–27, Reserved

Positions 28–36, Cardholder Billing Amount, Optional Issuer Fee: A fee optionally charged by the issuer to the cardholder when currency conversion occurs, in the same currency as the cardholder billing amount (field 6). The prefix is **C** (Credit) or **D** (Debit).

Field 63.14 – Usage

Multicurrency Participants: This field is present in incoming messages only for financial transactions that qualify for settlement. (Flags in field 9 of the message header identify messages that qualify for settlement.

Request originators and response providers do not provide this field. It is added to the request by V.I.P. before the message is delivered to the recipient.

STIP and Switch Advices: This field can be present in these advices if it was in the request:

- STIP-generated 0220, or 0420 advice
- Switch-generated 0400 advice

This field is not used in advice responses.

Advices From BASE II Endpoints: This field is present in advices if the recipient of the advice has elected to receive it and the transaction qualifies for settlement.

Non-Multicurrency Participants: Not applicable.

Field 63.14 – Field Edits

None.

Field 63.14 – Reject Codes

None.

Field 63.15 – Reserved

Field 63.15 – Attributes

fixed length

9 ANS, EDCDIC; 9 bytes

Field 63.15 – Description

With the retirement of the Currency Conversion Fee Service, Field 63.15, formerly named “Settlement Amount, Acquirer Currency Conversion Fee Allocation,” has been reserved for a new use in the future.

Field 63.15 – Usage

Reserved.

Field 63.15 –Field Edits

None.

Field 63.15 – Reject Codes

None.

Field 63.19 – Fee Program Indicator

Field 63.19 – Attributes

fixed length

3 AN, EBCDIC; 3 bytes

Field 63.19 – Description

This field contains an interchange reimbursement fee program indicator (FPI), which is used in assessing the fee amount applied to:

- ATM financial transactions within the U.S. and Canada regions. For the U.S. region, the FPI is used in network **0002** (Visa) and network **0004** (Plus) transactions.
- ATM financial and non-financial transactions within the AP and CEMEA regions.
- International ATM financial transactions for networks **0002** and **0004**. Interregional and regional transactions are supported for these networks.
- Cirrus (network **0006**) and Mastercard (network **0007**) full and partial reversals of ATM transactions that occur on the same Mastercard processing day.

The FPI value can be regarded as informational only, when used to give endpoints an approximation of the assessed interchange reimbursement fee. The FPI value can also be used to request a fee, as specified by certain regions.

Field 63.19 is not supported in regional Europe transactions.

Clients must test to receive field 63.19. This applies to all regions.

Field 63.19 – Usage

V.I.P. determined FPI: Visa inserts an FPI in full-financial request and response messages only, including originals, reversals, and exception item transactions.

Receipt of field 63.19 is optional for acquirers and issuers, unless stated otherwise. Acquirers and issuers that have the field activated for other Visa messages automatically receive it in ATM transactions.

The field is dropped for acquirers and issuers that choose not to receive it in online messages.

Unless stated otherwise, field 63.19 can be present in these message types:

- 0200/0210/0220/0230 full-financial request, acquirer advice, STIP advice, clearing advice, and responses.
- 0220/0230 adjustment advice, STIP advice, and responses.
- 0220/0230 dispute response financial and response.
- 0420/0430 financial reversal, switch advice, and responses.
- 0422/0432/0480/0490 dispute financials, dispute financial reversals and their responses.

Except as noted, issuers and acquirers should retain the FPI value received from V.I.P. and return it in domestic and international exception transactions.

For domestic transactions, the FPI should be retained and returned only where it is currently defined for these transactions. In addition, not all endpoints are required to support receipt of field 63.19. Such endpoints can choose to use reports and raw data to retain and return the FPI.

U.S. Region: This field is mandatory for full service acquirers and issuers.

For U.S. domestic transactions (where the acquirer and issuer are in the U.S. region), Visa requires the FPI from the previous transaction to be returned in Visa and Plus ATM exception transactions submitted to V.I.P. The FPI from the previous transaction is used to determine the fee program for exception items. The FPI value must be retained and returned in back-office adjustments, dispute financials, dispute financial reversals, and dispute response financials.

If an issuer must charge back an ATM transaction that included an ATM misdispense, the issuer must include the FPI value from the original withdrawal request in the dispute financial transaction.

Exception transactions submitted without an FPI receive a fee amount of USD\$0.00.

For gateway transactions, Visa does not add this field to the request message. It is added to the response. Gateways do not receive this field in requests.

Canada Transactions: This field is optional for ATM issuers and acquirers.

Acquirer Submitted FPI (AP and CEMEA Transactions): Acquirers must insert an FPI to request a regional or domestic bilateral fee.

Clients in the AP or CEMEA region must successfully test to receive this field; otherwise, it is dropped from the message. The acquirer submitted FPI is returned in the response message for acquirers that have tested to receive it.

Since V.I.P. or RSI, or both can change the FPI based on fee calculations, clients must use SMS raw data to determine the final FPI.

V.I.P.-generated reversals use the FPI, if available, from the original request.

Issuers must retain this field and return it in dispute financials. Acquirers must retain this field from dispute financial for subsequent use in dispute response financials.

Acquirers and issuers must support AP and CEMEA bilateral fee programs and rates.

If an FPI exists for a desired intraregional or domestic bilateral fee program, the acquirer must include the FPI value in field 63.19 of the 0200 full-financial request. After validation, V.I.P. passes it to the issuer in the request message.

If the fee program indicator is correct, V.I.P. uses it to settle the transaction; if not, V.I.P. assigns the fee program indicator used to settle it.

For a list of the intraregional and domestic bilateral ATM FPIs and their fee programs, endpoints should contact their regional Client Support representative.

V.I.P. Full Service issuers should retain the value of the FPI received in authorization request messages for use in dispute financials. Acquirers should retain the FPI value received in dispute financials for subsequent use in dispute response financials.

Visa Debit Gateway - Mastercard and Cirrus Same-Day Reversals: Visa processes a full or partial reversal as a same-day reversal and assigns corresponding FPIs in field 63.19 (one for the original transaction and one for the reversal), provided the reversal contains a field 15 settlement date from Mastercard that matches the field 15 value of the original transaction. Otherwise, Visa processes the transaction as a reversal that did not occur on the same day and assigns FPIs that do not correspond to same-day processing.

Field 63.19 – Field Edits

None.

Field 63.19 – Reject Codes

None.

Field 63.21 – Charge Indicator

Field 63.21 – Attributes

fixed length

1 ANS, 1 byte

Field 63.21 – Description

Field 63.21 can be used for charge types or fees applied to a transaction.

Field 63.21 – Usage

Values in this field can indicate that a transaction has been assessed an International Service Assessment (ISA) charge. These assessments are reflected in settlement amounts. ISA charges can apply to single and multicurrency transactions. Acquirer ISA charges are further identified by cash and purchase including account funding.

Acquirer ISAs *and* issuer ISAs can be applied and if subscribed to, acquirers and issuers receive field 63.21 in messages.

Acquirer ISA: U.S. and A.P. acquirers can optionally receive this field in 0210/0410 response if an acquirer ISA applies to the transaction. If present, the field includes one of these values to indicate that an acquirer ISA was assessed on a transaction for a purchase, account funding, or cash disbursement:

- **G** = Base cash acquirer ISA-assessed
- **E** = Enhanced purchase acquirer ISA-assessed
- **H** = Enhanced cash acquirer ISA-assessed

Eligible acquirers are assessed an acquirer ISA regardless of the transaction currency and cardholder billing currency. An acquirer ISA is calculated on these message types:

- 0200/0220 full financial requests and advices.
- 0210/0230 full financial response and acquirer advice response.
- 0230 adjustment advice response.
- 0400/0420 financial request reversals and reversal advices.
- 0410/0430 financial reversal response and advice response.

This field is not present in response messages when an acquirer ISA is not assessed. The acquirer ISA amount is calculated and reversed on reversal transactions and is not assessed on exception item transactions.

Acquirer ISA charges are assessed if these conditions are met:

- Merchant is in U.S. or AP region.
U.S. military bases, embassies, and consulates that are located outside the 50 U.S. states and District of Columbia must be identified in fields 43 and 59.
- Issuer country is different from the merchant country.
- Contains a transaction currency
- Contains a cardholder billing currency

Cross-border acquirers may be assessed Acquirer ISA charges.

Field 63.21 is not present in 0210 response messages when an acquirer ISA is not assessed. The acquirer ISA amount is calculated and reversed on reversal transactions and is not assessed on exception item transactions.

Issuer ISA: To indicate that an issuer ISA was assessed on a transaction, V.I.P. inserts a **C** (for single currency) or an **S** (for multicurrency) in these messages to participating issuers:

- 0200/0220 full financial requests and advices.
- 0400/0420 financial request reversals and reversal advices.

Issuers should not return this field in 0210/0410 responses or 0230/0430 advices.

As with acquirer ISAs, an issuer ISA is reversed in a reversal transaction and is not assessed on exception items.

The international transaction must meet these conditions:

- The issuer country is different from the merchant country
- Contains a transaction currency
- Contains a cardholder billing currency

International transactions are *excluded* from ISA processing if:

- Issuer country and merchant country are within Europe.
- Issuer country is the U.S., and the merchant location is in a U.S. territory, U.S. military base, U.S. embassy, or U.S. consulate.

For transactions to which an ISA applies, a currency conversion fee amount is not included in Field 6. However, optional issuer fees defined by the issuer would still apply on transactions where the transaction currency is different from the cardholder billing currency.

See the “Field 46” description.

Field 63.21 – Field Edits

None.

Field 63.21 – Reject Codes

None.

Field 63.21 – Valid Values

Table 79: Field 63.21 - ISA Values (Acquirer ISA)

Code	Definition
G	Base cash acquirer ISA-assessed
E	Enhanced purchase acquirer ISA-assessed
H	Enhanced cash acquirer ISA-assessed

Table 80: Field 63.21 - ISA Values (Issuer ISA)

Code	Definition
C	Single-currency issuer ISA assessed (U.S. only)
S	Multicurrency issuer ISA-assessed (U.S. only) Single or multicurrency issuer ISA was assessed (non-U.S.)

Field 66 – Settlement Code

Field 66 – Attributes

fixed length

1 N, 4-bit BCD (unsigned packed); 1 byte

Field 66 – Description

Field 66 contains a code, returned in the 0530 response to a reconciliation advice, indicating whether or not the user agrees with the reconciliation totals provided by the Switch in the 0520 message. The table in the Valid Values section defines the codes for this field. A leading zero is required to pad the first unused half-byte of this field. The zero is filler and not part of the code.

Field 66 – Usage

This field is only applicable to reconciliation response messages.

9 should be used when real-time reconciliation cannot be performed or when the user is out of balance but doesn't want to return user totals in the reconciliation response.

Field 66 – Field Edits

Required in 0530 messages. Codes are listed in the Valid Values section.

Field 66 – Reject Codes

0043 = Invalid value

0322 = Field missing

Field 66 – Valid Values

Table 81: Field 66 Settlement Codes

Code	Definition
1	In balance
2	Out of balance
9	Acknowledgment without reconciliation

Field 68 – Receiving Institution Country Code

Field 68 – Attributes

fixed length

3 N, 4-bit BCD (unsigned packed); 2 bytes

Field 68 – Description

Field 68 contains the code for the country of the receiving institution in field 100. Country codes are listed in the appendix titled “Country and Currency Codes.” A leading zero is required to pad the first unused half-byte of this field. The zero is a filler and is not part of the code.

Field 68 – Usage

STIP and Switch Advices: This field is present in the following advices if it was in the request. It is not required in an advice response.

STIP-generated 0220 or 0420 advice

Switch-generated 0420 advice

Field 68 – Field Edits

The code in field 68 must be one of the 3-digit numeric codes listed in the appendix titled “Country and Currency Codes.”

Field 68 – Reject Codes

0119 = Invalid value

Field 69 – Settlement Institution Country Code

Field 69 – Attributes

fixed length

3 N, 4-bit BCD (unsigned packed); 2 bytes

Field 69 – Description

Field 69 contains the code for the country of the settlement institution in field 99. The values for this field are the numeric country codes listed in the appendix titled “Country and Currency Codes.” A leading zero is required to pad the first unused half-byte of this field. The zero is filler and is not part of the code.

Field 69 – Usage

This field has possible applicability in messages related to reconciliation and settlement only.

STIP and Switch Advices: This field is returned in advice responses.

Field 69 – Field Edits

Must be one of the 3-digit numeric codes listed in the appendix titled “Country and Currency Codes.”

Field 69 – Reject Codes

0120 = Invalid value

Field 70 – Network Management Information Code

Field 70 – Attributes

fixed length

3 N, 4-bit BCD (unsigned packed); 2 bytes

Field 70 – Description

Codes used in network management (including Dynamic Key Exchange), reconciliation, and funds transfer text. Values are in the Valid Values section.

In a network management message, the code identifies the type of network control (system status changes or echo test), or the dynamic key exchange step (requesting or delivering a new key).

In the optional 0520 message, this field provides notification of the Visa settlement cutoff date.

In a funds transfer totals message, the code identifies whether the totals are provided by the VisaNet Settlement Service (VSS).

A leading zero is required to pad the first unused half-byte of this field. The zero is a filler and is not part of the code.

Field 70 – Usage

This field is used only in 05xx, 06xx, and 08xx messages.

Dynamic Key Exchange: This field is required in 0800 working key requests and their 0810 responses. The allowable values in an 0800 request are **160**, **161**, **162**, and **163**. If this field is **162** or **163**, Field 48 must also be present.

There is a 10-second timeout for all messages containing new working keys. If the client does not respond within ten seconds, another delivery attempt is made. If the client fails to respond to the second attempt, the key exchange attempt is canceled.

Visa Smart Debit/Visa Smart Credit (VSDC): This field is required in 0620 issuer authentication failure or issuer script results advices and their 0630 responses. The code must be **951**.

Switch Advices: This field is present in these advices:

Switch-generated 0620 advice

Advices From BASE II Endpoints: This field is present in free text advices.

Fraud Reporting: These points apply.

- Client-generated-The field must contain:

0942 = Acquirer-generated advice

0943 = Issuer-generated advice

- V.I.P.-generated-The field contains:

0944 = Advices destined to acquirers

0945 = Advices destined to issuers

Network Monitoring Option: Acquirers and issuers are required to accept an 0800 echo test message from V.I.P. at least once every 5 minutes, *regardless of traffic conditions*. They must respond with an 0810 response message. This provides clients with added monitoring facility to identify and correct problems encountered with response time or connectivity.

Clients can also initiate an echo test. When a client submits an 0800 message with this field set to **0301** (echo test), V.I.P. sends an 0810 response to the client.

Settlement Position Query and Advice: This field is required in the 0600/0610 and 0620/0630 with a value of **294**.

Field 70 – Field Edits

This field is required if the message type is 05xx, 06xx, or 08xx. The code must be one of those in the Valid Values section. In a response or advice response, this code must match that in the request or advice.

Acquirers and issuers must not submit ad hoc requests for the current day's cumulative totals that reflect totals from the start of the processing day to the time of the request. Such requests receive reject code **0599** (consistency error).

An 0800 message with a value of **280** (previous day's totals) is not supported and is rejected with reject code **0599**.

Visa Smart Debit/Visa Smart Credit: The code must be **951** in 0620/0630 messages.

Field 70 – Reject Codes

0042 = Invalid value

0321 = Field missing

0599 = Consistency error; invalid combination of Message Type Identifier and message fields

Field 70 – Valid Values

Table 82: Field 70 Network Management Information Codes

Code	Description
Network Control/Dynamic Key Exchange	
Message Types 0800 and 0810	
071	Sign on to VisaNet Note: Visa recommends this sign on value for Full Service client.
072	Sign off from VisaNet Note: Visa recommends this sign off value for Full Service client.
078	Start transmission of advices Note: Visa recommends this advice retrieval value for V.I.P. Full Service issuers.
079	Stop transmission of advices Note: Visa recommends this advice retrieval value for V.I.P. Full Service issuers.
081	Sign on to V.I.P.
082	Sign off from V.I.P.
088	Sign on to recovery. The codes 088 and 089 should be used only for advice recovery. The station is not signed off to sign on to advice recovery.
089	Sign off from recovery (see 088)
101	Key change request
160	Request for a new acquirer working key (acquirer to VisaNet)
161	Request for a new issuer working key (issuer to VisaNet)
162	Deliver a new acquirer working key (VisaNet to acquirer)
163	Deliver a new issuer working key (VisaNet to issuer)
164	Update acquirer key
165	Update issuer key
301	Echo test <i>Can be initiated by the VisaNet Interchange Center (VIC) or the client</i>
Automatic Reconciliation	
Message Types 0520 and 0530	
289	Notification of settlement date cutoff

Table 82: Field 70 Network Management Information Codes

Code	Description
Funds Transfer Totals	
Message Types 0620 and 0630	
290	Non-VSS Funds Transfer Totals
292	VSS Funds Transfer Totals
Text Messages	
Message Types 0600, 0610, 0620, and 0630	
883	Text message
Settlement Position Query and Advice	
Message Types 0600, 0610, 0620, and 0630	
294	Intra-day settlement
Fraud Reporting	
Message Types 9620 and 9630	
942	Acquirer-generated advice
943	Issuer-generated advice
944	Advices destined for acquirers
945	Advices destined for issuers
VSDC	
Message Types 620 and 630	
951	Issuer authentication failure or issuer script results advice

Field 73 – Date, Action

Field 73 – Attributes

fixed length

6 N, 4-bit BCD (unsigned packed); 3 bytes

format: variable

Field 73 – Description

Visa defines field 73 for miscellaneous dates, including file maintenance, expiration, and purge dates. Dates can be six digits in the file maintenance *yymmdd* format. Purge dates beyond the current year are acceptable.

Field 73 – Usage

This field is used for file processing in conjunction with fields 91 and 127; it is not used for cardholder transactions.

In adds and changes for records in the Account Screen Authorization File (ASAF), Visa routinely changes the purge date entered by the issuer to coincide with the *YYMMDD* expiration date of the Card Recovery Bulletin in effect at that time.

(See fields 91, 92, and 127.)

In file update requests, the date specified in field 73 determines how long the cardholder or merchant record must stay on file at the VIC, that is, the record's purge date. It is returned in the response. It is not used in a delete update or an 0302 file inquiry request. If this field is present in an 0302 file inquiry request, V.I.P. ignores it. It is present in the file inquiry response only if the response code is **00**.

The date format is *yymmdd*, where:

yy = **00-99**

mm = **01-12**

dd = **00-31** (when *dd* = **00**, V.I.P. calculates the purge date as the last day of the month), or the value **999900**.

For PIN Verification Value (PVV), the value **999900** leaves the record on file indefinitely.

ASAF: Issuers must submit 0302 File Maintenance messages with a purge date in this field that is five years or less from the date added or updated in ASAF for negative action codes **04, 07**,

14, 41, 43, and 46. If the purge date is more than five years, Visa changes it to five years from the date added or updated in ASAF.

For ASAF action codes **05, 11, 54, A1-A9, XA, XC, and XD** submitted by issuers with a purge date of **999900**, V.I.P. sets the date to 01 September 2037 in ASAF. If an issuer submits a purge date in this field greater than 31 December 2041, V.I.P. rejects the file maintenance message with file maintenance error code **0575** (invalid purge date).

Auto-CDB (Visa Only): This field is present in 0120 and 0322 file maintenance advices but not in 0130 or 0332 responses. The value is set to the greater of the purge date on file, or the current date plus 60 days.

Auto-CDB lists the account for 60 days from the date of the update or until the original expiration date for the account listing, whichever date is later. For account listings set to expire in less than 60 days, Auto-CDB changes the expiration date to 60 days. If the account is listed in the ASAF with something other than Auto-CDB status, Auto-CDB changes the listing to Auto-CDB status.

Field 73 – Field Edits

None.

Field 73 – Reject Codes

0171 = Invalid date (non-numeric value).

Field 73 – File Edits

This field is required in an 0300 or 0302 request if field 91 is **1, 2, or 4**. File edits requirements:

- The value in this field must be numeric.
- The date cannot be expired, and the *dd* positions must be **00-31** or **999900**.
- The *mm* positions must be **01-12** or **99**.
- The *yy* positions must be **00-99**.

If field 91 contains **3** or **5**, this field must be omitted.

Field 73 – File Maintenance Error Codes

0574 = Purge date (field 73) month is not **01-12**

0575 = Invalid purge date.

Field 74 – Credits, Number

Field 74 – Attributes

fixed length

10 N, 4-bit BCD (unsigned packed); 5 bytes

Field 74 – Description

This field is used in 0520 reconciliation messages.

Field 74 – Usage

This data is not available and V.I.P. zero fills this field.

Field 74 – Field Edits

V.I.P. rejects transactions with reject code **0044** (invalid value), if this field contains a non-numeric value in the 0530 response message.

Field 74 – Reject Codes

0044 = Invalid value

Field 75 – Credits, Reversal Number

Field 75 – Attributes

fixed length

10 N, 4-bit BCD (unsigned packed); 5 bytes

Field 75 – Description

This field is used in 0520 reconciliation messages.

Field 75 – Usage

This data is not available and V.I.P. zero fills this field.

Field 75 – Field Edits

V.I.P. rejects transactions with reject code **0045** (invalid value), if this field contains a non-numeric value in the 0530 response message.

Field 75 – Reject Codes

0045 = Invalid value

Field 76 – Debits, Number

Field 76 – Attributes

fixed length

10 N, 4-bit BCD (unsigned packed); 5 bytes

Field 76 – Description

This field is used in 0520 reconciliation messages.

Field 76 – Usage

This data is not available and V.I.P. zero fills this field.

Field 76 – Field Edits

V.I.P. rejects transactions with reject code **0046** (invalid value), if this field contains a non-numeric value in the 0530 response message.

Field 76 – Reject Codes

0046 = Invalid value

Field 77 – Debits, Reversal Number

Field 77 – Attributes

fixed length

10 N, 4-bit BCD (unsigned packed); 5 bytes

Field 77 – Description

This field is used in 0520 reconciliation messages.

Field 77 – Usage

This data is not available and V.I.P. zero fills this field.

Field 77 – Field Edits

V.I.P. rejects transactions with reject code **0047** (invalid value), if this field contains a non-numeric value in the 0530 response message.

Field 77 – Reject Codes

0047 = Invalid value

Field 86 – Credits, Amount

Field 86 – Attributes

fixed length

16 N, 4-bit BCD (unsigned packed); 8 bytes

Field 86 – Description

This field is used in 0520 reconciliation messages.

Field 86 – Usage

This data is not available and V.I.P. zero fills this field.

Field 86 – Field Edits

V.I.P. rejects transactions with reject code **0048** (invalid value), if this field contains a non-numeric value in the 0530 response message.

Field 86 – Reject Codes

0048 = Invalid value

Field 87 – Credits, Reversal Amount

Field 87 – Attributes

fixed length

16 N, 4-bit BCD (unsigned packed); 8 bytes

Field 87 – Description

This field is used in 0520 reconciliation messages.

Field 87 – Usage

This data is not available and V.I.P. zero fills this field.

Field 87 – Field Edits

V.I.P. rejects transactions with reject code **0049** (invalid value), if this field contains a non-numeric value in the 0530 response message.

Field 87 – Reject Codes

0049 = Invalid value

Field 88 – Debits, Amount

Field 88 – Attributes

fixed length

16 N, 4-bit BCD (unsigned packed); 8 bytes

Field 88 – Description

This field is used in 0520 reconciliation messages.

Field 88 – Usage

This data is not available and V.I.P. zero fills this field.

Field 88 – Field Edits

V.I.P. rejects transactions with reject code **0050** (invalid value), if this field contains a non-numeric value in the 0530 response message.

Field 88 – Reject Codes

0050 = Invalid value

Field 89 – Debits, Reversal Amount

Field 89 – Attributes

fixed length

16 N, 4-bit BCD (unsigned packed); 8 bytes

Field 89 – Description

This field is used in 0520 reconciliation messages.

Field 89 – Usage

This data is not available and V.I.P. zero fills this field.

Field 89 – Field Edits

V.I.P. rejects transactions with reject code **0051** (invalid value), if this field contains a non-numeric value in the 0530 response message.

Field 89 – Reject Codes

0051 = Invalid value

Field 90 – Original Data Elements

Field 90 – Attributes

fixed length

42 N, 4-bit BCD (unsigned packed); 21 bytes

Field 90 – Description

Field 90 contains information for tracking the current message back to prior messages for the same cardholder transaction, for instance, a reversal to an original request. This field is fixed-length with five subfields.

Positions: 1-4	5-10	11-20	21-31	32-42
original message type	original trace number	original transmission date/ time	original acquirer ID	original forwarding institution ID
Byte 1-2	Byte 3-5	Byte 6-10	See below	See below

Positions 1-4, Original Message Type (Field 90.1): This subfield contains the 4-digit message type identifier from the original message.


Positions 5-10, Original Trace Number (Field 90.2): This subfield contains the 6-digit trace number from field 11 of the original message.

Positions 11-20, Original Transmission Date and Time (Field 90.3): This subfield contains the 10-digit transmission date and time from field 7 of the original message.

Positions 21-31, Original Acquirer ID (Field 90.4): This subfield contains 11 positions for the acquiring institution ID from field 32 of the original request, right-justified, with lead zero fill.

Positions 32-42, Original Forwarding Institution ID (Field 90.5): This subfield contains 11 positions for the forwarding institution ID from field 33 of the original request, which is right-justified, with lead zero fill. It contains all **zeros** if field 33 was not present in the original request.

The institution ID subfields do not follow the usual rule regarding byte boundaries: each occupies 5.5 bytes as shown in the illustration.

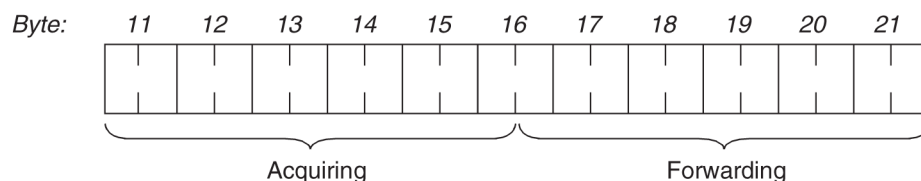

Field 90 – Usage

Used in all 04xx messages except Fee Collections and Funds Disbursements. This field is used in every message subsequent to the original. It is a key data element used to match a response to its request or a message to others for a given cardholder transaction.

This field is optional in Visa (network ID = **0002**) 0422 dispute financials and dispute financial reversals, and 0220 dispute response financials, and their respective 0432 and 0230 responses. It is required in Plus (network ID = **0004**) 0422 dispute financials and dispute financial reversals, and 0220 dispute response financials and their respective 0432 and 0230 responses.

The first subfield, Original Message Type, must be provided whenever field 90 is used. The remaining subfield positions must be **zero** or valid numeric digits (using BCD values). The first subfield value is determined as follows:

- In a reversal, this identifies the request for the financial transaction being reversed.
- In a dispute financial or dispute financial reversal, this identifies the original request or acquirer-generated financial advice for the financial transaction.

Although this field is optional in 0220 adjustments (except as noted) and dispute response financials, issuers that receive the field must return it in responses.

In Visa-generated Automated Teller Machine (ATM) Format Conversion Service (AFC) credit adjustments, the field is required. In these adjustments, field 90.4 must contain the original acquirer ID. Field 32 contains the Visa-inserted value of 400015.

In a reversal, dispute financial, and dispute financial reversal, the message type in this field must match that of the original financial transaction. The value in a misdispense adjustment should appear in a dispute financial and a dispute response financial.

STIP and Switch Advices: This field is present in these advice if it was in the request: STIP-generated 0220 advice.

This field is present in a STIP- or Switch-generated 0420 advice. The value in the 0430 response should match that in the 0400/0420 advice.

Advices From BASE II Endpoints: This field is required in 0422 dispute financials and their 0432 responses.

Acquirers should continue to use the transaction identifier in field 62.2 for message matching.

Field 90 – Field Edits

This field is optional in Visa (network ID = **0002**) 04xx dispute financials, Dispute Financial reversal, and dispute response financial messages. It is required in Plus (network ID = **0004**) 04xx Dispute Financial, Dispute Financial reversal, and dispute response financial messages. If present in the request, it must be returned in the response. It is not used in Fee Collections and Funds Disbursements. Positions 5-42 are not edited.

In an 0400/0420 reversal and 0422 Dispute Financial or Dispute Financial reversal, the message type here must match that of the original 0200 or 0220 financial transaction. In the 0420/0430 reversal advice/advice response, the message type must match that of the 0200 transaction being reversed. In the 0220/0230 dispute response financial advice/advice response, the message type must match the 0422 advice.

This field must be present in an 0420 account transfer reversal; otherwise, the reversal is rejected with reject code **0599** (consistency error).

Field 90 – Reject Codes

0055 = Invalid value

0336 = Field missing

Field 91 – File Update Code

Field 91 – Attributes

fixed length

1 AN, EBCDIC; 1 byte

Field 91 – Description

Field 91 contains a code that specifies the type of file processing required. See “Valid Values” for codes.

Field 91 – Usage

This field is used in 0302 messages for updates and inquiries for all Cardholder Database files. It is returned unchanged in 0312 responses. If this field contains a **5** for inquiry requests, fields 73 and 127 are not used; if they are present, V.I.P. ignores them.

File Maintenance Advices (Visa Only): This field is present in 0120 and 0322 file maintenance advices. It is not present in 0130 or 0332 responses.

Payment Fraud Disruption (PFD): This field contains a **1** (Add or update) for 0302 PFD file maintenance messages to add a PAN to the Payment Fraud Disruption Blocking Allow List file. This file bypasses PFD blocking for 72 hours.

See Field 63.4 for STIP/Switch Reason Codes for declined transactions due to PFD blocking.

Field 91 – Field Edits

Field edits are required in all 03xx requests.

Field 91 – Reject Codes

0341 = Field missing

Field 91 – File Edits

The code must be one of those in the table titled “Field 91 File Update Codes,” in the Valid Values section.

Attempts to delete an account number if the number does not exist result in a file maintenance error (error code **0565**).

Account Level Processing (ALP): The inquire command (**5**) is allowed. The add(**1**), change(**2**), delete(**3**), and replace(**4**) commands are not allowed and result in a file maintenance error (error code **0568**).

Payment Fraud Disruption (PFD): If this field is missing or contains a value other than **1** (Add or update) in 0302 PFD file maintenance messages, V.I.P. sends the response code **06** (Error) in Field 39 and **0568** (Field 101—File Name is **PFD** and the file update code contains a code other than **1**) in Field 48, Usage 1b.

Field 91 – File Maintenance Error Codes

0341 = Field 91—File Update code missing.

0565 = No record on file.

0566 = Record on file; cannot add.

0568 = Invalid file update, code not equal to 5, OR

0568 = Field 101—File Name is **PFD** and the file update code contains a code other than **1**.

Field 91 – Valid Values

Table 83: Field 91 File Update Codes

Code	Definition	Explanation
1	Add	Except as noted, add new record if one does not exist. Note: For ASAF records, if record exists, CDB applies update as change.
2	Change	Except as noted, change record. Note: For ASAF records, if record does not exist, CDB applies update as add.
3	Delete	Delete record.
4	Replace	Add new record if none exists or replace record.
5	Inquire	Send copy of record.

Field 92 – File Security Code

Field 92 – Attributes

fixed length

2 AN, EBCDIC; 2 bytes

Field 92 – Description

Field 92 contains an operator identification number.

Field 92 – Usage

An issuer uses this field when it must include an operator ID in a file update or file inquiry.

Field 92 is optional in 0302 requests. If present in a request, it is returned in the 0312 response.

Field 92 – Field Edits

None.

Field 92 – Reject Codes

0342 = Field missing

Field 92 – File Edits

None.

Field 92 – File Maintenance Error Codes

None.

Field 95 – Replacement Amounts

Field 95 – Attributes

fixed length

42 AN, EBCDIC; 42 bytes

Field 95 – Description

In a partial reversal, field 95 contains the corrected amount of a V.I.P. Authorization-Only transaction. This field is defined as fixed-length with four subfields, but only the first subfield is used.

Positions:

1-12	13-24	25-33	34-42
actual amount, transaction	unused	unused	unused
Byte 1-12	Byte 13-42		

Positions 1-12, Actual Amount, Transaction (Field 95.1): This 12-position field is used for the corrected, actual amount of the cardholder's transaction, in the transaction currency. The value is right justified, with lead zero-fill.

Positions 13-24, Actual Amount, Settlement (Field 95.2): These positions are not used and must be zero-filled.

Positions 25-33, Actual Amount, Transaction Fee (Field 95.3): These positions are not used and must be zero-filled.

Positions 34-42, Actual Amount, Settlement Fee (Field 95.4): These positions are not used and must be zero-filled.

The amount in field 95 is expressed in the currency identified by Field 49-Currency Code, Transaction. The number of decimal places assumed for this field depends on the currency. Currency codes and the locations of the implied decimal place for each currency are listed in the appendix titled "Country and Currency Codes."

Field 95 – Usage

This field, which is present in an 0400 or 0420 partial reversal of a V.I.P. Authorization-Only request, contains the corrected amount of the transaction, including the access fee amount in

field 28. If the issuer participates in multicurrency, field 61.3 contains the equivalent amount as cardholder billing currency in partial reversals.

Field 95 is used in partial reversal messages only; it is not present in other reversal messages. If present in partial reversal requests, it must be present in responses and related advices.

When V.I.P. Full Service acquirers submit full-financial transactions that are not successfully completed, they must be corrected using an adjustment, not a partial reversal.

Field 95 – Field Edits

If field 95 is present, it must be numeric and right-justified in the first 12 positions, with leading zero fill. The remaining 30 positions must be filled with zeros.

Visa rejects an ATM or POS transaction with reject code **0115** (invalid value) if an acquirer submits:

- A partial reversal with the amount in field 95 equal to the amount in field 4.
- A partial reversal with an amount of zeros in field 95.

If the amount sent by the acquirer in field 95.1 when converted to the issuer currency results in an amount less than the number of minor units (e.g., USD\$0.001), then all zeros may be present in the partial reversal request sent to the issuer.

Field 95 – Reject Codes

0115 = Invalid value, or value is greater than the transaction amount in field 4.

Field 96 – Reserved

Field 96 – Reserved

fixed length

64 N, bit string; 8 bytes

Field 96 – Description

This field has been replaced with field 110 .

Field 96 – Usage

N/A

Field 96 – Field Edits

None.

Field 96 – Reject Codes

None.

Field 97 – Amount, Net Settlement

Field 97 – Attributes

fixed length

17 AN, EBCDIC; 17 bytes

Field 97 – Description

This field is used in 0520 reconciliation messages.

Field 97 – Usage

This data is not available and V.I.P. zero fills this field.

Field 97 – Field Edits

V.I.P. rejects transactions with reject code **0052** (invalid value), if this field contains a non-numeric value in the 0530 response message.

Field 97 – Reject Codes

0052 = Invalid value

Field 99 – Settlement Institution Identification Code

Field 99 – Attributes

variable length

1 byte, binary +

11 N, 4-bit BCD (unsigned packed); maximum: 7 bytes

Field 99 – Description

Field 99 contains a code that identifies the financial entity for which reconciliation or settlement information is being requested or provided. This code is usually a Visa-assigned settlement identifier, but it may be another type of identifier such as a transit and routing number. The field has one subfield following the length subfield and is defined as follows.

Positions: 1-11	
length	identifier

Length: This subfield specifies the number of digits in the identifier. Leading **zero** needed to fill the first unused half-byte (when the identifier contains an odd number of digits) is not included in the length specification.

Positions 1-11, Identifier: This subfield contains a 6-digit Visa settlement identifier.

Field 99 – Usage

Field 99 is used only in messages related to reconciliation and settlement. This field and the code in field 70 are the keys to which financial statistics are being reported. Field 99 is present in:

- 0520/0530 reconciliation messages
- 0620 settlement position advice messages, inserted by V.I.P.
- 0620/0630 funds transfer totals to VSS messages

Field 99 – Field Edits

Field 99 is required in all 0520/0530 reconciliation messages, in 0620/0630 funds transfer totals to VSS messages.

- The length cannot exceed **11** positions.
- The value in this field must be a 6-digit Visa settlement identifier.
- The value in response must match that in the request or advice.

Field 99 – Reject Codes

0058 = Invalid length

0059 = Invalid value

Field 100 – Receiving Institution Identification Code

Field 100 – Attributes

variable length

1 byte, binary +

11 N, 4-bit BCD (unsigned packed); maximum: 7 bytes

Field 100 – Description

Field 100 is a message routing field. It contains a code that identifies the institution which should receive a request or advice. This ID is used when it is not possible to route a message using the account number field in the message. The routing information in this field supersedes routing information in all other account number fields. The field has one subfield following the length subfield and is defined as follows.

Positions: 1-11	
length	institution ID code
Byte 1	Byte 2-7

Length: This subfield specifies the number of digits in the identifier. If the ID is an odd number of digits, a leading zero is required to pad the first unused half-byte of data. Because the zero is a filler, not part of the ID code, it is not counted for the length subfield.

Clients must coordinate field usage with Visa before using field 100 in transactions.

Field 100 – Usage

This field is used to identify the destination of an 0220 acquirer fee collection or funds disbursement advice (Visa only) and its 0230 response if the field 2 account number is not present in the message.

When this field is used, it is required in the request and in responses.

Fraud Reporting:

- Client-generated – The field must contain **400050**.
- VisaNet-generated – The field contains the issuing or acquiring identifier to which this advice is delivered. The issuing or acquiring identifier is the same as the Forward Institution ID in the original fraud transaction.

Visa-Generated Funds Disbursements (Plus): The format of this field is LNNNNNN, where:

- L = Length of value
- N = 6-position Visa issuing or acquiring identifier or ID code

STIP and Switch Advices: This field is included in these advices if it was in the request:

- STIP-generated 0220 advice
- Switch-generated 0620 text message advice

It is not used in advice responses.

Field 100 – Field Edits

Field must be numeric and cannot exceed **11** digits including the length subfield.

Field 2 or field 100 is required in all 0220 and 0230 acquirer fee collection or funds disbursements (field 3 = **19xxxx** or **29xxxx**) advices and responses (Visa only), and in all 0600/0620 text messages (field 70 = **883**) and responses. The value must be a 6-digit numeric Visa issuing or acquiring identifier, or ID code.

Field 100 – Reject Codes

0082 = Invalid value

0100 = Invalid length

0334 = Field missing

0335 = Field missing

Field 101 – File Name

Field 101 – Attributes

variable length

1 byte, binary +

up to 17 ANS, EBCDIC; maximum: 18 bytes

Field 101 – Description

Field 101 contains a code identifying the VIC-resident cardholder or merchant file to be accessed by a file update or inquiry, and the update/inquiry request format. The length specifies the number of bytes following the length subfield.

Positions: 1-17	
length	file name
Byte 1	Byte 2-18

Field 101 – Usage

When Visa processes E2, E3, and E4 updates, the Account Screen Authorization File (ASAF) is updated.

This field is used in all 03xx file update and file inquiry messages. The file name must be used because it determines the system file affected, the content of the 03xx message, and the field 127 layout.

File Maintenance Advices: This field is present in 0120 and 0322 file maintenance advices but not in 0130 or 0332 responses.

Payment Fraud Disruption (PFD): This field contains **PFD** for 0302 PFD file maintenance messages to add a PAN to the Payment Fraud Disruption Blocking Allow List file. This file bypasses PFD blocking for 72 hours.

See Field 63.4 for STIP/Switch Reason Codes for declined transactions due to PFD blocking.

Field 101 – Field Edits

This field is required in all 03xx file update and file inquiry messages.

Field 101 – Reject Codes

0344 = Field missing.

Field 101 – File Edits

If a file update message is submitted with **A4** or **C4**, V.I.P. returns the transaction with error code **0530**.

Payment Fraud Disruption (PFD): If this field contains an invalid value in 0302 PFD file maintenance messages, V.I.P. sends response code **06** (Error) in Field 39 and **0530** (Field 101 — file name is invalid) in Field 48, Usage 1b.

Field 101 – File Maintenance Error Codes

0530 = Invalid file name

0682 = Invalid length

0684 = The issuing identifier does not participate in the service.

Field 101 – Valid Values

Table 84: Field 101 File Names

Name	File
D1	dCVV2 Participation
E2	Account Screen Authorization File (ASAF)
E3	Account Screen Authorization File (ASAF)
E4	Account Screen Authorization File (ASAF)
L1	This code is used in 0302 messages for ALP inquiries to the CDB. There is no explicit CDB file name.
P2	PIN Verification File
PFD	Payment Fraud Disruption Allow List

Table 84: Field 101 File Names

Name	File
R2	Risk-Level File
SB	Spending balance

Field 102 – Account Identification 1

Field 102 – Attributes

variable length

1 byte, binary +

1-28 ANS, EBCDIC; maximum: 29 bytes

Field 102 – Description

Field 102 contains a value that identifies an account or customer relationship in cardholder transactions. The length specifies the number of bytes following the length subfield.

Positions: 1-28	
length	account identification 1
Byte 1	Byte 2-29

Field 102 – Usage

V.I.P. forwards this field in:

- Authorizations, full-financial transactions, reversals, and partial reversals.
- Related acquirer advices, STIP advices, and responses.

All acquirers and issuers must be prepared to receive this field, which is processed as shown in the following table, except when Multiple Account Selection (MAS) is used in U.S. Plus transactions. For details, see the “MAS” subsection later in this field description.

Table 85: V.I.P. Processing Rules for Field 102

Condition	Processing Rule
The acquirer sends a 3-digit value of 000-009 in the request or advice.	If MCC 6011 or 6012 is used, the field 102 values of 000-009 are reserved for the Plus MAS service. Requests with these values are edited according to Plus MAS processing rules, regardless of which network processes the transaction.
The acquirer sends a value other than 000-009 in the request or advice.	V.I.P. forwards this field to the issuer. If the issuer is unavailable, Visa processes the message in STIP and sends the field to the issuer in a STIP (switch) advice.
The acquirer does not send this field in a request or advice, but the issuer response includes a value in the field.	V.I.P. forwards the issuer response to the acquirer, with the field 102 value submitted by the issuer.
The acquirer sends a value other than 000-009 in the request or advice, and the issuer is available but returns a different field 102 value in the response.	V.I.P. restores the acquirer's original value before sending the response to the acquirer.

MAS in U.S. Plus Transactions: With MAS, cardholders can select the account type, such as checking or savings, and also one of nine accounts previously defined with the issuer. MAS is supported only for Plus; however, the 3-digit values **000** through **009** are reserved for MAS regardless of which network processes the transaction.

The processing rules apply to transactions with MCC **6011** or **6012** that contain a 3-digit MAS value in field 102. Only Plus issuers can participate in MAS; therefore, the processing rules for non-MAS participants are applied to transactions processed in other networks.

Key fields in MAS processing include:

- Field 3, which is used to specify the account type (such as checking or savings).
- Field 102, which is used to identify:
 - A “from” account, except in deposit transactions, or
 - A “to” account in deposit transactions.
- Field 103, which is used to identify a “to” account in a transfer transaction. Field 103 is used exclusively for account transfer transactions.

MAS is supported in the following messages:

- 0200/0210 cash disbursement and response
- 0200/0210 balance inquiry and response
- 0200/0210 account transfer and response
- 0200/0210 ATM deposit and response
- 0200/0210 alternative media and response

- 0220/0230 system-generated adjustment and response
- 0420/0430 financial reversals

In withdrawal, deposit, alternative media, transfers, and balance inquiry requests, field 102 contains the length byte plus three positions to identify the account selection. Optionally, in response messages, issuers can send the 3-digit Account Selection code and an alpha description of the account.

When the Account Selection value is zero in field 102 or field 103 or not present, it indicates that the account type in field 3 is to be used for processing.

This table shows the V.I.P. processing rules for MAS in U.S. Plus Transactions.

Table 86: V.I.P. Processing Rules for MAS in Plus Transactions

Condition	Processing Rule
The acquirer sends a value that is not 000-009 in the request or advice, regardless of whether the issuer participates in MAS.	This is not a MAS transaction.
The acquirer sends a value of 000-009 in the request or advice and the issuer participates in MAS, but the transaction is not U.S. domestic.	V.I.P. declines the transaction with response code 12 .
The acquirer sends a value of 000-001 in the request or advice but the issuer does not participate in MAS.	V.I.P. drops field 102, forwards the request to the issuer, and, before sending the response to the acquirer, restores the 3-digit numeric account that was in the request.
The acquirer sends a value of 002-009 in the request or advice, but the issuer does not participate in MAS.	V.I.P. declines the transaction with response code 57 .
The acquirer sends a value of 000-009 in the request or advice, and the issuer participates in MAS.	V.I.P. forwards the field to the issuer. If the issuer is unavailable, Visa processes the message in STIP and sends this field to the issuer in a STIP (switch) advice.
The issuer returns a value of 000-009 in the first 3 digits of field 102 in the response.	V.I.P. restores the 3-digit numeric account that was in the request (if different from the 3-digit value in the response), appends alpha descriptions of the account sent in field 102 by the issuer, and forwards the response to the acquirer.
The issuer returns a value other than 000-009 in the first 3 digits of field 102 in the response.	V.I.P. drops the value from the response message, restores the 3-digit numeric account that was in the request, and returns the response to the acquirer.

In exception processing, MAS does not apply to dispute financial, dispute response financial, or back-office adjustment transactions. In reversal and misdispense adjustment requests, Visa adds field 102 and field 103 information as needed before forwarding the transaction to the Issuer.

Acquirers that choose to participate in MAS must successfully test to send the account selection information in field 102 and field 103 in Plus ATM transactions. Acquirers that send account

selection information must be able to receive field 102 and field 103 in response messages. Acquirers should include field 102 and field 103 information from the original request in adjustment and reversal transactions.

Participating acquirers must program their ATMs to prompt the cardholder for the account information.

Issuers that choose to participate in MAS must successfully test to receive the account selection information in field 102 and field 103.

See the Plus System, Inc. *By-Laws and Operating Regulations*.

Field 102 – Field Edits

If field 102 is present in the message, the value in the length subfield must not exceed **28**. V.I.P. edits the field to ensure it is correctly formatted; however, with the exception of field 102 edits for Plus MAS participants, V.I.P. does not edit or reject the contents of the field. The Plus MAS edits are included below.

Edits for MAS in U.S. Plus Transactions: In acquirer-generated messages for cardholder transactions (including 0200s and their reversals), this field should contain a 3-digit code in positions 2-29. If these positions contain anything other than this code (such as the code *and* its description from the issuer response), the message is not treated as a MAS message.

Field 102 – Reject Codes

0104 = Invalid length

Field 102 – Valid Values

000 = None, default to field 3

001 = Account 1

002 = Account 2

003 = Account 3

004 = Account 4

005 = Account 5

006 = Account 6

007 = Account 7

008 = Account 8

009 = Account 9

Field 103 – Account Identification 2

Field 103 – Attributes

variable length

1 byte, binary +

1-28 ANS, EBCDIC; maximum: 29 bytes

Field 103 – Description

Field 103 contains a number that identifies an account or cardholder relationship. The length specifies the number of bytes following the length subfield.

Positions:

1-28

length	account identification 2
Byte 1	Byte 2-29

Field 103 – Usage

Except in Multiple Account Selection transactions for U.S. Plus participants, this field may optionally appear only in responses to account transfers. In an account transfer response, the issuer may place the transfer to account number in this field, in addition to returning the acquirer-supplied account number in field 2.

STIP Advices: This field is present in the following advice if it was present in the request: STIP-generated 0220 advice.

Multiple Account Selection (MAS) in U.S. Plus Transactions: For account transfers, cardholders can select the account type, such as checking or savings, and one of nine accounts previously defined with the issuer. Key fields in MAS processing include:

- Field 3, which specifies the account type (such as checking or savings).
- Field 102; when used with field 103, identifies a “from” account.
- Field 103, which is used to identify a “to” account in an account transfer transaction.

In MAS processing, field 103 is used in the following messages:

- 0200/0210 account transfers and responses.
- 0420/0430 account transfer reversals.

In account transfer requests, field 103 optionally contains the length byte plus three positions to identify the cardholder's "to" selected account. Optionally, in response messages, issuers can send the three-digit Account Selection code and an alpha description of the account.

When the Account Selection value is zero in field 102 or field 103 or not present, it indicates that the account type in field 3 is to be used for processing.

The following table shows the V.I.P. processing rules for MAS.

Table 87: V.I.P. Processing Rules for MAS

Condition	Processing Rule
The issuer returns field 102 or field 103 in the response, but does not return the numeric account selection with the alpha description.	Visa drops the value from the response message, restore the numeric account that was in the request, and return the response to the acquirer.
The acquirer submits a transaction with an account selection value of 001 in field 102, and Visa determines that the Issuer does not participate in MAS.	Visa drops field 102 in the message and forward the request to the Issuer.
The acquirer submits a transaction with with an account selection value not equal to 001 in field 102, and Visa determines that the Issuer does not participate in MAS.	Visa declines the transaction with response code 57 (transaction not permitted to cardholder).

In exception processing, MAS does not apply to dispute financial, dispute response financial, or back-office adjustment transactions. In reversal requests, Visa adds field 102 and field 103 information as needed before forwarding the transaction to the Issuer.

Acquirers that choose to participate in MAS must successfully test to send the account selection information in field 102 and field 103 in Plus ATM transactions. Acquirers that send account selection information must be able to receive field 102 and field 103 in response messages. Acquirers should include field 102 and field 103 information from the original request in reversal transactions.

Participating acquirers must program their ATMs to prompt the cardholder for the account information.

Issuers that choose to participate in MAS must successfully test to receive the account selection information in field 102 and field 103.

See the Plus System, Inc. *By-Laws and Operating Regulations*.

Field 103 – Field Edits

If this field is present, length cannot exceed **28**. Except in MAS transactions for U.S. Plus participants, it is not allowed in requests for card transactions; the field is dropped by VisaNet before the message is forwarded to the issuer.

Field 103 – Reject Codes

0111 = Invalid length

0112 = Invalid value

0397 = Field missing

Field 103 – Valid Values

000 = None, default to field 3

001 = Account 1

002 = Account 2

003 = Account 3

004 = Account 4

005 = Account 5

006 = Account 6

007 = Account 7

008 = Account 8

009 = Account 9

Field 104, Usage 2 – Transaction-Specific Data

Field 104, Usage 2 - Attributes

variable length

1 byte, binary +

255 bytes; variable by usage; maximum 256 bytes

or

variable length

2 bytes, binary +

1535 bytes, variable by usage, maximum 1537 bytes

Note: ISO definition supports 9999 bytes in two-byte format.

Field 104, Usage 2 – Description

This field description contains datasets presented in hex number order. The dataset IDs listed for position 1 can be used as a guide to the Usage section, which specifies the content for each dataset.

The datasets, which are in TLV format, can have multiple sub-elements. The TLV format is shown below.

This dataset contains transaction-specific data in one-byte format.

Positions: 1		2-3	4-255
Subfield 1: length	Subfield 2: dataset ID	Subfield 3: dataset length	Subfield 4: TLV sub-elements
Byte 1	Byte 2	Byte 3-4	Byte 5-256

or

This dataset contains transaction-specific data in two-byte format.

Positions: 1		2-3	4-1535
Subfield 1: length	Subfield 2: dataset ID	Subfield 3: dataset length	Subfield 4: TLV sub-elements
Byte 1-2	Byte 3	Byte 4-5	Byte 6-1537

Length Subfield: One-Byte Format One-byte binary subfield that contains the number of bytes following the length subfield. The maximum is **255**.

or

Length Subfield: Two-Byte Format Two-byte binary subfield that contains the number of bytes following the length subfield. The maximum is **1535**.

Position 1, Dataset ID: This one-byte binary subfield contains a hexadecimal value that identifies the TLV data that follows. These are the values:

- Dataset ID 57, Related Transaction Data (U.S. Only Payment transactions and ATM Deposit Transactions)
- Dataset ID 5D, Installment Payment Data
- Dataset ID 64, Visa Advanced Authorization Data, VAA data
- Dataset ID 6C, Travel Tag Data
- Dataset ID 6D, Issuer-Supplied Data
- Dataset ID 70, ATM Mini Statement Dataset 1

Positions 2-3, Dataset Length: This 2-byte binary subfield specifies the total length of the TLV fields present in the dataset. The length is variable, depending on the data that follows.

Positions 4-255, TLV Data: One-Byte Format Each subfield of a data set has a defined tag, length, and value. The tag is used with the dataset ID value. The dataset subfields can be present with other TLV subfields.

or

Positions 4-1535, TLV Data: Two-Byte Format Each subfield of a data set has a defined tag, length, and value. The tag is used with the dataset ID value. The dataset subfields can be present with other TLV subfields.

Field 104, Usage 2 – Usage

Endpoints that support this field must be able to receive dataset IDs and tags defined for this field, including those that they do not recognize or expect. Endpoints can receive multiple datasets in this field. Endpoints must ignore dataset IDs or tags they do not recognize and continue to process the field.

These subsections describe the usages for this field.

Field 104, Usage 2 – Dataset ID 57

Original Credit Cash Deposit Transactions: Acquirers and originators that submit a domestic cash deposit transaction must submit a business application identifier of CD (Cash Deposit) and may include these card-present data fields:

- Field 23—Card Sequence Number
- Field 35—Track 2 Data
- Field 45—Track 1 Data
- Field 52—Personal Identification Number (PIN) Data
- Field 53—Security-Related Control Information
- Field 55, Usage 1—VSDC Chip Data in TLV format or equivalent third bitmap fields, as applicable
- Field 123, Usage 2—Verification and Token Data (TLV Format)

Original Credit Gambling Payouts: Acquirers and originators that submit a domestic or cross border gambling payout transaction must submit a business application identifier of GP (Gambling Payout) and may include these Card Present Data Fields.

- Field 23—Card Sequence Number
- Field 35—Track 2 Data
- Field 45—Track 1 Data
- Field 52—Personal Identification Number (PIN) Data
- Field 53—Security-Related Control Information
- Field 55, Usage 1—VSDC Chip Data in TLV format or equivalent third bitmap fields, as applicable
- Field 123, Usage 2—Verification and Token Data (TLV Format)

Dataset ID 57, Payment Transactions (U.S. Only) and ATM Deposit Transactions: In Dataset ID 57, Tag 02 carries the Source of Funds field, which can be cash, check, or card, as shown in these table.

Table 88: Dataset ID 57, Related Transaction Data (Payment Transactions and ATM Deposit Transactions)

Tag	Value	Length	Format	Content of Sub-Elements
02	Source of Funds	1	AN	1 = Cash 2 = Check 4 = Cash and Check 5 = Envelope Deposits

Acquirers that process deposit transactions must send this field to indicate cash and check deposit in authorization requests and receive the indicator in responses.

For ATM cash deposit transactions, issuers must return the same value in responses as received in a request, otherwise; Visa rejects the transaction with reject code **0603**.

Field 104, Usage 2 - Dataset ID 5D

Dataset ID 5D, Installment Payment: This dataset supports the transmission of Paraguay domestic installment payment data and is used in these messages:

- 0200/0220 full-financial request, acquirer advice, STIP advice
- 0420 financial reversal, acquirer advice, issuer STIP advice, acquirer switch advice, and issuer switch advice
- 0422 dispute financials and 0220 dispute response financials and their reversals

Acquirers that submit this field in the request message receive it in the response. V.I.P. includes the field in the response if the issuer does not provide it.

Table 89: Dataset ID 5D, Installment Payment Data

Tag	Format	Value	Content
01	12N, 4-bit BCD, 6 bytes	Total Installment Amount	The total amount cannot exceed USD\$500,000. Zero-filled, right-justified.
02	3N, 4-bit BCD, 2 bytes	Installment Payment Currency	Installment Payment Currency Zero-filled, right-justified.
03	4N, 4-bit BCD, 2 bytes	Number of Installments	Contains number of months from 01-99 that the payment amount is divided in. Right-justified with leading zeros.
04	12N, 4-bit BCD, 6 bytes	Amount of Each Installment	Zero-filled, right-justified.
05	4N, 4-bit BCD, 2 bytes	Installment Payment Number	Contains current number of installment payment from 01-99 . Zero-filled, right-justified.

Table 89: Dataset ID 5D, Installment Payment Data

Tag	Format	Value	Content
06	1AN	Frequency of Installments	A = Annual B = Bi-weekly C = Quarterly M = Monthly Q = Every two weeks S = Twice a year T = Trimester W = Weekly 2 = Bi-monthly Space = Not applicable
07	6N, 4-bit BCD, 3 bytes	Date of First Installment	<i>yymmdd</i> (year, month, day). yy = year (01-99) mm = month (01-12) dd = day (01-31) Zero-filled, right-justified.
08	12N, 4-bit BCD, 6 bytes	Total Amount Funded	Zero-filled, right-justified.
09	4N, 4-bit BCD, 2 bytes	Percent of Amount Requested	Contains the percent of the total amount requested divided by the total amount funded. Zero-filled, right-justified.
0A	12N, 4-bit BCD, 6 bytes	Total Expenses	Contains the total expenses charged by the institution to fund the total amount requested. Zero-filled, right-justified.
0B	4N, 4-bit BCD, 2 bytes	Percent of Total Expenses	Contains the percent of total expenses divided by the total amount funded. Zero-filled, right-justified.
0C	12N, 4-bit BCD, 6 bytes	Total Fees	Contains the total fees charged by the institution to fund the total amount requested. Zero-filled, right-justified.
0D	4N, 4-bit BCD, 2 bytes	Percent of Total Fees	Contains the percent of total fees divided by the total amount funded. Zero-filled, right-justified.
0E	12N, 4-bit BCD, 6 bytes	Total Taxes	Contains the total taxes charged by the institution to fund the total amount requested. Zero-filled, right-justified.

Table 89: Dataset ID 5D, Installment Payment Data

Tag	Format	Value	Content
0F	4N, 4-bit BCD, 2 bytes	Percent of Total taxes	Contains the percent of total taxes divided by the total amount funded. Zero-filled, right-justified.
10	12N, 4-bit BCD, 6 bytes	Total Insurance	Contains the total of the insurance charged by the institution to fund the total amount requested. Zero-filled, right-justified.
11	4N, 4-bit BCD, 2 bytes	Percent of Total Insurance	Contains the percent of the total insurance divided by the total amount funded. Zero-filled, right-justified.
12	12N, 4-bit BCD, 6 bytes	Total Other Costs	Contains the total other costs charged by the institution to fund the total amount requested. Zero-filled, right-justified.
13	4N, 4-bit BCD, 2 bytes	Percent of Total Other Costs	Contains the percent of the total other costs divided by the total amount funded. Zero-filled, right-justified.
14	7N, 4-bit BCD, 4 bytes	Monthly Interest Rates	Zero-filled, right-justified.
15	7N, 4-bit BCD, 4 bytes	Annual Interest Rate	Zero-filled, right-justified.
16	7N, 4-bit BCD, 4 bytes	Annual Total Cost of Financing	Zero-filled, right-justified.
17	2N, 4-bit BCD, 1 bytes	Installment Payment Type	0 = Without plan 1 = No interest to the cardholder 2 = With interest for the cardholder 3 = Buy today and pay later or skip payment Zero-filled, right-justified.
18	4N, 4-bit BCD, 2 bytes	Grace Period	Contains number of months from 00-99 that the payment is not required. Left-justified with leading zeros,

Table 89: Dataset ID 5D, Installment Payment Data

Tag	Format	Value	Content
19	12N, 4-bit BCD, 6 bytes	Installment Payment Interest	Optionally contains interest calculated for the installment period (two decimal positions implied). Zero-filled, right-justified. Value can be 0 if tag 17 contains 1 or 2 .
1A	10N, 4-bit BCD, 5 bytes	VAT for Installment Payment Interest	Vat calculated by acquirer for interest applicable to the transaction. Two decimal positions implied. Zero-filled, right-justified.
80	2N, 4-bit BCD, 1 byte	Plan Owner	00 (Non-installment) 01 (Issuer installment) 02 (Deferred issuer installment) 03 (Merchant installments)
82	35AN	Plan Registration System Identifier	Contains the plan registration system identifier value to identify the transaction as a Visa Installment Solutions transaction. This identifier is a ten-character alphanumeric unique value.

Acquirers can optionally submit installment payment data in this field, and issuers can optionally receive it.

If an acquirer submits an installment payment authorization and the issuer processor has not successfully completed testing to receive this field, V.I.P. drops the field before sending the message to the issuer. Issuers that currently receive other TLV data in this field also receive dataset 5D if an acquirer sends it.

For installment payment transactions, V.I.P. rejects the message with reject code **0494** (Field or data missing or invalid) if Dataset ID 5D has invalid data or an invalid length.

For Paraguay domestic transactions, these cross edits are performed for Dataset ID 5D elements:

- If tag 03 (Number of Installments) is missing or contains **00**, V.I.P. drops Dataset ID 5D.
- If tag 05 (Installment Payment Number) is missing or contains **00**, in a full-financial request, V.I.P. drops Dataset ID 5D.
- If tag 03 (Number of Installments) and tag 05 (Installment Payment Number) are present with valid values but tag 80 (Plan Owner) is missing or contains an invalid value, in a full-financial request, V.I.P. rejects the transaction with reject code **0494** (Field or data missing or invalid).
- Tag 80 (Plan Owner) must be in the range **00 - 03**, otherwise, V.I.P. rejects the transaction with reject code **0494** (Field or data missing or invalid).

Field 104, Usage 2 - Dataset ID 64

Dataset ID 64, Visa Advanced Authorization Data, VAA data: This dataset is used in 0100 authorization/preauthorization request messages, 0101 authorization repeat messages, and 0120 advice messages. This dataset applies to purchases, cash advances, and Quasi-Cash transactions only.

Issuer participation is optional. Issuers can opt to receive the VAA data in Tag 01 and Tag 02 as an alternative to field 62.21 and field 62.22.

Visa Advanced Authorization is a global product. Contact your Visa representative.

Table 90: Dataset ID 64, Visa Advanced Authorization Data, VAA data

Tag	Length	Value	Format	Contents
01	6	Compromised Account Risk Condition Code (CARCC)	AN	Compromised Account Risk Condition Code (CARCC) related to a high-risk event in the Compromised Account Management System (CAMS). Two byte numeric value from 01 - 09 . Bytes 1-2 contain risk condition code. Bytes 3-6 are spaces. If no high-risk events exist in CAMS for the account, the condition code is not included.
02	3	VAA Risk Score	N	VAA risk score is 001-099 A higher score indicates a higher risk.

Field 104, Usage 2 - Dataset ID 6C

Dataset ID 6C, Travel Tag: This dataset indicates the travel status of a cardholder. It is used in these messages:

- 0100 authorizations and 0120 STIP advices

Table 91: Dataset ID 6C, Travel Tag Data

Tag	Name	Length	Format	Description
01	Travel Tag Codes	1	AN	Contains a code that describes the cardholder travel status. A = Cardholder may be traveling, destination matches B = Cardholder may be traveling, destination unknown
02	Mobile Location Confirmation	8	AN	Contains a value that indicates whether the location of a mobile phone matches the location of the merchant or ATM. It consists of four two-byte values. The first byte in each of the two-bytes contains one of these values: P = Postal code T = City S = State C = Country The second byte in each of the two-bytes contains one of these values: Space = Unable to match due to insufficient location information for the mobile phone U = Unable to match due to insufficient merchant or ATM location information in the authorization message M = Matched the location of the mobile phone with the merchant or ATM location in the authorization message N = Did not match the location of the mobile phone with the merchant or ATM location in the authorization message

Table 92: Dataset ID 6C Travel Tag Data, Tag 02 Valid Values

Byte	Location Type	Valid Values	Comments
1-2	Postal code	P¹ = Postal code unable to match - no mobile location data PU = Postal code unable to match - not enough data in the authorization PM = Postal code matched PN = Postal code did not match	These values apply to locations in the U.S. and Canada. Locations outside the U.S. and Canada have the value of PU .
3-4	City	T¹ = City unable to match - no mobile location data TU = City unable to match - not enough data in the authorization TM = City matched TN = City did not match	These values apply to all locations except in the U.S. and Canada. Locations in the U.S. and Canada have the value of T¹ .
5-6	State	S¹ = State unable to match - no mobile location data SU = State unable to match - not enough data in the authorization SM = State matched SN = State did not match	These values apply to locations in the U.S. and Canada. Locations outside the U.S. and Canada have the value of SU .
7-8	Country	C¹ = Country unable to match - no mobile location data CU = Country unable to match - not enough data in the authorization CM = Country matched CN = Country did not match	These values apply to all locations.

¹ = Space

These examples show possible values of location matching that are passed in Tag 02-Mobile Location Confirmation:

- U.S. or Canada Example: **PNT¹SMCM** Postal code did not match, city unable to match - no mobile location data, state matched, country matched.
- Non-U.S. and Non-Canada Example: **PUTMSUCM** Postal code unable to match - not enough data in the authorization, city matched, state unable to match - not enough data in the authorization, country matched.

Field 104, Usage 2 - Dataset ID 6D

Dataset ID 6D, Issuer-Supplied Data: Issuers use this dataset to instruct VisaNet to send a text alert to cardholders when a suspect authorization occurs.

The tags for this dataset are listed in this table.

Table 93: Dataset ID 6D, Issuer-Supplied Data

Tag	Name	Length	Format	Description
01	Authentication Alert	1	AN	Contains a code that requests Visa to send a text alert to the cardholder. Value: A = Issuer asks Visa to send a text alert to cardholder

Field 104, Usage 2 - Dataset ID 70

Table 94: Dataset ID 70, ATM Mini Statement Dataset 1

Tag	Length	Value	Format	Content of Sub-Elements
01	36	Transaction Statement 1	AN	Positions 1-8 = transaction date in yyymmdd format. Positions 9-23 = 15 character alphanumeric transaction description; left-justified with trailing spaces. Position 24 = C (Credit) or D (Debit) Positions 25-36 = 12 character amount; right-justified with leading zeros. Implied decimal relative to cardholder billing currency.
02	36	Transaction Statement 2	AN	Positions 1-8 = transaction date in yyymmdd format. Positions 9-23 = 15 character alphanumeric transaction description; left-justified with trailing spaces. Position 24 = C (Credit) or D (Debit) Positions 25-36 = 12 character amount; right-justified with leading zeros. Implied decimal relative to cardholder billing currency.
03	36	Transaction Statement 3	AN	Positions 1-8 = transaction date in yyymmdd format. Positions 9-23 = 15 character alphanumeric transaction description; left-justified with trailing spaces. Position 24 = C (Credit) or D (Debit) Positions 25-36 = 12 character amount; right-justified with leading zeros. Implied decimal relative to cardholder billing currency.

Table 94: Dataset ID 70, ATM Mini Statement Dataset 1

Tag	Length	Value	Format	Content of Sub-Elements
04	36	Transaction Statement 4	AN	Positions 1-8 = transaction date in yyyyymmdd format. Positions 9-23 = 15 character alphanumeric transaction description; left-justified with trailing spaces. Position 24 = C (Credit) or D (Debit) Positions 25-36 = 12 character amount; right-justified with leading zeros. Implied decimal relative to cardholder billing currency.
05	36	Transaction Statement 5	AN	Positions 1-8 = transaction date in yyyyymmdd format. Positions 9-23 = 15 character alphanumeric transaction description; left-justified with trailing spaces. Position 24 = C (Credit) or D (Debit) Positions 25-36 = 12 character amount; right-justified with leading zeros. Implied decimal relative to cardholder billing currency.

This dataset is supported in the following messages:

- 0100/0110 Mini statement request and response
- 0200/0210 Mini statement request and response

ATM mini statements are supported on network **0004**.

ATM mini statements are supported in the following transaction jurisdictions:

- Domestic
- Regional
- Interregional

Mini statement transactions can originate from authorization-only and full service acquirers. V.I.P. converts 0100 Mini statement requests to 0200 Mini statement request before it forwards the message to the issuer.

Visa strongly recommends that issuers send their recent transactions in chronological order in the 0110 or 0210 Mini statement response messages, including the five most recent transactions in Field 104, Usage 2, Dataset ID 70 followed by subsequent transactions in Field 125, Usage 2, Dataset ID 70. V.I.P. drops invalid tags.

A mini statement does not have financial impact and cannot be reversed.

If the issuer does not support mini statement, V.I.P. declines the transaction with the existing response code **57** (Transaction not permitted to cardholder) in Field 39.

For ATM mini statement transactions that fail CVV or iCVV validation, V.I.P. declines with response code 05 (Do not honor) in Field 39.

Stand-in processing (STIP) does not process a mini statement on behalf of an unavailable issuer, but does check the account against the Account Screen Authorization File (ASAF) to determine if a decline or pick-up response code is on file.

- If the account is not on file, STIP assigns response code **91** (V.I.P. sends this when destination unavailable or transaction times out when no STIP).
- If the account is listed with a specific response code, STIP assigns that code to the transaction, and no advice is sent to the issuer.

Field 104, Usage 2 – Field Edits

None.

Field 104, Usage 2 – Reject Codes

0494 = Field or data missing or invalid

0603 = Consistency error

Field 104, Usage 2 – File Maintenance Error Codes

None.

Field 104, Usage 2 – Valid Values

See “Usage.”

Field 105 – Double-Length DES Key (Triple DES)

Field 105 – Attributes

fixed length

128 N, bit string; 16 bytes

Field 105 – Description

Field 105 contains the double-length (triple DES) PIN encryption working key requested by acquirers and issuers participating in the Visa Dynamic Key Exchange Service. It is under the DKE service used by VisaNet to deliver acquirer and issuer double-length working keys.

Field 105 – Usage

Required in 0800 messages if field 70 contains **162** (deliver acquirer working key) or **163** (deliver issuer working key). It is not used in 0810 responses.

There is a 10-second timeout for all messages containing working keys. If the client does not respond within **10** seconds, a second delivery attempt is made. If no client response, the key exchange attempt is cancelled.

Field 105 – Field Edits

None.

Field 105 – Reject Codes

0621 = Invalid value.

Field 110 – Encryption Data (TLV Format)

Field 110 – Attributes

variable length

2-byte, binary

1535 bytes, variable by usage; maximum 1537 bytes

Note: ISO definition supports 9999 bytes.

Field 110 – Description

This field description contains transaction datasets presented in hex number order.

The TLV format is used by all clients regardless of region.

Positions: 1		2-3	4-1535
Subfield 1: length	Subfield 2: dataset ID	Subfield 3: dataset length	Subfield 4: TLV subelements
Byte 1-2	Byte 3	Byte 4-5	Byte 6-1537

Length Subfield: 2-byte binary subfield that contains the number of bytes in this field.

Field 110 has the capacity to hold up to 9999 bytes. However, V.I.P. currently only supports a maximum length of 1535 bytes.

Position 1, Dataset ID: This one-byte binary subfield contains a hexadecimal value that identifies the TLV data that follows. Values:

- Dataset ID 04, Key Data

Positions 2-3, Dataset Length: This 2-byte binary subfield specifies the total length of the TLV fields present in the dataset. The length is variable, depending on the data that follows.

Positions 4-1535, TLV Data: Each subfield of a dataset has a defined tag, length, and value. The tag is used with the dataset ID value. The dataset subfields can be present in any order with other TLV subfields.

Field 110 – Usage

Acquirers and Issuers that use Field 110, Dataset ID 04-Key Data must not use Field 105-Double-Length DES Key (Triple DES) and Field 48-Additional Data-Private, Usage 14-Dynamic Key Exchange Working Key Check Value.

Endpoints that support this field in TLV format must be able to receive dataset IDs and tags defined for this field in any order, including those they do not recognize or expect. Endpoints can receive multiple datasets in this field. Endpoints must ignore dataset IDs or tags they do not recognize and continue to process the field.

Table 95: Dataset ID 04, Key Data

Tag	Length	Value	Format	Content of Sub-Element
80	1	Control	Binary	01 (Fixed Key)
81	11	Key-set Identifier	N, EBCDIC	Identifier for the encryption rule identifier (left-justified, zero filled)
83	2	Algorithm	N, EBCDIC	03 (TDEA)
85	2	Key Protection	N, EBCDIC	01 (ECB enciphered key(s)) 04 (ANSI X9 TR-31 key block)
86	2	Key Index	N, EBCDIC	01 (Working key 1) 02 (Working key 2)
87	Min 16, Max 512	Encryption Data	Binary	For variant format keys where Tag 85 contains 01 : Tag 87 = double-length DES key (16-byte binary field).
			ANS, EBCDIC	For key block format keys where Tag 85 contains 04 : Tag 87 = ANSI X9 TR-31 key block key (variable length).
88	Min 3, Max 128	Key Checksum Value	Variable Length, Binary	Key check value for the key data in Tag 87.

This field is used in these messages:

- 0800/0810 Dynamic Key Exchange request/response message.

Table 96: Visa Supported ANSI X9 TR-31 Key Block Parameters

Byte	Header Field Name	VisaNet Generated Value	Endpoint Generated Value
0	Key Block Version ID	B Key block protected using the TDEA key derivation binding method.	A (Key block protected using the key variant binding method) B (Key block protected using the TDEA key derivation binding method) C (Key block protected using the TDEA key variant binding method)
1-4	Key Block Length	Dynamic length of the key block, including entire block, header, encrypted confidential data, and message authentication code (MAC) in decimal.	Dynamic length of the key block, including entire block, header, encrypted confidential data, and message authentication code (MAC) in decimal.
5-6	Key Usage	Visa allows specific key usage for certain key types shown in Visa Supported Key Block Properties.	Visa allows specific key usage for certain key types shown in Visa Supported Key Block Properties.
7	Algorithm	T (Triple DEA (TDEA))	T (Triple DEA (TDEA))
8	Mode of Use	Visa allows specific key usage for certain key types shown in Visa Supported Key Block Properties.	Visa allows specific key usage for certain key types shown in Visa Supported Key Block Properties.
9-10	Key Version Number	00-99	00-99
11	Exportability	S (Sensitive, Exportable under a KEK in a form not necessarily meeting the requirements of X9.24 parts 1 or 2)	E (Exportable under a KEK in a form meeting the requirements of X9.24 parts 1 or 2) S (Sensitive, Exportable under a KEK in a form not necessarily meeting the requirements of X9.24 parts 1 or 2)
12-13	Number of Optional Blocks	00 (Zeros)	00 (Zeros)
14-15	Reserved	Reserved for future use, contains zeros.	Reserved for future use, contains zeros.

Visa supports a limited set of options in the ANSI X9 TR-31 Key Block standard. The Visa Generated Value column describes the Key Block values used when Visa is generating the key for the Endpoint. The Endpoint Generated Value column describes the only values that Visa accepts if the endpoint is generating the key and conveyed to Visa.

Visa supports the key block parameters shown.

Table 97: Visa Supported Key Block Properties

KeyType	Description	Key Block Header	
		Bytes 5-6, Key Usage	Byte 8, Mode of Use
AWD	Acquirer Working Key (Data)	D0 (Symmetric key for data encryption)	B (Both encrypt and decrypt / wrap and unwrap)
AWK	Acquirer Working Key (PIN)	P0 (PIN Encryption)	B (Both encrypt and decrypt / wrap and unwrap)
C2K	Card Verification Value 2 Key	C0 (CVK card verification key)	C (Both generate and verify)
CAA/CAAV	Cardholder Authentication Attempts Value Key	C0 (CVK card verification key)	C (Both generate and verify)
CAK/CAVV	Cardholder Authentication Verification Value Key	C0 (CVK card verification key)	C (Both generate and verify)
CVK	Card Verification Value Key	C0 (CVK card verification key)	C (Both generate and verify)
DUK/BDK	Derived Unique Key Per Transaction	B0 (BDK base derivation key)	X (Key used to derive other keys)
IBM	IBM PIN Verification Key	V1 (PIN verification, IBM 3624)	C (Both generate and verify)
IWK	Issuer Working Key (PIN)	P0 (PIN Encryption)	B (Both encrypt and decrypt / wrap and unwrap)
MDK	Master Derivation Key	E0 (EMV/chip issuer master key: application cryptograms)	N (No special restrictions (other than restrictions implied by the Key Usage))
PVK	Visa PIN Verification Key	V2 (PIN verification, VISA PVV)	C (Both generate and verify)
WSD	Issuer Web Services Consumer Authentication Key	D0 (Symmetric key for data encryption)	B (Both encrypt and decrypt / wrap and unwrap)

Field 110 – Field Edits

TLV Format: The field must be correctly formatted; otherwise, V.I.P. rejects the message with code **06** in field 39 and an error code in field 48, usage 1c.

In case of an error, V.I.P. declines the key delivery request message with response code **06** (Request acknowledged, unable to comply) in Field 39-Response Code and sends a 0810 Key delivery acknowledgment to the acquirer or issuer.

Field 110 – Reject Codes

0621 = Invalid value.

Field 110 – File Maintenance Error Codes

None.

Field 111 – Additional Transaction Specific Data (TLV Format)

Field 111 – Attributes

variable length

2-byte, binary

1535 bytes, variable by usage; maximum 1537 bytes

Note: ISO definition supports 9999 byte.

Field 111 – Description

This field description contains transaction datasets presented in hex number order.

Positions: 1		2-3	4-1535
Subfield 1: length	Subfield 2: dataset ID	Subfield 3: dataset length	Subfield 4: TLV subelements
Byte 1-2	Byte 3	Byte 4-5	Byte 6-1537

Length Subfield: 2-byte binary subfield that contains the number of bytes in this field.

Field 111 has the capacity to hold up to 9999 bytes. However, V.I.P. currently only supports a maximum length of 1535 bytes.

Position 1, Dataset ID: This one-byte binary subfield contains a hexadecimal value that identifies the TLV data that follows. Values:

- Dataset ID 01, Rate Information
- Dataset ID 02, Jurisdiction and Settlement Data
- Dataset ID 07, Transaction Identification Data
- Dataset ID 56, Visa Response Data for Clearing

Positions 2-3, Dataset Length: This 2-byte binary subfield specifies the total length of the TLV fields present in the dataset. The length is variable, depending on the data that follows.

Positions 4-1535, TLV Data: Each subfield of a dataset has a defined tag, length, and value. The tag is used with the dataset ID value. The dataset subfields can be present in any order with other TLV subfields.

Field 111 – Usage

Field 111 – Dataset ID 01

Dataset ID 01, Rate Information: This dataset ID contains data for exchange rate information.

Table 98: Dataset ID 01, Rate Information

Tag	Length	Value	Format	Content of Sub-Element
80	70	Exchange Rate Provider	ANS	Contains the source of the rate. For the Persistent FX service, the exchange rate provider is Visa Inc., Exchange Rate.
81	5	Rate Table ID	AN	Contains the rate table ID of the foreign exchange rate table used for currency conversion.

Table 98: Dataset ID 01, Rate Information

Tag	Length	Value	Format	Content of Sub-Element
82	8	Exchange Rate	N	Contains the exchange rate from the rate table identified in Tag 81. This rate is the actual exchange rate found in the table without any markup or any other values used to arrive at an effective rate. The left-most digit in position 1 denotes the number of positions the decimal separator is moved from the right. This position may contain values 0–9. Positions 2–8 of this tag are the rate. E.g., 69985022 equals 9.985022 rate.

Table 98: Dataset ID 01, Rate Information

Tag	Length	Value	Format	Content of Sub-Element
8E	1	Persistent FX Eligible Indicator	N	Contains a code that identifies if the transaction is eligible for the Persistent FX service. Valid values are: • 0 = Transaction not eligible • 1 = Transaction eligible This tag is applicable on authorization-only transactions.
8F	1	Persistent FX Applied Indicator	N	Contains a code that identifies if the transaction underwent Persistent FX service processing. Valid values are: • 0 = Transaction not eligible, service not applied • 1 = Transaction eligible, service applied This tag is applicable on full-financial transactions.

Field 111 – Dataset ID 02

Dataset ID 02, Jurisdiction and Settlement Data: This dataset ID contains data for jurisdiction and settlement.

Table 99: Dataset ID 02, Jurisdiction and Settlement Data

Tag	Length	Value	Format	Content of Sub-Element
C0	1-4	Agreement ID	ANS	Contains the agreement ID associated with the agreed fee rate.
C1	4	Agreement Type	ANS, EBCDIC	Contains the agreement type associated with the agreement ID.
82	1	On-Us Indicator	AN, EBCDIC	Contains indicator for on-us transactions.

Field 111 – Dataset ID 07

Dataset ID 07, Transaction Identification Data: This dataset ID contains network generated transaction identification data.

Table 100: Dataset ID 07, Transaction Identification Data

Tag	Length	Value	Format	Content of Sub-Element
C0	36	Gateway Life Cycle Trace Identifier	ANS, EBCDIC, 36 bytes	Contains network generated transaction identification data. For Mastercard, this tag contains Mastercard generated new transaction link identifier as a 22-character universally unique identifier (UUID) and populates it in all original authorization requests, specifically for the first message in a transaction lifecycle. Acquirers should retain the transaction link ID from the original authorization response message and send it in request messages for life cycle transactions related to the original authorization.

Field 111 – Dataset ID 56

Dataset ID 56, Visa Response Data for Clearing: This dataset ID contains clearing data.

Table 101: Dataset ID 56, Visa Response Data for Clearing

Tag	Length	Value	Format	Content of Sub-Element
80	1	Account Funding Source	AN, EBCDIC, 1 byte	Contains any of these product account funding source value from Visa: • C (Credit) • D (Debit) • H (Charge) • P (Prepaid) • R (Deferred debit)
82	1	Applied Authorization Characteristics Indicator	AN, EBCDIC, 1 byte	Contains a code to identify that the transaction met certain processing conditions. Conditions may vary by market. Value in this tag is from Field 62.1– Authorization Characteristics Indicator (Bitmap Format.)
88	2	Program Downgrade Reason Code	AN, EBCDIC, 2 bytes	Contains two-digit downgrade reason code from Visa. See Field 62.3 – Validation Code, for a list of downgrade reason codes.

Field 111 – Field Edits

None.

Field 111 – Reject Codes

None.

Field 114 – Domestic and Localized Data (TLV Format)

Field 114 – Attributes

variable length

2 bytes, binary

1535 bytes, variable by usage, maximum 1537 bytes

ISO definition supports 9999 bytes.

Field 114 – Description

This field contains domestic and localized data.

The datasets, which are in TLV format, can have multiple subelements. The TLV format is shown below.

Issuers that choose to support this field must ensure they have the capacity to receive and process the new field with the increased message size before implementation.

Positions:			
	1	2-3	4-1535
Subfield 1: length	Subfield 2: dataset ID	Subfield 3: dataset length	Subfield 4: TLV Subfields
Byte 1-2	Byte 3	Byte 4-5	Byte 6-1537

Length Subfield: 2-byte binary subfield that contains the number of bytes in this field.

Field 114 has the capacity to hold up to 9999 bytes. However, V.I.P. currently only supports a maximum length of 1535 bytes.

Position 1, Dataset ID: This one-byte binary subfield contains a hexadecimal value that identifies the TLV data that follows. Values:

- Dataset ID 6C, Uruguay Domestic Data
- Dataset ID 6D, Spain Domestic Data
- Dataset ID 70, Localized Data

Positions 2-3, Dataset Length: This 2-byte binary subfield specifies the total length of the TLV fields present in the dataset. The length is variable, depending on the data that follows.

Positions 4-1535, TLV Data: Each subfield of a dataset has a defined tag, length, and value. The tag is used with the dataset ID value. The dataset subfields can be present in any order with other TLV subfields.

The TLV format is used by all clients regardless of region.

Field 114 – Usage

Field 114 – Dataset ID 6C

Dataset ID 6C, Uruguay Domestic Data: This dataset ID contains data as required for domestic transactions in Uruguay.

Table 102: Dataset ID 6C, Uruguay Domestic Data

Tag	Format	Value	Content of Sub-Element
C0	1N, 4-bit BCD, 1 byte	Months Deferred	This tag is mandatory and contains a value 0 to 9 . Default is 0 .
C1	1N, 4-bit BCD, 1 byte	Tax Benefits Law	This tag is mandatory and contains these values: 0 - No Devuelve Impuestos (default) 1 - Devuelve IVA (17.934) 2 - Devuelve IMESI (18.083) 3 - Devuelve AFAM (18.910) 4 - Reintegro Impuestos (18.999) 6 - Ley Inclusion Financiera (19.210)
C2	12N, 4-bit BCD, 6 bytes	Invoice Amount	This tag is mandatory, contains the invoice amount, 2 implied decimal places.
C3	12N, 4-bit BCD, 6 bytes	Tax Benefits Total Amount	This tag is mandatory, contains the tax benefit amount, 2 implied decimal places.
C4	12N, 4-bit BCD, 6 bytes	Tip Amount	This tag is mandatory, contains the tip amount, 2 implied decimal places.
C5	12N, 4-bit BCD, 6 bytes	Base Amount for Tax Benefits Calculation	This tag is mandatory, contains the tax benefit base amount, 2 implied decimal places. Default to zeros.
C6	4N, 4-bit BCD, 2 bytes	Basis Points Applied by the Law	This tag is mandatory, contains the basis points, 2 implied decimal places. Default to zeros.
C7	2AN, EBCDIC, 2 bytes	Merchant Invoice Series Number	Default to spaces.

Table 102: Dataset ID 6C, Uruguay Domestic Data

Tag	Format	Value	Content of Sub-Element
C8	7AN, EBCDIC, 7 bytes	Merchants Invoice Number	This tag is mandatory, and default to spaces.
C9	1AN, EBCDIC, 1 byte	Fiscal Benefits Retention Agent	This tag is mandatory and contains these values: Space - default A - Acquirer I - Issuer T - Third party with benefits net from the total amount. O - Third party with benefits as part of the total amount.
CC	25AN, EBCDIC, 25 bytes	Order Number	
CD	12AN, EBCDIC, 12 bytes	Promotion Code	
CE	41AN, EBCDIC, 41 bytes	Free Text for Receipt	Free text printed on receipt. Tag provided by issuer in the response message.
D0	10N 4-bit BCD, 5 bytes	Interchange Reimbursement Fee (IRF)	8 digit numeric, 2 implied decimal places. Visa calculated.
D1	4N, 4-bit BCD, 2 bytes	VAT Rate	This tag is mandatory, contains the VAT rate used to calculate VAT national IRF, 2 implied decimal places.
D2	10N, 4-bit BCD, 5 bytes	VAT National IRF	2 implied decimal places. Visa calculated.
D3	1AN, EBCDIC, 1 byte	Floor Limit Applied by Tax Benefit Law	Indicates if floor limit amount, relating to the Tax Benefits Law, was applied to the transaction. Space - No floor limit applied (default). T - Transaction floor limit S - Applied by third party
D4	13AN, EBCDIC, 13 bytes	Cardholder Identification for Recurring Payments	13 character free text for acquirers recurring merchants to identify the cardholder recurring payment. Pass through value. Default value to spaces.
D5	12AN, EBCDIC, 12 bytes	Merchant Tax ID	This tag is mandatory, contains merchant tax ID, default value to spaces.

This dataset is used in these messages:

- 0200/0210 Full financial request and responses
- 0220 Acquirer advices and adjustment advices
- 0220 STIP advice
- 0220 Dispute response financial
- 0420 Financial reversals
- 0420 Reversal/reversal advice
- 0422 Dispute financial/dispute financial reversal

Endpoints that support this field in TLV format must be able to receive dataset IDs and tags defined for this field in any order, including those they do not recognize or expect. Endpoints can receive multiple datasets in this field. Endpoints must ignore dataset IDs or tags they do not recognize and continue to process the field.

Field 114 – Dataset ID 6D

Dataset ID 6D, Spain Domestic Data: This dataset ID contains data as required by the government of Spain in ATM transactions.

In POS transactions this data is present for informational purposes only.

Table 103: Dataset ID 6D, Spain Domestic Data

Tag	Length	Value	Format	Content of Sub-Element
C0	Max 12 bytes	Acquirer-Supplied Cash Disbursement Fee	N	This tag contains acquirer-supplied cash disbursement fee for domestic ATM withdrawals per the Spanish ATM Royal Decree. Acquirer provides this tag in request messages. If this tag is not present, a value of zero is used to calculate the cash disbursement fee. Decimal places for this tag is based on the same currency provided in Field 49- Currency Code, Transaction.
C1	Max 12 bytes	Issuer Cardholder ATM Commission	N	This tag contains the issuer cardholder commission for domestic ATM withdrawals per the Spanish ATM Royal Decree. Issuers provide this tag in response messages. Decimal places for this tag is based on the same currency provided in Field 49- Currency Code, Transaction.

Table 103: Dataset ID 6D, Spain Domestic Data

Tag	Length	Value	Format	Content of Sub-Element
C2	Max 12 bytes	Issuer Cardholder Credit Commission	N	This tag contains issuer cardholder commission for domestic ATM withdrawals with credit cards per the Spanish ATM Royal Decree. Issuers provide this tag in response messages. Decimal places for this tag is based on the same currency provided in Field 49- Currency Code, Transaction.
C3	4 bytes	Local Merchant Category Code	N	This tag contains the domestic MCC when it differs from the international MCC.
C4	15 bytes	Merchant ID	AN	In POS transactions, this tag contains Spanish merchant ID when value in Field 42-Card Acceptor Identification Code is different. First nine positions in this tag must be numeric with leading zeros.

This dataset is used in the following messages:

- 0100/0110 Authorization request and responses
- 0200/0210 Full financial request and responses
- 0220 Acquirer advices and adjustment advices
- 0400/0420 Reversals and partial reversals
- 0420 Financial reversals

Endpoints that support this field in TLV format must be able to receive dataset IDs and tags defined for this field in any order, including those they do not recognize or expect. Endpoints can receive multiple datasets in this field. Endpoints must ignore dataset IDs or tags they do not recognize and continue to process the field.

Field 114 – Dataset ID 70

Dataset ID 70, Localized Data: This dataset ID contains localized data.

All Tags after C1 are encoded by the method specified in C1. UTF-8 encoding may cause a single character to be up to 4 bytes. Please refer to the character length column in this table.

Table 104: Dataset ID 70, Localized Data

Tag	Character Length	Length	Value	Format	Content of Sub-Element
C0	Max 3 characters	3 bytes	Language Code	AN	Contains the ISO 639 defined language code. All tags in this dataset, except C0 and C1 are expressed in the ISO 639 defined language code.
C1	Max 20 characters	Max 20 bytes	Data Encoding Format	AN	Identifies how all tags except C0 and C1 are encoded in this dataset
C2	Max 100 Characters	Max 400 bytes	Device Name	Binary	
C3	Max 256 characters	Max 1024 bytes	Cardholder Name	Binary	
C4	Max 256 characters	Max 1024 bytes	Cardholder Address	Binary	
C5	Max 16 characters	Max 64 bytes	Cardholder Postal Code or Zip Code	Binary	
C6	Max 75 characters	Max 300 bytes	Free-form Description Data	Binary	Contain the alphanumeric format and characters in Cyrillic. The character encoding of this tag is specified in Tag C1.

For Russia, tag C6 format consists an EBCDIC 1025 code page with full Cyrillic character set. This is a single byte character set and must be used across multiple systems to represent Cyrillic.

This dataset is used in the following messages:

- 0100/0120 Token activation request and token STIP advice
- 0600 Token notification message
- 0620 Token notification advice message

Field 114 – Field Edits

Field 114 Dataset ID 6C

If tag D1 is not present in full financial request for purchase, ATM, AFT, and OCT transactions, V.I.P. rejects the request with reject code **0352**.

If present in a transaction, this dataset must contain all mandatory tags; otherwise, V.I.P. rejects the transaction with reject code **0352**.

Field 114 Dataset ID 6D

If tag C0 has a value greater than the transaction amount in field 4, V.I.P. rejects the request with reject code **0146**.

If tag C0 has a length greater than 12, V.I.P. rejects the request with reject code **0146**.

Tag C0 must contain a numeric value, otherwise, V.I.P. rejects the request with reject code **0146**.

Field 114, Dataset ID 70

No additional edit.

Field 114 – Reject Codes

0146 = Invalid tag value

0352 = Missing field

Field 115 – Additional Trace Data

Field 115 – Attributes

variable length

1 byte, binary +

up to 24 ANS, EBCDIC; maximum: 25 bytes

Field 115 – Description

Field 115 contains additional tracing information for proprietary use. This field is defined as a national-use field by ANSI and adopted by Visa. The length specifies the number of bytes that follow the length subfield.

Field 115 – Usage

This additional tracing information is provided in requests and advices, at the acquirer's or issuer's option or by the switch of an acquiring or issuing network.

An acquirer or issuer has the option to include its own data here, but VisaNet does not send this field to its destination. VisaNet removes this field from a request or advice before passing it and restores it before returning the reply to the originator. Similarly, if this field is present in a request received from another network, VisaNet holds it and returns it in the response.

The information must be returned unchanged in the related response or advice response, regardless of the number of times its content may change because of the message passing through different networks.

Auto-CDB: This field does not appear in 0322 or 0332 messages.

Fraud Reporting:

- Client-generated (network **0002** only)-Acquirers or issuers can optionally use this field to track the transaction they submitted. FRS does not use this field. The value is returned unaltered in the response.

This field is only used within the pairing of the 9620/9630 message set. It cannot be used to track the life cycle of a transaction.

- Visa-generated-This field is not present.

Field 115 – Field Edits

None.

Field 115 – Reject Codes

None.

Field 117 – National Use

Field 117 – Attributes

variable length

1 byte, binary +

3 ANS, EBCDIC, +

252 ANS, EBCDIC, variable by usage;

maximum 256 bytes

Field 117 – Description

This national use field contains information unique to the processing of Visa transactions by source and destination centers in a given country. This field is for national and domestic use only. The field has the following usages:

Usage 2 - Turkish National Data

Usage 3 - Sweden National Data (ATM)

Usage 4 - Colombia National Data

Although various usages and formats may be added by individual countries, the field contains a length subfield to specify the number of bytes that follow it, and two additional subfields as shown in the following layout.

Positions: 1-3 4-x		
length	country code	data
Byte 1	Bytes 2-4	Bytes 5-256

Length Subfield: This value is the number of bytes in the field after the length subfield.

Positions 1-3, Country Code: This value is the 3-byte EBCDIC country code for the issuer and acquirer. For codes, see the Country and Currency Codes appendix.

Positions 4-x, Data: This subfield contains additional card transaction processing information using the format and coding determined by joint agreement of those clients in the country specified by the country code.

Field 117 – Usage

This field is for national, domestic-only use, and V.I.P. forwards it to the destination center only if the source and destination centers are in the same country; otherwise, V.I.P. removes the field from the message. V.I.P. also removes the field if the acquirer or issuer does not participate in the use of this field.

This field is mandatory in countries with domestic programs that require it.

Field 117 – Field Edits

If the maximum field length is exceeded, the transaction is rejected with reject code **0166**.

If the country code in the field is not numeric, the transaction is rejected with reject code **0167**.

Field 117 – Reject Codes

0166 = Invalid length

0167 = Invalid country code (not numeric)

Field 117, Usage 2 – Turkish National Data

Field 117, Usage 2 – Attributes

variable length

1 byte, binary +

3 ANS, EBCDIC, +

50 ANS, EBCDIC

maximum 54 bytes

Field 117, Usage 2 – Description

Field 117, usage 2 contains six subfields for information unique to the processing of Visa transactions by clients in Turkey.

Positions: 1-3		4-11	12-15	16-40	41-53
Length	Country Code	CMI	EFT	Merchant Name	Merchant City
Byte 1	Bytes 2-4	Bytes 5-12	Bytes 13-16	Bytes 17-41	Bytes 42-54

Length Subfield: This value is the number of bytes in the field after the length subfield.

Positions 1-3, Country Code: This value is the 3-byte EBCDIC country code for the issuer and acquirer. For Turkey, this value must be **792**.

Positions 4-11, Central Merchant Identifier (CMI): This subfield contains the Central Merchant Identifier. For ATMs, acquirers use a default value of **88888888**.

Positions 12-15, EFT: This subfield contains the Acquiring Institution Code.

Positions 16-40, Merchant Name: This subfield contains the name of the card acceptor or Automated Teller Machine (ATM) location in Turkish.

Positions 41-53, Merchant City: This subfield contains the location city of the merchant in Turkish.

Field 117, Usage 2 – Usage

This field is optional in all 02xx and 04xx messages. It is not applicable for fee collection, funds disbursement, or 06xx messages.

In original requests, if field 117 is present in the request with Turkish NNSS data and the acquirer is Turkey, the field is passed to the issuer only if the issuer country code is Turkey.

In responses, V.I.P. accepts field 117 with Turkey NNSS data if the issuer country code is Turkey. Field 117 is forwarded to the acquirer only if the acquirer country code is Turkey.

For 0422 dispute financials, V.I.P. checks if the acquirer and issuer country code is Turkey. If it is, V.I.P. places a value of TR in field 43, positions 39-40 (country code), and populates positions 1-25 (card acceptor name) and 26-38 (city name) from the History database.

Field 117, Usage 2 – Field Edits

None.

Field 117, Usage 2 – Reject Codes

0166 = Invalid length

0167 = Invalid country code (not numeric)

Field 117, Usage 3 – Sweden National Data (ATM)

Field 117, Usage 3 – Attributes

variable length

1 byte, binary +

3 ANS, EBCDIC, +

Upto 252 ANS

maximum 256 bytes

Field 117, Usage 3 – Description

Field 117, usage 3 has a length subfield followed by two subfields containing information unique to the processing of Visa transactions by issuers and acquirers in Sweden.

Positions: 1-3		4-255
Length	Country code	Data
Byte 1	Bytes 2-4	Bytes 5-256

Length Subfield: 1-byte subfield containing the number of bytes in the field after the length subfield.

Positions 1-3, Country Code: 3-byte numeric subfield must contain a value of **752** (Sweden).

Positions 4-255, Data: This variable-length alphanumeric subfield contains data intended for display at the ATM.

Field 117, Usage 3 – Usage

This field is optional in ATM authorization responses, ATM balance inquiry responses and reversal responses. Swedish EBCDIC special characters (Å,å,Ä,ä,Ö,ö) are permitted in this field for domestic transactions only.

Field 117, Usage 3 – Field Edits

If an initial request or a reversal does not qualify for the Sweden NNSS and this field usage is present, V.I.P. removes it from the message.

Field 117, Usage 3 – Reject Codes

0166 = Invalid length

0167 = Invalid country code (not numeric)

Field 117, Usage 4 – Colombia National Data

Field 117, Usage 4 – Attributes

variable length

1 byte, binary +

3 ANS, EBCDIC, +

123 ANS, EBCDIC

maximum 127 bytes

Field 117, Usage 4 – Description

Field 117, usage 4 has a length subfield followed by two subfields containing information unique to the processing of Visa transactions by issuers and acquirers in Colombia.

Positions: 1-3		4-126
length	country code	national net domestic token data
Byte 1	Bytes 2-4	Bytes 5-127

Length Subfield: This value is the number of bytes in the field after the length subfield.

Positions 1-3, Country Code: This 3-byte numeric subfield must contain a value of **170** (Colombia).

Positions 4-126, National Net Domestic Token Data: This variable-length alphanumeric subfield contains optional supplementary private information for Colombia National Net Settlement Service (NNSS) transactions sent from the acquirer to the issuer. The subfield should not contain all **spaces**.

Field 117, Usage 4 – Usage

This field is optional in 0200 full-financial requests (cash disbursements, balance inquiries, and account transfers) and related reversals, advices (including exception items), and responses.

If an initial request or a reversal does not qualify for the Colombia NNSS and this field usage is present, V.I.P. removes it from the message.

Field 117, Usage 4 – Field Edits

If positions 1-3 (country code) do not contain a value of **170**, V.I.P. rejects the request with reject code **0167**.

Field 117, Usage 4 – Reject Codes

0167 = Invalid country code (not **170**).

Field 118 – Intra-Country Data

Field 118 – Attributes

variable length

1 byte, binary +

3 ANS, EBCDIC, +

252 ANS, EBCDIC

maximum 256 bytes

Field 118 – Description

Field 118 is a national-use field for 0100 requests, reversals, and responses and is currently used for intra-country data as follows:

Usage 3: Sweden (ATM)

Field 118 is a national-use field for 0200 requests, reversals, and responses. It comprises two basic subfields for information unique to the processing of Visa transactions by clients in a given country.

Positions: 1-3 4-x		
length	country code	data
Byte 1	Byte 2-4	Byte 5-256

Length Subfield: This value is the number of bytes in the field after the length subfield.

Positions 1-3, Country Code: This value is the 3-byte EBCDIC country code for the issuer and acquirer. The country code must be a numeric ISO country code. See the Country and Currency Code appendix for codes.

Positions 4-x, Data: This subfield contains additional card transaction processing information by joint agreement of clients in the country identified by the country code, in the format and coding determined by those clients.

Field 118 – Usage

Except as noted, field usage is conditional and must be prearranged with Visa.

This field is mandatory in countries with domestic programs that require it.

This field may be used in 02xx and 04xx messages, unless defined otherwise for domestic usages. Its presence in responses is optional. If present in the original request, it is nevertheless optional in reversal requests and their responses.

Because it is for national use only, V.I.P. forwards this field to the destination center only if source and destination centers are in the same country.

STIP and Switch Advices: Field 118 is present in 0220 and 0420 advices if it was in the original request.

Field 118 – Field Edits

This field is conditional for the countries that use it, unless defined otherwise by domestic programs that require it. There is no reject if the field is not present in an original request. There is also no reject if the field was present in the original but not in a reversal, or reversal response.

V.I.P. rejects the message with reject code **0144** if country code is not numeric.

Field 118 – Reject Codes

0144 = Invalid value

Field 118, Usage 3 - Sweden (ATM)

Field 118, Usage 3 - Attributes

variable length

1 byte, binary +

3 ANS, EBCDIC, +

252 ANS, EBCDIC, +

maximum 256 bytes

Field 118, Usage 3 - Description

Usage 3 is a private national-use field optionally used by acquirers and issuers in Sweden for standard 0100 ATM authorizations, balance inquiries, 0400/0420 reversals, 0120 and 0420 advices. It comprises a length subfield followed by seven subfields.

The subfields are:

Positions: 2-3		4-9	10-11
Subfield 1: Length	Subfield 2: Country Code	Subfield 3: Watermark	Subfield 4: Mark 1 reason code data
Byte 1	Byte 2-4	Byte 5-10	Byte 11-12

12-13	14-15	16	17-18
Subfield 5: Mark 2 reason code data	Subfield 6: Mark 3 reason code data	Subfield 7: Card swallowed indicator	Subfield 8: Posting data
Byte 13-14	Byte 15-16	Byte 17	Byte 18-19

Length Subfield: 1-byte subfield containing the number of bytes in the field following the length subfield.

Positions 2-3, Country Code (Subfield 2): 3-digit ISO numeric country code must match value in field 19. For Sweden, this value must be **752**.

Positions 4-9, Watermark (Subfield 3): Contains the ATM watermark, binary data.

Positions 10-11, Mark 1 Reason Code Data (Subfield 4): Two characters with any valid combination of values denoting the type of card (national or international) and the watermark reader status.

Positions 12-13, Mark 2 Reason Code Data (Subfield 5): Contains the reason code for ATM reversal.

Positions 14-15, Mark 3 Reason Code Data (Subfield 6): Two characters with any valid combination of values denoting the stock of bank notes and receipt stock.

Positions 16, Card Swallowed Indicator (Subfield 7): Indicates if ATM swallowed the card.

Positions 17-18, Posting Data (Subfield 8): Contains month and date in packed decimal format (mmdd).

Field 118, Usage 3 - Usage

This field is optionally present in

- 0100 ATM authorization requests and balance inquiries
- 0400/0420 reversals
- 0120 issuer advices
- 0420 issuer advices

This field is not used in responses.

Field 118, Usage 3 - Field Edits

If this field is present in requests, subfields should be zero-filled, unless remaining subfields are required.

Field 118, Usage 3 - Reject Codes

0144 = Invalid value

Field 118, Usage 3 - Valid Values

Table 105: Field 118, Usage 3 values

Code	Description
Positions 10-11: Mark 1 Reason Code Data	
National or International Card	
0	National card

Table 105: Field 118, Usage 3 values

Code	Description
4	National card, foreign currency
8	International card
C	International card, foreign currency
Watermark Reader Status	
0	Watermark readable
B	Watermark unreadable
C	Watermark missing
D	Test mode
E	Test mode
Positions 12-13: Mark 2 Reason Code Data	
00	Dispensing error for bank notes or receipt
02	Error in response message
08	Failure to return card, response received from host
48	Failure to return card, single reversal
04	Timeout - card not picked up, response received from host
44	Timeout - card not picked up, single reversal
80	Same as 04
40	Single reversal; unknown reason
06	Error in response and timeout picking up card
0A	Error in response and failure to return card
Positions 14-15: Mark 3 Reason Code Data	
Stock of Bank Notes	
0	Both SEK 100 and SEK 500 notes available
4	SEK 500 notes not available
8	SEK 100 notes not available
C	No money available
Receipt Stock	
0	Receipt ok
4	Receipt low

Table 105: Field 118, Usage 3 values

Code	Description
8	Receipt paper empty
C	Receipt technical error
Position 16: Card Swallowed Indicator	
0	Card was not swallowed
1	Card was swallowed

Field 119 – Settlement Service Data

Field 119 – Attributes

variable length

1 byte, binary +

255 ANS, EBCDIC; maximum: 256 bytes

Field 119 – Description

This national use field contains settlement information unique to the processing of Visa transactions by participants in a given country. The field has these usages:

- Usage 1: Client-Calculated IRF
- Usage 2: Mexico Client-Calculated IRF
- Usage 4: Brazil National Data (POS only)
- Usage 5: Argentina Domestic Data (POS only)

Field 119 is not used in authorization-only transactions.

National Net Settlement Service (NNSS) participants should contact their Visa representatives for uses of settlement service data.

Although various usages and formats may be added by individual countries, the field contains a length subfield, with the number of bytes that follow it, a country code field, and one or more data subfields as shown in this layout.

Positions: 1-3 4-x		
length	country code	data

Length Subfield: The number of bytes in the field after the length subfield.

Positions 1-3, Country Code: The 3-digit country code must be a numeric ISO country code, as listed in the appendix titled “Country and Currency Codes.”

Positions 4-x, Data: Additional information for cardholder transaction processing defined in usage.

Field 119 – Usage

This field is forwarded from the originator to the destination center only if the transaction qualifies for the NNSS. If the transaction does not qualify for the NNSS, Visa removes the field from the message. This field is not returned in responses.

Field 119 – Field Edits

Length subfield must not exceed **256** bytes.

The country code (positions 1-3) must match the acquirer country code.

Field 119 – Reject Codes

0131 = Invalid length

0132 = Invalid country code

Field 119, Usage 1 - Client-Calculated IRF

Field 119, Usage 1 - Attributes

variable length

1 byte, binary +

15 ANS, EBCDIC; maximum: 16 bytes

Field 119, Usage 1 - Description

This field is used for International clients only.

This field contains the client-calculated interchange reimbursement fee (IRF) for countries using this capability. Implementation requires prenotification to your Visa representative.

Positions: 1-3 4-15

length	country code	client-calculated Interchange Reimbursement Fee
--------	--------------	---

Length Subfields: This value is the number of bytes in the field after the Length subfield.

Positions 1-3, Country Code: The 3-digit country code must be a numeric ISO country code as listed in the appendix titled “Country and Currency Codes.”

Positions 4-15, Client-Calculated Interchange Reimbursement Fee: This numeric value must be expressed in the local currency specified by the currency code in field 49. No decimal point appears in this field. The decimal place is assumed based on the currency.

The Currency Precision Service is optionally available to multicurrency participants. This service uses Field 63.13-Decimal Positions Indicator.

Field 119, Usage 1 - Usage

This field is used in the following transactions:

- 0200 cash disbursement
- 0220 cash disbursement adjustment
- 0400/0420 reversal

- 0422 dispute financial and dispute financial reversal
- 0480 dispute financial status advice
- 0220 dispute response financial
- 0282 dispute response financial status advice

The field is optional in an 0200 cash disbursement request. If present in the request, and the transaction qualifies for the National Net Settlement Service (NNSS), it is forwarded to the issuer. If present in the request, it is required in all subsequent messages related to the same transaction.

No decimal point appears in the field. The decimal place is assumed based on the currency specified in Field 49 Currency Code, Transaction.

Example

The Venezuela Bolivar has two decimal points; therefore if the client-calculated IRF for a given transaction is 5 Bolivares, the acquirer would enter 000000000500 in this field.

VisaNet does not deliver this field to its destination if:

- The transaction does not qualify for National Net.
- The transaction qualifies for National Net but the country code specified in this field is different from the acquirer's country code.
- National Net does not support a client-calculated IRF.
- The client-supplied IRF is not applicable for the transaction type.

STIP Advices: This field is present in an advice if it was in the request.

If the field is not present or contains **zeros**, no IRF is assessed.

Field 119, Usage 1 - Field Edits

The country code (positions 1-3) must match the acquirer country code.

The client-calculated IRF (positions 4-15) must be numeric.

Field 119, Usage 1 - Reject Codes

0131 = Invalid length

0132 = Invalid country code

0146 = Invalid value in the client-calculated IRF field

Field 119, Usage 2 - Mexico Client-Calculated IRF

Field 119, Usage 2 - Attributes

variable length

1 byte, binary +

43 ANS, EBCDIC; maximum: 44 bytes

Field 119, Usage 2 - Description

This usage applies to Mexico domestic National Net Settlement Service (NNSS) transactions only and contains the client-calculated interchange reimbursement fee (IRF). Implementation requires prenotification to your Visa representative.

	Positions: 1-3	4-15	16-25	26-27
length	country code	client calculated interchange reimbursement fee	VAT on IRF	account type
28	29-30	31-43		
IRF type	IRF category	merchant fiscal ID (RFC)		

Length Subfield: This value is the number of bytes in the field after the Length subfield.

Positions 1-3, Country Code: This 3-byte subfield contains a value of **484** (Mexico country code).

Positions 4-15, Client-Calculated Interchange Reimbursement Fee: This 12-byte subfield contains the amount for the currency code in field 49. It must not contain zeros. No decimal points should be used in this subfield. The decimal place is assumed based on the currency.

Positions 16-25, VAT on IRF: This 10-byte subfield contains the VAT calculated for the IRF applicable to the transaction. It must not contain zeros. No decimal points should be used in this subfield. The decimal place is assumed based on the currency.

Positions 26-27, Account Type: This 2-byte subfield must contain one of the following values:

- **CO** = Commercial products
- **CR** = Credit
- **DB** = Debit
- **PL** = Private label
- **PP** = Prepaid
- **Spaces** = Default

Positions 28, IRF Type: This 1-byte subfield contains one of the following values:

- **0** = Unknown/default
- **1** = Fixed
- **2** = Ad valorem (%)
- **3** = Composite (fixed amount and ad valorem)

Positions 29-30, IRF Category: This 2-byte subfield optionally contains any value from **00** to **99**. It is zero filled if no IRF category is provided.

Positions 31-43, Merchant Fiscal ID (RFC): This 13-byte subfield optionally contains RFC for the merchant. This is an alphanumeric field. This field can contain spaces if no RFC is present. The RFC format can be **AAAAA***NNNN***AAAA**, where **A** is alphanumeric value and **N** is a numeric value.

Field 119, Usage 2 - Usage

To qualify for Mexico NNSS, 0200 full financial transactions must contain this field.

This field is used in the following messages:

- 0200 request
- 0420 reversal
- 0422 dispute financial and dispute financial reversal
- 0220 dispute response financial

Field 119, usage 2 does not apply to 01xx messages. This field is not returned in responses.

Field 119, Usage 2 - Field Edits

If positions 1-3 (country code) do not contain **484**, V.I.P. rejects the message with reject code **0132**.

If positions 4-15 (client calculated interchange reimbursement fee) do not contain a value greater than **zero**, V.I.P. rejects the message with **0146**.

If positions 16-25 (VAT on IRF) do not contain a value greater than **zero**, V.I.P. rejects the message with **0146**.

If positions 26-27 (account type) do not contain a value of **CO, CR, DB, PL, PP**, or **Spaces**, V.I.P. rejects the message with **0168**.

If position 28 (IRF type) do not contain a value of **0, 1, 2**, or **3**, V.I.P. rejects the message with **0146**.

If positions 29-30 (IRF category) do not contain a numeric value from **00** to **99**, V.I.P. rejects the message with **0146**.

If positions 31-43 (RFC) do not contain an alphanumeric value, V.I.P. rejects the message with **0725**.

If subfields are not present in the message, V.I.P. rejects the transaction with **0131**.

Field 119, Usage 2 - Reject Codes

0131 = Invalid length

0132 = Invalid country code

0146 = Invalid value in the client-calculated IRF field

0168 = Invalid account type

0725 = Invalid value in field 119 settlement data

Field 119, Usage 3 - Colombia Domestic Data

Field 119, Usage 3 - Attributes

variable length

1 byte, binary +

126 ANS, EBCDIC; maximum: 127 bytes

Field 119, Usage 3 - Description

Usage applies to Colombia domestic data and contains the interchange amount, sales tax amount, and additional amounts for Colombia National Net Settlement Service (NNSS) transactions.

Endpoints must be able to support usages of field 119 that can be present.

	Positions: 1-3	4-15	16-27	28
length	country code	national reimbursement fee	national net sales tax amount	national net miscellaneous amount type
29	30-41	42-53	54-75	76-83
national net impact type	national net other amount	national net IRF calculation base amount	national reference	national merchant code
84-92	93-94	95	96-103	104-112
national net miscellaneous amount	national reason collection code	national capture indicator code	amount base of add value tax to return	consumption tax amount
113-121	122	123	124	125-126
add value tax amount	cost transaction indicator	EMV transaction indicator	national cashback indicator	national chargeback reason code

Length Subfield: is the number of bytes in the field after the length subfield.

Positions 1-3, Country Code: 3-byte alphanumeric subfield must contain a value of **170** (Colombia).

Positions 4-15, National Reimbursement Fee: 12-byte numeric subfield must contain the client-supplied interchange amount and be expressed in the currency present in Field 49-Currency Code, Transaction. The unsigned numeric value must not be greater than the value in field 4.

Positions 16-27, National Net Sales Tax Amount: This subfield is zero-filled.

Position 28, National Net Miscellaneous Amount Type: 1-byte alphanumeric subfield must contain one of the following values when the National Net Miscellaneous Amount subfield (positions 84-92) is greater than zero:

- **A** (airport charge)
- **C** (cashback)
- **T** (tip)

When the National Net Miscellaneous Amount subfield is not greater than zero, position 28 must contain a space.

Position 29, National Net Impact Type: Position 29 must contain a space.

Positions 30-41, National Net Other Amount: This subfield is zero-filled.

Positions 42-53, National Net IRF Calculation Base Amount: This subfield is zero-filled.

Positions 54-75, National Reference: This subfield is zero-filled.

Positions 76-83, National Merchant Code: This subfield is zero-filled.

Positions 84-92, National Net Miscellaneous Amount: 9-byte numeric subfield contains the amount of a tip, cashback, or airport tax. Subfield is right-justified. Subfield should be zero-filled if data not present.

Positions 93-94, National Reason Collection Code: This subfield is zero-filled.

Positions 95, National Capture Indicator Code: This subfield is zero-filled.

Positions 96-103, Amount Base of Add Value Tax to Return: 8-byte numeric subfield contains base value of IVA (Sales tax). Subfield is right-justified. Subfield should be zero-filled if data not present.

Positions 104-112, Consumption Tax Amount: 9-byte numeric subfield contains national consumption tax amount. Subfield is right-justified. Subfield should be zero-filled if data not present.

Positions 113-121, Add Value Tax Amount: 9-byte numeric subfield contains the national government tax for added value of good or service. Subfield is right-justified. Subfield should be zero-filled if data not present.

Positions 122, Cost Transaction Indicator: 1-byte numeric subfield contains one of the following values:

- **0** (Not a cost inquiry amount)
- **1** (Cost inquiry transaction)

Subfield is mandatory.

Positions 123, EMV Transaction Indicator: 1-byte numeric subfield contains one of the following values:

- **0** (Does not apply to EMV)
- **1** (EMV transaction)
- **2** (Fallback transaction)

Subfield is mandatory.

Positions 124, National Cashback Indicator: This subfield is zero-filled.

Positions 125-126, National Chargeback Reason Code: 2-byte alpha-numeric subfield contains a domestic dispute reason code.

Subfield should be space-filled if data not present.

Field 119, Usage 3 - Usage

To qualify for settlement in the Colombia NNSS, an 0200 full-financial transaction must contain this field in cash disbursements, balance inquiries, and account transfers. The field is also used in related reversals and advices, including exception items.

Issuers must support the use of this field.

Field 119, Usage 3 - Field Edits

V.I.P. removes this field from requests that do not qualify for the Colombian NNSS.

If a request is submitted with a Settlement Flag value of **8** in header field 9 but field 119, usage 3, is not present, V.I.P. rejects the request with reject code **0725**.

The rest of the edits in this section apply to V.I.P. full-financial requests that qualify for the Colombian NNSS.

If positions 1-3 (country code) do not contain a value of **170**, V.I.P. rejects the request with reject code **0132**.

If positions 4-15 (national reimbursement fee) do not contain a numeric value, or contain a value greater than the transaction amount in field 4, V.I.P. rejects the request with reject code **0146**.

If fields not mentioned contain invalid values, V.I.P. rejects the request with reject code **0725**.

Field 119, Usage 3 - Reject Codes

0132 = Invalid country code

0146 = Invalid value in the client-calculated IRF field

0725 = Invalid value in field 119 settlement data

Field 119, Usage 4 - Brazil National Data

Field 119, Usage 4 - Attributes

variable length

1 byte, binary +

10 ANS, EBCDIC; maximum: 11 bytes

Field 119, Usage 4 - Description

This usage contains data required for Original Credit (OCT) and Account Funding (AFT) transactions in the Brazil National Net Settlement Service.

Endpoints must be able to support usages of field 119 that can be present.

Usage 4 layout.

	Positions: 1-3	4-6	7-10
length	country code	settlement type	national net CPD of original

Length Subfield: This value is the number of bytes in the field after the length subfield.

Positions 1-3, Country Code: This 3-byte alphanumeric subfield must contain a value of **076** (Brazil).

Positions 4-6, Settlement Type: This 3-byte numeric subfield must contain a settlement type of **000** through **028**.

Positions 7-10, National Net CPD of Original: This 4-byte numeric subfield must contain a date in the format **YDDD**.

Field 119, Usage 4 - Usage

This field is not required to qualify for the Brazilian NNSS, if not present, V.I.P. assigns the following default values:

- Country code = **076** (Brazil)
- Settlement type = **000**
- National net CPD of original = current CPD (for reversals and exceptions only) or **0** (for originals)

This usage does not apply to non-financial messages. If present, V.I.P. removes it.

Field 119, Usage 4 - Field Edits

If positions 1-3 (country code) does not contain a value of **076**, V.I.P. rejects the request with reject code **0132**.

If positions 4-6 (settlement type) does not contain a value between **000** and **028**, V.I.P. rejects the request with reject code **0726**. It must be **000** for Original Credit Transactions.

Positions 7-10 (national net CPD of original) is not required on originals. If present in original, it must contain a **0**. If positions 7-10 do not contain **0**, V.I.P. rejects the request with reject code **0727**.

For dispute financials, dispute response financials, and reversals, positions 7-10 must contain a date from the original in the format *YDDD*. If not, V.I.P. rejects the request with reject code **0727**.

Issuers and acquirers do not receive field 119 in responses.

Field 119, Usage 4 - Reject Codes

0131 = Invalid length

0132 = Invalid country code

0726 = Invalid settlement type

0727 = Invalid national net CPD of original

Field 119, Usage 5 - Argentina Domestic Data

Field 119, Usage 5 - Attributes

variable length

1 byte, binary +

139 ANS, EBCDIC

maximum 140 bytes

Field 119, Usage 5 - Description

Usage applies to Argentina domestic data and contains installment payment details for Argentina National Net Settlement Service (NNSS) transactions.

Endpoints must be able to support usages of field 119 that can be present. V.I.P. drops the field if the transaction does not qualify for Argentina National Net Settlement.

	Positions: 1-3	4-5	6	7
Length	Country Code	Payment Indicator	Number of Installment Payments	Installment Payment Number
8-13	14-19	20-24	25-29	30-34
Installment Payment Total Amount	Installment Payment Interest Amount	VAT for Installment Payment Interest Amount	Installment Payment Risk Fee Amount	VAT for Installment Payment Risk Fee Amount
35	36	37-42	43-48	49-54
Installment Payment Interest National Net Impact-IRF Indicator	Installment Payment Interest National Net Impact-Settlement Indicator	Deferred Cardholder Billing Date	Deferred Settlement Date	Tip Amount
55-59	60-64	65-84	85-90	91-94
Interchange Reimbursement Fee (IRF)	VAT National Reimbursement Fee	Promotion Data	Deferred Settlement Date of Original	VAT Rate

95-99	100-104			
Cashback Interchange Reimbursement Fee	Value-Added Tax on Cashback IRF			

Length Subfield: Contains number of bytes in the field after the length subfield.

Positions 1-3, Country Code: 3-byte alphanumeric subfield contains a value of **032** (Argentina).

Positions 4-5, Payment Indicator: 2-byte alphanumeric subfield contains:

- **CO** (Sale/Cash Disbursement)

Positions 6, Number of Installments Payments: 2-byte numeric subfield can contain number of installment payments from **01-99**.

Positions 7, Installment Payment Number: 2-byte numeric subfield can contain number of installment payments from **01-99**.

Position 8-13, Installment Payment Total Amount: 6-byte numeric subfield can contain 12-digit installment payment total amount with two implied decimal places.

Position 14-19, Installment Payment Interest Amount: 6-byte numeric subfield can contain 12-digit installment payment interest amount with two decimal places.

Position 20-24, VAT for Installment Payment Interest Amount: 5-byte numeric subfield contains the 10-digit Value-Added Tax (VAT) for installment payment interest amount with two implied decimal places.

Position 25-29, Installment Payment Risk Fee Amount: 5-byte numeric subfield can contain 10-digit installment payment risk fee amount with two implied decimal places.

Position 30-34, VAT for Installment Payment Risk Fee Amount: 5-byte numeric subfield can contain the 10-digit VAT for installment payment risk fee amount with two implied decimal places.

Position 35, Installment Payment Interest National Net Impact in IRF Calculation - IRF Indicator: 1-byte mandatory subfield must contain **D** (do not subtract) or **S** (subtract) to indicate whether the installment payment interest and VAT for installment payment interest amounts are to be added or subtracted from the national reimbursement fee (IRF).

Position 36, Installment Payment Interest National Net Impact - Settlement Indicator: 1-byte mandatory subfield must contain **A** (add) or **D** (do not add) to indicate whether the installment payment interest risk fee amount and VAT for installment payment interest risk fee amount are to be disregarded or added to the IRF.

Position 37-42, Deferred Cardholder Billing Date: 6-byte optional subfield must contain the deferred cardholder billing date in *yymmdd* format, where yy (year) is **00-99**, mm (month) is **01-12**, and dd (day) is **01-31**.

Position 43-48, Deferred Settlement Date: 6-byte optional subfield must contain the deferred acquirer settlement date in *yymmdd* format, where yy (year) is **00-99**, mm (month) is **01-12**, and dd (day) is **01-31**.

Position 49-54, Tip Amount: 6-byte optional subfield must contain 12-digit tip amount with two decimal places implied.

Position 55-59, Interchange Reimbursement Fee (IRF): 5-byte subfield must contain 10-digit IRF provided by Visa with two decimal places implied.

Position 60-64, VAT National Reimbursement Fee: 5-byte subfield must contain 10-digit national reimbursement fee provided by Visa with two decimal places implied.

Position 65-84, Promotion Data: 20-byte subfield can optionally contain promotion data where the first position is the value of **A**.

Position 85-90, Deferred Settlement Date of Original: For disputes and dispute responses this 6-byte subfield must contain the original deferred settlement date in *yyymmdd* format, where yy (year) is **00-99**, mm (month) is **01-12**, and dd (day) is **01-31**.

Position 91-94, VAT Rate: 4-byte subfield must contain a 4-digit VAT rate with two decimal places.

Position 95-99, Cashback Interchange Reimbursement Fee: 5-byte subfield must contain 10-digit IRF provided by Visa with two decimals implied. This subfield is right-justified.

Position 100-104, Value-Added Tax on Cashback IRF: 5-byte subfield must contain 10-digit value-added tax on cashback IRF. This subfield is right-justified.

Field 119, Usage 5 - Usage

Full-Service acquirers and issuers who participate in Argentina National Net Settlement Service must support this field.

This field is mandatory for full-service ATM transactions.

Field 119, Usage 5 - Field Edits

V.I.P. removes this field from requests that do not qualify for the Argentina NNSS.

V.I.P. removes this field if sent by a V.I.P. Authorization-Only acquirer in ATM or POS transaction.

If positions 1-3 (country code) do not contain a value of **032**, V.I.P. rejects the request with reject code **0132**.

If positions 4-5 (Installment Payment Number) does not contain **CO** (Sale/Cash disbursement), V.I.P. rejects the transaction with reject code **0725**.

If position 35 (installment payment interest national net impact in IRF calculation - IRF indicator) does not contain a valid value, V.I.P. rejects the transaction with reject code **0725**.

If position 36 (installment payment interest national net impact - settlement indicator.) does not contain a valid value, V.I.P. rejects the transaction with reject code **0725**.

If positions 49-54 (tip amount) contain an amount greater than purchase amount in field 4, V.I.P. rejects the transaction with reject code **0725**.

If an acquirer submits an 0200 Financial Request message that qualifies for settlement in the Argentina NNSS without Field 119, Usage 5, V.I.P. rejects the transaction with reject code **0725**.

Field 119, Usage 5 - Reject Codes

0132 = Invalid country code

0725 = Invalid value in field 119 settlement data

Field 119, Usage 6 - Chile Domestic Data

Field 119, Usage 6 - Attributes

variable length

1 byte, binary +

55 ANS, EBCDIC

maximum: 56 bytes

Field 119, Usage 6 - Description

Usage applies to Chile domestic purchases and merchandise returns that qualify for Chile National Net Settlement Service (NNSS).

Endpoints must be able to support usages of field 119 that can be present. V.I.P. drops the field if the transaction does not qualify for Chile National Net Settlement.

	Positions: 1-3	4	5-7	8-10
length	Country Code	Sale Type Indicator	Number of Installment Payments	Installment Payment Number
11	12	13	14	15
Issuer Promo Flag	Deferred Flag	Deferred Period	Grace Period Flag	Grace Period
16-21	22-27	28-30	31-32	33-37
Installment Payment Total Amount	Installment Payment Amount	Installment Interest Rate	VAT Rate	Interchange Reimbursement Fee
38-43	44-49	50-55		
VAT National Interchange Reimbursement Fee	Deferred Settlement Date	Deferred Settlement Date of Original		

Length Subfield: is the number of bytes in the field after the length subfield.

Positions 1-3, Country Code: 3-byte subfield contains a value of **152** (Chile).

Position 4, Sale Type Indicator: 1-byte subfield contains a value of **1-9**

- **1** = No installments – Sin cuotas, including:
 - Purchase – Venta normal
 - Purchase with tip – Venta normal con propina
 - Deferred purchase – Venta normal con periodo de gracias
 - Bill payments – Pago de servicios\Pago de cuentas
 - Tax payment – Pago de impuestos
 - Recurring payment – Pago recurrente
 - Envio de cupon (Transaccion forzada - advice) – compra autorizada por telefono
 - Anulacion H2H – Retorno de mercaderia (transaccion forzada – advice) – credit voucher

Authorizations that can occur in one purchase–venta normal can include preauthorization (pre-autorizacion), check in–hotel, hotel incremental charges (reautorizacion), check out advice final charge when leaving the hotel (transaccion forzada), Charge for additional expenses after leaving the hotel (cargo demorado)

- **2** = Quasi-cash-compra casino, including:
 - Sale in servicentros
 - Casino gambling
- **5** = Issuer installments-Cuotas normales, including:
 - Issuer installments with interest-Cuotas con interes del Emisor
 - Deferred issuer installments with interest-Cuotas con interes del Emisor con diferimento)
 - Issuer installments without interest-Cuotas sin interes del Emisor

For issuer installments without interest, minimum installments can be 2 and maximum can be 48, if the merchant has enabled in its POS equipment for three installments without interest, the minimum number of installments should be 4.

- **6** = Merchant installments, including:
 - 2 Cuotas precio contado (2CPC)
 - 3 Cuotas precio contado (3CPC)
 - Merchant installments-N cuotes comercio
 - Promotion of merchant installments without interest-cuotas sin interes del comercio por promocion

- **8** = Sale by agreement of quotes with a single interest rate-cuotas con tasa de interes unica comercio:
 - Minimum installment = 4
 - Maximum quota = 24

- **9** = Tax payment regular sale (purchase-venta normal) with MCC of **9311**

For acquirer-originated 02xx financial and 04xx reversals, only the values of **1**, **2**, and **9** are supported.

Positions 5-7, Number of Installment Payments: 3-byte subfield contains total number of installments from **000-999**. Default value is **000**.

Positions 8-10, Installment Payment Number: 3-byte subfield contains current number of installment from **000-999**. Default value is **000**.

Position 11, Issuer Promo Flag: 1-byte subfield indicates that transaction is performed according to the issuer promotion campaign agreed with the acquirer and contains value of **0** (No promotion campaign was agreed) or **1** (Promotion campaign agreed).

Position 12, Deferred Flag: 1-byte subfield contains value of **0** (Cardholder has not selected a deferred period) or **1** (Cardholder has selected a deferred period).

Position 13, Deferred Period: 1-byte subfield indicates the deferred period selected by the cardholder and contains value of

- **0** = No deferment
- **1** = One month deferment
- **2** = Two month deferment
- **3** = Three month deferment

Position 14, Grace Period Flag: 1-byte subfield indicates if cardholder has selected a grace period flag and contains value of **0** (Cardholder has not selected a grace period) or **1** (Cardholder has selected a grace period).

Position 15, Grace Period: 1-byte subfield indicates which grace period flag is selected by cardholder and contains value of **0** (Cardholder has not selected the period) or **1** (Cardholder has selected one month as the grace period).

Positions 16-21, Installment Payment Total Amount: 6-bytes subfield contains total amount of installment payment with two-implied decimal places.

Positions 22-27, Installment Payment Amount: 6-bytes subfield contains amount of installment payment with two-implied decimal places.

Positions 28-30, Installment Interest Rate: 6-bytes subfield contains installment interest rate with two-implied decimal places. This field contains a leading zero.

Positions 31-32, VAT Rate: 6-bytes subfield contains value added tax (VAT) rate with two-implied decimal places.

Positions 33-37, Interchange Reimbursement Fee: 6-bytes subfield contains interchange reimbursement fee with two-implied decimal places.

Positions 38-43, VAT National Interchange Reimbursement Rate: 6-bytes subfield contains VAT interchange reimbursement fee with two-implied decimal places.

Positions 44-49, Deferred Settlement Date: 6-bytes subfield contains deferred settlement date in *yymmdd* format

- yy = **00-99** (Year)
- mm = **01-12** (Month)
- dd = **01-31** (Day)

Positions 50-55, Deferred Settlement Date of Original: 6-bytes subfield contains original deferred settlement date in dispute and dispute response transactions in *yymmdd* format

- yy = **00-99** (Year)
- mm = **01-12** (Month)
- dd = **01-31** (Day)

Field 119, Usage 6 - Usage

Issuers must support the use of this field.

Field 119, Usage 6 - Field Edits

V.I.P. removes this field from requests that do not qualify for the Chile NNSS.

All the edits below are applicable for Chile NNSS transactions.

If positions 1-3 (Country Code) do not contain value of **152**, V.I.P. rejects the request with reject code **0132** (Invalid country code).

If position 4 (Sale Type Indicator) contains a value of **2** and field 18 - Merchant Type do not contain **7995**, V.I.P. rejects transaction with reject code **0725**.

If position 4 (Sale Type Indicator) contains a value of **9** and field 18 - Merchant Type do not contain **9311**, V.I.P. rejects transaction with reject code **0725**.

If position 4 (Sale Type Indicator) contains a value of **2** but value in positions 5-7 is not **000**, V.I.P. rejects transaction with reject code **0725**.

If value in positions 8-10 is not equal to or less than the value in positions 5-7, V.I.P. rejects transaction with reject code **0725**.

If value in position 11 is not **0** or **1**, V.I.P. rejects transaction with reject code **0725**.

If value in position 14 is not **0** or **1**, V.I.P. rejects transaction with reject code **0725**.

If value in position 15 is not **0** or **1**, V.I.P. rejects transaction with reject code **0725**.

If value in positions 50-55 is not **0** or **1**, V.I.P. rejects transaction with reject code **0725**.

For acquirer-originated 02xx financials and 04xx reversals -

- Position 4 contains **1**, **2**, or **9**
- Position 12, 13, 14, 15 contains **0**
- Positions 44-49 and 50-55 contains all zeroes

V.I.P. rejects transaction with reject code **0725**, if these positions contain any other value.

Field 119, Usage 6 - Reject Codes

0132 = Invalid country code

0725 = Invalid value in field 119 settlement data

Field 121 – Issuing Institution Identification Code

Field 121 – Attributes

variable length

1 byte, binary +

3-11 AN, EBCDIC; maximum: 12 bytes

Field 121 – Description

Field 121 is a Visa-defined private-use field that contains a code identifying the issuer when the issuer cannot be determined from the message's account number.

Because field 121 is a private-use field, the institution ID is in EBCDIC, not in 4-bit BCD as in other institution ID fields (fields 32, 33, and 100).

The common code length is six digits, but it can vary to a length of **11** digits.

Positions:

1-11

length	issuing institution ID code
Byte 1	Byte 2-12

Field 121 – Usage

Field 121 applies only to card account numbers that are not ISO-registered numbers (and thus may conflict with a registered number). The field is used in card transaction and file maintenance requests only after prior consultation with Visa. Supports authorizations and advices. The field is used in reversals if present in originals.

Authorization request routing:

- The issuing identifier-level option to route according to the data in this field must be set to "yes."

STIP and Switch Advices: Field 121 is present in 0420 advices if it was in the request.

Field 121 – Field Edits

The length subfield value must not exceed **11**. The value in this field must be numeric and must be an institution ID. If present in a request, this field must also be present in the response.

Field 121 – Reject Codes

0128 = Invalid length

0129 = Invalid value

0401 = Field missing

Field 121 – File Edits

None.

Field 121 – File Maintenance Error Codes

None.

Field 123—Verification Data

Field 123—Attributes

variable length

1 byte, binary +

255 bytes, variable by usage; maximum 256 bytes

Field 123—Description

Field 123 is a Visa private-use field for miscellaneous information that involves multiple uses and field formats for different types of transactions and messages.

- Field 123, Usage 1-Verification Data (Fixed Format)
- Field 123, Usage 2-Verification and Token Data (TLV Format)

Field 123—Usage

See usage descriptions for this field.

Field 123—Field Edits

See usage descriptions for this field.

Field 123—Reject Codes

See usage descriptions for this field.

Field 123—Verification Data (Fixed Format)

Field 123—Attributes

variable length

1 byte, binary +

Fixed Format: 29 ANS, EBCDIC; maximum 30 bytes

Field 123—Description

Field 123 is a Visa-defined private-use field that contains information that is used for certain types of verification data, including selected portions of the cardholder's postal code and street address. All merchants whose acquirers subscribe to the Visa Address Verification Service may request postal code and street address verification for a cardholder.

This field has two subfields following the length subfield:

Length Subfield: This value is the number of bytes in this field after the length subfield.

Positions 1-9, Postal Code: This value is the 5-digit postal code (left-justified with 4 positions of right-space-fill), or 9-digit postal code.

Positions 10-29, Cardholder Street Address: This subfield contains 20 characters of street address. The acquirer converts spelled-out numbers to digits, left-justified with right space-fill. Examples of street addresses in this standard format are:

Address	Acquirer's Subfield Entry
One Elm St	1 Elm St
123 First St	123 first St
89 25th Ave	89 25th Ave
22 Walnut St #23	22 Walnut St #23
P.O. Box 12345	P. O. Box 12345

Fixed format data can be submitted in compressed or uncompressed form.

Issuers and acquirers outside the U.K. and U.S. must use TLV format. See field 123, usage 2.

V.I.P. also converts issuer-generated AVS Result Codes to their counterparts when incompatible data standards are encountered. See Field 44.2, Address Verification Result Code.

Data Compression

Field 123—Usage

If V.I.P. receives an authorization request containing field 123 for a non-AVS-card type, it removes the field before passing the request to the issuer. When V.I.P. receives the 0110 issuer response, it inserts a **U** (unavailable; issuer not an AVS participant) in Field 44.2, Address Verification Service Result Code.

If an acquirer requests the Address Verification Service without providing address data in field 123 of the request message, V.I.P. responds with AVS result code **N** in field 44.2. Transactions that involve AVS in CPS qualification receive Authorization Characteristics Indicator **N** (not qualified). This ensures that acquirers are not afforded a better CPS rate and dispute protection when requesting address verification without supplying address data for the issuer to verify.

Except for the U.K., acquirers can use an 0100 message to request an address verification by itself or along with an authorization request. U.K. acquirers must include address verification requests with authorization requests.

U.K. Domestic Transactions: Issuer participation in AVS is mandatory. U.K. issuers must perform their own address verification. A **U** is returned in field 44.2 for the AVS result code if the transaction is processed by stand in processing (STIP).

U.K. acquirers submit address data in the U.K. compressed format, subject to the following requirements:

- U.K.-domestic transactions use a U.K.-unique compression method.
- Address verification data from U.K. acquirers is forwarded unaltered to U.K. issuers.
- Address verification data from non-U.K. acquirers using the IDS (International Data Standard) format is converted to the U.K. format and forwarded to U.K. issuers.
- V.I.P. removes fixed format address verification data from requests bound for non-U.K. issuers.
- Address data in international transactions (U.K. merchants and acquirers to non-U.K. issuers) can be in TLV IDS format. See Field 123, usage 2, for TLV format.

All Other Users: Participation by non-U.S. and non-U.K. issuers and acquirers is optional. All non-U.S. and non-U.K. clients must use the TLV format. Data sent by U.S. domestic or U.K. domestic acquirers to non-U.S./U.K. issuers is converted if necessary to the TLV format. See Field 123, usage 2, for TLV format.

Issuers performing their own address verification should choose to receive uncompressed data unless their verification approach is compatible with the Leading Numerics or First Five Numerics algorithms.

Bill Payment Transactions (U.S. Only): AVS data is not required for CPS/Card-Not-Present transactions, to qualify for the CPS/Card-Not-Present Program.

STIP and Switch Advices: Field 123 is present in 0120 advices if it was in the request whether the issuer or VisaNet performs the verification.

Field 123—Field Edits

Fixed Format: V.I.P. rejects authorization requests in which the length of this field exceeds **29** bytes. V.I.P. stops editing for numerics when:

- The first alpha character or space (not counting special characters) if within the first five numerics
- The fifth numeric
- The end of the street address field

If the issuer performs verification and opts to receive uncompressed address data, V.I.P. forwards the field as received from the acquirer.

Field 123—Reject Codes

0137 = Invalid AVS data length

0699 = Presence of PIN/Track/AVS data inconsistent with message type

Field 123, Usage 2—Verification & Token Data (TLV Format)

Field 123, Usage 2—Attributes

variable length

1 byte, binary +

TLV Format: 255 binary and ANS, EBCDIC; maximum 256 bytes

Field 123, Usage 2—Description

This field description contains transaction datasets presented in hex number order. The dataset IDs listed for position 1 can be used as a guide to the Usage section, which specifies the content for each dataset.

The datasets, which are in TLV format, can have multiple sub-elements. The TLV format is shown below.

Positions:			
	1	2-3	4-255
Subfield 1: Length	Subfield 2: dataset ID	Subfield 3: dataset length	Subfield 4: Verification Data TLV elements
Byte 1	Byte 2	Bytes 3-4	Byte 5-256

Length Subfield: One-byte binary subfield that contains the number of bytes in this field. The maximum is **255**

Position 1, Dataset ID: This one-byte binary subfield contains a hexadecimal value that identifies the TLV data that follows.

- Dataset ID 66, Verification Data
- Dataset ID 67, Activation Verification Data
- Dataset ID 68, Token Data
- Dataset ID 69, Account Lookup Results
- Dataset ID 70, Customer ID Data Verification Result

Positions 2-3, Dataset Length: This 2-byte binary subfield specifies the total length of the TLV fields present in the dataset. The length is variable, depending on the data that follows.

Positions 4-255, TLV Data: Each subfield of a dataset has a defined tag, length, and value. The tag is used in conjunction with the dataset ID value. The dataset subfields can be present in any order with other TLV subfields.

The TLV format can be used by all clients regardless of region.

Field 123, Usage 2—Usage

These subsections (in hex number order) describe the usages for this field.

Endpoints that support this field in TLV format must be able to receive dataset IDs and tags defined for this field in any order, including those they do not recognize or expect. Endpoints can receive multiple datasets in this field. Endpoints must ignore dataset IDs or tags they do not recognize and continue to process the field.

Field 123, Usage 2—Dataset ID 66

Table 106: Dataset ID 66, Verification Data

Tag	Length	Value	Format	Content of Sub-Element
C0	9	Postal Code	AN	An EBCDIC postal/ZIP code, left-justified. Postal/ZIP codes fewer than 9 alphanumeric characters in length do not require spaces. Numeric-only data is acceptable.
CF	40	Street Address	AN	An EBCDIC street address, left-justified. Street addresses fewer than 40 characters in length do not require spaces. Alphabetic numbers in street addresses must be converted to numeric equivalents, for example, “twelve” is 12.
D0	14	Compressed AVS Data	AN	Contains the AVS data for token activation request messages in compressed format based on issuer configuration (U.S. and U.K.-only).

Table 106: Dataset ID 66, Verification Data

D4	26	Cardholder Name	ANS	Contains the cardholder name.
D6	32	Cardholder Shipping Hash	HEX	Contains cardholder shipping data in the form of a SHA-256 hash.

- Issuers and acquirers outside the U.K. and U.S. must use the TLV format.
- U.K. and U.S. acquirers can vary fixed and TLV formats from one transaction to the next depending on merchant support requirements.
- Issuers who support token processing must use the TLV format to send or receive AVS data.

If tag D4 (Cardholder Name) in dataset ID 66, Verification Data, is received from the acquirer with zero length, V.I.P. does not send tag D4 to the issuer.

V.I.P. converts issuer-generated AVS result codes to their counterparts when incompatible data standards are encountered. See Field 44.2, Address Verification Result Code.

Address verification can be requested only for Visa cards, Visa-approved U.S.-issuer proprietary or private-label card types, and American Express, Mastercard, or Discover POS transactions. STIP performs address verification for Visa, proprietary, and private-label transactions only. See Address Verification Service in *V.I.P. System Overview and Services*.

Data Compression

Issuers performing their own address verification can choose to have VisaNet forward the address data to them uncompressed or compressed. Compression is available *only* for Visa card transactions, not for Mastercard, American Express or Discover card transactions.

- *Uncompressed* data means that the issuer receives postal and street address data as the acquirer sent it, including non-numeric characters. Acquirers must forward at least **20** characters of uncompressed address data unless agreements on compatible compression methods have been established between acquirers and issuers.
- *Compressed* data means that alpha characters and special symbols in a street address have been removed, leaving only numeric values. The address verification services for U.S.- and U.K.-domestic transactions matches only on numerics.

V.I.P. has two compression algorithms, Leading Numerics and First Five Numerics, for data sent to issuers and for postal code and street address data stored in the cardholder database if issuers have chosen to have VisaNet perform Address Verification. V.I.P. also supports compression methods developed in the regions. For fixed format submissions, compressed data includes spaces necessary to fill out a subfield. No space-fill is required for TLV submissions. Algorithms ignore special characters such as:

/ (forward slash)

\ (backward slash)

(number/pound sign)

- (hyphen in a hyphenated numeric; for example, 214-30)

This compression option applies to postal codes and street addresses except in the U.K., where postal code compression does not apply. See Address Verification Service in *V.I.P. System Overview and Services*.

Field 123, Usage 2—Dataset ID 67

Table 107: Dataset ID 67, Activation Verification Data

Tag	Length	Value	Format	Content of Sub-Element
03	1	Activation Verification Result	AN	This tag is present if field 63.3 contains message reason code 3712 or 3714. This tag contains one of these OTP verification result and mobile banking application code values. • blank (space) = Invalid operation attempted • 1 = Successfully verified • 2 = Verification code expired • 3 = Verification code failed • 4 = Verification code missing • 5 = Verification code retries exceeded
04	2	Active Account Management Velocity Checking Result	N	This tag contains one of these AAM Velocity Checking result values. • 02 = Time-to-live exceeded • 03 = Count exceeded • 04 = Amount exceeded
05	4	Cardholder Verification Methods Identified by Cardholder Device	N, BCD	Contains these positions in a 4-byte bitmap. • Position 1, Unknown • Position 2, None • Position 3, Signature • Position 4, Online PIN • Position 5, Passcode • Position 6, Cardholder device code • Position 7, Fingerprint biometric verified by cardholder device • Position 8, Cardholder device pattern

Table 107: Dataset ID 67, Activation Verification Data

07	2	Issuer Special Condition Code	AN	This tag contains an issuer-assigned value. For 0600 and 0620 issuer token notifications this tag is for messages with Field 63.3-Message Reason Code 3700-Token Create.
08	1	Token Verification Result Code	ANS	• 1 = TAVV cryptogram failed validation • 2 = TAVV cryptogram passed validation • 3 = DTVV or Visa-defined format cryptogram failed validation • 4 = DTVV or Visa-defined format cryptogram passed validation The TAVV-only cryptogram option is applicable for token transactions without 3DS data.
84	1	Other Phone Number Verification Result	AN, EBCDIC	Contains one of these values that identify phone number verification result code in Account Verification Response messages: • 1 = Verified • 2 = Failed • 3 = Not performed This tag contains the result of phone number verification, if the acquirer sent a phone number in the original Account Verification Request.
85	1	Other Email Address Verification Result	AN, EBCDIC	Contains one of these values that identify email address verification result code in Account Verification Response messages: • 1 = Verified • 2 = Failed • 3 = Not performed This tag contains the result of email address verification, if the acquirer sent an email address in the original Account Verification Request.

Field 123, Usage 2—Dataset ID 68

Table 108: Dataset ID 68, Token Data

Tag	Length	Value	Format	Content of Sub-Element
01	13-19	Token	N	Token that is used to replace the cardholder PAN and is a required data element for token processing.
02	2	Token Assurance Method	AN	Spaces (No value set) 00 = No issuer ID&V 10 = Card issuer account verification 11 = Card issuer interactive cardholder authentication - 1 factor 12 = Card issuer interactive cardholder authentication - 2 factor 13 = Card issuer risk oriented non-interactive cardholder authentication 14 = Card issuer asserted authentication
03	11	Token Requestor ID	N	Token requestor ID.
04	19	Primary Account Number, Account Range	ANS	First nine digits of the cardholder PAN. V.I.P. forwards the first nine digits of the cardholder PAN data to the acquirer in the original response message. Acquirers must not forward this value to their merchants
05	32	Token Reference ID	AN	Token reference ID.
06	4	Token Expiration Date	N	The date is in <i>yymm</i> format, where <i>yy</i> = year (00-99) and <i>mm</i> = month (01-12).

Table 108: Dataset ID 68, Token Data

Tag	Length	Value	Format	Content of Sub-Element
07	2	Token Type	AN	01 = ECOM/COF (e-commerce/card on file) 02 = SE (secure element) 03 = CBP (cloud-based payment) 05 = E-commerce enabler 06 = Pseudo account C = Mastercard digital enablement service secure element token E = Embossed account number provided by issuer F = Mastercard digital enablement service static token H = Mastercard digital enablement service cloud-based payments token L = Pay with rewards loyalty program operator (LPO) card M = Primary account number P = Contactless account number R = Pay with rewards card V = Virtual card number Mastercard values in this tag are padded with a space.
08	1	Token Status	AN	A = Active for payment I = Inactive for payment (not yet active) S = Temporarily suspended for payments D = Deactivated for consumer-initiated transaction payments, limited time use for merchant-initiated transaction payments and follow-on transactions P = Pending deactivated
10	2	Visa Token Score	N	00 = Provisioning request was not scored 01-99 = Degree of risk associated with the token, indicating probability of fraud, higher score indicates higher probability

Table 108: Dataset ID 68, Token Data

Tag	Length	Value	Format	Content of Sub-Element
11	2	Visa Token Decisioning	AN	Results of the token provisioning decision. 00 = Provision and activate. 05 = Do not provision. 85 = Provision inactive state - requires further consumer authentication before activation.
12	1-2	Number of Active Tokens	N	Number of device tokens currently active for this PAN. Tag supports variable length based on the number of tokens: - For less than 10 tokens length is 1-byte - For 10 or more tokens length is 2-bytes
13	1-2	Number of Inactive Tokens	N	Number of device tokens currently inactive (device tokens that have not been activated) for this PAN. Tag supports variable length based on the number of tokens: - For less than 10 tokens length is 1-byte - For 10 or more tokens length is 2-bytes
14	1-2	Number of Suspended Tokens	N	Number of device tokens that were activated, but are suspended for payments for this PAN. Tag supports variable length based on the number of tokens: - For less than 10 tokens length is 1-byte - For 10 or more tokens length is 2-bytes

Table 108: Dataset ID 68, Token Data

Tag	Length	Value	Format	Content of Sub-Element
86	6	Token Requestor - Token Service Provider ID	11 N, BCD	Unique value that identifies the service provider for a token requestor. A token service provider is the integration partner for token requestors for provisioning and cryptogram requests. Applicable for e-commerce and Card-on-File transactions. This field is right justified and zero filled.
0A	1	Last Updated By	AN	This tag is present in the response when the token is located.
0B	32	PAN Reference ID	ANS	Unique reference ID generated by Visa for the card account number. It is required in 0302 Token File Inquiry Messages if Field 2-Primary Account Number is not present.
0D	1	Auto Fill Indicator	AN	Contains the value A (Auto fill) to identify tokens for web browser auto fill.
0E	1	Token VDCU Update First Use Indicator	AN	Contains the value of Y (First use since update) to notify acquirers that this is the first time usage of a token since an update in VDCU for underlying PAN or PAN expiration date. This tag is absent if this is not the first time usage since a PAN update. This tag is not available for ATM.
0F	2	PAN/Token Update Channel	AN, EBCDIC	Contains value of 05 (Issuer OBO LCM.) This tag is not available for ATM or Interlink.
1A	6-8	Activation Code	AN	This tag is present in the response when the token is located and contains obfuscated version of the activation code (OTP) on file. This tag is present when the activation code is expired. See activation code expiry date/time.
1B	12	Activation Code Expiry Date/Time	N, BCD	The format is <i>yyymmddhhmmss</i> expressed in GMT.

Table 108: Dataset ID 68, Token Data

Tag	Length	Value	Format	Content of Sub-Element
1C	2	Activation Code Verification Attempts	N, BCD	Activation Code Verification Attempts.
1D	2	Number of Activation Codes Issued	N, BCD	Number of Activation Codes Issued.
1E	6	Token activation date/time	N, BCD	Token activation date and time in <i>yymmddhhmmss</i> format expressed in GMT.
1F31	4	Elapsed Time To Live	N	Elapsed time in hours since the current limited-use key (LUK) is provisioned on the device.
1F32 ¹	3	Count of Number of Transactions	N	Cumulative count of transactions for the current limited-use key (LUK).
1F33 ¹	7	Cumulative transaction Amount	N	Cumulative total of transaction amounts in USD for the current limited-use key (LUK).
1F35	2	Total Number of Tokens for Token Inquiry Criteria	N, BCD	Total token count based on the token inquiry criteria.

Table 108: Dataset ID 68, Token Data

Tag	Length	Value	Format	Content of Sub-Element
1F37	128	Issuer Custom Data for File Control Information (FCI) Template	AN	Custom personalization data from the issuer up to 128 bytes; data is transmitted in Tag 6F-FCI Template, Subtag BF0C-FCI Issuer Discretionary Data. Data can be a primitive data object or a constructed data object that contains one or more TLV data objects. The FCI issuer Discretionary Data is not a part of the minimum chip data and is not sent to the issuer in the authorization message. The custom personalization data is transmitted in the FCI Template, Tag 6F, under Subtag BF0C - FCI Issuer Discretionary Data, during the SELECT AID response. The custom personalization data is used at the merchant terminal and dropped. Visa does not validate custom personalization data from the issuer. For more information about the format of the FCI template, refer to the Visa Cloud-Based Payments Contactless Specification or contact your regional client support representative.

Table 108: Dataset ID 68, Token Data

Tag	Length	Value	Format	Content of Sub-Element
1F38	15	Issuer Custom Data for Issuer Application Data (IAD)	AN	Custom personalization data from the issuer and must be 15 bytes long. The first byte of this field must be hexadecimal 00 . If content is less than 15 bytes, the remaining bytes of this field should be padded with hexadecimal 00. The custom personalization data is transmitted in the Issuer Discretionary Data (IDD) portion of Issuer Application Data (IAD), in Tag 9F10-Issuer Application Data during the get processing options (GPO) response from the terminal. Custom personalization data is sent to issuers in the authorization message in Tag 9F10 in Field 55, Usage 1-VSDC Chip Data. Visa does not validate the 14 bytes of issuer custom personalization data except to validate that the field does not contain any spaces or all zeros.
1F7F	2	PAN Expiration Date	N, BCD	V.I.P. includes this tag in responses to participating acquirers if the transaction MVV and MCC combination is present in the V.I.P. transit merchant list table. Format = yymm

¹ Domestic transactions contain the accumulated count and amount for domestic transactions. International transactions contain the accumulated count and amount for international transactions. These amounts are in USD.

Field 123, Usage 2—Dataset ID 69

Table 109: Dataset ID 69, Account Lookup Results

Tag	Length	Value	Format	Contents
01	1	Card Type Code	AN	C (Credit) D (Debit) P (Prepaid) N (Unknown)
02	3	Billing Currency Code	AN	Issuer's billing currency code.

Table 109: Dataset ID 69, Account Lookup Results

Tag	Length	Value	Format	Contents
03	1	Billing Currency Code Minor Units	AN	Minor units of the card billing currency.
04	8	Issuer BID	AN	Recipient issuer business ID.
05	3	Card Issuer Country Code	AN	Issuer ISO country code.
06	1	Fast Funds Indicator	AN	B (Recipient issuer participates in fast funds for all transactions) C (Reserved for future use) D (Recipient issuer participates in fast funds for domestic transactions only) N (Recipient issuer does not participate in fast funds)
07	1	Blocked for all OCTs	AN	Y (Issuer is blocked for receiving funds) N (Issuer is not blocked for receiving funds)
08	1	Online Gambling Block Indicator	AN	Y (Issuer is blocked for receiving gambling payouts) N (Issuer is not blocked for receiving gambling payouts)
09	1	Geographic Restriction Indicator	AN	Y (Issuer is blocked for receiving cross-border OCTs) N (Issuer is not blocked for receiving cross-border OCTs)
0A	3	Destination Currency Code	AN	Recipient issuer currency code.
0B	1	Destination Currency Code Minor Units	AN	Recipient issuer currency code minor units.
0C	3	Issuing Institution Country Code	AN	Recipient issuer 3-digit country code.

This usage applies to these messages:

- 0100/0110/0120/0130 authorization request, preauthorization request, STIP advice and responses.
- 0100/0110 acquirer token activation request and response.
- 0200/0210/0220/0230 full-financial request, acquirer advice, STIP advice, clearing advice, and responses.
- 0220/0230 adjustment advice, STIP advice, and responses.

- 0282 dispute response financial status advice.
- 0302/0312 token maintenance request and response.
- 0400/0410/0420/0430 reversal, partial reversal, reversal advice, and responses.
- 0400/0410/0420/0430 financial reversal, acquirer advice, issuer STIP advice, issuer switch advice, and responses.
- 0422/0432 dispute financial and response
- 0422/0432/0480/0490 dispute financial reversal, dispute financial reversal status advice, and responses.
- 0620 issuer token notification advice.
- 9620 fraud notification request

Visa Token Service: Authorizations and full-financial messages using iCVV convert service, early chip data or full chip data must include tags from Field 123, Usage 2, Dataset ID 68-Token Data.

This field must be used when submitting address verification data or token data.

Visa Token Convert Service: Field 123, Usage 2, Dataset ID 68-Token Data with Tags 01, 02, and 03 are required for application-based E-Commerce and NFC Visa Contactless messages using the Visa Token Convert Service.

Field 123, Usage 2—Dataset ID 70

This dataset contains results of the customer data verification if customer verification data is sent in the account verification request message.

Table 110: Dataset ID 70, Customer ID Data Verification Result

Tag	Length	Value	Format	Contents
01	1	National Identification Verification Result	AN	Contains a value when a national identification is sent in account verification request messages. 1 = Verified 2 = Failed 3 = Not performed 4 = Issuer does not support verification
02	1	Passport Number Verification Result	AN	Contains a value when a passport number is sent in account verification request messages. 1 = Verified 2 = Failed 3 = Not performed 4 = Issuer does not support verification

Table 110: Dataset ID 70, Customer ID Data Verification Result

Tag	Length	Value	Format	Contents
03	1	Driver License Verification Result	AN	Contains a value when a driver license is sent in account verification request messages. 1 = Verified 2 = Failed 3 = Not performed 4 = Issuer does not support verification
04	1	Tax Identification Verification Result	AN	Contains a value when a tax identification is sent in account verification request messages. 1 = Verified 2 = Failed 3 = Not performed 4 = Issuer does not support verification

Usage of Customer Verification Data varies by region. For details, contact your Visa representative.

Field 123, Usage 2—Field Edits

TLV Format: The field must be correctly formatted; otherwise, V.I.P. rejects it.

Nonoriginals and Exceptions: If address verification data is present in nonoriginals or exception items, V.I.P. rejects the message with reject code **0699**.

Field 123, Usage 2—Reject Codes

0137 = Invalid AVS data length

0498 = Token missing in issuer response

0499 = Token invalid in issuer response

0699 = Presence of PIN/Track/AVS data inconsistent with message type

Field 125 – Supporting Information

Field 125 – Attributes

variable length

1 byte, binary +

255 bytes, variable by usage and subfield; maximum: 256 bytes

Field 125 – Description

Field 125 is a private-use field with the usages listed below.

- Usage 1 – Reserved for supporting information in fixed format.
- Usage 2 – Supporting Information (TLV Format). Applies to authorization and full financial messages.
- Usage 3 – This usage is no longer supported.
- Usage 4 – VCRFS, Optional Text. Applies to full financial messages.
- Usage 5 – Additional Fraud Information (in 9620 fraud advices). Applies to full financial messages.

The length subfield specifies the number of bytes in this field after the length subfield.

Field 125 – Usage

See usages V.I.P. System technical specifications.

Field 125 – Field Edits

Field edits vary by usage.

Field 125 – Reject Codes

See specific usage for other field reject codes.

0145 = Invalid field 125 (This applies to all usages).

Field 125, Usage 2 – Supporting Information (TLV Format)

Field 125, Usage 2 – Attributes

variable length

1 byte, binary +

255 binary and ANS, EBCDIC; maximum: 256 bytes

Field 125, Usage 2 – Description

This field allows for multiple datasets in TLV format. Each dataset can have multiple TLV subfields. The TLV format is shown below.

Positions: 1		2–3	4–255
Subfield 1: length	Subfield 2: dataset ID	Subfield 3: dataset length	Subfield 4: TLV elements
Byte 1	Byte 2	Bytes 3–4	Bytes 5–256

Length Subfield: This one-byte binary subfield contains the number of bytes following the length subfield. The maximum value is **255**.

Position 1, Dataset ID: This one-byte binary subfield contains a hexadecimal value that identifies the TLV data in the Usage section.

Positions 2–3, Dataset Length: This 2-byte binary subfield specifies the total length of the TLV fields present in the dataset. The length is variable, depending on the data that follows.

Positions 4–255, TLV Elements: Each subfield of a dataset has a defined tag, length, and value. The tag is used in conjunction with the dataset ID value. The dataset subfields can be present in any order with other TLV subfields.

Field 125, Usage 2 – Usage

These subsections (in hex number order) describe the usages for this field.

Endpoints that support this field in TLV format must be able to receive dataset IDs and tags defined for this field in any order, including those they do not recognize or expect. Endpoints must ignore dataset IDs or tags they do not recognize and continue to process the field.

Field 125, Usage 2 – Dataset ID 01

Table 111: Dataset ID 01, Token Device

Tag	Length	Value	Format	Content of Sub-Element
01	2	Device Type	AN	00 = Unknown 01 = Mobile phone 02 = Tablet 03 = Watch 04 = Mobile phone or tablet 05 = Personal computer 06 = Household device 07 = Wearable device 08 = Automobile device
02	3	Device Language Code	AN	This tag contains a three-character language code that conforms with ISO 639 standards. An example would be eng (English).
03	48	Device ID	ANS	Contains Device ID
04	15	Device Number	N	This tag contains the full phone number or partial phone number when available.
05	16	Device Name	ANS	Contains Device Name
06	25	Device Location	ANS	This tag contains the obfuscated geographic location of the device or the coarse location of the device. Location is latitude/longitude with 4 digits of precision; for instance +37.7799/-122.4290. Precision is rounded off to a less granular level; for instance +37/-122 or +37.78/-122.43.
07	15	IP Address	ANS	This tag contains the IP address of the device at the time of the provisioning request. The value is in the format: 255.255.255.255. Each octet (255) may be 1–3 digits in length.

It is used in these message types:

- 0100/0110/0120/0130 token activation requests/responses and token STIP advices/responses.
- 0302/0312 token maintenance file request
- 0620/0630 token notification advice

Field 125, Usage 2 – Dataset ID 02

Table 112: Dataset ID 02, Wallet Provider

Tag	Length	Value	Format	Content of Sub-Element
03	1	Wallet Provider Risk Assessment	ANS	This tag contains one of these values to support SE transactions: 0 = Unconditionally approved. 1 = Conditionally approved with further verification. 2 = Not approved.
04	10	Wallet Provider Risk Assessment Version	ANS	This tag contains the Wallet Provider Risk Assessment version to support SE transactions.
05	2	Wallet Provider Device Score	N	This tag contains the value of 1–5 , with 5 being the most trusted.
06	2	Wallet Provider Account Score	N	This tag contains the value of 1–5 , with 5 being the most trusted.

Table 112: Dataset ID 02, Wallet Provider

Tag	Length	Value	Format	Content of Sub-Element
07	30	Wallet Provider Reason Codes	ANS	This tag contains 1 to 23 reason codes. 01 = Cardholders' wallet account is too new relative to launch. 02 = Cardholders' wallet account is too new relative to provisioning request. 03 = Cardholders' wallet account/card pair is newer than date threshold. 04 = Changes made to account data within the date threshold. 05 = Suspicious transactions linked to this account. 06 = Account has not had activity in the last year. 07 = Suspended cards in the secure element. 08 = Device was put in lost mode in the last 7 days for longer than the duration threshold. 09 = The number of provisioning attempts on this device in 24 hours exceeds threshold. 0A = There have been more than the threshold number of different cards attempted at provisioning to this phone in 24 hours. 0B = The card provisioning request contains a distinct name in excess of the permitted threshold. 0C = The device score is less than 3. 0D = The account score is less than 4. 0E = Device provisioning location outside of the cardholder's wallet account home country. 0G = Suspect fraud. 0H = Phone score is less than 3. A0 = Cardholder PAN associated to account within threshold days. A1 = Wallet account holder name on file does not match cardholder entered name. A2 = User's account on device is less than threshold days. A3 = User account was created within threshold days.

Table 112: Dataset ID 02, Wallet Provider

Tag	Length	Value	Format	Content of Sub-Element
				A4 = Wallet account created within threshold days. A5 = Changes made to account data within threshold days. A6 = The number of provisioning attempts across all cards on this device in the last 24 hours exceeds the threshold. A7 = The wallet account into which the card is being provisioned contains distinct names greater than threshold. A8 = Device provisioning location outside of cardholder's wallet account home country. A9 = Suspended cards in the wallet account is greater than threshold. AA = This account has not had activity within threshold period. AB = Number of days since device was last reported lost is less than threshold days. AC = Number of transactions in last 12 months less than threshold number. AD = Number of active tokens greater than threshold. AE = Number of devices with same User ID with token is greater than threshold. AF = Number of active tokens on all devices is greater than threshold. AG = Issuer preferred to defer ID&V decision to token creation time. AH = Issuer encrypted payment instrument data has expired. AI = User/device that was intended to receive the encrypted payment instrument data is different than the one that is provisioning the token. AL = Sending and receiving devices are different. If a passcode was included in issuer's encrypted payment instrument data, then it matched the user provided value.

Table 112: Dataset ID 02, Wallet Provider

Tag	Length	Value	Format	Content of Sub-Element
				AM = Pushing to a different user than the cardholder. If a passcode was included in issuer's encrypted payment instrument data, then it matched the user provided value. AN = Sending and receiving devices are the same but without any upfront authentication or passcode verification. AO = Sending and receiving devices are the same, but with successful upfront authentication or passcode verification.
08	2	PAN Source	N	01 = Key-entered. 02 = On file. 03 = Mobile banking app. 04 = Token. 05 = Chip dip 06 = Contactless tap
09	32	Wallet Account ID	ANS	This tag contains the Wallet Account ID.
0A	32	Wallet Account E-mail Address	Hexadecimal	This tag contains the Wallet Account E-mail Address. This tag contains the SHA256 hashed value of wallet account email address. The email address is converted to uppercase before hashing.
80	2	Overall Assessment	AN	This tag contains a value of 00-ZZ .

It is used in these message types:

- 0100/0110/0120/0130 token activation requests/responses and token STIP advices/responses.
- 0200/0220 full financial request and STIP Advice
- 0302/0312 token maintenance file request
- 0620/0630 token notification advice

Field 125, Usage 2 – Dataset ID 03

For Card Absent Transactions only.

Table 113: Dataset ID 03, Additional Original Data Elements

Tag	Length	Value	Format	Content of Sub-Element
03	8	Original Transaction Identifier	15 N, BCD	Original transaction identifier, right-justified, same format as Field 62.2 – Transaction Identifier (Bitmap Format).
80	7	Original Transaction Date Time	N, BCD	V.I.P. System time of original transaction in <i>CCYYMMddhhmmss</i> format expressed in GMT, where: • CC = Century (01–99) • YY = Year (00–99) • MM = Month (01–12) • dd = Day (01–31) • hh = Hour (00–23) • mm = Minute (00–59) • ss = Second (00–59)
81	26	Original Purchase Identifier	AN	Original purchase identifier value from either of these values - • Purchase identifier value • Payment plan reference number value • Zeros
82	1	Original POS Environment	AN	Original POS environment value from existing Field 60.8, Field 63.6, position 4, or Field 126.13 with either of these available values (if available) - • C = Credential-on-File (for initial storage), or unscheduled Card-on-File (for subsequent merchant-initiated transactions) • I = Indicates that the message is for an installment payment • R = Indicates that the cardholder and merchant have agreed to periodic billing for goods and services, such as utility bills and magazines
83	1	Original POS Entry Mode	N, 4-bit BCD; 1 byte	Original POS entry mode value from existing Field 22 – Point-of-Service Entry Mode Code, Positions 1-2, PAN, and Date Entry Mode of the authorization message.
84	1	Original POS Condition Code	N, 4-bit BCD; 1 byte	Original POS condition code value from the existing Field 25 – Point-of-Service Condition Code of the authorization message.

Table 113: Dataset ID 03, Additional Original Data Elements

Tag	Length	Value	Format	Content of Sub-Element
85	2	Original Response Code	AN	Original response code from the existing Field 39 – Response Code of the authorization message.
86	1	Original Additional Authorization Indicators	N, 4-bit BCD; 1 byte	Original additional authorization indicator from existing Field 60.10 – Additional Authorization Indicators with either of these values, if available: • 2 (Estimated amount) • 3 (Estimated amount and terminal accepts partial authorization responses)
87	1	Original Delegated Authentication Indicator	AN	Original delegated authentication indicator value from the existing TLV Field 34, Dataset ID 4A, Tag 8A – Delegated Authentication Indicator of the authorization message, if available.
88	1	Original CAVV Results Code	ANS	Original cardholder authentication verification value (CAVV) results code value from the existing Field 44.13 – CAVV Results Code of the authorization message, if available.
89	1	Original CVV2/dCVV2 Results Code	ANS	Original CVV2 or dynamic CVV2 (dCVV2) results code value from the existing Field 44.10 – CVV2 Result Code of the authorization message, if available.
8A	1	Original AVS Results Code	AN	Original address verification result code value from existing Field 44.2 – Address Verification Result Code of the authorization message, if available.
8B	1	Original Card Authentication Results Code	ANS	Original card authentication results code from the existing Field 44.8—Card Authentication Results Code of the authorization message, if available.
8C	1	Original CVV/dCVV Results Code	ANS	Original CVV, integrated chip card (iCVV), or dynamic CVV (dCVV) results code value from the existing Field 44.5 of the authorization message, if available.
8D	1	Original Token Verification Result	ANS	Original token verification result value from existing Field 123, Usage 2, Dataset ID 67, Tag 08 – Token Verification Result Code of the authorization message, if available.

Table 113: Dataset ID 03, Additional Original Data Elements

Tag	Length	Value	Format	Content of Sub-Element
8E	1	Original Cardholder ID Method	N, 4-bit BCD; 1 byte	One-digit code containing the original cardholder identification method from existing Field 60.9 – Cardholder ID Method Indicator of the authorization message, if available.
8F	1	Original CDCVM	Binary	Cardholder verification results located in the issuer application data of the authorization message, if available.
90	2	Total Number of Original Transaction Details	N, BCD	Total number of sets of the original transaction details, if available.

MIT:

Acquirers may optionally submit the original transaction identifier in dataset 03, tag 03 of this field. If the issuer can receive field 125, V.I.P. forwards the field.

It is used in these message types:

- 0100 authorization
- 0120 advice
- 0200 full-financial
- 0220 advice

U.S. CPS incremental authorization request messages may be sent without Field 62.2 – Transaction Identifier (Bitmap Format) or Field 125 Usage 2 – Supporting Information (TLV Format).

Account Verification: Acquirers participating in the Visa Network Merchant Initiated Transaction service can optionally supply the transaction ID service instruction in Field 125, Usage 2, DSID 03, Tag 03 for network based MIT service. The service instruction is supplied in either Field 125 Usage 2, DSID 03, Tag 03 or in Field 62.2 – Transaction Identifier. V.I.P. drops the service instruction before forwarding the request to the issuer.

Field 125, Usage 2 – Dataset ID 67

Table 114: Dataset ID 67, MagnePrint Data

Tag	Length	Value	Format	Content of Sub-Element
D0	54	MagnePrint Data	ANS	MagnePrint data is currently defined as 54 bytes of binary data.

This usage applies to card-present transactions that include the MagnePrint data with the magnetic stripe to prevent skimming.

This usage applies to card-present 0100 authorization requests only and is sent by participating acquirers only to participating issuers. It is optional in 0400/0420 reversal requests for card-present authorizations. If present in reversal requests, it is forwarded to the participating issuer; otherwise, it is dropped at the VIC.

Field 125, Usage 2 – Dataset ID 69

Table 115: Dataset ID 69, Additional Multicurrency, and Settlement Information

Tag	Length	Value	Format	Content of Sub-Element
80	8	Internal Transfer Pricing	8 N, 4-bit BCD, 4 bytes	Optional internal transfer-pricing percentage rate used to calculate the Flexible Commission Service transfer pricing. The leftmost digit (position 1) denotes the number of positions the decimal separator is moved from the right (position 1 contains values 0–9). Positions 2–8 are the rate. Example: 69985022 is equivalent to a 9.985022 rate.
81	5	Number of Settlement Positions	N	Number of settlement results for the entity, right-justified and zero-filled.

Field 125, Usage 2 – Dataset ID 70

Table 116: Dataset ID 70, ATM Mini Statement Dataset 2

Tag	Length	Value	Format	Content of Sub-Elements
01	36	Transaction Statement 1	AN	Positions 1–8 = transaction date in yyyyymmdd format. Positions 9–23 = 15 character alphanumeric transaction description; left-justified with trailing spaces. Position 24 = C (Credit) or D (Debit) Positions 25–36 = 12 character amount; right-justified with leading zeros. Implied decimal relative to cardholder billing currency.
02	36	Transaction Statement 2	AN	Positions 1–8 = transaction date in yyyyymmdd format. Positions 9–23 = 15 character alphanumeric transaction description; left-justified with trailing spaces. Position 24 = C (Credit) or D (Debit) Positions 25–36 = 12 character amount; right-justified with leading zeros. Implied decimal relative to cardholder billing currency.

Table 116: Dataset ID 70, ATM Mini Statement Dataset 2

Tag	Length	Value	Format	Content of Sub-Elements
03	36	Transaction Statement 3	AN	Positions 1–8 = transaction date in yyyyymmdd format. Positions 9–23 = 15 character alphanumeric transaction description; left-justified with trailing spaces. Position 24 = C (Credit) or D (Debit) Positions 25–36 = 12 character amount; right-justified with leading zeros. Implied decimal relative to cardholder billing currency.
04	36	Transaction Statement 4	AN	Positions 1–8 = transaction date in yyyyymmdd format. Positions 9–23 = 15 character alphanumeric transaction description; left-justified with trailing spaces. Position 24 = C (Credit) or D (Debit) Positions 25–36 = 12 character amount; right-justified with leading zeros. Implied decimal relative to cardholder billing currency.
05	36	Transaction Statement 5	AN	Positions 1–8 = transaction date in yyyyymmdd format. Positions 9–23 = 15 character alphanumeric transaction description; left-justified with trailing spaces. Position 24 = C (Credit) or D (Debit) Positions 25–36 = 12 character amount; right-justified with leading zeros. Implied decimal relative to cardholder billing currency.

This dataset is supported in the following messages:

- 0100/0110 Mini statement request and response
- 0200/0210 Mini statement request and response

ATM mini statements are supported on network **0004**.

ATM mini statements are supported in the following transaction jurisdictions:

- Domestic
- Regional
- Interregional

Mini statement transactions can originate from authorization-only and full service acquirers. V.I.P. converts 0100 Mini statement requests to 0200 Mini statement request before it forwards the message to the issuer.

Visa strongly recommends that issuers send their recent transactions in chronological order in the 0110 or 0210 Mini statement response messages, including the five most recent transactions in Field 104, Usage 2, Dataset ID 70 followed by subsequent transactions in Field 125, Usage 2, Dataset ID 70. V.I.P. drops invalid tags.

A mini statement does not have financial impact and cannot be reversed.

If the issuer does not support mini statement, V.I.P. declines the transaction with the response code **57** (Transaction not permitted to cardholder) in Field 39.

For ATM mini statement transactions that fail CVV or iCVV validation, V.I.P. declines with response code 05 (Do not honor) in Field 39.

Stand-in processing (STIP) does not process a mini statement on behalf of an unavailable issuer, but does check the account against the Account Screen Authorization File (ASAF) to determine if a decline or pick-up response code is on file.

- If the account is not on file, STIP assigns response code **91** (V.I.P. sends this when destination unavailable or transaction times out when no STIP).
- If the account is listed with a specific response code, STIP assigns that code to the transaction, and no advice is sent to the issuer.

Field 125, Usage 2 – Dataset ID 6B

Field 125, Usage 2 – Field Edits

The field length of the MagnePrint data must be **54** bytes.

Field 125, Usage 2 – Reject Codes

0116 = Invalid value

0145 = Invalid field 125 (This applies to all usages)

0483 = Field missing

0715 = Incorrect data length

0716 = Length error (TLV format)

0600 = Consistency error

Field 125, Usage 5 – Additional Fraud Information

Field 125, Usage 5 – Attributes

variable length

1 byte, binary +

255 ANS, EBCDIC; maximum: 256 bytes

Field 125, Usage 5 – Description

Field 125, Usage 5 is a Visa-defined private-use Fraud Reporting Service field for FRS messages generated by Visa.

	Positions: 1-2	3-12	13-37	38-52	53	54-74
length	field identifier (application ID)	cardholder postal code	cardholder last name	cardholder first name	cardholder middle initial	cardholder address 1
	75-97	98-111	112-113	114-123	124-132	133-141
	cardholder address 2	cardholder city	cardholder state	cardholder telephone number	cardholder social security number	card mailed from postal code
	142-145	146-151	152-179	180-181	182	183-193
	card valid from	card mailing date	card mailing city	card mailing state	market segment code	locator number
	194-200	201	202	203-206	207-208	209
	case number	arrest code	issuer-generated authorization	account sequence number	fraud investigative status	cashback indicator
	210	211-218	219	220-255		
	card capability	travel agency ID	cardholder ID method used	not used		

Length Subfield: This value is the number of bytes in this field after the length subfield.

Positions 1-2, Field Identifier (Application ID): The field must contain **06** for all fraud transactions (including ICS and NRI/PS604).

Position 3-12, Cardholder Postal Code: The field must contain all **9s** if the cardholder address is outside the U.S. or the card was mailed from outside the U.S.

NRI/PS604 only: The field is required. Clients can report a 5 or 9-character Postal/ZIP Code (left-justified, space-filled).

Positions 13-37, Cardholder Last Name:

ICS only: If present, the field must contain the full cardholder name. Left-justified and space-filled. The default is spaces.

NRI/PS604 only: The field is required. Left-justified and space-filled.

Positions 38-52, Cardholder First Name:

ICS only: If present, the field must be left-justified and space-filled. The default is spaces.

NRI/PS604 only: The field is required. Left-justified and space-filled.

Position 53, Cardholder Middle Initial: The default is a space.

Positions 54-74, Cardholder Address 1: The field must be left-justified and space-filled. Must contain the primary address, number, direction, street name, street suffix, or P.O. Box.

ICS and NRI/PS604: The field is required.

Positions 75-97, Cardholder Address 2: The field must be left-justified and space-filled. If present, the field is used to complete or support data contained in the Cardholder Address 1, such as apartment, floor, suite, or unit number. The default is spaces.

Positions 98-111, Cardholder City: The field must be left-justified and space-filled.

ICS and NRI/PS604: The field is required.

Positions 112-113, Cardholder State: Enter **XX** if mailed from outside the U.S.

ICS and NRI/PS604: The field is required.

Positions 114-123, Cardholder Telephone Number:

NRI/PS604 only: The field is optional. The default is spaces.

ICS only: The field must contain a telephone number. Can be zeros or **10** digits (with area code).

Positions 124-132, Cardholder Social Security Number:

Usage 5, ICS only: If present, the field must contain a numeric value. The default is spaces.

Positions 133-141, Card Mailed From Postal Code: The field can contain **5** or **9** digits (left-justified, space-filled).

ICS only: The field is required if Fraud Type = **2**.

NRI/PS604 only: The field is required.

Positions 142-145, Card Valid From: If present, the field must be in MMY format where:

MM = **01** through **12**

YY = **00** through **99**

The default is spaces.

Positions 146-151, Card Mailing Date:

NRI/PS604 only: The field is required. Must contain all **zeros** or date in *MMDDYY* format where:

MM = **01** through **12**

DD = **01** through **31**

YY = **00** through **99**

Positions 152-179, Card Mailing City:

NRI/PS604 only: The field is required. The field must contain city name when Card Mailing ZIP or Card Mailing State is provided. Otherwise, the field must be space-filled.

Position 180-181, Card Mailing State:

NRI/PS604 only: The field is required. The field must contain a state code if Card Mailing ZIP or Card Mailing City is provided. Otherwise, the field must be space-filled.

Positions 182, Market Segment Code:

Usage 5, ICS only: The field is required. Client-defined. Can be **A** through **Z**. The default is a **0** (zero).

Positions 183-193, Locator Number:

Usage 5, ICS only: The field is required. Issuer-assigned. Must be unique for issuing identifier and transaction. Can be **11** digits and cannot be zeros.

Positions 194-200, Case Number:

Usage 5, ICS only: The field must contain the case number, if available. The default is spaces.

Position 201, Arrest Code:

Usage 5, ICS only: Values:

0 = No arrest

1 = Arrest

The default is a **space**.

Position 202, Issuer-Generated Authorization: The field must be space-filled or contain:

Y = Issuer-authorized transaction

X = Transaction authorized, but not by issuer

N = Transaction not authorized

Positions 203-206, Account Sequence Number: This field is required. Must be numeric and must not be zeros.

This number identifies a transaction within the account. It must be provided if the Notification Code is **3**, **4**, or **5**. If the Notification Code is **1** or **2**, use **9999**; this results in Visa assigning the sequence number. The client can also preassign a sequence number within the 4000-4999 range. A maximum of 1,000 transactions on an account can be added to the Visa fraud master file. In a change, delete, or reactivate record, the Account Sequence Number from the original Fraud Advice must be provided.

ICS and NRI/PS604 only: The field must be zeros.

Positions 207-208, Fraud Investigative Status: Entry can be **spaces** or client-assigned. Can be **00** through **99** or **AA** through **ZZ**.

Position 209, Cashback Indicator: Values:

Y = Cashback

N = No cashback

The field must be set to **Y** when an amount is entered in field 61.1. Otherwise, the field must be set to **N**.

Position 210, Card Capability: If present, entries are:

- For a card with a magnetic stripe:

M = Magnetic stripe with no CVV

V = Magnetic stripe with CVV

- For a chip or stored value card:

C = Chip card

The default is a space.

Positions 211-218, Travel Agency ID: If present, the field must match the entry from field 48 in the original transaction.

Position 219, Cardholder ID Method Used: This field is required. If entered, the field must match the value in the original transaction. If the field was not present in the original transaction, the field must be populated with **0**.

Values:

0 = Unknown

1 = Signature

2 = PIN

3 = Unattended terminal, no PIN pad

4 = Mail/phone order

Positions 220-255: Not used.

Field 125, Usage 5 – Usage

Fraud Reporting: The following list contains fraud reporting requirements.

- Client-generated-This field is mandatory in issuer-generated 9620 fraud messages.
- VisaNet-generated-In Visa-generated 9620 messages, this field contains the data from the original fraud transaction. It is not used in 9630 responses.

Field 125, Usage 5 – Field Edits

There are no field edits for field 125, usage 5.

Field 125, Usage 5 – Reject Codes

0145 = Invalid field 125 (This applies to all usages)

0451 = Missing additional supporting information

Field 126 – Visa Private-Use Fields

Field 126 – Attributes

1 byte, binary +
variable by subfield
minimum: 10 bytes
maximum: 255 bytes

Field 126 – Description

Field 126 is a bitmapped, private-use field for services such as Visa Secure Electronic Commerce (VSEC).

Field 126 subfields are listed in this table.

Table 117: Field 126 Visa Private-Use Subfields

Description	Bytes	Number Pos.	Format
Length Subfield	1	Not applicable	Binary
126.0 Field 126 Bitmap	8	64	Bit String
126.1 through 126.11 Reserved, or not applicable to ATM	Not applicable	Not applicable	Not applicable
126.12 Service Indicators	3	24	N
126.13 through 126.16 Reserved, or not applicable to ATM	Not applicable	Not applicable	Not applicable
126.19 Dynamic Currency Conversion Indicator	1	Not applicable	Alphanumeric/ Special characters EBCDIC

The services that use field 126 are mutually exclusive. Therefore, all possible field 126 subfields will never and can never be present in the same message.

Field 126 – Usage

For ATM, the bitmap in Field 126.0-Field 126 Bitmap is used with a service indicator in field 126.12 to indicate a remote or branch ATM request. See Service Indicators description.

Field 126.19 is used to indicate when dynamic currency conversion is performed at an ATM. See Dynamic Currency Conversion Indicator description.

EMV[®] is a registered trademark in the U.S. and other countries and an unregistered trademark elsewhere. The EMV trademark is owned by EMVCo.

Field 126 – Field Edits

See field 126.xx descriptions.

Field 126 – Reject Codes

See field 126.xx descriptions.

Field 126.0 – Field 126 Bitmap

Field 126.0 – Attributes

64 N, bit string, 8 bytes

Field 126.0 – Description

Field 126.0 is a bitmap specifying which field 126 subfields are present.

Table 118: Field 126.0 Bitmap

Bitmap		Byte 1								Byte 2							
		1	2	3	4	5	6	7	8	1	2	3	4	5	6	7	8
126.1-126.11	Unused, reserved, or not applicable to ATM	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓					
126.12	Service Indicators												✓				
126.13	Unused, reserved, or not applicable to ATM													✓			
126.14	Unused, reserved, or not applicable to ATM														✓		
126.15	Unused, reserved, or not applicable to ATM															✓	
126.16	Unused, reserved, or not applicable to ATM																✓

Bitmap		Byte 3								Bytes 4-8 (n/a)
		1	2	3	4	5	6	7	8	
126.17	Unused (must not be specified)	✓								
126.18	Unused (must not be specified)		✓							
126.19	Dynamic Currency Conversion Indicator			✓						
126.20-126.64	Unused (must not be specified)				✓	✓	✓	✓	✓	

Field 126.0 – Usage

This field must be present if any subfields are present.

Field 126.0 – Field Edits

This field must be present if any subfields are present. The bit switches for subfields marked as “unused” must not be present.

Field 126.0 – Reject Codes

The reject codes for field 126.0 are:

0180 = Invalid length for field 126

Field 126.12 – Service Indicators

Field 126.12 – Attributes

fixed length

24 N, Bit string, 3 bytes

Field 126.12 – Description

Field 126.12 is a Visa private-use field that, for ATM users in the UK or U.S., contains a bit indicating that the transaction occurred at a remote terminal.

Clients must have successfully completed testing to send and receive this field in its entirety whether or not they participate in its service applications.

Positions: 1 2		3	4–24	5–24
n/a	n/a	n/a	Remote Terminal Indicator	n/a
Bit 1	Bit 2	Bit 3	Bit 4	

Positions 1–3: These positions do not apply to ATM. Each of these positions must be set to zero.

Position 4, Remote Terminal Indicator: This code indicates that a UK-domestic or U.S.-acquired cash disbursement transaction occurred at a remote terminal (for example, an ATM machine that is not in a branch location). Position 4 is for all U.S. ATM originals. For network 4, this also includes deposits. UK and U.S. acquirers and issuers must support this capability.
Values:

0 = Not provided

1 = Remote Terminal Indicator

Position 5–24, not applicable: These positions are set to all **zeros**.

Field 126.12 – Usage

Field 126.12 can be present in the following transactions. It is not returned in responses.

- 0200 full-financial messages
- 0220 adjustments

- 0220 deferred clearing advices
- 0420 reversals
- 0422 dispute financial and dispute financial reversal
- 0480 dispute financial status advice
- 0220 dispute response financials
- 0480 dispute response financial status advice

This is a retain and return field. Issuers must retain this field from the original transaction for subsequent use in dispute financial. Acquirers must retain this field in dispute financials for subsequent use in dispute response financial.

Issuers must have successfully completed testing to receive this subfield regardless of usage. Issuers must be able to receive and process this field. If subfield 126.12 contains all **zeros**, V.I.P. drops it before forwarding the request.

STIP and Switch Advices: This field is present if it was in the request.

Advices from BASE II Endpoints: This field is present if it was present in the original.

Field 126.12 – Field Edits

None.

Field 126.12 – Reject Codes

None.

Field 126.19 – Dynamic Currency Conversion Indicator

Field 126.19 – Attributes

Fixed length

1 ANS, EBCDIC, 1 byte

Field 126.19 – Description

Dynamic Currency Conversion (DCC) is an optional non-Visa service offered by merchants at the point-of-sale and by ATM acquirers at their ATM terminals. The service involves offering the cardholder the option to pay for goods or services and withdraw cash in their own billing currency or in the merchant's own local currency. DCC occurs when a merchant or ATM acquirer performs currency conversion locally and submits the transaction in the cardholder's billing currency.

To allow accurate reporting and monitoring of DCC globally, this field contains a unique identifier to indicate that DCC was performed by the merchant at the point-of-sale and the ATM acquirer at the ATM terminal.

Field 126.19 – Usage

If the merchant or ATM acquirer performs currency conversion at the point of sale or ATM terminal, acquirers must send a **1** in field 126.19 of authorization, full financial, reversal, and reversal advice messages. This field is optional for exception transactions and adjustments. V.I.P. includes the field in status advices.

This field is used in:

- Authorization and full financial requests
- Dispute response financial requests and their responses
- Dispute response financial reversals, adjustment advices, and responses
- Reversal and partial reversal advice responses
- Financial reversal advice responses
- Dispute financial and responses
- Dispute financial reversal and responses

Acquirers that support Dynamic Currency Conversion (DCC) must also participate in the Multicurrency Service when submitting authorizations in the cardholders' currency.

Field 126.19 – Field Edits

None.

Field 126.19 – Reject Codes

None.

Field 127 – File Maintenance

Field 127 – Attributes

variable length

1 byte, binary +

255 bytes, variable by subfield; maximum: 256 bytes

Field 127 – Description

This section describes the requirements for this multipart, private-use field, as used to update or review the Account Screen Authorization File (ASAF), PIN Verification File, and Risk-Level File in the VisaNet Cardholder Database.

Field 127 has multiple subfields defined to contain some of the data needed in an 0302 request (a 0302 request is required for each update and inquiry) to update one record in the file identified in Field 101—File Name. The remainder of the updating data is located in other fields of the 0302 message. The length specifies the number of bytes that follow the length subfield.

Field 127 – Usage

Field 127 is used in 0302 messages that request file updating. It is needed in all file add or change requests. It is needed in a file delete request only to delete a merchant central file record to identify the card type of the record being changed.

It is not used in 0302 file inquiry requests. It is present in the 0312 response to a file inquiry only when the response code is 00. If present in a 0302 file update request, this field is returned in the 0312 response.

The table displays the subfields for each file. Note that the field numbers, by which these subfields are known, are in the format:

127

+ an alpha identifier derived from the file name

+ a decimal point

+ the sequence number of the subfield

subfield file name

Example

The first subfield of field 127 for an ASAF Maintenance Request is labeled “Field 127E.1.”

Field 127 Layout of Applicable Files

Table 119: File Name CG—Cardholder Geographic Data

127C.1	127C.2
State/Province/Region code Identifier	State/Province/Region code

Table 120: File Name E2, E3, or E4—Account Screen Authorization File (ASAF)

127E.1	127E.2	127E.3	127E.4
Action code	Region coding	Cardholder Spending Amount Limit	Cardholder Spending Count Limit

Table 121: File Name P2—PIN Verification File

127P.1
Algorithm Identifier
PKVI
Verification Value

Table 122: File Name R2—Risk Level File

127R.1	127R.2	127R.3	127R.4	127R.5	127R.6	127R.7
Filler	Filler	Filler	Filler	Filler	Travel Activity Limits Available	Travel Activity Limits Unavailable

127R.8	127R.9	127R.10	127R.11	127R.12	127R.13	127R.14	127R.15
Lodging Activity Limits Available	Lodging Activity Limits Unavailable	Auto Rental Activity Limits Available	Auto Rental Activity Limits Unavailable	Restaurant Activity Limits Available	Restaurant Activity Limits Unavailable	Mail/ Telephone Activity Limits Available	Mail/ Telephone Activity Limits Unavailable

127R.16	127R.17	127R.18	127R.19	127R.20	127R.21	127R.22	127R.23
Risk Purchase Activity Limits Available	Risk Purchase Activity Limits Unavailable	Total Purchase Activity Limits Available	Total Purchase Activity Limits Unavailable	Total Cash Activity Limits Available	Total Cash Activity Limits Unavailable	ATM Cash Activity Limits Available	ATM Cash Activity Limits Unavailable

Auto-CDB (Visa Only): Subfields 127E.1 and 127E.2 are present in 0120 and 0322 advices.

Field 127 – Field Edits

Field 127 is required in an 0302 file update request if field 91 is **1**, **2**, or **4**. Length must not exceed **255**.

Field 127 – Reject Codes

0399 = Field missing

Field 127C.1 – State Province Region Code Identifier

Field 127C.1 – Applies to

Field 101—File Name = CG

Field 127C.1 – Attributes

fixed length

1 ANS, EBCDIC; 1bytes

Field 127C.1 – Description

Field 127C.1 contains a code indicating a geographic location.

Field 127C.1 – Usage

This field is used in 0302 update and inquiry messages to identify the data as a geographic location.

Field 127C.1 – Field Edits

This field is required in a 0302 update or inquiry request if field 101 is **CG** and field 91 is **1** or **4**. Field 127C.1 must contain an **S** or V.I.P. rejects the message with reject code **0713** (Invalid value).

Field 127C.1 – Reject Codes

0713 = Invalid value

Field 127C.1 – File Edits

None.

Field 127C.1 – File Maintenance Error Codes

None.

Field 127C.1 – Valid Values

Table 123: Field 127C.1 State Province Region Code Identifier

Code	Description
S	State code

Field 127C.2 – State Province Region Code

Field 127C.2 – Applies to

Field 101—File Name = CG

Field 127C.2 – Attributes

fixed length

2 ANS, EBCDIC; 2 bytes

Field 127C.2 – Description

Field 127C.2 contains a U.S. state code.

For a list of U.S. State Codes see *V.I.P. System Authorization Technical Specifications, Volume 1*.

Field 127C.2 – Usage

This field is used in 0302 update and inquiry messages and contains a U.S. state code.

Field 127C.2 – Field Edits

This field is required in an 0302 update or inquiry request if field 101 is **CG** and field 91 is **1** or **4**. Field 127C.2 must contain a U.S. state code or V.I.P. rejects the message with Reject Code **0816**—(State Code Missing or Invalid).

Field 127C.2 – Reject Codes

0816 = state code invalid or missing

Field 127C.2 – File Edits

None.

Field 127C.2 – File Maintenance Error Codes

None.

Field 127E.1 – Action Code

Field 127E.1 – Applies to

Account Screen Authorization File (ASAF) (Field 101—File Name = E2, E3, or E4)

Field 127E.1 – Attributes

fixed length

2 ANS, EBCDIC; 2 bytes

Field 127E.1 – Description

Field 127E.1 contains the issuer-designated action code to be used by STIP when authorizing on the issuer's behalf.

Field 127E.1 – Usage

This field is used in 0302 add and change requests for the Account Screen Authorization File (ASAF). The field is returned in 0312 responses to successful (field 39=**00**) and unsuccessful file updates. It is not used in delete requests or in file inquiry requests.

These points apply to user-defined spending limits in ASAF Maintenance Requests:

- When user-defined spending limits are specified in fields 127E.3 and 127E.4, this field can contain spaces or action code **11**. Code **11** does not require spending limits, but spending limits are required when this field contains spaces.
- User-defined spending limits can be specified only in updates with a field 101 value of **E3** or **E4** and an action code of **11** or spaces.
- Field 91 can be **1**, **2**, or **4**.
- Action codes **A1–A9** have pre-set spending limits, so fields 127E.3 or 127E.4 cannot be present. These action codes are for updates that have a field 101 value of **E2**, **E3**, or **E4**.

ASAF Maintenance Advices: This field is present in 0322 file maintenance advices but not in 0332 responses. When the advice is for Auto-CDB or ASAF Downgrade, the value in this field is from field 39 of the issuer response. If the account is listed in the ASAF with something other than **04**, **07**, **14**, **41**, **43**, or **46**, Auto-CDB changes the listing to **04**, **07**, **14**, **41**, **43**, or **46**. ASAF Downgrade updates the action code in ASAF to **05** from **04**, **07**, **14**, **41**, **43**, or **46**.

Field 127E.1 – Field Edits

There are no field edits for field 127E.1.

Field 127E.1 – Reject Codes

There are no reject codes for field 127E.1.

Field 127E.1 – Valid Values

Table 124: Field 127E.1 Account Screen Authorization File (ASAF) Action Codes

Code	Definition
04	Pick up card (no fraud)
05	Do not honor
07	Pick up card, special condition (fraud)
11	Approval for VIP and also approval within limits
14	Invalid account number (no such number)
41	Lost card, pick up (fraud)
43	Stolen card, pick up (fraud)
46	Closed account
54	Expired card
Space	Approval within limits

Codes **A1** through **A9** are V.I.P. codes associated with special high-value activity limits. These limits are used instead of the issuing identifier-level limits in the V.I.P. system files and do not update those limits. Amount limits are in U.S. dollars.

	One-Day Limits	
	Amount	Count
A1	USD\$1,500	3
A2	USD\$2,000	5
A3	USD\$3,000	8
A4	USD\$4,500	12
A5	USD\$6,000	15
A6	USD\$8,000	20

Table 124: Field 127E.1 Account Screen Authorization File (ASAF) Action Codes

Code	Definition	
A7	USD\$10,000	25
A8	USD\$1,500	4
A9	USD\$2,250	6
XA	Forward to issuer; default to 00	
XC	Mastercard Account Management System (Restricted Card List) pickup card. Note: Issuers cannot put this action code in an add or change request, but issuers may receive it in an inquiry.	
XD	Forward to issuer; default to 05	

Field 127E.2 – Region Coding

Field 127E.2 – Applies to

Account Screen Authorization File (ASAF) (Field 101—File Name = E2, E3, or E4)

Field 127E.2 – Attributes

fixed length

9 ANS, EBCDIC; 9 bytes

Field 127E.2 – Description

Field 127E.2 contains one or more CRB region codes that define the distribution of a Visa cardholder account number in Card Recovery Bulletin Service files.

Field 127E.2 – Usage

This field is used in 0302 add and change requests for the Account Screen Authorization File (ASAF) and is returned in the responses. It is not used in delete requests or in a file inquiry request. It is present in a successful 0312 response and in 0120 and 0322 file maintenance advices.

This field contains one or more codes whenever the action code in an update request is a pick-up code: **04**, **07**, **41**, or **43** and the file name is **E2** or **E3**. Otherwise, it contains spaces. If an **E2** or **E3** update is received at the VIC with a non-pick-up code but non-space region coding, that update is accepted and the region coding is ignored; in this case, the CRB is not updated.

Coding in this field is left-justified and space-filled.

The National Card Recovery File (NCRF) is available to acquirers in the U.S. region, and subscribing non-U.S. acquirers.

Auto-CDB: This space-filled field is present in an 0322 advice.

Field 127E.2 – Field Edits

This field must be present in an 0302 request if field 101 is **E3** or **E4**, and field 91 is **1** or **2**. If file name is **E3** and action code is a pick-up code, at least one non-space byte must be present in this field. If field 91 is **3**, this field should not be present, but does not reject if set to spaces.

Field 127E.2 – Reject Codes

None.

Field 127E.2 – File Maintenance Error Codes

The error codes for field 127E.2 are:

0577 = Invalid code

Field 127E.2 – Valid Values

Table 125: Field 127E.2 CRB Region Codes

Region Code	Geographic Area
0	No Bulletin / V.I.P. Only (cannot be combined with other region codes)
A	All countries in the Asia-Pacific region
B	All countries in the Central Europe, Middle East, and Africa (CEMEA) region
C	All Visa Canada
D	National Card Recovery Bulletin
E	All countries in Europe
F	All countries in the Latin America and Caribbean (LAC) region

Field 127E.3 – Cardholder Spending Amount Limit

Field 127E.3 – Applies to

Account Screen Authorization File (ASAF) (Field 101—File Name = E3 or E4)

Field 127E.3 – Attributes

fixed length

6 ANS, EBCDIC; 6 bytes

Field 127E.3 – Description

Field 127.E.3 contains the dollar amount that can be approved for this cardholder in one day. This limit is applied only when STIP authorizes on behalf of the issuer. It overrides the issuer's normal cardholder total daily spending limit.

Field 127E.3 – Usage

This field is used in 0302 add and change requests for the Account Screen Authorization File (ASAF) unless the issuer does not set spending limits for this cardholder. It is returned in the responses. It is not used in delete requests or in a file inquiry request. It is present in a successful 0312 response.

If an issuer wishes to set a unique daily spending limit for a cardholder while eliminating the daily limit by merchant type, this record must be coded with action code **11** (VIP) and a non-zero value in this field. This situation is the only instance in which it is allowable to have an action code and spending limits in one record.

This field must be zero-filled if no override amount and count limits are being assigned. If an amount limit is specified, a count limit must also be specified in field 127E.4. The amount limit entered here may be less than, equal to, or more than the limit selected for all other cardholders. Values are all those to **999999**.

Field 127E.3 – Field Edits

This field must be present in a 0302 request if field 101 is **E3** or **E4**, and field 91 is **1** or **2**.

Field 127E.3 – Reject Codes

None.

Field 127E.3 – File Edits

Numbered file edit requirements are:

1. If this field's value is non-zero, field 127E.4 must contain a non-zero value.
2. If this field's value is zeros, field 127E.4 must be zeros.
3. If field 127E.1 is spaces, this field's value must be non-zero.
4. If this field's valued is non-zero, field 127E.1 must be spaces or **11** (may not be a decline).

If field 91 is **3**, this field should not be present but does not reject the request if set to **zeros**.

Field 127E.3 – File Maintenance Error Codes

The error codes for field 127E.3 are:

0559 = Does not comply with Requirement 1 or 2

0560 = Does not comply with Requirement 3

0561 = Does not comply with Requirement 4

0562 = Invalid value (not numeric)

Field 127E.4 – Cardholder Spending Count Limit

Field 127E.4 – Applies to

Account Screen Authorization File (ASAF) (Field 101—File Name = E3 or E4)

Field 127E.4 – Attributes

fixed length

2 ANS, EBCDIC; 2 bytes

Field 127E.4 – Description

Field 127E.4 contains the number of transactions that can be approved for this cardholder in one day. This limit is applied only when STIP authorizes on behalf of the issuer. It overrides the issuer's normal cardholder total daily count limit.

Field 127E.4 – Usage

This field is used in 0302 add and change requests for the Account Screen Authorization File (ASAF), unless the issuer does not set spending limits for this cardholder. It is returned in the responses. The field is not used in delete requests or a file inquiry request. It is present in a successful 0312 response.

If an issuer wishes to set a unique daily count limit for a cardholder while eliminating the daily limits by merchant type, this record must be coded with action code **11** (VIP) and a non-zero value in this field. This situation is the only instance in which it is allowable to have an action code and a count limit in one record.

This field must be zero-filled if no override amount and count limits are being assigned. If a count limit is specified, an amount limit also must be specified in field 127E.3. The count limit entered here may be less than, equal to, or more than the limit selected for all other cardholders.

Values are all those to **99**.

Field 127E.4 – Field Edits

This field must be present in a 0302 request if field 101 is **E3** or **E4**, and field 91 is **1** or **2**.

Field 127E.4 – Reject Codes

None.

Field 127E.4 – File Edits

- If this field's value is non-zero, field 127E.3 must contain a non-zero value.
- If this field's value is zeros, field 127E.3 must be zeros.
- If field 127E.1 is spaces, this field's value must be non-zero.

If field 91 is **3**, this field should not be present but does not reject the request if set to zeros.

Field 127E.4 – File Maintenance Error Codes

0559 = Does not comply with requirement 1 or 2

0560 = Does not comply with requirement 3

0563 = Invalid value (not numeric)

Field 127P.1 – PIN Verification Data

Field 127P.1 – Applies to

PIN Verification File (Field 101—File Name = P2)

Field 127P.1 – Attributes

fixed length

7 AN, EBCDIC; 7 bytes

Field 127P.1 – Description

Field 127P.1 has three subfields.

Positions 1–2, Algorithm Identifier: This is a code that identifies the algorithm used by the issuer to verify the PIN.

Position 3, PVKI: This is a 1-digit PIN Verification Key Index (PVKI) value.

If the verification value is a Visa PVV, the PVKI is a value between **1** and **6**. The value indicates which of six possible pairs of PIN Verification Keys was used by the card issuer to generate the PVV. If the verification value is an IBM PIN Offset, the PVKI must be **1**, representing the single key used to generate the offset.

Positions 4 –15, Verification Value: This is a 4–12-digit PIN Verification Value (PVV) or PIN Offset Value.

The card issuer derives this value using the Visa PVV method or the IBM PIN offset method. The verification value is calculated using the account number and the PIN. Depending on the verification method, other data such as the PVKI, one or more PIN Verification Keys, and a decimalization table may be employed. To verify a PIN in an authorization request, the verification value is first recalculated. The recalculated value is compared to the value on file.

Field 127P.1 – Usage

Field 127P.1 is used in 0302 add, change, and replace requests when the card issuer must add or change PIN verification data; that is, it is required in 0302 requests if field 101 contains **P2** and field 91 contains **1**, **2**, or **4**.

This field is not used in a delete request or a file inquiry request. When this field is present in an 0302 request, it is returned in the 0312 response.

Issuers can use the IBM PIN Offset or Visa PIN Verification Value (PVV) method for PIN verification. IBM PIN Offset method uses twelve digits. Visa PVV method uses four digits in field 127P.1.

V.I.P. rejects messages with a PVV greater than four digits generated with the Visa PVV method.

Field 127P.1 – Field Edits

None.

Field 127P.1 – Reject Codes

None.

Field 127P.1 – File Edits

When field 101 is **P2** and field 91 is **1**, **2**, or **4**, these edits apply:

- The algorithm ID must be **01** or **04**.
- The PVKI must be a value from **1** through **6**.
- The verification value must be numeric.

When the value in field 91 is **3**, field 127P.1 should not be present but is not rejected if set to zeros.

Field 127P.1 – File Maintenance Error Codes

0582 = Invalid algorithm ID

0583 = Invalid PVKI

0584 = Invalid verification value

Field 127P.1 – Valid Values

Table 126: Field 127P.1: File Update PIN Verification Algorithm ID

Code	Definition
01	Visa PVV Method
04	IBM PIN Offset

Field 127R.1 Through 127R.5 – Filler

Field 127R.1 Through 127R.5 – Applies to

Risk-Level File (Field 101—File Name = R2)

Field 127R.1 Through 127R.5 – Attributes

fixed length

20 ANS, EBCDIC; 20 bytes

Field 127R.1 Through 127R.5 – Description

Subfields 127R.2 through 127R.5 contain filler only.

Field 127R.1 Through 127R.5 – Usage

These subfields must be space-filled.

Field 127R.1 Through 127R.5 – Field Edits

None.

Field 127R.1 Through 127R.5 – Reject Codes

None.

Field 127R.6 Through 127R.23 – Activity Limits

Field 127R.6 Through 127R.23 – Applies to

Risk-Level File (Field 101—File Name = R2)

Field 127R.6 Through 127R.23 – Attributes

variable length

120 ANS, EBCDIC; maximum: 120 bytes

Field 127R.6 Through 127R.23 – Description

These 18 fields contain amount activity limits for a certain type of transaction. The limits in these fields override those in effect for all cardholders of this issuer; they do not impact count limits. Each limit is expressed in whole U.S. dollars.

Table 127: Field 127R.6–127R.23: Risk-Level Activity Limits

Subfield	Bytes	Type of Activity Limit
127R.6	1–5	Travel limit (issuer available)
127R.7	6–10	Travel limit (issuer unavailable)
127R.8	11–15	Lodging limit (issuer available)
127R.9	16–20	Lodging limit (issuer unavailable)
127R.10	21–25	Auto rental limit (issuer available)
127R.11	26–30	Auto rental limit (issuer unavailable)
127R.12	31–35	Restaurant limit (issuer available)
127R.13	36–40	Restaurant limit (issuer unavailable)
127R.14	41–45	Mail/telephone limit (issuer available)
127R.15	46–50	Mail/telephone limit (issuer unavailable)
127R.16	51–55	Risky purchase limit (issuer available)
127R.17	56–60	Risky purchase limit (issuer unavailable)

Table 127: Field 127R.6–127R.23: Risk-Level Activity Limits

Subfield	Bytes	Type of Activity Limit
127R.18	61–65	Total purchase limit (issuer available)
127R.19	66–70	Total purchase limit (issuer unavailable)
127R.20	71–75	Total cash limit (issuer available)
127R.21	76–80	Total cash limit (issuer unavailable)
127R.22	81–85	ATM cash limit (issuer available)
127R.23	86–90	ATM cash limit (issuer unavailable)
Reserved for future use	91–120	Spaces returned in inquiry

Field 127R.6 Through 127R.23 – Usage

The fields are used in 0302 add, change, and replace requests for the Risk-Level File when the issuer elects to set unique activity limits for this cardholder. When these fields are present in a request, they are returned in the update response. They are not used in a delete.

These fields are not used in a file inquiry request. They are present in a successful 0312 response.

In an add, issuers provide numeric values for fields when it wants unique activity limits for this cardholder, and uses **spaces** in fields when the limit for this cardholder is the default limit for all the issuer's cardholders (as specified in the risk level.).

In a change or replace, issuers can remove a unique limit by setting its field to **spaces**, change established limits by providing a new value for its field, but must provide the value for any limits that are not being changed. When V.I.P. processes a change, it replaces the entire record.

When no unique activity limits apply, all 18 of these fields are omitted from the update message.

Field 127R.6 Through 127R.23 – Field Edits

None.

Field 127R.6 Through 127R.23 – Reject Codes

None.

Field 127.L1 – ALP Product File Maintenance (Inquire only)

Field 127.L1 – Attributes

variable length

1 byte, binary +

255 ANS, EBCDIC; maximum: 256 bytes

Field 127.L1 – Description

Issuers can use this field to inquire account-level processing (ALP) data in the CDB through the use of 0302 file maintenance message.

This usage of Field 127 is in tag-length-value (TLV) format and based on the ISO TLV Format. The TLV format is shown below.

Positions: 1		2–3	4–255
Subfield 1: length	Subfield 2: dataset ID	Subfield 3: dataset length	Subfield 4: TLV elements
Byte 1	Byte 2	Byte 3–4	Byte 5–256

Length Subfield: This value is the total length of field 127.L1.

Position 1, Dataset ID: This one-byte binary subfield must contain a hexadecimal value of **6A**, which indicates that the TLV data that follows is ALP product processing data.

Positions 2–3, Dataset Length: Variable, depending on the length of the TLV subfields that follow.

Positions 4–255, TLV Elements: Each subfield in a dataset has a defined tag, length, and value. The tag is used in conjunction with the dataset ID value. Each subfield can be present in any order with other TLV subfields.

Field 127.L1 – Usage

Endpoints that support this field must be able to receive dataset IDs and tags defined for this field in any order, including those they do not recognize or expect. Endpoints can receive

multiple datasets in this field. Endpoints must ignore dataset IDs or tags they do not recognize and continue to process the field.

These tags and values for Dataset ID 6A, contain the required file maintenance data for inquiring account-level cardholder records on the CDB.

Table 128: Dataset ID 6A - ALP Product Processing Data

Tag	Length	Value	Format	Contents
DF22	6	Activation Date	AN	Message Presence: 0312 inquiry response This tag is sent in the 0312 ALP product inquiry response and shows the date the account-level information was activated. The format is <i>yymmdd</i> .
DF23	6	Creation Date	AN	Message Presence: 0312 inquiry response This tag is sent in the 0312 ALP product inquiry response and contains the date the account-level information was created. The format is <i>yymmdd</i> .

Field 127.L1 – Field Edits

None.

Field 127.L1 – Reject Codes

None.

Field 127.L1 – File Edits

None.

Field 127.L1 – File Maintenance Error Codes

None.

Field 130 – Terminal Capability Profile

Field 130 – Attributes

fixed length

24 bit string; 3 bytes

Field 130 – Description

Field 130 is carried in VSDC transactions and indicates the card data input, the Cardholder Verification Method (CVM), and the security capabilities supported by the terminal.

This field maps to Field 55, Tag 9F33—Terminal Capabilities.

Positions: 1	2	3	4-8	1	2	3
manual key entry capability	magnetic stripe- read supported	chip-read supported	reserved	offline plaintext PIN supported	online PIN capability	signature supported
Byte 1				Byte 2		
Positions: 4	5	6-8	1	2	3	4
offline enciphered PIN supported	no CVM required supported	reserved	SDA supported	DDA supported	reserved	reserved
Byte 2			Byte 3			
Positions: 5	6-8					
CDA supported	reserved					
Byte 3						

The names of the subfields align with the *EMV Integrated Circuit Card Specifications for Payment Systems*.

Table 129: Field 130 Subfield Values

Byte	Position	Value	Description
1	1	1	Manual key entry supported
1	2	1	Magnetic stripe read supported
1	3	1	Chip read supported
1	4-8	RFU	Reserved for future use
2	1	1	Offline plaintext PIN supported
2	2	1	Online PIN supported
2	3	1	Signature supported
2	4	1	Offline enciphered PIN supported
2	5	1	No CVM required supported
2	6-8	RFU	Reserved for future use
3	1	1	Static data authentication (SDA) supported
3	2	1	Dynamic data authentication (DDA) supported
3	3	Reserved for future use	
3	4	RFU	Reserved for future use
3	5	1	Combined DDA/Application Cryptogram generation (CDA) supported
3	6-8	RFU	Reserved for future use

Field 130 – Usage

For full VSDC transactions, this field is required in these Visa messages:

- 0200 cash disbursements, balance inquiries, and account transfers
- 0220 STIP advices

It is required to obtain chip incentive in:

- 0422 dispute financials and dispute financial reversals
- 0220 dispute response financials

It is optional in these Visa or Plus ATM messages:

- 0620 chip-based informational advices

This field is not used in card or issuer authentication processing.

Data field requirements for advices from clearing endpoints are identical to those for STIP advices.

Field 130 – Field Edits

None.

Field 130 – Reject Codes

None.

Field 131 – Terminal Verification Results (TVR)

Field 131 – Attributes

fixed length

40 bit string; 5 bytes

Field 131 – Description

Field 131 is carried in VSDC transactions and contains indicators from a terminal perspective. The terminal records the results of offline and online processing by setting a series of indicators in this field. These indicators are available to clients in the online message and clearing transaction.

This field maps to Field 55, Tag 95—Terminal Verification Results.

Full Service ATM Online Messages – Technical Specifications

Data Field Descriptions

Positions: 1		2	3	4	5	6
offline authentication not performed		SDA failed	chip data missing	PAN on terminal exception file	DDA failed	CDA failed
Byte 1						
Positions: 7	8	1	2	3	4	5
sda selected	reserved	chip and terminal have different application versions	expired application	application not yet effective	requested service not allowed for card product	new card
Byte 1		Byte 2				
Positions: 6–8		1	2	3	4	5
reserved		cardholder verification was not successful	unrecognized CVM	Offline PIN try limit exceeded	PIN entry, required, PIN pad not working or not present	PIN entry required, PIN pad present but PIN not entered
Byte 2		Byte 3				
Positions: 6		7–8	1	2	3	4
online PIN entered		reserved	transaction exceeds floor limit	lower consecutive offline limit exceeded	upper consecutive offline limit exceeded	transaction selected randomly for on online
Byte 3			Byte 4			
Positions: 5		6–8	1	2	3	4
merchant forced transaction online		reserved	default TDOL used	issuer authentication failed	script processing failed before generating final cryptogram	script processing failed after generating final cryptogram
Byte 4			Byte 5			
Positions: 5–8						
reserved						
Byte 5						

The names of the subfields align with *Integrated Circuit Card Specifications for Payment Systems*.

Table 130: Field 131 Subfield Values

Byte	Position	Value	Description
1	1	1	Offline data authentication not performed
1	2	1	Static Data Authentication (SDA) failed
1	3	1	Chip data missing
1	4	1	Primary account number on terminal exception file
1	5	1	DDA failed
1	6	1	Combined DDA/Application Cryptogram generation (CDA) failed
1	7	1	selected
1	8	RFU	Reserved for future use
2	1	1	Chip and terminal are different application versions
2	2	1	Expired application
2	3	1	Application not yet effective
2	4	1	Requested service not allowed for card product
2	5	1	New card
2	6-8	RFU	Reserved for future use
3	1	1	Cardholder verification was not successful
3	2	1	Unrecognized CVM
3	3	1	Offline PIN try limit exceeded
3	4	1	PIN entry required and PIN pad not working or not present
3	5	1	PIN entry required and PIN pad present, PIN not entered
3	6	1	Online PIN entered
3	7-8	RFU	Reserved for future use
4	1	1	Transaction exceeds floor limit
4	2	1	Lower consecutive offline limit exceeded
4	3	1	Upper consecutive offline limit exceeded
4	4	1	Transaction selected randomly for online transmission
4	5	1	Merchant forced transaction online
4	6-8	RFU	Reserved for future use
5	1	1	Default terminal data object list (TDOL) used
5	2	1	Issuer authentication failed

Table 130: Field 131 Subfield Values

Byte	Position	Value	Description
5	3	1	Script processing failed before generating final cryptogram
5	4	1	Script processing failed after generating final cryptogram
5	5-8	RFU	Reserved for future use

Field 131 – Usage

For full VSDC transactions, this field is required in these Visa or Plus ATM messages:

- 0200 cash disbursements, balance inquiries, and account transfers
- 0220 STIP advices
- 0620 chip-based informational advices

For VSDC transactions, these Visa or Plus ATM messages should be included if issuer authentication failed and TVR is present:

- 0420 reversal advices

The Terminal Verification Results (TVR) field sent in reversals contains the final values, not those that were sent in the original request.

It is optional in these Visa or Plus ATM messages if present in the original:

- 0422 dispute financials and dispute financial reversals
- 0220 dispute response financials

Data field requirements for advices from BASE II endpoints are identical to those for stand-in advices.

Field 131 – Field Edits

None.

Field 131 – Reject Codes

None.

Field 132 – Unpredictable Number

Field 132 – Attributes

fixed length

8 hexadecimal digits; 4 bytes

Field 132 – Description

Field 132 contains the number used in the generation of the cryptogram for VSDC transactions. It provides variability and uniqueness to the cryptogram.

This field maps to Field 55, Tag 9F37—Unpredictable Number.

Field 132 – Usage

For full VSDC transactions, this field is required in the following Visa or Plus ATM messages:

- 0200 cash disbursements, balance inquiries, and account transfers
- 0220 STIP advices

It is optional in the following Visa or Plus ATM messages if present in the original:

- 0422 dispute financials and dispute financial reversals
- 0220 dispute response financials

It is optional in the following Visa or Plus ATM messages:

- 0620 chip-based informational advices

Data field requirements for advices from BASE II endpoints are identical to those for STIP advices.

Field 132 – Field Edits

None.

Field 132 – Reject Codes

None.

Field 133 – Reserved for Future Use

Field 133 – Attributes

fixed length

8 AN, EBCDIC; 8 bytes

Field 133 – Description

Reserved for future use. VisaNet deletes this field from the message if received.

Field 133 – Usage

N/A

Field 133 – Field Edits

None.

Field 133 – Reject Codes

None.

Field 134 – Visa Discretionary Data

Field 134 – Attributes

variable length

1 byte binary +

255 data bytes; variable by usage and subfield;

maximum 256 bytes.

Field 134 – Description

This field contains information from the chip that is:

- All Issuer Application Data (IAD)—for the expanded format of field 134, format 2, used by acquirers, or
- Only the Visa Discretionary Data portion of the IAD—for the standard format of field 134, format 1, used by issuers

The content varies with the layout of the Issuer Application Data from the card.

The acquirer sends the IAD data in:

- The expanded format of field 134, in which case field 135 must not be included in the request from the acquirer, or
- Field 55, tag 9F10, in which case tag 9F10 is formatted as described for the expanded format of field 134

The issuer can receive the IAD in the request message in:

- The standard format of field 134, in which case field 135 may also be included in the request (if the IAD from the acquirer contains Issuer Discretionary Data part and Visa Discretionary Data part). Fields 134 and 135 are used to receive the IAD, or
- Field 55, tag 9F10, in which case tag 9F10 is formatted as described for the expanded format of field 134.

The formats are listed below and are described in their individual field descriptions.

- Format 1, Standard Format
 - VIS IAD 0/1/3 Usage
 - CCD Usage
- Format 2, Expanded Format
 - VIS IAD 0/1/3 Usage
 - Other VIS IAD Formats Usage
 - CCD Usage
 - Generic EMV Transport Usage

Field 134 maps to Field 55, Tag 9F10—Issuer Application Data.

Field 134 – Usage

VSDC: For full VSDC transactions, this field is required in these messages:

- 0200 cash disbursements, balance inquiries, and account transfers, and 0220 STIP advices.
- 0620 chip-based information advices, and 0420 reversal advices if Issuer Authentication fails.
- Optional 0422 dispute financials and dispute financial reversals, and 0220 dispute response financial.

For full VSDC transactions, the format of the field varies depending on the client-specified preference.

- Field 134 Format 1: If this format is used, field 135 can also be present in the transaction. For CCD transactions, field 135 must be present.
- Field 134 Format 2: If this format is used, field 135 should not be present in the transaction.

Field 134 Format 2 is not supported in transactions going to or from issuers. For issuers, the data is carried in field 134, standard format, or field 55, Tag 9F10, depending on the issuer-specified preference.

- 0100 POS authorization requests
- 0120 STIP advices

Field 134 – Field Edits

Field edits vary according to usage.

Field 134 – Reject Codes

0369 = Invalid length (length varies by format)

Field 134 – Format 1, Standard Format

Field 134 – Format 1, Attributes

variable length

1 byte binary +

15 bytes; maximum 16 bytes

Field 134 – Format 1, Description

Field 134, format 1, is carried in VSDC transactions, and contains the Visa discretionary data portion of the IAD that is transmitted from the card to the issuer. When this format is used, field 135 can also be present in the transaction. Fields 134.1 and 134.2 are hexadecimal subfields and field 134.3 is a bit string subfield, regardless of chip card type (VIS or CCD).

For VIS Issuer Application Data (IAD) format **0/1/3**, issuers can use:

- Field 134, format 1, with field 135, or
- Field 55, tag 9F10.

In the standard format, Byte 1 (length) should be populated with Byte 1 of the Issuer Application Data.

These are the formats for VIS IAD Format 0/1/3:

Positions: 1 2 3 4				
data byte 1 (length)	DKI	CVN	CVR	n/a
Byte 1	Byte 2	Byte 3	Bytes 4–7	Bytes 8–16

These are the formats for CCD usage (Europe only):

Positions: 1 2 3 4				
data byte 1 (length)	CCI	DKI	CVR	Counters
Byte 1	Byte 2	Byte 3	Bytes 4–8	Bytes 9–16

VIS IAD Format 0/1/3 Data:

- **Byte 1, Length Subfield:** A one-byte field that contains the number of bytes in the field after the length subfield. The maximum value is **6** bytes for VIS transactions.
- **Position 1, Derivation Key Index (Field 134.1):** This is a two-hexadecimal digit, one-byte subfield. It contains an index into the issuer's list of keys used in the Online Card Authentication Method (Online CAM), Issuer Authentication, and validation of the clearing cryptogram.
- **Position 2, Cryptogram Version Number (Field 134.2):** This is a two-hexadecimal digit, one-byte subfield used to calculate the cryptogram contained in the message. It indicates which version of the cryptogram algorithm was used for ARQC, TC, AAC, or ARPC generation.
- **Position 3, Card Verification Results (CVR) (Field 134.3):** This subfield is comprised of a one-byte binary length indicator plus **3** bytes of indicator (the subfield maximum is **4** bytes). The card records the results of offline and online processing by setting a series of indicators in this field. These indicators are available to clients in the online message and clearing transaction. The length subfield specifies the number of bytes present in this field.
- **Position 4:** These bytes are reserved for future use.

See Appendix F.

CCD-Compliant Data:

- **Byte 1, Length Subfield:** A one-byte field that contains the number of bytes in the field after the length subfield. The maximum value is **15** bytes for CCD-compliant transactions.
- **Position 1, Common Core Identifier (CCI) (Field 134.1):** This is a one-byte field containing two pieces of information that is used to determine STIP CVR and TVR processing and cryptogram processing. The content of this subfield is as follows:
 - Left nibble = Format code. The setting in these bits indicates that the format is CCD. The settings are bits that equate to hexadecimal **A–F**, although only a bit setting that equates to hexadecimal **A** has currently been defined for Authentication Services.
 - Right nibble = Cryptogram version. The setting in these bits indicates the version number. The settings are hexadecimal **0–9** and **A–F**.
- **Position 2, Derivation Key Index (Field 134.2):** Like VIS cards, the DKI in CCD-compliant cards is a two hexadecimal digit, one-byte subfield that contains an index into the issuer's list of keys. These keys are used in the Online Card Authentication Method (Online CAM), Issuer Authentication, and validation of the clearing cryptogram.
- **Position 3 Card Verification Results (CVR) (Field 134.3):** This 5-byte subfield contains indicators that reflect the results of offline and online processing.
- **Position 4, Counters (Field 134.4):** This subfield is an 8-byte field that contains counters. The format of the counters is issuer-defined.

See Appendix F.

Field 134 – Format 1, Usage

This field is used in full VSDC transactions. Subfields requirements are:

- **VIS IAD Format 0/1/3:** Field 134.1 through 134.3 (field 134, positions 1–3) are required.
- **CCD:** Fields 134.1 through 134.4: (field 134, positions 1–4) are required.

The Card Verification Results (CVR) and Card Verification Results Extension fields sent in reversals contains the final values, not those that were sent in the original request.

VSDC: For full VSDC transactions, this field is required in these messages:

- 0200 cash disbursements, balance inquiries, and account transfers, and in 0220 STIP advices.
- 0620 chip-based information advices, and 0420 reversal advices if Issuer Authentication fails.
- Optional 0422 dispute financials and dispute financial reversals, and 0220 dispute response financials.

Field 134 – Format 1, Field Edits

If field 134, format 1, is present, the length cannot exceed **15** bytes, excluding the length byte.

Note: These edits do not apply if using field 55.

Field 134 – Format 1, Reject Codes

0369 = Invalid length (length greater than **15** bytes)

Field 134 – Format 2, Expanded Format

Field 134 – Format 2, Attributes

variable length

1 byte binary +

32 bytes; maximum 33 bytes

Field 134 – Format 2, Description

Field 134, format 2, contains the entire Issuer Application Data (IAD). Format 2 is applicable to expanded third bitmap acquirers, and issuers or acquirers supporting field 55. When the expanded format is used, field 135 should not be present in the transaction.

If submitting VSDC transactions using the expanded format, acquirers must also populate the Chip Transaction Indicator (field 60.6) with the value of **2**.

In the expanded format, Visa discretionary data and issuer discretionary data are concatenated in one field as shown below.

Positions: 1–32	
length	Issuer Application Data
Byte 1	Byte 2–33

For field 134, format 2, the length byte is the length of the Issuer Application Data and is not part of Issuer Application Data.

See Appendix F, which contains information about the various formats of Issuer Application Data supported in this field.

Field 134, format 2 maps to Field 55, Tag 9F10—Issuer Application Data.

Field 134 – Format 2, Usage

Expanded third bit map and Field 55 acquirers must support Field 134, format 2, or Field 55, tag 9f10 for all chip card transaction types.

This format is sent to issuers that support field 55 in contact and contactless Magnetic-Stripe Data (MSD) CVN_17 and qVSDC transactions.

All or part of this field is used in calculating the application cryptogram.

Acquirers use the Issuer Application Data from the card/device and move it to field 134, format 2 or field 55, tag 9f10. The format of the Issuer Application Data is transparent to acquirers. Acquirers must not format the Issuer Application Data by card type.

The CVR sent in reversals contains the final values.

For full VSDC transactions, this field is required in these messages:

- 0200 cash disbursements, balance inquiries, and account transfers, and in 0220 STIP advices.
- 0420 reversal advices if Issuer Authentication fails.
- Optional 0422 dispute financials and dispute financial reversals, and 0220 dispute response financials.

For details on the contents of this field, see Appendix H.

Data field requirements for advices from clearing endpoints are identical to those for STIP advices.

Field 134 – Format 2, Field Edits

If field 134, format 2, is present, the length cannot exceed **32** bytes.

Field 134 – Format 2, Reject Codes

0369 = Invalid length (length greater than **32** bytes)

Field 134 – Format 2, Valid Values

Values for VIS and CCD-compliant subfields are in Appendix F, which also includes information about VIS Format 2.

Field 135 – Issuer Discretionary Data

Field 135 – Attributes

variable length

1 byte binary + 30 hexadecimal digits; maximum 16 bytes

Field 135 – Description

This field contains the issuer discretionary data portion of the Issuer Application Data (IAD) that is defined by the issuer on the card. This data is in online messages for use by the issuer in online processing.

The field must be supported by full VSDC acquirers and issuers that use the standard format of Field 134—Visa Discretionary Data.

Third bitmap acquirers that use the expanded format of field 134 (format 2) should not include field 135 in submitted transactions. If present, field 135 is dropped.

Positions: 1–15	
Length	Issuer Discretionary Data
Byte 1	Bytes 2–16

The Length byte is the first of Issuer Discretionary Data. The location of this byte within Issuer Application Data varies depending on the number of bytes contained in Visa Discretionary Data in field 134. The number of bytes in field 134 varies by type of chip card.

This field, along with field 134, maps to Field 55, Tag 9F10—Issuer Application Data.

Field 135 – Usage

VSDC: This field applies to full VSDC transactions. It is present in CCD-compliant transactions, and may be present in VIS IAD Format 0/1/3 transactions.

For CCD-compliant transactions, all **32** bytes of Visa discretionary data and issuer discretionary data must be included in the message. When field 135 is present, the length (IAD data byte 17) must be **15** bytes.

If Issuer Discretionary Data is present on the card (as part of Issuer Application Data, Tag '9F10'), it must be included in these messages:

- Visa or Plus 0200 requests, balance inquiries, and account transfers.
- 0220 STIP advices.
- Data field requirements for advices from BASE II endpoints are identical to those for STIP advices.

It is optional in these messages:

- 0400 reversal requests and 0420 reversal advices.

Field 135 – Field Edits

None.

Field 135 – Reject Codes

None.

Field 136 – Cryptogram

Field 136 – Attributes

fixed length

16 hexadecimal digits; 8 bytes

Field 136 – Description

This field contains the chip application cryptogram (Authorization Request Cryptogram (ARQC), Transaction Certificate (TC), or an Application Authentication Cryptogram (AAC)). See the CVR details in Appendix I, field 134 to determine what type of cryptogram this field contains. Since this data element represents the cryptogram itself, acquirers must provide the cryptogram value generated by the card at the point of service without modification.

This field maps to Field 55, Tag 9F26—Application Cryptogram.

Field 136 – Usage

- 0100 POS authorization requests
- 0120 STIP advices

For full VSDC transactions, this field is required in these Visa or Plus ATM messages:

- 0200 cash disbursements, balance inquiries, and account transfers.
- 0220 STIP advices.

It is optional in these Visa or Plus ATM messages if present in the original:

- 0422 dispute financials and dispute financial reversals.
- 0220 dispute response financials.

It is required in Visa or Plus ATM 0620 chip-based informational advices if present in the original.

Data field requirements for advices from BASE II endpoints are identical to those for STIP advices.

VSDC ATM PIN Change/Unblock Request: This is an optional field that is not used by V.I.P.

Field 136 – Field Edits

None.

Field 136 – Reject Codes

None.

Field 137 – Application Transaction Counter

Field 137 – Attributes

fixed length

4 hexadecimal digits; a 2-byte binary value

Field 137 – Description

This field contains a count of the transactions performed within the card application. The count is incremented by one each time a transaction is initiated.

Multiple authorization requests for the same transaction have the same ATC; for example, when online PIN fails and the next authorization represents a different PIN try for the same transaction, the ATC is the same. For reversals and advices, the ATC is the value from the original message.

This field maps to Field 55, Tag 9F36—Application Transaction Counter.

Field 137 – Usage

This field (or tag 9F36 in field 55) is used as described in this section. In acquirer requests, V.I.P. removes the ATC if the issuer is an early data participant or sends it to the issuer if the issuer is a full data participant.

The field is optional in responses to original requests and to related reversals or reversal advices. If the issuer includes the ATC in a response, V.I.P. forwards it to the acquirer. If the issuer does not include the ATC in the response, V.I.P. does not add it.

If the field is present in issuer responses other than those for original requests, reversals, and reversal advices, V.I.P. drops it before the message is forwarded to the acquirer.

For full VSDC transactions, this field is required in these Visa or Plus ATM messages:

- 0200 cash disbursements, balance inquiries, and account transfers
- 0220 STIP advices
- 0220 adjustments
- 0620 chip-based informational advices

It is recommended in 0420 advices if available.

It is optional in these Visa or Plus ATM messages if present in the original:

- 0422 dispute financials and dispute financial reversals
- 0220 dispute response financials

It is optional in these Visa or Plus ATM messages:

- 9620 fraud advices

Data field requirements for advices from BASE II endpoints are identical to those for STIP advices.

Field 137 – Field Edits

None.

Field 137 – Reject Codes

None.

Field 138 – Application Interchange Profile

Field 138 – Attributes

fixed length

16 bit string; 2 bytes

Field 138 – Description

Field 138 is carried in VSDC transactions and provides a series of indicators that reflect the functions supported by the chip card account, for example, whether cardholder verification is supported.

This field maps to Field 55, Tag 82—Application Interchange Profile.

Positions: 1	2	3	4
reserved	SDA supported	DDA supported	cardholder verification supported
Byte 1			
Positions: 5	6	7	8
terminal risk management to be performed	issuer authentication supported (using EXTERNAL AUTHENTICATE command)	reserved	CDA supported
Byte 1			
Positions: 1	2	3	4–8
MSD supported	Mobile handset	Contactless transaction	reserved
Byte 2			

Table 131: Field 138 Subfield Values

Byte	Position	Value	Description
1	1	RFU	Reserved for future use
1	2	1	Static Data Authentication (SDA) supported

Table 131: Field 138 Subfield Values

Byte	Position	Value	Description
1	3	1	Dynamic Data Authentication (DDA) supported
1	4	1	Cardholder Verification supported
1	5	1	Terminal risk management to be performed
1	6	1	Issuer Authentication supported (using the EXTERNAL AUTHENTICATE command)
1	7	RFU	Reserved for future use
1	8	1	CDA supported
2	1	1	MSD is supported
2	2	1	Mobile handset
2	3	1	Contactless transaction
2	4 - 8	RFU	Reserved for future use

Field 138 – Usage

For full VSDC transactions, this field is required in the following Visa or Plus ATM messages:

- 0200 cash disbursements, balance inquiries, and account transfers.
- 0220 STIP advices.

It is optional in the following Visa or Plus ATM messages if present in the original:

- 0422 dispute financials and dispute financial reversals.
- 0220 dispute response financials.

It is required in Visa or Plus ATM 0620 chip-based informational advices if present in the original.

Data field requirements for advices from BASE II endpoints are identical to those for STIP advices.

Field 138 – Field Edits

None.

Field 138 – Reject Codes

None.

Field 139 – ARPC Response Cryptogram and Code

Field 139 – Attributes

fixed length

16 hexadecimal digits +

2 AN EBCDIC; 10 bytes total

Field 139 – Description

This field is optional for full VSDC transactions if field 134, format 1, is used. It contains the Issuer Authentication Data that may be sent in the authorization response message. There are two layouts that a third bitmap issuer can use to transmit the authentication information in a response message, format 1 and format 2. Acquirers must no longer use field 139 for ARPC Response Cryptogram and Code. Acquirers use field 140 or field 55, Tag 91 to receive this data.

The content of the first 8 bytes in the field depend on the format used. Bytes 9–10 contain the ARPC response code. This table displays the differences in the formats.

Field 139	Byte Content		
Format 1	ARPC cryptogram (Field 139.1)		ARPC response code (Field 139.2)
Format 2	ARPC cryptogram (Field 139.1)	Card status Updates (CSU) (Field 139.2)	ARPC response code (Field 139.3)
Bytes 1-4		Bytes 5-8	Bytes 9-10

This field maps to these fields:

- Field 140—Issuer Authentication Data-Expanded Third Bitmap
- Field 55, Tag 91—Issuer Authentication Data

Field 139 – Usage

VSDC: This field is used on full VSDC transactions. Issuers should only populate field 139 if they are performing Issuer Authentication. The issuer provides the same information (approve or decline) in the ARPC response code as in the response code (field 39).

V.I.P. populates field 139 under these conditions:

- The issuer subscribes to the VisaNet Issuer Authentication Service.
- The issuer uses the standard format (format 1) of field 134.
- The transaction meets the processing guidelines for Issuer Authentication performance.

V.I.P. sends the content of field 139 to the acquirer formatted as described in field 140 or field 55, tag 91.

An invalidly formatted value results in field 140 or tag 91 in field 55 being dropped from the response back to the acquirer.

Field 139 is required in these full VSDC transactions if issuer authentication is to be performed:

- Visa or Plus 0210 cash disbursement, balance inquiry, and account transfer responses.
- 0220 STIP advices.

VSDC PIN Change/Unblock Requests: This field may be present in 0210 responses if the issuer approves or declines a PIN Change/Unblock request. If present, V.I.P. forwards this field.

Field 139 – Field Edits

None.

Field 139 – Reject Codes

None.

Field 139 – Format 1, ARPC Response Cryptogram and Code

Field 139 – Format 1, Attributes

fixed length

16 hexadecimal digits +

2 AN EBCDIC; 10 bytes total

Field 139 – Format 1, Description

This VSDC field contains the authorization response cryptogram (ARPC) and response code that is used by the card to perform Issuer Authentication for some VIS transactions (CVN 10, 12, and 50-59).

This layout of field 139 must be supported by full VSDC issuers that use the standard format (format 1) of Field 134 - Visa Discretionary Data and issue VIS cards.

Position: 1	2
Field 139.1 ARPC cryptogram	Field 139.2 ARPC response code
Bytes 1-8	Bytes 9-10

Position 1, Authorization Response Cryptogram (Field 139.1): This 8-byte subfield contains an Authorization Response Cryptogram (ARPC) used to authenticate the response from the issuer.

Position 2, ARPC Response Code (Field 139.2): This field contains the EBCDIC equivalent of the ASCII value for the ARPC Response Code used by the issuer to calculate the ARPC. The acquirer may modify the response code value in field 39 before sending it to the terminal. When the card generates an ARPC and compares it to the ARPC generated by the issuer, it must have access to the same ARPC response code value used by the issuer. This field has been added to the message to ensure that the issuer and the card are using the same value to compute the ARPC.

This field maps to these fields:

- Field 140 - Issuer Authentication Data
- Field 55, Tag 91 - Issuer Authentication Data

Field 139 – Format 1, Usage

VSDC: This field is used in full VSDC transactions. Issuers should only populate it when they are performing Issuer Authentication. The issuer provides the same information (approve or decline) in the ARPC response code as in the response code (field 39).

V.I.P. populates field 139 using this format under these conditions:

- The issuer subscribes to the VisaNet Issuer Authentication Service.
- The issuer uses the standard format of field 134.
- The transaction was identified as a VIS transaction.
- The transaction meets the processing guidelines for Issuer Authentication performance.

V.I.P. sends field 139 information received from the issuer to the acquirer in field 140 (after converting bytes 9-10 to ASCII encoding). An invalidly formatted value results in field 140 or tag 91 in field 55 being dropped from the response back to the acquirer.

Field 139 is required in these full VSDC messages if issuer authentication was performed:

- Visa or Plus 0210 cash disbursement, balance inquiry, and account transfer responses.
- 0220 STIP advices.

VSDC PIN Change/Unblock Requests: This field may be present in 0210 responses if the issuer approves or declines a PIN Change/Unblock request. If present, the field is passed to the acquirer.

Field 139 – Format 1, Field Edits

None.

Field 139 – Format 1, Reject Codes

None.

Field 139 – Format 2, Issuer Authentication Data

Field 139 – Format 2, Attributes

fixed length

16 hexadecimal digits +

2 AN EBCDIC; 10 bytes total

Field 139 – Format 2, Description

This field is in VSDC transactions and contains the authorization response cryptogram (ARPC) and Card Status Updates (CSU) that is used by the card to perform Issuer Authentication for transactions that include the CSU in the Issuer Authentication Data. It also contains the ARPC response code or filler, neither are used by the card.

This layout of field 139 must be supported by full VSDC issuers that use the standard format of Field 134—Visa Discretionary Data and issue either VIS cards that use Issuer Authentication Data containing the Card Status Updates (CSU) (for example, CVN 18 or CVN '22' cards) or CCD cards.

Positions: 1	2	3
ARPC cryptogram	card status updates (CSU)	ARPC response code or filler
Bytes 1–4	Bytes 5–8	Bytes 9–10

Position 1, Authorization Response Cryptogram: This 4-byte subfield contains the authorization response cryptogram used to authenticate the response from the issuer.

Position 2, Card Status Updates (CSU): This 4-byte subfield contains indicators that are used by issuers to update specific card elements without using Issuer Script Processing. The CSUs are sent by the issuer in the response message or generated as default CSUs by V.I.P. for issuers that participate in the service. When generated by V.I.P., these are the default values for approve and decline.

Response Type	Default CSU Bit Settings by Byte	Description
Approval	Byte 1 = 0000 0000 Byte 2 = 1000 0110 Byte 3 = 0000 0000 Byte 4 = 0000 0000	Byte 2 bit 1 set to 1 indicates that the issuer approved the transaction. Byte 2 bit 6 indicates that the CSU was created by a proxy for the issuer. The update counter bits (byte 2 bits 7-8) indicate that counters are to be reset to zero, and may be processed or ignored depending on how the card is personalized.
Decline	Byte 1 = 0000 0000 Byte 2 = 0000 0100 Byte 3 = 0000 0000 Byte 4 = 0000 0000	Byte 2 bit 1 set to 0 indicates that the issuer declined the transaction. Byte 2 bit 6 indicates that the response was created by a proxy for the issuer. Byte 2 bits 7-8 indicate that counters are not to be updated, but this setting may be processed or ignored depending on how the card is personalized.

Position 3, ARPC Response Code or Filler: This 2-byte subfield contains the ARPC response code or filler (EBCDIC 00). The contents are not used by cards that use this format for field 139, but the issuer may choose to send the ARPC response code in these bytes.

This field maps to these fields:

- Field 140—Issuer Authentication Data
- Field 55, Tag 91—Issuer Authentication Data

Field 139 – Format 2, Usage

This field is used in full VSDC transactions. Issuers should only populate field 139 when they are performing Issuer Authentication.

V.I.P. sends the field 139 information received from the issuer to the acquirer in field 140 after converting the ARPC Response Code from EBCDIC to ASCII.

V.I.P. populates field 140 (on behalf of the issuer) using this format under these conditions:

- The issuer subscribes to the VisaNet Issuer Authentication Service.
- The acquirer uses field 134 expanded format instead of field 55 tag 9F10.
- The transaction was identified as a CCD-compliant or VIS CVN18 or CVN '22' transaction.
- The transaction meets the processing guidelines for Issuer Authentication performance.
- Issuer Authentication Data was not in the response from the issuer or the ARPC Cryptogram portion of Issuer Authentication from the issuer was equal to binary zeros.

An invalidly formatted value results in field 140 or tag 91 in field 55 being dropped from the response back to the acquirer.

VSDC PIN Change/Unblock Requests: This field may be present in 0210 responses when the issuer approves or declines a PIN Change/Unblock request. When present, the field is passed to the acquirer.

Field 139 – Format 2, Field Edits

None.

Field 139 – Format 2, Reject Codes

None.

Field 140 – Issuer Authentication Data

Field 140 – Attributes

variable length

1 byte binary +

255 bytes variable by usage;

maximum 256 bytes.

Field 140 – Description

This field is carried in VSDC transactions and contains information to be used by the card to perform issuer authentication. There are three field 140 formats: format 1, format 2, or format 3. There is a field description for each of these formats.

The content of the field is the same as that for field 139 except that:

- The ARPC response code in field 140, format 1, is in ASCII format.
- The proprietary authentication data (PAD) used in field 140, format 2 is not supported in field 139.

Issuers do not use field 140.

Field 140 must be supported by full VSDC acquirers that use the expanded format of Field 134- Visa Discretionary Data. Acquirer systems must support all formats of field 140 and forward data as received from V.I.P.

This field is not used by issuers.

Table 132:

		Position 1		
Field 140	Byte Content			
Format 1	length	ARPC Cryptogram (Field 139.1)	ARPC response code (Field 139.2)	
Format 2	length	ARPC Cryptogram (Field 139.1)	Card Status Updates (CSU) (Field 139.2)	ARPC Response Code (Field 139.3)

Table 132:

		Position 1		
Format 3	length	Issuer-defined (Field 139.1)		
	Byte 1	Bytes 2-5	Bytes 6-9	Bytes 10-17

Byte 1, Length subfield: A one-byte field that contains the total number of bytes in the field. The maximum value is **16** bytes.

Position 1, Issuer Authentication Data: The contents of these positions vary depending on the type of chip card.

This field maps to Field 55, Tag 91-Issuer Authentication Data.

Field 140 – Usage

This field is used in full VSDC transactions. VisaNet Integrated Payment (V.I.P.) populates field 140 under these conditions:

- The issuer subscribes to the VisaNet Issuer Authentication Service.
- The transaction meets the processing guidelines for Issuer Authentication performance.
- Issuer Authentication Data was not in the issuer response.

If issuer authentication is performed, field 140 is required in these messages for third bitmap acquirers that use expanded formats.

- Visa or Plus 0210 cash disbursement, balance inquiry, and account transfer responses

An invalidly formatted value results in field 140 or tag 91 in field 55 being dropped from the response back to the acquirer.

Field 140 – Field Edits

None.

Field 140 – Reject Codes

None.

Field 140 – Format 1, Issuer Authentication Data

Field 140 – Format 1, Attributes

variable length

1 byte binary +

16 hexadecimal digits and two bytes binary, ASCII equivalent; maximum 11 bytes

Field 140 – Format 1, Description

This VSDC field contains the authorization response cryptogram (ARPC) and response code that is used by the card to perform Issuer Authentication for VIS transactions using CVN 10, 12, or 50-99. The content of the field is the same as that in field 139, format 1 (VIS usage) except that the ARPC response code in bytes 10-11 in field 140 is in ASCII format.

Field 140 must be supported by full VSDC acquirers that use the expanded format (Format 2) of Field 134—Visa Discretionary Data. Acquirer systems must support all formats of field 140 and forward data as received from V.I.P.

This field is not used by issuers.

Positions: 1		2
length	ARPC cryptogram	ARPC response code
Byte 1	Bytes 2-9	Bytes 10-11

Byte 1, Length Subfield: A one-byte field that contains the total number of bytes in the field. The maximum value is **10** bytes.

Position 1, ARPC Cryptogram: This 8-byte subfield contains the authorization response cryptogram used to authenticate the response from the issuer.

Position 2, ARPC Response Code: This 2-byte subfield contains the response value. Because the acquirer may modify the response code value in field 39 before sending it to the terminal, field 140 contains the response value used by the issuer to generate the ARPC. When the card generates an ARPC and compares it to the ARPC generated by the issuer, it must have access to the same value used by the issuer. This field has been added to the message to ensure that the issuer and the card are using the same value to compute the ARPC cryptogram.

This field maps to Field 55, Tag 91—Issuer Authentication Data.

Field 140 – Format 1, Usage

This field is used in full VSDC transactions. V.I.P. populates field 140 under these conditions:

- The issuer subscribes to the VisaNet Issuer Authentication Service.
- The acquirer uses the expanded format (Format 2) of field 134.
- The transaction was identified as using ARPC and ARPC response code for issuer authentication data.
- The transaction meets the processing guidelines for Issuer Authentication performance.
- Issuer Authentication Data is not in the issuer response, or the Authorization Response Cryptogram received from the issuer was equal to binary zeros.

If issuer authentication was performed, field 140 is required in Visa or Plus 0210 cash disbursement, balance inquiry, and account transfer responses to third bitmap acquirers that use expanded formats.

An invalidly formatted value results in field 140 or tag 91 in field 55 being dropped from the response back to the acquirer.

Issuer Authentication Data is not sent in the authorization response if the online card authentication fails.

Field 140 – Format 1, Field Edits

None.

Field 140 – Format 1, Reject Codes

None.

variable length
1 byte binary +
16 hexadecimal bytes;
minimum 9 bytes;
maximum 17 bytes

This field is in VSDC transactions and contains the authorization response cryptogram (ARPC), the Card Status Updates (CSUs), and optional proprietary authentication data (PAD). These data elements are used by the card to perform Issuer Authentication for CCD, VIS CVN 18, and VIS CVN '22' transactions.

Field 140 must be supported by full VSDC acquirers that use the expanded format of Field 134—Visa Discretionary Data. Acquirer systems must support all formats of field 140 and forward data as received from V.I.P.

This field is not used by issuers.

Positions: 1		2	3
length	ARPC cryptogram	card status updates (CSU)	proprietary authentication data (PAD)
Byte 1	Bytes 2–5	Bytes 6–9	Bytes 10–17

Byte 1, Length subfield: A one-byte field that contains the total number of bytes in the field. The maximum value is **16** bytes.

Position 1, Authorization Response Cryptogram: This 4-byte subfield contains the authorization response cryptogram used to authenticate the issuer response.

Position 2, Card Status Updates (CSUs): This 4-byte subfield contains indicators that are used by issuers to update the card without using Issuer Script Processing. The CSU is sent by the issuer or created by V.I.P. when the issuer chooses to have V.I.P. perform Issuer Authentication.

V.I.P. uses different CSU default values, depending on whether the transaction is approved or declined.

See field 139, format 2, description for the position 2 default settings if generated by V.I.P.

Position 3, Proprietary Authentication Data (PAD): This optional 8-byte subfield, which is used for sending proprietary information to the card, can only be carried in responses from issuers that use field 55. The subfield is used in the VisaNet Issuer Authentication Service when bit 1 of CSU byte 1 equals to **1**.

This field maps to Field 55, Tag 91—Issuer Authentication Data.

Field 140 – Format 2, Usage

This field is used in full VSDC transactions. V.I.P. populates field 140 under these conditions:

- The issuer subscribes to the VisaNet Issuer Authentication Service.
- The acquirer uses expanded third bitmap instead of field 55.
- The transaction uses ARPC and CSU Issuer Authentication Data (and optional PAD).
- The transaction is eligible for Issuer Authentication.
- Issuer Authentication Data was not in the issuer response or the ARPC Cryptogram portion of Issuer Authentication from the issuer was equal to binary zeros.

An invalidly formatted value results in field 140 or tag 91 in field 55 being dropped from the response back to the acquirer.

If issuer authentication is performed, field 140 is sent to expanded third bitmap acquirers in these messages:

- Visa or Plus 0210 cash disbursement, balance inquiry and account transfer responses.
- 0220 STIP advices.

Field 140 – Format 2, Field Edits

None.

Field 140 – Format 2, Reject Codes

None.

Field 140 – Format 3, Issuer Authentication Data

Field 140 – Format 3, Attributes

variable length

1 byte binary +

16 hexadecimal digits to 32 hexadecimal digits;

9 bytes minimum;

17 bytes maximum

Field 140 – Format 3, Description

This field is carried in VSDC transactions and contains data that is sent by the issuer. The content of this field is not used by VisaNet for processing.

Field 140 must be supported by full VSDC acquirers that use the expanded format (Format 2) of Field 134-Visa Discretionary Data. Acquirer systems must support all formats of field 140 and forward data as received from V.I.P.

Positions: 1-16	
length	Issuer Defined Data
Byte 1	Bytes 2-17

Byte 1, Length Subfield: A one-byte field that contains the total number of bytes in the field. The minimum value is **8** bytes and the maximum value is **16** bytes.

Positions 1-16, Issuer Defined Data: The content of this field is not edited by VisaNet Integrated Payment (V.I.P.) The field is forwarded as submitted in the message.

This field maps to Field 55, Tag 91-Issuer Authentication Data.

Field 140 – Format 3, Usage

This field is used in full VSDC transactions, and is sent to third bitmap acquirers that use expanded formats. V.I.P. forwards the content of the field as submitted by the issuer under these conditions:

- The transaction was identified as a Generic EMV Transport transaction.
- Field 55 from the issuer contained tag 91.

An invalidly formatted value results in field 140 or tag 91 in field 55 being dropped from the response back to the acquirer. Field 140 is sent to third bitmap acquirers that use the expanded third bitmap format in these messages:

- Visa or Plus 0210 cash disbursement, balance inquiry and account transfer responses.
- 0220 STIP advices.

Field 140 – Format 3, Field Edits

None.

Field 140 – Format 3, Reject Codes

None.

Field 142 – Issuer Script

Field 142 – Attributes

variable length

1 byte +

510 hexadecimal digits; maximum 256 bytes

While the maximum number of bytes for this field is 256 bytes, EMV specifies that networks must support a minimum of 128 bytes of Issuer Script. With the length byte, acquirers must support a minimum of 129 bytes in field 142. Issuers may send more than 129 bytes in field 142 only when the issuer knows that longer issuer scripts are supported on the entire transaction path.

Field 142 – Description

This field originates from the issuer and contains Issuer Script commands with changes that the issuer communicates to the card. It allows dynamic changes to the content of the card without reissuing the card. The issuer sends Tag 71 or Tag 72 in the response but not both.

Tag 71 is used if the issuer sends the response Issuer Script commands that are to be applied to the card *before* the final GENERATE AC command.

Tag 72 is used if the issuer sends the response Issuer Script commands that are to be applied to the card *after* the final GENERATE AC command. Visa recommends the use of Tag 72 but accepts Tag 71.

This field is not used by VisaNet for processing.

The format of the field is a special form of a composite data element that uses three subfields after the length subfield as displayed in this table.

Positions: 1		2	3-255
Length	Tag for Script ID	Length	Value
	71 or 72	L (Sum data, including Tag for Script ID, followed by the Issuer Script TLV data elements)	Data for the script commands to be sent to the card.
Byte 1	Byte 2	Bytes 3-x	Bytes x-256

Length Subfield: This is a one-byte binary subfield that contains the number of bytes in this field after the length subfield.

Position 1, Tag: This is a one-byte binary identifier. The identifier is hexadecimal **71** or **72**.

Position 2, Length: The number of bytes used to specify the length is determined by the first bit of the first byte. When this first bit is **0**, the length is in the remaining seven bits of this byte. When the first bit is **1**, the remaining seven bits indicate the number of subsequent bytes that are used to encode the length.

See Appendix F, VSDC Fields-Additional Information.

Positions 3-256, Issuer Script TLV Data Elements: This subfield contains issuer script data elements that are in TLV format

See the *EMV Integrated Circuit Card Specifications for Payment System*.

This field maps to Field 55, Tag 71, and Tag 72-Issuer Script.

Field 142 – Usage

Field 142 is optional in these full VSDC transactions:

- Visa or Plus ATM 0210 cash disbursement, balance inquiry and account transfer responses.

This field is **not** present in 0220 advices.

- PIN Change/Unblock request responses (except in PIN Change/Unblock approvals, where the field is mandatory).

VSDC PIN Change/Unblock Requests: This field *must* be present in 0210 responses if the issuer approves a PIN Change/Unblock request. If the request is declined, this field may be present in the response but is not required. If present, field 142 is passed to the acquirer.

Field 142 – Field Edits

If field 142 is present, the length cannot exceed the 510-hexadecimal-digit maximum.

Field 142 – Reject Codes

0371 = Invalid length

0490 = Field 142 is missing in an approved PIN Change/Unblock response.

Field 143 – Issuer Script Results

Field 143 – Attributes

variable length

1 byte binary +

40 hexadecimal digits; maximum 21 bytes

Field 143 – Description

This field is carried in VSDC transactions. During online processing, the issuer has the option to send commands to the card in the authorization response. These commands instruct the card to update the card parameters. The card records the success or failure of the updates in the Issuer Script Results field. The field contains a length indicator followed by 5 bytes to indicate the results of script processing.

The content of this field is not used by VisaNet Integrated Payment (V.I.P.) See the *Visa Smart Debit Smart Credit (VSDC) System Technical Manual*.

This field maps to Field 55, Tag 9F5B-Issuer Script Results.

	Positions: 1-4	5-8	9-40	
length	script processing results	script sequence number	script identifier	reserved for future use
Byte 1	Byte 2, bits 1-4	Byte 2, bits 5-8	Bytes 3-6	Bytes 7-21

Field 143 – Usage

For full VSDC transactions, this field is required in the following Visa or Plus Automated Teller Machine (ATM) messages if issuer script is present in the original response:

- 0420 original reversal advices if available from the device
- 0620 chip-based informational advices

Field 143 – Field Edits

If this field is present, its length cannot exceed **20** bytes.

Field 143 – Reject Codes

0372 = Invalid length

0491 = Field 143 missing in reversal

Field 144 – Cryptogram Transaction Type

Field 144 – Attributes

fixed length

2N, 4 bit BCD (unsigned packed); 1 byte

Field 144 – Description

This field is carried in VSDC transactions and indicates the type of financial transaction provided by the terminal. It usually corresponds to the first two digits of the Processing Code (field 3). Field 144 is carried in the message to ensure that the issuer and the card are using the same value to compute the cryptogram.

This field maps to Field 55, Tag 9C-Cryptogram Transaction Type.

Field 144 – Usage

For full VSDC transactions, this field is required in the following Visa or Plus Automated Teller Machine (ATM) messages:

- 0200 cash disbursements, balance inquiries, account transfers, and PIN Change and Unblock requests
- 0220 STIP advices

It is optional in the following Visa or Plus ATM messages if present in the original:

- 0422 dispute financial and dispute financial reversals
- 0220 dispute response financial

Data field requirements for advices from BASE II endpoints are identical to those for STIP advices.

Field 144 – Field Edits

If this field is present, it must contain a BCD value (packed unsigned numbers); otherwise, the field is removed from the message.

Field 144 – Reject Codes

None.

Field 145 – Terminal Country Code

Field 145 – Attributes

fixed length

3N, 4 bit BCD; 2 bytes

Field 145 – Description

This field is carried in VSDC transactions and identifies the country where the merchant terminal is located. A leading zero is required to pad the first unused half-byte of this field. The zero is filler and is not part of the code.

This field maps to Field 55, Tag 9F1A-Terminal Country Code.

Field 145 – Usage

It is optional in these Visa or Plus Automated Teller Machine (ATM) messages if present in the original:

- 0422 dispute financials and dispute financial reversals
- 0220 dispute response financials

Data field requirements for advices from BASE II endpoints are identical to those for STIP advices.

Field 145 – Field Edits

If this field is present, it must contain a BCD value (packed unsigned numbers); otherwise, the field is removed from the message.

Field 145 – Reject Codes

None.

Field 146 – Terminal Transaction Date

Field 146 – Attributes

fixed length

6N, 4 bit BCD; 3 bytes

Field 146 – Description

This field is carried in VSDC transactions and contains the local date at the terminal on which the transaction was authorized. This field is used in the calculation of the cryptogram. The format is *yymmdd*, where:

- *yy* = **00–99**
- *mm* = **01–12**
- *dd* = **01–31**

This field maps to Field 55, Tag 9A-Terminal Transaction Date.

Field 146 – Usage

It is optional in these Visa or Plus Automated Teller Machine (ATM) messages if present in the original:

- 0422 dispute financials and dispute financial reversals
- 0220 dispute response financials

Data field requirements for advices from BASE II endpoints are identical to those for STIP advices.

Field 146 – Field Edits

If this field is present, it must contain a BCD value (packed unsigned numbers); otherwise, the field is removed from the message.

Field 146 – Reject Codes

None.

Field 147 – Cryptogram Amount

Field 147 – Attributes

fixed length

12N, 4 bit BCD (unsigned packed); 6 bytes

Field 147 – Description

This field contains the transaction amount used by the chip when calculating the cryptogram. It must contain numeric right-justified data with leading zeros.

This field maps to Field 55, Tag 9F02-Amount, Authorized.

Field 147 – Usage

For full VSDC transactions, field 147 is required in these Visa or Plus Automated Teller Machine (ATM) messages:

It is optional in these Visa or Plus ATM messages if present in the original:

- 0422 dispute financials and Dispute Financial reversals
- 0220 dispute response financials

Data field requirements for advice from BASE II endpoints are identical to those for STIP advice.

VSDC ATM PIN Change/Unblock Requests: If this field is not present, issuers should assume zeros when performing cryptogram validation.

Field 147 – Field Edits

If present, this field must contain a BCD value (packed unsigned numbers); otherwise, VisaNet Integrated Payment (V.I.P.) removes it from the message.

Field 147 – Reject Codes

None.

Field 148 – Cryptogram Currency Code

Field 148 – Attributes

fixed length

3N, 4 bit BCD; 2 bytes

Field 148 – Description

This field is carried in VSDC transactions and contains the currency code used by the chip when calculating the cryptogram. Codes are defined in ISO 4217 and are listed in the appendix titled “Country and Currency Codes”. A leading zero is required to pad the first unused half-byte of this field. The zero is filler and is not part of the code.

This field maps to Field 55, Tag 5F2A-Transaction Currency Code.

Field 148 – Usage

It is optional in these messages, Visa or Plus Automated Teller Machine (ATM) messages if present in the original:

- 0422 dispute financials and dispute financial reversals
- 0220 dispute response financials

Data field requirements for advices from BASE II endpoints are identical to those for STIP advices.

Field 148 – Field Edits

If this field is present, it must contain a BCD value (packed unsigned numbers); otherwise, the field is removed from the message.

Field 148 – Reject Codes

None.

Field 149 – Cryptogram Cashback Amount

Field 149 – Attributes

fixed length

12N, 4 bit BCD (unsigned packed); 6 bytes

Field 149 – Description

This field is carried in VSDC transactions and contains the cashback amount that the chip uses when calculating the cryptogram. If the transaction does not include cashback, this field cannot be sent or be sent **zero** filled.

This field maps to Field 55, Tag 9F03-Amount, Other.

Field 149 – Usage

VSDC: If a cashback amount is present, field 149 is required for full VSDC transactions in 0100 and 0200 authorization requests.

Field 149 – Field Edits

If this field is present, it must contain a BCD value (packed unsigned numbers); otherwise, the field is removed from the message.

Field 149 – Reject Codes

None.

Field 152 – Secondary PIN Block

Field 152 – Attributes

fixed length

64 N, bit string; 8 bytes

Field 152 – Description

This field contains a new PIN to replace a PIN. It is encrypted and formatted as a block of 16 hexadecimal digits. (A new PIN is chosen to replace the current PIN when the cardholder does not remember the current PIN, wants a new PIN, or current PIN is compromised.)

In an acquirer-initiated request, this field format must conform to the PIN Block Format Code in Field 53-Security-Related Control Information. In a request received by the Issuer processor, the format conforms to the PIN Block Format of the Issuer processor, as previously specified to Visa. This new PIN is never logged, even if it is in an encrypted form.

PIN Change/Unblock is part of the PIN Management Service.

This field maps to Field 55, Tag C0-Secondary PIN Block.

Field 152 – Usage

Field 152 must be present in 0200 requests when the customer chooses to replace its current PIN at an ATM; that is, field 3 processing code is **70** (PIN Change/Unblock). This field must *not* be present if the field 3 processing code is **72** (PIN Unblock). This field is not used in reversal requests, advices, or responses.

If this field is present, Field 52-Personal Identification Number (PIN) Data, and Field 53-Security-Related Control Information, must also be present. This field should not be used other than a PIN Management request.

STIP and Switch Advices: Field 152 is not present in 0220 advices.

Field 152 – Field Edits

Field 152 is required if the processing code in field 3 is **70** (PIN Change/Unblock). If there is an error, the request message is not rejected; instead, the response code in field 39 of the 0110 response is set to **81**.

Field 152 – Reject Codes

0489 = Field missing in a PIN Change request

0717 = Field present in a PIN Unblock request

Chapter 5

Message Formats

Tables apply to full service ATM processing and show fields in messages. Table notations indicate whether field values are required, conditional, optional, or should be blank. Tables also describe actions acquirers, issuers, and VisaNet Interchange Centers (VICs) take.

Interpreting Tables

This table illustrates how to read code and message tables, including explanations of coding, followed by field name abbreviations.

Code and Message Interpretations

Field Number and Name		Original			
		0200		0210	
		Acqr/ Svc Pvdr	VIC	Issr/ Cust Inst	VIC
2	Primary Acct Nbr	M	→	M	→
5	Amt, Settlmt		C+		C+
7	Transmsn Date/Time	M	→	M	→
14	Date, Exp	C	→		
15	Date, Settlmt		M+	M	→
39	Resp Code		C+	C	→
41	Card Acqptr Term ID	C	→	C	→
44.1	Resp Source/Rsn Cde				C+
44.5	CVV/iCVV Results Cde		C+	C	→
62.1	Auth Char Indctr	M	C	O	M+
62.2	Trans Idfr		C+		M+
115	Addtnl Trace Data	O	–		C+

Codes

C = Conditional: Field/value is present in the message under certain conditions, which are explained in Chapter 4, Data Field Descriptions.

C+: Field/value is conditionally added at the VIC.

C–: Field/value is conditionally removed at the VIC.

M = Mandatory: Field/value must be present in the message.

M+: Field/value is always added at the VIC.

O = Optional: Field/value presence in the message is up to the message initiator or the recipient.

blank space: Field/value *must not be* present in the message in that stage of its journey.

→ : VisaNet passes the field/value;
no VisaNet action other than possible field editing.

–: Field/value is *always removed* by VisaNet at the VIC.

bold: Field/value must be forwarded/returned *exactly* as received.

Row coding interpretation examples:

Field 2: (1) acquirer must include the primary account number in the request; (2) VisaNet passes the account number as it is received assuming a successful length edit; (3) issuer must return the account number in the response **exactly** as it was received in the request; (4) VisaNet does nothing to the account number except forward it.

Field 5: (1) acquirer does not include the settlement amount in the request; (2) VisaNet inserts the settlement amount **if** the issuer participates in multicurrency; (3) issuer does not return the field value in the response; (4) VisaNet replaces it if the acquirer is a multicurrency participant.

Field 39: (1) acquirer does not include this field; (2) if appropriate, VisaNet inserts the response code before forwarding the request to the issuer; (3) if appropriate, the issuer inserts the response code in the response; (4) which is forwarded to the acquirer.

Field 115: (1) acquirer can include the field if it wants; (2) VisaNet removes it if necessary before forwarding the message to the issuer; (3) because the field value is absent from the request, the issuer does not include it in the response; (4) VisaNet reinserts it before forwarding the response to the acquirer.

Rules governing when a field is included in a message are contained in the respective field descriptions in Chapter 4, Data Field Descriptions.

Definition of the Term "Mandatory"

Mandatory refers to client requirements and fields must be present in messages and contain certain values. *Conditional* refers to client requirements applying under specified conditions.

While V.I.P. enforces edits and rejects transactions for some violations of mandatory requirements, V.I.P. does not enforce edits for all mandatory or conditional fields and values.

Visa strongly urges clients and processors to comply with mandatory field requirements. Failure to do so can result in greater risk to clients or increased processing costs, and may result in exposure to disputes and compliance claims, elevated decline rates, and disqualification for preferential interchange rates. Visa advises clients not to rely on V.I.P. to reject transactions not complying with mandatory or conditional requirements.

Use of M (Mandatory), C (Conditional), and O (Optional) in Tables

M (Mandatory) means fields, and perhaps specific codes or values, are required in messages.

C (Conditional) means fields, and specific codes or values are required in messages if certain conditions exist, that is, if messages are trying to meet certain service or system requirements. For instance, if messages are submitted for CVV checking (field 22 = **05** or **95** and track data included), Field 44.5—CVV Results Code may be present in requests forwarded to issuers or responses to acquirers. However, if requests are not submitted for CVV checking (track data included, field 22 is not **05** or **95**), V.I.P. does not include field 44.5 in requests forwarded to issuers or responses to acquirers. Therefore, field 44.5 = **C** in message layout charts accommodating CVV and non-CVV submissions.

O (Optional) means presence of fields is up to message senders. V.I.P. does not check or edit fields or contents.

See Chapter 4 for field information.

Field Name Abbreviations

Table 133: Field Names and Abbreviations

Field Number	Field Name	Field Name Abbreviation
2	Primary Account Number (PAN)	Primary Acct Nbr
3	Processing Code	Not Abbreviated
4	Amount, Transaction	Amt, Trans
5	Amount, Settlement	Amt, Settlmt
6	Amount, Cardholder Billing	Amt, Cdhldr Billing
7	Transmission Date/Time	Transmsn Date/Time
9	Conversion Rate, Settlement	Conv Rate, Settlmt

Table 133: Field Names and Abbreviations

Field Number	Field Name	Field Name Abbreviation
10	Conversion Rate, Cardholder Billing	Conv Rate, Cdhldr Billing
11	System Trace Audit Number	Sys Trace Audit Nbr
12	Time, Local Transaction	Time, Local Trans
13	Date, Local Transaction	Date, Local Trans
14	Date, Expiration	Date, Expr
15	Date, Settlement	Date, Settlmt
16	Date, Conversion	Date, Conv
18	Merchant Type	Mchnt Type
19	Acquiring Institution Country Code	Acqng Inst Cntry Code
20	PAN Extended, Country Code	PAN Extnd, Cntry Code
22	Point-of-Service Entry Mode Code	Not Abbreviated
23	Card Sequence Number	Card Seq Nbr
25	Point-of-Service Condition Code	POS Cond Code
26	Point-of-Service PIN Capture Code	POS PIN Captr Code
28	Amount, Transaction Fee	Amt, Trans Fee
32	Acquiring Institution Identification Code	Acqng Inst ID Code
33	Forwarding Institution Identification Code	Fwdng Inst ID Code
34	Acceptance Environment Data (TLV Format)	Accptc Env
35	Track 2 Data	Not Abbreviated
37	Retrieval Reference Number	Retrieval Ref Nbr
38	Authorization Identification Response	Auth ID Resp
39	Response Code	Resp Code
41	Card Acceptor Terminal Identification	Card Accptr Termnl ID
42	Card Acceptor Identification Code	Card Accptr ID Code
43	Card Acceptor Name/Location	Card Accptr Name/Loc
44	Additional Response Data	Addtnl Resp Data
44.1	Response Source/Reason Code	Resp Source/Rsn Code
44.3	Additional Token Response Information	Addtnl Token Resp Information
44.4	Extended STIP Reason Code	Extd. STIP Rsn Code

Table 133: Field Names and Abbreviations

Field Number	Field Name	Field Name Abbreviation
44.5	CVV/iCVV Results Code	Not Abbreviated
44.8	Card Authentication Results Code	Card Authen Results Code
44.11	Original Response Code	Orig Resp Code
46	Amounts, Fees	Not Abbreviated
48	Additional Data—Private	Addtnl Data—Private
49	Currency Code, Transaction	Currncy Code, Trans
50	Currency Code, Settlement	Currncy Code, Settlmt
51	Currency Code, Cardholder Billing	Currncy Code, Cdhldr Billing
52	Personal Identification Number (PIN) Data	PIN Data
53	Security-Related Control Information	Sec Related Cntrl Info
54	Additional Amounts	Addtnl Amts
55	Integrated Circuit Card (ICC)-Related Data	ICC-Related Data
56	Customer Related Data	Not Abbreviated
59	National POS Geographic Data	Natl POS Geo Data
60	Additional POS Information	Addtnl POS Info
60.1	Terminal Type	Not Abbreviated
60.2	Terminal Entry Capability	Term Entry Cap
60.9	Cardholder ID Method Indicator	Crdhldr ID Method
61.1	Other Amount, Transaction	Other Amt, Trans
62.0	Field 62 Bitmap	Bitmap (Field 62)
62.1	Authorization Characteristics Indicator	Auth Char Indctr
62.2	Transaction Identifier	Trans Idfr
62.11	Multiple Clearing Sequence Number	Mult Clrng Seq Nbr
62.16	Reserved	Not Abbreviated
62.21	Online Risk Assessment Risk Score and Reason Codes	Risk Score
62.22	Online Risk Assessment Condition Codes	Condition Codes
62.23	Product ID	Not Abbreviated
62.24	Program Identifier	Program Idfr
62.25	Spend Qualified Indicator	Spnd Qlfd Indctr

Table 133: Field Names and Abbreviations

Field Number	Field Name	Field Name Abbreviation
62.26	Account Status	Not Abbreviated
62.27	ATM Routing Table Unique Identifier	Not Abbreviated
63	V.I.P. Private-Use Fields	Not Abbreviated
63.0	Field 63 Bitmap	Bitmap (Field 63)
63.1	Network Identification Code	Netwk ID Code
63.3	Message Reason Code	Msg Rsn Code
63.4	STIP/Switch Reason Code	STIP/Switch Rsn Code
63.6	Chargeback Reduction/Clearing Flags	Chgbk Reduct/BII Flags
63.9	Fraud Data	Not Abbreviated
63.11	Reimbursement Attribute	Reimbursmt Attribute
63.12	Sharing Group Code (U.S. only)	Sharing Group Code
63.13	Decimal Positions Indicator	Decimal Postns Indctr
63.14	Issuer Currency Conversion Data	Issr Crrcy Conv Data
63.19	Fee Program Indicator	Fee Prgrm Indctr
63.21	Charge Indicator	Charge Indctr
66	Settlement Code	Settlmt Code
68	Receiving Institution Country Code	Rcvg Inst Cntry Code
69	Settlement Institution Country Code	Settlmt Inst Cntry Code
70	Network Management Information Code	Netwk Mgmt Info Code
73	Date, Action	Not Abbreviated
74	Credits, Number	Credits, Nbr
75	Credits, Reversal Number	Credits, Reversal Nbr
76	Debits Number	Debits Nbr
77	Debits, Reversal Number	Debits, Reversal Nbr
86	Credits, Amount	Credits, Amt
87	Credits, Reversal Amount	Credits, Reversal Amt
88	Debits, Amount	Debits, Amt
89	Debits, Reversal Amount	Debits, Reversal Amt
90	Original Data Elements	Orig Data Elemts

Table 133: Field Names and Abbreviations

Field Number	Field Name	Field Name Abbreviation
91	File Update Code	Not Abbreviated
92	File Security Code	File Sec Code
95	Replacement Amounts	Replacement Amt
96	Reserved	Not Abbreviated
97	Amount, Net Settlement	Amt, Net Settlmt
99	Settlement Institution Identification Code	Settlmt Inst ID Code
100	Receiving Institution Identification Code	Rcvg Inst ID Code
101	File Name	Not Abbreviated
102	Account Identification 1	Acct ID 1
103	Account Identification 2	Acct ID 2
105	Double-Length DES Key (Triple DES)	Dbl-Lngth DES Key (Trpl DES)
110	Encryption Data (TLV Format)	Encryption Data
111	Additional Transaction Specific Data (TLV Format)	Addnl Trans-Spcfc Data
114	Domestic and Localized Data (TLV Format)	Not Abbreviated
115	Additional Trace Data	Addtnl Trace Data
117	National Use	Not Abbreviated
118	Intra-Country Data	Intra-Cntry Data
119	Settlement Service Data (International only)	Settlmt Svc Data
120	Auxiliary Transaction Data (TLV Format)	Auxiliary Transaction Data
121	Issuing Institution Identification Code	Not Abbreviated
125	Supporting Information	Supporting Info
126.0	Field 126 Bitmap	Bitmap (Field 126)
126.12	Service Indicators	Svc Indctrs
127	File Maintenance	File Maint
127E.1	Action Code	Not Abbreviated
127E.2	Region Coding	Not Abbreviated
127E.3	Cardholder Spending Amount Limit	Cardhldr Spndng Amt Limit
127E.4	Cardholder Spending Count Limit	Cardhldr Spndng Cnt Limit
127.L1	ALP Product File Maintenance	Not Abbreviated

Table 133: Field Names and Abbreviations

Field Number	Field Name	Field Name Abbreviation
130	Terminal Capability Profile	Term Capblty Profile
131	Terminal Verification Results (TVR)	Term Verif Results
132	Unpredictable Number	Unpredict Nbr
133	Reserved for Future Use	Not Abbreviated
134	Visa Discretionary Data	Visa Discret Data
135	Issuer Discretionary Data	Issuer Discret Data
136	Cryptogram	Not Abbreviated
137	Application Transaction Counter	App Trans Counter
138	Application Interchange Profile	App Intchg Profile
139	ARPC Response Cryptogram and Code	ARPC Resp Crypto & Code
140	Issuer Authentication Data	Issuer Auth Data
142	Issuer Script	Not Abbreviated
143	Issuer Script Results	Not Abbreviated
144	Cryptogram Transaction Type	Cryptogram Trans Type
145	Terminal Country Code	Term Cntry Code
146	Terminal Transaction Date	Term Trans Date
147	Cryptogram Amount	Crypto Amt
148	Cryptogram Currency Code	Crypto Crrcy Code
152	Secondary PIN BLock	Not Abbreviated

Original Financial Transactions

The following are original financial messages for ATM transactions:

0200 Cash Disbursement

0200 Balance Inquiry

0200 Account Transfer

0200 ATM Deposits

0200 Cash Disbursement

A cash disbursement is a request to authorize, post, and settle a transaction for the withdrawal of cash from an ATM.

If the issuer is unavailable, VisaNet responds to the acquirer and creates an advice message for the issuer.

Financial transaction messages impact settlement.

Table 134: Cash Disbursement

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
—	Second Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→	M	→	M	
5	Amt, Settlmt		C+		C+	C	
6	Amt, Cdhldr Billing		C+			C	
7	Transmsn Date/time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+	C	
10	Conv Rate, Cdhldr Billing		C+			C	
11	Sys Trace Audit Nbr	M	→	M	→	M	M
12	Time, Local Trans	M	→			M	
13	Date, Local Trans	M	→			M	
14	Date, Expr	C	→			C	
15	Date, Settlmt		M+	M	→	M	M
16	Date, Conv		C+		C+	C	
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	C	C
20	PAN Extnd, Cntry Code	O	–		M+		
22	POS Entry Mode Code	M	C+			M	
23	Card Seq Nbr	C					
25	POS Cond Code	M	→	M	→	M	M

Table 134: Cash Disbursement

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
26	POS PIN Capture Code	C	→			C	
28	Amt, Trans Fee	M	C-			C	
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	C	→			C	
34	Accptc Env	C	C+	C	C+	C	
35	Track 2 Data	M	→				
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Resp			C	→	C	
39	Resp Code		C+	M	→	M	M
41	Card Acqptr Termnl ID	M	→	M	→	M	M
42	Card Acqptr ID Code	M	→	M	→	M	M
43	Card Acqptr Name/Loc	M	→			M	
44.1	Resp Source/Rsn Code				C+	C	
44.4	Extd. STIP Rsn Code					C	
44.5	CVV/iCVV Results Code		C+	O	C+	C	
44.11	Orig Resp Code				C+		
46	Amounts, Fees		C+			C	
48	Addtnl Data—Private (Usage = 2 or 9a)	O	→	O	C+	C	C
49	Currny Code, Trans	M	→	M	→	M	
50	Currny Code, Settlmt		C+		C+	C	
51	Currny Code, Cdhldr Billing		C+			C	
52	PIN Data	M	→				
53	Security-Related Cntrl Info	M	→				
54	Addtnl Amts		C+	O	→	C	
59	Natl POS Geo Data	C	→			C	
60.1	Terminal Type	O	→		C+	C	
60.2	Term Entry Cap	O	→		C+	C	

Table 134: Cash Disbursement

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
60.3	Chip CondtN Code	C	C-		C+	C	
60.9	CrDhldr ID Method		C+		C+	C	
62.0	Bitmap (Field 62)	C	→	C	→	C	C
62.1	Auth Char Indctr	O	C	O	C+	C	O
62.2	Trans Idfr		M+	O	C+	M	O
62.21	Risk Score		C+		C-	C	
62.22	Condition Codes		C+		C-	C	
62.23	Product ID		C+	C	C+	C	C
62.24	Program Idfr		O+	O	O+	C	O
62.25	Spnd Qlfd Indctr		C+	O	C+	C	O
62.27	ATM Routing Table Unique Identifier	C					
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M
63.3	Msg Rsn Code					C	
63.4	STIP/Switch Rsn Code					M	
63.12	Sharing Group Code	C	→	C	→		
63.13	Decimal Pos Indctr	C	C+	C	C+	C	C
63.14	Issr Currecy Conv Data		C+			C	
63.19	Fee Prgrm Indctr	C	C+	C	C+	C	C
63.21	Charge Indctr		C+		C+	C	
102	Acct ID 1	C	→	O	C+		
114	Domestic and Localized Data	C	→	C	→	C	
115	Addtnl Trace Data	O	C-		C+		
117	National Use	C	C-	C	C-	C	C
118	Intra-Cntry Data	C	C-	C	C-	C	C
119	Settlement Service Data	C	C-			C-	
126.0	Bitmap (Field 126)	C	C-			C	

Table 134: Cash Disbursement

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
126.12	Svc Indctrs	C	C-			C	
126.19	DCC Indctr	C	-				

0200 Balance Inquiry

A balance inquiry is a request for account balance information to be displayed at an ATM.

This transaction is strictly between the cardholder and the issuer. Since, no settlement occurs between the acquirer and the issuer, this transaction cannot be reversed, adjusted, charged back, or re-presented.

STIP cannot process a balance inquiry on behalf of an unavailable issuer, but does check the account against the Account Screen Authorization File (ASAF). STIP responds and creates an advice if a decline or pickup code is on file. This is one of the two instances when a STIP-processing advice does not reflect typical STIP authorization processing.

Balance inquiries do not impact settlement totals.

Table 135: Balance Inquiry

Field Number and Name		Original			
		0200		0210	
		Acqr	VIC	Issr	VIC
—	Second Bitmap	C	→	C	→
2	Primary Acct Nbr	M	→	M	→
3	Processing Code	M	→	M	→
7	Transmsn Date/Time	M	→	M	→
11	System Trace Audit Nbr	M	→	M	→
12	Time, Local Trans	M	→		
13	Date, Local Trans	M	→		
14	Date, Expr	O	→		
15	Date, Settlmt		M+	M	→
18	Mchnt Type	M	→		
19	Acqng Inst Cntry Code	C	→	C	→
20	PAN Extnd, Cntry Code	O	-		M+
22	POS Entry Mode Code	M	C+		
25	POS Cond Code	M	→	M	→
26	POS PIN Capture Code	C	→		
28	Amt, Trans Fee	C	C-		
32	Acqng Inst ID Code	M	→	M	→
33	Fwdng Inst ID Code	C	→		

Table 135: Balance Inquiry

Field Number and Name		Original			
		0200		0210	
		Acqr	VIC	Issr	VIC
34	Accptc Env	C	C+	C	C+
35	Track 2 Data	M	→		
37	Retrieval Ref Nbr	M	→	M	→
39	Resp Code		C+	M	→
41	Card Accptr Termnl ID	M	→	M	→
42	Card Accptr ID Code	M	→	M	→
43	Card Accptr Name/Loc	M	→		
44.1	Resp Source/Rsn Code				C+
44.5	CVV/iCVV Results Code		C+	O	C+
48	Addtnl Data—Private (Usage = 2 or 9a)	O	→	O	C+
49	Currency Code, Trans	C	C+	O	C+
52	PIN Data	M	→		
53	Sec Related Cntrl Info	M	→		
54	Addtnl Amts			C	→
59	Natl POS Geo Data	C	→		
60.1	Terminal Type	O	→		C+
60.2	Term Entry Cap	O	→		C+
60.9	Crdhldr ID Method		C+		C+
62.0	Bitmap (Field 62)		C+		C+
62.2	Trans Idfr		C+		C+
62.23	Product ID		C+	C	C+
62.24	Program Idfr		O+	O	O+
62.27	ATM Routing Table Unique Identifier	C			
63.0	Bitmap (Field 63)	M	→	M	→
63.1	Netwk ID	M	→	M	→
63.12	Sharing Group Code	C	→	C	→
63.19	Fee Prgrm Indctr	C	C+	C	C+

Table 135: Balance Inquiry

Field Number and Name		Original			
		0200		0210	
		Acqr	VIC	Issr	VIC
102	Acct ID 1	C	→	O	C+
115	Addtnl Trace Data	O	C-		C+
117	National Use	C	C-	C	C-
118	Intra-Cntry Data	C	C-	C	C-
119	Settlement Service Data	C	C-		
126.0	Bitmap (Field 126)	C	C-		
126.12	Svc Indctrs	C	C-		

0200 Account Transfer

An account transfer is a request to transfer funds between a cardholder's two accounts at the same financial institution.

This transaction is strictly between the cardholder and the issuer. Because there is no settlement between the acquirer and the issuer, this transaction cannot be adjusted or disputed. An account transfer can be reversed if it is necessary to cancel the cardholder charge when the acquirer cannot deliver the response to the point of service.

STIP cannot process an account transfer on behalf of an unavailable issuer, but checks the account against the Account Screen Authorization File (ASAF). STIP responds and creates an advice if a decline or pickup code is on file. This is one of the two instances when a STIP-processing advice does not reflect typical STIP authorization processing.

Account transfers do not impact settlement totals.

Table 136: 0200 Account Transfer

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	230
		Acqr	VIC	Issr	VIC	VIC	Issr
—	Second Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→	M	→	M	
6	Amt, Cdhldr Billing		C+			C	
7	Transmsn Date/Time	M	→	M	→	M	M
10	Conv Rate, Cdhldr Billing		C+			C	
11	Sys Trace Audit Nbr	M	→	M	→	M	M
12	Time, Local Trans	M	→			M	
13	Date, Local Trans	M	→			M	
14	Date, Expr	C	→			C	
15	Date, Settltmt		M+	M	→	M	M
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	C	C
20	PAN Extnd, Cntry Code	O	–		M+		
22	POS Entry Mode Code	M	C+			M	

Table 136: 0200 Account Transfer

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	230
		Acqr	VIC	Issr	VIC	VIC	Issr
25	POS Cond Code	M	→	M	→	M	M
26	POS PIN Capture Code	C	→			C	
28	Amt, Trans Fee	C	C-			C	
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	C	→			C	
34	Accptc Env	C	C+	C	C+	C	
35	Track 2 Data	M	→				
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Resp			O	→	C	
39	Response Code		C+	M	→	M	M
41	Card Acqptr Termnl ID	M	→	M	→	M	M
42	Card Acqptr ID Code	M	→	M	→	M	M
43	Card Acqptr Name/Loc	M	→			M	
44.4	Extd. STIP Rsn Code					C	
44.5	CVV/iCVV Results Code		C+	O	C+	C	
48	Addtnl Data—Private (Usage = 2 or 9a)	O	→	O	C+		
49	Currncy Code, Trans	M	→	M	→	M	
51	Currncy Code, Cdhldr Billing		C+			C	
52	PIN Data	M	→				
53	Sec Related Cntrl Info	M	→				
59	Natl POS Geo Data	C	→			C	
60.1	Terminal Type	O	→		C+	C	
60.2	Term Entry Cap	O	→		C+	C	
60.9	Crdhldr ID Method		C+		C+	C	
62.0	Bitmap (Field 62)		C+		C+	C	
62.2	Trans Idfr		M+		M+	M	
62.23	Product ID		C+	C	C+	C	C

Table 136: 0200 Account Transfer

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	230
		Acqr	VIC	Issr	VIC	VIC	Issr
62.24	Program Idfr		O+	O	O+	C	O
62.27	ATM Routing Table Unique Identifier	C					
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M
63.4	STIP/Switch Rsn Code					M	
63.12	Sharing Group Code	C	→	C	→		
63.19	Fee Prgrm Indctr	C	C+	C	C+	C	C
102	Acct ID 1	C	→	O	C+		
103	Acct ID 2	C	→	O	C+		O
115	Addtnl Trace Data	O	C-		C+		
117	National Use	C	C-	C	C-	C	C
118	Intra-Cntry Data	C	C-	C	C-	C	C
119	Settlement Service Data	C	C-			C-	
126.0	Bitmap (Field 126)	C	C-			C	
126.5	Visa Merchant Identifier		C+		C+	C+	
126.12	Svc Indctrs	C	C-			C	

0200 ATM Deposits

This table displays the field requirements for an ATM Deposits full-financial request.

Table 137: ATM Deposits Full-Financial Request

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
—	Second Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→	M	→	M	
5	Amt, Settlmt		C+		C+	C	
6	Amt, Cdhltr Billing		C+			C	
7	Transmsn Date/time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+	C	
10	Conv Rate, Cdhltr Billing		C+			C	
11	Sys Trace Audit Nbr	M	→	M	→	M	M
12	Time, Local Trans	M	→			M	
13	Date, Local Trans	M	→			M	
14	Date, Expr	C	→			C	
15	Date, Settlmt		M+	M	→	M	M
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	C	C
20	PAN Extnd, Cntry Code	O	-		M+		
22	POS Entry Mode Code	M	C+			M	
25	POS Cond Code	M	→	M	→	M	M
26	POS PIN Capture Code	C	→			C	
28	Amt, Trans Fee	M	C-			M	
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	C	→			C	
34	Accptc Env	C	C+	C	C+	C	

Table 137: ATM Deposits Full-Financial Request

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
35	Track 2 Data	M	→				
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Resp			C	→	C	
39	Resp Code		C+	M	→	M	M
41	Card Acqptr Termnl ID	M	→	M	→	M	M
42	Card Acqptr ID Code	M	→	M	→	M	M
43	Card Acqptr Name/Loc	M	→			M	
44.1	Resp Source/Rsn Code				C+	C	
44.4	Extd. STIP Rsn Code					C	
44.5	CW/iCVV Results Code		C+	O	C+	C	
44.11	Orig Resp Code				C+		
48	Addtnl Data—Private (Usage = 2 or 9a)	O	→	O	C+		
49	Currny Code, Trans	M	→	M	→	M	
50	Currny Code, Settlmt		C+		C+	C	
51	Currny Code, Cdhldr Billing		C+			C	
52	PIN Data	M	→				
53	Security-Related Cntrl Info	M	→				
54	Addtnl Amt	C	→	O	→	C	
59	Natl POS Geo Data	M	→			M	
60.1	Terminal Type	O	→		C+	C	
60.2	Term Entry Cap	O	→		C+	C	
60.9	Crdhldr ID Method		C+		C+	C	
62.0	Bitmap (Field 62)	C	→	C	→	C	C
62.2	Trans Idfr		M+	O	C+	M	O
62.21	Risk Score		C+		C-	C	
62.22	Condition Codes		C+		C-	C	
62.23	Product ID		C+	C	C+	C	C

Table 137: ATM Deposits Full-Financial Request

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
62.27	ATM Routing Table Unique Identifier	C					
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M
63.12	Sharing Group Code	C	→	C	→		
63.19	Fee Prgm Indctr		C+		C+	C	C
102	Acct ID 1	C	→	O	C+		
104	Trans-Spcfc Data	M	→	M	→	M	→
115	Addtnl Trace Data	O	C-		C+		
126.0	Bitmap (Field 126)	C	C-			C	
126.5	Visa Merchant Identifier		C+		C+	C+	
126.12	Svc Indctrs	C	C-			C	

Financial Reversals

The following are reversal messages for original ATM financial transactions:

0420 Reversal

0420 Account Transfer Reversal

0420 ATM Deposits Reversal

0420 Reversal

Financial transaction reversal messages negate outstanding or previously approved financial transactions.

Under normal conditions, the acquirer submits an 0420 reversal advice to the issuer, and the issuer returns an 0430 response. If acquirers send 0400 messages, VisaNet converts them to 0420 advices. VisaNet generates a reversal when it cannot deliver an approval response for the original financial transaction request.

Financial transaction reversals impact settlement totals.

Table 138: Reversal

Field Number and Name		Acquirer Advice			
		0420		0430	
		Acqr	VIC	Issr	VIC
—	Second Bitmap	M	→	M	→
2	Primary Acct Nbr	M	→	M	→
3	Processing Code	M	→	M	→
4	Amt, Trans	M	→		
5	Amt, Settlmt		C+		C+
6	Amt, Cdhldr Billing		C+		
7	Transmsn Date/Time	M	→	M	→
9	Conv Rate, Settlmt		C+		C+
10	Conv Rate, Cdhldr Billing		C+		
11	Sys Trace Audit Nbr	M	→	M	→
12	Time, Local Trans	M	→		
13	Date, Local Trans	M	→		
14	Date, Expr	C	→		
15	Date, Settlmt		M+	M	→
16	Date, Conv		C+		C+
18	Mchnt Type	M	→		
19	Acqng Inst Cntry Code	C	→	C	→
20	PAN Extnd, Cntry Code	O	–		M+
22	POS Entry Mode Code	M	→		

Table 138: Reversal

Field Number and Name		Acquirer Advice			
		0420		0430	
		Acqr	VIC	Issr	VIC
25	POS Cond Code	M	→	M	→
28	Amt, Trans Fee	M	C-		
32	Acqng Inst ID Code	M	→	M	→
33	Fwdng Inst ID Code	O	-		
34	Accptc Env	C	C+	C	C+
37	Retrieval Ref Nbr	M	→	M	→
38	Auth ID Resp	C	→		
39	Resp Code			M	→
41	Card Acqptr Termnl ID	M	→	M	→
42	Card Acqptr ID Code	M	→	M	→
43	Card Acqptr Name/Loc	M	→		
44.1	Resp Source/Rsn Code				M+
46	Amounts, Fees		C+		
48	Addtnl Data—Private (Usage = 2 or 9a)	O	→	O	C+
49	Currncy Code, Trans	M	→	M	→
50	Currncy Code, Settlmt		C+		C+
51	Currncy Code, Cdhldr Billing		C+		
54	Addtnl Amts		C+		
59	Natl POS Geo Data	C	→		
60.1	Terminal Type	C	→		
60.2	Term Entry Cap	C	→		
60.9	Crhdldr ID Method		C+		
62.0	Bitmap (Field 62)	C	→	C	C+
62.1	Auth Char	C	→	O	C+
62.2	Trans Idfr	M	→	O	C+
62.23	Product ID	O	C+	C	C+
62.24	Program Idfr		O+	O	O+

Table 138: Reversal

Field Number and Name		Acquirer Advice			
		0420		0430	
		Acqr	VIC	Issr	VIC
62.25	Spnd Qlfd Indctr		C+	O	C+
62.27	ATM Routing Table Unique Identifier	C			
63.0	Bitmap (Field 63)	M	→	M	→
63.1	Netwk ID	M	→	M	→
63.3	Msg Rsn Code	C	→		
63.4	STIP/Switch Rsn Code		C+		
63.12	Sharing Group Code	C	→	C	→
63.13	Decimal Pos Indctr	C	C+	C	C+
63.14	Issr Crrncy Conv Data		C+		
63.19	Fee Prgrm Indctr	C	C+	C	C+
63.21	Charge Indctr		C+		C+
90	Orig Data Elemts	M	→	M	→
102	Acct ID 1	C	C+	C	C+
114	Domestic and Localized Data	C	→		
115	Addtnl Trace Data	O	C-		C+
117	National Use	C	C-	C	C-
118	Intra-Cntry Data	C	C-	C	C-
119	Settlement Service Data	C	C-		
126.0	Bitmap (Field 126)	C	C-		
126.5	Visa Merchant Identifier		C+		C+
126.12	Svc Indctrs	C	C-		
126.19	DCC Indctr	C	-		

0420 Account Transfer Reversal

An ATM account transfer reversal is used to negate an outstanding or previously approved account transfer. An account transfer reversal is normally initiated by the acquirer. VisaNet generates an account transfer reversal when it cannot deliver an approval response for the original financial transaction request.

Account transfer reversals do not impact settlement totals.

Table 139: Account Transfer Reversal

Field Number and Name		Acquirer Advice				Acquirer Switch Advice	
		0420		0430		0420	0430
		Acqr	VIC	Issr	VIC	VIC	Acqr
—	Second Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr	C	→	C	→	C	C
3	Procssng Cde	M	→	M	→	M	M
4	Amt, Trans	M	→			M	
6	Amt, Cdhldr Blng		C+			C	
7	Transmsn Date/Time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+	C	
10	Convsn Rate, Cdhldr Blng		C+			C	
11	Sys Trace Audit Nbr	M	→	M	→	M	M
12	Time, Local Trans	M	→			M	
13	Date, Local Trans	M	→			M	
14	Date, Exp	C	→			C	
15	Date, Settlmt		M+	M	→	M	M
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Cde	C	→	C	→	C	C
20	PAN Extnd, Cntry Cde	O	–		M+		
22	POS Entry Mode Cde	M	C+			M	
25	POS Cond Cde	M	→	M	→	M	M
28	Amt, Trans Fee	C	C–			C	
32	Acqng Inst ID Cde	M	→	M	→	M	M

Table 139: Account Transfer Reversal

Field Number and Name		Acquirer Advice				Acquirer Switch Advice	
		0420		0430		0420	0430
		Acqr	VIC	Issr	VIC	VIC	Acqr
33	Fwdng Inst ID Cde	O	–				
34	Accptc Env	C	C+	C	C+	C	
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Resp	C	→			C	
39	Resp Cde			M	→	M	M
41	Card Acqptr Term ID	M	→	M	→	M	M
42	Card Acqptr ID Cde	M	→	M	→	M	M
43	Card Acqptr Name/Loc	M	→			M	
44.1	Resp Source/Rsn Code				M+	M	
48	Addtnl Data—Private (Usage = 2 or 9a)	O	→	O	C+		
49	Currny Cde, Trans	M	→	M	→	M	
51	Currny Cde, Cdhldr Blng		C+			C	
59	Natl POS Geo Data	C	→			C	
60.1	Terminal Type	C	→			C	
60.2	Term Entry Cap	C	→			C	
60.9	Crdhldr ID Method		C+			C	
62.0	Bitmap (Field 62)	C	C+	C	C+	C	C
62.2	Trans Idfr	C	C+	O	C+	C	O
62.23	Product ID	O	C+	C	C+	C	O
62.24	Program Idfr		O+	O	O+	C	
62.27	ATM Routing Table Unique Identifier	C					
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M
63.4	STIP/Switch Rsn Cde		C+			M	
63.12	Sharing Group Code	C	→	C	→		
63.19	Fee Program Indctr	C	C+	C	C+	C	C
90	Orig Data Elemts	M	→	M	→	M	M

Table 139: Account Transfer Reversal

Field Number and Name		Acquirer Advice				Acquirer Switch Advice	
		0420		0430		0420	0430
		Acqr	VIC	Issr	VIC	VIC	Acqr
102	Acct ID 1	C	C+	C	C+	C	
103	Acct ID 2	C	C+	O	→		
115	Addtnl Trace Data	O	C-		C+		
117	National Use	C	C-	C	C-	C	C
118	Intra-Cntry Data	C	C-	C	C-	C	C
119	Settlement Service Data	C	C-			C	
126.0	Bitmap (Field 126)	C	C-				
126.12	Svc Indctrs	C	C-				

0420 ATM Deposits Reversal

This table displays the field requirements for an ATM Deposits reversal request.

Table 140: ATM Deposits Reversal

Field Number and Name		Acquirer Advice				Acquirer Switch Advice	
		0420		0430		0420	0430
		Acqr	VIC	Issr	VIC	VIC	Acqr
—	Second Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→	M	→	M	M
5	Amt, Settlmt		C+		C+	C	
6	Amt, Cdhldr Billing		C+			C	
7	Transmsn Date/Time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+	C	
10	Conv Rate, Cdhldr Billing		C+			C	
11	Sys Trace Audit Nbr	M	→	M	→	M	M
12	Time, Local Trans	M	→			M	
13	Date, Local Trans	M	→			M	
14	Date, Expr	C	→			C	
15	Date, Settlmt		M+	M	→	M	M
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	C	C
20	PAN Extnd, Cntry Code	O	–		M+		
22	POS Entry Mode Code	M	C+			M	
25	POS Cond Code	M	→	M	→	M	M
26	POS PIN Capture Code	C	→			C	
28	Amt, Trans Fee	M	C-			C	
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	O	–				

Table 140: ATM Deposits Reversal

Field Number and Name		Acquirer Advice				Acquirer Switch Advice	
		0420		0430		0420	0430
		Acqr	VIC	Issr	VIC	VIC	Acqr
34	Accptc Env	C	C+	C	C+	C	
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Resp			C	→		C
39	Resp Code		C+	M	→	M	M
41	Card Accptr Termnl ID	M	→	M	→	M	M
42	Card Accptr ID Code	M	→	M	→	M	M
43	Card Accptr Name/Loc	M	→			M	
44.1	Resp Source/Rsn Code				M+	M	
44.11	Orig Resp Code				C+		
48	Addtnl Data—Private (Usage = 2 or 9a)	O	→	O	C+		
49	Currncy Code, Trans	M	→	M	→	M	
50	Currncy Code, Settlmt		C+		C+	C	
51	Currncy Code, Cdhldr Billing		C+			C	
54	Addtnl Amts	O	→			C	
59	Natl POS Geo Data	M	→			M	
60.1	Terminal Type	O	→			C	
60.2	Term Entry Cap	O	→			C	
60.9	Crdhldr ID Method		C+			C	
62.0	Bitmap (Field 62)	C	→	C	→	C	C
62.2	Trans Idfr		M+	O	C+	M	O
62.21	Risk Score		C+		C-	C	
62.22	Condition Codes		C+		C-	C	
62.23	Product ID	O	C+	C	C+	C	O
62.27	ATM Routing Table Unique Identifier	C					
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M
63.3	Msg Rsn Code	C	→			C	

Table 140: ATM Deposits Reversal

Field Number and Name		Acquirer Advice				Acquirer Switch Advice	
		0420		0430		0420	0430
		Acqr	VIC	Issr	VIC	VIC	Acqr
63.4	STIP/Switch Rsn Code		C+			M	
63.19	Fee Prgrm Indctr		C+		C+	C	C
102	Acct ID 1	C	C+	C	C+	C	
115	Addtnl Trace Data	O	C-		C+		
126.0	Bitmap (Field 126)	C	C-				
126.12	Svc Indctrs	C	C-				

System-Generated Financial Transactions

This section also includes ATM Deposits adjustments (excluding international cash deposits).

0220 Cash Disbursement Adjustment

Cash disbursement adjustment messages are used to adjust the value of an ATM withdrawal, usually within a minute or two of the original transaction. Adjustments can be for a debit or credit amount.

The most common cash disbursement adjustment is for a partial dispense or misdispense when the amount dispensed by the ATM did not match the amount approved by the issuer.

Adjustments are invalid for balance inquiries or account transfers (domestic only). Adjustments cannot be reversed by the acquirer but can be charged back by the issuer.

Adjustments impact settlement.

**Table 141: Cash Disbursement Adjustment/Dispute Response Financial Adjustment
Status Advice: Misdispense**

Field Number and Name		Acquirer Advice				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
—	Second Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→			M	
5	Amt, Settlmt		C+		C+		
6	Amt, Cdhldr Billing		C+				
7	Transmsn Date/time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+		

**Table 141: Cash Disbursement Adjustment/Dispute Response Financial Adjustment
Status Advice: Misdisperse**

Field Number and Name		Acquirer Advice				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
10	Conv Rate, Cdhldr Billing		C+				
11	Sys Trace Audit Nbr	M	→	M	→	M	M
12	Time, Local Trans	M	→				
13	Date, Local Trans	M	→			M	M
14	Date, Expr	C	→				
15	Date, Settlmt		M+	M	→	M	M
16	Date, Conv		C+		C+		
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	M	M
20	PAN Extnd, Cntry Code				M+		
22	POS Entry Mode Code	M	→				
25	POS Cond Code	M	→	M	→	M	M
28	Amt, Trans Fee	C	C-				
32	Acqng Inst ID Code	M	C+	M	→	M	M
33	Fwdng Inst ID Code	C	→				
34	Accptc Env	C	C+	C	C+		
37	Retrieval Ref Nbr	M	→	M	→	M	M
39	Resp Code		C+	M	→	M	
41	Card Acqptr Termnl ID	M	→	M	→	C	C
42	Card Acqptr ID Code	M	→	M	→	M	M
43	Card Acqptr Name/Loc	M	→			M	
44.11	Original Resp Code				C+		

**Table 141: Cash Disbursement Adjustment/Dispute Response Financial Adjustment
Status Advice: Misdisperse**

Field Number and Name		Acquirer Advice				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
46	Amounts, Fees		C+				
48	Addtnl Data—Private					M	
49	Currncy Code, Trans	M	→			M	
50	Currncy Code, Settlmt		C+				
51	Currncy Code, Cdhldr Billing		C+				
54	Addtnl Amts		C+				
59	Natl POS Geo Data	C	→				
60.1	Terminal Type	C	→			M	
60.2	Term Entry Cap	C	→			M	
62.0	Bitmap (Field 62)	C	→	C	C	M	M
62.1	Auth Char Indctr	C	→	O	C+		
62.2	Trans Idfr	M	→	O	C+	M	M
62.23	Product ID	O	O+	O	O+	M	O
62.24	Program Idfr	O	O+	O	O+		
62.25	Spnd Qlfd Indctr		C	O	C	C	O
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M
63.3	Msg Rsn Code	M	→			M	
63.4	STIP/Switch Rsn Code		C+			M	
63.13	Decimal Pos Indctr	C	C+	C	C+		
63.14	Issr Currncy Conv Data		C+				
63.19	Fee Prgrm Indctr		C+		C+		

**Table 141: Cash Disbursement Adjustment/Dispute Response Financial Adjustment
Status Advice: Misdispense**

Field Number and Name		Acquirer Advice				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
63.21	Charge Indctr		C+				
90	Orig Data Elemts	O	C+	C	→		
102	Acct ID 1	C	C+	O	C+		
114	Domestic and Localized Data	C	→				
115	Addtnl Trace Data	O	C-		C+		
117	National Use	C	C-	C	C-		
119	Settlement Service Data	C	C-				
126.0	Bitmap (Field 126)	C	C-				
126.12	Svc Indctrs	C	C-				
126.19	DCC Indctr	C	-				

0220 ATM Deposits: Adjustment

This table displays the field requirements for an ATM Deposits adjustment request.

**Table 142: ATM Deposits Adjustment Request (excluding international cash deposits)/
Dispute Financial Adjustment Status Advice**

Field Number and Name		Acquirer Advice				Dispute Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
—	Second Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→			M	
5	Amt, Settlmt		C+		C+		
6	Amt, Cdhldr Billing		C+				
7	Transmsn Date/time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+		
10	Conv Rate, Cdhldr Billing		C+				
11	Sys Trace Audit Nbr	M	→	M	→	M	M
13	Date, Local Trans	M	→			M	
15	Date, Settlmt		M+	M	→	M	M
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	M	M
20	PAN Extnd, Cntry Code				M+		
25	POS Cond Code	M	→	M	→	M	M
28	Amt, Trans Fee	C	C-				
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	C	→				

**Table 142: ATM Deposits Adjustment Request (excluding international cash deposits)/
Dispute Financial Adjustment Status Advice**

Field Number and Name		Acquirer Advice				Dispute Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
34	Accptc Env	C	C+	C	C+		
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Resp	O	→			M	
39	Resp Code			M	→	M	
41	Card Acceptor Termnl ID	M	→	M	→	C	C
42	Card Acceptor ID Code	M	→	M	→	M	M
43	Card Acceptor Name/Loc	M	→			M	
44.1	Resp Source/Rsn Code				C+		
48	Addtnl Data—Private					M	
44.11	Original Resp Code				C+		
49	Currncy Code, Trans	M	→			M	
50	Currncy Code, Settlmt		C+		C+		
51	Currncy Code, Cdhldr Billing		C+				
59	Natl POS Geo Data	C	→				
60.1	Terminal Type	C	→			M	
60.2	Term Entry Cap	C	→			M	
62.0	Bitmap (Field 62)	C	→	C	C+	M	M
62.2	Trans Idfr	O	→	O	C+	M	M
62.23	Product ID	O	O+	O	O+	M	O
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M
63.3	Msg Rsn Code	M	→			M	

**Table 142: ATM Deposits Adjustment Request (excluding international cash deposits)/
Dispute Financial Adjustment Status Advice**

Field Number and Name		Acquirer Advice				Dispute Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
63.19	Fee Prgrm Indctr	M	→	C	C+	M	
90	Orig Data Elemts	O	C+	C	→		
102	Acct ID 1	C	C+	O	C+		
115	Addtnl Trace Data	O	C-		C+		
126.0	Bitmap (Field 126)	C	→				
126.12	Svc Indctrs	C	→				

Exception Transactions

The following are messages used for exception processing for original ATM financial transactions:

0220 Back-Office Adjustment

0422 Dispute Financial

0422 Dispute Financial Reversal

0220 Dispute Response Financial

0220 Fee Collection/Funds Disbursement

This section includes dispute financials and dispute response financials for ATM Deposits.

0220 Back-Office Adjustment

Back-office adjustment messages are used to request an adjustment to a financial transaction that has changed or is incorrect. Adjustments can be for a debit or credit amount.

Back-office adjustments are used by acquirers when a processing error is identified during or after ATM reconciliation.

Adjustments cannot be reversed by the acquirer but can be charged back by the issuer.

Adjustments impact settlement.

This table displays the field requirements for a back-office adjustment.

Table 143: Back-Office Adjustment and Dispute Response Financial Adjustment

Field Number and Name		Acquirer Advice				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
—	Second Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→			M	

Table 143: Back-Office Adjustment and Dispute Response Financial Adjustment

Field Number and Name		Acquirer Advice				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
Acqr	VIC	Issr	VIC	VIC	Acqr		
5	Amt, Settlmt		C+		C+		
6	Amt, Cdhdr Billing		C+				
7	Transmsn Date/time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+		
10	Conv Rate, Cdhdr Billing		C+				
11	Sys Trace Audit Nbr	M	→	M	→	M	M
12	Time, Local Trans	M	→				
13	Date, Local Trans	M	→			M	
15	Date, Settlmt		M+	M	→	M	M
16	Date, Conv		C+		C+		
18	Mchnt Type	M	→			M	M
19	Acqng Inst Cntry Code	C	→	C	→	M	M
20	PAN Extnd, Cntry Code				M+		
22	POS Entry Mode Code	M	→				
25	POS Cond Code	M	→	M	→	M	M
28	Amt, Trans Fee	C	C-				
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	C	→				
34	Accptc Env	C	C+	C	C+		
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Response	O	→			M	
39	Resp Code			M	→	M	
41	Card Accptr Termnl ID	M	→	M	→	C	C
42	Card Accptr ID Code	M	→	M	→	M	M

Table 143: Back-Office Adjustment and Dispute Response Financial Adjustment

Field Number and Name		Acquirer Advice				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
43	Card Acceptor Name/Loc	M	→			M	
44	Addtl Resp Data	C	→				
44.3	Addtl Token Resp Information		C+	O	C+		
46	Amounts, Fees		C+				
44.11	Original Resp Code				C+		
48	Addtl Data—Private		C+	O	→	M	
49	Currncy Code, Trans	M	→			M	
50	Currncy Code, Settlmt		C+		C+		
51	Currncy Code, Cdhldr Billing		C+				
54	Addtl Amts		C+				
59	Natl POS Geo Data	C	→				
60.1	Terminal Type	C	→			M	
60.2	Term Entry Cap	C	→			M	
62.0	Bitmap (Field 62)	C	→	C	C	M	M
62.1	Auth Char Indctr	C	→	O	C+		
62.2	Trans Idfr	M	→	O	C+	M	M
62.23	Product ID	O	O+	O	O+	M	O
62.24	Program Idfr	O	O+	O	O+		
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M
63.3	Msg Rsn Code	M	→			M	
63.4	STIP/Switch Rsn Code		C+			M	
63.13	Decimal Pos Indctr	C	C+	C	C+		
63.14	Issr Currncy Conv Data		C+				

Table 143: Back-Office Adjustment and Dispute Response Financial Adjustment

Field Number and Name		Acquirer Advice				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
63.19	Fee Program Indctr	C	C+	C	C+		
63.21	Charge Indctr		C+				
90	Orig Data Elemts	O	C+	C	→		
102	Acct ID 1			O	→		
115	Addtnl Trace Data	O	C-		C+		
117	National Use	C	C-	C	C-		
119	Settlement Service Data	C	C-				
126.0	Bitmap (Field 126)	C	→				
126.12	Svc Indctrs	C	→				

Dispute Financial and Dispute Financial Status Advice (0422 and 0480)

Dispute financials and dispute financial status advice messages are used for dispute processing, subject to the dispute rules of the card program.

A dispute financial is used by an issuer to return a previously accepted financial transaction to an acquirer. Issuers can dispute posted transactions that are disputed by the cardholder or identified as invalid by the issuer.

If an original dispute financial cannot be delivered to the acquirer, it is placed in the Advice File and field 63.4 is added.

STIP advices are created when the acquirer is unable to respond to the original dispute financial message.

Dispute financials affect settlement totals. Dispute financial status advices do not.

This table displays the field requirements for a dispute financial.

Table 144: Dispute Financial and Dispute Financial Status Advice (0422 Chargeback)

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
—	Second Bitmap	M	→	M	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→			M	
5	Amt, Settlmt		C+		C+		
7	Transmsn Date/Time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+		
11	Sys Trace Audit Nbr	M	→	M	→	M	M
13	Date, Local Trans	M	→			M	
15	Date, Settlmt		M+	M	→	M	M
16	Date, Conv		C+		C+		

Table 144: Dispute Financial and Dispute Financial Status Advice (0422 Chargeback)

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	M	M
20	PAN Extnd, Cntry Code	C	M+				
25	POS Cond Code	M	→	M	→	M	M
28	Amt, Trans Fee	C	C-				
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	O	→				
34	Accptc Env	C	C+	C	C+		
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Resp	C	→			M	
39	Resp Code			M	→	M	
41	Card Acptr Termnl ID	M	→	M	→	C	C
42	Card Acptr ID Code	M	→	M	→	M	M
43	Card Acptr Name/Loc	M	→			M	
44	Addtnl Resp Data	C	→				
44.11	Orig Resp Code				C+		
48	Addtnl Data—Private	M	→	O	→	M	
49	CurrCy Code, Trans	M	→			M	
50	CurrCy Code, Settlmt		C+		C+		
59	Natl POS Geo Data	C	→				
60.1	Terminal Type	C	→			M	
60.2	Term Entry Cap	C	→			M	
62.0	Bitmap (Field 62)	C	→	C	C+	M	M
62.1	Auth Char	C	→	O	C+		

Table 144: Dispute Financial and Dispute Financial Status Advice (0422 Chargeback)

Field Number and Name		Original				Dispute Financial Status Advice	
						VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
62.2	Trans Idfr	M	→	O	C+	M	M
62.23	Product ID	O	O+	O	O+	M	O
62.24	Program Idfr	O	O+	O	O+		
62.25	Spnd Qlfd Indctr	O	C+		C+	C	O
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M
63.3	Msg Rsn Code	M	→			M	
63.4	STIP/Switch Rsn Code		C+			M	
63.6	Chgbk Reduct/BII Flags	C	→				
63.13	Decimal Pos Indctr	C	C+	C	C+		
63.19	Fee Prgm Indctr	C	→	C	C+		
90	Orig Data Elemts	C	→	C	→		
111	Addnl Trans-Spcfc Data		C+	C	C+	C	
115	Addtnl Trace Data	O	C-		C+		
117	National Use	C	C-	C	C-		
119	Settlement Service Data	C	C-				
126.0	Bitmap (Field 126)	C	→				
126.12	Svc Indctrs	C	→				
126.19	DCC Indctr	C	→	C	→		

ATM Deposits Dispute Financial and Dispute Financial Status Advice (0422 and 0480)

This table shows the field requirements for an ATM Deposits dispute financial request.

Table 145: ATM Deposits Dispute Financial and Dispute Financial Status Advice (0422 Chargeback)

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
—	Second Bitmap	M	→	M	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→			M	
5	Amt, Settlmt		C+		C+		
6	Amt, Cdhldr Billing		C+				
7	Transmsn Date/Time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+		
10	Conv Rate, Cdhldr Billing						
11	Sys Trace Audit Nbr	M	→	M	→	M	M
13	Date, Local Trans	M	→			M	
15	Date, Settlmt		M+	M	→	M	M
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	M	M
20	PAN Extnd, Cntry Code	C	M+				
25	POS Cond Code	M	→	M	→	M	M
28	Amt, Trans Fee	C	C-				
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	O	→				

Table 145: ATM Deposits Dispute Financial and Dispute Financial Status Advice (0422 Chargeback)

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
34	Accptc Env	C	C+	C	C+		
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Resp	C	→			M	
39	Resp Code			M	→	M	
41	Card Acqptr Termnl ID	M	→	M	→	C	C
42	Card Acqptr ID Code	M	→	M	→	M	M
43	Card Acqptr Name/Loc	M	→			M	
44.1	Addtnl Resp Data				C+		
44.11	Orig Resp Code				C+		
48	Addtnl Data—Private (Usage = 2 or 9a)	M	→	O	→	M	
49	Currncy Code, Trans	M	→			M	
50	Currncy Code, Settlmt		C+		C+		
51	Currncy Code, Cdhldr Billing	C	→				
59	Natl POS Geo Data	C	→				
60.1	Terminal Type	C	→			M	
60.2	Term Entry Cap	C	→			M	
62.0	Bitmap (Field 62)	C	→	C	→	M	M
62.2	Trans Idfr	M	→	O	C+	M	M
62.23	Product ID	O	O+	O	O+	M	O
62.25	Spnd Qlfd Indctr	O	C		C	C	O
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	
63.3	Msg Rsn Code	M	→			M	
63.19	Fee Pgrm Indctr	M	→	C	C+		

Table 145: ATM Deposits Dispute Financial and Dispute Financial Status Advice (0422 Chargeback)

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
90	Orig Data Elemts	C	→	C	→		
111	Addnl Trans-Spcfc Data	C	C+		C+	C	
115	Addtnl Trace Data	O	C-		C+		
126.0	Bitmap (Field 126)	C	→				
126.12	Svc Indctrs	C	→				

Dispute Financial Reversal and Dispute Financial Reversal Status Advice (0422 and 0480)

Dispute financial reversal and dispute financial reversal status advice messages are used by the issuer for disputes that were sent in error to acquirers.

If an original dispute financial reversal cannot be delivered to the acquirer, it is placed in the Advice File as a store-and-forward advice, and field 63.4 is added.

Dispute financial reversals affect settlement totals. Dispute financial reversal status advices do not.

This table displays the field requirements for a dispute financial reversal.

Table 146: Dispute Financial Reversal and Dispute Financial Reversal Status Advice (0422 Chargeback)

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
—	Second Bitmap	M	→	M	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→			M	
5	Amt, Settlmt		C+		C+		
7	Transmsn Date/Time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+		
11	Sys Trace Audit Nbr	M	→	M	→	M	M
13	Date, Local Trans	M	→			M	
15	Date, Settlmt		M+	M	→		
16	Date, Conv		C+		C+		
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	M	M

Table 146: Dispute Financial Reversal and Dispute Financial Reversal Status Advice (0422 Chargeback)

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
20	PAN Extnd, Cntry Code	C	M+				
25	POS Cond Code	M	→	M	→	M	M
28	Amt, Trans Fee	C	C-				
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	O	→				
34	Accptc Env	C	C+	C	C+		
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Resp	C	→			M	
39	Resp Code			M	→	M	
41	Card Acceptor Termnl ID	M	→	M	→	C	C
42	Card Acceptor ID Code	M	→	M	→	M	M
43	Card Acceptor Name/Loc	M	→			M	
44	Addtnl Resp Data	C	→				
44.11	Orig Resp Code				C+		
48	Addtnl Data—Private	M	→	O	→	M	
49	Currency Code, Trans	M	→			M	
50	Currency Code, Settlmt		C+		C+		
59	Natl POS Geo Data	C	→				
60.1	Terminal Type	C	→			M	
60.2	Term Entry Cap	C	→			M	
62.0	Bitmap (Field 62)	C	→	C	C+	M	M
62.1	Auth Char Indctr	C	→	O	C+		
62.2	Trans Idfr	M	→	O	C+	M	M
62.23	Product ID	O	O+	O	O+	M	O

Table 146: Dispute Financial Reversal and Dispute Financial Reversal Status Advice (0422 Chargeback)

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
62.25	Spnd Qlfd Indctr	O	C		C	C	O
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M
63.3	Msg Rsn Code	M	→			M	
63.4	STIP/Switch Rsn Code		C+			M	
63.6	Chgbk Reduct/BII Flags	C	→				
63.13	Decimal Pos Indctr	C	C+	C	C+		
63.19	Fee Prgrm Indctr	C	→	C	C+		
90	Orig Data Elemts	C	→	C	→		
115	Addtnl Trace Data	O	C-		C+		
117	National Use	C	C-	C	C-		
119	Settlement Service Data	C	C-				
126.0	Bitmap (Field 126)	C	→				
126.12	Svc Indctrs	C	→				
126.19	DCC Indctr	C	→	C	→		

Dispute Response Financial and Dispute Response Financial Status Advice (0220 and 0282)

Dispute Response Financial messages are used by an acquirer to resubmit a transaction that is disputed by an issuer, subject to the dispute rules of the card program.

If an original dispute response financial cannot be delivered to the issuer, it is placed in the Advice File and field 63.4 is added. STIP advices are created when the acquirer is unable to respond to the original dispute response financial.

Dispute response financials affect settlement totals. Dispute response financial status advices do not.

This table displays the field requirements for a dispute response financial.

Table 147: Dispute Response Financial and Dispute Response Financial Status Advice (0220 Representation)

Field Number and Name		Original				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Issr
—	Second Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→			M	
5	Amt, Settlmt		C+		C+		
6	Amt, Cdhldr Billing		C+				
7	Transmsn Date/Time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+		
10	Conv Rate, Cdhldr Billing		C+				
11	Sys Trace Audit Nbr	M	→	M	→	M	M
13	Date, Local Trans	M	→			M	
15	Date, Settlmt		M+	M	→		

Table 147: Dispute Response Financial and Dispute Response Financial Status Advice (0220 Representation)

Field Number and Name		Original				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Issr
16	Date, Conv		C+		C+		
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	M	M
20	PAN Extnd, Cntry Code	C	→	C	M+		
25	POS Cond Code	M	→	M	→	M	M
28	Amt, Trans Fee	C	C-				
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	C	→				
34	Accptc Env	C	C+	C	C+		
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Response	O	→			M	
39	Resp Code			M	→	M	
41	Card Accptr Termnl ID	M	→	M	→	C	C
42	Card Accptr ID Code	M	→	M	→	M	M
43	Card Accptr Name/Loc	M	→			M	
44	Addtnl Resp Data	C	→	C	→		
48	Addtnl Data—Private	C	→	O	→	M	
49	Currncy Code, Trans	M	→			M	
50	Currncy Code, Settlmt		C+		C+		
51	Currncy Code, Cdhldr Billing		C+				
54	Addtnl Amts		C+				
59	Natl POS Geo Data	C	→				
60.1	Terminal Type	C	→			M	

Table 147: Dispute Response Financial and Dispute Response Financial Status Advice (0220 Representation)

Field Number and Name		Original				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Issr
60.2	Term Entry Cap	C	→			M	
62.0	Bitmap (Field 62)	C	→	C	C+	M	M
62.1	Auth Char Indctr	C	→	O	C+		
62.2	Trans Idfr	M	→	O	C+	M	M
62.23	Product ID	O	O+	O	O+	M	O
62.24	Program Idfr	O	O+	O	O+		
62.25	Spnd Qlfd Indctr		C+	O	C+	C	O
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M
63.3	Msg Rsn Code	M	→			M	
63.4	STIP/Switch Rsn Code		C+			M	
63.13	Decimal Pos Indctr	C	C+	C	C+		
63.14	Issr Curryy Conv Data		C+				
63.19	Fee Prgm Indctr	C	→	C	C+		
90	Orig Data Elemts	C	→	C	→		
102	Acct ID 1			O	→		
111	Addnl Trans-Spcfc Data	C	C+		C+	C	
115	Addtnl Trace Data	O	C-		C+		
117	National Use	C	C-	C	C-		
119	Settlement Service Data	C	C-				
126.0	Bitmap (Field 126)	C	→				
126.12	Svc Indctrs	C	→				
126.19	DCC Indctr	C	-				

ATM Deposits Dispute Response Financial and Dispute Response Financial Status Advice (0220 and 0282)

This table displays the field requirements for an ATM Deposits dispute response financial request.

Table 148: ATM Deposits Dispute Response Financial and Dispute Response Financial Status Advice (0220 Representation)

Field Number and Name		Original				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
—	Second Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→			M	
5	Amt, Settlmt		C+		C+		
6	Amt, Cdhldr Billing		C+				
7	Transmsn Date/Time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+		
10	Conv Rate, Cdhldr Billing		C+				
11	Sys Trace Audit Nbr	M	→	M	→	M	M
13	Date, Local Trans	M	→			M	
15	Date, Settlmt		M+	M	→		
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	M	M
20	PAN Extnd, Cntry Code	C	→	C	M+		
25	POS Cond Code	M	→	M	→	M	M
28	Amt, Trans Fee	C	C-				

Table 148: ATM Deposits Dispute Response Financial and Dispute Response Financial Status Advice (0220 Representation)

Field Number and Name		Original				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	C	→				
34	Accptc Env	C	C+	C	C+		
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Response	O	→			M	
39	Resp Code			M	→	M	
41	Card Accptr Termnl ID	M	→	M	→	C	C
42	Card Accptr ID Code	M	→	M	→	M	M
43	Card Accptr Name/Loc	M	→			M	
44.1	Resp Source/Rsn Code				C+		
44.11	Orig Resp Code				C+		
48	Addtnl Data—Private	O	→	O	C+	M	
49	Currncy Code, Trans	M	→			M	
50	Currncy Code, Settlmt		C+		C+		
51	Currncy Code, Cdhldr Billing		C+				
59	Natl POS Geo Data	C	→				
60.1	Terminal Type	C	→			M	
60.2	Term Entry Cap	C	→			M	
62.0	Bitmap (Field 62)	C	→	C	C+	M	M
62.2	Trans Idfr	M	→	O	C+	M	M
62.23	Product ID	O	O+	O	O+	M	O
62.25	Spnd Qlfd Indctr		C+	O	C+	C	O
63.0	Bitmap (Field 63)	M	→	M	→	M	M

Table 148: ATM Deposits Dispute Response Financial and Dispute Response Financial Status Advice (0220 Representation)

Field Number and Name		Original				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
63.1	Netwk ID	M	→	M	→	M	M
63.3	Msg Rsn Code	M	→			M	
63.19	Fee Prgrm Indctr	M	→	C	C+		
90	Orig Data Elemts	C	→	C	→		
102	Acct ID 1			O	→		
111	Addnl Trans-Spcfc Data	C	C+		C+	C	
115	Addtnl Trace Data	O	C-		C+		
126.0	Bitmap (Field 126)	C	→				
126.12	Svc Indctrs	C	→				

0220/0422 Fee Collection/Funds Disbursement

Fee Collection/Funds Disbursement messages are used in financial transactions or issuer reversal messages for transactions that pay or collect a Visa or Plus fee. Fee Collection/Funds Disbursement messages can be acquirer-generated (0220) or issuer-generated (0422).

Visa also sends 0422 transactions to Cirrus (network 0006) and Mastercard (network 0007) acquirers. A message format for these can be found near the end of this section.

Fee collections or funds disbursements must not be disputed using VROL dispute financials. These messages cannot be declined, but they can be sent back to the originator.

Fee collections and funds disbursements impact settlement.

The next two tables display the field requirements for an acquirer-generated fee collection or funds disbursement. The first table is for Visa, the second is for Plus.

Table 149: Acquirer-Generated Fee Collection or Funds Disbursement (Visa)

Field Number and Name		0220		0230	
		Acqr	VIC	Issr	VIC
—	Second Bitmap	M	→	M	→
2	Primary Acct Nbr	C	→	C	→
3	Processing Code	M	→	M	→
4	Amt, Trans	M	→		
5	Amt, Settlmt		C+		C+
6	Amt, Cdhldr Billing		C+		
7	Transmsn Date/Time	M	→	M	→
9	Conv Rate, Settlmt		C+		C+
10	Conv Rate, Cdhldr Billing		C+		
11	Sys Trace Audit Nbr	M	→	M	→
15	Date, Settlmt		M+	M	→
16	Date, Conv		C+		C+
18	Mchnt Type	C	C-		
19	Acqng Inst Cntry Code	M	→	M	→
32	Acqng Inst ID Code	M	→	M	→
34	Accptc Env	C	C+	C	C+
37	Retrieval Ref Nbr	M	→	M	→
39	Resp Code			M	→

Table 149: Acquirer-Generated Fee Collection or Funds Disbursement (Visa)

Field Number and Name		0220		0230	
		Acqr	VIC	Issr	VIC
44.11	Orig Resp Code				C+
48	Addtnl Data—Private; Usage 5 (Visa & Plus)	M	→		
49	Currncy Code, Trans	M	→		
50	Currncy Code, Settlmt		C+		C+
51	Currncy Code, Cdhldr Billing		C+		
62.0	CPS Field Bitmap	C	C+		C+
62.2	Trans Idfr	C	C+		C+
63.0	Bitmap (Field 63)	M	→	M	→
63.1	Netwk ID	M	→	M	→
63.3	Msg Rsn Code	M	→		
63.4	STIP/Switch Rsn Code		C+		
68	Rcvng Inst Cntry Code	C	→	C	→
100	Rcvng Inst ID Code	C	→	C	→
111	Addnl Trans-Spcfc Data	C	C+		C+
115	Addtnl Trace Data	O	C-		C+

Table 150: Acquirer-Generated Fee Collection or Funds Disbursement (Plus)

Field Number and Name		0220		0230	
		Acqr	VIC	Issr	VIC
—	Second Bitmap	M	→	M	→
2	Primary Acct Nbr	C	→	C	→
3	Processing Code	M	→	M	→
4	Amt, Trans	M	→		
5	Amt, Settlmt		C+		C+
6	Amt, Cdhldr Billing		C+		
7	Transmsn Date/Time	M	→	M	→
9	Conv Rate, Settlmt		C+		C+
10	Conv Rate, Cdhldr Billing		C+		
11	Sys Trace Audit Nbr	M	→	M	→

Table 150: Acquirer-Generated Fee Collection or Funds Disbursement (Plus)

Field Number and Name		0220		0230	
		Acqr	VIC	Issr	VIC
15	Date, Settlmt		M+	M	→
16	Date, Conv		C+		C+
18	Mchnt Type	O	C-		
19	Acqng Inst Cntry Code	C	→	C	→
32	Acqng Inst ID Code	M	→	M	→
34	Accptc Env	C	C+	C	C+
37	Retrieval Ref Nbr	M	→	M	→
39	Resp Code			M	→
44.11	Orig Resp Code				C+
48	Addtnl Data—Private; Usage 5 (Visa & Plus)	M	→		
49	Currncy Code, Trans	M	→		
50	Currncy Code, Settlmt		C+		C+
51	Currncy Code, Cdhldr Billing		C+		
62.0	CPS Field Bitmap		O+		
62.2	Trans Idfr		O+		
63.0	Bitmap (Field 63)	M	→	M	→
63.1	Netwk ID	M	→	M	→
63.3	Msg Rsn Code	M	→		
63.4	STIP/Switch Rsn Code		C+		
68	Rcvg Inst Cntry Code	C	→	C	→
100	Rcvng Inst ID Code	C	→	C	→
111	Addnl Trans-Spcfc Data	C	C+		C+
115	Addtnl Trace Data	O	C-		C+

The next two tables show the field requirements for an issuer-generated fee collection or funds disbursement. The first table is for Visa, the second is for Plus.

Table 151: Issuer-Generated Fee Collection or Funds Disbursement (Visa)

Field Number and Name		0422		0432	
		Issr	VIC	Acqr	VIC
—	Second Bitmap	C	→	C	→
2	Primary Acct Nbr	C	→	C	→
3	Processing Code	M	→	M	→
4	Amt, Trans	M	→		
5	Amt, Settlmt		C+		C+
7	Transmsn Date/Time	M	→	M	→
9	Conv Rate, Settlmt		C+		C+
11	Sys Trace Audit Nbr	M	→	M	→
15	Date, Settlement		M+	M	→
16	Date, Conv		C+		C+
19	Acqng Inst Cntry Code	M	→	M	→
32	Acqng Inst ID Code	M	→	M	→
33	Fwdng Inst ID Code	M	→	M	→
34	Accptc Env	C	C+	C	C+
37	Retrieval Ref Nbr	M	→	M	→
39	Resp Code			M	→
44.11	Orig Resp Code				C+
48	Addtnl Data—Private; Usage 5 (Visa & Plus)	M	→		
49	Currncy Code, Trans	M	→		
50	Currncy Code, Settlmt		C+		
62.0	CPS Field Bitmap	C	C+		C+
62.2	Trans Idfr	C	C+		C+
63.0	Bitmap (Field 63)	M	→	M	→
63.1	Netwk ID	M	→	M	→
63.3	Msg Rsn Code	M	→		
63.4	STIP/Switch Rsn Code		C+		
111	Addnl Trans-Spcfc Data		C+	C	C+
115	Addtnl Trace Data	O	C-		C+

Table 152: Issuer-Generated Fee Collection or Funds Disbursement (Plus)

Field Number and Name		0422		0432	
		Issr	VIC	Acqr	VIC
—	Second Bitmap	C	→	C	→
2	Primary Acct Nbr	C	→	C	→
3	Processing Code	M	→	M	→
4	Amt, Trans	M	→		
5	Amt, Settlmt		C+		C+
7	Transmsn Date/Time	M	→	M	→
9	Conv Rate, Settlmt		C+		C+
11	Sys Trace Audit Nbr	M	→	M	→
15	Date, Settlement		M+	M	→
16	Date, Conv		C+		C+
19	Acqng Inst Cntry Code	C	→	C	→
32	Acqng Inst ID Code	M	→	M	→
33	Fwdng Inst ID Code	M	→	M	→
34	Accptc Env	C	C+	C	C+
37	Retrieval Ref Nbr	M	→	M	→
39	Resp Code			M	C+
44.11	Orig Resp Code				C+
48	Addtnl Data—Private; Usage 5 (Visa & Plus)	M	→		
49	Currncy Code, Trans	M	→		
50	Currncy Code, Settlmt		C+		C+
63.0	Bitmap (Field 63)	M	→	M	→
63.1	Netwk ID	M	→	M	→
63.3	Msg Rsn Code	M	→		
63.4	STIP/Switch Rsn Code		C+		
111	Addnl Trans-Spcfc Data		C+	C	C+
115	Addtnl Trace Data	O	C-		C+

This table displays the message format that Visa uses to send fee collection or funds disbursement transactions to Cirrus and Mastercard ATM acquirers.

Table 153: Visa-Generated Fee Collection or Funds Disbursement (Cirrus and Mastercard)

Field Number and Name		0422	0432
		Visa	Acqr
—	Second Bitmap	M	M
2	Primary Acct Nbr	C	C
3	Processing Code	M	M
4	Amt, Trans	M	
5	Amt, Settlmt	C	
7	Transmsn Date/Time	M	M
9	Conv Rate, Settlmt	C	
11	Sys Trace Audit Nbr	M	M
15	Date, Settlmt	M	M
16	Date, Conv	C	
19	Acqng Inst Cntry Code	C	C
32	Acqng Inst ID Code	M	M
33	Fwdng Inst ID Code	M	M
34	Accptc Env	C	C+
37	Retrieval Ref Nbr	M	M
39	Resp Code		M
48	Addtnl Data—Private	M	
49	Crrcy Code, Trans	M	
50	Crrcy Code, Settlmt	C	
63.0	Bitmap (Field 63)	M	M
63.1	Netwk ID	M	M
63.3	Msg Rsn Code	M	
63.4	STIP/Switch Rsn Code	C	
100	Rcvg Inst ID Code	C	C
111	Addnl Trans-Spcfc Data	C	C+

0220 Visa-Generated Funds Disbursement Transactions (Visa and Plus)

Visa uses a funds disbursement message to credit ATM Format Conversion (AFC) issuers with the fee for BASE II-acquired ATM transactions that fail the CPS/ATM fee edit criteria. This mandatory message has settlement impact and is sent when the acquirer's BASE II Draft Data TC 07 transactions are processed.

This table displays the field requirements for this message.

Table 154: Visa-Generated Funds Disbursement

Field Number and Name		0220	0230
		Visa	Issr
—	Second Bitmap	M	M
2	Primary Acct Nbr	C	C
3	Processing Code	M	M
4	Amt, Trans	M	
5	Amt, Settlmt	C	
6	Amt, Cdhldr Billing	C	
7	Transmsn Date/Time	M	M
9	Conv Rate, Settlmt	C	
10	Conv Rate, Cdhldr Billing	C	
11	Sys Trace Audit Nbr	M	M
15	Date, Settlmt	M	M
16	Date, Conv	C	
19	Acqng Inst Cntry Code	C	C
32	Acqng Inst ID Code	M	M
34	Accptc Env	C	C+
37	Retrieval Ref Nbr	M	M
48	Addtnl Data—Private; Usage 5	M	
49	Crrcy Code, Trans	M	
50	Crrcy Code, Settlmt	C	
51	Crrcy Code, Cdhldr Billing	C	
63.0	Bitmap (Field 63)	M	M

Table 154: Visa-Generated Funds Disbursement

Field Number and Name		0220	0230
		Visa	Issr
63.1	Netwk ID	M	M
63.3	Msg Rsn Code	M	
63.4	STIP/Switch Rsn Code	C	
100	Rcvng Inst ID Code	C	C
111	Addnl Trans-Spcfc Data	C+	

File Maintenance

File Maintenance message formats consist of 0302 messages and their 0312 responses for file updates and inquiries, and 0322 messages and their 0332 responses for auto-CDB file advices.

The section also contains a CDB 0120 advice and 0130 response for V.I.P. Authorization-Only issuers.

A later section contains information and message formats to support Field 142 Examples.

0302/0322 File Maintenance

File-related messages are used by issuers to update or review the cardholder records in the Account Screen Authorization File (ASAF), PIN Verification, and Risk-Level files.

These tables show the types of maintenance messages:

- File Update and Advice
- File Inquiry
- Issuer File Messages-Detail of Field 127 for Risk-Level File (R2)
- dCVV2 Participation
- Auto-CDB File Advice
- Account Screen Authorization File (ASAF)

The 0332 response is optional for V.I.P. Authorization-Only issuers.

Table 155: File Update and Advice

Field Number and Name		0302	0312	0322	0332
		Issr	VIC	VIC	Issr
—	Second Bitmap	M	M	M	M
2	Primary Acct Nbr	M	M	M	M
7	Transmsn Date/Time	M	M	M	M
11	Sys Trace Audit Nbr	M	M	M	M
15	Date, Settlmt		M+	C	C
19	Acqng Inst Cntry Code	O	O		
20	PAN Extnd, Cntry Code	C	C		
23	Card Seq Nbr	C	C	C	C
32	Acqng Inst ID			C	C

Table 155: File Update and Advice

Field Number and Name		0302	0312	0322	0332
		Issr	VIC	VIC	Issr
37	Retrieval Ref Nbr	M	M	M	M
39	Resp Code		M		M
48	Addtnl Data—Private; Usage 1b		C		
63.0	Bitmap (Field 63)	C	C	M	M
63.1	Netwk ID	O	O	M	M
63.4	STIP/Switch Rsn Code			M	
73	Date, Action	C	C	C	
91	File Update Code	M	M	M	
92	File Sec Code	O	C		
101	File Name	M	M	M	
115	Addtnl Trace Data	O	C		
127	File Maintenance	C	C	C	
127E.1	ASAF Action Code	C	C		
127E.2	CRB Region Code	C	C		
127E.3	Cardhldr Spndng Amt Limit	C	C		
127E.4	Cardhldr Spndng Cnt Limit	C	C		
127P.1	PIN Verification Data	C	C		

Table 156: File Inquiry

Field Number and Name		0302	0312
		Issr	VIC
—	Second Bitmap	M	M
2	Primary Acct Nbr	C	C
7	Transmsn Date/Time	M	M
15	Date, Settlement		M+
11	Sys Trace Audit Nbr	M	M
19	Acqng Inst Cntry Code	O	O
20	PAN Extnd, Cntry Code	C	C
23	Card Seq Nbr	C	C

Table 156: File Inquiry

Field Number and Name		0302	0312
		Issr	VIC
37	Retrieval Ref Nbr	M	M
39	Resp Code		M
48	Addtnl Data—Private; Usage 1b for Visa and Plus		C
63.0	Bitmap (Field 63)	C	C
63.1	Netwk ID	O	O
73	Date, Action		C
91	File Update Code	M	M
92	File Sec Code	O	C
101	File Name	M	M
115	Addtnl Trace Data	O	C
127	File Maintenance		C
127E.1	ASAF Action Code		C
127E.2	CRB Region Code		M
127E.3	Cardhldr Spndng Amt Limit		C
127E.4	Cardhldr Spndng Cnt Limit		C
127P.1	PIN Verification Data		C

Table 157: Issuer File Messages-Detail of Field 127 for Risk-Level File (R2)

Field Number and Name			Update		Inquiry ¹	
			0302	0312	0302	0312
			Issr	VIC	Issr	VIC
Daily Spending Limits	127R.1	Risk Level	C	C		C
	127R.2	Filler	C	C		C
	127R.3	Filler	C	C		C
	127R.4	Filler	C	C		C
	127R.5	Filler	C	C		C

Table 157: Issuer File Messages-Detail of Field 127 for Risk-Level File (R2)

Field Number and Name			Update		Inquiry ¹	
			0302	0312	0302	0312
			Issr	VIC	Issr	VIC
Activity Limits	127R.6	Travel—available	C	C		C
	127R.7	Travel—unavailable	C	C		C
	127R.8	Lodg—available	C	C		C
	127R.9	Lodg—unavailable	C	C		C
	127R.10	Auto Rental Limit—available	C	C		C
	127R.11	Auto Rental Limit—unavailable	C	C		C
	127R.12	Restaurant Limit—available	C	C		C
	127R.14	Mail/Telephone Limit—available	C	C		C
	127R.15	Mail/Telephone Limit—unavailable	C	C		C
	127R.16	Risky Purchase Limit—available	C	C		C
	127R.17	Risky Purchase Limit—unavailable	C	C		C
	127R.18	Total Purchase Limit—available	C	C		C
	127R.19	Total Purchase Limit—unavailable	C	C		C
	127R.20	Total Cash Limit—available	C	C		C
	127R.21	Total Cash Limit—unavailable	C	C		C
	127R.22	ATM Cash Limit—available	C	C		C
	127R.23	ATM Cash Limit—unavailable	C	C		C

¹Field 127 is not present unless the inquiry is successful.

Table 158: dCVV2 Participation

Field Number and Name		0302	0312
		Issr	VIC
2	Primary Acct Nbr	M	→
7	Transmsn Date/Time	M	→
11	Sys Trace Audit Nbr	M	→
15	Date, Settlement		C+
37	Retrieval Ref Nbr	M	→
39	Response Code		M

Table 158: dCVV2 Participation

Field Number and Name		0302	0312
		Issr	VIC
48	Addtnl Data—Private; Usage 1b for Visa and Plus		C+
62.2	Network ID	O	→
63.1	Date, Action	M	→
91	File Update Code	M	→
92	File Security Code	O	→
101	File Name	M	→
115	Additional Trace Data	O	→
127.PAN	dCVV2 Participation DSID 41, Tag 09	C	C+

Table 159: Auto-CDB File Advice

Field Number and Name		0322	0332
		VIC	Issr
—	Second Bitmap	M	M
2	Primary Acct Nbr	M	C
7	Transmsn Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
15	Date, Settlement	M	M
20	PAN Extnd, Cntry Code	C	C
32	Acqng Inst ID	M	M
37	Retrieval Ref Nbr	M	M
63.0	Bitmap (Field 63)	M	M
63.1	Netwk ID	M	M
63.4	STIP/Switch Rsn Code	M	
73	Date, Action	M	
91	File Update Code	M	
101	File Name	M	
127	File Maintenance	M	
127E.1	ASAF Action Code	M	
127E.2	CRB Region Code	M	

Cardholder Available Balance File Maintenance Messages (0302/0312)

These messages allow issuers to add or remove a cardholder account, and to update the cardholder available balance for STIP Available Balance service.

Table 160: Cardholder Available Balance File Maintenance Messages (0302/0312)

Field Number and Name		Cardholder Available Balance File Maintenance Request and Response	
		0302	0312
		Issr	VIC
—	Bitmap, Secondary	M	M
2	Primary Acct Nbr (PAN)	M	M
7	Transmsn Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
15	Date, Settlmt		C+
34	Accptc Env	C	C+
37	Retrieval Ref Nbr	M	M
39	Resp Code		M
48	Addtnl Data—Private		C+
54	Addtnl Amts	M	M
63.0	Bitmap (Field 63)	O	C
63.1	Netwk ID Code	O	C
63.2	Time (Preauth Time Limit)	C	C
73	Date, Action	C	C
91	File Update Code	M	M
92	File Sec Code	O	O
101	File Name	M	M
115	Addtnl Trace Data	O	C

Payment Fraud Disruption File Maintenance (0302 and 0312)

This message format is used to bypass Payment Fraud Disruption (PFD) blocking of Primary Account Numbers (PANs).

Table 161: Payment Fraud Disruption File Maintenance (0302/0312)

Field Number and Name		Payment Fraud Disruption File Maintenance Request and Response	
		0302	0312
		Issr	VIC
—	Bitmap, Secondary	M	M
2	Primary Acct Nbr	M	M
7	Transmsn Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
15	Date, Settlmt		M+
34	Accptc Env	C	C+
37	Retrieval Ref Nbr	M	M
39	Resp Code		M
48	Addtnl Data—Private		C
63.0	Bitmap (Field 63)	C	C
63.1	Netwk ID Code	O	O
91	File Update Code	M	M
101	File Name	M	M

Cardholder Database 0120 Advice and 0130 Response for Issuers

This message format, which displays the 0120 cardholder database maintenance file update advice message and 0130 response, is for Authorization-Only issuers connected to the V.I.P. System.

The 0130 response is optional for issuers.

Table 162: Cardholder Database 0120 Advice and 0130 Response for Issuers

Field Number and Name		0120	0130
		VIC	Issr
—	Bitmap, Secondary	C	C
2	Primary Acct Nbr (PAN)	M	M
3	Processing Code	M	M
4	Amt, Trans	M	M
6	Amt, Cdhldr Billing	C	
7	Transmsn Date/Time	M	M
10	Conv Rate, Cdhldr Billing	C	
11	Sys Trace Audit Nbr	M	M
14	Date, Expr	C	
18	Mchnt Type	C	
19	Acqng Inst Cntry Code	M	M
20	PAN Extnd Cntry Code	C	
22	POS Entry Mode Code	C	
23	Card Seq Nbr	C	C
25	POS Cond Code	M	M
32	Acqng Inst ID Code	M	M
33	Fwdng Inst ID Code	C	
34	Accptc Env	C	
37	Retrieval Ref Nbr	M	M
38	Auth ID Resp	C	
39	Resp Code	C	C

Table 162: Cardholder Database 0120 Advice and 0130 Response for Issuers

Field Number and Name		0120	0130
		VIC	Issr
41	Card Accptr Termnl ID	C	C
42	Card Accptr ID Code	C	C
43	Card Accptr Name/Loc	C	
44.1	Resp Source/Rsn Code	M	
44.2	Addr Verif Result Code	C	
44.5	CVV/iCVV Results Code	C	
44.6	PACM Divrsn Level	C	
44.7	PACM Divrsn Rsn Code	C	
44.8	Card Authen Results Code	C	
44.10	CVV2 Result	C	
44.13	CAVV Result	C	
48	Addtnl Data—Private	C	
49	Currncy Code, Trans	M	
51	Currncy Code, Cdhldr Billing	C	
54	Addtnl Amts	C	
55	ICC-Related Data	C	
59	Natl POS Geo Data	C	
60.1	Terminal Type	C	
60.2	Term Entry Cap	C	
60.4	Sp Cond Indctr—Extg Debt	C	
60.8	MOTO/ECI/Pymt Indctr	C	
60.9	Crdhldr ID Method	C	
60.10	Partial Auth Indctr	C	
61.1	Other Amt, Trans	C	
61.2	Other Amt, Cdhldr Billing	C	
62.0	CPS Field Bitmap	C	C
62.1	Auth Char Indctr	C	C
62.2	Trans Idfr	C	

Table 162: Cardholder Database 0120 Advice and 0130 Response for Issuers

Field Number and Name		0120	0130
		VIC	Issr
62.3	Valid/Downgrd Rsn Code	C	
62.4	Market-Specific Data Idfr	C	
62.20	Mchnt VV	C	
62.21	Risk Score	C	
62.22	Condition Codes	C	
62.23	Product ID	C	
62.24	Program Idfr	C	
63.0	Bitmap (Field 63)	M	C
63.1	Netwk ID Code	M	O
63.2	Time (Preauth Time Limit)	C	C
63.3	Msg Rsn Code	C	
63.4	STIP/Switch Rsn Code	M	
63.19	Fee Prgm Indctr	C	C
73	Date, Action	C	
91	File Update Code	M	
100	Rcvg Inst ID Code	C	C
101	File Name	M	
104	Trans-Spcfc Data	C	
117	National Use	C	
118	Intra-Cntry Data	C	
123	Verif Data	C	
126.0	Bitmap (Field 126)	C	
126.6	Cdhldr Ser Nbr	C	
126.7	Mchnt Ser Nbr	C	
126.8	Tran ID (XID)	C	
126.10	CVV2 Auth Req Data	C	
126.12	Svc Indctrs	C	
126.13	POS Environment	C	

Table 162: Cardholder Database 0120 Advice and 0130 Response for Issuers

Field Number and Name		0120	0130
		VIC	Issr
126.15	MC UCAF Indctr	C	
126.16	MC UCAF Field	C	
126.18	Agent Unique Acct Result	C	
127	File Rclds—Action and Data	C	
130	Term Capblty Profile	C	
131	Term Verif Results	C	
132	Unpredict Nbr	C	
133	Term Serial Nbr	C	
134	Visa Discret Data	C	
135	Issuer Discret Data	C	
136	Cryptogram	C	
137	App Trans Counter	C	
138	App Intchg Profile	C	
139	ARPC Resp Crypto & Code	C	
140	Issuer Auth Data	C	
144	Cryptogram Trans Type	C	
145	Term Cntry Code	C	
146	Term Trans Date	C	
147	Crypto Amt	C	
148	Crypto Crrcy Code	C	
149	Crypto Cback Amt	C	

Reconciliation (0520)

Table 163: Automatic Reconciliation Advice

Field Number and Name		0520	0530
		VIC	Acqr/Issr
—	Second Bitmap	M	M
7	Transmsn Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
15	Date, Settlmt	M	M
50	Currncy Code, Settlmt	C	C
63.0	Bitmap (Field 63)	M	M
63.1	Netwk ID	M	M
63.13	Decimal Pos Indctr	C	
66	Settlmt Code		M
69	Settlmt Inst Cntry Code	C	C
70	Netwk Mgmt Info Code	M	M
74	Credits, Nbr	M	C
75	Credits, Reversal Nbr	M	C
76	Debits Nbr	M	C
77	Debits, Reversal Nbr	M	C
86	Credits, Amt	M	C
87	Credits, Reversal Amt	M	C
88	Debits, Amt	M	C
89	Debits, Reversal Amt	M	C
97	Amount, Net Settlmt	M	C
99	Settlmt Inst ID Code	M	M

Network Management Message

Network management messages are messages that (1) establish and change the network status of a station, (2) start and stop recovery of advices, (3) request gross interchange totals from the switch, (4) conduct an echo test, and (5) manage encryption key exchange (DKE).

Station Status Messages (Field 70=0071/0072) and Advice Recovery Messages (Field 70=0078/0079) from Full Service Clients to V.I.P.

Table 164: Station Status Messages (Field 70=0071/0072) and Advice Recovery Messages (Field 70=0078/0079) from Full Service Clients to V.I.P.

Field Number and Name		0800	0810
		Sndr	Rcvr
7	Trans Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
37	Retrieval Ref Nbr	O	C
39	Resp Code		C
63.0	Bitmap (Field 63)	O	O
63.1	Netwk ID ¹	O	O
70	Netwk Mgmt Info Code	M	M

¹Field 63.1 is optional. If present, the value must be **0002**.

Station Status Messages (Field 70=0081/0082) and Advice Recovery Messages (Field 70=0088/0089) from Full Service Clients to V.I.P.

Table 165: Station Status Messages (Field 70=0081/0082) and Advice Recovery Messages (Field 70=0088/0089) from Full Service Clients to V.I.P.

Field Number and Name		0800	0810
		Sndr	Rcvr
7	Trans Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
37	Retrieval Ref Nbr	O	C
39	Resp Code		C
63.0	Bitmap (Field 63)	M	M
63.1	Netwk ID	M	M
70	Netwk Mgmt Info Code	M	M

Echo Message from Full Service Client to V.I.P.

Table 166: Echo Message from Full Service Client to V.I.P.

Field Number and Name		0800	0810
		Sndr	Rcvr
7	Trans Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
37	Retrieval Ref Nbr	O	C
39	Resp Code		C
63.0	Bitmap (Field 63)	M	M
63.1	Netwk ID	M	M
70	Netwk Mgmt Info Code ¹	M	M

¹Value in Field 70 must be **0301**.

Echo Message from V.I.P. to Full Service Client

Table 167: Echo Message from V.I.P. to Full Service Client

Field Number and Name		0800	0810
		Sndr	Rcvr
7	Trans Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
37	Retrieval Ref Nbr	M	O
39	Resp Code		C
63.0	Bitmap (Field 63)	M	M
63.1	Netwk ID	M	M
70	Netwk Mgmt Info Code ¹	M	M

¹Value in Field 70 must be **0301**.

Dynamic Key Exchange

Table 168: Dynamic Key Exchange

Field Number and Name		0800	0810
		Sndr	Rcvr
7	Trans Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
33	Fwdng Inst ID Code	C	C
39	Resp Code		M
48	Addtnl Data—Private; Usage 14	C	
53	Sec Related Cntrl Info	M	
63.0	Bitmap (Field 63)	M	M
63.1	Netwk ID	M	M
70	Netwk Mgmt Info Code	M	M
105	Dbl-Lngth DES Key (Trple DES)	C	
110	Dataset ID 04, Tag 80, Control	C	
	Dataset ID 04, Tag 81, Key-set Identifier	C	
	Dataset ID 04, Tag 83, Algorithm	C	
	Dataset ID 04, Tag 85, Key Protection	C	
	Dataset ID 04, Tag 86, Key Index	C	
	Dataset ID 04, Tag 87, Encryption Data	C	
	Dataset ID 04, Tag 88, Key Checksum Value	C	

Chip-Based Transactions

This section, which identifies the fields used in chip-based debit or credit transactions, and also PIN Change/Unblock requests, includes the following tables:

- Chip-Based Cash Disbursement
- Chip-Based Balance Inquiry
- Chip-Based PIN Change/Unblock Request. This message format identifies the fields required to change or unblock a VSDC card PIN at an ATM. These requests are part of the Visa PIN Management Service and are currently available for VSDC cards used at an ATM. STIP does not process a PIN Change/Unblock request.
- Chip-Based PIN Change/Unblock Reversal Request
- Chip-Based Account Transfer
- Chip-Based Account Transfer Reversal
- Chip-Based Financial Reversal
- Chip-Based Cash Disbursement Adjustment: Misdispense
- Chip-Based Back-Office Adjustment
- Chip-Based Dispute Financial
- Chip-Based Dispute Financial Reversals
- Chip-Based Dispute Response Financial
- Chip-Based Authentication Failure and/or Script Update Results

The charts for chip-based transactions include field 55 and the third bitmap fields, fields 130–149 and 152. Requirements related to the presence of the fields in messages are based on acquirer and issuer specified preferences for using field 55 or the third bitmap for exchanging chip data. Third bitmap fields are not carried in messages where the client preference is field 55. Third bitmap fields and field 55 can be present in messages where the client endpoint uses the third bitmap to exchange chip data and has successfully completed testing for supplemental data in field 55.

The requirements related to the chip data elements that are required in a VSDC transaction are the same regardless of whether field 55 or the third bitmap is used to exchange chip data. V.I.P. maps the data between the third bitmap and field 55 based on acquirer and issuer setup.

Chip-Based Cash Disbursement

Table 169: Chip-Based Cash Disbursement

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
—	Second Bitmap	M	→	M	→	M	M
—	Third Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→	M	→	M	
5	Amt, Sttlmt		C+		C+	C	
6	Amt, Cdhldr Billing		C+		C+	C	
7	Transmsn Date/Time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+	C	
10	Conv Rate, Cdhldr Billing		C+			C	
11	Sys Trace Audit Nbr	M	→	M	→	M	M
12	Time, Local Trans	M	→			M	
13	Date, Local Trans	M	→			M	
14	Date, Expr	C	→			C	
15	Date, Sttlmt		M+	M	→	M	M
16	Date, Conv		C+		C+	C	
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	C	C
20	PAN Extnd, Cntry Code	O	–		M+		
22	POS Entry Mode Code	M	C+			M	
23	Card Seq. Nbr	C	C-	C	C+	C	C
25	POS Cond Code	M	→	M	→	M	M
26	POS PIN Capture Code	C	→			C	
28	Amt, Trans Fee	M	C-			C	
32	Acqng Inst ID Code	M	→	M	→	M	M

Table 169: Chip-Based Cash Disbursement

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
33	Fwdng Inst ID Code	C	→			C	
34	Accptc Env	C	C+	C	C+	C	
35	Track 2 Data	M	→				
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Resp			C	→	C	
39	Resp Code		C+	M	→	M	M
41	Card Accptr Termnl ID	M	→	M	→	M	M
42	Card Accptr ID Code	M	→	M	→	M	M
43	Card Accptr Name/Loc	M	→			M	
44.1	Resp Source/Rsn Code				C+	C	
44.4	Extd. STIP Rsn Code					C	
44.5	CVV/iCVV Results Code		C+	O	C+	C	
44.8	Card Authen Results Code		C+	C	C+	C	
44.11	Orig Resp Code				C+		
46	Amounts, Fees		C+			C	
48	Addtnl Data—Private (Usage = 2 or 9a)	O	→	O	C+		
49	Currncy Code, Trans	M	→	M	→	M	
50	Currncy Code, Sttlmt		C+		C+	C	
51	Currncy Code, Cdhlr Billing		C+			C	
52	PIN Data	M	→				
53	Sec Related Cntrl Info	M	→				
54	Addtnl Amt		C+	O	→	C	
55	ICC-Related Data	C	C-	C	C-	O	O
59	Natl POS Geo Data	C	→			C	
60.1	Terminal Type	O	→		C+	C	
60.2	Term Entry Cap (Pos. 2)	M	→		C+	M	
60.6	Chip Trans Indctr (Pos. 7)	C	C+		C+	C	

Table 169: Chip-Based Cash Disbursement

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
60.7	Chip Auth Rel Indctr (Pos. 8)	C	→		C+	C	
60.9	Crdhldr ID Method		C+		C+	C	
62.0	Bitmap (Field 62)	C	→	C	→	C	C
62.1	Auth Char Indctr	O	C	O	C+	C	O
62.2	Trans Idfr		M+	O	C+	M	O
62.21	Risk Score		C+		C-	C	
62.22	Condition Codes		C+		C-	C	
62.23	Product ID		C+	C	C+	C	C
62.24	Program Idfr		O+	O	O+	C	O
62.25	Spnd Qlfd Indctr		C+	O	C+	C	O
62.27	ATM Routing Table Unique Identifier	C					
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M
63.3	Msg Rsn Code					C	
63.4	STIP/Switch Rsn Code					M	
63.12	Sharing Group Code	C	→	C	→		
63.13	Decimal Postns Indctr	C	C+		C+	C	
63.14	Issr Crrcy Conv Data		C+			C	
63.19	Fee Prgrm Indctr	C	C+	C	C+	C	C
63.21	Charge Indctr		C+		C+	C	
102	Acct ID 1	C	→	C	C+	C	
114	Domestic and Localized Data	C	→	C	→	C	
115	Addtnl Trace Data	O	C-		C+		
117	National Use	C	C-	C	C-	C	C
118	Intra-Cntry Data	C	C-	C	C-	C	C
119	Settlement Service Data	C	C-			C-	
126.0	Bitmap (Field 126)	C	C-			C	

Table 169: Chip-Based Cash Disbursement

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
126.12	Svc Indctrs	C	C-			C	
126.19	DCC Indctr	C	-				
130	Term Capblty Profile	C	C-			O	
131	Term Verif Results	C	C-			O	
132	Unpredict Nbr	C	C-			O	
133	Term Serial Nbr	O	C-			O	
134	Visa Discret Data	C	C-			O	
135	Issuer Discret Data	C	C-			O	
136	Cryptogram	C	C-			O	
137	App Trans Counter	C	C-	O	→	O	O
138	App Intchg Profile	C	C-			O	
139	ARPC Resp Code			C	C+	O	
140	Issuer Auth Data				C+	O	
142	Issuer Script			O	→		
144	Crypto Trans Type	C	C-			O	
145	Term Cntry Code	C	C-			O	
146	Term Trans Date	C	C-			O	
147	Crypto Amt	C	C-			O	
148	Crypto Crrncy Code	C	C-			O	

Chip-Based Balance Inquiry

Table 170: Chip-Based Balance Inquiry

Field Number and Name		Original			
		0200		0210	
		Acqr	VIC	Issr	VIC
—	Second Bitmap	M	→	M	→
—	Third Bitmap	C	→	C	→
2	Primary Acct Nbr	M	→	M	→
3	Processing Code	M	→	M	→
7	Transmsn Date/Time	M	→	M	→
11	System Trace Audit Nbr	M	→	M	→
12	Time, Local Trans	M	→		
13	Date, Local Trans	M	→		
14	Date, Expr	O	→		
15	Date, Settlmt		M+	M	→
18	Mchnt Type	M	→		
19	Acqng Inst Cntry Code	C	→	C	→
20	PAN Extnd, Cntry Code	O	–		M+
22	POS Entry Mode Code	M	C+		
23	Card Seq. Nbr	C	C-	C	C-
25	POS Cond Code	M	→	M	→
26	POS PIN Capture Code	C	→		
28	Amt, Trans Fee	C	C-		
32	Acqng Inst ID Code	M	→	M	→
33	Fwdng Inst ID Code	C	→		
34	Accptc Env	C	C+	C	C+
35	Track 2 Data	M	→		
37	Retrieval Ref Nbr	M	→	M	→
39	Resp Code		C+	M	→
41	Card Accptr Termnl ID	M	→	M	→

Table 170: Chip-Based Balance Inquiry

Field Number and Name		Original			
		0200		0210	
		Acqr	VIC	Issr	VIC
42	Card Acqptr ID Code	M	→	M	→
43	Card Acqptr Name/Loc	M	→		
44.1	Resp Source/Rsn Code				C+
44.5	CVV/iCVV Results Code		C+	O	C+
44.8	Card Authen Results Code		C+	C	C+
48	Addtnl Data—Private (Usage = 2 or 9a)	O	→	O	C+
49	Currncy Code, Trans	C	→	O	C+
52	PIN Data	M	→		
53	Sec Related Cntrl Info	M	→		
54	Addtnl Amts			C	→
55	ICC-Related Data	C	C-	C	C-
59	Natl POS Geo Data	C	→		
60.1	Terminal Type	O	→		C+
60.2	Term Entry Cap (Pos. 2)	M	→		C+
60.6	Chip Trans Indctr (Pos.7)	C	C+		C+
60.7	Chip Auth Rel Indctr (Pos. 8)	C	→		C+
60.9	Crdhldr ID Method		C+		C+
62.0	Bitmap (Field 62)		C+		C+
62.2	Trans Idfr		C+		C+
62.23	Product ID		C+	C	C+
62.24	Program Idfr		O+	O	O+
62.27	ATM Routing Table Unique Identifier	C			
63.0	Bitmap (Field 63)	M	→	M	→
63.1	Netwk ID	M	→	M	→
63.12	Sharing Group Code	C	→	C	→
63.13	Decimal Pos Indctr			C	C+
63.19	Fee Prgrm Indctr	C	C+	C	C+

Table 170: Chip-Based Balance Inquiry

Field Number and Name		Original			
		0200		0210	
		Acqr	VIC	Issr	VIC
102	Acct ID 1	C	→	C	C+
115	Addtnl Trace Data	O	C-		C+
117	National Use	C	C-	C	C-
118	Intra-Cntry Data	C	C-	C	C-
119	Settlement Service Data	C	C-		
126.0	Bitmap (Field 126)	C	C-		
126.12	Svc Indctrs	C	C-		
130	Term Capblty Profile	C	C-		
131	Term Verif Results	C	C-		
132	Unpredict Nbr	C	C-		
133	Term Serial Nbr	O	C-		
134	Visa Discret Data	C	C-		
135	Issuer Discret Data	C	C-		
136	Cryptogram	C	C-		
137	App Trans Counter	C	C-	O	→
138	App Intchg Profile	C	C-		
139	ARPC Resp Code			C	C+
140	Issuer Auth Data				C+
142	Issuer Script			O	→
144	Crypto Trans Type	C	C-		
145	Term Cntry Code	C	C-		
146	Term Trans Date	C	C-		
147	Crypto Amt	C	C-		
148	Crypto Currecy Code	C	C-		

Chip-Based PIN Change and Unblock Request

Table 171: Chip-Based PIN Change and Unblock Request

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
—	Bitmap, Secondary	M	→	M	→	M	M
—	Third Bitmap	M	→	M	→	M	M
2	Primary Acct Nbr (PAN)	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
7	Transmsn Date/Time	M	→	M	→	M	M
11	Sys Trace Audit Nbr	M	→	M	→	M	M
12	Time, Local Trans	M	→			M	
13	Date, Local Trans	M	→			M	
14	Date, Expr	O	→			C	
15	Date, Settlement		M+	M	→	M	M
18	Mchnt Type	M	→				
19	Acqng Inst Cntry Code	C	→	C	→	C	C
20	PAN Extnd, Cntry Code				M+		
22	POS Entry Mode Code	M	→			M	
23	Card Seq. Nbr	C	→	C	→	C	C
25	POS Cond Code	M	→	M	→	M	M
26	POS PIN Captr Code	C	→			C	
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	C	→			C	
34	Accptc Env	C	C+	C	C+	C	
35	Track 2 Data	C	→				
37	Retrieval Ref Nbr	M	→	M	→	M	M
39	Resp Code			M	→	M	M
41	Card Accptr Termnl ID	M	→	M	→	M	M
42	Card Accptr ID Code	M	→	M	→	M	M

Table 171: Chip-Based PIN Change and Unblock Request

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
43	Card Accptr Name/Loc	M	→			M	M
44.1	Resp Source/Rsn Code				C+	C	
44.4	Extd. STIP Rsn Code					C	
44.5	CVV/iCVV Results Code		C+	O	C+	C	
44.8	Card Authen Results Code		C+	C	C+	C	
49	Currncy Code, Trans	O	→		O	O	
52	PIN Data	M	→				
53	Sec Related Cntrl Info	M	→				
55	ICC-Related Data	C	C+	C	C+	O	O
59	Natl POS Geo Data	C	→			C	
60.2	Term Entry Cap	C	C+			M	
60.6	Chip Trans Indctr	C	→			C	
60.7	Auth Rel Indctr	C	→			C	
62.0	Bitmap (Field 62)		C+		C+	C	
62.2	Trans Idfr		C+		C+	C	
62.23	Product ID		C+	C	C+	C	C
62.27	ATM Routing Table Unique Identifier	C					
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Network ID	M	→	M	→	M	M
63.4	STIP/Switch Reason Code					M	
115	Additional Trace Data	O	C-			C+	
117	National Use	C	C-	C	C-	C	C
118	Intra-Cntry Data	C	C-	C	C-	C	C
119	Settlement Service Data	C	C-			C-	
130	Term Capblty Profile	C	C			O	
131	Term Verif Results	C	C			O	
132	Unpredict Nbr	C	C			O	

Table 171: Chip-Based PIN Change and Unblock Request

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
133	Term Serial Nbr	O	→			O	
134	Visa Discret Data	C	C			O	
135	Issuer Discret Data	C	→			O	
136	Cryptogram	C	C			O	
137	App Trans Counter	C	→	O	→	O	O
138	App Intchg Profile	C	C			O	
139	ARPC Resp Crypto & Code				C+	O	
140	Issuer Auth Data				C+	O	
142	Issuer Script			C	→		
144	Crypto Trans Type	C	C			O	
145	Term Cntry Code	C	C			O	
146	Term Trans Date	C	C			O	
147	Crypto Amt	C	C			O	
148	Crypto Crrcy Code	C	C			O	
152	Secondary PIN Block	C	→			O	

Chip-Based PIN Change and Unblock Reversal Request

Table 172: Chip-Based PIN Change and Unblock Reversal Request

Field Number and Name		Original Acq Reversal				STIP Advice	
		0420		0430		0420	0430
		Acqr	VIC	Issr	VIC	VIC	Issr
—	Bitmap, Secondary	M	→	M	→	M	M
—	Third Bitmap	M	→	M	→	M	M
2	Primary Acct Nbr (PAN)	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
7	Transmsn Date/Time	M	→	M	→	M	M
11	Sys Trace Audit Nbr	M	→	M	→	M	M
12	Time, Local Trans	M	→			M	
13	Date, Local Trans	M	→			M	
14	Date, Expr	C	→			C	
15	Date, Settlement		M+	M	→	M	M
18	Mchnt Type	M	→				
19	Acqng Inst Cntry Code	C	→	C	→	C	C
20	PAN Extnd, Cntry Code				M+		
22	POS Entry Mode Code	M	→			M	
25	POS Cond Code	M	→	M	→	M	M
26	POS PIN Captr Code	C	→			C	
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	O	-				
34	Accptc Env	C	C+	C	C+	C	
37	Retrieval Ref Nbr	M	→	M	→	M	M
39	Resp Code			M	→		M
41	Card Acpptr Termnl ID	M	→	M		M	M
42	Card Acpptr ID Code	M	→	M	→	M	M
43	Card Acpptr Name/Loc	M	→	M	→	M	M

Table 172: Chip-Based PIN Change and Unblock Reversal Request

Field Number and Name		Original Acq Reversal				STIP Advice	
		0420		0430		0420	0430
		Acqr	VIC	Issr	VIC	VIC	Issr
44.1	Resp Source/Rsn Code					M	
44.5	CVW/iCVV Results Code	O	→	O	→	C	
44.8	Card Authen Results Code	O	→	O	→	C	
49	Currncy Code, Trans	O	O				
55	ICC-Related Data	O	C+	C	C+	C	C
59	Natl POS Geo Data	C	→			C	
60.2	Term Entry Cap	C	C+			M	
60.6	Chip Trans Indctr	C	→			C	
60.7	Auth Rel Indctr	C	→			C	
62.0	Bitmap (Field 62)	C	→	C	C+	C	C
62.2	Trans Idfr	C	→	O	C+	C	O
62.27	ATM Routing Table Unique Identifier	C					
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Network ID	M	→	M	→	M	M
63.3	Message Reason Code	M				M	
63.4	STIP/Switch Reason Code		C+			M	
90	Orig Data Elemts	M	→	M	→	M	M
115	Additional Trace Data	O	C-	O	C+		
117	National Use	C	C-	C	C-	C	C
118	Intra-Cntry Data	C	C-	C	C-	C	C
119	Settlement Service Data	C	C-			C-	
131	Term Verif Results	O	C			O	
133	Term Serial Nbr	O	→			O	
134	Visa Discret Data	O	C			O	
137	App Trans Counter	O	→	O	→	O	O
143	Issuer Script Results	O	→			O	
152	Secondary PIN Block	O	→			O	

Chip-Based Account Transfer

Table 173: Chip-Based Account Transfer

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
—	Second Bitmap	C	→	C	→	C	C
—	Third Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→	M	→	M	
6	Amt, Cdhldr Billing		C+			C	
7	Transmsn Date/Time	M	→	M	→	M	M
10	Conv Rate, Cdhldr Billing		C+			C	
11	Sys Trace Audit Nbr	M	→	M	→	M	M
12	Time, Local Trans	M	→			M	
13	Date, Local Trans	M	→			M	
14	Date, Expr	C	→			C	
15	Date, Settlmt		M+	M	→	M	M
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	C	C
20	PAN Extnd, Cntry Code	O	-		M+		
22	POS Entry Mode Code	M	C+			M	
23	Card Seq. Nbr	C	C-	C	C-	C	C
25	POS Cond Code	M	→	M	→	M	M
26	POS PIN Capture Code	C	→			C	
28	Amt, Trans Fee	C	C-			C	
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	C	→			C	
35	Track 2 Data	M	→				
34	Accptc Env	C	C+	C	C+	C	

Table 173: Chip-Based Account Transfer

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Resp			O	→	C	
39	Response Code		C+	M	→	M	M
41	Card Accptr Termnl ID	M	→	M	→	M	
42	Card Accptr ID Code	M	→	M	→	M	M
43	Card Accptr Name/Loc	M	→			M	
44.4	Extd. STIP Rsn Code					C	
44.5	CVV/iCVV Results Code		C+	O	C+	C	
44.8	Card Authen Results Code		C+	C	C+	C	
48	Addtnl Data—Private (Usage = 2 or 9a)	O	→	O	C+		
49	Currncy Code, Trans	M	→	M	→	M	
51	Currncy Code, Cdhldr Billing		C+			C	
52	PIN Data	M	→				
53	Sec Related Cntrl Info	M	→				
55	ICC-Related Data	C	C-	C	C-	O	O
59	Natl POS Geo Data	C	→			C	
60.1	Terminal Type	O	→		C+	C	
60.2	Term Entry Cap (Pos. 2)	M	→		C+	M	
60.6	Chip Trans Indctr (Pos. 7)	C	C+		C+	C	
60.7	Chip Auth Rel Indctr (Pos. 8)	C	→		C+	C	
60.9	Crdhldr ID Method		C+		C+	C	
62.0	Bitmap (Field 62)	C	→	C	C+	C	C
62.2	Trans Idfr	C	→	O	C+	C	O
62.23	Product ID		C+	C	C+	C	C
62.24	Program Idfr		O+	O	O+	C	O
62.27	ATM Routing Table Unique Identifier	C					
63.0	Bitmap (Field 63)	M	→	M	→	M	M

Table 173: Chip-Based Account Transfer

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
63.1	Netwk ID	M	→	M	→	M	M
63.4	STIP/Switch Rsn Code					M	
63.12	Sharing Group Code	C	→	C	→		
63.19	Fee Prgrm Indctr	C	C+	C	C+	C	C
102	Acct ID 1	C	→	C	C+	C	
103	Acct ID 2	C	→	O	C+	C	O
115	Addtnl Trace Data	O	C-		C+		
117	National Use	C	C-	C	C-	C	C
118	Intra-Cntry Data	C	C-	C	C-	C	C
119	Settlement Service Data	C	C-			C-	
126.0	Bitmap (Field 126)	C	C-			C	
126.5	Visa Merchant Identifier		C+		C+	C+	
126.12	Svc Indctrs	C	C-			C	
130	Term Capblty Profile	C	C-			O	
131	Term Verif Results	C	C-			O	
132	Unpredict Nbr	C	C-			O	
133	Term Serial Nbr	O	C-			O	
134	Visa Discret Data	C	C-			O	
135	Issuer Discret Data	C	C-			O	
136	Cryptogram	C	C-			O	
137	App Trans Counter	C	C-	O	→	O	O
138	App Intchg Profile	C	C-			O	
139	ARPC Resp Code			C	C+	O	
140	Issuer Auth Data				C+	O	
142	Issuer Script			O	→		
144	Crypto Trans Type	C	C-			O	
145	Term Cntry Code	C	C-			O	

Table 173: Chip-Based Account Transfer

Field Number and Name		Original				STIP Advice	
		0200		0210		0220	0230
		Acqr	VIC	Issr	VIC	VIC	Issr
146	Term Trans Date	C	C-			O	
147	Crypto Amt	C	C-			O	
148	Crypto Currncy Code	C	C-			O	

Chip-Based Account Transfer Reversal

Table 174: Chip-Based Account Transfer Reversal

Field Number and Name		Acquirer Advice			
		0420		0430	
		Acqr	VIC	Issr	VIC
—	Second Bitmap	M	→	M	→
—	Third Bitmap	C	→	C	→
2	Primary Acct Nbr (PAN)	M	→	M	→
3	Processing Code	M	→	M	→
4	Amt, Trans	M	→	M	→
6	Amt, Cdhldr Billing		C+		
7	Transmsn Date/Time	M	→	M	→
9	Conv Rate, Settlmt		C+		C+
10	Conv Rate, Cdhldr Billing		C+		
11	Sys Trace Audit Nbr	M	→	M	→
12	Time, Local Trans	M	→		
13	Date, Local Trans	M	→		
14	Date, Expr	C	→		
15	Date, Settlmt		M+	M	→
18	Mchnt Type	M	→		
19	Acqng Inst Cntry Code	C	→	C	→
20	PAN Extnd, Cntry Code	O	–		M+
22	POS Entry Mode Code	M	C+		
25	POS Cond Code	M	→	M	→
28	Amt, Trans Fee	C	C-		
32	Acqng Inst ID Code	M	→	M	→
33	Fwdng Inst ID Code	O	–		
34	Accptc Env	C	C+	C	C+
37	Retrieval Ref Nbr	M	→	M	→
38	Auth ID Resp	C	→		

Table 174: Chip-Based Account Transfer Reversal

Field Number and Name		Acquirer Advice			
		0420		0430	
		Acqr	VIC	Issr	VIC
39	Resp Code			M	→
41	Card Acqptr Termnl ID	M	→	M	→
42	Card Acqptr ID Code	M	→	M	→
43	Card Acqptr Name/Loc	M	→		
44.1	Resp Source/Rsn Code				M+
48	Addtnl Data—Private (Usage = 2 or 9a)	O	→	O	C+
49	Currncy Code, Trans	M	→	M	→
51	Currncy Code, Cdhldr Billing		C+		
55	ICC-Related Data	C	C-	C	C-
59	Natl POS Geo Data	C	→		
60.1	Terminal Type	C	→		
60.2	Term Entry Cap (Pos. 2)	C	→		
60.9	Crdhldr ID Method		C+		
62.0	Bitmap (Field 62)	C	C+	C	C+
62.2	Trans Idfr	C	C+	O	C+
62.23	Product ID	O	C+	C	C+
62.24	Program Idfr		O+	O	O+
62.27	ATM Routing Table Unique Identifier	C			
63.0	Bitmap (Field 63)	M	→	M	→
63.1	Netwk ID	M	→	M	→
63.4	STIP/Switch Rsn Code		C+		
63.12	Sharing Group Code	C	→	C	→
63.19	Fee Prgrm Indctr	C	C+	C	C+
90	Orig Data Elemts	M	→	M	→
102	Acct ID 1	C	C+	C	C+
103	Acct ID 2	C	C+	O	C+
115	Addtnl Trace Data	O	C-		C+

Table 174: Chip-Based Account Transfer Reversal

Field Number and Name		Acquirer Advice			
		0420		0430	
		Acqr	VIC	Issr	VIC
117	National Use	C	C-	C	C-
118	Intra-Cntry Data	C	C-	C	C-
119	Settlement Service Data	C	C-		
126.0	Bitmap (Field 126)	C	C-		
126.5	Visa Merchant Identifier		C+		C+
126.12	Svc Indctrs	C	C-		
131	Term Verif Results	C	→		
133	Term Serial Nbr	O	→		
134	Visa Discret Data	C	→		
137	App Trans Counter	O	→	O	→
143	Issuer Script Results	C	→		

Chip-Based Financial Reversal

Table 175: Chip-Based Financial Reversal

Field Number and Name		Acquirer Advice			
		0420		0430	
		Acqr	VIC	Issr	VIC
—	Second Bitmap	M	→	M	→
—	Third Bitmap	C	→	C	→
2	Primary Acct Nbr (PAN)	M	→	M	→
3	Processing Code	M	→	M	→
4	Amt, Trans	M	→		
5	Amt, Settlmt		C+		C+
6	Amt, Cdhldr Billing		C+		
7	Transmsn Date/Time	M	→	M	→
9	Conv Rate, Settlmt		C+		C+
10	Conv Rate, Cdhldr Billing		C+		
11	Sys Trace Audit Nbr	M	→	M	→
12	Time, Local Trans	M	→		
13	Date, Local Trans	M	→		
14	Date, Expr	C	→		
15	Date, Settlmt		M+	M	→
16	Date, Conv		C+		C+
18	Mchnt Type	M	→		
19	Acqng Inst Cntry Code	C	→	C	→
20	PAN Extnd, Cntry Code	O	–		M+
22	POS Entry Mode Code	M	C+		
25	POS Cond Code	M	→	M	→
28	Amt, Trans Fee	M	C-		
32	Acqng Inst ID Code	M	→	M	→
33	Fwdng Inst ID Code	O	–		
34	Accptc Env	C	C+	C	C+

Table 175: Chip-Based Financial Reversal

Field Number and Name		Acquirer Advice			
		0420		0430	
		Acqr	VIC	Issr	VIC
37	Retrieval Ref Nbr	M	→	M	→
38	Auth ID Resp	C	→		
39	Resp Code			M	→
41	Card Acqptr Termnl ID	M	→	M	→
42	Card Acqptr ID Code	M	→	M	→
43	Card Acqptr Name/Loc	M	→		
44.1	Resp Source/Rsn Code				M+
46	Amounts, Fees		C+		
48	Addtnl Data—Private (Usage = 2 or 9a)	O	→	O	C+
49	Currncy Code, Trans	M	→	M	→
50	Currncy Code, Settlmt		C+		C+
51	Currncy Code, Cdhldr Billing		C+		
54	Addtnl Amts		C+		
55	ICC-Related Data	C	C-	C	C-
59	Natl POS Geo Data	C	→		
60.1	Terminal Type	C	→		
60.2	Term Entry Cap	C	→		
60.9	Crdhldr ID Method				C+
62.0	Bitmap (Field 62)	C	→	C	C+
62.1	Auth Char Indctr	C	→	O	C+
62.2	Trans Idfr	M	→	M	→
62.23	Product ID	O	C+	C	C+
62.24	Program Idfr		O+	O	O+
62.25	Spnd Qlfd Indctr		C+	O	C+
62.27	ATM Routing Table Unique Identifier	C			
63.0	Bitmap (Field 63)	M	→	M	→
63.1	Netwk ID	M	→	M	→

Table 175: Chip-Based Financial Reversal

Field Number and Name		Acquirer Advice			
		0420		0430	
		Acqr	VIC	Issr	VIC
63.3	Msg Rsn Code	O	→		
63.4	STIP/Switch Rsn Code		C+		
63.7	Netwk Particip Flags	C	–		
63.12	Sharing Group Code	C	→	C	→
63.13	Decimal Pos Indctr	C	C+		C+
63.14	Issr Currecy Conv Data		C+		
63.19	Fee Prgrm Indctr	C	C+	C	C+
63.21	Charge Indctr		C+		C+
90	Orig Data Elemts	M	→	M	→
102	Acct ID 1	C	C+	C	C+
115	Addtnl Trace Data	O	C-		C+
117	National Use	C	C-	C	C-
118	Intra-Cntry Data	C	C-	C	C-
119	Settlement Service Data	C	C-		
126.0	Bitmap (Field 126)	C	C-		
126.5	Visa Merchant Identifier		C+		C+
126.12	Svc Indctrs	C	C-		
126.19	DCC Indctr	C	–		
131	Term Verif Results	C	→		
133	Term Serial Nbr	O	→		
134	Visa Discret Data	C			
137	App Trans Counter	O	→	O	→
143	Issuer Script Results	C	→		

Chip-Based Cash Disbursement Adjustment Misdispense

Table 176: Chip-Based Cash Disbursement Adjustment Misdispense

Field Number and Name		Acquirer Advice			
		0220		0230	
		Acqr	VIC	Issr	VIC
—	Second Bitmap	M	→	M	→
—	Third Bitmap	C	→	C	→
2	Primary Acct Nbr	M	→	M	→
3	Processing Code	M	→	M	→
4	Amt, Trans	M	→		
5	Amt, Settlmt		C+		C+
6	Amt, Cdhldr Billing		C+		
7	Transmsn Date/time	M	→	M	→
9	Conv Rate, Settlmt		C+		C+
10	Conv Rate, Cdhldr Billing		C+		
11	Sys Trace Audit Nbr	M	→	M	→
12	Time, Local Trans	M	→		
13	Date, Local Trans	M	→		
14	Date, Expr	C	→		
15	Date, Settlmt		M+	M	→
16	Date, Conv		C+		C+
18	Mchnt Type	M	→		
19	Acqng Inst Cntry Code	C	→	C	→
20	PAN Extnd, Cntry Code				M+
22	POS Entry Mode Code	M	→		
23	Card Seq. Nbr	C	C-	C	C-
25	POS Cond Code	M	→	M	→
28	Amt, Trans Fee	C	C-		
32	Acqng Inst ID Code	M	C+	M	→

Table 176: Chip-Based Cash Disbursement Adjustment Misdispense

Field Number and Name		Acquirer Advice			
		0220		0230	
		Acqr	VIC	Issr	VIC
33	Fwdng Inst ID Code	C	→		
34	Accptc Env	C	C+	C	C+
37	Retrieval Ref Nbr	M	→	M	→
39	Resp Code		C+	M	→
41	Card Accptr Termnl ID	M	→	M	→
42	Card Accptr ID Code	M	→	M	→
43	Card Accptr Name/Loc	M	→		
46	Amounts, Fees		C+		
48	Addtnl Data—Private (Usage = 2 or 9a)	O	→	O	C+
49	Currncy Code, Trans	M	→		
50	Currncy Code, Settlmt		C+		C+
51	Currncy Code, Cdhldr Billing		C+		
54	Addtnl Amts		C+		
55	ICC-Related Data	O	O	O	O
59	Natl POS Geo Data	C	→		
60.1	Terminal Type	C	→		
60.2	Term Entry Cap	C	→		
62.0	Bitmap (Field 62)	C	→	C	C
62.1	Auth Char Indctr	C	→	O	C+
62.2	Trans Idfr	M	→	M	→
62.23	Product ID	O	O+	O	O+
62.24	Program Idfr	O	O+	O	O+
62.25	Spnd Qlfd Indctr		C+	O	C+
63.0	Bitmap (Field 63)	M	→	M	→
63.1	Netwk ID	M	→	M	→
63.3	Msg Rsn Code	M	→		
63.4	STIP/Switch Rsn Code		C+		

Table 176: Chip-Based Cash Disbursement Adjustment Misdispense

Field Number and Name		Acquirer Advice			
		0220		0230	
		Acqr	VIC	Issr	VIC
63.13	Decimals Postns Indctr	C	C+		C+
63.14	Issr Currncy Conv Data		C+		
63.19	Fee Prgrm Indctr	C	→	C	C+
63.21	Charge Indctr		C+		
90	Orig Data Elemts	C	→	C	→
102	Acct ID 1	C	C+	O	C+
115	Addtnl Trace Data	O	C-		C+
117	National Use	C	C-	C	C-
119	Settlement Service Data	C	C-		
126.0	Bitmap (Field 126)	C	C-		
126.12	Svc Indctrs	C	C-		
126.19	DCC Indctr	C	-		
133	Term Serial Nbr	O	→	O	→
137	App Trans Counter	O	→	O	-

Chip-Based Back-Office Adjustment

Table 177: Chip-Based Back-Office Adjustment

Field Number and Name		Acquirer Advice			
		0220		0230	
		Acqr	VIC	Issr	VIC
—	Second Bitmap	M	→	M	→
—	Third Bitmap	C	→	C	→
2	Primary Acct Nbr	M	→	M	→
3	Processing Code	M	→	M	→
4	Amt, Trans	M	→		
5	Amt, Settlmt		C+		C+
6	Amt, Cdhldr Billing		C+		
7	Transmsn Date/time	M	→	M	→
9	Conv Rate, Settlmt		C+		C+
10	Conv Rate, Cdhldr Billing		C+		
11	Sys Trace Audit Nbr	M	→	M	→
12	Time, Local Trans	M	→		
13	Date, Local Trans	M	→		
15	Date, Settlmt		M+	M	→
16	Date, Conv		C+		C+
18	Mchnt Type	M	→		
19	Acqng Inst Cntry Code	C	→	C	→
20	PAN Extnd, Cntry Code				M+
22	POS Entry Mode Code	M	→		
23	Card Seq. Nbr	C	C-	C	C-
25	POS Cond Code	M	→	M	→
28	Amt, Trans Fee	C	C-		
32	Acqng Inst ID Code	M	→	M	→
33	Fwdng Inst ID Code	C	→		
34	Accptc Env	C	C+	C	C+

Table 177: Chip-Based Back-Office Adjustment

Field Number and Name		Acquirer Advice			
		0220		0230	
		Acqr	VIC	Issr	VIC
37	Retrieval Ref Nbr	M	→	M	→
39	Resp Code			M	→
41	Card Acceptor Termnl ID	M	→	M	→
42	Card Acceptor ID Code	M	→	M	→
43	Card Acceptor Name/Loc	M	→		
44	Addtl Resp Data	C	→		
46	Amounts, Fees		C+		
48	Addtl Data—Private (Usage = 2 or 9a)			O	→
48	Addtl Data—Private; Usage 7a	C	→		→
49	Currency Code, Trans	M	→		
50	Currency Code, Settlement		C+		
51	Currency Code, Cardholder Billing		C+		
54	Addtl Amounts		C+		
55	ICC-Related Data	O	O	O	O
59	Natl POS Geo Data	C	→		
60.1	Terminal Type	C	→		
60.2	Term Entry Cap	C	→		
62.0	Bitmap (Field 62)	C	→	C	C
62.1	Auth Char Indicator	C	→	O	C+
62.2	Trans Identifier	M	→	M	→
62.23	Product ID	O	O+	O	O+
62.24	Program Identifier	O	O+	O	O+
62.25	Spnd Qlfd Indicator		C+	O	C+
63.0	Bitmap (Field 63)	M	→	M	→
63.1	Network ID	M	→	M	→
63.3	Message Reason Code	M	→		
63.4	STIP/Switch Reason Code		C+		

Table 177: Chip-Based Back-Office Adjustment

Field Number and Name		Acquirer Advice			
		0220		0230	
		Acqr	VIC	Issr	VIC
63.13	Decimals Postns Indctr	C	C+		C+
63.14	Issr Curry Conv Data		C+		
63.19	Fee Prgm Indctr	C	C+	C	C+
63.21	Charge Indctr		C+		
90	Orig Data Elemts	O	→	O	→
102	Acct ID 1			O	→
115	Addtnl Trace Data	O	C-		C+
117	National Use	C	C-	C	C-
119	Settlement Service Data	C	C-		
126.0	Bitmap (Field 126)	C	→		
126.12	Svc Indctrs	C	→		
133	Term Serial Nbr	O	→	O	→
137	App Trans Counter	C	→	O	-

Chip-Based Dispute Financial and Dispute Financial Status Advice (0422 Chargeback)

Table 178: Chip-Based Dispute Financial and Dispute Financial Status Advice (0422 Chargeback)

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
—	Second Bitmap	M	→	M	→	C	C
—	Third Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processng Code	M	→	M	→	M	M
4	Amt, Trans	M	→			M	
5	Amt, Settlmt		C+		C+		
7	Transmsn Date/Time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+		
11	Sys Trace Audit Nbr	M	→	M	→	M	M
13	Date, Local Trans	M	→			M	
15	Date, Settlmt		M+	M	→	M	M
16	Date, Conv		C+		C+		
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	M	M
20	PAN Extnd, Cntry Code	C	M+				
23	Card Seq. Nbr	O	C-	O	C-		
25	POS Cond Code	M	→	M	→	M	M
28	Amt, Trans Fee	C	C-				
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	O	→				
34	Accptc Env	C	C+	C	C+		

Table 178: Chip-Based Dispute Financial and Dispute Financial Status Advice (0422 Chargeback)

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Resp	C	→			M	
39	Resp Code			M	→	M	
41	Card Accptr Termnl ID	M	→	M	→	C	C
42	Card Accptr ID Code	M	→	M	→	M	M
43	Card Accptr Name/Loc	M	→			M	
44	Addtnl Resp Data	C	→				
44.11	Orig Resp Code				C+		
48	Addtnl Data—Private	M	→	O	→	M	
49	Currncy Code, Trans	M	→			M	
50	Currncy Code, Settlmt		C+		C+		
55	ICC-Related Data	C	C-				
59	Natl POS Geo Data	C	→				
60.1	Terminal Type	C	→			M	
60.2	Term Entry Cap	C	→			M	
62.0	Bitmap (Field 62)	C	→	C	C+	M	M
62.1	Auth Char Indctr	C	→	O	C+		
62.2	Trans Idfr	M	→	M	→	M	M
62.23	Product ID	O	O+	O	O+	M	O
62.24	Program Idfr	O	O+	O	O+		
62.25	Spnd Qlfd Indctr	O	C+		C+	C	O
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M
63.3	Msg Rsn Code	M	→			M	

Table 178: Chip-Based Dispute Financial and Dispute Financial Status Advice (0422 Chargeback)

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
63.4	STIP/Switch Rsn Code		C+			M	
63.6	Chgbk Reduct/BII Flags	C	→				
63.13	Decimal Pos Indctr	C	C+		C+		
63.19	Fee Prgrm Indctr	C	→	C	C+		
90	Orig Data Elemts	C	→	C	→		
111	Addnl Trans-Spcfc Data	C	C+		C+	C	
115	Addtnl Trace Data	O	C-		C+		
117	National Use	C	C-	C	C-		
119	Settlement Service Data	C	C-				
126.0	Bitmap (Field 126)	C	→				
126.12	Svc Indctrs	C	→				
126.19	DCC Indctr	C	→	C	→		
130	Term Capblty Profile	C	→				
131	Term Verif Results	O	→				
132	Unpredict Nbr	O	→				
133	Term Serial Nbr	O	→				
134	Visa Discret Data	O	→				
136	Cryptogram	O	→				
137	App Trans Counter	O	→	O	-		
138	App Intchg Profile	O	→				
144	Crypto Trans Type	O	→				
145	Term Cntry Code	O	→				
146	Term Trans Date	O	→				

Table 178: Chip-Based Dispute Financial and Dispute Financial Status Advice (0422 Chargeback)

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
147	Crypto Amt	O	→				
148	Crypto Currecy Code	O	→				

Chip-Based Dispute Financial Reversal and Dispute Financial Reversal Status Advice

Table 179: Chip-Based Dispute Financial Reversal and Dispute Financial Reversal Status Advice

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
—	Second Bitmap	M	→	M	→	C	C
—	Third Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→			M	
5	Amt, Settlmt		C+		C+		
7	Transmsn Date/Time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+		
11	Sys Trace Audit Nbr	M	→	M	→	M	M
13	Date, Local Trans	M	→			M	
15	Date, Settlmt		M+	M	→		
16	Date, Conv		C+		C+		
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	M	M
20	PAN Extnd, Cntry Code	C	M+				
23	Card Seq. Nbr	O	C-	O	C-		
25	POS Cond Code	M	→	M	→	M	M
28	Amt, Trans Fee	C	C-				
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	O	→				
34	Accptc Env	C	C+	C	C+		

Table 179: Chip-Based Dispute Financial Reversal and Dispute Financial Reversal Status Advice

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
37	Retrieval Ref Nbr	M	→	M	→	M	M
38	Auth ID Resp	C	→			M	
39	Resp Code			M	→	M	
41	Card Acceptor Termnl ID	M	→	M	→	C	C
42	Card Acceptor ID Code	M	→	M	→	M	M
43	Card Acceptor Name/Loc	M	→			M	
44	Addtnl Resp Data	C	→				
48	Addtnl Data—Private	M	→	O	→	M	
49	Currncy Code, Trans	M	→			M	
50	Currncy Code, Settlmt		C+		C+		
55	ICC-Related Data	C	C-				
59	Natl POS Geo Data	C	→				
60.1	Terminal Type	C	→			M	
60.2	Term Entry Cap	C	→			M	
62.0	Bitmap (Field 62)	C	→	C	C+	M	M
62.1	Auth Char Indctr	C	→	O	C+		
62.2	Trans Idfr	M	→	M	→	M	M
62.23	Product ID	O	O+	O	O+	M	O
62.25	Spnd Qlfd Indctr	O	C+		C+	C	O
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M
63.3	Msg Rsn Code	M	→			M	
63.4	STIP/Switch Rsn Code		C+			M	
63.6	Chgbk Reduct/BII Flags	C	→				

Table 179: Chip-Based Dispute Financial Reversal and Dispute Financial Reversal Status Advice

Field Number and Name		Original				Dispute Financial Status Advice VROL Dispute Financials Only	
		0422		0432		0480	0490
		Issr	VIC	Acqr	VIC	VIC	Issr
63.13	Decimal Pos Indctr	C	C+		C+		
63.19	Fee Prgrm Indctr	C	→	C	C+		
90	Orig Data Elemts	C	→	C	→		
111	Addnl Trans-Spcfc Data	C	C+		C+	C	
115	Addnl Trace Data	O	C-		C+		
117	National Use	C	C-	C	C-		
119	Settlement Service Data	C	C-				
126.0	Bitmap (Field 126)	C	→				
126.12	Svc Indctrs	C	→				
126.19	DCC Indctr	C	→	C	→		
130	Term Capblty Profile	C	→				
131	Term Verif Results	O	→				
132	Unpredict Nbr	O	→				
133	Term Serial Nbr	O	→				
134	Visa Discret Data	O	→				
136	Cryptogram	O	→				
137	App Trans Counter	O	→	O	-		
138	App Intchg Profile	O	→				
144	Crypto Trans Type	O	→				
145	Term Cntry Code	O	→				
146	Term Trans Date	O	→				
147	Crypto Amt	O	→				
148	Crypto Crrcy Code	O	→				

Chip-Based Dispute Response Financial and Dispute Response Financial Status Advice (0220 Representation)

Table 180: Chip-Based Dispute Response Financial and Dispute Response Financial Status Advice (0220 Representation)

Field Number and Name		Original				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
—	Second Bitmap	C	→	C	→	C	C
—	Third Bitmap	C	→	C	→	C	C
2	Primary Acct Nbr (PAN)	M	→	M	→	M	M
3	Processing Code	M	→	M	→	M	M
4	Amt, Trans	M	→			M	
5	Amt, Settlmt		C+		C+		
6	Amt, Cdhldr Billing		C+				
7	Transmsn Date/Time	M	→	M	→	M	M
9	Conv Rate, Settlmt		C+		C+		
10	Conv Rate, Cdhldr Billing		C+				
11	Sys Trace Audit Nbr	M	→	M	→	M	M
13	Date, Local Trans	M	→			M	
15	Date, Settlmt		M+	M	→	M	M
16	Date, Conv		C+		C+		
18	Mchnt Type	M	→			M	
19	Acqng Inst Cntry Code	C	→	C	→	M	
20	PAN Extnd, Cntry Code	C	→	C	M+		
23	Card Seq. Nbr	O	C-	O	C-		
25	POS Cond Code	M	→	M	→	M	M
28	Amt, Trans Fee	C	C-				

Table 180: Chip-Based Dispute Response Financial and Dispute Response Financial Status Advice (0220 Representation)

Field Number and Name		Original				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
32	Acqng Inst ID Code	M	→	M	→	M	M
33	Fwdng Inst ID Code	C	→				
34	Accptc Env	C	C+	C	C+		
37	Retrieval Ref Nbr	M	→	M	→	M	M
39	Resp Code			M	→	M	
41	Card Accptr Termnl ID	M	→	M	→	C	C
42	Card Accptr ID Code	M	→	M	→	M	M
43	Card Accptr Name/Loc	M	→			M	
44	Addtnl Resp Data	C	→				
48	Addtnl Data—Private	C	→	O	→	M	
49	CurrCy Code, Trans	M	→			M	
50	CurrCy Code, Settlmt		C+		C+		
51	CurrCy Code, Cdhldr Billing		C+				
54	Addtnl Amts		C+				
55	ICC-Related Data	O	O	O	O		
59	Natl POS Geo Data	C	→				
62.0	Bitmap (Field 62)	C	→	C	C+	M	M
62.1	Auth Char Indctr	C	→	O	C+		
62.2	Trans Idfr	M	→	M	→	M	M
62.23	Product ID	O	O+	O	O+	M	O
62.24	Program Idfr	O	O+	O	O+		
62.25	Spnd Qlfd Indctr	O	C+		C+	C	O
63.0	Bitmap (Field 63)	M	→	M	→	M	M
63.1	Netwk ID	M	→	M	→	M	M

Table 180: Chip-Based Dispute Response Financial and Dispute Response Financial Status Advice (0220 Representation)

Field Number and Name		Original				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
63.3	Msg Rsn Code	M	→			M	
63.4	STIP/Switch Rsn Code		C+			M	
63.13	Decimal Postns Indctr	C	C+		C+		
63.14	Issr Crrcy Conv Data		C+				
63.19	Fee Prgrm Indctr	C	→	C	C+		
90	Orig Data Elemts	C	→	C	→		
102	Acct ID 1			O	→		
115	Addtl Trace Data	O	C-		C+		
117	National Use	C	C-	C	C-		
119	Settlement Service Data	C	C-				
126.0	Bitmap (Field 126)	C	→				
126.12	Svc Indctrs	C	→				
126.19	DCC Indctr	C	-				
130	Term Capblty Profile	O	→				
131	Term Verif Results	O	→				
132	Unpredict Nbr	O	→				
133	Term Serial Nbr	O	→	O	→		
134	Visa Discret Data	O	→				
136	Cryptogram	O	→				
137	App Trans Counter	O	→	O	-		
138	App Intchg Profile	O	→				
144	Crypto Trans Type	O	→				
145	Term Cntry Code	O	→				
146	Term Trans Date	O	→				

Table 180: Chip-Based Dispute Response Financial and Dispute Response Financial Status Advice (0220 Representment)

Field Number and Name		Original				Dispute Response Financial Status Advice VROL Dispute Financials Only	
		0220		0230		0282	0292
		Acqr	VIC	Issr	VIC	VIC	Acqr
147	Crypto Amt	O	→				
148	Crypto Currcy Code	O	→				

Chip-Based Authentication Failure and Script Update Results

Table 181: Chip-Based Authentication Failure and Script Update Results

Field Number and Name		Information Advice			
		0620		0630	
		Acqr	VIC	Issr	VIC
—	Second Bitmap	M	→	M	→
—	Third Bitmap	M	→	M	→
2	Primary Acct Nbr (PAN)	M	→	M	→
3	Processing Code	M	→	M	→
4	Amt, Trans	M	→		
6	Amt, Cdhldr Billing		M+		
7	Transmission Date/Time	M	→	M	→
10	Conv Rate, Cdhldr Billing		M+		
11	Sys Trace Audit Nbr	M	→	M	→
15	Date, Settlmt		M+	M	→
18	Mchnt Type	M	→		
19	Acqng Inst Cntry Code	M	→	M	→
22	POS Entry Mode Code	M	→		
23	Card Seq. Nbr	C	→	C	→
32	Acqng Inst ID Code	M	→	M	→
37	Retrieval Ref Nbr	M	→	M	→
39	Response Code	M	→	M	→
41	Card Accptr Termnl ID	M	→	M	→
42	Card Accptr ID Code	M	→	M	→
43	Card Accptr Name/Loc	M	→		
49	Currncy Code, Trans	M	→		
51	Currncy Code, Cdhldr Billing		M+		
55	ICC-Related Data	O	O	O	O
59	Natl POS Geo Data	O	→		

Table 181: Chip-Based Authentication Failure and Script Update Results

Field Number and Name		Information Advice			
		0620		0630	
		Acqr	VIC	Issr	VIC
60.2	Term Entry Cap	M	→		
63.0	Bitmap (Field 63)	M	→	M	→
63.1	Netwk ID Code	M	→	M	→
63.4	STIP/Switch Rsn Code		C+		
70	Netwk Mgmt Info Code	M	→	M	→
130	Term Capblty Profile	O	O		
131	Term Verif Results	M	O		
132	Unpredict Nbr	O	O		
133	Term Serial Nbr	O	O		
134	Visa Discret Data	M	O		
136	Cryptogram	O	O		
137	App Trans Counter	M	O	O	–
138	App Intchg Profile	O	O		
143	Issuer Script Results	O	O		
145	Term Cntry Code	O	O		
146	Term Trans Date	O	O		

Chip-Based ATM Fraud Advice

Client-Generated Chip-Based ATM Fraud Advice

Table 182: Client-Generated Chip-Based ATM Fraud Advice

Field Number and Name		Notification/Response	
		9620	9630
		Acqr/Issr	VIC
—	Second Bitmap	M	M
—	Third Bitmap	C	C
2	Primary Acct Nbr	M	M
4	Amt, Trans	C	
7	Trans Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
13	Date, Local Trans	C	
14	Date, Expr	C	
15	Date, Settlmt		M
18	Mchnt Type	C	
22	POS Entry Mode Code	C	
23	Card Seq. Nbr	C	O
32	Acqng Inst ID Code	M	C
33	Fwdng Inst ID Code	M	M
34	Accptc Env	O	
37	Retrieval Ref Nbr	M	C
38	Auth ID Resp	O	
39	Resp Code		M
41	Card Accptr Termnl ID	M	
42	Card Accptr ID Code	M	
43	Card Accptr Name/Loc	C	

Table 182: Client-Generated Chip-Based ATM Fraud Advice

Field Number and Name		Notification/Response	
		9620	9630
		Acqr/Issr	VIC
49	Currncy Code, Trans	M	
59	Natl POS Geo Data	C	
60	Additional POS Information	C	
60.2	Term Entry Cap (Pos. 2)	O	
61.1	Cashback Amt	C	
62.0	Bitmap (Field 62)		
62.2	Trans Idfr	C	
62.11	Mult Clrng Seq Nbr	O	
63.0	V.I.P. Private-Use Fields	M	M
63.1	Netwk ID Code	M	M
63.9	Fraud Data	M	
63.11	Reimbursmt Attribute	C	
70	Netwk Mgmt Info Code	M	M
100	Rcvg Inst ID Code	M	
115	Addtnl Trace Data	O	O
125	Supporting Info	M	
133	Term Serial Nbr	O	
137	App Trans Counter	O	O

Visa-Generated Chip-Based ATM Fraud Advice

Table 183: Visa-Generated Chip-Based ATM Fraud Advice

Field Number and Name		Notification/Response	
		9620	9630
		VIC	Acqr/Issr
—	Second Bitmap	M	M
—	Third Bitmap	C	C
2	Primary Acct Nbr	M	M
4	Amt, Trans	C	
7	Trans Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
13	Date, Local Trans	C	
14	Date, Expr	C	
15	Date, Settlmt	M	
18	Mchnt Type	C	
22	POS Entry Mode Code	O	
23	Card Seq. Nbr	C	O
32	Acqng Inst ID Code	C	
33	Fwdng Inst ID Code	M	
34	Accptc Env	O	
37	Retrieval Ref Nbr	C	C
38	Auth ID Resp	O	
39	Resp Code		M
41	Card Accptr Termnl ID	C	
42	Card Accptr ID Code	O	
43	Card Accptr Name/Loc	O	

Table 183: Visa-Generated Chip-Based ATM Fraud Advice

Field Number and Name		Notification/Response	
		9620	9630
		VIC	Acqr/Issr
48	Addtnl Data—Private	M	
	Position 1 Application Identifier	M	
	Positions 2-3 Fraud Response Code	M	
	Positions 4-7 Duplicate Sequence Number	C	
	Positions 8-10 Error 1	C	
	Positions 11-13 Error 2	C	
	Positions 14-16 Error 3	C	
	Positions 17-19 Error 4	C	
	Positions 20-22 Error 5	C	
	Positions 23-25 Error 6	C	
	Positions 26-28 Error 7	C	
	Positions 29-31 Error 8	C	
	Positions 32-34 Error 9	C	
	Positions 35-37 Error 10	C	
	Positions 38-255		
49	Currncy Code, Trans	C	
59	Natl POS Geo Data	C	
60	Addtnl POS Info	C	
60.2	Term Entry Cap (Pos. 2)	O	
61.1	Cashback Amt	C	
62.0	Bitmap (Field 62)		
62.2	Trans Idfr	C	
62.11	Mult Clrng Seq Nbr	O	
63.0	V.I.P. Private-Use Fields	M	M
63.1	Netwk ID Code	M	M
63.4	STIP/Switch Reason Code	M	
63.9	Fraud Data	M	

Table 183: Visa-Generated Chip-Based ATM Fraud Advice

Field Number and Name		Notification/Response	
		9620	9630
		VIC	Acqr/Issr
63.11	Reimbursmt Attribute	C	
70	Netwk Mgmt Info Code	M	M
100	Rcvg Inst ID Code	M	
125	Supporting Info	M	
133	Term Serial Nbr	O	
137	App Trans Counter	O	O

Settlement Position Query (0600/0610) and Advice (0620/0630)

Table 184: Settlement Position Query and Advice

Field Number and Name		Settlement Position Query		Settlement Position Advice	
		0600	0610	0620	0630
		Acq/Iss	VIC	VIC	Acq/Iss
—	Bitmap, Secondary	M	M	M	M
7	Transmsn Date/Time	M	M	M	M
11	Sys Trace Audit Nbr	M	M	M	M
15	Date, Settlmt		M	M	M
33	Fwdng Inst ID Code	M	M	M	
37	Retrieval Ref Nbr	M	M	M	M
39	Resp Code		M		M
63.0	Bitmap (Field 63)	M	M	M	M
63.1	Netwk ID Code	M	M	M	M
63.4	STIP/Switch Rsn Code			M	
70	Netwk Mgmt Info Code	M	M	M	M
99	Settlmt Inst ID Code			M	
115	Addtnl Trace Data	O		C	
120	Auxiliary Transaction Data (TLV Frmt)			M	
125, Usage 2	Supporting Info (TLV Frmt)		M		

Collection-Only Transactions (9240/9250 and 9242/9252)

Collection-only transactions are intraprocessor Visa transactions processed entirely outside of VisaNet. Collection-only transactions submitted to VisaNet are not cleared, settled, or reported. Instead, Visa channels these collection-only transactions into special data warehouses where the transactions are available for selection for various Visa promotional programs, such as Visa Rewards and Our Treat. Submission of these transactions is optional.

In addition, Visa-processed transactions are forwarded to Visa promotional warehouses. No client action is required for Visa to warehouse these transactions.

To generate collection-only transactions, it is recommended that clients start with copies of original transactions, with all fields normally present in online messages. These transactions should be modified to use the collection-only message types and, as necessary, to meet the mandatory field requirements identified in the tables that follow.

Acquirer-submitted collection-only transactions must be purchase, cash withdrawal, quasi-cash, ATM cash disbursements, manual cash disbursements, and original adjustment transactions, or related reversals.

Issuer-generated collection-only transactions must be for dispute financial or dispute financial reversal transactions only.

These tables contain field requirements for the following message pairs:

- 9240/9250 for acquirer-originated transactions
- 9242/9252 for issuer-originated transactions

Acquirer-Generated Collection-Only Transaction-Mandatory Fields

Table 185: Acquirer-Generated Collection-Only Transaction-Mandatory Fields

Field Number and Name		9240 Advice	9250 Response
		Acquirer	VIC
—	Message Type Identifier	M	M
—	Bitmap, Secondary	M	M
2	Primary Acct Nbr	M	M
3	Processing Code	M	M
4	Amt, Trans	M	
7	Trans Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
12	Time, Local Trans	M	
13	Date, Local Trans	M	
18	Mchnt Type	M	
19	Acqng Inst Cntry Code	M	M
22	POS Entry Mode Code	M	
25	POS Condition Code	M	M
28	Amt, Trans Fee	O	
32	Acqng Inst ID Code	M	M
33	Fwdng Inst ID Code	C	C
34	Accptc Env	O	O
37	Retrieval Ref Nbr	M	M
39	Resp Code	M	M
41	Card Accptr Termnl ID	O	
42	Card Accptr ID Code	O	
43	Card Accptr Name/Loc	M	
49	Currency Code, Trans	M	
59	Natl POS Geo Data	O	
60.2	Term Entry Cap	O	

Table 185: Acquirer-Generated Collection-Only Transaction-Mandatory Fields

Field Number and Name		9240 Advice	9250 Response
		Acquirer	VIC
63.0	Bitmap (Field 63)	M	M
63.1	Netwk ID Code	M	M
63.3	Msg Rsn Code	C	
63.8	Visa Acqr's Bus ID	M	
90	Orig Data Elemts	M	M

Issuer-Generated Collection-Only Transaction-Mandatory Fields

Table 186: Issuer-Generated Collection-Only Transaction-Mandatory Fields

Field Number and Name		9242 Advice	9252 Response
		Issuer	VIC
—	Message Type Identifier	M	M
—	Bitmap, Secondary	M	M
2	Primary Acct Nbr	M	M
3	Processing Code	M	M
4	Amt, Trans	M	
7	Trans Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
12	Time, Local Trans	M	
13	Date, Local Trans	M	
18	Mchnt Type	M	
19	Acqng Inst Cntry Code	M	M
22	POS Entry Mode Code	M	
25	POS Condition Code	M	M
32	Acqng Inst ID Code	M	M
33	Fwdng Inst ID Code	C	C
34	Accptc Env	O	O
37	Retrieval Ref Nbr	M	M
39	Resp Code	M	M
43	Card Accptr Name/Loc	M	
49	Currency Code, Trans	M	
63.0	Bitmap (Field 63)	M	M
63.1	Netwk ID Code	M	M
63.3	Msg Rsn Code	M	
63.8	Visa Acqr's Bus ID	M	
90	Orig Data Elemts	M	M

Fraud Reporting (9620/9630)

Fraud messages can be generated by clients or by VisaNet. In client-generated messages, an acquirer or issuer sends a 9620 message to V.I.P. to report confirmed fraud transaction messages online. V.I.P. generates a 9630 response to the client and logs the message.

VisaNet-generated 9620 advices contain information concerning the disposition of client-generated 9620 fraud reports. Clients acknowledge Visa-generated 9620s by generating a 9630 response.

Client-Generated Fraud Advice and Response Message Format (Visa Network 0002)

Table 187: Client-Generated Fraud Advice and Response Message Format (Visa Network 0002)

Field Number and Name		Notification/Response	
		9620 Advice	9630 Response
		Acqr/Issr	VIC
—	Second Bitmap	M	M
2	Primary Acct Nbr	M	M
3	Processing Code	C	C
4	Amt, Trans	C	
7	Trans Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
13	Date, Local Trans	C	
14	Date, Expr	C	
15	Date, Settlmt		M
18	Mchnt Type	C	
22	POS Entry Mode Code	C	
23	Card Seq. Nbr	O	O
32	Acqng Inst ID Code	M	C
33	Fwdng Inst ID Code	M	M
34	Accptc Env	O	
37	Retrieval Ref Nbr	M	C
38	Auth ID Resp	O	
39	Resp Code		M
41	Card Accptr Termnl ID	M	
42	Card Accptr ID Code	M	
43	Card Accptr Name/Loc	C	
49	Currncy Code, Trans	M	
59	Natl POS Geo Data	C	
60	Additional POS Information	C	

Table 187: Client-Generated Fraud Advice and Response Message Format (Visa Network 0002)

Field Number and Name		Notification/Response	
		9620 Advice	9630 Response
		Acqr/Issr	VIC
60.2	Term Entry Cap (Pos. 2)	O	
61.1	Cashback Amt	C	
62.0	Bitmap (Field 62)		
62.2	Trans Idfr	C	
62.11	Mult Clrng Seq Nbr	O	
63.0	V.I.P. Private-Use Fields	M	M
63.1	Netwk ID Code	M	M
63.9	Positions 3-4 Fraud Data, Fraud Type Classification	C	
	Position 5 Fraud Data, Fraud Reporting Entity	M	
63.11	Reimbursmt Attribute	C	
70	Netwk Mgmt Info Code	M	M
100	Rcvg Inst ID Code	M	
115	Addtnl Trace Data	O	O
125	Supporting Info	M	

Client-Generated Fraud Advice and Response Message Format (Plus Network 0004)

Table 188: Client-Generated Fraud Advice and Response Message Format (Plus Network 0004)

Field Number and Name		Notification/Response	
		9620 Advice	9630 Response
		Acqr/Issr	VIC
—	Second Bitmap	M	M
2	Primary Acct Nbr	M	M
3	Processing Code	C	C
4	Amt, Trans	C	
7	Trans Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
13	Date, Local Trans	C	
14	Date, Expr	C	
15	Date, Settlmt		M+
18	Mchnt Type	C	
22	POS Entry Mode Code	C	
32	Acqng Inst ID Code	M	C
33	Fwdng Inst ID Code	M	M
34	Accptc Env	O	
37	Retrieval Ref Nbr	M	C
38	Auth ID Resp	O	
39	Resp Code		M+
41	Card Accptr Termnl ID	M	
42	Card Accptr ID Code	M	
43	Card Accptr Name/Loc	C	
49	Currncy Code, Trans	M	
59	Natl POS Geo Data	C	
60	Additional POS Information	C	
61.1	Cashback Amt	C	

Table 188: Client-Generated Fraud Advice and Response Message Format (Plus Network 0004)

Field Number and Name		Notification/Response	
		9620 Advice	9630 Response
		Acqr/Issr	VIC
62.0	Bitmap (Field 62)		
62.2	Trans Idfr	C	
63.0	V.I.P. Private-Use Fields	M	M
63.1	Netwk ID Code	M	M
63.9	Positions 3-4 Fraud Data, Fraud Type Classification	C	
	Positions 5 Fraud Data, Fraud Reporting Entity	M	
63.11	Reimbursmt Attribute	C	
70	Netwk Mgmt Info Code	M	M
100	Rcvg Inst ID Code	M	
125	Supporting Info	M	

Visa- and Plus-Generated Fraud Advice and Response Message Format

Table 189: Visa- and Plus-Generated Fraud Advice and Response Message Format

Field Number and Name		Notification/Response	
		9620	9630
		VIC	Acqr/Issr
—	Second Bitmap	M	M
2	Primary Acct Nbr	M	M
3	Processing Code	C	C
4	Amt, Trans	C	
7	Trans Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
13	Date, Local Trans	C	
14	Date, Expr	C	
15	Date, Settlmt	M	
18	Mchnt Type	C	
22	POS Entry Mode Code	O	
23	Card Seq. Nbr	O	O
32	Acqng Inst ID Code	C	
33	Fwdng Inst ID Code	M	
34	Accptc Env	O	
37	Retrieval Ref Nbr	C	C
38	Auth ID Resp	O	
39	Resp Code		M
41	Card Accptr Termnl ID	C	
42	Card Accptr ID Code	O	
43	Card Accptr Name/Loc	O	

**Table 189: Visa- and Plus-Generated Fraud Advice and Response
Message Format**

Field Number and Name		Notification/Response	
		9620	9630
		VIC	Acqr/Issr
48	Addtnl Data—Private	M	
	Position 1 Application Identifier	M	
	Positions 2-3 Fraud Response Code	M	
	Positions 4-7 Duplicate Sequence Number	C	
	Positions 8-10 Error 1	C	
	Positions 11-13 Error 2	C	
	Positions 14-16 Error 3	C	
	Positions 17-19 Error 4	C	
	Positions 20-22 Error 5	C	
	Positions 23-25 Error 6	C	
	Positions 26-28 Error 7	C	
	Positions 29-31 Error 8	C	
	Positions 32-34 Error 9	C	
	Positions 35-37 Error 10	C	
	Positions 38-255		
49	Currncy Code, Trans	C	
59	Natl POS Geo Data	C	
60	Addtnl POS Info	C	
60.2	Term Entry Cap (Pos. 2)	O	
61.1	Cashback Amt	C	
62.0	Bitmap (Field 62)		
62.2	Trans Idfr	C	
62.11	Mult Clrng Seq Nbr	O	
63.0	V.I.P. Private-Use Fields	M	M
63.1	Netwk ID Code	M	M
63.4	STIP/Switch Reason Code	M	

**Table 189: Visa- and Plus-Generated Fraud Advice and Response
Message Format**

Field Number and Name		Notification/Response	
		9620	9630
		VIC	Acqr/Issr
63.9	Positions 3-4 Fraud Data, Fraud Type Classification	C	
63.11	Reimbursmt Attribute	C	
70	Netwk Mgmt Info Code	M	M
100	Rcvg Inst ID Code	M	
125	Supporting Info	C	

CDB Inquiry for Account-Level Processing Issuers

This message format supports the inquiry process:

- ALP Product Inquiry (0302/0312). Issuers use these messages to review their ALP changes.

An inquiry message should not be submitted until one or two days after a CDB update request, to allow for processing of the update.

ALP Product Inquiry (0302/0312)

Table 190: ALP Product Inquiry (0302/0312)

Field Number and Name		Inquiry	
		0302	0312
		Iss	VIC
—	Bitmap, Secondary	M	M
2	Primary Acct Nbr	M	M
7	Transmsn Date/Time	M	M
11	Sys Trace Audit Nbr	M	M
23	Card Seq Nbr	C	C
37	Retrieval Ref Nbr	M	M
39	Resp Code		M
62.0	Bitmap (Field 62)		M
62.23	Product ID		M
62.24	Program Idfr		M
62.25	Spnd Qlfd Indctr	→	C
63.0	Bitmap (Field 63)	C	C
63.1	Netwk ID Code	C	C
73	Date, Action		O
91	File Update Code	M	M
101	File Name	M	M
127.L1	ALP Product File Inquiry		M

Token Messages

For information about the Visa Token Service, message layouts, and the fields used with token processing, see:

- *Full Service POS Online Messages Technical Specifications*
- *Visa Token Services Technical Specifications for Issuers*
- *Visa Token Services Technical Specifications for Acquirers*

Visa Resolve Online Messages

Dispute Response Financial Status Advice and Dispute Response Financial Reversal Status Advice

Table 191: Dispute Response Financial Status Advice and Dispute Response Financial Reversal Status Advice

Field Number and Name		Dispute Response Financial Status Advice/Dispute Response Financial Reversal Status Advice	
		0282	0292
		VIC	Acqr
—	Bitmap, Secondary	C	C
2	Primary Acct Nbr	M	M
3	Processing Code	M	M
4	Amt, Trans	M	
7	Transmsn Date/time	M	M
11	Sys Trace Audit Nbr	M	M
13	Date, Local Trans	M	
15	Date, Settlmt	M	M
18	Mchnt Type	M	
19	Acqng Inst Cntry Code	M	M
25	POS Cond Code	M	M
32	Acgng Inst ID Code	M	M
37	Retrieval Ref Nbr	M	M
38	Auth ID Response	O	
39	Resp Code	M	M
41	Card Accptr Termnl ID	C	C
42	Card Accptr ID Code	M	M
43	Card Accptr Name/Loc	M	

Table 191: Dispute Response Financial Status Advice and Dispute Response Financial Reversal Status Advice

48	Usage 39a: Dispute Details	M	
48	Usage 39b: Dispute Details	M	
49	Currncy Code, Trans	M	
60	Addtnl POS Info	M	
60.1	Terminal Type	O	
60.2	Term Entry Cap	O	
62.0	Bitmap (Field 62)	M	M
62.2	Trans Idfr	M	M
62.4	Market-Specific Data Idfr	C	O
62.11	Mult Clrng Seq Nbr	C	C
63.0	Bitmap (Field 63)	M	M
63.1	Netwk ID	M	M
63.3	Msg Rsn Code	M	
63.4	STIP/Switch Rsn Code	M	
111	Addnl Trans-Spcfc Data	C	
126.18	Agent Unique Acct Result	C	

Dispute Financial Status Advice and Dispute Financial Reversal Status Advice

Table 192: Dispute Financial Status Advice and Dispute Financial Reversal Status Advice

Field Number and Name		Dispute Financial Status Advice/ Dispute Financial Reversal Status Advice	
		0480	0490
		VIC	Issr
—	Bitmap, Secondary	C	C
2	Primary Acct Nbr	M	M
3	Processing Code	M	M
4	Amt, Trans	M	
7	Transmsn Date/time	M	M
11	Sys Trace Audit Nbr	M	M
13	Date, Local Trans	M	
15	Date, Settlmt	M	M
18	Mchnt Type	M	
19	Acqng Inst Cntry Code	M	M
25	POS Cond Code	M	M
32	Acgng Inst ID Code	M	M
37	Retrieval Ref Nbr	M	M
38	Auth ID Response	O	
39	Resp Code	M	M
41	Card Accptr Termnl ID	C	C
42	Card Accptr ID Code	M	M
43	Card Accptr Name/Loc	M	
48	Usage 39a: Dispute Details	M	
48	Usage 39b: Dispute Details	M	
49	Crrcy Code, Trans	M	
60	Addtnl POS Info	M	
60.1	Terminal Type	O	

Table 192: Dispute Financial Status Advice and Dispute Financial Reversal Status Advice

Field Number and Name		Dispute Financial Status Advice/ Dispute Financial Reversal Status Advice	
		0480	0490
		VIC	Issr
60.2	Term Entry Cap	O	
62.0	Bitmap (Field 62)	M	M
62.2	Trans Idfr	M	M
62.4	Market-Specific Data Idfr	C	O
62.11	Mult Clrng Seq Nbr	C	C
63.0	Bitmap (Field 63)	M	M
63.1	Netwk ID	M	M
63.3	Msg Rsn Code	M	
63.4	STIP/Switch Rsn Code	M	
111	Addnl Trans-Spcfc Data	C	
126.18	Agent Unique Acct Result		C

Appendix A

Files

This appendix describes the data and report files that ATM Service participants can receive from Visa, and information about using batch file maintenance to update records in the Cardholder Database (CDB).

Overview

This section contains an overview of data and report files that full service participants can receive from Visa and summarizes how the files are delivered to participants.

Data Files

ATM Service participants can elect to receive these types of data files:

- Raw (unformatted) data
- Visa/Plus routing tables
- Client settlement totals
- Visa Point-of-Sale Authorization (POSA) File

Raw data and client settlement totals are optional for acquirers and issuers. Raw data and routing tables are delivered to participants through a BASE II connection with TC 33 “wrappers” or an SMS OFD connection without wrappers. For more information, see “How Files Are Delivered” later in this overview.

Client settlement totals, which are the electronic version of the national and international settlement reports, are delivered in TC 46 records.

Raw data records are described in the Raw Data Records section of this appendix. The TC 46 record, which is used for client settlement totals, is described in the *BASE II Clearing Interchange Formats manual*.

The Point-of-Sale Authorization (POSA) File is an electronically transmitted data file that includes authorization only and full financial transaction data; it does not support options for detail vs. summary reports. Using this file, endpoints can generate detail and summary reports for themselves if they wish.

Mail deliveries of POS reports on tape, cartridge, and microfiche are not allowed in the U.S. region. Instead, U.S. acquirers can receive the daily POSA File via Direct Exchange Open File Delivery (OFD) or the Visa File Exchange Service (VFES).

For more information about this file, including record layouts, see “Visa Point-of Sale Authorization (POSA) File” later in this appendix.

Report Files

Participants may also receive these types of report files:

- SMS reports.
- VisaNet Settlement Service (VSS) reports.

The detail and reconciliation reports are delivered in TC 45 records. The report generation records, which are used for international and national settlement reports, are delivered in TC 47 records. TC 45 and 47 records are delivered only if the participant receives data via BASE II. For more information, see the *BASE II Clearing Interchange Formats manual*.

For information about detail reports, settlement reports, and reconciliation reports, see the *VisaNet Settlement Service (VSS) User's Guide, Volume 2*.

How Files Are Delivered

The following options are available for delivering SMS reports, raw data, and routing files to clients. Options vary by region. For details, contact your Visa representative.

- BASE II connection, which can be one of the following:
 - EA Server, with TC 33 and TC 45 wrappers.
 - Direct Exchange (DEX) Open File Delivery (OFD), with TC 33 and TC 45 wrappers. All BASE II options, including the DEX OFD option, use TC 33 and TC 45 wrappers around SMS data and reports.
- These non-BASE II options do **not** use TC formats; SMS, DEX OFD connection, without TC wrappers .

Deliveries Through BASE II Connection

The following documentation of files received through BASE II reflects record lengths of center transaction files (CTFs) after they have been processed by the incoming Edit Package.

VisaNet delivers SMS reports and raw data to BASE II connections seven days a week.

The following two tables list the file type, transaction code, and record length for data and report files. Note that each 168-byte file contains a file header (TC 90) and file trailer (TC 92). Batch trailers (TC 91) are present if the file contains multiple batches. The formats of the header and trailer records are included in the “Record Formats” section.

Table 193: Data Files

Description	File Type	Transaction Code	Record Length
Raw data	DBRAW or UNDIF	TC 33	168 bytes
Visa/Plus routing tables	UNDIF	TC 33	168 bytes
Machine —readable VSS (or settlement) reporting	SETLM, SETLR or UNDIF	TC 46	168 bytes

Table 194: Report Files

Description	File Type	Transaction Code	Record Length
SMS reports	DBRPT, DBRAW or UNDIF	TC 45	168 bytes
Print ready VSS (or settlement) reports ¹	SETLP, SETLR or UNDIF	TC 47	168 bytes

¹If VSS reports are configured to be combined and delivered with SMS reports, then the file types and transaction codes of SMS reports applies instead of the VSS-only documentation for this row.

VSS Report Delivery

VSS machine-readable report data in TC 46 wrappers is delivered in TC 46 format, regardless of whether the client is using a BASE II connection or another option.

VSS print-ready reports in TC 47 wrappers can be handled in one of two ways, depending on the delivery method chosen in the system tables:

- Platform Option: Data in TC 47 wrappers is delivered to the BASE II connection in TC 47 format.
- SMS Option: Data in TC 47 wrappers is sent to SMS to be combined with SMS detail reports.

V.I.P. strips the TC 47 wrapper to reveal the print-ready VSS reports, combines them with the SMS detail reports, and delivers the resulting file through the delivery methods specified earlier.

If a BASE II connection is used to deliver this file of combined SMS/VSS reports, then, like SMS reports alone, they are in TC 45 wrappers, not TC 47 wrappers.

Raw Data Records

As an optional service, Visa provides transaction details as raw data. Raw data differs from report data in that it is suited for automated processing. Raw data is available to all full service issuers and acquirers. Users of this service can create and reconcile their own customized reports. The raw data records are produced from the same sources as Visa-generated formatted transaction detail reports. Receipt of each record type is optional.

Raw data records are sent to issuers and acquirers and include a header and trailer record for control.

Routing Tables

The Visa and Plus routing tables are batch files that contain the account ranges applicable to each program. The tables are used by Visa and Plus acquirers to make authorization routing decisions.

ATM acquirers must use the Visa or Plus routing tables and must specify the preferred card program they wish to participate in within the network ID field. If the acquirer subscribes to the Priority Routing Service, then the acquirer must specify a network ID of '0000' in the network ID field. Arrangements for receiving the tables can be made through an acquirer's Visa Client Service representative.

Acquirers can choose to receive a combined Visa/Plus routing table that contains Visa and Plus account ranges.

This section contains specifications for receiving the Visa and Plus routing tables from Visa and is divided into the following subsections:

Delivery Schedules – Describes the delivery mechanisms that can be used to receive the routing tables.

Delivery Options – Describes the delivery options available to acquirers that receive the Visa and Plus routing tables in TC 33 records.

Record Formats – Contains detailed specifications for the table files.

Client-Written Programs – Describes the programs that an acquirer can use to extract and reformat the table records. Sample programs are included.

Delivery Schedules

VisaNet generates routing tables according to the schedule in this table.

Table 195: VisaNet Routing Table Distribution Schedule

for these Routing Tables	VisaNet generates/ receives	and BASE II delivers it on	Comments
Visa	generates each Tuesday	the following Wednesday BASE II Central Processing Day	Each transmission is a full file replacement. The file must be loaded for processing by the sixth business day following file distribution.
Plus	generates each Thursday	the following Friday BASE II Central Processing Day	Acquirers must load replacement tables for processing within three business days following receipt from Visa. Acquirers must modify the Plus Identifier table between regularly scheduled updates if Visa notifies it that Plus Switch has identified needed changes.
Combined Visa/Plus	each Wednesday, Pacific Time	The following Friday BASE II CPD	This is an optional combined Visa/Plus routing table. Each transmission is a full file replacement. The file must be loaded for processing within three (3) business days of file distribution. Acquirers that elect to receive the Combined Visa/Plus routing table must contact their Visa representative. Acquirers must modify their systems to process the Combined Visa/Plus routing table on their Edit Package and to maintain the Combined Visa/Plus routing table as part of their terminal and host routing logic.

Delivery Options

Delivery of the Visa, Plus, and Combined Visa/Plus routing tables is supported by:

- A BASE II connection, which can be one of the following:
 - EA Server, with TC 33 wrappers.
 - Direct Exchange Open File Delivery (OFD), with TC 33 wrappers.
- SMS, DEX OFD connection, without TC wrappers

BASE II Connection

This subsection contains the technical specifications for acquirers that have opted to receive routing tables through a BASE II connection.


The Interchange Transaction File (ITF) received from Visa is processed through the VisaNet BASE II Edit Package. The Edit Package produces one or more center transaction files (CTFs), several report files, and data files. One of the data files is the TC 33 extract file.

The TC 33 extract file contains TC 33 records for Plus routing tables. The Edit Package creates the file when these TC 33 records are present on the incoming ITF.

Routing table records are delivered in the Report Text field of the TC 33 record. Each routing table record contains three account range identifier entries per TC 33 record. Each TC 33 extract file contains data received from optional Visa Services such as Plus Identifier tables, combined Visa/Plus routing table, Visa Transaction Routing Service tables, Interlink Identifier tables, Visa Electron Routing Table, Mastercard Routing, Cirrus Routing, Armed Forces Financial Network, ATM No Surcharge Routing File, and VisaVue Solution Series Data and POS Acceptance Types Files.

The following figure depicts the processing required to receive the routing tables from a BASE II connection.

BASE II Processing Flow

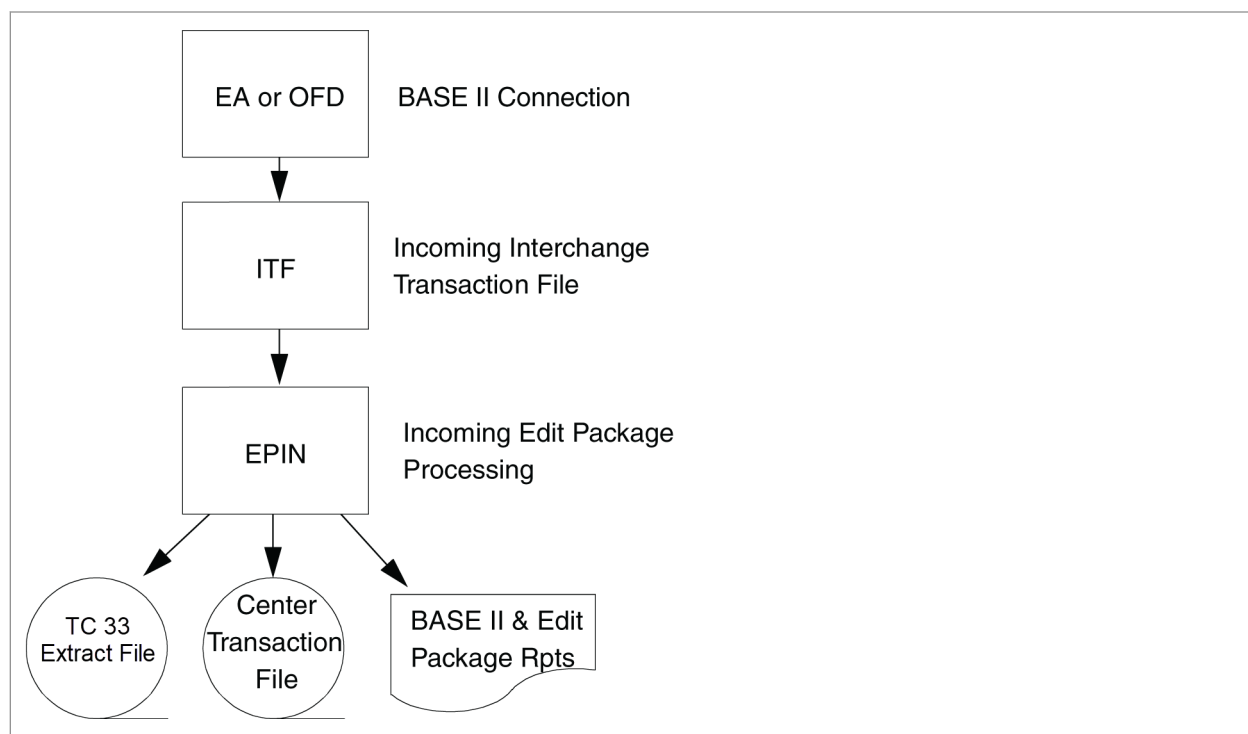

Record Formats

This section describes the following three formats of the Visa, Plus, and Combined Visa/Plus routing tables:

- Visa routing table compressed format (133-byte records)
- Plus Identifier table (133-byte records)
- Combined Visa/Plus routing table

This section also includes the routing tables for the Global Access Fee Free Service.

The compressed form of the Visa routing table contains three 40-byte table segments per TC 33. The Plus Identifier table contains one segment per 80-byte record. Because these routing tables are delivered in TC 33 records in the same file from the BASE II Edit Package, acquirers must write a program or programs to extract the routing table records and prepare the tables for use in the acquirer host system. Sample programs are described in the section below entitled "Client-Written Programs."

The general format and organization of the Visa and Plus routing tables are the same. Each table segment contains a sequence number, segment number, account length value, card prefix length value, and the card prefix. The sequence of table segments is as follows:

- Account length in ascending order
- Card prefix length in descending order
- Card prefix in ascending order

Note that in this context, card prefix can be 12 digits in length to uniquely identify a range of account numbers associated with a Visa or PLUS card program. For example, a card prefix of 412345678 (with account length of 16 and card prefix length of 9) means that any 16-digit card number that begins with 412345678 is a match in the routing table.

These three tables provide header, data, and trailer record specifications for the Visa Routing Table File.

Table 196: Visa Routing Table File Record Layout-Header Record

Field Name	Position	Length	Format	File Contents
Record Type	1–11	11	AN	Constant HEADER with trailing spaces
File Type	12–19	8	AN	Constant BINDISTR
Filler	20–21	2	AN	Spaces
Date	22– 26	5	N	Julian date file was created (YYDDD)
Processing	27–33	7	AN	Constant TOTAL with trailing spaces
Network Type	34–39	6	AN	Constant Visa with trailing spaces
Filler	40–49	10	AN	Spaces
Unique Identifier	50–56	7	N	Numeric identifier, unique for each week of a year
Filler	57–120	64	AN	Spaces
Table Identifier	121–133	13	AN	Constant Visa TABLE

Table 197: Visa Routing File Record Layout-Data Record

Field Name	Position	Length	Format	File Contents
Sequence Number	1–6	6	N	Consecutive sequence number incremented by one (1) from 000001
Segment Number	7	1	N	Equal to 1; allows for multiple records per account range
Account Length	8–9	2	N	Length of account number
Card Prefix Length	10–11	2	N	Number of digits used for routing

Table 197: Visa Routing File Record Layout-Data Record

Field Name	Position	Length	Format	File Contents
Card Prefix	12–23	12	N	Unique portion of the account number used for routing
Issuer Country Code	24–26	3	AN	Three-digit numeric country code of issuing identifier
Filler	27–28	2	AN	Spaces
Filler	27–40	14	AN	Spaces
Sequence Number	41–46	6	N	Consecutive number incremented by one from 000001
Segment Number	47	1	N	Equal to 1; allows for multiple records per account range
Account Length	48–49	2	N	Account number length
Card Prefix Length	50–51	2	N	Number of digits used for routing
Card Prefix	52–63	12	N	Unique portion of account number used for routing
Issuer Country Code	64–66	3	AN	Three-digit numeric country code of issuing identifier
Filler	67–80	14	AN	Spaces
Sequence Number	81–86	6	N	Consecutive number incremented by one from 000001
Segment Number	87	1	N	Equal to 1; allows for multiple records per account range
Account Length	88–89	2	N	Account number length
Card Prefix Length	90–91	2	N	Number of digits used for routing
Card Prefix	92–103	12	N	Unique portion of account number used for routing
Issuer Country Code	104–106	3	AN	Three-digit numeric country code of issuing identifier
Filler	107–120	14	AN	Spaces
Visa Table Identifier	121–133	13	AN	Constant Visa TABLE

Table 198: Visa Routing File Record Layout-Trailer Record

Field Name	Position	Length	Format	File Contents
Record Type	1–11	11	AN	Constant TRAILER with trailing spaces
File Type	12–19	8	AN	Constant BINDISTR
Detail Record Count	20–26	7	N	Number of detail records on file

Table 198: Visa Routing File Record Layout-Trailer Record

Field Name	Position	Length	Format	File Contents
Filler	27–120	94	AN	Spaces
Table Identifier	121–133	13	AN	Constant Visa TABLE

Plus Identifier Table Record Layouts

The Plus identifier table contains a header record, multiple data records, and a trailer record. These records appear in the 133-byte Report Text field of TC 33 records in the “UNDIF” file from the TC 33 extract file of the BASE II Edit Package. Acquirers can develop programs to remove header and trailer records to reduce the size of the table entries.

These three tables provide header, data, and trailer record specifications for the Plus Routing Table File.

Table 199: Plus Identifier Table File Record Layout-Header Record

Field Name	Position	Length	Format	File Contents
Record Type	1–11	11	AN	Constant TAPEHEADER with trailing space
File Type	12–19	8	AN	Constant BINDISTR
Filler	20–21	2	AN	Spaces
Date	22– 26	5	N	Julian date file was created (YYDDD)
Processing	27–33	7	AN	Constant TOTAL with trailing spaces
Filler	34–35	2	AN	Spaces
ID Tag	36–49	14	AN	Constant Plus BIN TABLE
Unique Identifier	50–56	7	N	Numeric identifier, unique for each week of a year
Filler	57–133	77	AN	Spaces

Table 200: Plus Identifier Table File Record Layout-Data Record

Field Name	Position	Length	Format	File Contents
Sequence Number	1–6	6	N	Consecutive sequence number incremented by one (1) from 000001
Segment Number	7	1	N	Equal to 1; allows for multiple records per account range
Account Length	8–9	2	N	Length of account number
Card Prefix Length	10–11	2	N	Number of digits used for routing
Card Prefix	12–23	12	N	Unique portion of the account number used for routing

Table 200: Plus Identifier Table File Record Layout-Data Record

Field Name	Position	Length	Format	File Contents
From-Account Type	24–26	3	AN	Default from-account type; used if no account was selected
Account Range Flag	27	1	AN	Visa BSPI Flag
Filler	28	1	AN	Space
Issuing Institution Country Code	29–31	3	N	Country code
Filler	32–35	4	AN	Spaces
ID Tag	36–49	14	AN	Constant Plus BIN TABLE
Filler	50–133	84	AN	Spaces

Table 201: Plus Identifier Table File Record Layout-Trailer Record

Field Name	Position	Length	Format	File Contents
Record Type	1–11	11	AN	Constant TAPETRAILER
File Type	12–19	8	AN	Constant BINDISTR
Detail Record Count	20–26	7	N	Number of detail records on file
Filler	27–35	9	AN	Spaces
ID Tag	36–49	14	AN	Constant Plus BIN TABLE
Filler	50–133	84	AN	Spaces

Combined Visa/Plus Routing Table Record Layouts

The format of the combined Visa/Plus routing table are based on the format of the Visa routing table. The following are the format modifications for the combined Visa/Plus routing table:

- Detail Record Count: A count of the total number of account ranges on the file is included in positions 34–40 in the header record
- Source File Indicator—ATM: The account range domain is identified in positions 31, 71, and 111 in each detail record
- Table Identifier: The identifier is 'VISAPLUS TBL' in positions 121–133 in the file header and trailer records and in each detail record

These three tables show the format of the Combined Visa/Plus routing table header, data, and trailer records.

Table 202: Combined Visa/Plus Routing Table File Record Layout-Header Record

Field Name	Position	Length	Format	File Contents
Record Type	1–11	11	AN	Constant HEADER with trailing spaces
File Type	12–19	8	AN	Constant BINDISTR
Filler	20–21	2	AN	Spaces
Date	22– 26	5	N	Julian date file was created (YYDDD)
Processing	27–33	7	AN	Constant TOTAL with trailing spaces
Detail Record Count	34–40	7	N	Number of account ranges on the file
Filler	41–49	9	AN	Spaces
Unique Identifier	50–56	7	N	Numeric identifier, unique for each week of a year
Filler	57–120	64	AN	Spaces
Table Identifier	121–133	13	AN	Constant VISAPLUS TBL

N = Numeric, AN = Alphanumeric

Table 203: Combined Visa/Plus Routing Table File Record Layout-Data Record

Field Name	Position	Length	Format	File Contents
Sequence Number	1–6	6	N	Consecutive sequence number incremented by one (1) from 000001
Segment Number	7	1	N	Equal to 1 ; allows for multiple records per account range
Account Length	8–9	2	N	Length of account number
Card Prefix Length	10–11	2	N	Number of digits used for routing
Card Prefix	12–23	12	N	Unique portion of the account number used for routing
Issuer Country Code	24–26	3	AN	3-digit numeric country code of issuing identifier
Filler	27–30	4	AN	Spaces
Source File Indicator–ATM	31	1	AN	Identifies the account range domain: 1 = Visa 2 = Plus 3 = Visa and Plus
Filler	32–40	9	AN	Spaces
Sequence Number	41–46	6	N	Consecutive number incremented by one from 000001

Table 203: Combined Visa/Plus Routing Table File Record Layout-Data Record

Field Name	Position	Length	Format	File Contents
Sequent Number	47	1	N	Equal to 1 ; allows for multiple records per account range
Account Length	48–49	2	N	Account number length
Card Prefix Length	50–51	2	N	Number of digits used for routing
Card Prefix	52–63	12	N	Unique portion of account number used for routing
Issuer Country Code	64–66	3	AN	3-digit numeric country code of issuing identifier
Filler	67–70	4	AN	Spaces
Source File Indicator–ATM	71	1	AN	Identifies the account range domain: 1 = Visa 2 = Plus 3 = Visa and Plus
Filler	72–80	9	AN	Spaces
Sequence Number	81–86	6	N	Consecutive number incremented by one from 000001
Segment Number	87	1	N	Equal to 1 ; allows for multiple records per account range
Account Length	88–89	2	N	Account number length
Card Prefix Length	90–91	2	N	Number of digits used for routing
Card Prefix	92–103	12	N	Unique portion of account number used for routing
Issuer Country Code	104–106	3	AN	3-digit numeric country code of issuing identifier
Filler	107–110	4	AN	Spaces
Source File Indicator–ATM	111	1	AN	Identifies the account range domain: 1 = Visa 2 = Plus 3 = Visa and Plus
Filler	112–120	9	AN	Spaces
Table Identifier	121–133	13	AN	Constant VISAPLUS TBL

N = Numeric, AN = Alphanumeric

Table 204: Combined Visa/Plus Routing Table File Record Layout-Trailer Record

Field Name	Position	Length	Format	File Contents
Record Type	1–11	11	AN	Constant TRAILER with trailing spaces
File Type	12–19	8	AN	Constant BINDISTR
Filler	20–120	101	AN	Spaces
Table Identifier	121–133	13	AN	Constant VISAPLUS TBL

AN = Alphanumeric

Routing Table File Search Procedures

This section describes the search procedures that should be used to determine whether a given account number is included in one of the account ranges defined in the Routing Table File.

The file is divided into sections according to account length. Each section contains one account length value. The account length sections are sorted in ascending order by account length. For example, if there are account numbers with 13, 16, and 19 digits listed on the file, all the 13-digit account numbers are listed first; next, all the 16-digit account numbers; and lastly, all the 19-digit account numbers.

Within each account length section, the records are sorted by card prefix length in descending order.

Within each card prefix length, the card prefixes are listed sequentially in ascending order.

Acquirers that receive the file must program their systems to search the file as follows:

1. Determine the length of the account number. This value is referred to as ***al***.
2. Begin the search with a card prefix length of 12 (card prefix length values are **2** through **12**). This value is referred to as ***n***.
3. Search all records that have an account number length of ***al*** and a card prefix length of ***n*** for a card prefix value that matches the cardholder's account number. The first ***n*** digits of the cardholder's account number must match the card prefix value on file.
4. If there is a match, terminate the search and route the transaction for that account number to Visa.

If there is no match in records with a card prefix length of ***n*** and an account length of ***al***, decrease the value of ***n*** by **1** and continue the search starting from Step 3.

If the value of ***n*** reaches **1**, all of the records with this value are searched. If there are no matches, terminate the search and assume that the transaction cannot be routed to Visa.

Searching a Sample Routing Table File

This table provides the Routing Table File field descriptions needed to understand the file search logic.

Table 205: Routing Table File Field Descriptions

Field Name	Description
Sequence Number	This field indicates the sequence number for each record. The first of the data records starts with 1, and every record following is incremented by 1.
Segment Number	This field contains the segment number for each record, which allows multiple records to be associated with one account range. Since the Routing Table has only one record per account range, the segment number is 1.
Account Length	This field is used to match the cardholder account length to the records in the file that contain the same account length.
Card Prefix Length	This field indicates the card prefix length, which can be an integer value from 2 to 12 .
Card Prefix	This field contains the values to search for while finding a card prefix.

This table contains account record examples from a sample Routing Table File. For the numbered callouts (in bold brackets), see the instructions that follow the table.

Table 206: Account Record Examples

Sequence No.	Segment No.	Account Length	Card Prefix Length	Card Prefix [1]
1	1	13	11	3xxxxx54321 [1]
2	1	13	11	3xxxxx54322 [1]
3	1	13	11	3xxxxx54323 [1]
4	1	13	10	3xxxxx7652 [2]
5	1	13	10	4xxxxx5675 [2]
6	1	13	8	3xxxxx67
7	1	13	8	5xxxxx51
8	1	13	8	5xxxxx52
9	1	13	7	3xxxxx1 [3]
10	1	13	7	3xxxxx2
11	1	13	7	4xxxxx1
12	1	13	7	4xxxxx2

Table 206: Account Record Examples

Sequence No.	Segment No.	Account Length	Card Prefix Length	Card Prefix [1]
13	1	13	7	4xxxxx3
14	1	13	6	3xxxxx
15	1	13	4	3xxx
16	1	16	10	5xxxxx6789

Instructions for Locating an Account Number

1. Determine the length of the account number on a transaction. In this example, the account number is 3xxx xx11 1924 3. The length of this number is 13 digits.
2. Begin the search with a card prefix length of 11.
3. Search all records that have an account length of 13 and a card prefix length of 11 for a card prefix value that matches the first 11 digits of the cardholder's account number (3xxx xx11 192) **[1]**. In this example, there is no match.
4. Reduce the card prefix length used for the search from 11 to 10 and search all records that have an account length of 13 and a card prefix length of 10 for a card prefix value that matches the first 10 digits of the cardholder's account number (3xxx xx11 19) **[2]**. Again, there is no match.
5. Continue reducing the card prefix length and repeating the search as in Step 4 until there is a match. In this case, there is a match when the card prefix length is 7; the search can be terminated **[3]**.

U.S. Routing Table Format and File Options

Visa provides one routing table format that supports all programs and services. Tables are distributed through BASE II (EA or OFD) with TC 33 wrappers, or Open File Delivery (OFD) without TC 33 wrappers. Routing files are available for daily or weekly distribution. The U.S. routing table format is available to acquirers in all regions.

The following subsections describe:

- Routing table options.
- Distribution options.
- Routing table file format layouts.

Routing Table Options

As defined by their business processing, U.S. acquirers may use one of these routing table categories (Acquirers also have the option of using Priority Routing, in which case they must not use a routing file). Acquirers that support Card Absent Interlink must use either the "Interlink and Visa Routing File" or the "PIN at Point of Sale" routing file to identify Interlink CNP PINless-enabled BINs.

Only Interlink and Visa Routing File and PIN at POS routing file contain Interlink CNP PINless indicators.

Table 207: Routing Table Categories

Routing Table Categories	Description
ATM	Includes all Visa and Plus card programs.
Consolidated Routing File	Includes all Visa, Interlink, Plus, and Authorization-Only programs that can be processed through VisaNet.
Interlink and Visa Routing File	Includes all Interlink and PIN-authenticated Visa Debit programs. This file is used for POS with PIN processing and Card Absent capable Interlink processing. Only Visa account ranges that support PIN-authenticated Visa Debit are included in this file. Acquirers that accept ATM or non-PIN POS Visa transactions should use other routing tables (in addition to this file if Acquirer also accepts Card Absent Interlink). This file includes cards defined with these values in the Brand Indicator field of the routing table: V (Visa) I (Interlink) B (Visa and Interlink)
PIN at Point of Sale	Contains all programs that support PIN at the point of sale, including Interlink, and PIN-authenticated Visa Debit. It is also used to indicate Card Absent capable Interlink BINS. Acquirers that accept ATM or non-PIN POS Visa transactions should use other routing tables (in addition to this file if Acquirer also accepts Card Absent Interlink).
Visa Routing File	Includes all Visa products, U.S., and non-U.S. card programs.
POS Debit Device	Includes Visa U.S. POS debit devices only.
Visa Multiple Account Access Routing Table	Contains only account ranges that participate in multiple-account access.

Distribution Options

The following replacement and update options are available for acquirers that receive Visa routing tables:

- Weekly full replacements.
- Weekly full replacements with daily updates (6 days a week).
- Daily full replacements (7 days a week).

Weekly Full Replacements

The routing table is produced and distributed on Tuesdays. Upon receipt, the acquirer's internal processing must apply the weekly routing table. If the acquirer subscribes to the weekly full routing table, the table must be applied to the acquirer's system processing at a maximum interval of seven days. If the routing file is not applied immediately, customers could experience acceptance issues.

Weekly Full Replacements With Daily Updates

Recipients may optionally subscribe to the daily update file that builds upon the weekly full replacement file. This file includes Delete and Add records created since the last weekly routing file. Recipients must process the Delete records followed by the Add records, along with related detail records, and apply them to the last weekly routing table.

The file contains a record with the word "DELETE". Account ranges following this record should be removed from the routing table. After the last account range to be deleted, a record containing the word "ADD" is present. Account ranges following this record should be added to the routing table.

Daily updates reflect changes from the previous day's routing table. The update files contain only one day's worth of change. Each daily update file must be applied in the order it was received (for example, Wednesday's update file must be applied before Thursday's). Update files are sent out Wednesday through Monday. Acquirers receiving daily updates must also receive and load the weekly full replacement file on Tuesdays. Acquirers must update their internal processing daily upon receipt of the daily updates.

Daily Full Replacement

This routing table replaces the previous day's file. The recipient must ensure that the routing table is applied to their system processing within seven days from receipt. If the routing file is not applied immediately, customers could experience acceptance issues. Recipients of the daily full replacement file must not subscribe to the weekly full replacement file or the daily updates, because the daily full file contains this information.

Routing Table File Format Layouts

This section contains the following record layouts:

- Routing Table, File Record Layout – Header
- Routing Table, Detail Record Layout
- Visa Routing Table – Trailer Record
- Visa Routing Table – Daily Update File, Unique Record Layout

Clients that choose to have the file delivered through Base II sees TC 33 “wrappers” around the data. The layouts documented in this section starts at position 35 of the TC 33. For clients receiving the file through non-BASE II Direct Exchange (DEX), the layout is as documented.

This table provides detailed information about all routing table options.

Table 208: Routing Table File Record Layout-Header Record

Field Name	Position	Length	Format	Field Contents
Record Type	1–11	11	AN	Literal 'HEADER' with trailing spaces.
File Type	12–19	8	AN	Literal 'BINDISTR'
Filler	20–21	2	AN	Spaces
Date	22–26	5	N	GMT Julian date file was created. The format is YYDDD, where: YY = Year DDD = Julian Day
Filler	27	1	AN	Space
Time	28–35	8	N	GMT time file was created. The format is hh:mm:ss, where: hh = hour mm = minute ss = second
Filler	36	1	AN	Space
Literal	37–43	7	AN	Literal 'TOTAL' with trailing spaces.
Detail Record Count	44–50	7	N	Number of account ranges on the file.
Filler	51	1	AN	Space
File Description	52–101	50	AN	Detail information describing the report description.
Filler	102–114	10	AN	Spaces

Table 208: Routing Table File Record Layout-Header Record

Field Name	Position	Length	Format	Field Contents
Unique Identifier	115-121	7	N	Numeric identifier, unique for each week of a year
Table Identifier	122-133	12	AN	Within a file, the header, detail, and trailer records have common identifier.

Table 209: Routing Table Detail Record Layout

Field Name	Position	Length	Format	File Contents
Account/card length	1-2	2	N	Length of account number. Values: 11-19.
Card Prefix length	3-4	2	N	Number of digits associated with the card prefix. Values: 4-12. The card prefix is padded to the right with zeros. Some of the trailing zeros may be a significant portion of the card prefix. Recipients must use this card prefix length field to determine how many digits in the field are significant.
Card Prefix	5-16	12	N	Unique portion of the account number used for routing, left-justified and padded with trailing zeros. Maximum is 12 characters.
Issuer Country Code	17-19	3	AN	3-digit numeric country code of issuing identifier.
U.S. Acceptance Type	20	1	AN	Identifies the acceptance types associated with each card program. Space = Not applicable. D = U.S. consumer debit products. O = U.S. other Visa products. I = Non-U.S. card programs. A = Combo card, debit and credit. C = Combo card, credit and prepaid. B = U.S. business debit. M = U.S. commercial prepaid. P = U.S. consumer prepaid. For ATM routing files, this position contains a space.

Table 209: Routing Table Detail Record Layout

Field Name	Position	Length	Format	File Contents
PIN at Point-of-Sale indicator	21	1	AN	Indicates if the card range is capable of processing PINs from the point of sale for Visa program: 0 = No PIN capability. 1 = Reserved (for future use). 2 = PIN-authenticated Visa Debit. 3 = Interlink. 4 = Reserved (for future use). 5 = Visa and Interlink. Interlink acquirers can process the following: - Interlink transactions - PIN-authenticated Visa Debit POS transactions Interlink acquirers can identify Visa Debit cards that support PIN by the values of 2 and 5 in this field. A value of 5 also supports traditional (non-PIN-authenticated Visa Debit) Interlink. Interlink acquirers that receive one of the routing tables supported for Interlink should be aware of these values. The Interlink and Visa table includes Interlink and PIN-authenticated Visa Debit card ranges. Acquirers may use their Interlink connection to submit transactions to issuers that support: - PIN-authenticated Visa Debit, identified with a value of 2 or 5 in this field. - Interlink, identified with the values of 3 or 5 in this field. Acquirers can use Interlink processing for PIN-authenticated Visa Debit transactions, including exception items. PIN-authenticated Visa Debit POS transactions submitted by Interlink acquirers follows the Interlink settlement process. When Interlink acquirers send messages to issuers that support PIN-authenticated Visa Debit, V.I.P. performs the necessary message-conversion processing.
Auth-only Indicator	22	1	AN	Card range for authorization only. It does not settle through VisaNet. If set, the value equals Y; otherwise, it contains spaces.

Table 209: Routing Table Detail Record Layout

Field Name	Position	Length	Format	File Contents
Brand Indicator	23	1	AN	Identifies the brand or brands associated with the account range. V = Visa I = Interlink P = Plus A = Authorization Only B = Visa and Interlink D = Visa and Plus E = Visa, Interlink, and Plus L = Interlink and Plus Values A, B, D, E, and L appear on files only where multiple network is supported (for instance., the Consolidated file, ATM file or the PIN at Point of Sale Routing File).
Account Funding Source Subtype	24	1	AN	Space = Not applicable. R = Prepaid card is reloadable. N = Prepaid card is not reloadable.
ATM Deposit Indicator	25	1	AN	Indicates ATM Cash or Non-Cash deposit participation (Domestic and/or International) with these values: • B = Card range supports all domestic (cash and non-cash deposits) • C = Card range supports domestic cash deposits only • Y = Card range supports domestic non-cash deposits only • Space = Not participating in ATM deposits • D = Card range supports all domestic (cash and non-cash deposit) and international cash deposit (return foreign currency) • E = Card range supports domestic cash deposit and international cash deposit (return foreign currency) • F = Card range supports domestic non-cash deposits, and international cash deposit (return foreign currency) • G = Card range supports international cash deposit (return foreign currency)
Global Access Fee Free Indicator	26	1	AN	Space = Not participating. D = Domestic only. I = Domestic, regional, and interregional. R = Domestic and regional.

Table 209: Routing Table Detail Record Layout

Field Name	Position	Length	Format	File Contents
Service Indicator	27	1	AN	This field indicates whether the account range supports a service. Space = No services are supported. A = Auto-substantiation. B = Employee benefit (only applies in specific countries). R = Load-enabled.
Fast Funds	28	1	AN	This field indicates fast funds participation for money transfer OCTs. B = Domestic and cross-border fast funds. C = Future use. D = Domestic fast funds only. N = Does not participate in fast funds.
Money Transfer Acceptance	29	1	AN	This field indicates participation in money transfer original credit transactions. A = Participates in basic format OCTs. B = Participates in enhanced money transfer OCTs. C = Participates in both basic and enhanced money transfer OCTs. D = Participates in non-money transfer OCTs. E = Participates in enhanced money transfer and non-money transfer OCTs. N = Does not participate in OCTs. Acquirers and originators initiating enhanced money transfer OCTs may choose to use this field to determine whether designated recipient issuers are able to receive OCTs. Acquirers and originators can send enhanced money transfer OCTs to issuers for which the field value is A, B, C, or E but not D, or N. Acquirers and originators can send basic money transfer OCTs to issuers for which the field value is A or C, but not B, D, E or N. For Interlink and Visa, PIN at Point of Sale, and POS Debit Device routing files, position 29 = space.
Token Indicator	30	1	AN	This field indicates token participation. Y = Participates in tokenization. N = Does not participate in tokenization.

Table 209: Routing Table Detail Record Layout

Field Name	Position	Length	Format	File Contents
Installment Payments	31	1	AN	This field indicates issuer participation in installment payments. C = Participates in Crediário installment payments for Brazil. N = Does not participate in installment payments.
ATM Mini Statement Indicator	32	1	AN	Y = Participates in ATM mini statement. N = Does not participate in ATM mini statement.
ATM Account Transfer Indicator	33	1	AN	D = Domestic only. I = Domestic, intraregional, and interregional. R = Domestic and intraregional only. N = Not participating.
Reserved	34	1	AN	This field contains spaces.
Credential Presence Supported	35	1	AN	Indicates Credential Presence Supported with these values: • Space = Not applicable • A = Card present only • B = Card present and card-not-present Value of Space means that Interlink is limited to card present.
PIN Requirement	36	1	AN	Indicates PIN Requirement with these: • Space = Not applicable • 1 = Not required • 2 = Card present • 3 = Card present and card-not-present Value of Space means the Interlink is limited to PIN required.
Reserved	37-40	4	AN	This field contains spaces.
Logical Record #2	41-80	40	AN	This is a repeat of positions 1-40 and provides for multiple card ranges within a record. For logical record two, new values in the ATM Deposit Indicator field will be present in position 65 of the detail record. These fields will be present in position 75 and position 76 of the detail record: • Credential Presence Supported • PIN Requirement

Table 209: Routing Table Detail Record Layout

Field Name	Position	Length	Format	File Contents
Logical Record #3	81–120	40	AN	This is a repeat of positions 1–40 and provides for multiple card ranges within a record. For logical record three, new values in the ATM Deposit Indicator field will be present in position 65 of the detail record. These fields will be present in position 115 and position 116 of the detail record: • Credential Presence Supported • PIN Requirement
Filler	121	1	AN	Space
Table Identifier	122–133	12	AN	Within a file, the header, detail, and trailer records have common identifier.

Table 210: Visa Routing Table-Trailer Record

Field Name	Position	Length	Format	File Contents
Record Type	1–11	11	AN	Literal 'TRAILER' with trailing spaces.
File Type	12–19	8	AN	Literal 'BINDISTR'
Filler	20–121	102	AN	Spaces
Table Identifier	122–133	12	AN	Within a file, the header, detail, and trailer records have common identifier.

This table shows records that applies only to the daily update routing table. This record indicates if subsequent records are 'Deletes' or 'Adds'. The Daily Update file has a 'DELETE' record followed by detail records to be deleted; then 'ADD' records followed by detail records to be added. If there are no deletes or adds to the weekly routing table file, the Daily Update file includes the header, 'DELETE', 'ADD' and trailer records.

Table 211: Visa Routing Table-Daily Update File, Unique Record Layout

Field Name	Position	Length	Format	Field Contents
Record Type	1–6	68	AN	DELETE or ADD with trailing spaces.
Filler	7–121	115	AN	Spaces
Table Identifier	122–133	12	AN	Within a file, the header, detail, and trailer records have common identifier.

This table provides detailed information about all routing table options:

- Weekly full options.
- Daily full options.
- Daily updates.

Table 212: U.S. Routing Files

Subscription Category	Table Identifier	Report Identifier	Delivery Frequency	Description
ATM Routing File	RTG ATM FULL	DSATMFULDY	Daily	This is the daily full replacement of the ATM Routing File.
		DSATMFULWK	Weekly, every Tuesday	This is a weekly replacement file that includes Visa ATM and Plus ATM.
	RTG ATM DLTA	DSATMDLTDY	Daily, except Tuesday	This is the daily file that includes the deletes and adds to the last weekly ATM Routing File.
Consolidated Routing File	RTG CON FULL	DSCONFULDY	Daily	This is the daily full replacement of the Consolidated Routing File.
		DSCONFULWK	Weekly, every Tuesday	This is the weekly replacement file that includes all Visa products.
	RTG CON DLTA	DSCONDLTDY	Daily, except Tuesday	This is the daily file that includes the deletes and adds to the last weekly Consolidated Routing File.
Interlink and Visa Routing File	RTG ILK FULL	DSILKFULDY	Daily	This is the daily full replacement of the Interlink and Visa Routing File.
		DSILKFULWK	Weekly, every Tuesday	This is a weekly replacement file that includes only Interlink.
	RTG ILK DLTA	DSILKDLTDY	Daily	This is a daily file that contains the deletes and adds to the last weekly Interlink and Visa Routing File.
PIN at Point of Sale Routing File	RTG PIN FULL	DSPINFULDY	Daily	This is the daily full replacement of the PIN at Point of Sale Routing File.
		DSPINFULWK	Weekly, every Tuesday	This is a weekly replacement file that includes Visa cards where PIN at point-of-sale indicator is set. This file also includes Interlink card ranges.
	RTG PIN DLTA	DSPINDLTDY	Daily	This is a daily file that contains the deletes and adds to the last weekly PIN at Point-of-Sale Routing File.

Table 212: U.S. Routing Files

Subscription Category	Table Identifier	Report Identifier	Delivery Frequency	Description
POS Debit Device Routing File	RTG POS FULL	DSPOSFULDY	Daily	This is the daily full replacement of the POS Debit Device Routing File.
		DSPOSFULWK	Weekly, every Tuesday	This is a weekly replacement file that includes Visa POS Debit Device.
	RTG POS DLTA	DSPOSDLTDY	Daily	This is a daily file that contains the deletes and adds to the last weekly POS Debit Device Routing File.
Visa Routing File	RTG NW2 FULL	DSNW2FULDY	Daily	This is the daily full replacement of the Visa Routing File.
		DSNW2FULWK	Weekly, every Tuesday	This is the weekly replacement file that includes all Visa products.
	RTG NW2 DLTA	DSNW2DLTDY	Daily, except Tuesday	This is the daily file that contains the deletes and adds to the last weekly Visa Routing File.
Consolidated Routing File (prepaid type)	RTG CAF FULL	DSCAFFULDY	Daily	This is the daily full replacement of the Consolidated File (prepaid type).
		DSCAFFULWK	Weekly, every Tuesday	This is a weekly replacement file that includes Visa, Interlink, and Plus account ranges.
	RTG CAF DLTA	DSCAFDLTDY	Daily, except Tuesday	This is a daily file that contains deletes and adds that apply to the last weekly Consolidated Routing Table (prepaid type).
Visa Multiple Account Access Routing Table	RTG MAA FULL	DSMAAFULDY	Daily	This is the daily full replacement of the Visa Multiple Account Access Routing Table file.
		DSMAAFULWK	Weekly, every Wednesday	This is the weekly full replacement of the Visa Multiple Account Access Routing Table file.
	RTG MAA DLTA	DSMAADLTDY	Daily, except Wednesday	This is the daily file that contains the deletes and adds to the last weekly Visa Multiple Account Access Routing Table file.

Multi-Brand Files: Some routing files contain multiple brands, such as the consolidated file, which contains information about ranges that support one or more of the brands Visa, Interlink, and/or Plus. Individual account prefixes can support multiple brands. This is indicated on one entry in the routing file with the multi-brand value in the Brand field. PIN at the point-of-sale capabilities may also coexist on Visa and/or Interlink networks.

An acquirer that chooses to split multi-brand files should be aware that many ranges qualify for multiple files. For instance, an acquirer that uses the Brand field to create Visa, Interlink, and Plus files should be aware that a card prefix with a Brand value of **B** can be split onto the Visa and Interlink file. A prefix with a Brand value of **E** can be split onto all 3 files, and so on.

Similarly, an account prefix with a PIN at Point-of-Sale indicator of 3 (Interlink) may also have a multi-brand Brand value like **B**, **E**, or **L** that also qualifies the prefix to be split onto other files.

Record Layouts

For layouts of the following records, which apply only to files that are delivered via BASE II, see the *BASE II Clearing Interchange Formats* manual.

- TC 33 Multipurpose Message Transaction. The TC 33 is used for raw data and routing table files.
- TC 90, 91, and 92 file header and trailer records. The TC 90 header and TC 91 and TC 92 trailer records are used to identify and provide totals for all record types, including TC 33.

Visa Point-of-Sale Authorization (POSA) File

The POSA File is delivered to subscribing acquirers daily via Direct Exchange Open File Delivery (OFD) or the Visa File Exchange Service (VFES). This reporting mechanism has the following characteristics:

- One file is provided with debit and credit transaction data.
- The file includes all of the data elements contained in other POS reports to acquirers, along with additional transactions and fields to support recent service offerings.
- Because edits against non-POS system data have been removed, the POSA File contains a larger representation of logged transactions than other reporting mechanisms.

The availability of additional transaction data may be used to help reduce fraud and dispute losses and improve billing accuracy.

It is recommended that endpoints review their current POS reporting data job streams to identify opportunities to eliminate receipt of duplicate data.

For information on implementing Direct Exchange Open File Delivery and the Visa File Exchange Service, see the latest versions of the following publications:

- *Visa Direct Exchange Open File Delivery Implementation Guide.*
- *Visa File Exchange Service (VFES) Client Implementation Guide.*

High-Level Requirements

To receive the File, the endpoint must:

1. Sign up to receive the File.
2. Implement Direct Exchange or as the file transport vehicle.
VFES files cannot exceed 2 GB.
3. The File type must be defined in the endpoint's configuration.
4. Follow the file naming convention, which Visa provides during implementation and testing with each endpoint.

Service Parameters

An endpoint receiving the File can specify the file parameters described in this table.

Table 213: POSA File-Service Parameters and Options

Parameter	Options
Reporting Levels	File parameters allow each endpoint to receive data using combinations of acquiring identifier and PCR settings as filter criteria. Note: The setup of endpoint selections is done by Visa, not the endpoint. The endpoint selects the data it receives from Visa in the POSA File as follows: PCR: Data can be selected at the PCR level; that is, the data for acquiring identifiers under the PCR is included in one file. 12 CIB/NCNID entries per PCR are supported. Acquiring Identifiers: Data can be selected for acquiring identifiers under a PCR; that is, one or multiple acquiring identifiers can be turned on for a given PCR. If this option is selected, the endpoint receives a file for each acquiring identifier. 12 CIB/NCNID entries per acquiring identifier are supported. Acquiring Identifier Roll-Up ID: Data can be selected for multiple “Child Acquiring Identifiers” per endpoint. If this option is selected, the endpoint receives one file containing the data for the selected Child Acquiring Identifiers. A Roll-Up ID can be an acquiring identifier, CIB or NCNID. There is no entry limit for Child Acquiring Identifiers for a Roll-Up ID. Note: The choice of data is determined at the Source Identifier/PCR level, not at the CIB level. In the case of Acquiring Identifier Roll-Up ID files, the choice of data is the same for all Child Acquiring Identifiers under that Roll-Up ID.
Subscription Options	When the subscriber is using an acquiring identifier or Roll-Up ID, the following sub-options may be used in combination to further define the data reported: MCC From/To Terminal ID From/To (1st 10 bytes) Acquirer PCR From/To When the subscriber is an acquirer PCR, the following sub-selection ranges are available: MCC From/To Terminal ID From/To (1st 10 bytes) Acquirer Identifier From/To For example: Acquiring Identifier NNNNNN can select data PCR XXXX, Terminal ID 1000101099 and MCC 6011. In this case, the Acquirer PCR From/To is XXXX, Terminal ID From/To is 1000101099, and the MCC From/To is 6011. Acquiring Identifier NNNNNN wants data for all PCRs, Terminal IDs and MCCs. In this case Acquirer PCR From/To, MCC From/To and Terminal ID From/To is blank.

Table 213: POSA File-Service Parameters and Options

Parameter	Options
Acquiring Identifier Roll-Up ID File Size	The endpoint should evaluate its telecommunications bandwidth relative to the estimated Acquiring Identifier Roll-Up ID POSA File size. If necessary, the endpoint may want to consider receiving multiple files (that is, using multiple Acquiring Identifier Roll-Up IDs) to ensure the potential file size does not impact their processing. Visa staff assists endpoints with this analysis. Connect:Direct Endpoints: Visa recommends that the file size not exceed 10 GB. FTP Endpoints: Visa recommends using smaller file sizes, because checkpoint/restart is not supported.
Endpoint Delivery	Data can be sent to multiple endpoint, or to different CIBs, for each of the file options listed above: single acquiring identifier, PCR, or Acquiring Identifier Roll-Up ID file.

File Delivery and Availability

This table describes various timeframes that pertain to POSA File content, delivery, and availability.

Table 214: Timeframes for POSA File Transactions, Delivery, and Availability

Parameter	Description
File Transactions	The POSA File contains transactions authorized between 00:00 GMT and 23:59 GMT.
File Delivery	The delivery timeframe varies by the length of time required for Application processing. The File is typically available for handoff to OFD the following day by 20:00 GMT. Files are held by OFD for no more than 5 minutes. Note: Processing files larger than 10 GB, or with numerous child acquiring identifiers under a Roll-Up ID, may require additional processing time. Files are delivered as soon as they are available.
Backup Files	Backups of the daily POSA files are available for a period of three months from the original creation date. "Recreate" requests can be met only if received by Visa within this period.

POSA File Layout

The File contains:

- One header record
- Detail records
- One trailer record

Each record is 600 bytes long, with no packed data fields.

Header Record

Table 215: POSA File-Header Record Layout

Field Name	Position	Length (Bytes)	Type	Comments
Header Record ID	1	1	AN	Value = 0
Filler	2–23	22	AN	Spaces
File Type	24–26	3	AN	Values: EXT = Extract Unsorted EXS = Extract Sorted
File Create Date	27–32	6	N	Format: <i>YYMMDD</i> The date the POSA File is being created.
Process Start Date	33–38	6	N	Format: <i>YYMMDD</i> The processing start date for the data contained in the POSA File, that is, the date when transactions were logged.
Process End Date	39–44	6	N	Format: <i>YYMMDD</i> . The processing end date for the data contained in the POSA File; because the file is a daily file, this date is the same as the Process Start Date.
Filler	45–600	556	AN	Spaces

Detail Records

For detailed information on the definition, usage, and values of ISO fields in these records, please see the field descriptions in Chapter 4 of this manual. In this table, fields are identified by number in column 1; special formats for ISO fields are identified in the Comments column.

Non-ISO data defined internally by Visa is identified by **n/a** in column 1 and a designation of **“Visa use only”** in the Comments column.

If there is no data for a field in the POSA File, then the field contains spaces.

Tables below represent POS/PSR (TC33 Format) and the POSA (Point of Sale Authorization Report) generic format layouts.

Record Layout for POS/PSR and (TC33 Format)

Table 216: TC33, TCR 0-Authorization and Incremental Authorization (POS) Record Layout (1 of 5)

From	Through	Length	Format	Field Name	ISO Field	Comment
1	2	2	UN	Transaction Code	-	This field contains 33 .
3	3	1	UN	Transaction Code Qualifier	-	This field contains a zero.
4	4	1	UN	Transaction Component Sequence Number	-	This field contains a zero.
5	10	6	UN	Destination Identifier	-	This field contains a valid Acquiring Identifier.
11	16	6	UN	Source Identifier	-	This field contains 400083 .
17	19	3	AN	TC 33 Application Code	-	This field contains POS.
20	22	3	UN	Julian Day	-	This field contains the day of the year that data is prepared. The valid values are 001–366 .
23	32	10	UN	Report Line Sequence Number	-	This field contains the sequence number of this line within the report.
33	34	2	UN	Reserved Field	-	This field contains spaces.
35	45	11	AN	Acquiring Institution ID	Field 32	This field contains a value that identifies the financial institution acting as the acquirer of this customer transaction.
46	60	15	AN	Card Acceptor ID Code	Field 42	Card Acceptor ID Code (15 positions) – ISO field F42.
61	68	8	AN	Terminal ID	Field 41	Terminal ID (8 positions) – ISO field F41.
69	74	6	UN	Transaction Date	Field 7	This field contains the date in the mmddyy (month, day, year) format.

Table 216: TC33, TCR 0-Authorization and Incremental Authorization (POS) Record Layout (2 of 5)

From	Through	Length	Format	Field Name	ISO Field	Comment
75	80	6	UN	Transaction Time	Field 12	This field contains the time in the hhmmss (hour, minute, second) format.
81	82	2	UN	Processing Code	Field 3.1	This field contains a two-digit code identifying the type of cardholder transaction or center function being processed.
83	98	16	UN	Account Number	Field 2	This field contains the number identifying the cardholder account or relationship.
99	102	4	UN	Merchant Category Code	Field 18	This field contains a valid 4-digit MCC.
103	114	12	UN	Authorized Amount; (original currency)	Field 4	This field contains the transaction amount either in U.S. dollars or per the currency code identified in positions 145–147.
115	118	4	UN	Expiration Date	Field 14	This field contains the date in the MMY format.
119	120	2	AN	Response Code	Field 39	This field contains a code that defines the response to a request or the message disposition.
121	126	6	AN	Authorization Code	Field 38	This field contains the authorization code provided by the issuer when a transaction is approved.

Table 216: TC33, TCR 0-Authorization and Incremental Authorization (POS) Record Layout (3 of 5)

From	Through	Length	Format	Field Name	ISO Field	Comment
127	128	2	AN	Communication Line Type	-	This field contains one of the following values: 8S = 800—SYNCH AL = ASYNC DC = DATAPAC—CANADA DF = UNUSED DI = DIAL—ISDN DL = DIAL—LOCAL DR = DRN—LATA DV = DATA-OVER-VOICE DW = WATS EC = ELECTRONIC COMM EL = ECR—LEASED or DIRECT-CONNECTS FS = FGB—SYNCH LC = DIAL—LOCAL— CANADA MP = SYSTEM—VAP UD = UNDEFINED XL = X25
129	132	4	UN	Acquirer Station ID	H.6	This field contains the first 4 positions of the Acquirer Station ID
133	133	1	AN	CVV Result	Field 44.1	This field contains a Visa-defined code indicating card verification value (CVV) verification result.
134	134	1	AN	AVS Result	Field 44.2	This field contains a Visa-defined code that describes the address verification result for a U.S. Visa or MasterCard transaction.
135	136	2	UN	Entry Mode Code	Field 22, Positions 1 and 2	This field contains a 2-digit code indicating the method used to enter the account number and card expiration date (positions 1 and 2).

Table 216: TC33, TCR 0-Authorization and Incremental Authorization (POS) Record Layout (4 of 5)

From	Through	Length	Format	Field Name	ISO Field	Comment
137	137	1	UN	PIN Entry Capability	Field 22, Position 3	If an electronic terminal is used, this field a one-digit code to indicate the capability of the terminal to capture online PIN (positions 3).
138	138	1	UN	Terminal Type	Field 60.1	This is a 1-digit code identifying the basic point-of-service electronic terminal. This field is also used for identifying ATM transactions.
139	139	1	UN	Entry Capability	Field 60.2	This is a 1-digit code identifying the terminal's capability to electronically read account numbers and expiration dates from cards.
140	141	2	UN	POS Condition Code	Field 25	This field contains a code identifying transaction conditions at the point of sale or point of service.
142	142	1	AN	Market-Specific Data Indicator	Field 62.4	Field 62.4 identifies the industry market-specific data, provided from field 62 sub-fields.
143	143	1	AN	Reserved	-	This field is reserved for Future use.
144	144	1	AN	Response Source/ Reason Code	Field 44.1	When authorized by VisaNet, this field contains a value to identify the source of the authorization (Visa or STIP)
145	147	3	UN	Currency Code	Field 49	This field contains a code that identifies the currency of the amount field in positions 103– 114.
148	148	1	AN	Authorization Characteristics Ind.	Field 62.1	This field contains the result of an acquirer request for CPS qualification and may contain the Incremental Authorization Indicator..

Table 216: TC33, TCR 0-Authorization and Incremental Authorization (POS) Record Layout (5 of 5)

From	Through	Length	Format	Field Name	ISO Field	Comment
149	163	15	UN	VisaNet Transaction Identifier	Field 62.17 / Field 62.2	This field contains a Visa-generated identifier unique for each original transaction. This is a key element that links original authorization requests to subsequent messages, such as reversals.
164	167	4	AN	Validation Code	Field 62.3	This field contains a V.I.P.-calculated code to ensure key fields in the 0100 Authorization requests match their respective fields in BASE II clearing messages.
168	168	1	AN	Reserved	-	This field contains a zero.

Table 217: TC33, TCR 1-Authorization and Incremental Authorization (POS) Additional Information Record Layout (1 of 5)

From	Through	Length	Format	Field Name	ISO Field	Comment
1	2	2	UN	Transaction Code	-	This field contains a 33 .
3	3	1	UN	Transaction Code Qualifier	-	This field contains a zero.
4	4	1	UN	Transaction Component Sequence Number	-	This field contains a 1 .
5	16	12	UN	Cashback Amount	Field 61.1, Positions 1–12	This field contains the purchase cashback amount expressed in the acquirer's transaction currency.
17	41	25	AN	Card Acceptor Name	Field 43, Positions 1–25	This field contains the name and location of the card acceptor (merchant or ATM), The first position in this field cannot be a space.
42	43	2	AN	Card Acceptor Country Code	Field 43, Positions 39–40.	This field contains a valid BASE II code. The first two positions of this field will be the country code and the third character will be a space.

Table 217: TC33, TCR 1–Authorization and Incremental Authorization (POS) Additional Information Record Layout (2 of 5)

From	Through	Length	Format	Field Name	ISO Field	Comment
44	44	1	AN	Account Funding Source	Field 111 DSI 56 Tag 80	Contains any of these product account funding source values from Visa: • C (Credit) • D (Debit) • H (Charge) • P (Prepaid) • R (Deferred debit)
45	46	2	AN	Product ID	Field 62.23	This field contains the product defined for the card-level results in the authorization.
47	56	10	AN	Merchant Verification Value	Field 62.20	This field contains the information from field 62.20 that is used to identify participants in the U.S. Select Merchant Fee program.
57	68	12	AN	American Express Point-of-Service Data Code	Field 116, Dataset ID 66, Tag 01	This field contains the value of the American Express Point-of-Service Data Code subfield from field 116, with dataset ID 66, which contains data from American Express authorization request messages. This field is blank when field 116, with dataset ID 66, is not present in 0110 authorization response messages.
69	71	3	UN	MasterCard Point-of-Service (POS) Entry Mode	Field 116, Dataset ID 67, Tag 01	This field contains the value of the MasterCard Point-of-Service (POS) Entry Mode subfield from field 116, with dataset ID 67, which contains data from CIS DE 22 in MasterCard authorization request messages. This field is blank when field 116, with dataset ID 67, is not present in 0110 Authorization response messages.

Table 217: TC33, TCR 1–Authorization and Incremental Authorization (POS) Additional Information Record Layout (3 of 5)

From	Through	Length	Format	Field Name	ISO Field	Comment
72	73	2	UN	MasterCard Point-of-Service (POS) Personal ID Number (PIN) Capture Code	Field 116, Dataset ID 67, Tag 02	This field contains the value of the MasterCard Point-of-Service (POS) Personal ID Number (PIN) Capture Code subfield from field 116, with dataset ID 67, which contains data from CIS DE 26 in MasterCard authorization request messages. This field is blank when Field 116, with dataset ID 67, is not present in 0110 Authorization response messages.
74	99	26	AN	MasterCard Point-of-Service (POS) Data	Field 116, Dataset ID 67, Tag 03	This field contains the value of the MasterCard Point-of-Service (POS) Data subfield from field 116, with dataset ID 67, which contains data from CIS DE 61 in MasterCard authorization request messages. When populated, this field contains between 1 and 26 bytes of data, left-justified, and space-filled. This field is blank when field 116, with dataset ID 67, is not present in 0110 Authorization response messages.
100	105	6	AN	MasterCard Acquirer ID	Field 62.20	This field will contain the MasterCard-Assigned ID from field 62.20 in MasterCard transactions. When the MasterCard-Assigned ID is not present in MasterCard transactions, this field will be spaces. This field will be spaces for non-MasterCard transactions.
106	120	15	AN	Network Information (Diners/Discover)	Field 116, Dataset ID 68, Tag 01	This field contains the value from field 116, Dataset ID 68, Tag 01.
121	122	2	AN	Transaction Qualifier (Diners/Discover)	Field 116, Dataset ID 68, Tag 02	This field contains the value from field 116, Dataset ID 68, Tag 02.

Table 217: TC33, TCR 1–Authorization and Incremental Authorization (POS) Additional Information Record Layout (4 of 5)

From	Through	Length	Format	Field Name	ISO Field	Comment
123	132	10	AN	Date and Time (Mastercard)	Field 116, Dataset ID 68, Tag 04	This field contains the value from field 116, Dataset ID 67, Tag 04.
133	133	1	AN	DCC Indicator	Field 126.19	This field contains a unique identifier to indicate DCC was performed by the merchant (at the point-of-sale) and the ATM acquirer (at the ATM terminal).
134	134	1	AN	CVV2 Results	Field 44.10	This field contains a Card Verification Value 2 (CVV2) verification result.
135	135	1	AN	Card Authentication Results	Field 44.8	This field contains a Visa-defined code to indicate Online Card Authentication Method (CAM) results. Online CAM results are also known as EMV Online Cryptogram check results or Chip Authenticate results.
136	136	1	AN	Card Authentication Verification Value (CAVV) Results	Field 44.13	This field contains the Cardholder Authentication Verification Value (CAVV) results code that identifies the outcome of CAVV validation.
137	138	2	N	MOTO/Ecommerce Indicator	Field 60.8	This field contains the Mail/Phone/Electronic Commerce and Payment Indicator.
139	139	1	N	Cardholder ID Method	Field 60.9	This field identifies the cardholder identification method indicator used for a transaction.
140	140	1	N	Additional Authorization Indicators (Estimated and Partial authorization Indicator)	Field 60.10	This 1-digit code identifies: • Terminal support for partial authorizations. • Request for POS authorization of estimated amount.

Table 217: TC33, TCR 1–Authorization and Incremental Authorization (POS) Additional Information Record Layout (5 of 5)

From	Through	Length	Format	Field Name	ISO Field	Comment
141	141	1	AN	POS Environment Code	Field 126.13	This field contains an indicator for recurring payments, installment payments, and credentials on file.
142	142	1	AN	Spend Qualified Indicator	Field 62.25	VisaNet Integrated Payment (V.I.P.) populates this field with the spend-qualified indicator.
143	143	1	AN	Account Status (Regulated/Non-Regulated)	Field 62.26	This field identifies the U.S. issued account range as regulated or non-regulated.
144	152	9	AN	Account Range 1–9	-	This field contains the 9-digit account range.
153	154	2	AN	Token Assurance Method	Field 104, Usage 2, Dataset ID 65, Tag 25	This field contains the token assurance method, present in 0100/0110 authorization request/response and 0400/0410 reversal request/response messages (Mastercard Data Element DE48, Sub-element 33, and Sub-field 5).
155	165	11	AN	Token Requestor ID	Field 123	Usage 2, Dataset 68, Tag 03
166	167	2	AN	Account Type (To)	Field 3, Positions 5–6	For ATM account transfers, this field contains the account type, a two-digit code identifying the account type where an account transfer is made.
168	168	1	AN	Reserved	-	This field contains a zero.

Table 218: TC33, TCR 0–Authorization Full and Partial Reversal (PSR) Record Layout (1 of 4)

From	Through	Length	Format	Field Name	ISO Field	Comment
1	2	2	UN	Transaction Code	-	This field contains a 33 .
3	3	1	UN	Transaction Code Qualifier	-	This field contains a zero.

**Table 218: TC33, TCR 0–Authorization Full and Partial Reversal (PSR) Record Layout
(2 of 4)**

From	Through	Length	Format	Field Name	ISO Field	Comment
4	4	1	UN	Transaction Component Sequence Number	-	This field contains a zero.
5	10	6	UN	Destination Identifier	-	This field contains a valid acquiring identifier.
11	16	6	UN	Source Identifier	-	This field contains 400083 .
17	19	3	AN	TC 33 Application Code	-	This field contains POS.
20	22	3	UN	Julian Day	-	This field contains the day of the year that data is prepared. The valid values are 001–366 .
23	32	10	UN	Report Line Sequence Number	-	This field contains the sequence number of this line within the report.
33	34	2	UN	Reserved field	-	This field contains spaces.
35	45	11	AN	Acquiring Institution ID	Field 32	This field contains a value that identifies the financial institution acting as the acquirer of this customer transaction.
46	60	15	AN	Card Acceptor ID Code	Field 42	Card Acceptor ID Code (15 positions) – ISO field F42.
61	68	8	AN	Terminal ID	Field 41	Terminal ID (8 positions) – ISO field F41
69	74	6	UN	Transaction Date	Field 7	This field contains the date in the mmddyy (month, day, year) format.
75	80	6	UN	Transaction Time	Field 12	This field contains the time in the hhmmss (hour, minute, second) format.
81	96	16	UN	Primary Account Number	Field 3.1	This field contains the number identifying the cardholder account or relationship.
97	100	4	UN	Merchant Category Code	Field 18	This field contains a valid 4-digit MCC.

**Table 218: TC33, TCR 0–Authorization Full and Partial Reversal (PSR) Record Layout
(3 of 4)**

From	Through	Length	Format	Field Name	ISO Field	Comment
101	112	12	UN	Total Authorized Amount (Original Currency)	Field 4	This field contains the transaction amount either in U.S. dollars or per the currency code identified in positions 138–140.
113	116	4	UN	Expiration Date	Field 14	This field contains the date in the yymm (year, month) format.
117	118	2	AN	Response Code	Field 39	This field contains a code that defines the response to a request or the message disposition.
119	124	6	AN	Authorization Code	Field 38	This field contains the authorization code provided by the issuer when a transaction is approved.
125	126	2	AN	Communication Line Type	N/A	This field contains one of the following values: 8S = 800—SYNCH AL = ASYNC DC = DATAPAC—CANADA DF = UNUSED DI = DIAL—ISDN DL = DIAL—LOCAL DR = DRN—LATA DV = DATA-OVER-VOICE DW = WATS EC = ELECTRONIC COMM EL = ECR—LEASED or DIRECT-CONNECTS FS = FGB—SYNCH LC = DIAL—LOCAL—CANADA MP = SYSTEM—VAP UD = UNDEFINED XL = X25
127	130	4	UN	Acquirer Station ID	H.6	First 4 positions of the Acquirer Station ID.

Table 218: TC33, TCR 0–Authorization Full and Partial Reversal (PSR) Record Layout (4 of 4)

From	Through	Length	Format	Field Name	ISO Field	Comment
131	133	3	UN	POS Entry Mode	Field22, Positions 1 and 2	This field contains a 2-digit code indicating the method used to enter the account number and card expiration date (positions 1 and 2).
134	135	2	UN	PIN Entry Capability	Field22, Position3	If an electronic terminal is used, this field a one-digit code to indicate the capability of the terminal to capture online PIN (positions 3).
136	137	2	UN	POS Condition Code	Field 25	This field contains a code identifying transaction conditions at the point of sale or point of service.
138	140	3	UN	Currency Code	Field 49	This field contains a code that identifies the currency of the amount field in positions 103–114.
141	152	12	UN	Replacement Amount	Field 95, Position 1-12	This field contains the corrected amount of the transaction in a partial reversal.
153	167	15	UN	VisaNet Transaction Identifier	Field 62.17 / Field 62.2	This field contains a Visa-generated identifier unique for each original transaction. This is a key element that links original authorization requests to subsequent messages, such as reversals.
168	168	1	AN	Reserved	-	This field contains a zero.

Table 219: TC33, TCR 1–Authorization Full and Partial Reversal (PSR) Additional Information Record Layout (1 of 3)

From	Through	Length	Format	Field Name	ISO Field	Comment
1	2	2	UN	Transaction Code	-	This field contains a 33 .
3	3	1	UN	Transaction Code Qualifier	-	This field contains a zero.
4	4	1	UN	Transaction Component Sequence Number	-	This field contains a 1 .

Table 219: TC33, TCR 1–Authorization Full and Partial Reversal (PSR) Additional Information Record Layout (2 of 3)

From	Through	Length	Format	Field Name	ISO Field	Comment
5	16	12	UN	Cashback Amount	Field 61.1, Positions 1-12	This field contains the purchase cashback amount expressed in the acquirer transaction currency.
17	41	25	AN	Card Acceptor Name	Field 43, Positions 1–25	The first position in this field cannot be a space.
42	43	2	AN	Card Acceptor Country Code	Field 43, Positions 39–40	This field contains a valid BASE II code. The first two positions of this field is country code and the third character is a space.
44	44	1	AN	Account Funding Source	Field 111, DSI 56, Tag 80	Contains any of these product account funding source value from Visa: • C (Credit) • D (Debit) • H (Charge) • P (Prepaid) • R (Deferred Debit)
45	46	2	AN	Product ID	Field 62.23	This field contains the product defined for the card-level results in the authorization.
47	56	10	AN	Merchant Verification Value	Field 62.20	This field contains the information from field 62.20 that is used to identify participants in the U.S. Select Merchant Fee program.
57	62	6	AN	MasterCard Acquirer ID	Field 62.20	This field will contain the MasterCard-Assigned ID from field 62.20 in MasterCard transactions. When the MasterCard-Assigned ID is not present in MasterCard transactions, this field will be spaces. This field will be spaces for non-MasterCard transactions.

Table 219: TC33, TCR 1–Authorization Full and Partial Reversal (PSR) Additional Information Record Layout (3 of 3)

From	Through	Length	Format	Field Name	ISO Field	Comment
63	64	2	UN	Processing Code	Field 3.1	This field contains a two-digit code identifying the type of cardholder transaction or center function being processed.
65	167	103		Reserved	-	This field contain spaces.
168	168	1	AN	Reserved	-	This field contains a zero.

Table 220: TC33, TCR 2–Line Item Detail–Passenger Itinerary Data Record Layout (1 of 4)

From	Through	Length	Format	Field Name	ISO Field	Comment
1	2	2	UN	Transaction Code	-	This field contains the value of 33 .
3	3	1	UN	Transaction Code Qualifier	-	This field contains the value of zero.
4	4	1	UN	Transaction Component Sequence Number	-	This field contains the value of 2 .
5	16	12	AN	Reserved	-	This field is space-filled.
17	18	2	AN	Clearing Business Format Code	-	This field contains the value AI .
19	26	8	AN	Reserved	-	This field is space-filled.
27	46	20	AN	Passenger Name	Field 48, Usage 4, Positions 3-22	This field contains Passenger Name. If not present, this field is space-filled.
47	52	6	UN	Departure Date	Field 48, Usage 4, Positions 23-28	This field contains Departure Date. If not present, this field is zero-filled. Format: mmddyy
53	55	3	AN	Origination City/Airport Code	Field 48, Usage 4, Positions 29-31	This field contains Origination City/Airport Code. If not present, this field is space-filled.
56	57	2	AN	Trip Leg 1, Carrier Code	Field 48, Usage 4, Positions 32-33	This field contains Trip Leg 1, Carrier Code. If not present, this field is space-filled.

Table 220: TC33, TCR 2-Line Item Detail–Passenger Itinerary Data Record Layout (2 of 4)

From	Through	Length	Format	Field Name	ISO Field	Comment
58	58	1	AN	Trip Leg 1, Service Class Code	Field 48, Usage 4, Position 34	This field contains Trip Leg 1, Service Class Code. If not present, this field is space-filled.
59	59	1	AN	Trip Leg 1, Stop-Over Code	Field 48, Usage 4, Position 35	This field contains Stop-Over Code. If not present, this field is space-filled.
60	62	3	AN	Trip Leg 1, Destination City/Airport Code	Field 48, Usage 4, Positions 36-38	This field contains Trip Leg 1, Destination City/Airport Code. If not present, this field is space-filled.
63	64	2	AN	Trip Leg 2, Carrier Code	Field 48, Usage 4, Positions 39-40	This field contains Trip Leg 2, Carrier Code. If not present, this field is space-filled.
65	65	1	AN	Trip Leg 2, Service Class Code	Field 48, Usage 4, Position 41	This field contains Trip Leg 2, Service Class Code. If not present, this field is space-filled.
66	66	1	AN	Trip Leg 2, Stop-Over Code	Field 48, Usage 4, Position 42	This field contains Trip Leg 2, Stop-Over Code. If not present, this field is space-filled.
67	69	3	AN	Trip Leg 2, Destination City/Airport Code	Field 48, Usage 4, Positions 43-45	This field contains Trip Leg 2, Destination City/Airport Code. If not present, this field is space-filled.
70	71	2	AN	Trip Leg 3, Carrier Code	Field 48, Usage 4, Positions 46-47	This field contains Trip Leg 3, Carrier Code. If not present, this field is space-filled.
72	72	1	AN	Trip Leg 3, Service Class Code	Field 48, Usage 4, Position 48	This field contains Trip Leg 3, Service Class Code. If not present, this field is space-filled.
73	73	1	AN	Trip Leg 3, Stop-Over Code	Field 48, Usage 4, Position 49	This field contains Trip Leg 3, Stop-Over Code. If not present, this field is space-filled.

Table 220: TC33, TCR 2-Line Item Detail–Passenger Itinerary Data Record Layout (3 of 4)

From	Through	Length	Format	Field Name	ISO Field	Comment
74	76	3	AN	Trip Leg 3, Destination City/Airport Code	Field 48, Usage 4, Positions 50-52	This field contains Trip Leg 3, Destination City/Airport Code. If not present, this field is space-filled.
77	78	2	AN	Trip Leg 4, Carrier Code	Field 48, Usage 4, Positions 53-54	This field contains Trip Leg 4, Carrier Code. If not present, this field is space-filled.
79	79	1	AN	Trip Leg 4, Service Class Code	Field 48, Usage 4, Position 55	This field contains Trip Leg 4, Service Class Code. If not present, this field is space-filled.
80	80	1	AN	Trip Leg 4, Stop-Over Code	Field 48, Usage 4, Position 56	This field contains Trip Leg 4, Stop-Over Code. If not present, this field is space-filled.
81	83	3	AN	Trip Leg 4, Destination City/Airport Code	Field 48, Usage 4, Positions 57-59	This field contains Trip Leg 4, Destination City/Airport Code. If not present, this field is space-filled.
84	91	8	AN	Travel Agency Code	Field 48, Usage 4, Positions 60-67	This field contains Travel Agency Code. If not present, this field is space-filled.
92	116	25	AN	Travel Agency Name	Field 48, Usage 4, Positions 68-92	This field contains Travel Agency Name. If not present, this field is space-filled.
117	117	1	AN	Restricted Ticket Indicator	Field 62.13	This field contains the Restricted Ticket Indicator. If not present, this field is space-filled.
118	123	6	AN	Fare Basis Code–Leg 1	Field 104, Dataset ID 60, Tag 01	This field contains the Fare Basis Code–Leg 1. If not present, this field is space-filled.
124	129	6	AN	Fare Basis Code–Leg 2	Field 104, Dataset ID 60, Tag 02	This field contains the Fare Basis Code–Leg 2. If not present, this field is space-filled.

Table 220: TC33, TCR 2-Line Item Detail–Passenger Itinerary Data Record Layout (4 of 4)

From	Through	Length	Format	Field Name	ISO Field	Comment
130	135	6	AN	Fare Basis Code–Leg 3	Field 104, Dataset ID 60, Tag 03	This field contains the Fare Basis Code–Leg 3. If not present, this field is space-filled.
136	141	6	AN	Fare Basis Code–Leg 4	Field 104, Dataset ID 60, Tag 04	This field contains the Fare Basis Code–Leg 4. If not present, this field is space-filled.
142	145	4	AN	Computerized Res System	Field 104, Dataset ID 60, Tag 05	This field contains Computerized Res System. If not present, this field is space-filled.
146	150	5	AN	Flight Number–Leg 1	Field 104, Dataset ID 60, Tag 06	This field contains Flight Number–Leg 1. If not present, this field is space-filled.
151	155	5	AN	Flight Number–Leg 2	Field 104, Dataset ID 60, Tag 07	This field contains Flight Number–Leg 2. If not present, this field is space-filled.
156	160	5	AN	Flight Number–Leg 3	Field 104, Dataset ID 60, Tag 08	This field contains Flight Number–Leg 3. If not present, this field is space-filled.
161	165	5	AN	Flight Number–Leg 4	Field 104, Dataset ID 60, Tag 09	This field contains Flight Number–Leg 4. If not present, this field is space-filled.
166	168	3	AN	Reserved	-	This field is space-filled.

Table 221: TC33, TCR 2-Line Item Detail–Lodging Record Layout (1 of 3)

From	Through	Length	Format	Field Name	ISO Field	Comment
1	2	2	UN	Transaction Code	-	This field contains the value of 33 .
3	3	1	UN	Transaction Code Qualifier	-	This field contains the value of zero.
4	4	1	UN	Transaction Component Sequence Number	-	This field contains the value of 2 .
5	16	12	AN	Reserved	-	This field is space-filled.

Table 221: TC33, TCR 2-Line Item Detail-Lodging Record Layout (2 of 3)

From	Through	Length	Format	Field Name	ISO Field	Comment
17	18	2	AN	Clearing Business Format Code	-	This field contains the value LG .
19	26	8	AN	Reserved	-	This field is space-filled.
27	27	1	AN	No Show Indicator	Field 62.9	This field contains the No Show Indicator. If not present, this field is space-filled.
28	33	6	UN	Extra Charges	Field 62.10	This field contains Extra Charges. If not present, this field is zero-filled. Note: Two decimal places are implied.
34	37	4	AN	Reserved	-	This field is space-filled.
38	43	6	UN	Lodging Check-In Date	Field 62.8	This field contains Auto Rental Check-Out Date, Lodging Check-In Date. If not present, this field is zero-filled. Format: yymmdd
44	55	12	UN	Daily Room Rate	Field 104, Dataset ID 62, Tag 01	This field contains Daily Room Rate. If not present, this field is zero-filled. Note: Two decimal places are implied.
56	67	12	UN	Total Tax	Field 104, Dataset ID 62, Tag 02	This field contains Total Tax. If not present, this field is zero-filled. Note: Two decimal places are implied.
68	79	12	UN	Prepaid Expenses	Field 104, Dataset ID 62, Tag 03	This field contains Prepaid Expenses. If not present, this field is zero-filled. Note: Two decimal places are implied.

Table 221: TC33, TCR 2-Line Item Detail-Lodging Record Layout (3 of 3)

From	Through	Length	Format	Field Name	ISO Field	Comment
80	91	12	UN	Food/Bev Charges	Field 104, Dataset ID 62, Tag 04	This field contains Food/Bev Charges. If not present, this field is zero-filled. Note: Two decimal places are implied.
92	103	12	UN	Folio Cash Advances	Field 104, Dataset ID 62, Tag 05	This field contains Folio Cash Advances. If not present, this field is zero-filled. Note: Two decimal places are implied.
104	105	2	UN	Room Nights	Field 104, Dataset ID 62, Tag 06	This field contains Room Nights. If not present, this field is zero-filled.
106	117	12	UN	Total Room Tax	Field 104, Dataset ID 62, Tag 07	This field contains Total Room Tax. If not present, this field is zero-filled. Note: Two decimal places are implied.
118	168	51	AN	Reserved	-	This field is space-filled.

Table 222: TC33, TCR 3-Additional Line Item Detail Data Record Layout (1 of 6)

From	Through	Length	Format	Field Name	ISO Field	Comment
1	2	2	UN	Transaction Code	-	This field contains the value of 33 .
3	3	1	UN	Transaction Code Qualifier	-	This field contains the value of zero.
4	4	1	UN	Transaction Component Sequence Number	-	This field contains the value of 3 .

Table 222: TC33, TCR 3–Additional Line Item Detail Data Record Layout (2 of 6)

From	Through	Length	Format	Field Name	ISO Field	Comment
5	16	12	UN	Local Tax	Field 104	For fuel (automated fuel dispenser (AFD) and service station) transactions, the value of this field is taken from Field 104, Dataset ID 5C, Tag 14, Local Tax. For all transactions other than fuel, the value of this field is taken from Field 104, Dataset ID 63, Tag 02, Local Tax. If not present, this field is zero-filled. Note: Two decimal places are implied.
17	17	1	UN	Local Tax Included/Indicator	Field 104	For fuel (AFD and service station) transactions, the value of this field is taken from Field 104, Dataset ID 5C, Tag 13, Local Tax Included. For all transactions other than fuel, the value of this field is taken from Field 104, Dataset ID 63, Tag 01, Local Tax Indicator. If not present, this field is zero-filled.
18	29	12	UN	National Tax	Field 104	For fuel (AFD and service station) transactions, the value of this field is taken from Field 104, Dataset ID 5C, Tag 16, National Tax. For all transactions other than fuel, the value of this field is taken from Field 104, Dataset ID 63, Tag 04, National Tax. If not present, this field is zero-filled. Note: Two decimal places are implied.

Table 222: TC33, TCR 3–Additional Line Item Detail Data Record Layout (3 of 6)

From	Through	Length	Format	Field Name	ISO Field	Comment
30	30	1	UN	National Tax Included/Indicator	Field 104	For fuel (AFD and service station) transactions, the value of this field is taken from Field 104, Dataset ID 5C, Tag 15, National Tax Included. For all transactions other than fuel, the value of this field is taken from Field 104, Dataset ID 63, Tag 03, National Tax Indicator. If not present, this field is zero-filled.
31	50	20	AN	Merchant VAT Registration/Single Business Reference Number	Field 104	For fuel (AFD and service station) transactions, the value of this field is taken from Field 104, Dataset ID 5C, Tag 18, Merchant VAT Registration/Single Business Reference Number. For all transactions other than fuel, the value of this field is taken from Field 104, Dataset ID 63, Tag 05, Merchant VAT Registration/Single Business Reference Number. If not present, this field is space-filled.
51	63	13	AN	Customer VAT Registration Number	Field 104	For fuel (AFD and service station) transactions, the value of this field is taken from Field 104, Dataset ID 5C, Tag 19, Customer VAT Registration Number. For all transactions other than fuel, the value of this field is taken from Field 104, Dataset ID 63, Tag 06, Customer VAT Registration Number. If not present, this field is space-filled.
64	75	12	AN	Reserved	-	This field is space-filled.

Table 222: TC33, TCR 3–Additional Line Item Detail Data Record Layout (4 of 6)

From	Through	Length	Format	Field Name	ISO Field	Comment
76	79	4	AN	Summary Commodity Code	Field 104	For fuel (AFD and service station) transactions, the value of this field is taken from Field 104, Dataset ID 5C, Tag 1E, Summary Commodity Code. For all transactions other than fuel, the value of this field is taken from Field 104, Dataset ID 63, Tag 07, Summary Commodity Code. If not present, this field is space-filled.
80	91	12	UN	Other Tax	Field 104	For fuel (AFD and service station) transactions, the value of this field is taken from Field 104, Dataset ID 5C, Tag 17, Other Tax. For all transactions other than fuel, the value of this field is taken from Field 104, Dataset ID 63, Tag 08, Other Tax. If not present, this field is zero-filled. Note: Two decimal places are implied.
92	106	15	AN	Message Identifier	Field 104	For fuel (AFD and service station) transactions, the value of this field is taken from Field 104, Dataset ID 5C, Tag 1B, Message Identifier. For all transactions other than fuel, the value of this field is taken from Field 104, Dataset ID 63, Tag 09, Message Identifier. If not present, this field is space-filled.
107	110	4	UN	Time of Purchase	Field 104, Dataset ID 63, Tag 0A	This field contains Time of Purchase. If not present, this field is zero-filled. Format: hhmm

Table 222: TC33, TCR 3–Additional Line Item Detail Data Record Layout (5 of 6)

From	Through	Length	Format	Field Name	ISO Field	Comment
111	127	17	AN	Customer Reference Identifier	Field 48, Usage 36	For fuel (AFD and service station) transactions, the value of this field is taken from Field 48, Usage 36, Visa Fleet Service—Enhanced Authorization Data. For all transactions other than fuel, the value of this field is taken from Field 104, Dataset ID 63, Tag 0B, Customer Reference Number. If not present, this field is space-filled.
128	129	2	AN	Non-Fuel Product Code 1	Field 104, Dataset ID 5C, Tag 1F01	This field contains Non-Fuel Product Code 1. If not present, this field is space-filled.
130	131	2	AN	Non-Fuel Product Code 2	Field 104, Dataset ID 5C, Tag 1F02	This field contains Non-Fuel Product Code 2. If not present, this field is space-filled.
132	133	2	AN	Non-Fuel Product Code 3	Field 104, Dataset ID 5C, Tag 1F03	This field contains Non-Fuel Product Code 3. If not present, this field is space-filled.
134	135	2	AN	Non-Fuel Product Code 4	Field 104, Dataset ID 5C, Tag 1F04	This field contains Non-Fuel Product Code 4. If not present, this field is space-filled.
136	137	2	AN	Non-Fuel Product Code 5	Field 104, Dataset ID 5C, Tag 1F05	This field contains Non-Fuel Product Code 5. If not present, this field is space-filled.
138	139	2	AN	Non-Fuel Product Code 6	Field 104, Dataset ID 5C, Tag 1F06	This field contains Non-Fuel Product Code 6. If not present, this field is space-filled.
140	141	2	AN	Non-Fuel Product Code 7	Field 104, Dataset ID 5C, Tag 1F07	This field contains Non-Fuel Product Code 7. If not present, this field is space-filled.
142	143	2	AN	Non-Fuel Product Code 8	Field 104, Dataset ID 5C, Tag 1F08	This field contains Non-Fuel Product Code 8. If not present, this field is space-filled.

Table 222: TC33, TCR 3–Additional Line Item Detail Data Record Layout (6 of 6)

From	Through	Length	Format	Field Name	ISO Field	Comment
144	154	11	AN	Merchant Postal Code	Field 104, Dataset ID 63, Tag 13	This field contains Merchant Postal Code. If not present, this field is space-filled.
155	155	1	AN	Additional Data Indicator	Field 104	For fuel (AFD and service station) transactions, the value of this field is taken from Dataset ID 5C, Tag 1C, Additional Data Indicator. For non-fuel transactions, the value of this field is taken from Field 104, Dataset ID 63, Tag 15, Additional Data Indicator. If not present, this field is space-filled.
156	161	6	Decimal	Issuing Identifier	-	
162	168	7	AN	Reserved	-	This field is space-filled.

Table 223: TC33, TCR 4–Authorization and Incremental Authorization (POS) and Partial Reversal (PSR) Additional Information Record Layout (1 of 3)

From	Through	Length	Format	Field Name	ISO Field	Comment
1	2	2	UN	Transaction Code	-	This field contains a 33 .
3	3	1	UN	Transaction Code Qualifier	-	This field contains a zero.
4	4	1	UN	Transaction Component Sequence Number	-	This field contains a 4 .
5	33	29	AN	Payment Account Reference Number	Field 56 Usage 1	Payment account reference: Positions 1-4 contain the BIN controller identifier, a four-character registered value assigned by EMVCo Positions 5-29 contain a 25-alphanumeric character uppercase unique value linked to a PAN Positions 5-7 contain 001 if Visa generates this value, otherwise, the value is provided to the issuer that generated the PAR by Visa product.

Table 223: TC33, TCR 4–Authorization and Incremental Authorization (POS) and Partial Reversal (PSR) Additional Information Record Layout (2 of 3)

From	Through	Length	Format	Field Name	ISO Field	Comment
34	38	5	AN	Rate Table ID	Field 111, Dataset ID 01, Tag 81	This field contains a 5-byte field to identify the current rates in a currency file. This tag is logged by both RSI and VIP and will be sent out in delivery files. The associated UMF TAG is 4937.
39	39	1	AN	PFX Eligible Indicator	Field 111, Dataset ID 01, Tag 8E	This field contains a flag to indicate if a transaction is eligible for Persistent Foreign Exchange (PFX) services. This field is logged by VIP. It can be delivered to Acquirer/ Issuer per request. The associated UMF TAG is 4938.
40	44	5	AN	Enabler Verification Value (EVV)	Field 126.18, Positions 7– 11	This field contains the five-byte alphanumeric enabler verification value.
45	50	6	UN	System Trace Audit Number	Field 11	This field contains a number assigned by the message initiator, which uniquely identifies a cardholder transaction and all message types.
51	62	12	AN	Retrieval Reference Number	Field 37	Field 37 contains a number used with other key data elements to identify and track all messages related to a given cardholder transaction (referred to as a transaction set).
63	64	2	UN	Account Name Inquiry (ANI) Full Name Match Result	Field 34, Dataset ID 04, Tag C4	Contains the result of the account name request.

Table 223: TC33, TCR 4–Authorization and Incremental Authorization (POS) and Partial Reversal (PSR) Additional Information Record Layout (3 of 3)

From	Through	Length	Format	Field Name	ISO Field	Comment
65	72	8	UN	Maximum Processing Date	TLV Field 104, Usage 2, Dataset ID 57	This field contains the Visa calculated expected clearing date in yyyyymmdd format, where: • yyyy = year • mm = month • dd = day Note: For more information regarding the maximum processing date, refer to <i>Requirement to Support Maximum Processing Date</i> .
73	167	95	AN	Reserved		This field contains spaces.
168	168	1	AN	Reserved	-	This field contains a zero.

Point of Sale Authorization Report (Generic Format)

Table 224: POSA File—Detail Record Layout (1 of 12)

From	Through	Length	Format	Field Name	ISO Field	Comments
1	1	1	AN	Record ID	-	Detail Record Value = 1
2	12	11	AN	Roll-Up Acquiring Identifier	-	Acquiring Identifier for all clients. Format: First 6 positions followed by spaces.
13	23	11	AN	Acquiring Institution ID	Field 32	Format: First 6 positions followed by spaces.
24	38	15	AN	Card Acceptor ID Code	Field 42	Card Acceptor ID Code (15 positions) – ISO field F42.
39	46	8	ANS	Card Acceptor Terminal ID	Field 41	Terminal ID (8 positions) – ISO field F41.
47	51	5	N	Transmission Date	Field 7	Format: YYDDD (Julian Date)
52	57	6	N	Transmission Time	-	Format: HHMMSS

Table 224: POSA File—Detail Record Layout (2 of 12)

From	Through	Length	Format	Field Name	ISO Field	Comments
58	58	1	AN	VIC Source	-	VIC source, where data was logged. Valid Values: A = OCW B = OCE C = OCC D = OCB E = OCJ \$ = OCE Debit % = OCE Interlink @ = OCW Debit # = OCW Interlink & = OCC Debit * = OCC Interlink
59	60	2	AN	Processing Code	Field 3	
61	62	2	AN	POS Condition Code	Field 25	
63	63	1	AN, EBCDIC	Account Funding Source	Field 111, Dataset ID 56, Tag 80	Contains any of these product account funding source values from Visa: • C (Credit) • D (Debit) • H (Charge) • P (Prepaid) • R (Deferred Debit) Note: This field is being moved from position 334.
64	91	28	AN	Primary Account Number	Field 2	This field contains the number identifying the cardholder account or relationship.
92	92	1	AN	CVV Results Code (FLAG1)	Field 44.5	This field contains the results of CVV.

Table 224: POSA File—Detail Record Layout (3 of 12)

From	Through	Length	Format	Field Name	ISO Field	Comments
93	93	1	AN	CVV2 Results Code (FLAG2)	Field 44.10	CVV2 billable transaction contains M or N and position 474 does NOT contain 2, 3, 8, A or B, and position 61 does NOT contain 51
94	105	12	N	Authorized Amount (original currency)	Field 4	This field contains the transaction amount either in U.S. dollars or per the currency code identified in positions 145–147.
106	109	4	N	Card Expiration Date	Field 14	Format: MMY
110	111	2	AN	Response Code	Field 39	
112	117	6	AN	Authorization Code	Field 38	This field contains the authorization code provided by the issuer when a transaction is approved.
118	121	4	N	Issuer Station ID	-	First 4 positions of Issuer Station ID
122	125	4	N	Acquirer Station ID	-	First 4 positions of Acquirer Station ID
126	129	4	N	Network ID	Field 63.1	This field contains the code that specifies the network.
130	131	2	N	Billing Tran Code ID	-	Visa Internal

Table 224: POSA File—Detail Record Layout (4 of 12)

From	Through	Length	Format	Field Name	ISO Field	Comments
132	133	2	AN	Card Type	-	_4 = Visa Classic _B = Visa Business _E = Visa Electron _H = Visa Infinite _J = Visa Platinum _K = Visa Signature _O = Visa Business Signature _P = Visa Premier _R = Visa Corporate (T&E) _S = Visa Corporate Procurement _V = VPAY DV = Debit Visa _3 = American Express _5 = MasterCard _6 = Diners _7 = JCB _8 = Discover _9 = Private Label _U = Unknown Card SMS and Interlink: First byte = "D" Second byte = from CARDTYPE table in VTRS If no value is found from the above two steps, then the 2nd byte = "?" (Undefined)
134	138	5	N	Transaction Date	Field 7	This field contains the date in the mmddyy (month, day, year) format.
139	144	6	N	Transaction Time	Field 12	This field contains the time in the hhmmss (hour, minute, second) format.
145	146	2	AN	Line Type	-	The communication line type is populated from tables based on the source station value.

Table 224: POSA File—Detail Record Layout (5 of 12)

From	Through	Length	Format	Field Name	ISO Field	Comments
147	147	1	AN	Terminal Type	Field 60.1	This is a 1-digit code identifying the basic point-of-service electronic terminal. This field is also used for identifying ATM transactions.
148	148	1	AN	Address Verification Result Code	Field 44.2	Contains the result of the Address Verification A, N, Y, or, Z
149	149	1	N	Response Source/Reason Code For STIP	Field 44.1	When authorized by VisaNet, this field contains a value to identify the source of the authorization (Visa or STIP).
150	153	4	AN	Merchant Category Code	Field 18	This field contains a valid 4-digit MCC.
154	154	1	AN	Report and Billing Indicator	-	Report/Billing Indicator for Visa use
155	155	1	AN	Interlink Indicator	-	Valid values: Y or N
156	156	1	AN	Authorization Characteristics Indicator	Field 62.1	This field contains the result of an acquirer request for CPS qualification and may contain the Incremental Authorization Indicator.
157	171	15	N	Gateway Transaction Identifier	Field 62.2, 62.17, or 116	If the transaction is not an American Express, Mastercard, or Discover transaction, this field is populated with field 62.2 data. If the transaction is an American Express or Mastercard transaction, this field is populated with field 62.17 data. Note: If American Express, it contains the American Express CAPN authorization number. If the transaction is a Discover transaction, this field is populated with field 116 data.

Table 224: POSA File—Detail Record Layout (6 of 12)

From	Through	Length	Format	Field Name	ISO Field	Comments
172	175	4	AN	Validation Code	Field 62.3	This field contains a V.I.P.-calculated code to ensure key fields in the 0100 Authorization requests match their respective fields in BASE II Clearing messages.
176	177	2	AN	Downgrade Reason Code	Field 62.3	Contains first 2 bytes of field 62.3, if field 62.1 = N.
178	190	13	N	Cash-Back Amount	Field 61.1	Format: PIC 9(11)V99
191	201	11	AN	Acquiring Institution ID	Field 32	Format: First 6 positions followed by spaces.
202	204	3	AN	Transaction Currency Code	Field 49	Appendix G Visa Point-of-Sale Authorization (POSA) File
205	216	12	N	Authorized Amount (original currency)	Field 4	This field contains the transaction amount either in U.S. dollars or per the currency code identified in positions 145–147.
217	217	1	N	Transaction Decimal Digits	-	Number of decimal positions in currency format.
218	218	1	AN	Market-Specific Data Identifier	Field 62.4	Field 62.4 identifies the industry market-specific data, provided from field 62 subfields.
219	242	12	N	Replacement Amount	Field 95	Format: 12 bytes starting from position 1. Value is right-justified, with lead zero-fill. Remaining positions (231–242) must be filled with zeros.
243	246	4	N	Message Type Identifier (Acquirer Message Type)	MTI	Identifies the type of message, for example 0100, 0200, 0400, 0420.
247	261	15	AN	VisaNet Transaction Identifier	Field 62.17 / Field 62.2	This field contains a Visa-generated identifier unique for each original transaction. This is a key element that links original authorization requests to subsequent messages, such as reversals.
262	264	3	N	Issuer Country Code	Field 68	This field contains the 3-digit numeric issuer country code.

Table 224: POSA File—Detail Record Layout (7 of 12)

From	Through	Length	Format	Field Name	ISO Field	Comments
265	265	1	AN	Issuer Region Code	-	Identifies issuer region: 1 = US 2 = CA 3 = VE 4 = AP 5 = LAC 6 = CEMEA
266	268	3	N	Acquiring Institution Country Code	Field 19	This field contains the 3-digit numeric acquirer country code.
269	269	1	AN	Acquirer Region Code	-	Identifies acquirer region: 1 = US 2 = CA 3 = VE 4 = AP 5 = LAC 6 = CEMEA
270	272	3	AN	Merchant Country Code	Field 19	
273	273	1	AN	Merchant Region Code	-	Identifies merchant region: 1 = US 2 = CA 3 = VE 4 = AP 5 = LAC 6 = CEMEA
274	275	2	N	Month	Field 7, Position 1-2	Format: MM, from GMT transaction date.
276	277	2	N	Day	Field 7, Position 3-4	Format: DD, from GMT transaction date.
278	279	2	N	Year	Field 7, Position 5-6	Format: YY, from GMT transaction date.
280	290	11	AN	Issuer ID	Field 121	Format: First 6 positions of issuing identifier, followed by spaces.

Table 224: POSA File—Detail Record Layout (8 of 12)

From	Through	Length	Format	Field Name	ISO Field	Comments
291	291	1	AN	Terminal Type	Field 60.1	This is a 1-digit code identifying the basic point-of-service electronic terminal. This field is also used for identifying ATM transactions.
292	292	1	AN	Terminal Entry Capability	Field 60.2	This is a 1-digit code identifying the terminal's capability to electronically read account numbers and expiration dates from cards.
293	296	4	N	Time (Preauth Time Limit)	Field 63.2	This field contains the time an issuer agrees to hold funds for an acquirer requesting an 0100 preauthorization.
297	297	1	AN	CVV2 Authorization Request Data: Response Type	Field 126.10, Position 2	This field contains the type of CVV2 response to be returned to the merchant.
298	298	1	AN	CVV2 Authorization Request Data: Presence indicator	Field 126.10, Position 1	This field contains the code to indicate that the CVV2 value is on the card.
299	304	6	AN	Systems Trace Audit Number	Field 11	This field contains a number assigned by the message initiator, which uniquely identifies a cardholder transaction and all message types.
305	316	12	N	Retrieval Reference Number	Field 37	Format: YDDNNNNNN, where NNNNNN is from ISO Field 11.
317	317	1	AN	Reserved	-	This field contains spaces.
318	328	11	AN	Receiving Institution ID Code	Field 100	This field contains a code that identifies the institution, which should receive a request or advice.
329	333	5		Enabler Verification Value	Field 126.18, Position 7-11	This field contains a five-byte alphanumeric enabler verification value.

Table 224: POSA File—Detail Record Layout (9 of 12)

From	Through	Length	Format	Field Name	ISO Field	Comments
334	334	1	N, EBCDIC	Estimated and Partial Authorization Indicator	Field 60.1	This field contains a code indicating if estimated amount or partial authorization was requested in the authorization. Note: This field is being moved from 335.
335	335	1	AN, EBCDIC	POS Environment Code	Field 126.13	This field contains an indicator for Credential-on-File, installment, and recurring transactions. Note: This field is being moved from 336.
336	343	8	N	Maximum Processing Date	-	This field contains the Visa calculated expected clearing date in yyyyymmdd format where: • yyyy = year • mm = month • dd = day Note: For more information regarding the maximum processing date, refer to <i>Requirement to Support Maximum Processing Date</i> .
344	435	92	AN, EBCDIC	Reserved	-	This field is reserved for future use.
436	460	25	AN	Card Acceptor Name	Field 43.1	This field contains the card acceptor name.
461	473	13	AN	Card Acceptor Location (City)	Field 43.2	This field contains the card acceptor city.
474	474	1	AN	CAVV Results Code	Field 44.13	This field contains the Cardholder Authentication Verification Value (CAVV) results code that identifies the outcome of CAVV validation.

Table 224: POSA File—Detail Record Layout (10 of 12)

From	Through	Length	Format	Field Name	ISO Field	Comments
475	475	1	ANS	CVV2 Result Code	Field 44.10	This field contains a Card Verification Value 2 (CVV2) verification result for card-not-present transactions and also for card-present CVV2 verification-only requests.
476	476	1	AN	Card Authentication Results Code	Field 44.8	This field contains a Visa-defined code to indicate Online Card Authentication Method (CAM) results. Online CAM results are also known as EMV Online Cryptogram check results or Chip Authenticate results.
477	479	3	N	Currency Code, Cardholder Billing	Field 51	This field contains a 3-digit numeric code that identifies the currency used by the issuer to bill the cardholder's account.
480	481	2	AN	State Code	Field 59, Positions 1–2	This field contains the state or Province code.
482	484	3	AN	Country Code	Field 59, Positions 3–5	This field contains the country code.
485	493	9	AN	Postal Code	Field 59, Positions 6–14	This field contains the Postal Code.
494	495	2	AN	MOTO/Ecommerce Indicator	Field 60.8	This field contains the Mail / Phone / Electronic Commerce and Payment Indicator.
496	503	8	N	Visa Acquirer Business ID	Field 63.8	This field contains the Acquirer Business ID.
504	523	20	AN	Transaction ID (XID)	Field 126.8	This field contains a unique Visa Secure Electronic Commerce (VSEC) number - the transaction ID or XID, generated by the merchant server to identify the transaction.

Table 224: POSA File—Detail Record Layout (11 of 12)

From	Through	Length	Format	Field Name	ISO Field	Comments
524	525	2	AN	Product ID	Field 62.23	This field contains the product defined for the card-level results in the authorization.
526	526	1	AN	POS Entry Capability	Field 22.2	Used by acquirers to manage their merchants' field terminals. Valid values are 0, 1, 2, 8, 9.
527	527	1	AN	MasterCard UCAF Collection Indicator	Field 126.15	A conditional field that determines if field 126.16 is present in the transaction.
528	559	32	AN	MasterCard UCAF Field	Field 126.16	Contains up to 32 bytes maximum of EBCDIC data.
560	569	10	AN	Merchant Verification Value	Field 62.20	Contains the Merchant Verification Value (MVV) used to identify merchants that participate in the U.S. Select Merchant Fee (SMF) program. The MVV is unique to the merchant.
570	571	2	N	POS Entry Mode Code	Field 22.1	A 2-digit code that specifies whether the entire magnetic stripe is included in an authorization or financial request.
572	577	6	AN	MasterCard Acquirer ID	Field 62.20	Note: This value is mapped from the MasterCard DE-48, Sub element 32.
578	579	2	AN	Card Issuer Reference Data, Transaction Qualifier	Field 116	This field contains the value from Dataset ID 68, Tag 02.
580	589	10	AN	Card Issuer Reference Data, Date, and Time	Field 116	This field contains the value from field 116, Dataset ID 67, Tag 04.
590	590	1	AN	DCC Indicator	Field 126.19	This field contains a unique identifier to indicate DCC was performed by the merchant (at the point of sale) and the ATM acquirer (at the ATM terminal).

Table 224: POSA File—Detail Record Layout (12 of 12)

From	Through	Length	Format	Field Name	ISO Field	Comments
591	591	1	AN	Spend Qualified Indicator	Field 62.25	VisaNet Integrated Payment (V.I.P.) populates this field with the spend-qualified indicator.
592	600	9	AN	Filler	-	Reserved

Trailer Record

Table 225: POSA File-Trailer Record Layout

Field Name	Position	Length (Bytes)	Type	Comments
Record ID	1	1	AN	Value = 9
Filler	2–23	22	AN	Spaces
Detail Record Count	24–32	9	N	Number of detail records in file.
Filler	33–600	568	AN	Spaces

Batch File Maintenance

Batch file maintenance can be done for the following record types: Account Screen Authorization File (ASAF), PIN Verification File, Address Verification File, and Risk-Level File. For routine maintenance, online updates may be used. This section explains requirements for the batch file maintenance of these files. Example record formats are provided.

Participants are advised by Visa Client Services if errors are found.

Batch file maintenance supports Visa PIN Verification Value (PVV) and IBM Offset algorithms only. If an issuer uses Atalla DES Bi-Level or Atalla Identikey, online file maintenance must be used.

As part of the Pin Verification Service (PVS), issuers can send PVVs to Visa as a batch file, and Visa can send back a PVV batch response file to issuer. These are some of the methods that issuers can use to send PVV data to Visa –

- Visa Open File Delivery (OFD/Visa File Gateway (VFG)
- Visa File Exchange Service (VFES)
- Extended Access (EA) server (available in specific regions)

Effective Date Time and Example Record Formats

This section describes how effective dates and times are assigned to records and also provides example record formats.

Effective Date Time for Records

V.I.P. uses the effective time of each update to prevent the most current data associated with an account from being overlaid by older data. The effective time is a Greenwich mean date and time (GMT).

For an online update, V.I.P. assigns the effective time, which is the system time (expressed as GMT) when V.I.P. processes the update.

For a batch update, the client assigns the effective time (also expressed as GMT). Often this field contains the date when the set of account data to be updated was created by the client system.

V.I.P. uses the effective time to prioritize multiple updates to the same record. The question of priority arises when an issuer center provides account records to be updated through the batch process and also updates one or more of these records online before the batch update is loaded into V.I.P.

Example Record Formats

Although the example file formats and record layouts in this section are for illustration only, clients must ensure that the data sent to Visa follows the edits that are present in the information provided. Clients who send batch data to Visa for the Cardholder Database (CDB) must coordinate batch requests through their account managers.

The formats of the file header, detail, and trailer records are described below. Detail records contain data for updating the Account Screen Authorization File (ASAF), PIN Verification File, Address Verification File, and Risk-Level File. Detail records can be in any sequence.

The general format of detail records is as follows:

- Bytes 1–2: File type
- Bytes 3–55: Account information
- Bytes 56–200: Data by file type

The contents of bytes 56–200 vary by type of update:

- For File Update Code 1 or 2 (add or change), the entire record must be supplied, with spaces or zeros in fields that do not apply. (When a change is processed at Visa, the entire record is replaced, not just the data being changed.)
- For File Update Code 3 (delete), the file type and all applicable account identification information must be supplied, but bytes 56–200 can be space-filled.

The file trailer record contains a count of detail records in the file.

The format of each of the records is shown in these tables.

Table 226: File Header Record

Field Name	Bytes	Length	Type	Content and Description
Record Type	1	1	A	H for header
Filler	2	1	AN	Space
Filler	3–8	6	AN	The content of this field must be 000000 .
Filler	9	1	AN	Space
Processing Center ID	10–13	4	N	4-digit ID assigned to the center by Visa
Processing Type	14	1	A	U for update
Effective Date	15–22	8	AN	The GMT date in MM/DD/YY format
Filler	23	1	AN	Space
Effective Time	24–31	8	AN	The GMT in hh:mm:ss format
Filler	32–34	3	AN	Spaces
Message Format	35	1	AN	2
Filler	36–200	165	AN	Spaces

Table 227: Detail Record-Account Screen Authorization File (ASAF)

Field Name	Bytes	Length	Type	Content and Description
File Type	1–2	2	AN	Indicates the file to be updated: E2 = Account Screen Authorization File (ASAF) E3 = Account Screen Authorization File (ASAF) E4 = Account Screen Authorization File (ASAF)
File Update Code	3	1	N	1 = Add, 2 = Change, 3 = Delete
Primary Account Number Length	4–5	2	N	The number of digits or characters in the account number, right-justified and zero-filled.
Primary Account Number (PAN)	6–33	28	AN	If numeric, it is 5 to 28 digits, right-justified and zero-filled. If alphanumeric, it is 5 to 14 characters, left-justified and space-filled.
Purge Date	34–39	6	AN	If File Update Code is 1 or 2 , the value is a date in YYMMDD format. If File Update Code is 3 , the field is spaces .
Filler	40–55	16	N	The content of this field must be zeros .

Table 227: Detail Record-Account Screen Authorization File (ASAF)

Field Name	Bytes	Length	Type	Content and Description
Action Code	56–57	2	AN	If File Update Code is 1 or 2 , must be an Action Code for the Account Screen Authorization File (ASAF) (see the field 127E.1 description in Chapter 4). If File Update Code is 3 , can be space-filled.
Region Coding	58–66	9	AN	For File Type E2 or E3 , when the File Update Code is 1 or 2 and the Action Code is a pickup code, the requirements for this entry must match those for field 127E.2. For File Type E4 (all update codes) or when File Update Code is 3 (all file types), the value must be spaces .
Cardholder Spending Amount Limit	67–72	6	N	File Type must be E3 or E4 . Action Code must be 11 or spaces . Amount limit can be any dollar value. If File Update Code is 1 or 2 and Action Code is spaces , amount limit must be greater than zero . If File Update Code is 1 or 2 and Cardholder Spending Count Limit is greater than zero, amount limit must also be greater than zero. If File Update Code is 3 , amount limit can be zeros or an amount limit.
Cardholder Spending Count Limit	73–74	2	N	File Type must be E3 or E4 . Action Code must be 11 or spaces . Count limit can be a value between 00 and 99 . If File Update Code is 1 or 2 and Action Code is spaces, count limit must be greater than zero. If File Update Code is 3 , count limit can be zero-filled.
Filler	75–200	126	AN	Spaces

Table 228: Detail Record-PIN Verification File (P2)

Field Name	Bytes	Length	Type	Content and Description
File Type	1–2	2	AN	Indicates the file to be updated: P2 = PIN Verification File
File Update Code	3	1	N	1 = Add, 2 = Change, 3 = Delete, 4 = Replace
Primary Account Number Length	4–5	2	N	The number of digits or characters in the account number, right-justified and zero-filled.

Table 228: Detail Record-PIN Verification File (P2)

Field Name	Bytes	Length	Type	Content and Description
Primary Account Number (PAN)	6–33	28	AN	If numeric, must be 5 to 28 digits, right-justified and zero-filled If alphanumeric, must be 5–14 characters, left-justified and space-filled. Must be a number that is allowed for the issuer. Must match the number encoded on the magnetic stripe of the card.
Purge Date	34–39	6	AN	If File Update Code is 1 or 2 , the value is a date in <i>YYMMDD</i> format or 999900 (Do not purge). If File Update Code is 3 , the field is spaces .
Filler	40–55	16	N	The content of this field must be zeros .
PIN Verification Data	56–62	7	AN	If File Update Code is 1 or 2 , PIN verification data is required in this field. If File Update Code is 3 , the value must be spaces . For PVV: bytes 56 and 57 = Algorithm ID 01 bytes 58 = PVK1 (values 1 through 6) bytes 59 through 62 = PVV bytes 63 through 70 = spaces (hex ' 40 ') For IBM PIN Offset: bytes 56 and 57 = Algorithm ID 04 bytes 58 = PVKI (value = 1) bytes 59 through 70 = IBM PIN Offset (unused bytes must be spaces or hex ' 40 ') Example: 478930 = F4F7F8F9F3F0 404040404040
Algorithm ID	56–57	2	AN	
PVK1	58	1	AN	
PVV or Offset	59–70	12	AN	
Filler	71–200	130	AN	Spaces

Table 229: PVV Batch Response File (P2) Header Record

Field Name	Bytes	Length	Format	Content and Description
Record Type	1	1	A, EBCDIC	Contains a value of H (Header)
Filler	2	1	AN, EBCDIC	Contains a space
Filler	3–8	6	AN, EBCDIC	Contains a value of 000000
Filler	9	1	AN, EBCDIC	Contains a space

Table 229: PVV Batch Response File (P2) Header Record

Field Name	Bytes	Length	Format	Content and Description
Processing Center ID	10-13	4	N, EBCDIC	Contains 4-digit ID assigned to the center by Visa
Processing Type	14	1	A, EBCDIC	Contains a value of R
Effective Date	15-22	8	AN, EBCDIC	Contains GMT date in <i>mm/dd/yy</i> format, where: • mm = 00-12 (Month) • dd = 00-31 (Day) • yy = 00-99 (Year)
Filler	23	1	AN, EBCDIC	Contains a space
Effective Time	24-31	8	AN, EBCDIC	Contains GMT time in <i>hh:mm:ss</i> format, where: • hh = 00-24 (Hours) • mm = 00-59 (Minutes) • ss = 00-59 (Seconds)
Filler	32-34	3	AN, EBCDIC	Contains spaces
Message Format	35	1	AN, EBCDIC	Contains a value of 2
Filler	36-200	165	AN, EBCDIC	Contains spaces

Table 230: PVV Batch Response File (P2) Detail Record

Field Name	Positions	Length	Format	Content and Description
File Type	1-2	2	AN, EBCDIC	Contains value of P2 (Pin Verification file) to indicate the file that needs an update.
File Update Code	3	1	N, EBCDIC	Contains value received in request file. Values are: • 1 (Add) • 2 (Change) • 3 (Delete) • 4 (Replace)
Primary Account Number (PAN)	4-31	28	AN, EBCDIC	Contains value received in request file.
Response Code	32-33	2	N, EBCDIC	Values are: • 00 (Success) • 06 (Failure)
File Maintenance Error Code	34-37	4	N, EBCDIC	Contains error code for the record. See Appendix.
Reserved	38-80	43	AN, EBCDIC	Space-filled and reserved for future use.

Table 231: Detail Record-PIN Verification File with PAN Card Sequence Number (P3)

Field Name	Bytes	Length	Type	Content and Description
File Type	1-2	2	AN	P3 = PIN Verification File with PAN Card Sequence Number
File Update Code	3	1	N	1 = Add, 2 = Change, 3 = Delete, 4 = Replace
Primary Account Number Length	4-5	2	N	The number of digits or characters in the account number, right-justified and zero-filled

Table 231: Detail Record-PIN Verification File with PAN Card Sequence Number (P3)

Field Name	Bytes	Length	Type	Content and Description
Primary Account Number (PAN)	6–33	28	AN	If numeric, the value must be 5–28 digits, right-justified and zero-filled. If alphanumeric, the value must be 5–14 characters, left-justified and space-filled. The value must be a number that is allowed for the issuer. It must match the number encoded on the magnetic stripe of the card.
Purge Date	34–39	6	AN	If File Update Code is 1 or 2 , the value must be a date in <i>YYMMDD</i> format or 999900 (Do not purge). If File Update Code is 3 , the value must be spaces .
Filler	40–55	16	N	The content of this field must be zeros.
PIN Verification Data:	56–62	7	AN	Required for PIN verification if File Update Code is 1 or 2 .
Algorithm ID	56–57	2	AN	The value must be spaces if File Update Code is 3 .
PVK1	58	1	AN	
PVV or Offset	59–70	12	AN	For PVV: Bytes 56–57 = Algorithm ID 01 Byte 58 = PVK 1 (values 1 through 6) bytes 59 through 62 = PVV bytes 63 through 70 = spaces (hex'40') For IBM PIN Offset: Bytes 56–57 = Algorithm ID 04 Byte 58 = PVKI (value = 1) Bytes 59–70 = IBM PIN Offset (unused bytes must be spaces or hex '40') Example: 478930 = F4F7F8F9F3F0 404040404040
Card Sequence Number	71–74	4	Hex	Mandatory for all P3 file types. Example: 8 = 00000008 22 = 00000016
Filler	75–200	126	AN	Spaces

Table 232: Address Verification File Detail

Field Name	Bytes	Length	Type	Content Description and Requirements
File Type	1–2	2	AN	The file to be updated: A2 = Address Verification Update.
File Update Code	3	1	AN	The three codes are: 1 = Add 2 = Change 3 = Delete
Primary Account Number Length	4–5	2	N	The number of digits or characters in the account number. The information must be right-justified and zero-filled.
Primary Account Number (PAN)	6–33	28	AN	If the value is numeric, it must be 5 through 28 digits, right-justified and zero-filled. If the value is alphanumeric, it must be 5 through 14 characters, left-justified and space-filled. The value must be a number that is allowed for the issuer. It must match the number encoded on the magnetic stripe of the card.
Purge Date	34–39	6	AN	If the File Update Code is 1 or 2 , the value in this must be a date in <i>yy/mm/dd</i> format or 999900 (Do not purge). If the File Update Code is 3 , the value must be spaces.
Filler	40–55	16	N	The content of this field must be zeros.
Postal Code	56–64	9	AN	The Cardholder's 9- or 5-digit U.S. ZIP code. If the File Update Code is 1 or 2 , the postal code is required in this field. If the value is 5 digits, the field must be left-justified and space-filled. If the File Update Code is 3 , the value must be spaces.
Address Verification Value	65–69	5	AN	The first five numeric characters in the cardholder's address. If the File Update Code is 1 or 2 , the address verification value is required in this field. If the File Update Code is 3 , the value must be spaces.
Filler	70–200	131	AN	Spaces.

Table 233: Risk-Level File Detail

Field Name	Bytes	Length	Type	Content Description and Requirements
File Type	1–2	2	AN	Indicates the file to be updated: R2 = Risk-Level File

Table 233: Risk-Level File Detail

File Update Code	3	1	N	The three codes are: 1 = Add 2 = Change 3 = Delete
Primary Account Number Length	4–5	2	N	The number of digits or characters in the account number. The information must be right-justified and zero-filled.
Primary Account Number (PAN)	6–33	28	AN	If the value is numeric, it must be 5 through 28 digits, right-justified and zero-filled. If the value is alphanumeric, it must be 5 through 14 characters, left-justified and space-filled.
Purge Date	34–39	6	AN	If the File Update Code is 1 or 2 , the value in this field must be a date in <i>yy/mm/dd</i> format or 999900 (Do not purge). If the File Update Code is 3 , the value must be spaces.
Filler	40–55	16	N	The content of this field must be zeros.
Risk Level	56	1	A	The Cardholder risk level: A indicates the lowest risk level B , C , or D indicate higher risk levels Use C if the issuer does not participate in risk level processing.

Bytes 57 through 76 - Filler

Bytes 77 through 166 - Merchant Group Activity Limits

Travel Limit (Issuer Available)	77–81	5	AN	The travel limit when the issuer is available. If not used, the field must be space-filled.
Travel Limit (Issuer Unavailable)	82–86	5	AN	The travel limit when the issuer is unavailable. If not used, the field must be space-filled.
Lodging Limit (Issuer Available)	87–91	5	AN	The lodging limit when the issuer is available. If not used, the field must be space-filled.
Lodging Limit (Issuer Unavailable)	92–96	5	AN	The lodging limit when the issuer is unavailable. If not used, the field must be space-filled.
Auto Rental Limit (Issuer Available)	97–101	5	AN	The automobile rental limit when the issuer is available. If not used, the field must be space-filled.
Auto Rental Limit (Issuer Unavailable)	102–106	5	AN	The automobile rental limit when the issuer is unavailable. If not used, the field must be space-filled.

Table 233: Risk-Level File Detail

Restaurant Limit (Issuer Available)	107-111	5	AN	The restaurant limit when the issuer is available. If not used, the field must be space-filled.
Restaurant Limit (Issuer Unavailable)	112-116	5	AN	The restaurant limit when the issuer is unavailable. If not used, the field must be space-filled.
Mail/Telephone Limit (Issuer Available)	117-121	5	AN	The mail or telephone order limit when the issuer is available. If not used, the field must be space-filled.
Mail/Telephone Limit (Issuer Unavailable)	122-126	5	AN	The mail or telephone order limit when the issuer is unavailable. If not used, the field must be space-filled.
Risky Purchase Limit (Issuer Available)	127-131	5	AN	The risky transactions limit when the issuer is available. If not used, the field must be space-filled.
Risky Purchase Limit (Issuer Unavailable)	132-136	5	AN	The risky transactions limit when the issuer is unavailable. If not used, the field must be space-filled.
Total Purchase Limit (Issuer Available)	137-141	5	AN	The total purchases limit when the issuer is available. If not used, the field must be space-filled.
Total Purchases Limit (Issuer Unavailable)	142-146	5	AN	The total purchases limit when the issuer is unavailable. If not used, the field must be space-filled.
Total Cash Limit (Issuer Available)	147-151	5	AN	The total cash limit when the issuer is available. If not used, the field must be space-filled.
Total Cash Limit (Issuer Unavailable)	152-156	5	AN	The total cash limit when the issuer is unavailable. If not used, the field must be space-filled.
ATM Cash Limit (Issuer Available)	157-161	5	AN	The ATM cash limit when the issuer is available. If not used, the field must be space-filled.
ATM Cash Limit (Issuer Unavailable)	162-166	5	AN	The ATM cash limit when the issuer is unavailable. If not used, the field must be space-filled.
Filler	167-200	34	AN	Spaces.

Table 234: dCVV2 Participation

Field Name	Bytes	Length	Type	Content Description and Requirements
File Type	1-2	2	AN	File to be updated D1 = dCVV2 Participation

Table 234: dCVV2 Participation

File Update Code	3	1	AN	2 = Change, 3 = Delete
Primary Account Number Length	4–5	2	N	The number of digits in the account number. The information must be right-justified and zero-filled
Primary Account Number (PAN)	6–33	28	AN	PAN must be 5 through 28 digits, right-justified and zero-filled. The value must be a PAN for the issuer and must match the number encoded on the magnetic stripe of the card.
Purge Date	34–39	6	AN	If the File Update Code is 2 , the value must be a date in yy/mm/dd format or 999900 (Do not purge). If the File Update Code is 3 , the value must be spaces .
Filler	40–55	16	N	The content of this field must be zeros .
dCVV2 Participation	56	1	AN	The value must be Y if the PAN supports dCVV2.
Filler	57–200	144	AN	Spaces

Table 235: Trailer-ASAF, PIN Verification File, Address Verification File, and Risk-Level File

Field Name	Bytes	Length	Type	Content and Description
Trailer ID	1	1	A	T for trailer
Number of Records	2–10	9	N	Number of detail records in the file, right-justified, and zero-filled.
Filler	11–200	190	AN	Spaces

Account Screen Authorization File (ASAF) Report Layouts

This section contains the file layouts for the weekly ASAF Maintenance and monthly ASAF listing for TC 33 and OFD file delivery. Issuers on the V.I.P System can subscribe to these electronic reports with TC 33 or OFD file delivery:

- **BIOSRUP** (ASAF Maintenance) - This listing is a complete file of all ASAF Maintenance submitted by the client (online and batch) and by the Visa services during the past week. Processors should use **BIOSRUP P**.
- **BIOSRLP** (ASAF Listing) - This listing is a complete file of all ASAF records (and non-accounts) for the selected issuing identifiers. This file is produced monthly. Processors should use **BIOSRLP P**.

OFD versions of the ASAF Maintenance and the ASAF Listing are also available.

TC 33 Record Format for ASAF Data

Visa uses BASE II TC 33 records to transmit the ASAF Maintenance and the ASAF Listing. There are three TC 33 record formats for ASAF data:

- A header record
- A detail record (one for each cardholder account number)
- A trailer record

The Record Type field designates which file is being transmitted. The record type values are:

- **1** = Header
- **2** = ASAF Maintenance
- **3** = ASAF Listing
- **4** = Trailer

Each record contains BASE II and ASAF information. These tables provide each record's content and format.

Table 236: TC 33 for ASAF Data-Header Record

Field Name	Position	Attributes	Description
BASE II Data			
Transaction Code	1–2	2 N	This field contains the value of 33 .
Transaction Code Qualifier	3	1 N	This field contains the value of 0 .
Transaction Component Sequence Number	4	1 N	This field contains the value of 0 .
Destination Identifier	5–10	6 N	This field contains a valid acquiring or issuing identifier.
Source Identifier	11–16	6 N	This field contains the value of 400082 .
Report Identifier	17–26	10 AN	This field contains the identifier of the report. Values: BIOSRUP = Weekly reporting BIOSRLP = Monthly reporting
Report Line Sequence Number	27–34	8 N	This field contains the sequence of this line within the report, which is assigned by Visa.
ASAF Data			
Record Type	35	1 N	This field contains the code indicating type of record: 1 = Header

Table 236: TC 33 for ASAF Data-Header Record

Field Name	Position	Attributes	Description
Creation Time Stamp, Date, Time	36–47	12 N	This field contains the date and time the TC 33 record was created. Format: <i>yymmddhhmmss</i>
Media Time Stamp, Date, Time	48–59	12 N	This field contains the date and time the data file was created. Format: <i>yymmddhhmmss</i>
Filler	60–97	38 N	This field contains spaces .
Authorization Center	98–103	6 N	This field contains four left-justified characters, right-filled with spaces.
Issuing Identifier	104–109	6 N	This field contains the issuing identifier. Format: <i>NNNNNN</i>
Filler	110–167	58 N	This field contains spaces .
BASE II Data			
Reimbursement Attribute	168	1 AN	This field must contain one of these values: A through Z , 0 (zero) , 3 , 6 , or 8 .

Table 237: TC 33 for ASAF Data-Detail Record

Field Name	Position	Attributes	Description
BASE II Data			
Transaction Code	1–2	2 N	This field contains the value of 33 .
Transaction Code Qualifier	3	1 N	This field contains the value of 0 .
Transaction Component Sequence Number	4	1 N	This field contains the value of 0 .
Destination Identifier	5–10	6 N	This field contains a valid acquiring or issuing identifier.
Source Identifier	11–16	6 N	This field contains the value of 400082 .
Report Identifier	17–26	10 AN	This field contains the identifier of the report. Values: BIOSRUP = Weekly reporting BIOSRLP = Monthly reporting
Report Line Sequence Number	27–34	8 N	This field contains the sequence of this line within the report, which is assigned by Visa.
ASAF Data			

Table 237: TC 33 for ASAF Data-Detail Record

Field Name	Position	Attributes	Description
Record Type	35	1 N	This field contains the code indicating type of record: 2 = ASAF Maintenance 3 = ASAF Listing
Account/ID Number	36–63	28 AN	This field contains the cardholder account number or customer ID for check guarantee transactions. The issuer assigns this number. The format of the field is: If numeric, the information in this field must be right-justified and zero-filled. If alphanumeric, the information in this field must be left-justified and space-filled.
Account Number Length	64–65	2 N	This field contains the number of digits and characters in the account number. Format: Right-justified, zero-filled
Purge Date	66–73	8 AN	This field contains the date after which the record is deleted from the file. Format: <i>yyyymmdd</i>
Action Code	74–75	2 AN	This field contains the code specifying the response or special processing required by the issuer when STIP performs stand-in authorization.
Region Codes	76–84	9 AN	This field contains one or more Card Recovery Bulletin (CRB) codes defining the distribution of the account number in the various Card Recovery Service files and bulletins.
Effective Date, Time	85–96	12 N	This field contains the date and time the message was received at the VIC. Format: <i>yymmddhhmmss</i>
Last Update Source	97	1 AN	This field contains the code for the entity that initiated the last update to the account number on the Account Screen Authorization File (ASAF): 1 = Auto-CDB T = Global Customer Assistance Service (GCAS) B = Client batch update (MRB) M = Client online update (MRO)

Table 237: TC 33 for ASAF Data-Detail Record

Field Name	Position	Attributes	Description
Authorization Center	98–103	6 N	This field contains the first 4 digits of the identification number of the issuer's processing center. This field must include left-justified characters, right-filled with spaces .
Issuing Identifier	104–109	6 N	This field contains the issuing identifier of the institution that issued the card.
Update Date, Time (Updates only)	110–121	12 N	This field contains the date and time the message was received at the VIC. Format: <i>yymmddhhmmss</i>
Transaction Status	122	1 AN	This field contains the status of the transactions. Values: X = Update successful Z = Update unsuccessful
Transaction Type (Updates only)	123	1 AN	This field contains the type of update: A = Add C = Change D = Delete E = Error
Filler	124–167	44 AN	This field contains spaces .
BASE II Data			
Reimbursement Attribute	168	1 AN	This field must contain one of these values: A through Z , 0 (zero) , 3 , 6 , or 8 .

Table 238: TC 33 for ASAF Data-Trailer Record

Field Name	Position	Attributes	Description
BASE II Data			
Transaction Code	1–2	2 N	This field contains the value of 33 .
Transaction Code Qualifier	3	1 N	This field contains the value of 0 .
Transaction Component Sequence Number	4	1 N	This field contains the value of 0 .
Destination Identifier	5–10	6 N	This field contains the identification number of the destination.
Source Identifier	11–16	6 N	This field contains the value of 400082 .
Report Identifier	17–26	10 AN	This field contains the identifier of the report. Values: BIOSRUP = Weekly reporting BIOSRLP = Monthly reporting

Table 238: TC 33 for ASAF Data-Trailer Record

Field Name	Position	Attributes	Description
Report Line Sequence Number	27–34	10 N	This field contains the sequence of this line within the report, which is assigned by Visa.
ASAF Data			
Record Type	35	1 N	This field contains the code indicating type of record: 4 = Trailer
Record Count	36–44	9 N	The number of ASAF Maintenance records or ASAF listing records.
Filler	45–97	53 N	This field contains spaces .
Authorization Center	98–103	6 N	This field contains the first 4 digits of the identification number of the issuer's processing center. This field must include left-justified characters, right-filled with spaces.
Issuing Identifier	104–109	6 N	This field contains the issuing identifier of the institution that issued the card.
Filler	110–167	58 AN	This field contains spaces .
BASE II Data			
Reimbursement Attribute	168	1 AN	This field must contain one of these values: A through Z , 0 (zero) , 3 , 6 , or 8 .

OFD Record Format For ASAF Data

Visa uses these records to transmit the ASAF Maintenance and the ASAF Listing using OFD. There are three data record formats for ASAF data:

- A header record
- A detail record (one for each cardholder account number)
- A trailer record

The Record Type field designates which file is being transmitted. The record type values are:

- **1** = Header
- **2** = ASAF Maintenance
- **3** = ASAF Listing
- **4** = Trailer

Table 239: ASAF Data-Header Record

Field Name	Position	Attributes	Description
Record Type	1	1 N	This field contains the code indicating type of record: 1 = Header
Creation Time Stamp, Date, Time	2–13	12 N	This field contains the date and time the record was created. Format: <i>yymmddhhmmss</i>
Media Time Stamp, Date, Time	14–25	12 N	This field contains the date and time the data file was created. Format: <i>yymmddhhmmss</i>
Filler	26–63	38 N	This field contains spaces .
Authorization Center	64–69	6 N	This field contains four left-justified characters, right-filled with spaces .
Issuing Identifier	70–75	6 N	This field contains the issuing identifier. Format: <i>NNNNNN</i>
Filler	76–133	58 N	This field contains spaces .

Table 240: ASAF Data-Detail Record

Field Name	Position	Attributes	Description
Record Type	1	1 N	This field contains the code indicating type of record: 2 = ASAF Maintenance 3 = ASAF Listing
Account/ID Number	2–29	28 AN	This field contains the cardholder account number or customer ID for check guarantee transactions. The issuer assigns this number. The format of the field is: If numeric, the information in this field must be right-justified and zero-filled. If alphanumeric, the information in this field must be left-justified and space-filled.
Account Number Length	30–31	2 N	This field contains the number of digits and characters in the account number. Format: Right-justified, zero-filled
Purge Date	32–39	8 AN	This field contains the date after which the record is deleted from the file. Format: <i>yyyymmdd</i>

Table 240: ASAF Data-Detail Record

Field Name	Position	Attributes	Description
Action Code	40–41	2 AN	This field contains the code specifying the response or special processing required by the issuer when STIP performs stand-in authorization.
Region Codes	42–50	9 AN	This field contains one or more Card Recovery Bulletin (CRB) codes defining the distribution of the account number in the various Card Recovery Service files and bulletins.
Effective Date, Time	51–62	12 N	This field contains the date and time the message was received at the VIC. Format: <i>yymmddhhmmss</i>
Last Update Source	63	1 AN	This field contains the code for the entity that initiated the last update to the account number on the Account Screen Authorization File (ASAF): 1 = Auto-CDB T = Global Customer Assistance Service (GCAS) B = Client batch update (MRB) M = Client online update (MRO)
Authorization Center	64–69	6 N	This field contains the first 4 digits of the identification number of the issuer's processing center. This field must include left-justified characters, right-filled with spaces .
Issuing Identifier	70–75	6 N	This field contains the issuing identifier of the institution that issued the card.
Update Date, Time (Updates only)	76–87	12 N	This field contains the date and time the message was received at the VIC. Format: <i>yymmddhhmmss</i>
Transaction Status	88	1 AN	This field contains the status of the transactions. Values: X = Update successful Z = Update unsuccessful
Transaction Type (Updates only)	89	1 AN	This field contains the type of update: A = Add C = Change D = Delete E = Error
Filler	90–133	44 AN	This field contains spaces .

Table 241: ASAF Data-Trailer Record

Field Name	Position	Attributes	Description
Record Type	1	1 N	This field contains the code indicating type of record: 4 = Trailer
Record Count	2–10	9 N	The number of ASAF Maintenance records or ASAF listing records.
Filler	11–63	53 N	This field contains spaces .
Authorization Center	64–69	6 N	This field contains the first 4 digits of the identification number of the issuer's processing center. This field must include left-justified characters, right-filled with spaces .
Issuing Identifier	70–75	6 N	This field contains the issuing identifier of the institution that issued the card.
Filler	76–133	58 AN	This field contains spaces .

Appendix B

File Maintenance Error Codes

This appendix lists error codes that are used by the system to describe errors in the content of file maintenance messages.

Error Code Descriptions

Error Codes

Error codes appear in field 48 of an 0310 or 0312 response message, or in an 0322 enhanced file update advice. In most cases of file-related error, the VisaNet Interchange Center (VIC) replies to the file update or file inquiry by sending back an 0310 or 0312 response or an 0322 file update discrepancy advice that contains (1) an error response code 06 in field 39 and (2) an error code in field 48 of the response.

The file error codes are listed in this table, along with the name of the field or subfield in error and a brief description of the error condition. See Chapter 4, Data Field Descriptions, for details on field edits.

Table 242: Error Codes

Error Code	Error Condition
0530	Field 101 - File Name: Invalid file name
0558	Field 2 - Primary Account Number: Length not used by issuer
0559	Cardholder Spending Amount Limit (field 127E.3) is a value greater than zero, but Cardholder Spending Count Limit (field 127E.4) is not. Or vice versa.
0560	File Update Code (field 91) indicates add or change, but neither Action Code (field 127E.1) nor Cardholder Spending Limits (fields 127E.3 or 4) is specified.
0561	The Action Code (field 127E.1) is a decline (that is, not 11) but cardholder spending limits (fields 127E.3 and 4) are present.
0562	Cardholder Spending Amount Limit (field 127E.3) contains a non-numeric value.
0563	Cardholder Spending Count Limit (field 127E.4) contains a non-numeric value.
0564	In an update, the length of field 127 is less than the minimum or more than the maximum length allowed, based on the subfield requirements for the file name specified.
0565	There is no record in the file with the cardholder account number specified for a change, delete, or inquiry.
0566	The cardholder account number specified for an add exists in the file.
0567	The file handler has encountered a file or file access problem.
0568	Field 91 in an 0302 request contains a code other than 1 , 2 , 3 , or 5 .
	Field 91 is not 5 in a file inquiry.
	Field 91 in an 0210 response contains a code other than 3 or 4 . (Issued as an Auto-CDB file update error code.)
	Field 91 for Payment Fraud Disruption: Field 101—File Name is PFD and the file update code contains a code other than 1 .
0570	The account number (fields 2) has an invalid check digit.
0571	Cardholder account number does not fall within a valid range.
0572	The source of the message is not associated with the Issuing Identifier.
0574	Month is not 01 through 12 .
0575	Purge date (field 73) is invalid for one of these reasons: In an add or change, the date is missing. Date has expired. Date is present in a delete.
0577	Region Coding (field 127E.2) contains an invalid code. If file name = E2 or E4, codes: 0 through 9 , A through F , and X through Z . Or, Region Coding includes zero in combination with one or more non-zero codes.

Table 242: Error Codes

Error Code	Error Condition
0578	Region Coding (field 127E.2) is spaces when Action Code is 04, 07, 41, or 43 .
0585	The country code in field 20 is invalid.
0650	The Action Code (field 127E.1) is invalid for one of these reasons: - The code is not 04, 05, 07, 11, 14, 41, 43, 46, 54, A1 through A9, XA, or XD. - The code is 01 in a Visa Electron account record.
	Action Code inconsistent with Response Code (field 39) in the authorization response message (Auto-CDB)
0682	The length of File Name (field 101) is not 2.
0750	Field format error

PVV Batch Response File Detail- Error Codes

Issuers may receive these error codes in positions 34-37 of PVV Batch Response File Detail record.

Table 243: Error Codes

Error Code	Error Condition
0000	No error
0001	File Type Not P
0002	Format Indicator Not 1,2
0003	Update Code Not 1,2,3,4
0004	Account Length Not Numeric
0005	Account Length Not 05 Thru 28
0007	Account Length Field Does Not Match Account Length
0008	Account number not present
0009	Account has imbedded blanks
0010	Account is not alpha-numeric
0011	Purge date is not numeric
0012	Purge date, Required, is Zero
0013	Purge date month not 01 to 12
0014	Purge date Day > 29 February
0015	Purge date Day not 01 to 30/31

Table 243: Error Codes

Error Code	Error Condition
0016	Purge date Day > 28, Leap Year
0017	Purge date Day is < 01
0018	Purge date < Current Date
0056	First byte of header is not H
0057	PCR is not numeric
0058	PCR is zero
0059	Effective date is not numeric
0060	Effective month not 01 through 12
0061	Effective day not > 01
0062	Effective day not < 31
0063	Effective day is > 31
0064	Effective day for February > 29
0065	Effective date > Current Date
0066	Effective date > 10 days old
0067	Effective time hour > 23
0068	Effective time minute > 59
0069	Effective time second > 59
0070	Message Format Code must be 2
0072	PIN Algorithm is not numeric
0073	PIN Algorithm is not 01 or 04
0074	PVKI IS not numeric
0075	PVKI is not 1 through 6
0076	PVV value is not valid
0077	PVKI is not 1
0530	Field 101—File Name is invalid
0565	No record in file — PAN or PAN reference ID not found
0566	Duplicate record found: V.I.P. detected a duplicate stop instruction record during an add or replace request.
0567	The file handler has encountered a file or file access problem.
0570	The account number (Field 2) has an invalid check digit
0571	The account number does not fall within the range of account numbers used by card issuers.
0572	The source of the message is not associated with the Issuing Identifier.

Table 243: Error Codes

Error Code	Error Condition
0575	Purge Date (Field 73) is invalid for one of these reasons: • In an add or replace, the date is missing. • Date has expired. • Date is not valid. • Date is present in a delete. • Purge date is less than stop payment start date (or current date.)
0582	The Algorithm Identifier (Field 127P.1) is not 01 or 04.
0583	The PIN Verification Key Index (Field 127P.1) is not a value between 1 and 6.
0584	The PVV or PIN offset PVV/offset (in Field 127P.1) is not numeric.
0682	The length of Field 101—File Name is not 2.
0699	In an update, the length of Field 127 is less than the minimum or more than the maximum length allowed, based on the sub-field requirements for the file name specified.
0707	Update conflict; newer data version exists in CDB.

Appendix C

Reject Codes

This appendix lists reject codes that are used by VisaNet Integrated Payment (V.I.P.) to describe errors in message content.

Reject codes appear in field 14 of a reject message header. A message is rejected if it contains an error that prevents it from being processed at the VisaNet Interchange Center (VIC).

Reject Codes Descriptions

The table titled “Reject Codes, Numeric Sequence” lists reject codes in numerical order, and provides:

- The number of the header or message text field that caused the message to reject.
- The name of the field in error.
- The reject reason.

The table that follows the reject code list titled “Multiple Field Reject Codes” lists reject codes applicable to several fields and the requirements for avoiding them.

For most codes, the reason is an “invalid value” or a “missing field.”

In the tables' “Field in Error” column, an **H** means a message header field.

In the Field In Error Column of this table, an **H** means a header field.

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0002	2	Primary Account Number	Invalid length.
0003	H5	Destination Station ID	Invalid value.
0004	H6	Source Station ID	Invalid value.
0005	n/a	Message Type Identifier	Invalid value.
0008	3	Processing Code	Invalid value.
0009	4	Amount, Transaction	Invalid value. (Amount in field 4 shown in field 63.13 as three decimals but does not end in zero .)
0010	7	Transmission Date and Time	Invalid value.
0011	11	System Trace Audit Number	Invalid value.
0012	H1	Header Length	Invalid value.
0013	H2	Header Flag and Format	Invalid value.
0014	14	Date, Expiration	Invalid value.
0015	H3	Text Format	Invalid value.
0016	H4	Total Message Length	Invalid value.
0017	3	Processing Code	Invalid combination of field 3.1 and field 18.
	18	Merchant Type	Invalid value.
0018	25	POS Condition Code	Invalid value.
0019	22	Point of Service Entry Mode Code	Invalid value (acquirer station not tested to use 90).
0020	32	Acquiring Institution Identification Code	Invalid length (length subfield).
0021	32	Acquiring Institution Identification Code	Invalid value (not valid acquiring identifier).
	H6	Source Station ID	Source PCR not authorized.
0024	35	Length Subfield of Track 2 Data	Invalid length.
0025	H9	Message Status Flags	Invalid value; Response does not match request.
0026	61	Length Subfield of Other Amounts	Invalid length.

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0027	35	Track 2 Data	Invalid track data.
0028	59	National POS Geographic Data	Invalid length (length subfield).
0029	59	National POS Geographic Data	Invalid value.
0031	H11	Message Status Flags	Invalid value
0032	10	Conversion Rate, Cardholder Billing	Invalid value.
0033	19	Acquiring Institution Country Code	Invalid value.
0034	38	Authorization Identification Response	Invalid Value.
0035	20	PAN Extended, Country Code	Invalid value.
0037	49	Currency Code, Transaction	Invalid value.
	50	Currency Code, Settlement	Invalid value.
	51	Currency Code, Cardholder Billing	Invalid value
0038	15	Date, Settlement	Invalid value.
0042	70	Network Management Information Code	Invalid value.
0043	66	Settlement Code	Invalid value.
0044	74	Credits, Number	Invalid value.
0045	75	Credits, Reversal Number	Invalid value.
0046	76	Debits, Number	Invalid value.
0047	77	Debits, Reversal Number	Invalid value.
0048	86	Credits, Amount	Invalid value.
0049	87	Credits, Reversal Amount	Invalid value.
0050	88	Debits, Amount	Invalid value.
0051	89	Debits, Reversal Amount	Invalid value.
0052	97	Amount, Net Settlement	Invalid value.
0053	63.9	Fraud Data	Invalid value

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0055	90	Original Data Elements	Invalid value.
0056	33	Forwarding Institution Identification Code	Invalid length (length subfield).
0057	33	Forwarding Institution Identification Code	Invalid value.
0058	99	Settlement Institution Identification Code	Invalid length (length subfield)
0059	99	Settlement Institution Identification Code	Invalid value.
0061	48	Additional Data—Private, position 1	Invalid value.
0062	63.1	Network ID Code	Invalid value
0063	48	Additional Data—Private	Invalid length (length subfield).
0064	48, U8c	VCRFS Request or Advice	Invalid value: requested fulfillment method not 0 or 1 .
0066	63.17	Additional Data Indicator	Invalid value.
0067	63.18	Volume-Tier Request Indicator	Invalid value.
0070	26	Point of Service PIN Capture Code	Invalid value.
0071	44	Additional Response Data	Invalid length (length subfield).
0082	100	Receiving Institution Identification Code	Invalid value.
0087	39	Response Code	Invalid value.
0088	53	Security-Related Control Information	Invalid value.
0090	12	Time, Local Transaction	Invalid value.
0091	13	Date, Local Transaction	Invalid value.
0092	23	Card Sequence Number	Invalid value.
0094	37	First four digits of Retrieval Reference Number	Invalid value.
0095	37	Retrieval Reference Number	Invalid value.

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0096	42	Card Acceptor Identification Code	Invalid value.
0100	100	Receiving Institution Identification Code	Invalid length (length subfield).
0102	45	Track 1 Data	Invalid length.
0104	102	Account Identification 1	Invalid length (length subfield).
0105	60	Additional POS Information	Invalid value.
0106	22	Point of Service Entry Mode Code	Invalid value for Australia cashback transaction.
	35	Track 2 Data	Invalid value for Australia cashback transaction.
	45	Track 1 Data	Invalid value for Australia cashback transaction.
	61.1	Other Amount, Transaction	Invalid value; one or more of these: • Amount greater than amount in field 4. • Amount in field 61.1 shown in field 63.13 as three decimals but does not end in zero OR value in any position in field non-numeric (0-9).
0107	48 Usage 11	Additional Data – Private Preauthorization request/merchandise credit	Invalid value
0111	103	Account Identification 2	Invalid length (length subfield).
0112	103	Account Identification 2	Invalid value.
0114	63.3	Message Reason Code	Invalid value.
0115	95	Replacement Amount	Invalid value or value greater than amount in field 4.
0116	125	Supporting Information	Invalid value
0118	21	Forwarding Institution Country Code	Invalid value.
0119	68	Receiving Institution Country Code	Invalid value.
0120	69	Settlement Institution Country Code	Invalid value.
0127	44	Additional Response Data	Invalid value

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0130	63.6	Chargeback Reduction/ Clearing Flags	Invalid value.
0131	119	Settlement Service Data	Invalid length
	119 Usage 1	Client-Calculated IRF	
0132	119	Settlement Service Data	Invalid country code
	119 Usage 1	Client-Calculated IRF	
0133	6	Amount, Cardholder Billing	Invalid value (amount in field 6 shown in field 63.13 as three decimals but does not end in zero).
0134	28	Amount, Transaction Fee	Invalid value.
0137	123	Length Subfield of Veri- fication Data	Invalid length (length subfield).
0138	63.9	Fraud Data	Invalid value.
0141	63.10	Gateway Merchant Data	Invalid value.
0142	14	Date, Expiration	Invalid value on Track 2 read.
	22	POS Entry Mode Code	Invalid value on Track 2 read.
	35	Track 2 Data	Magnetic stripe data missing when field 22 is 90 or 91 .
	45	Track 1 Data	Magnetic stripe data missing when field 22 is 90 or 91 .
0144	117	National Use	Invalid value.
	118	Intra-Country Data	Invalid value.
0145	125	Supporting Information	Invalid field.
0146	114	Domestic and Localized Data (TLV Format)	Invalid tag value.
	119	Settlement Service Data	Invalid value in client-calculated IRF field.
0147	H9 byte 3, bits 2–4	Settlement Flag	Invalid settlement service value in byte 3, bits 2–4.
0148	126.10.1	CVV2 Authorization Request Data	Invalid value in position 1.
0149	44.10	CVV2 Authorization Request Data	Invalid value in CVV2 Result Code - field 44.10.

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0150	54	Additional Amounts	Invalid value. One of these reasons applies: - Invalid currency code provided. - Amount in this field inconsistent with amount in field 62.4. - Invalid amount for currency. - Tip is wrong currency or too large for total transaction amount. - The amount in field 63.13 displayed as three decimals and amount in field 4 does not end in zero; see reject code 0009. - The amount in field 4 ends in zero and the amount in field 54 is different. - Invalid account type for ATM /POS balance inquiry and ATM cash withdrawal with balance information and POS purchase transaction with balance information.
0151	62	Payment Service fields	Invalid length.
0152	62.1	Authorization Characteristics Indicator	Invalid value.
0153	62.2	Transaction Identifier	Invalid value.
0154	63.11	Reimbursement Attribute	Invalid reimbursement attribute value.
0155	62.7	Purchase Identifier	Invalid value.
	62.11	Multiple Clearing Sequence Number	Invalid value.
	62.12	Multiple Clearing Sequence Count	Invalid value.
0157	63.13	Decimal Position Indicator	Invalid value.
0166	117	National Use	Invalid field length. Does not apply to Brazil.
0167	117	National Use	Invalid country code. Does not apply to Brazil.
0169	43	Card Acceptor Name/ Location	Invalid value.
0170	41	Card Acceptor Terminal ID	Invalid value.

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0171	73	Date, Action	Invalid date (non-numeric value).
0175	126.13	POS Environment	Invalid value.
0180	126.0	Bitmap	Invalid length of field 126.
0181	126.1	Customer Name	Invalid field.
0182	126.2	Customer Address	Invalid field.
0183	126.3	Biller Address	Invalid field.
0184	126.4	Biller Telephone Number	Invalid field.
0185	60	Additional POS Information	Invalid value in field 60.8 (positions 9–10) for e-commerce transaction.
0192	55	Integrated Circuit Card (ICC) Related Data	Invalid value.
0193	44.13	CAVV Results Code	Invalid CAVV result code.
0194	104, Usage 2	Transaction-Specific Data	Original credit money transfer; additional sender data length exceeds 50 bytes.
0250	54	Additional Amounts	Field missing.
0251	2	Primary Account Number	Field missing.
0270	Not Applicable	Message Type Identifier	Field missing (message type ID between header bitmap fields and message data fields).
0274	3	Processing Code	Field missing.
0275	4	Amount, Transaction	Field missing.
0276	7	Transmission Date and Time	Field missing.
0277	11	System Trace Audit Number	Field missing.
0278	12	Time, Local Transaction	Field missing.
0279	13	Date, Local Transaction	Field missing.
0280	14	Date, Expiration	Field missing.
0283	18	Merchant Type	Field missing.
0284	25	POS Condition Code	Field missing.
0285	22	POS Entry Mode Code	Field missing.
0287	32	Acquiring Institution Identification Code	Field missing.

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0289	41	Card Acceptor Terminal ID	Field missing.
0291	35	Track 2 Data	Field missing.
0293	38	Authorization Identification Response	Field missing.
0294	39	Response Code	Field missing.
0295	52	Personal Identification Number (PIN) Data	Field missing.
0301	59	National Point-of-Service Geographic Data	Length attribute or field missing.
0302	59	National Point-of-Service Geographic Data	Field missing or invalid.
0306	19	Acquiring Institution Country Code	Field missing.
0308	28	Amount, Transaction Fee	Field missing (ATM).
0311	42	Card Acceptor Identification Code	Field missing.
0312	43	Card Acceptor Name/ Location	Field missing.
0313	48	Additional Data, Private	Field missing. Reject code applicable when field 48 missing in transaction requiring it, as specified in individual field usages.
0314	20	Primary Account Number, Extended, Country Code	Field missing.
0315	49	Currency Code, Transaction	Field missing.
0319	63.1	Network ID Code	Field missing.
0321	70	Network Management Information Code	Field missing.
0322	66	Settlement Code	Field missing.
0333	33	Forwarding Institution Identification Code	Field missing (fraud reporting).
0334	100	Receiving Institution Identification Code	Field missing.

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0335	100	Receiving Institution Identification Code	Field missing.
0336	90	Original Data Elements	Field missing.
0341	91	File Update Code	Field missing.
0342	92	File Security Code	Field missing.
0344	101	File Name	Field missing.
0345	63.2	Time (Preauth Time Limit)	Field missing.
0346	63.3	Message Reason Code	Field missing.
0352	114	Domestic and Localized Data	Field missing.
0360	60	Additional POS Information	Field missing.
0369	134	Visa Discretionary Data	Invalid length.
0370	135	Issuer Discretionary Data	Invalid length.
0371	142	Issuer Script	Invalid length.
0372	143	Issuer Script Results	Invalid length.
0379	44	Additional Response Data	Field missing from response.
0382	62.11	Multiple Clearing Sequence Number	Edit failed. Code 0382 is used in Full Service POS, Network ID 0002 only.
	62.12	Multiple Clearing Sequence Count	Edit failed. Code 0382 is used in Full Service POS, Network ID 0002 only.
0384	53	Security-Related Control Information	Field missing.
0394	102	Account Identification 1	Field missing.
0397	103	Account Identification 2	Field missing.
0399	127	File Records, Action, and Data	Field missing.
0400	Variable		See Multiple Field Reject Codes table.
0401	121	Issuing Institution Identification Code	Field missing.
0451	125	Supporting Information	Field missing.

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0455	33	Forwarding Institution Identification Code	Field missing.
0458	63.8	Visa Acquirer's Business ID	Field missing.
0483	62.1	Payment Service Indicator	Field missing.
	62.2	Transaction Identifier	Field missing.
	125, Usage 2	Supporting Information (TLV Format)—Original Transaction ID Dataset 03 tag 03	Field missing.
0484	63.11	Reimbursement Attribute	Field missing.
0485	63.6	Chargeback Reduction/ Clearing Flags	Field missing.
0486	6	Amount, Cardholder Billing	Field missing in partial preauthorization.
0487	63.13	Decimal Position Indicator	Field missing.
0488	60	Additional POS Information	E-commerce Indicator (positions 9–10) missing.
0489	152	Secondary PIN Block	Field missing in a PIN Change request.
0491	143	Issuer Script Results	Field 143 is missing in a reversal.
0492	62.4	Market-Specific Data Identifier	Missing in bill payment (field 3 = 50). Missing in auto-substantiation (field 54 = 4S or 4T).
0494	56	Customer Related Data	Field or data missing or invalid.
	104, Usage 2	Transaction-Specific Data	Field or data missing or invalid.
	114	Domestic and Localized Data (TLV Format)	Field or data missing or invalid.
0497	62.20	Merchant Verification Value	Field missing.
0498	123, Usage 2	Verification Data	Token missing in issuer response.
0499	123, Usage 2	Verification Data	Token invalid in issuer response.
0508	Not Applicable	Not Applicable	Station not signed on.

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0509	Not Applicable	Not Applicable	User signed on in Advice-Recovery status. (One acquirer station and one issuer station per processor allowed to recover advices at same time.)
0514	11	System Trace Audit Number	Unsolicited response (value changed in response message).
	32	Acquiring Institution Identification Code	
	37	Retrieval Reference Number	
	41	Card Acceptor Terminal Identification	
	42	Card Acceptor Identification Code	
	63.1	Network Identification Code	
0515	Not Applicable	Not Applicable	Late response.
0517	54	Additional Amounts	Value for account type does not match value in field 3 <i>account</i> type. Value for account type is not consistent with field 3 <i>transaction</i> type.
0518	Not Applicable	Not Applicable	Undefined reject code sent V.I.P. can also appear in file updates for miscellaneous errors in file update messages. See Multiple Field Reject Codes table.
	61	Other Amounts	Fields present when not allowed (attempt to return balance with cash disbursement response in field 61.1). (Network 0003 only.)
	104	Transaction Description	In case of response message received with field 104 dataset ID 71, tag 01 (Free-form data), reject 0518 may be issued if V.I.P. fails to convert into fixed field 104 internally.
0521	35	Track 2 Data	Account number in Track 2 Data does not agree with field 2.
0523	48	Additional Data-Private	Submission date or time less than minimum time allowed before transmission date/time.
0524	H5	Destination Station ID	Destination station in header not zero .
0527	H9	Bit 8 of byte 1 in Message Status Flags	Invalid value.

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0528	3	Processing Code	U.S. issuer ATM transaction, “from account” type in response does not match corresponding request. ATM balance inquiry transaction, “from account” type in response does not match corresponding request.
0572	Not Applicable	Not Applicable	The source of the message is not associated with the Issuing Identifier.
0590	39	Response Code	Invalid value (not 00 or 55 when it should be).
	62.2	Transaction Identifier (Bitmap Format)	Invalid (all zeros) in a Visa Stop Payment Service (VSPS) Transaction Identifier (TID) based inquiry.
0591	45	Track 1 Data	Account number in track 1 data does not agree with content of field 2.
0592	22	POS Entry Mode Code	POS entry mode code 0x20 (no PIN-entry capability and transaction other than preauthorized purchase).
	25	POS Condition Code	POS condition code 01 (customer not present).
			POS condition code 08 (mail/telephone order).
	52	Personal Identification Number (PIN)	PIN data present when not allowed; fields 22 and 25 indicate card-not-present transaction.
			PIN data present in 0220 adjustment with Message Reason Code - Field 63.3 equal to 2108 .
			PIN data present when NID is 0003 and Pre-Auth Purchase Completion message Interlink transaction rejects the message.
			PIN data present when not allowed; field 63.3 indicates card-not-present transaction.
0593	22	POS Entry Mode Code	Field 25 and field 22 not compatible.
	25	POS Condition Code	Field 25 contains 05 but field 22 not 01x 0 or 00x 0.
0595	61	Other Amounts	Other amount in issuer response not equal to requested amount.

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0596	22	POS Entry Mode Code	Field 25 and field 22 not compatible.
	25	POS Condition Code	Field 25 contains 05 or 08 , but field 22 not 01x 0 or 00x 0. Indicates: - Consistency error: Message for different type of cardholder function than other records in transaction set or, - Primary request followed adjustment. See Multiple Field Reject Codes table.
0597	11, 22, or 25	System Trace Audit Number, POS Entry Mode Code, or POS Condition Code	Consistency error: Multiple transactions - Indicates second financial request for same cardholder function (card number, reference number, and type of request same; trace number different). See Multiple Field Reject Codes table. Velocity check failed and velocity check qualified.
0598	22	POS Entry Mode Code	Consistency error: Message is primary request or its reversal, but adjustment is processed for transaction set. See Multiple Field Reject Codes table.
	25	POS Condition Code	
0599			See Multiple Field Reject Codes table.
0600	2	Primary Account Number Supporting Information	Consistency error: Message account number does not match account number in transaction set. See Multiple Field Reject Codes table.
	125		
0601	H9/data fields	Message Status Flags	See Multiple Field Reject Codes table.
0602	H9/data fields	Message Status Flags	See Multiple Field Reject Codes table.
0603	H9/data fields	Message Status Flags	See Multiple Field Reject Codes table.
0604	H9/data fields	Message Status Flags	See Multiple Field Reject Codes table.
0606	H6	Message Status Flags	Source station not signed on.
0608	22	POS Entry Mode Code	Transaction not preauthorized debit; Field 52 - Personal Identification Number PIN Data present. PIN presence not compatible with Field 22 - POS Entry Mode Code, which contains 0x80 (PIN pad down).
0609	Not Applicable	Not Applicable	See Multiple Field Reject Codes table.

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0610	3 or 18	Processing Code or Merchant Type	First two digits of processing code in field 3 not compatible with MCC in field 18.
0611	22	POS Entry Mode Code	Message contains magnetic stripe data in field 35 or field 45. Presence of stripe data incompatible with field 22, which contains 01 (manual entry) in positions 1–2.
0613	4	Amount, Transaction	Invalid value for U.S. chargeback. Canadian-domestic transaction: invalid chargeback value; non-T&E transaction under CAN\$10.
0614	60.8	Mail/Phone/Electronic Commerce and Payment Indicator	Invalid value in bill payment.
0615	37	Retrieval Reference Number	Copy request exceeds 12 months: For POS transactions only, usual time limit to submit RFC messages 12 months from original message date, but for healthcare auto-substantiation RFC messages, time limit 60 months (five years) from original message date.
0621	53	Security-Related Control Information	DKE client tried exchange key with field 53 zone key index # 2 but client does not participate in “dual key” exchanges. Client is configured to only rotate keys on index #1 but V.I.P. received a DKE request with index #2.
	105	Double-Length DES Key (Triple DES)	DKE secondary client participates in TLV field 110 but V.I.P. received a DKE key update message with field 105.
	110	Encryption Data (TLV Format)	DKE secondary client does not participate in TLV field 110 but V.I.P. received a DKE transaction with field 110 from client. DKE secondary client has fully migrated to key blocks but V.I.P. received variant key from client.
0622	None	None	Client requesting key exchange does not participate in DKE.
0625	H9 byte 3, bits 2–4	Settlement Flag	National bilateral requested but transaction not qualified.
0626	62.4	Market-Specific Identifier	Invalid value for bill payment.

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0627	4	Amount, Transaction	Invalid value in T&E chargeback. Canadian-domestic transactions: invalid chargeback value; T&E transaction under CAN\$25.
0628	63.8	Visa Acquirer's Business ID	Invalid value (non-numeric).
0629	48, Usage 7a	Additional Data—Private	Invalid value for T&E chargeback usage code (not 1 or 2).
0631	48, Usage 7a	Additional Data—Private	Invalid value in airline transaction.
0635	18	Merchant Type	Invalid Merchant Category Code for EPS or NSR transaction
0636	18	Merchant Type	Invalid code for the Supermarket Incentive Program (SIP). Field 63.11 must be 4, and field 18 must be 5411 for the SIP.
0637	63.11	Reimbursement Attribute	Field 63.11 = 4 and MCC 5411 and Field 19 - Acquiring Inst ID other than U.S./Hong Kong/Macau. Field 63.11 = 3 and transaction acquired from a non-EPS participating country.
0643	59	National Point-of-Service Geographic Data	Field 59 cannot be less than 10 bytes. For U.S. acquired 0600 messages with network management information code of 880 , 881 , or 882 , state code should be valid. Invalid state code for U.S. acquired transaction. Invalid province code for Canadian acquired transaction.
0644	59	National Point Of Service Geographic Data	Field 59 cannot be less than 10 bytes and 5-digit ZIP Code must not contain all zeros or spaces . Field 59 cannot be less than 14 bytes and 9-digit ZIP Code must not contain all zeros or spaces . 5 digit or 9-digit ZIP Code must contain numeric values of (0-9)
0646	90	Original Data Element	Exception time exceeded (Interlink NID 0003 only).
0699	Variable		See Multiple Field Reject Codes table.
0713	48	Additional Data—Private	Invalid first chargeback for split sale (field 48, usage 7a, position 2)

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0715	125	Supporting Information, Usage 2	In a TLV subfield, the number of bytes in the Value position does not match the number of bytes specified in the Length position.
0720	62.20	Merchant Verification Value (MVV)	Invalid MVV.
0721	63.19	Fee Program Indicator	For a dispute financial or dispute response (chargeback or representment), the issuer or acquirer did not submit an FPI.
0722	63.3	Message Reason Code	Not permitted for dispute financials (chargebacks), dispute response financials (representments), or switch-generated adjustments.
0724	48	Additional Data-Private	Second chargeback not permitted.
0725	119	Settlement Service Data (Any Usage)	Invalid value in field 119 settlement data.
0728	None	Dispute financial cannot be submitted for a non-VCR jurisdiction	Country not migrated to VCR.
0729	None	Legacy exception message cannot be submitted by a VCR-eligible country	VCR migrated issuer may not submit legacy exceptions
0731	49	Currency Code, Transaction	For OCT message with business application indicator of MP or CO , transaction currency does not match issuer currency code.
0733	39	Additional POS Information	Acquirer does not support partial authorization.
0735	4	Amount, Transaction	Partial authorization value in field 4 is greater than the original field 4 transaction amount.
0736	6	Amount, Cardholder Billing	Partial authorization value in field 6 is greater than the original field 6 transaction amount.
0740	4	Amount, Transaction	For B2B settlement match eligible transaction for card with service code AE, authorization amount and clearing amount must match. Failed authorization tolerance edit. Adjust clearing amount to match authorization and resubmit clearing message.

Table 244: Reject Codes Numeric Sequence

Code	Field In Error (H = Header)	Field Name	Reject Reason
0741	4	Amount, Transaction	For B2B settlement match eligible transaction, clearing amount must be less than or equal to Authorization amount. Failed authorization tolerance edit. Adjust clearing amount to match authorization and resubmit clearing message.
0742	114	Domestic and Localized Data	Invalid value.
0752	52	Personal Identification Number (PIN) Data	Consistency error-field 52 (PIN) only allowed in original acquired non-backoffice transaction.
0753	53	Security-Related Control Information	Consistency error-invalid use of field 53. - Field 53 present in 0800 request and response message. - Field 52 and field 53 present in dispute financial/dispute response financial (chargeback/representment) message (not merchandise credit). - Field 53 present without field 52. - Field 52 and field 53 present in other than MIS acquired/originated primary request 01XX/02XX/04XX and transaction group 1, 2, and 3.
0785	48 usage 39a	VROL case number missing	VROL case number request is zeros, missing, or not numeric.
0823	34	Acceptance Environment Data (TLV Format)	Invalid value: exemption indicator is not 0 or 1 .
0824	126.18	Agent Unique Account Result	Invalid Enabler Verification Value Code 0824 is used in Full Service POS, Network ID 0002 and Interlink Network ID 0003 only.

Table 245: Multiple Field Reject Codes

Requirement	Reject Code
V.I.P must be able to parse a message into recognizable fields of correct length.	0400 = parse error/invalid length
Messages related to a customer transaction must contain the cardholder account number	0397 = Fields 2, 102, and 103 missing

Table 245: Multiple Field Reject Codes

Requirement	Reject Code
V.I.P. may not send Full Financial-only reject codes to other components (Authorization Only, Plus, etc.). For instance, V.I.P. translates a reject applying to Full-financial processing and invalid for Authorization only to 0518 when returned to Authorization only acquirer. Code can also appear when key routing information is absent in message (for instance, when Field 63 - V.I.P. Private-Use Fields is completely missing from 0400 reversal).	0518 = default reject code
Messages in transaction set must be for same type of cardholder function. Adjustment allowed only after original request or advice.	0596 = consistency error. Message is for different type of cardholder function than other transaction set records, or primary request followed adjustment.
For multiple transactions, only one financial request can be submitted for the same cardholder function.	0597 = consistency error. The card number, reference number, type of request are the same, but the trace number is different.
Primary requests or reversals must be processed before an adjustment.	0598 = consistency error. The message is a primary request or reversal, but an adjustment is processed for this transaction set.
Messages must contain Message Type Identifiers.	0599 = one of these: - Consistency error; invalid combination of Message Type Identifier and message fields. For 01xx, 02xx, and 04xx messages - message type in Original Data Elements, time limit presence, Advice-Transaction flag setting, processing code (first two digits), and POS condition code (when 13, 17, or 54). For 03xx messages - File Update Code. - The message type is invalid for the card program. - Response values do not match those in corresponding request or advice. - Preauthorization completion submitted as an 0200 instead of an 0220. - Financial messages not permitted from Authorization-Only endpoints.

Table 245: Multiple Field Reject Codes

Requirement	Reject Code
The message cardholder account number must match the account number for the transaction set.	0600 = consistency error. The message account number does not match the account number in the transaction set. Reject code 0600 is caused when V.I.P. receives a transaction that is currently in the V.I.P. history file having different account numbers. This generally happens if acquirers use the same values in Field 37- Retrieval Reference Number for multiple transactions with different account numbers. <i>The value in field 37 cannot be used again for 48 hours or the transaction may be rejected with reject code 0600.</i> The history file is kept for a period of time from the next end-of-day plus 24 hours. Hence, a maximum of 48 hours must pass before an acquirer repeats the Retrieval Reference Number in field 37.
Exception processing messages must contain correct processing code, transaction amount, cardholder function type, and transaction set.	0601 = consistency error The message is part of a known transaction, but one of these items does not match: • First two digits of processing code (exception: code is different for a dispute financial reversal (chargeback reversal)) • Transaction amount, except it may be different in reversal, dispute financial (chargeback), dispute financial reversal (chargeback reversal), or dispute response financial (representment) • Type of cardholder function • Transaction group (preauthorization/financial transaction/ adjustment)
Messages for a given transaction must be processed in correct sequence.	0602 = consistency error The message is out of sequence with previously processed messages for same cardholder transaction.
A response or advice response must be consistent with the request or advice.	0603 = consistency error. One of these conditions exists: • The response/advice response is inconsistent with request or advice. One of these fields does not match: account number, transaction amount, processing code, original data elements message type, or POS condition code (if 13, 17, or 54). • The time value is present only in the request/advice or in the response/advice. • The message type in the response/advice response is not the proper one for the request/advice.
Message recipients must ensure against duplicate responses.	0604 = consistency error This code indicates a duplicate response.

Table 245: Multiple Field Reject Codes

Requirement	Reject Code
Source processing center of response must match destination processing center of request.	0609 = consistency error. Source processing center for response not equal to destination processing center of request.
PIN, Track, or AVS data is not allowed in nonoriginal messages or exception items.	0699 = Presence of PIN/Track/AVS data inconsistent with message type Message is not original request but contains PIN, Track, or AVS data.

Appendix D

GMT Conversion

This appendix explains how to convert GMT (Greenwich mean time) to a local date and time. The figure of the world map illustrates international time zones and their demarcation lines. The map makes it easy to find out the time zone of a location and to figure out what time it is anywhere in the world. This information is helpful if a center must contact another center directly by telephone or telex.

Converting GMT to Local Time and Date

To convert GMT to your local time and date, locate your local time zone on the figure titled "International Time Zones." Starting with GMT, add or subtract according to the number in your local time zone. The following examples illustrate how to calculate back and forward from current GMT.

In the first example, the target location is one calendar day behind the current GMT, requiring backward calculation.

Example

Calculating back from current GMT:

Suppose you want to contact a client on the West Coast of the United States. The map indicates -8 for this area. If GMT is 2400, subtract eight hours to determine the local time on the West Coast of the United States. Keep in mind that time zones with negative numbers are one calendar day behind the GMT date.

The next example illustrates a forward calculation where the GMT day remains the same.


Example

Calculating forward from current GMT:

If you want to contact a client in Egypt, the map indicates +2 for this country. If GMT is 2400, add two hours to get the local time in Egypt. This time is in the same calendar day as the GMT date.

The map does not reflect the time changes resulting from DST.

International Time Zones

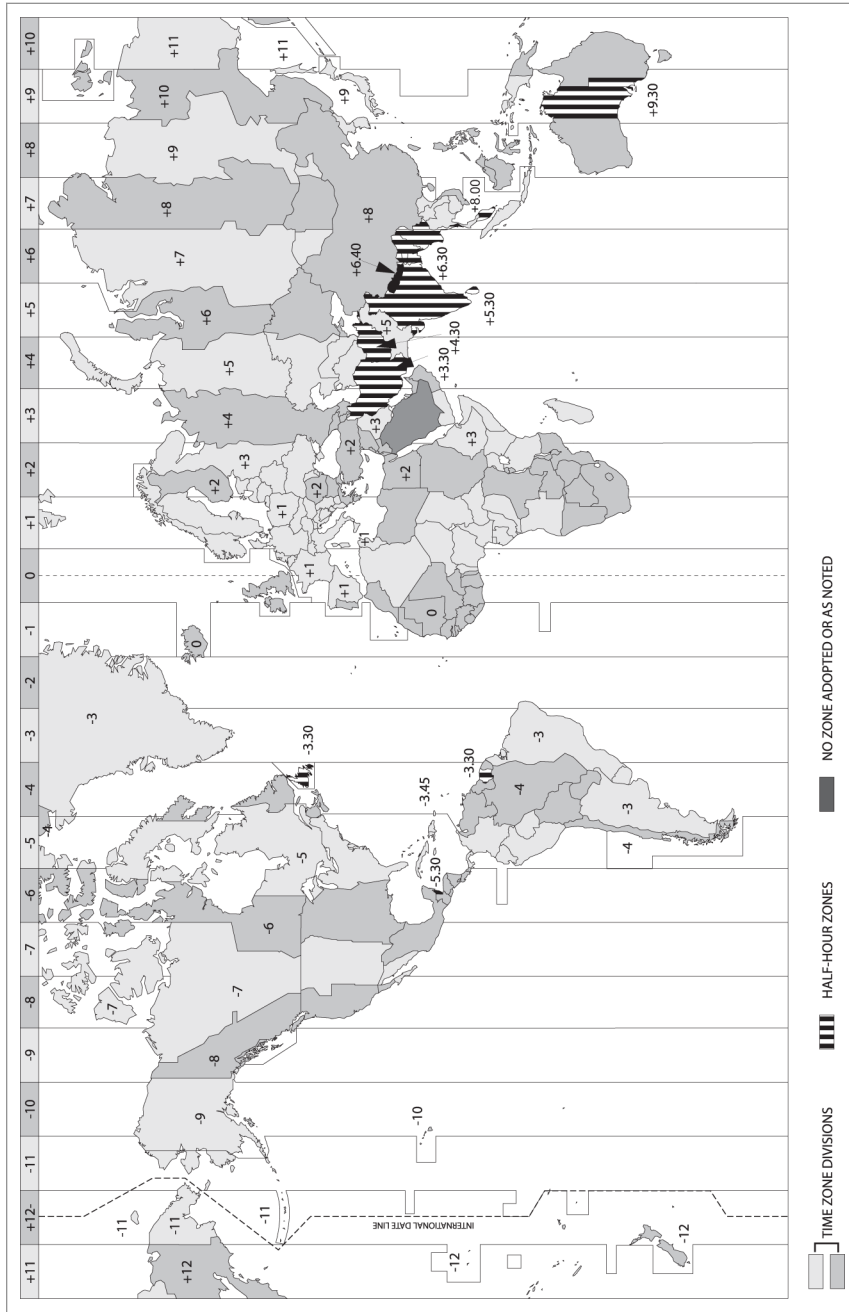

Appendix E

Country and Currency Codes

This appendix contains the combined country and currency codes used for VisaNet Integrated Payment (V.I.P.) messages. The codes are listed in alphabetical order by country name.

- Field 19—Acquiring Institution Country Code
- Field 20—PAN Extended Country Code
- Field 69—settlement Institution Country Code (not used for Authorization Only)
- Field 119—Settlement Service Data (not used for Authorization Only)

The alpha codes are used in Field 43—Card Acceptor Name/Location.

The currency codes are used in these fields:

- Field 49—Currency, Transaction
- Field 50—Currency Code, Settlement (not used for Authorization Only)
- Field 51—Currency Code, cardholder Billing

The currency codes reflect ISO 4217 with these exceptions:

- ISO 4217 codes not supported by V.I.P.:
 - 020, Andorra Peseta (Andorra)
- Currency Codes supported by V.I.P. but have been discontinued in ISO 4217:
 - 226, Ekwele Birr (Equatorial)
 - 365, Iran Airline Rate (Iran)
 - 737, Sudan Airline Rate (Sudan)

Note: These codes, 226, 365, and 737 are no longer used. If received in Field 49—Currency Code, Transaction, V.I.P. forwards the code to the issuer.

Visa does not support all ISO 3166–1 codes.

Currency to Country Cross-Reference

Table 246: Numeric Currency Code to Country Name Cross-Reference

ISO Numeric Currency Code	Country/Territory Name
008	Albania
012	Algeria
032	Argentina
036	Australia
036	Christmas Island
036	Cocos (Keeling) Islands (the)
036	Heard Island and McDonald Islands
036	Kiribati
036	Nauru
036	Norfolk Island
036	Tuvalu
044	Bahamas (the)
048	Bahrain
050	Bangladesh
051	Armenia

Table 246: Numeric Currency Code to Country Name Cross-Reference

ISO Numeric Currency Code	Country/Territory Name
052	Barbados
060	Bermuda
064 and 356	Bhutan
068	Bolivia (Plurinational State of)
072	Botswana
084	Belize
090	Solomon Islands
096	Brunei Darussalam
104	Myanmar
108	Burundi
116	Cambodia
124	Canada
132	Cabo Verde
136	Cayman Islands (the)
144	Sri Lanka
152	Chile
156	Mainland China
170	Colombia
174	Comoros (the)
188	Costa Rica
192	Cuba
203	Czechia
208	Denmark
208	Faroe Islands (the)
208	Greenland
214	Dominican Republic (the)
230	Ethiopia
232	Eritrea
238	Falkland Islands (the) [Malvinas]

Table 246: Numeric Currency Code to Country Name Cross-Reference

ISO Numeric Currency Code	Country/Territory Name
242	Fiji
262	Djibouti
270	Gambia (the)
292	Gibraltar
320	Guatemala
324	Guinea
328	Guyana
332	Haiti
340	Honduras
344	Hong Kong
348	Hungary
352	Iceland
356 and 064	Bhutan
356	India
360	Indonesia
364	Iran (Islamic Republic of)
368	Iraq
376	Israel
388	Jamaica
392	Japan
398	Kazakhstan
400	Jordan
404	Kenya
408	Korea (the Democratic People's Republic of)
410	Korea (the Republic of)
414	Kuwait
417	Kyrgyzstan
418	Lao People's Democratic Republic (the)
422	Lebanon

Table 246: Numeric Currency Code to Country Name Cross-Reference

ISO Numeric Currency Code	Country/Territory Name
426 and 710	Lesotho
430	Liberia
434	Libya
446	Macao
454	Malawi
458	Malaysia
462	Maldives
929	Mauritania
480	Mauritius
484	Mexico
496	Mongolia
498	Moldova (the Republic of)
504	Morocco
504	Western Sahara
512	Oman
516	Namibia
524	Nepal
532	Curaçao
532	Netherlands (the)
532	Sint Maarten (Dutch part)
533	Aruba
548	Vanuatu
554	Cook Islands (the)
554	New Zealand
554	Niue
554	Pitcairn
554	Tokelau
558	Nicaragua
566	Nigeria

Table 246: Numeric Currency Code to Country Name Cross-Reference

ISO Numeric Currency Code	Country/Territory Name
N/A	Antarctica
578	Bouvet Island
578	Norway
578	Svalbard and Jan Mayen
586	Pakistan
590	Panama
598	Papua New Guinea
600	Paraguay
604	Peru
608	Philippines (the)
624	Guinea-Bissau
634	Qatar
643	Russian Federation (the)
646	Rwanda
654	Saint Helena, Ascension and Tristan da Cunha
663	Saint Martin (French part)
930	Sao Tome and Principe
682	Saudi Arabia
690	Seychelles
694/925	Sierra Leone
702	Singapore
704	Viet Nam
706	Somalia
710 and 426	Lesotho
710 (primary)	Namibia
710	South Africa
728	South Sudan
748	Eswatini
752	Sweden

Table 246: Numeric Currency Code to Country Name Cross-Reference

ISO Numeric Currency Code	Country/Territory Name
756	Liechtenstein
756	Switzerland
760	Syrian Arab Republic (the)
764	Thailand
776	Tonga
780	Trinidad and Tobago
784	United Arab Emirates (the)
788	Tunisia
800	Uganda
807	North Macedonia
818	Egypt
826	South Georgia and the South Sandwich Islands
826	United Kingdom of Great Britain and Northern Ireland (the)
834	Tanzania, the United Republic of
840	American Samoa
840	Bonaire, Sint Eustatius and Saba
840	British Indian Ocean Territory (the)
840	Virgin Islands (British)
840	Ecuador
840	El Salvador
840	Guam
840	Marshall Islands (the)
840	Micronesia (Federated States of)
840	Northern Mariana Islands (the)
840	Palau
840	Puerto Rico
840	Timor-Leste
840	Turks and Caicos Islands (the)
840	United States of America (the)

Table 246: Numeric Currency Code to Country Name Cross-Reference

ISO Numeric Currency Code	Country/Territory Name
840	United States Minor Outlying Islands (the)
840	Virgin Islands (U.S.)
840	Palestine, State of
858	Uruguay
860	Uzbekistan
882	Samoa
886	Yemen
894 and 967	Zambia
901	Taiwan
924	Zimbabwe
925	Sierra Leone
928	Venezuela (Bolivarian Republic of)
933	Belarus
934	Turkmenistan
936	Ghana
938	Sudan (the)
941	Serbia
943	Mozambique
944	Azerbaijan
946	Romania
949	Turkey
950	Cameroon
950	Central African Republic (the)
950	Chad
950	Congo (the)
950	Equatorial Guinea
950	Gabon
951	Anguilla
951	Antigua and Barbuda

Table 246: Numeric Currency Code to Country Name Cross-Reference

ISO Numeric Currency Code	Country/Territory Name
951	Dominica
951	Grenada
951	Montserrat
951	Saint Kitts and Nevis
951	Saint Lucia
951	Saint Vincent and the Grenadines
952	Benin
952	Burkina Faso
952	Côte d'Ivoire
952	Mali
952	Niger (the)
952	Senegal
952	Togo
953	French Polynesia
953	New Caledonia
953	Wallis and Futuna
967 and 894	Zambia
968	Suriname
969	Madagascar
971	Afghanistan
972	Tajikistan
973	Angola
975	Bulgaria
976	Congo (the Democratic Republic of the)
977	Bosnia and Herzegovina
978	Croatia
978	Cyprus
978	Estonia
978	European Union

Table 246: Numeric Currency Code to Country Name Cross-Reference

ISO Numeric Currency Code	Country/Territory Name
978	Guadeloupe
978	Holy See (the)
978	Latvia
978	Lithuania
978	Malta
978	Martinique
978	Mayotte
978	Monaco
978	Portugal
978	Réunion
978	Saint Pierre and Miquelon
978	San Marino
978	United Nations Interim Administration Mission in Kosovo (UNMIK)
980	Ukraine
981	Georgia
985	Poland
986	Brazil

Country and Currency Codes

Not all ISO 3166–1 codes are supported by Visa. A superscript S following the currency name indicates that it is a settlement currency.

Table 247: Country and Currency Codes

Country/ Territory Name	ISO Alpha Country (2-char.) Code	ISO Alpha Country (3-char.) Code	ISO Numeric Country Code	ISO Currency Name	Default ISO Numeric Currency Code	ISO Alpha Currency Code	ISO Numeric Currency Code	ISO Minor Units
Afghanistan	AF	AFG	004	Afghani	971	AFN	971	2
Albania	AL	ALB	008	Lek	008	ALL	008	2

Table 247: Country and Currency Codes

Country/ Territory Name	ISO Alpha Country (2-char.) Code	ISO Alpha Country (3-char.) Code	ISO Numeric Country Code	ISO Currency Name	Default ISO Numeric Currency Code	ISO Alpha Currency Code	ISO Numeric Currency Code	ISO Minor Units
Algeria	DZ	DZA	012	Algerian Dinar	012	DZD	012	2
American Samoa	AS	ASM	016	U.S. Dollar ^S	840	USD	840	2
Andorra	AD	AND	020	Euro ^S	978	EUR	978	2
Angola	AO	AGO	024	Kwanza	973	AOA	973	2
Anguilla	AI	AIA	660	E. Caribbean Dollar	951	XCD	951	2
Antarctica	AQ	ATA	010	No Universal Currency	N/A	N/A	N/A	N/A
Antigua and Barbuda	AG	ATG	028	E. Caribbean Dollar	951	XCD	951	2
Argentina	AR	ARG	032	Argentine Peso	032	ARS	032	2
Armenia	AM	ARM	051	Armenian Dram	051	AMD	051	2
Aruba	AW	ABW	533	Aruban Guilder	533	AWG	533	2
Australia	AU	AUS	036	Australian Dollar ^S	036	AUD	036	2
Austria	AT	AUT	040	Euro ^S	978	EUR	978	2
Azerbaijan	AZ	AZE	031	Azerbaijan Manat	944	AZN	944	2
Bahamas (the)	BS	BHS	044	Bahamian Dollar	044	BSD	044	2
Bahrain	BH	BHR	048	Bahraini Dinar	048	BHD	048	3
Bangladesh	BD	BGD	050	Taka	050	BDT	050	2
Barbados	BB	BRB	052	Barbados Dollar	052	BBD	052	2
Belarus	BY	BLR	112	Belarussian Ruble	933	BYN	933	2
Belgium	BE	BEL	056	Euro ^S	978	EUR	978	2
Belize	BZ	BLZ	084	Belize Dollar	084	BZD	084	2
Benin	BJ	BEN	204	CFA Franc BCEAO	952	XOF	952	0
Bermuda	BM	BMU	060	Bermudian Dollar	060	BMD	060	2
Bhutan	BT	BTN	064	Bhutan Ngultrum	064	BTN	064	2
				Indian Rupee ^S	356	INR	356	2

Table 247: Country and Currency Codes

Country/ Territory Name	ISO Alpha Country (2-char.) Code	ISO Alpha Country (3-char.) Code	ISO Numeric Country Code	ISO Currency Name	Default ISO Numeric Currency Code	ISO Alpha Currency Code	ISO Numeric Currency Code	ISO Minor Units
Bolivia (Plurina- tional State of)	BO	BOL	068	Boliviano	068	BOB	068	2
Bonaire, Sint Eustatius and Saba	BQ	BES	535	U.S. Dollar ^S	840	USD	840	2
Bosnia and Herzegovina	BA	BIH	070	Convertible Mark	977	BAM	977	2
Botswana	BW	BWA	072	Pula	072	BWP	072	2
Bouvet Island	BV	BVT	074	Norwegian Krone ^S	578	NOK	578	2
Brazil	BR	BRA	076	Brazilian Real ^S	986	BRL	986	2
British Indian Ocean Territory (the)	IO	IOT	086	U.S. Dollar ^S	840	USD	840	2
Virgin Islands (British)	VG	VGB	092	U.S. Dollar ^S	840	USD	840	2
Brunei Darussalam	BN	BRN	096	Brunei Dollar	096	BND	096	2
Bulgaria	BG	BGR	100	Bulgarian Lev	975	BGN	975	2
Burkina Faso	BF	BFA	854	CFA Franc BCEAO	952	XOF	952	0
Burundi	BI	BDI	108	Burundi Franc	108	BIF	108	0
Cambodia	KH	KHM	116	Riel	116	KHR	116	2
Cameroon	CM	CMR	120	CFA Franc BEAC	950	XAF	950	0
Canada	CA	CAN	124	Canadian Dollar ^S	124	CAD	124	2
Cabo Verde	CV	CPV	132	Cape Verde Escudo	132	CVE	132	2
Cayman Islands (the)	KY	CYM	136	Cayman Islands Dollar	136	KYD	136	2
Central African Republic (the)	CF	CAF	140	CFA Franc BEAC	950	XAF	950	0
Chad	TD	TCD	148	CFA Franc BEAC	950	XAF	950	0
Chile	CL	CHL	152	Chilean Peso	152	CLP	152	0

Table 247: Country and Currency Codes

Country/ Territory Name	ISO Alpha Country (2-char.) Code	ISO Alpha Country (3-char.) Code	ISO Numeric Country Code	ISO Currency Name	Default ISO Numeric Currency Code	ISO Alpha Currency Code	ISO Numeric Currency Code	ISO Minor Units
Christmas Island	CX	CXR	162	Australian Dollar ^S	036	AUD	036	2
Cocos (Keeling) Islands (the)	CC	CCK	166	Australian Dollar ^S	036	AUD	036	2
Colombia	CO	COL	170	Colombian Peso	170	COP	170	2
Comoros (the)	KM	COM	174	Comoro Franc	174	KMF	174	0
Congo (the)	CG	COG	178	CFA Franc BEAC	950	XAF	950	0
Cook Islands (the)	CK	COK	184	New Zealand Dollar ^S	554	NZD	554	2
Costa Rica	CR	CRI	188	Costa Rican Colon	188	CRC	188	2
Côte d'Ivoire	CI	CIV	384	CFA Franc BCEAO	952	XOF	952	0
Croatia	HR	HRV	191	Euro	978	Euro ³	978	2
Cuba	CU	CUB	192	Cuban Peso	192	CUP	192	2
Curaçao	CW	CUW	531	Netherlands Antillian Guilder	532	ANG	532	2
Cyprus	CY	CYP	196	Euro ^S	978	EUR	978	2
Czechia	CZ	CZE	203	Czech Koruna ^S	203	CZK	203	2
Congo (the Democratic Republic of the)	CD	COD	180	Franc Congolais (formerly New Zaire)	976	CDF	976	2
Denmark	DK	DNK	208	Danish Krone ^S	208	DKK	208	2
Djibouti	DJ	DJI	262	Djibouti Franc	262	DJF	262	0
Dominica	DM	DMA	212	E. Caribbean Dollar	951	XCD	951	2
Dominican Republic (the)	DO	DOM	214	Dominican Peso	214	DOP	214	2
Ecuador	EC	ECU	218	U.S. Dollar ^S	840	USD	840	2
Egypt	EG	EGY	818	Egyptian Pound	818	EGP	818	2
El Salvador	SV	SLV	222	U.S. Dollar ^S	840	USD	840	2
Equatorial Guinea	GQ	GNQ	226	CFA Franc BEAC	950	XAF	950	0

Table 247: Country and Currency Codes

Country/ Territory Name	ISO Alpha Country (2-char.) Code	ISO Alpha Country (3-char.) Code	ISO Numeric Country Code	ISO Currency Name	Default ISO Numeric Currency Code	ISO Alpha Currency Code	ISO Numeric Currency Code	ISO Minor Units
Eritrea	ER	ERI	232	Eritean Nakfa	232	ERN	232	2
Estonia	EE	EST	233	Euro ^S	978	EUR	978	2
Ethiopia	ET	ETH	231	Ethiopian Birr	230	ETB	230	2
European Union	n/a	n/a	n/a	Euro ^S	978	EUR	978	2
Faroe Islands (the)	FO	FRO	234	Danish Krone ^S	208	DKK	208	2
Falkland Islands (the) [Malvinas]	FK	FLK	238	Falkland Islands Pound	238	FKP	238	2
Fiji	FJ	FJI	242	Fiji Dollar	242	FJD	242	2
Finland	FI	FIN	246	Euro ^S	978	EUR	978	2
France	FR	FRA	250	Euro ^S	978	EUR	978	2
French Guiana	GF	GUF	254	Euro ^S	978	EUR	978	2
French Polynesia	PF	PYF	258	CFP Franc	953	XPF	953	0
French Southern Territory (the)	TF	ATF	260	Euro ^S	978	EUR	978	2
Gabon	GA	GAB	266	CFA Franc BEAC	950	XAF	950	0
Gambia (the)	GM	GMB	270	Dalasi	270	GMD	270	2
Georgia	GE	GEO	268	Lari	981	GEL	981	2
Germany	DE	DEU	276	Euro ^S	978	EUR	978	2
Ghana	GH	GHA	288	Cedi	936	GHS	936	2
Gibraltar	GI	GIB	292	Gibraltar Pound	292	GIP	292	2
Greece	GR	GRC	300	Euro ^S	978	EUR	978	2
Greenland	GL	GRL	304	Danish Krone ^S	208	DKK	208	2
Grenada	GD	GRD	308	E. Caribbean Dollar	951	XCD	951	2
Guadeloupe	GP	GLP	312	Euro ^S	978	EUR	978	2
Guam	GU	GUM	316	U.S. Dollar ^S	840	USD	840	2
Guatemala	GT	GTM	320	Quetzal	320	GTQ	320	2

Table 247: Country and Currency Codes

Country/ Territory Name	ISO Alpha Country (2-char.) Code	ISO Alpha Country (3-char.) Code	ISO Numeric Country Code	ISO Currency Name	Default ISO Numeric Currency Code	ISO Alpha Currency Code	ISO Numeric Currency Code	ISO Minor Units
Guinea	GN	GIN	324	Guinea Franc	324	GNF	324	0
Guinea-Bissau	GW	GNB	624	Guinea-Bissau Peso	624	GWP	624	2
Guyana	GY	GUY	328	Guyana Dollar	328	GYD	328	2
Haiti	HT	HTI	332	Gourde	332	HTG	332	2
Heard Island and McDonald Islands	HM	HMD	334	Australian Dollar ^S	036	AUD	036	2
Holy See (the)	VA	VAT	336	Euro ^S	978	EUR	978	2
Honduras	HN	HND	340	Lempira	340	HNL	340	2
Hong Kong	HK	HKG	344	Hong Kong Dollar ^S	344	HKD	344	2
Hungary	HU	HUN	348	Forint ^S	348	HUF	348	2
Iceland	IS	ISL	352	Iceland Krona	352	ISK	352	0
India	IN	IND	356	Indian Rupee ^S	356	INR	356	2
Indonesia	ID	IDN	360	Rupiah	360	IDR	360	2
Iran (Islamic Republic of)	IR	IRN	364	Iranian Rial	364	IRR	364	2
Iraq	IQ	IRQ	368	Iraqi Dinar	368	IQD	368	3
Ireland	IE	IRL	372	Euro ^S	978	EUR	978	2
Israel	IL	ISR	376	New Israeli Shequel ^S	376	ILS	376	2
Italy	IT	ITA	380	Euro ^S	978	EUR	978	2
Jamaica	JM	JAM	388	Jamaican Dollar	388	JMD	388	2
Japan	JP	JPN	392	Yen ^S	392	JPY	392	0
Jordan	JO	JOR	400	Jordanian Dinar	400	JOD	400	3
Kazakhstan	KZ	KAZ	398	Tenge	398	KZT	398	2
Kenya	KE	KEN	404	Kenyan Shilling	404	KES	404	2
Kiribati	KI	KIR	296	Australian Dollar ^S	036	AUD	036	2

Table 247: Country and Currency Codes

Country/ Territory Name	ISO Alpha Country (2-char.) Code	ISO Alpha Country (3-char.) Code	ISO Numeric Country Code	ISO Currency Name	Default ISO Numeric Currency Code	ISO Alpha Currency Code	ISO Numeric Currency Code	ISO Minor Units
Korea (the Democratic People's Republic of)	KP	PRK	408	North Korean Won	408	KPW	408	2
Korea (the Republic of)	KR	KOR	410	Won	410	KRW	410	0
Kuwait	KW	KWT	414	Kuwaiti Dinar	414	KWD	414	3
Kyrgyzstan	KG	KGZ	417	Som	417	KGS	417	2
Lao People's Democratic Republic (the)	LA	LAO	418	Kip	418	LAK	418	2
Latvia	LV	LVA	428	Euro ^S	978	EUR	978	2
Lebanon	LB	LBN	422	Lebanese Pound	422	LBP	422	2
Lesotho	LS	LSO	426	Lesotho Loti	426	LSL	426	2
				Rand ^S	710	ZAR	710	2
Liberia	LR	LBR	430	Liberian Dollar	430	LRD	430	2
Libya	LY	LBY	434	Libyan Dinar	434	LYD	434	3
Liechtenstein	LI	LIE	438	Swiss Franc ^S	756	CHF	756	2
Lithuania	LT	LTU	440	Euro ^S	978	EUR	978	2
Luxembourg	LU	LUX	442	Euro ^S	978	EUR	978	2
Macao	MO	MAC	446	Pataca	446	MOP	446	2
North Macedonia	MK	MKD	807	Denar	807	MKD	807	2
Madagascar	MG	MDG	450	Malagasy Ariary	969	MGA	969	2
Mainland China	CN	CHN	156	Yuan Renminbi	156	CNY	156	2
Malawi	MW	MWI	454	Malawi Kwacha	454	MWK	454	2
Malaysia	MY	MYS	458	Malaysian Ringgit ^S	458	MYR	458	2
Maldives	MV	MDV	462	Rufiyaa	462	MVR	462	2
Mali	ML	MLI	466	CFA Franc BCEAO	952	XOF	952	0

Table 247: Country and Currency Codes

Country/ Territory Name	ISO Alpha Country (2-char.) Code	ISO Alpha Country (3-char.) Code	ISO Numeric Country Code	ISO Currency Name	Default ISO Numeric Currency Code	ISO Alpha Currency Code	ISO Numeric Currency Code	ISO Minor Units
Malta	MT	MLT	470	Euro ^S	978	EUR	978	2
Marshall Islands (the)	MH	MHL	584	U.S. Dollar ^S	840	USD	840	2
Martinique	MQ	MTQ	474	Euro ^S	978	EUR	978	2
Mauritania ¹	MR	MRT	478	Ouguiya	929	MRU	929	2
Mauritius	MU	MUS	480	Mauritius Rupee	480	MUR	480	2
Mayotte	YT	MYT	175	Euro ^S	978	EUR	978	2
Mexico	MX	MEX	484	Mexican Peso ^S	484	MXN	484	2
Micronesia (Federated States of)	FM	FSM	583	U.S. Dollar ^S	840	USD	840	2
Moldova (the Republic of)	MD	MDA	498	Moldovan Leu	498	MDL	498	2
Monaco	MC	MCO	492	Euro ^S	978	EUR	978	2
Mongolia	MN	MNG	496	Tugrik	496	MNT	496	2
Montenegro	ME	MNE	499	Euro ^S	978	EUR	978	2
Montserrat	MS	MSR	500	E. Caribbean Dollar	951	XCD	951	2
Morocco	MA	MAR	504	Moroccan Dirham	504	MAD	504	2
Mozambique	MZ	MOZ	508	Mozambique Metical	943	MZN	943	2
Myanmar	MM	MMR	104	Kyat	104	MMK	104	2
Namibia	NA	NAM	516	Namibia Dollar	516	NAD	516	2
				Rand ^S	710	ZAR	710	2
Nauru	NR	NRU	520	Australian Dollar ^S	036	AUD	036	2
Nepal	NP	NPL	524	Nepalese Rupee	524	NPR	524	2
Netherlands (the)	NL	NLD	528	Euro ^S	978	EUR	978	2
New Caledonia	NC	NCL	540	CFP Franc	953	XPF	953	0

Table 247: Country and Currency Codes

Country/ Territory Name	ISO Alpha Country (2-char.) Code	ISO Alpha Country (3-char.) Code	ISO Numeric Country Code	ISO Currency Name	Default ISO Numeric Currency Code	ISO Alpha Currency Code	ISO Numeric Currency Code	ISO Minor Units
New Zealand	NZ	NZL	554	New Zealand Dollar ^S	554	NZD	554	2
Nicaragua	NI	NIC	558	Cordoba Oro	558	NIO	558	2
Niger (the)	NE	NER	562	CFA Franc BCEAO	952	XOF	952	0
Nigeria	NG	NGA	566	Naira	566	NGN	566	2
Niue	NU	NIU	570	New Zealand Dollar ^S	554	NZD	554	2
Norfolk Island	NF	NFK	574	Australian Dollar ^S	036	AUD	036	2
Northern Mariana Islands (the)	MP	MNP	580	U.S. Dollar ^S	840	USD	840	2
Norway	NO	NOR	578	Norwegian Krone ^S	578	NOK	578	2
Oman	OM	OMN	512	Rial Omani	512	OMR	512	3
Pakistan	PK	PAK	586	Pakistan Rupee	586	PKR	586	2
Palau	PW	PLW	585	U.S. Dollar ^S	840	USD	840	2
Palestine, State of	PS	PSE	275	U.S. Dollar ^S	840	USD	840	2
Panama	PA	PAN	591	Balboa	590	PAB	590	2
Papua New Guinea	PG	PNG	598	Kina	598	PGK	598	2
Paraguay	PY	PRY	600	Guarani	600	PYG	600	0
Peru	PE	PER	604	Sol	604	PEN	604	2
Philippines (the)	PH	PHL	608	Philippine Peso	608	PHP	608	2
Pitcairn	PN	PCN	612	New Zealand Dollar ^S	554	NZD	554	2
Poland	PL	POL	616	Zloty ^S	985	PLN	985	2
Portugal	PT	PRT	620	Euro ^S	978	EUR	978	2
Puerto Rico	PR	PRI	630	U.S. Dollar ^S	840	USD	840	2
Qatar	QA	QAT	634	Qatari Rial	634	QAR	634	2

Table 247: Country and Currency Codes

Country/ Territory Name	ISO Alpha Country (2-char.) Code	ISO Alpha Country (3-char.) Code	ISO Numeric Country Code	ISO Currency Name	Default ISO Numeric Currency Code	ISO Alpha Currency Code	ISO Numeric Currency Code	ISO Minor Units
Réunion	RE	REU	638	Euro ^S	978	EUR	978	2
Romania	RO	ROU	642	Leu ^S	946	RON	946	2
Russian Federation (the)	RU	RUS	643	Russian Ruble ^S	643	RUB	643	2
Rwanda	RW	RWA	646	Rwanda Franc	646	RWF	646	0
Samoa	WS	WSM	882	Tala	882	WST	882	2
San Marino	SM	SMR	674	Euro ^S	978	EUR	978	2
Sao Tome and Principe ¹	ST	STP	678	Dobra	930	STN	930	2
Saudi Arabia	SA	SAU	682	Saudi Riyal ^S	682	SAR	682	2
Senegal	SN	SEN	686	CFA Franc BCEAO	952	XOF	952	0
Serbia	RS	SRB	688	Serbian Dinar	941	RSD	941	2
Seychelles	SC	SYC	690	Seychelles Rupee	690	SCR	690	2
Sierra Leone	SL	SLE	694	Leone	694 ⁴	SLL ⁴	694	2
				Leone	925	SLE	925	2
Singapore	SG	SGP	702	Singapore Dollar ^S	702	SGD	702	2
Sint Maarten (Dutch part)	SX	SXM	534	Netherlands Antillian Guilder	532	ANG	532	2
Slovakia	SK	SVK	703	Euro ^S	978	EUR	978	2
Slovenia	SI	SVN	705	Euro ^S	978	EUR	978	2
Solomon Islands	SB	SLB	090	Solomon Islands Dollar	090	SBD	090	2
Somalia	SO	SOM	706	Somali Shilling	706	SOS	706	2
South Africa	ZA	ZAF	710	Rand ^S	710	ZAR	710	2
South Georgia and the South Sandwich Islands	GS	SGS	239	Pound Sterling ^S	826	GBP	826	2
South Sudan	SS	SSD	728	South Sudanese Pound	728	SSP	728	2

Table 247: Country and Currency Codes

Country/ Territory Name	ISO Alpha Country (2-char.) Code	ISO Alpha Country (3-char.) Code	ISO Numeric Country Code	ISO Currency Name	Default ISO Numeric Currency Code	ISO Alpha Currency Code	ISO Numeric Currency Code	ISO Minor Units
Spain	ES	ESP	724	Euro ^S	978	EUR	978	2
Sri Lanka	LK	LKA	144	Sri Lanka Rupee	144	LKR	144	2
Saint Helena, Ascension and Tristan da Cunha	SH	SHN	654	St. Helena Pound	654	SHP	654	2
Saint Kitts and Nevis	KN	KNA	659	E. Caribbean Dollar	951	XCD	951	2
Saint Lucia	LC	LCA	662	E. Caribbean Dollar	951	XCD	951	2
Saint Martin (French part)	MF	MAF	663	Euro ^S	978	EUR	978	2
Saint Pierre and Miquelon	PM	SPM	666	Euro ^S	978	EUR	978	2
Saint Vincent and the Grenadines	VC	VCT	670	E. Caribbean Dollar	951	XCD	951	2
Sudan (the)	SD	SDN	729	Sudanese Pound	938	SDG	938	2
Suriname	SR	SUR	740	Surinam Dollar	968	SRD	968	2
Svalbard and Jan Mayen	SJ	SJM	744	Norwegian Krone ^S	578	NOK	578	2
Eswatini	SZ	SWZ	748	Lilangeni	748	SZL	748	2
Sweden	SE	SWE	752	Swedish Krona ^S	752	SEK	752	2
Switzerland	CH	CHE	756	Swiss Franc ^S	756	CHF	756	2
Syrian Arab Republic (the)	SY	SYR	760	Syrian Pound	760	SYF	760	2
Taiwan	TW	TWN	158	New Taiwan Dollar	901	TWD	901	2
Tajikistan	TJ	TJK	762	Somoni	972	TJS	972	2
Tanzania, the United Republic of	TZ	TZA	834	Tanzanian Shilling	834	TZS	834	2
Thailand	TH	THA	764	Baht ^S	764	THB	764	2

Table 247: Country and Currency Codes

Country/ Territory Name	ISO Alpha Country (2-char.) Code	ISO Alpha Country (3-char.) Code	ISO Numeric Country Code	ISO Currency Name	Default ISO Numeric Currency Code	ISO Alpha Currency Code	ISO Numeric Currency Code	ISO Minor Units
Timor-Leste	TL	TLS	626	U.S. Dollar ^S	840	USD	840	2
Togo	TG	TGO	768	CFA Franc BCEAO	952	XOF	952	0
Tokelau	TK	TKL	772	New Zealand Dollar ^S	554	NZD	554	2
Tonga	TO	TON	776	Pa'anga	776	TOP	776	2
Trinidad and Tobago	TT	TTO	780	Trinidad and Tobago Dollar	780	TTD	780	2
Tunisia	TN	TUN	788	Tunisian Dinar	788	TND	788	3
Turkey	TR	TUR	792	Turkish Lira ^S	949	TRY	949	2
Turkmenistan	TM	TKM	795	Manat	934	TMT	934	2
Turks and Caicos Islands (the)	TC	TCA	796	U.S. Dollar ^S	840	USD	840	2
Tuvalu	TV	TUV	798	Australian Dollar ^S	036	AUD	036	2
Uganda	UG	UGA	800	Uganda Shilling	800	UGX	800	0
Ukraine	UA	UKR	804	Ukrainian Hryvnia	980	UAH	980	2
United Arab Emirates (the)	AE	ARE	784	U.A.E. Dirham ^S	784	AED	784	2
United Kingdom of Great Britain and Northern Ireland (the)	GB	GBR	826	Pound Sterling ^S	826	GBP	826	2
United Nations Interim Adminis- tration Mission in Kosovo	QZ	QZZ	900	Euro ^S	978	EUR	978	2
United States of America (the)	US	USA	840	U.S. Dollar ^S	840	USD	840	2
United States Minor Outlying Islands (the)	UM	UMI	581	U.S. Dollar ^S	840	USD	840	2
Virgin Islands (U.S.)	VI	VIR	850	U.S. Dollar ^S	840	USD	840	2

Table 247: Country and Currency Codes

Country/ Territory Name	ISO Alpha Country (2-char.) Code	ISO Alpha Country (3-char.) Code	ISO Numeric Country Code	ISO Currency Name	Default ISO Numeric Currency Code	ISO Alpha Currency Code	ISO Numeric Currency Code	ISO Minor Units
Uruguay	UY	URY	858	Peso Uruguayo	858	UYU	858	2
Uzbekistan	UZ	UZB	860	Uzbekistan Sum	860	UZS	860	2
Vanuatu	VU	VUT	548	Vatu	548	VUV	548	0
Venezuela (Bolivarian Republic of)	VE	VEN	862	Sovereign Bolivar	928	VES	928	2
Viet Nam	VN	VNM	704	Dong	704	VND	704	0
Wallis and Futuna	WF	WLF	876	CFP Franc	953	XPF	953	0
Western Sahara	EH	ESH	732	Moroccan Dirham	504	MAD	504	2
Yemen	YE	YEM	887	Yemeni Rial	886	YER	886	2
Zambia ²	ZM	ZMB	894	Zambian Kwacha	967	ZMW	967	2
Zimbabwe ⁵	ZW	ZWE	716	Zimbabwe Gold	924	ZWG	924	2

¹ISO Alpha Currency Code **MRO** and ISO Numeric Currency Code **478** is allowed until 30 June 2018 for originals. It is allowed until 28 February 2019 for exceptions.

² Currency code **894** was allowed until 30 June 2013 for originals. It was allowed until 31 Dec 2013 for exceptions.

³ After 31 December 2022, Euro acts as the default currency for Croatia. Visa no longer accepts authorization requests with currency code of Croatian Kuna (**HRK/191**) for original transactions.

⁴ Currency code **694** for Sierra Leone (**SLL/694**) is allowed until 30 September 2022 for originals. Exception items with currency code **SLL/694** must be submitted with **SLL/694** as source currency.

⁵ Zimbabwe Gold (**ZWG/924**) replaces Zimbabwe Dollar (**ZWL/932**) as the new currency code for Zimbabwe from September 01, 2024.

Appendix F

Visa Smart Debit/Smart Credit (VSDC) Fields - Additional Information

This appendix provides additional information about the VSDC content and values.

Field 55, Tags 71 and 72

The format of field 55, tags 71 and 72, varies slightly from its counterpart third bitmap field 142. When issuer script is carried in field 55, the initial length subfield in byte 1 for field 142 is not required. The first byte in field 55 is the tag itself, as shown in the table below.

Tag	Length	Value: Issuer Script Data Elements (Bytes 5–256)
71 or 72	L (Sum data, including Tag for Script ID, followed by the Issuer Script TLV data elements)	
Byte 1 ¹	Bytes 2–x The byte number used in this table reflects only the position of data for tags 71 and 72. It does not reflect the position of this data within the context of field 55.	Bytes x-256

¹The byte number used in this table is reflective only on the positioning of data for tags 71 and 72. It does not reflect the position of this data within the context of field 55.

These two tables illustrate how the same issuer script bytes would map between field 142 and field 55. In this example, the issuer script = Tag 72.

Table 248: Example of Issuer Script in Field 142

Positions:			
	1	2	3–39
Length	Tag	Length	Value: Issuer Script Commands
	72		
Byte 1	Byte 2	Byte 3	Bytes 4–40

Table 249: Example of Issuer Script in Field 55

Positions:						
	1	2–3	4–44	45	46	47–83
Length	Dataset ID	Length	Value: Various Chip Card TLV Data Elements	Tag	Length	Value: Issuer Script Commands
	01			72		
Byte 1	Byte 2	Bytes 3–4	Bytes 5–45	Byte 46	Byte 47	Bytes 48–84

Field 134—Visa Discretionary Data

Format 1, (Standard Format) Examples by Card Type

VIS and CCD Data

Table 250: Field 134 Format 1 Examples by Card Type

Card Type	Byte 1	Byte 2	Byte 3	Bytes 4–7, Bytes 4–8	Bytes 8–16, Bytes 9–16
Visa ICC Specifications (VIS) Card CVN 10 (Hex '0A') or CVN 12 (Hex '0C') or CVN 18 (Hex '12') or CVNs 50–59 (Hex '32'-'3B')	Length Indicator	Derivation Key Index	Cryptogram Version Number	Card Verification Results (CVR) Bytes 4–7	Reserved Bytes 8–16
Common Core Definitions (CCD)-Compliant Card	Length Indicator	Common Core Identifier	Derivation Key Index	Card Verification Results (CVR) Bytes 4–8	Counters Bytes 9–16

Table 251: Visa Discretionary Data-Data Element Description

Data Element Name	VIS	Generic EMV	Common Core Definitions (CCD)	Description
Derivation Key Index	Byte 2	n/a	Byte 3	2 hexadecimal digits; 1 byte. For VIS and CCD cards, an index into the issuer's list of keys for use in Online Card Authentication, issuer authentication and validation of the clearing cryptogram.
Cryptogram Version Number (CVN)	Byte 3	n/a	n/a	2 hexadecimal digits; 1 byte. For Visa ICC Specifications (VIS) cards, identifies the method used to calculate the cryptogram contained in the message. It indicates which version of the cryptogram algorithm is used for application cryptogram generation; the format of the Issuer Application Data; and which method to use for Authorization Response Cryptogram (ARPC) generation.
Card Verification Results (CVR)	Bytes 4–7	n/a	Bytes 4–8	For VIS cards, 1 byte binary length indicator + 3 bytes. For Common Core Definitions (CCD) cards, 5 bytes. For Visa ICC Specifications (VIS) and Common Core Definitions (CCD) cards, contains a series of indicators from the card perspective. The card records the results of offline and online processing by setting a series of indicators in this field. These indicators are available to users in the online message and clearing transaction.
Common Core Identifier	n/a	n/a	Byte 2	2 hexadecimal digits; 1 byte. For Common Core Definitions (CCD) cards, contains: Format Indicator (first nibble): Identifies the format of the Issuer Application Data. Cryptogram Version (second nibble): indicates the version of the cryptogram algorithm used for application cryptogram (AC) generation and which method to use for Authorization Response Cryptogram (ARPC) generation.

Format 2, (Expanded Format) Examples by Card Type

Table 252: Field 134 and Tag 9F10 Card Verification Results (CVR)—Examples by Card Type

Card Type	Length Indicator	Issuer Application Data Variable, bytes 2–33			
Visa ICC Specifications (VIS) Card, without issuer discretionary data Cryptogram Version Number CVN 10 (Hex '0A') or CVN 12 (Hex '0C') or CVN 18 (Hex '12') or CVN 50–59 (Hex '32'-'3B')	Length = 7 bytes Value = Hex '07'	Length of Visa Discretionary Data (1 byte) Value = Hex '06'	6 bytes of data Visa Discretionary Data: Derivation Key Index (DKI) (1 byte) Cryptogram Version Number (CVN) (1 byte) Card Verification Results (CVR) (4 bytes)		
(VIS) Card with issuer discretionary data Cryptogram Version Number (CVN) 10 (Hex '0A') or CVN 12 (Hex '0C') or CVN 18 (Hex '12') or CVN 50–59 (Hex '32'-'3B')	Length = 9–23 bytes Value = Hex '09' - '17'	Length of Visa Discretionary Data (1 byte) Length = 6 bytes Value = Hex '06'	6 bytes of data Visa Discretionary Data: Derivation Key Index (1 byte) Cryptogram Version Number (1 byte) Card Verification Results (4 bytes)	Length of Issuer Discretionary Data (1 byte) Length = 1–15 bytes Value = Hex '01' - '0F'	1–15 bytes Issuer Discretionary Data Variable, up to 15 bytes

Table 252: Field 134 and Tag 9F10 Card Verification Results (CVR)—Examples by Card Type

Card Type	Length Indicator	Issuer Application Data Variable, bytes 2–33			
Visa ICC Specifications (VIS) Card CVN '22' or CVN '2C'	Length = 32 bytes Value = Hex '20'	Length of Issuer Application Data (1 byte) Length = 31 bytes Value = Hex '1F'	Cryptogram Version Number (1 byte), left nibble = Issuer Application Data Format Derivation Key Index (1 byte) Card Verification Results (5 bytes)	Reserved for Future Use (RFU) (4 bits) Issuer Discretionary Data Option ID (4 bits)	23 bytes of Issuer Discretionary Data
Visa ICC Specifications (VIS) Card CVN '41' or CVN '42' or CVN '4A'	Length = 32 bytes Value = Hex '20'	Length of Issuer Application Data (1 byte) Length = 31 bytes Value = Hex '1F'	Cryptogram Version Number (1 byte), left nibble = Issuer Application Data Format Derivation Key Index (1 byte) Card Verification Results (6 bytes)	Digital Wallet Provider ID (4 bytes) Reserved for Future Use (RFU) (4 bytes) Issuer Discretionary Data Format (1 byte)	14 bytes of Issuer Discretionary Data

Table 252: Field 134 and Tag 9F10 Card Verification Results (CVR)—Examples by Card Type

Card Type	Length Indicator	Issuer Application Data Variable, bytes 2–33			
Visa ICC Specifications (VIS) Card CVN '43'	Length = 32 bytes Value = Hex '20'	Length of Issuer Application Data (1 byte) Length = 31 bytes Value = Hex '1F'	CVN (1 byte), left nibble = Issuer ADF DKI (1 byte) CVR (6 bytes)	Digital Wallet Provider ID (4 bytes) Derivation Data (4 bytes) Issuer Discretionary Data Format (1 byte), right nibble = Issuer Discretionary Data Option ID (4 bits)	14 bytes of Issuer Discretionary Data
Visa ICC Specifications (VIS) Card CVN '44'	Length = 18–32 bytes Value = Hex '12' to '20'	Length of Issuer Application Data (1 byte) Length = 17–31 bytes Hex '11' – '1F'	Cryptogram Version Number (1 byte), left nibble = Issuer Application Data Format Derivation Key Index (1 byte) Card Verification Results (6 bytes)	Digital Wallet Provider ID (4 bytes) Derivation Data (4 bytes) Issuer Discretionary Data Format (1 byte), right nibble = Issuer Discretionary Data Option ID (4 bits)	1–14 bytes of Issuer Discretionary Data (optional)

Table 252: Field 134 and Tag 9F10 Card Verification Results (CVR)—Examples by Card Type

Card Type	Length Indicator	Issuer Application Data Variable, bytes 2–33			
CCD-Compliant Card	Length = 32 bytes Value = Hex '20'	Length of Visa Discretionary Data (1 byte) Length = 15 bytes Value = Hex '0F'	15 bytes of data Visa Discretionary Data Common Core Identifier (1 byte) Derivation Key Index (1 byte) Card Verification Results (5 bytes) Counters (8 bytes)	Hex '0F' Length of Issuer Discretionary Data Length = 15 bytes Value = Hex '0F'	15 bytes of data Issuer Discretionary Data
Generic EMV Card	Length = 1–32 bytes Value = Hex '01' to '20'	1–32 bytes of Issuer-Defined Data			

Content Breakdown by CVN

Table 253: Field 134 and Tag '9F10' Card Verification Results (CVR) Bit Coding—VIS Cards With IAD Format 0/1/3 (CVN10 or 12 or 18 or 50–59)

Byte	Position	Value	Interpretation
Byte 1	1–8	03	Length indicator in bytes
Byte 2	1–2	Cryptogram type in second GENERATE AC: 00 — AAC returned in second GENERATE AC 01 — TC returned in second GENERATE AC 10 — Second GENERATE AC not requested 11 — Reserved for future use	
Byte 2	3–4	Cryptogram type in first GENERATE AC/GPO: 00 — AAC returned in first GENERATE AC/GPO 01 — TC returned in first GENERATE AC/GPO 10 — ARQC returned in first GENERATE AC/GPO 11 — RFU (for contact transactions) Application disabled (for contactless transactions)	
Byte 2	5	1	Issuer Authentication performed and failed
Byte 2	6	1	Offline Personal Identification Number (PIN) verification performed For contactless transactions, this bit indicates that Cardholder Device CVM (CDCVM) was successfully performed.
Byte 2	7	1	Offline Personal Identification Number (PIN) verification failed
Byte 2	8	1	Unable to go online
Byte 3	1	1	Last online transaction not completed
Byte 3	2	1	(Offline) Personal Identification Number (PIN) try limit exceeded For contactless transactions, this bit indicates that the Consumer Device Cardholder Verification Method (CDCVM) try limit was exceeded.
Byte 3	3	1	Exceeded velocity checking counters
Byte 3	4	1	New card
Byte 3	5	1	Issuer Authentication failure on last online transaction
Byte 3	6	1	Issuer Authentication not performed after online authorization
Byte 3	7	1	Application blocked by card because offline Personal Identification Number (PIN) Try Limit exceeded
Byte 3	8	1	Offline static data authentication failed on last transaction and transaction declined offline Note: RFU in some versions of specs - VIS 1.6/VCPS 2.2 or later

Table 253: Field 134 and Tag '9F10' Card Verification Results (CVR) Bit Coding—VIS Cards With IAD Format 0/1/3 (CVN10 or 12 or 18 or 50–59)

Byte	Position	Value	Interpretation
Byte 4	1–4	0000 1111	Number of Issuer Script commands; treat as binary number
Byte 4	5	1	Issuer Script processing failed
Byte 4	6	1	Offline dynamic data authentication failed (Dynamic Data Authentication (DDA) failed or Combined DDA/Application Cryptogram Generation (CDA) failed) on last transaction and transaction declined offline
Byte 4	7	1	Offline dynamic data authentication performed
Byte 4	8	1	PIN verification command not received for a PIN-Expecting card

EMV® is a registered trademark in the U.S. and other countries and an unregistered trademark elsewhere. The EMV trademark is owned by EMVCo.

Table 254: Field 134 and Tag '9F10' Card Verification Results (CVR) Bit Coding—VIS Cards With IAD Format 2 (CVN '22' or '2C')

Byte	Position	Value	Interpretation
Byte 1	1–8	RFU	Reserved
Byte 2	1–2	Cryptogram type in second GENERATE AC: 00 — AAC returned in second GENERATE AC 01 — TC returned in second GENERATE AC 10 — Second GENERATE AC not requested 11 — Reserved for future use	
Byte 2	3–4	Cryptogram type in first GENERATE AC/GPO: 00 — AAC/GPO returned in first GENERATE AC/GPO 01 — TC/GPO returned in first GENERATE /GPO 10 — ARQC returned in first GENERATE AC/GPO 11 — RFU (for contact transactions) Application disabled (for contactless transactions)	
Byte 2	5	1	Issuer Authentication performed and failed
Byte 2	6	1	Offline PIN verification performed For contactless transactions, this bit indicates that CDCVM was successfully performed.
Byte 2	7	1	Offline PIN verification failed
Byte 2	8	1	Unable to go online
Byte 3	1	1	Last online transaction not completed

Table 254: Field 134 and Tag '9F10' Card Verification Results (CVR) Bit Coding—VIS Cards With IAD Format 2 (CVN '22' or '2C')

Byte	Position	Value	Interpretation
Byte 3	2	1	(Offline) PIN try limit exceeded For contactless transactions, this bit indicates that the CDCVM try limit was exceeded.
Byte 3	3	1	Exceeded velocity checking counters
Byte 3	4	1	New card
Byte 3	5	1	Issuer authentication failure on last online transaction
Byte 3	6	1	Issuer authentication not performed after online authorization
Byte 3	7	1	Application blocked by card because offline PIN try limit exceeded
Byte 3	8	1	Offline static data authentication failed on last transaction and transaction declined offline Note: RFU in some versions of specs - VIS 1.6/VCPS 2.2 or later
Byte 4	1–4	0000 1111	Number of issuer script commands; treat as binary number
Byte 4	5	1	Issuer script processing failed
Byte 4	6	1	Offline dynamic data authentication failed (DDA failed or Combined DDA/ Application Cryptogram Generation (CDA) failed) on last transaction and transaction declined offline
Byte 4	7	1	Offline dynamic data authentication (DDA or CDA) performed
Byte 4	8	1	PIN verification command not received for a PIN-expecting card
Byte 5	1	1	Biometric try limit exceeded (biometric cards only, otherwise RFU)
Byte 5	2	1	Offline biometric performed (biometric cards only, otherwise RFU)
Byte 5	3	1	Offline biometric failed (biometric cards only, otherwise RFU)
Byte 5	4	RFU	Reserved for future use
Byte 5	5	1	Cardholder verification required (for contactless transactions); RFU for VIS
Byte 5	6	1	Exceeded cardholder verification velocity checks for VIS 1.6.2 and VCPS 2.2.1 and later versions. RFU in earlier versions
Byte 5	7	1	CDCVM successfully performed
Byte 5	8	1	Secure messaging uses EMV® session key-based derivation

Table 255: Field 134 and Tag '9F10' Card Verification Results (CVR) Bit Coding—CCD-Compliant

Byte	Position	Value	Interpretation
Byte 1	1–2	Second cryptogram type: 00 — AAC 01 — TC 10 — Second GENERATE AC not requested 11 — Reserved future use	
Byte 1	3–4	First cryptogram type: 00 — AAC 01 — TC 10 — ARQC 11 — Reserved future use	
Byte 1	5	1	CDA performed
Byte 1	6	1	Offline DDA performed
Byte 1	7	1	Issuer authentication not performed
Byte 1	8	1	Issuer authentication failed
Byte 2	1–4		Lower order nibble of PIN try counter (treat as binary number)
Byte 2	5	1	Offline PIN verification performed
Byte 2	6	1	Offline PIN verification performed and PIN not successfully verified
Byte 2	7	1	PIN try limit exceeded
Byte 2	8	1	Last online transaction not completed
Byte 3	1	1	Lower offline transaction count limit exceeded
Byte 3	2	1	Upper offline transaction count limit exceeded
Byte 3	3	1	Lower cumulative offline amount limit exceeded
Byte 3	4	1	Upper cumulative offline amount limit exceeded
Byte 3	5	1 or 0	Issuer discretionary bit 1
Byte 3	6	1 or 0	Issuer discretionary bit 2
Byte 3	7	1	Issuer discretionary bit 3 (CPA cards: Check failed)
Byte 3	8	1	Issuer discretionary bit 4 (CPA cards: Match found in Additional Check Table)
Byte 4	1–4	0000–1111	Number of script commands containing secure messaging successfully processed (treat as binary number)
Byte 4	5	1	Issuer script processing failed

Table 255: Field 134 and Tag '9F10' Card Verification Results (CVR) Bit Coding—CCD-Compliant

Byte	Position	Value	Interpretation
Byte 4	6	1	Offline data authentication failed on previous transaction
Byte 4	7	1	Go online on next transaction was set
Byte 4	8	1	Unable to go online
Byte 5	1–8	RFU	Reserved for future use

Table 256: Field 134 and Tag '9F10' Card Verification Results (CVR) Bit Coding—VIS Cards With IAD Format 4 (CVN '41', '42', '43', '44', and '4A')

Byte	Position	Value	Interpretation
Byte 1	1–4	Cardholder Verification Method (CVM) verifying entity: 0000b — No CDCVM was verified 0001b — Visa Mobile Payment Application (VMPA) 0010b — Mobile gateway 0011b — Co-residing secure element application 0100b — Trusted execution environment application 0101b — Mobile application (“Mobile Wallet” in VQRPS, “Digital Wallet” in Visa Mobile Payment Application (VMPA) Visa Mobile Contactless Payment Specification (VMCPS)) 0110b — Terminal 0111b — Verified in the cloud 1000b — Verified by the mobile device OS	
Byte 1	5–8	Cardholder Verification Method (CVM) verified type: 0000b — No CDCVM was verified 0001b — Passcode 0010b — Finger biometric 0011b — Mobile device pattern 0100b — Facial biometric 0101b — Iris biometric 0110b — Voice biometric 1101b — Signature (performed by the terminal) 1110b — Online PIN (performed by the terminal)	
Byte 2	1–2	RFU	Reserved future use

Table 256: Field 134 and Tag '9F10' Card Verification Results (CVR) Bit Coding—VIS Cards With IAD Format 4 (CVN '41', '42', '43', '44', and '4A')

Byte	Position	Value	Interpretation
Byte 2	3–4	Application cryptogram type in GPO: 00b — AAC returned in GPO 01b — TC returned in GPO 10b — ARQC returned in GPO 11b — Application disabled	
Byte 2	5–8	RFU	Reserved future use
Byte 3	1	RFU	Reserved future use
Byte 3	2	1	Passcode try limit exceeded
Byte 3	3	1	Exceeded velocity checking counters
Byte 3	4	RFU	Reserved future use
Byte 3	5	1	Issuer Authentication Failed on last online transaction
Byte 3	6–8	RFU	Reserved future use
Byte 4	1–4	1	Number of issuer script commands (cyclic) (Treat as binary number)
Byte 4	5–8	RFU	Reserved future use
Byte 5	1	Debugger (Visa Cloud-Based Payments Contactless Specification (VCPCS) only): 0b — Consumer device is not in debug mode 1b — A debugger is attached while the mobile application is in use	
Byte 5	2	Rooted device (VCPCS only): 0b — Consumer device is not a rooted device 1b — A device is attempting to use the mobile application after the device has been <i>rooted</i> (escalation of privileges)	
Byte 5	3	Substrate (hooking) (VCPCS only): 0b — Mobile application is not hooked 1b — An attacker has overridden a called function that resides in the mobile application	
Byte 5	4	Code modification (VCPCS only): 0b — Mobile application integrity intact 1b — Mobile application integrity failure	
Byte 5	5	Data connectivity (VCPCS only): 0b — Consumer device has data connectivity 1b — Data connectivity is deliberately disabled on consumer device	

Table 256: Field 134 and Tag '9F10' Card Verification Results (CVR) Bit Coding—VIS Cards With IAD Format 4 (CVN '41', '42', '43', '44', and '4A')

Byte	Position	Value	Interpretation
Byte 5	6	Emulator (VCPCS only): 0b — Consumer device is genuine 1b — Consumer device is an emulator	
Byte 5	7–8	RFU	Reserved future use
Byte 6	1–8	RFU	Reserved future use

Field 142—Issuer Script

Field 142 contains two length subfields, the second of which starts in position 2 (field 142.2) and is, in itself, a variable length subfield that can be one or more bytes. The description explains how to determine the number of bytes that are used for this second subfield.

If the first bit of the first Length byte is 0, the length is carried in the next 7 bits of this first byte. Length is only one byte long.

If the first bit of the first Length byte is 1, the next 7 bits contain the number of subsequent bytes used for length.

Table 257: Field 142 Examples

Tag	Length	Value
XX	00001111 The first 0 means length is in the rest of the byte	15 bytes long (0001111 from the one-byte Length portion)
XX	10000001 10000001 The first 1 means next 7 bits contain number of subsequent bytes (that is, one byte of length follows.)	129 bytes long (10000001 from the second byte of Length portion)

Two bytes are necessary for lengths from 128 to 255, but some issuers may use two bytes for lengths that are less than 128 bytes.

Appendix G

VisaNet Terminology

This appendix describes VisaNet System and Business terminology.

VisaNet System Terminology

VisaNet system names have been replaced with terms describing VisaNet transaction *functions*, focusing on processing and message terminology

Table 258: Terminology History

System Name References	Primary VisaNet Transaction Function	Processing Method	Message Type/Naming Convention
BASE I System—Obsolete: designated as VisaNet Integrated Payment (V.I.P.) System	Authorization	Dual-Message	Authorization
Single Message System (SMS)— designated as VisaNet Integrated Payment (V.I.P.) System	Authorization and Clearing	Single-Message	SMS

Table 258: Terminology History

System Name References	Primary VisaNet Transaction Function	Processing Method	Message Type/Naming Convention
V.I.P. System	Authorization	Dual-Message	Authorization-Only
	Authorization and Clearing	Single-Message	Full Financial
BASE II System	Clearing	Dual-Message	BASE II
VisaNet Settlement Service (VSS)	Settlement	Dual-Message	BASE II
		Single-Message	Full Financial

Table 259: Accepted Terminology

Primary VisaNet Transaction Function	Processing Method	Message Type/Naming Convention
Authorization	Authorization-Only	Authorization-Only
Authorization and Clearing	Full Service	Full Financial
Clearing	Clearing	Clearing Transaction
Settlement	Settlement	Settlement Transaction

VisaNet Business Terminology

VisaNet business terms have been replaced to cater to present market requirements and future expansion plans.

Table 260: Visa Numeric Identifier Terms

Identifier Names		Description	Source
New Term	Old Term/Terms		
Issuing BIN (ISO defined)	Bank Identification Number (BIN) Issuer Identification Number (IIN) ISO BIN Card Prefix	This is a numeric value used to identify the issuing institution. This is always the same as the first six to eight digits of the PAN. The length and format are defined by ISO.	First digits of PAN
Acquiring Identifier	Bank Identification Number (BIN) Acquiring BIN Acquiring Institution Identification Code Affiliate ID Acquiring ID Acquiring RID	This is a numeric value used to identify the acquiring institution. It is not governed by ISO and can be any six-digit value. This includes currently assigned acquiring routing IDs (RIDs) related in the U.S. to Plus and Interlink.	V.I.P. Messages — Acquiring Institution Identification Code BASE II Draft Data — Acquirer Reference Number BASE II Non-Draft Data (TC 10/20/33) — Source/ Destination Identifier SMS Reports: - Acquirer Transaction Detail Reports — Affiliate ID - Issuer Transaction Detail Reports — Acquirer ID Edit Package BIN Table

Table 260: Visa Numeric Identifier Terms

Identifier Names		Description	Source
New Term	Old Term/Terms		
Issuing Identifier	Bank Identification Number (BIN) Processing Rule (also known as Proc Rule) Issuing RID RID	This is a numeric value used to define issuing processing. It is not governed by ISO. Multiple issuing BINs (defined previously) can be linked to the same Issuing Identifier within Visa systems, which allows processing/routing configurations to be mirrored. This can be any numeric value and does not have to start with a four.	V.I.P. Request Messages: - Receiving Institution Identification Code - Issuing Institution Identification Code V.I.P. Response Messages — Forwarding Institution Identification Code BASE II Non-Draft Data (TC 10/20/33) — Source/Destination Identifier SMS Reports: - Issuer Transaction Detail Reports — Issuer ID Edit Package: - ARDEF - VID Table
VSS Processor	Bank Identification Number (BIN) Processor Settlement BIN	This is a numeric value used to define the settlement entity for V.I.P. Full Service endpoints. It can be any numeric value and does not have to start with a four.	Reports/Reference Tables: - SMS Reports, Acquirer Transaction Detail Reports — Processor - SMS Reports, Issuer Transaction Detail Reports — Processor
BASE II Center Information Block (CIB)	Bank Identification Number (BIN) Processor BIN CIB	This is a numeric value used to define the processor/settlement entity for BASE II endpoints. It can be any numeric value and does not have to start with a four.	BASE II TC 90 header records Reports/Reference Tables: - Edit Package BIN Table - Edit Package ARDEF

Table 260: Visa Numeric Identifier Terms

Identifier Names		Description	Source
New Term	Old Term/Terms		
Alternate Routing ID (RID)	Bank Identification Number (BIN) Routing ID	This is a numeric value used to define specialized processing or routing relationships. It can be any numeric value and does not have to start with a four. It may be used to split route ATM, POS, or exception transactions to an alternate destination.	Routing ID Request Client Information Questionnaire (CIQ)
Encryption Rule Identifier	Bank Identification Number (BIN) Encryption BIN Pseudo BIN Routing ID	This is a numeric value used as a Visa system locator to ensure correct keys are associated with a given entity. It can be any numeric value and does not have to start with a four.	Push Provisioning Requests Dynamic Key Exchanges
File Delivery Endpoint Identifier	Non-core numeric identifier (NCNID)	This is a numeric value used to identify a specific endpoint. It can be any numeric value and does not have to start with a four. It traditionally begins with a zero, but may vary depending on the purpose.	Reports/Reference Tables: • BIN Licensing agreement • Client Information Questionnaire (CIQ) • Visa Open File Delivery (Visa OFD) File Name • Endpoint Diagrams
Responder Identifier	Responder BIN	Created by Visa in the VisaNet Certification Management System (VCMS), for acquirer and issuer testing such as business enhancements testing, basic transaction testing, and regression testing.	Chapter 14 of the Global Technical Letter and Implementation Guide VisaNet Testing Guides

Table 260: Visa Numeric Identifier Terms

Identifier Names		Description	Source
New Term	Old Term/Terms		
Clearing Identifier	Bank Identification Number (BIN) Clearing BIN	Assigned by Visa and used to define issuing and/or acquiring BASE II processing.	Visa Test System-Clearing and Settlement (VTS-CS)
Visa Resolve Online (VROL) Identifier	Routing ID	This is a numeric value that can be used to identify various VROL organizations, which enables endpoint access to specific dispute transactions. It can be any numeric value and does not have to start with a four.	VROL service enablement Client Information Questionnaire (CIQ)

Table 261: Visa Financial Message Terms

Financial Messages		Description	Source
New Message Terms	Old Message Terms		
0220/0230 Dispute response financial	0220/0230 Representment	Used when a VROL dispute requires reallocation of funds.	Acquirer or, Visa on behalf of the acquirer
0220/0230 Dispute response financial reversal	0220/0230 Adjustment	Used when a VROL dispute requires reallocation of funds, or the reversal of a duplicate or erroneous dispute financial transaction.	Acquirer or, Visa on behalf of the acquirer

Table 261: Visa Financial Message Terms

Financial Messages		Description	Source
New Message Terms	Old Message Terms		
0282/0292 Dispute response financial status advice	0282/0292 Status advice	Optionally sent to the acquirer when either a dispute response financial or dispute response financial reversal message is created by Visa on behalf of the acquirer. Or when an acquirer initiates either a dispute response financial or dispute response financial reversal message, the 0282 Dispute response financial status advice is optionally sent to the acquirer after validation to notify the acquirer of the validation results.	Visa
0422/0432 Dispute financial	0422/0432 Chargeback	Used when a VROL dispute requires reallocation of funds.	Issuer or, Visa on behalf of the issuer
0422/0432 Dispute financial reversal	0422/0432 Chargeback reversal	Used when a VROL dispute requires reallocation of funds, or the reversal of a duplicate or erroneous dispute financial transaction.	Issuer or, Visa on behalf of the issuer
0480/0490 Dispute financial status advice	0480/0490 Status advice	Optionally sent to the issuer when either a dispute financial or dispute financial reversal message is created by Visa on behalf of the issuer. Or when an issuer initiates either a dispute financial or dispute financial reversal message, the 0480 Dispute financial status advice is optionally sent to the issuer after validation to notify the issuer of the validation results.	Visa