


潛意識 + 環境

成長型心態

java vs javascript


牛肉麵 vs 牛蒡

js

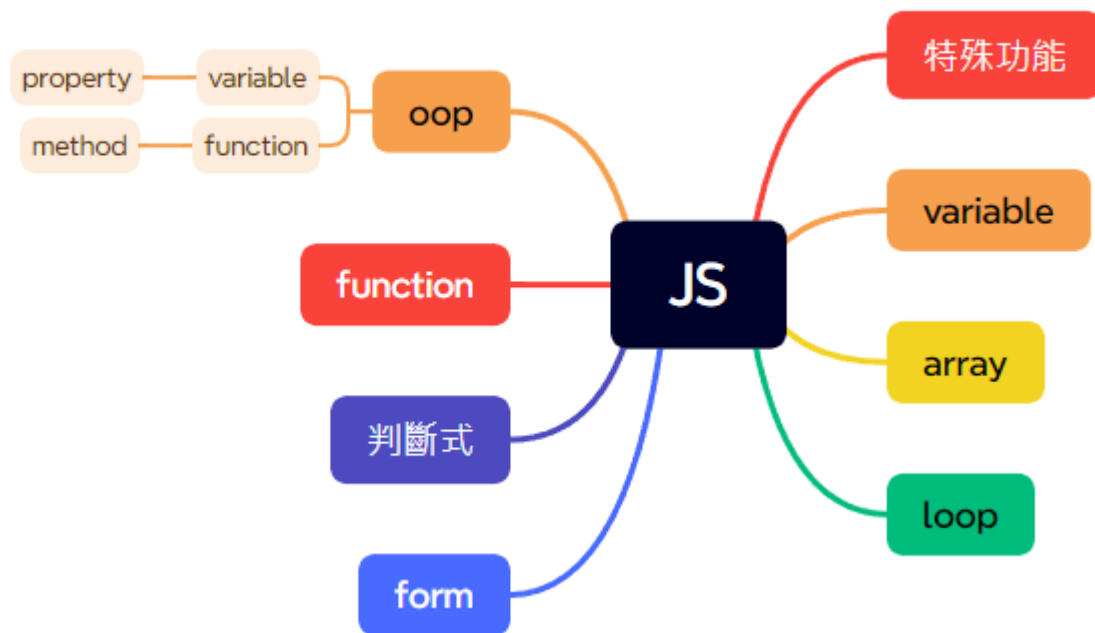


1.本質 學這個要幹嘛

2.情境 用在哪

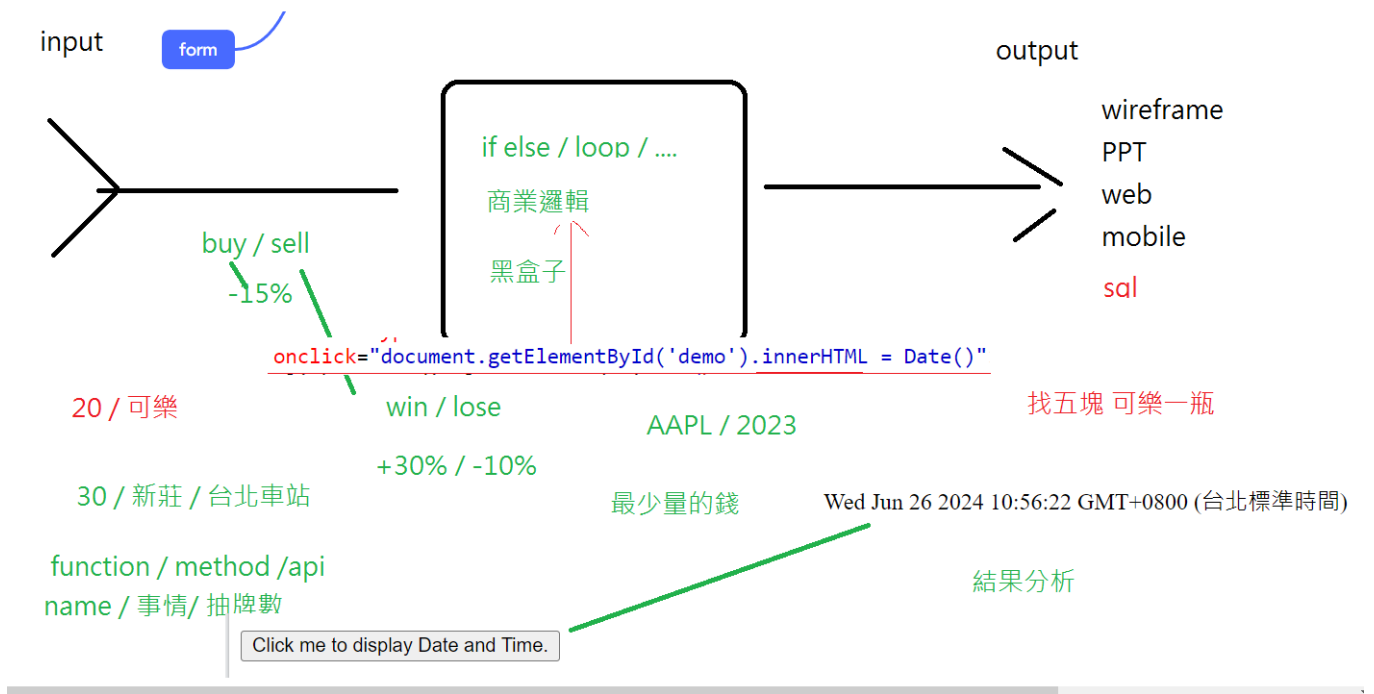

```
// 2.事件 event
myBtn.addEventListener((method) Console.log(...data: any[]): void)
console.log('myBtn click ok');
resultSpan.innerText = 'Hello 55688';
resultSpan.innerText('Hello 55688');
);
```



```
// 2.事件 event
myBtn.addEventListener('click', function () {
  console.log('myBtn click ok');
  resultSpan.innerText = 'Hello 55688';
  resultSpan.innerText('Hello 55688');
});
```

```
myBtn.addEventListener('click', function () {
  console.log('myBtn click ok');
  resultSpan.innerText = 'Hello 55688';
  resultSpan.innerText('Hello 55688');
});
cript>
```

js vs jquery

js

# HTML DOM Element innerText

[< Previous](#)[< Element Object Reference](#)

## Example

Get the inner text of an element:

```
let text = element.innerText;
```

[Try it Yourself »](#)

jq

# jQuery text() Method

◀ jQuery HTML/CSS Methods

## Example

Set text content for all <p> elements:


```
$("#button").click(function(){  
    $("p").text("Hello world!");  
});
```

[Try it Yourself »](#)

紅燈

綠燈

藍燈





```
// 2.事件 event
myBtn.addEvent (method) Console.log(...data: any[]): void
  console.log('myBtn click ok');
  resultSpan.innerText = 'Hello 55688';
  resultSpan.innerText('Hello 55688');
);
```

```
myBtn.addEventListener('click', function () {
  console.log (property) HTMLElement.innerText: string
  resultSpan.innerText = 'Hello 55688';
  resultSpan.innerText('Hello 55688');
});
cript>
```

myBtn click ok

✖ Uncaught  
TypeError: resultSpan.innerText is not a function  
at HTMLButtonElement.<anonymous> (js\_bs\_template.html:40:24)

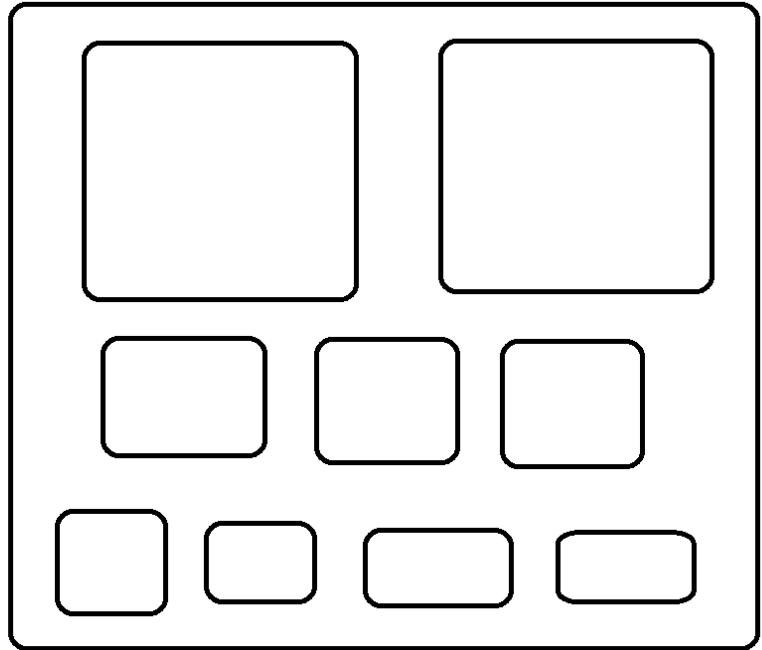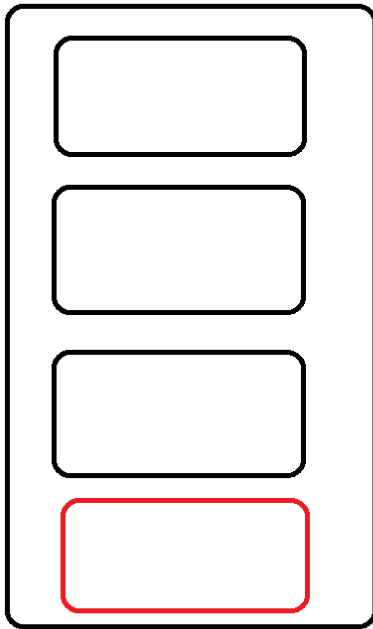

[https://www.w3schools.com/js/js\\_const.asp](https://www.w3schools.com/js/js_const.asp)

## Example

```
// You can create a constant array:  
const cars = ["Saab", "Volvo", "BMW"];  
  
// You can change an element:  
cars[0] = "Toyota";  
  
// You can add an element:  
cars.push("Audi");
```

Try it Yourself »

## Example

```
const cars = ["Saab", "Volvo", "BMW"];  
  
cars = ["Toyota", "Volvo", "Audi"];    // ERROR
```

[Try it Yourself »](#)

---