System hierarchy

One shared local foundation; native clients keep their own capabilities and permissions.

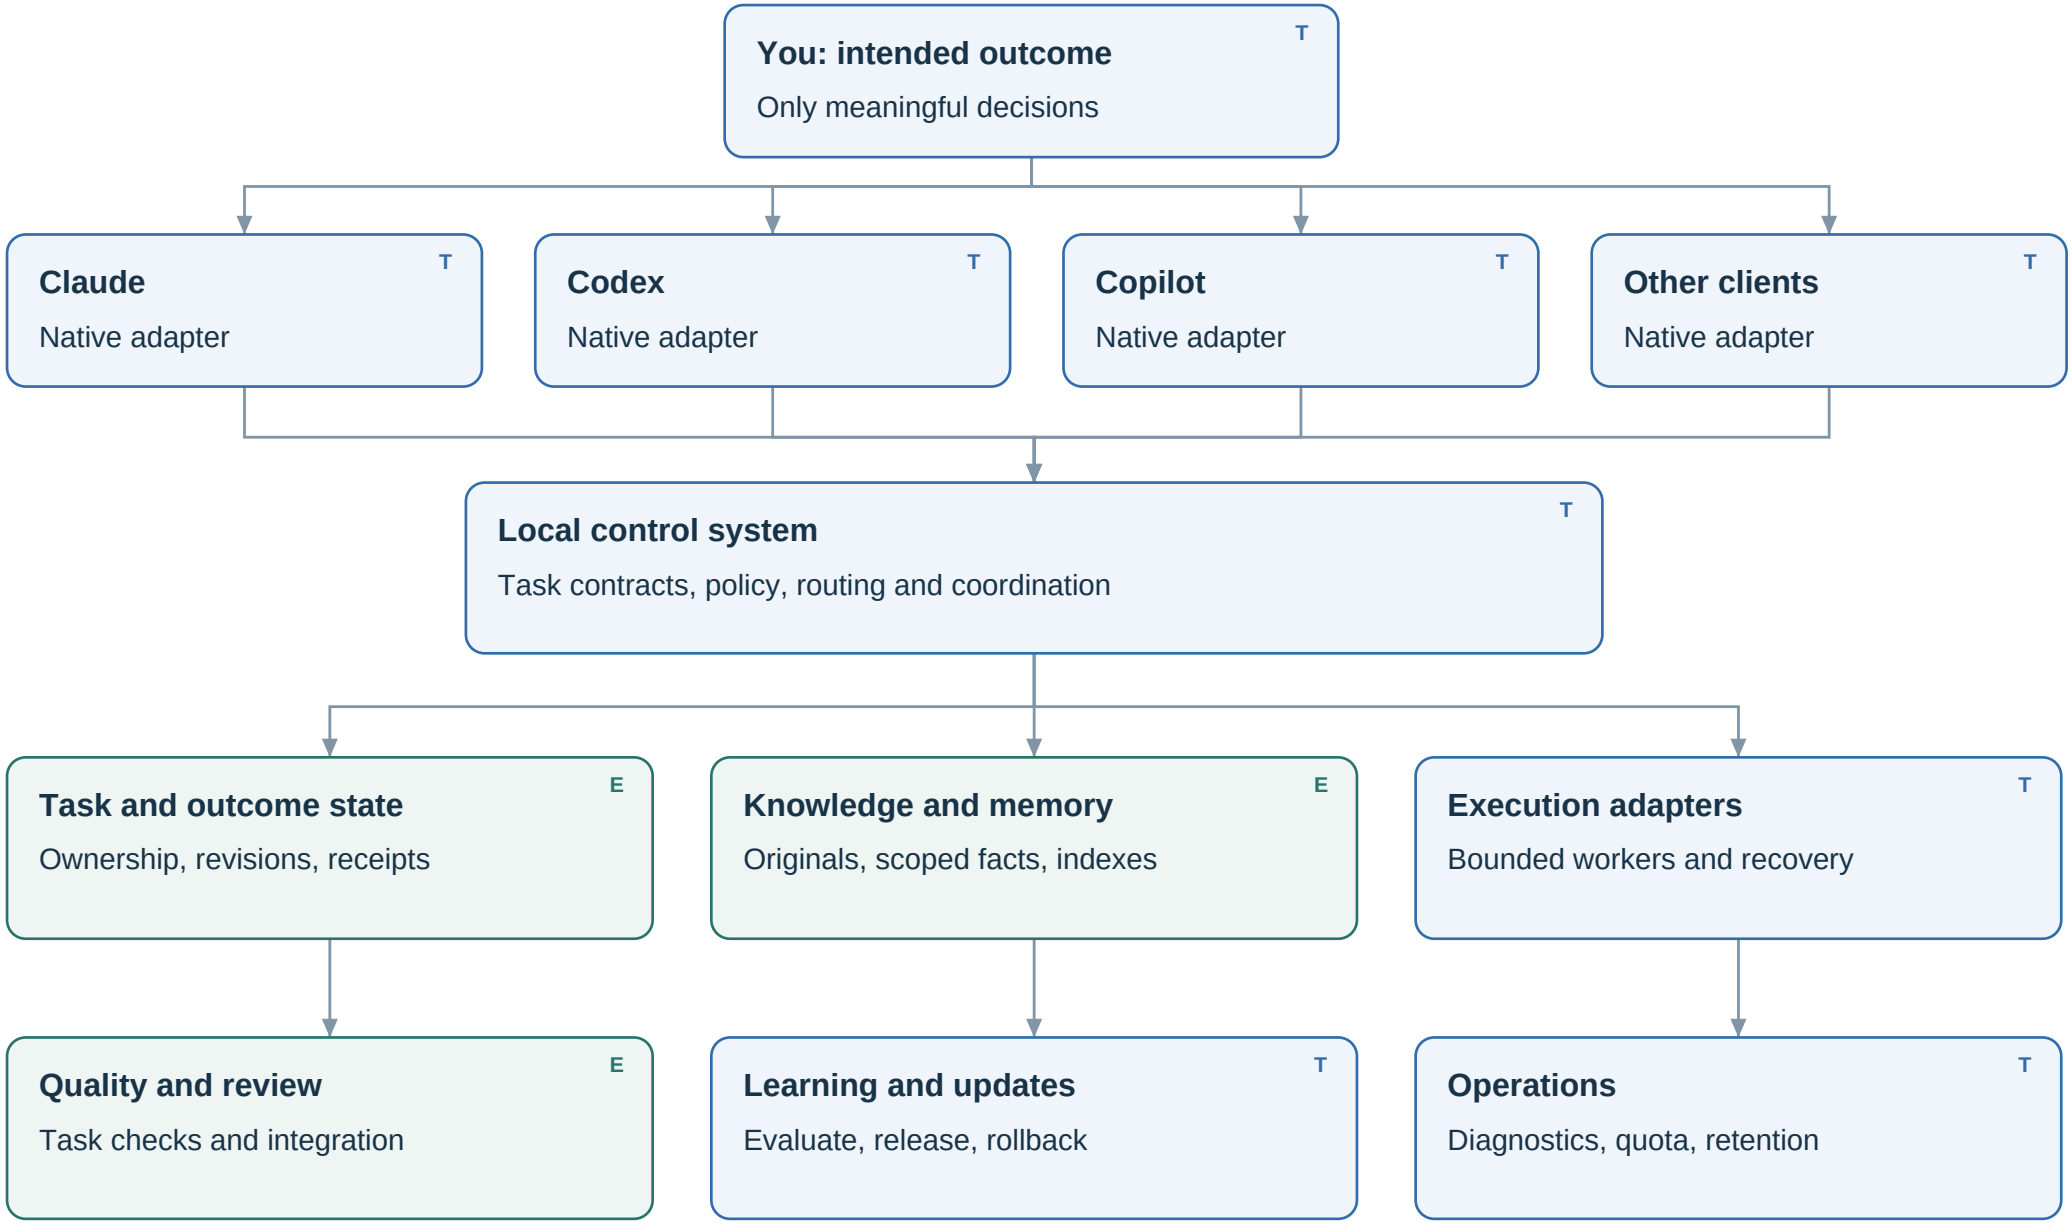

Connections show the target integration. E marks existing foundations, not fleet-wide qualification.

Adaptive task workflow

Choose an adequate path. A task does not have to visit every stage.

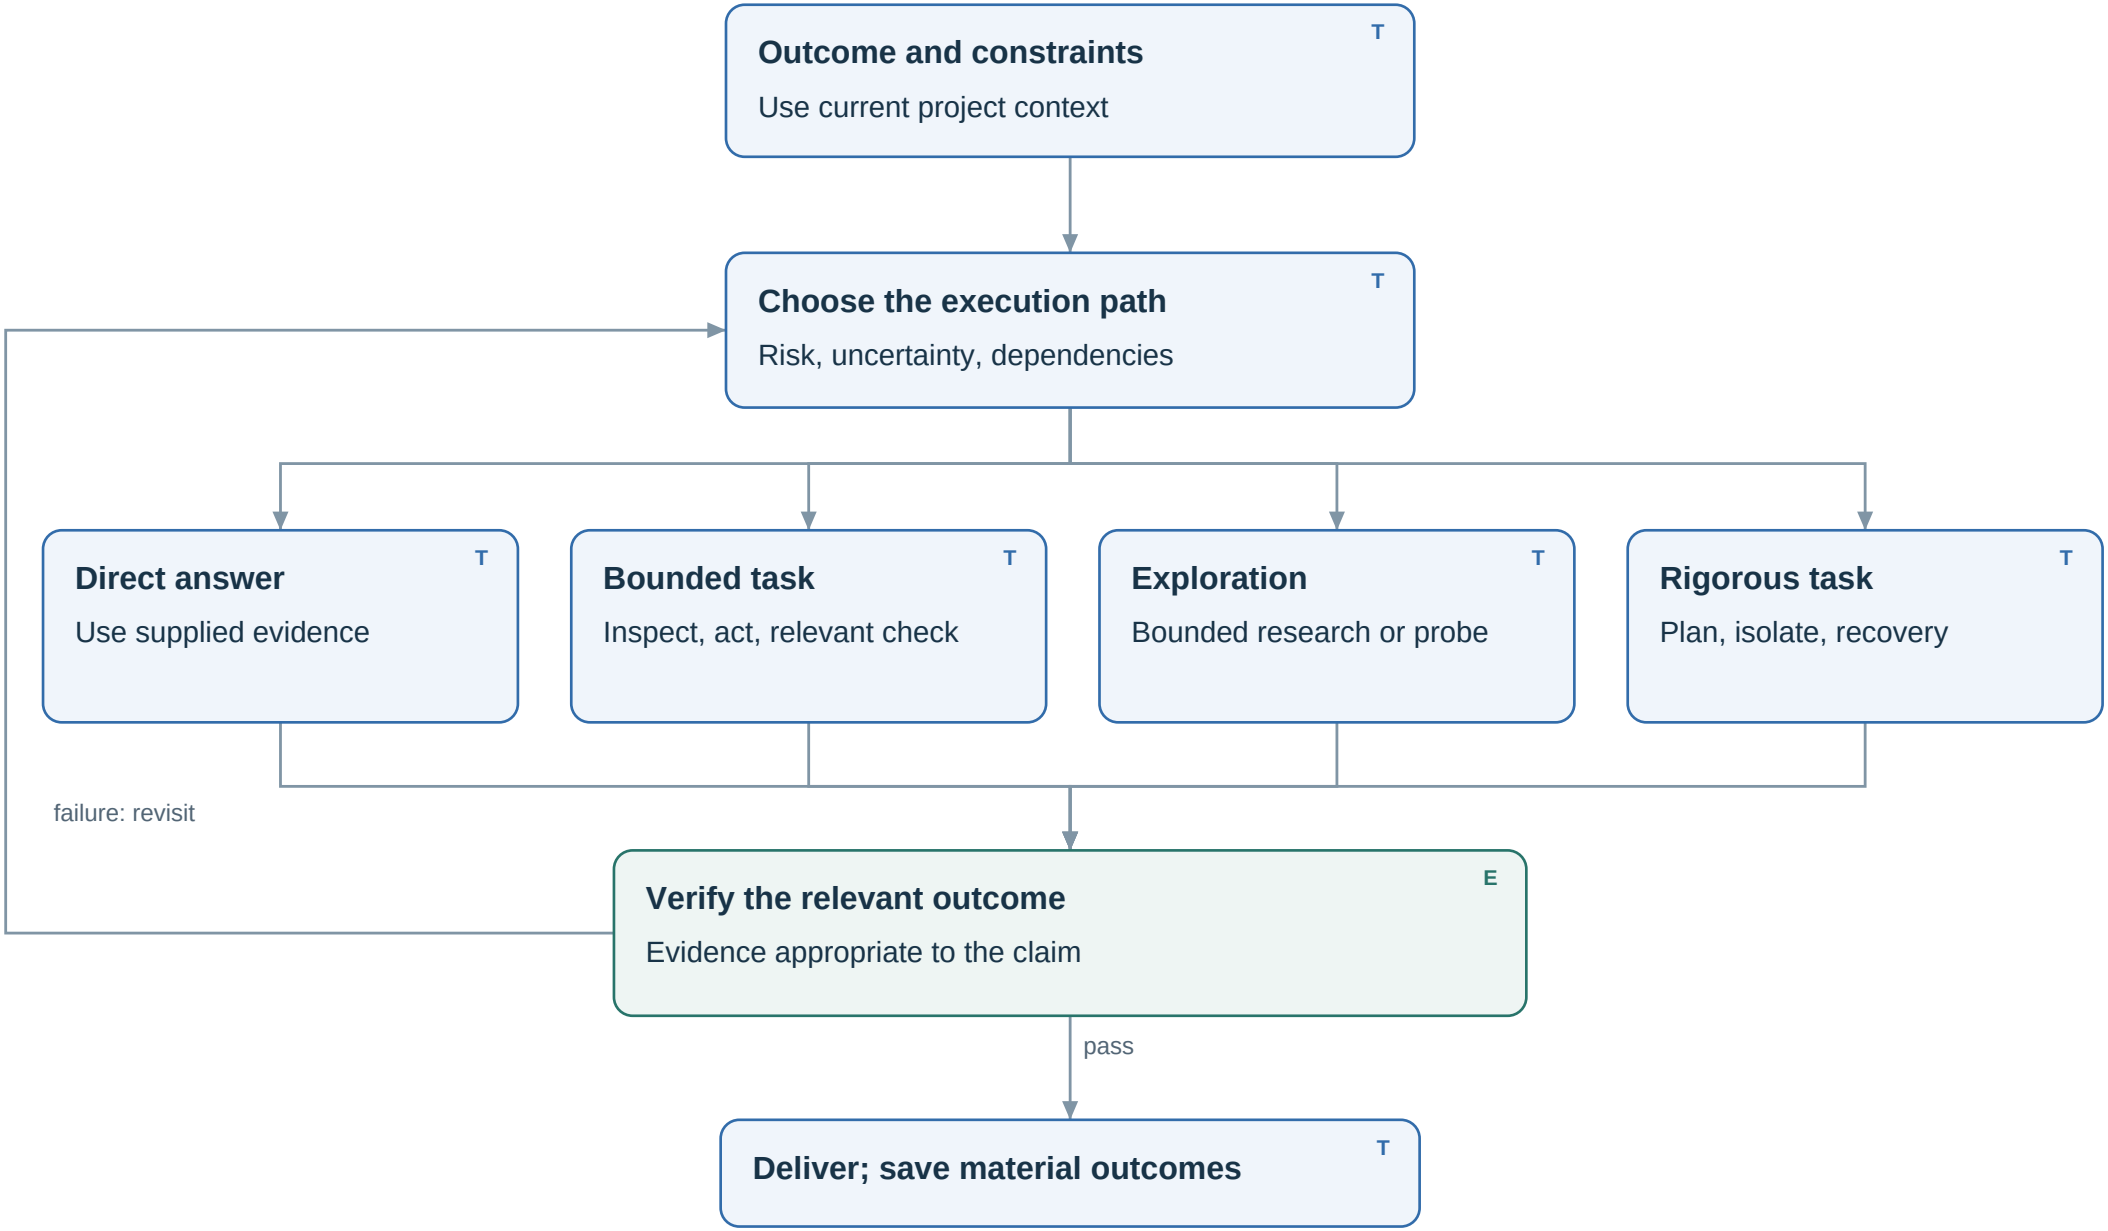

A text answer need not run code tests. Required checks and authority boundaries remain in every path.

Decision policy

Complexity and rigor are independent. Short work can still have serious consequences.

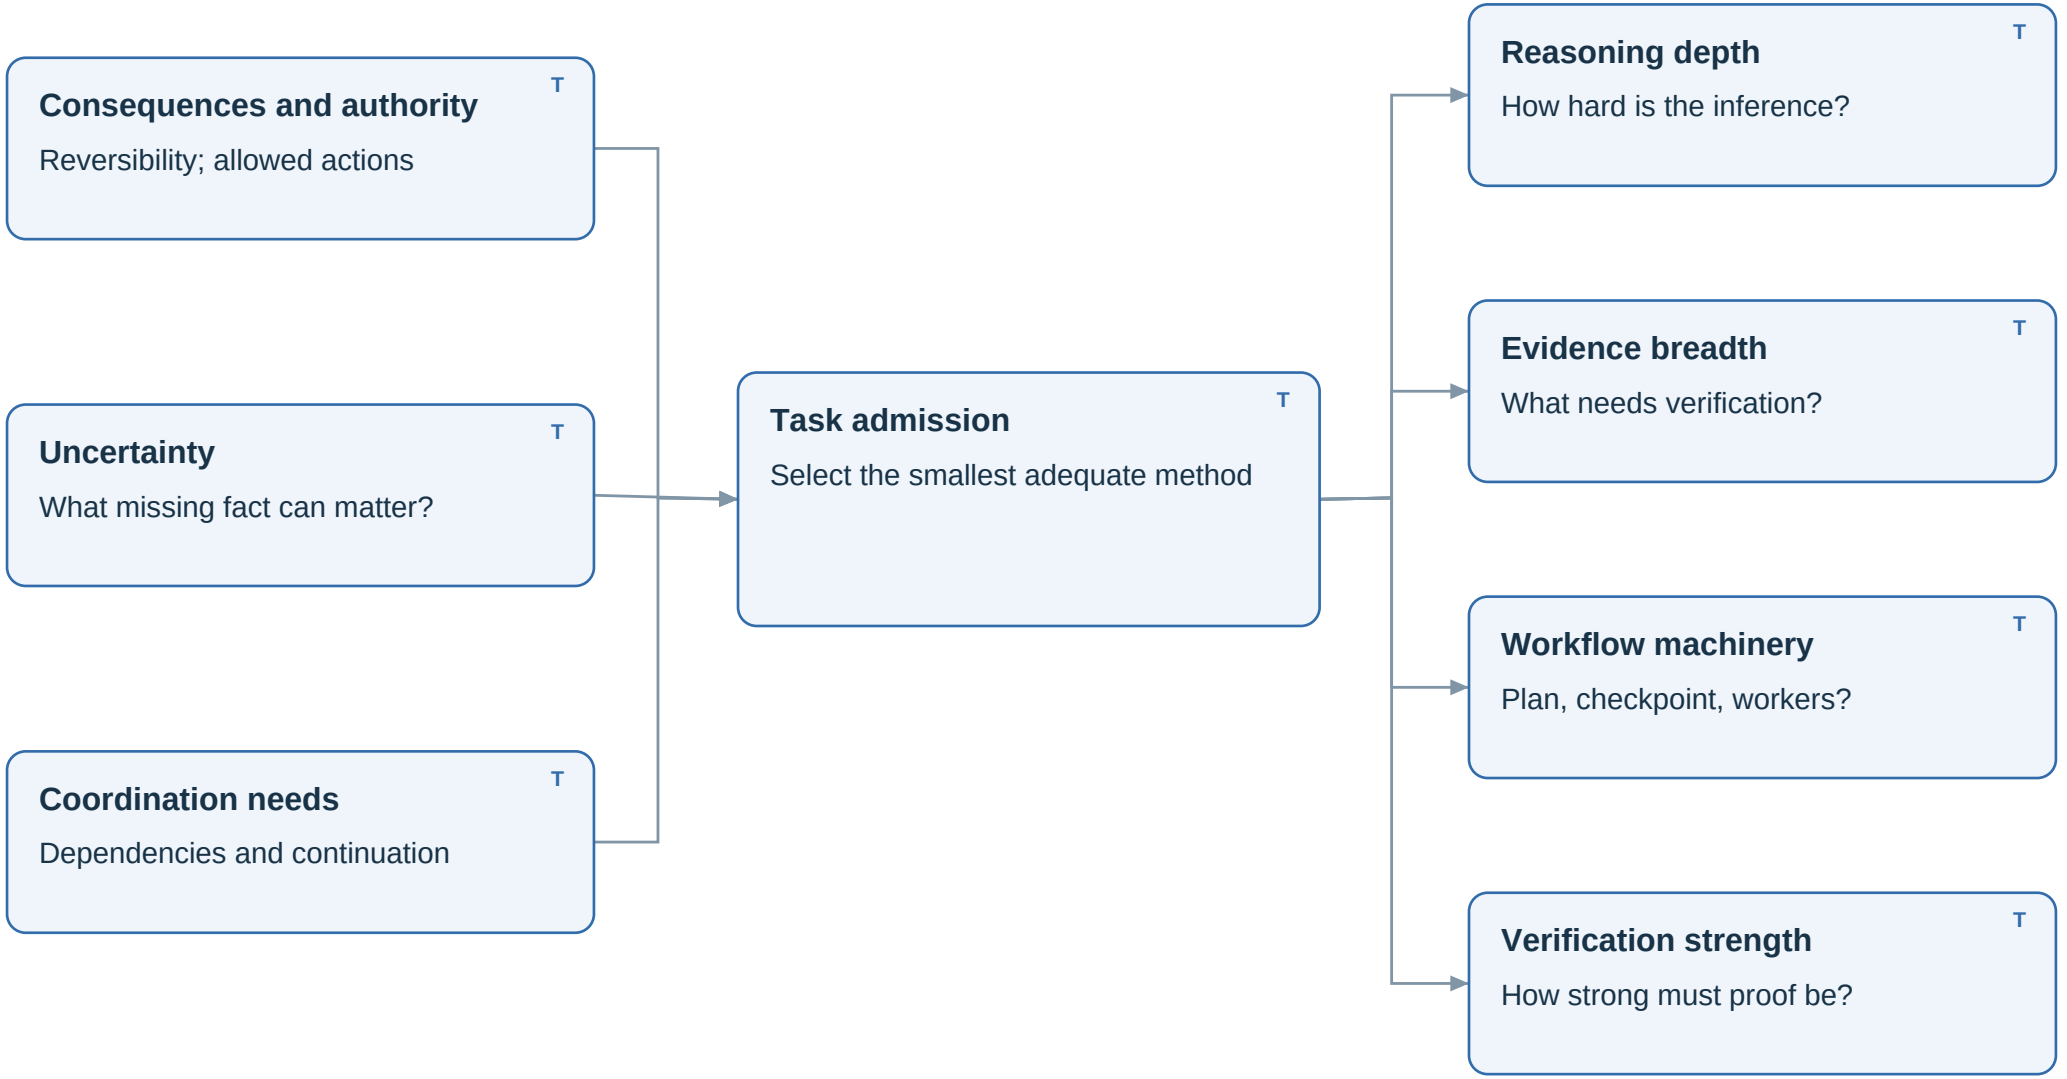

No mandatory routing-model call. Escalate on risk or evidence; stop when the required outcome is established.

Guard decision and false positives

Target policy: intentional actions have a real approval path; external restrictions remain explicit.

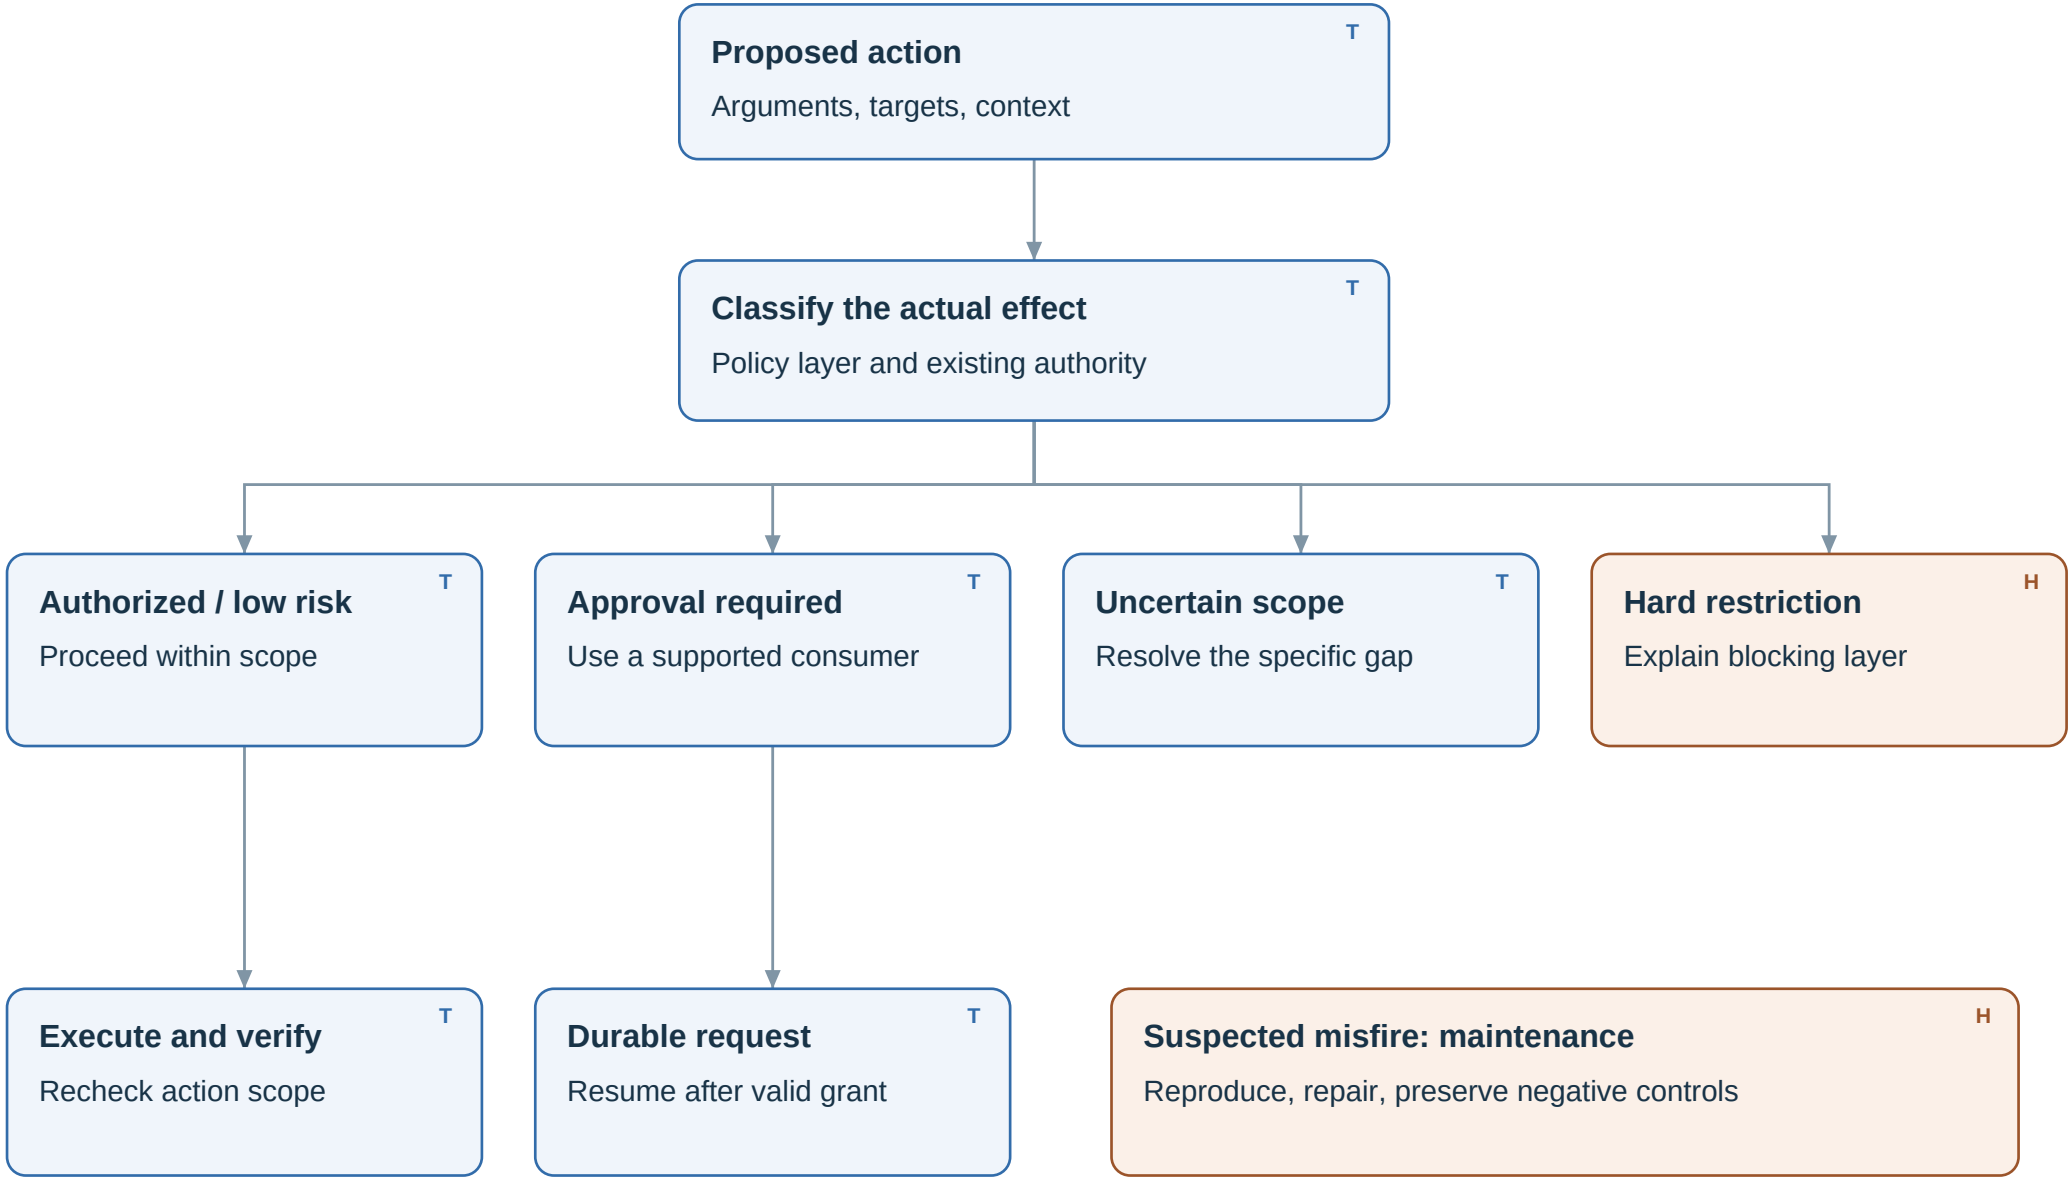

CURRENT source guard is binary allow/block. Literal-print false positives are repaired; approval integration is not qualified.

Approval while you are away

Acknowledged consent, native permission, resumed work and completion are different events.

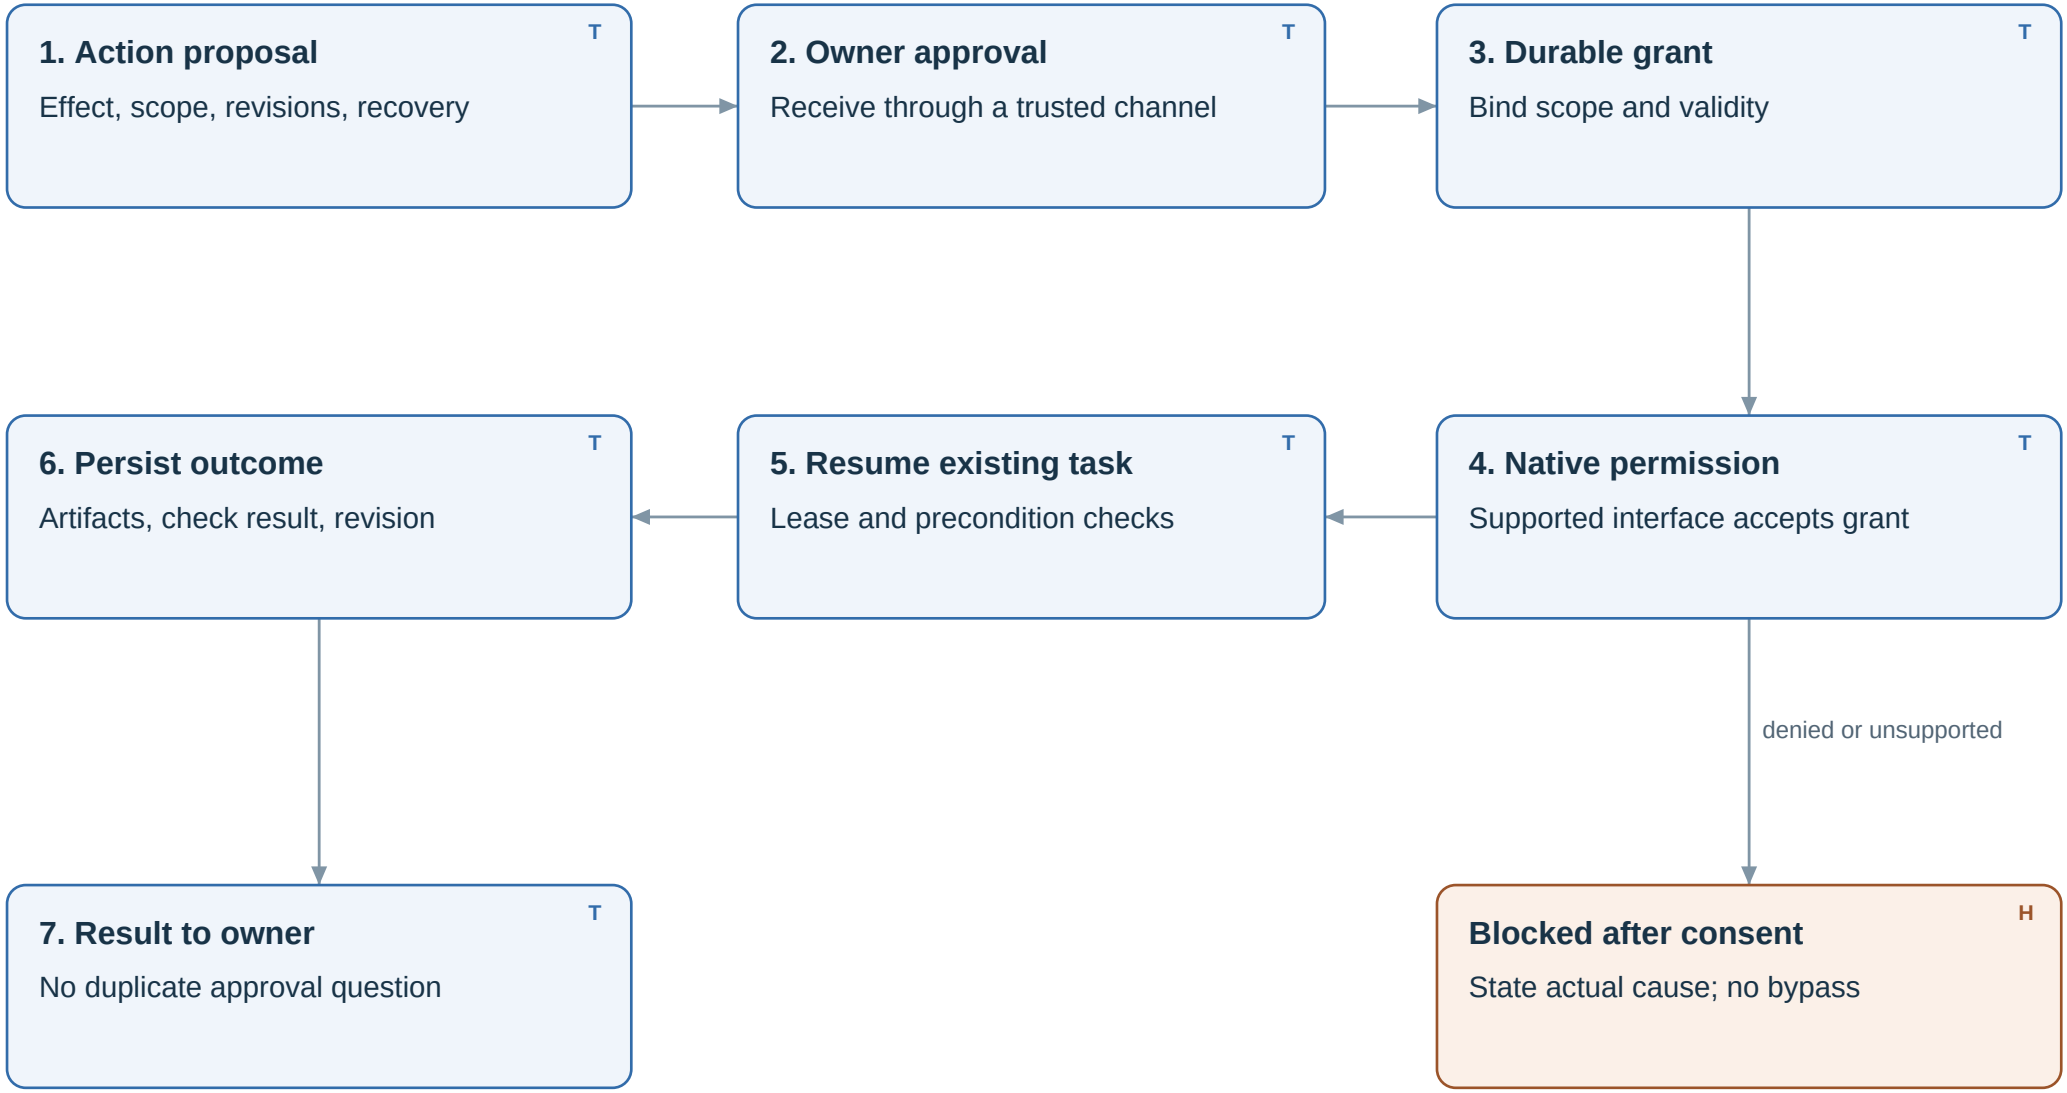

TARGET: test restart, duplicate delivery, changed targets, revocation and crash reconciliation. No live bridge is installed.

Memory retrieval and source authority

Retrieve only what can affect the task; history and generated summaries cannot grant authority.

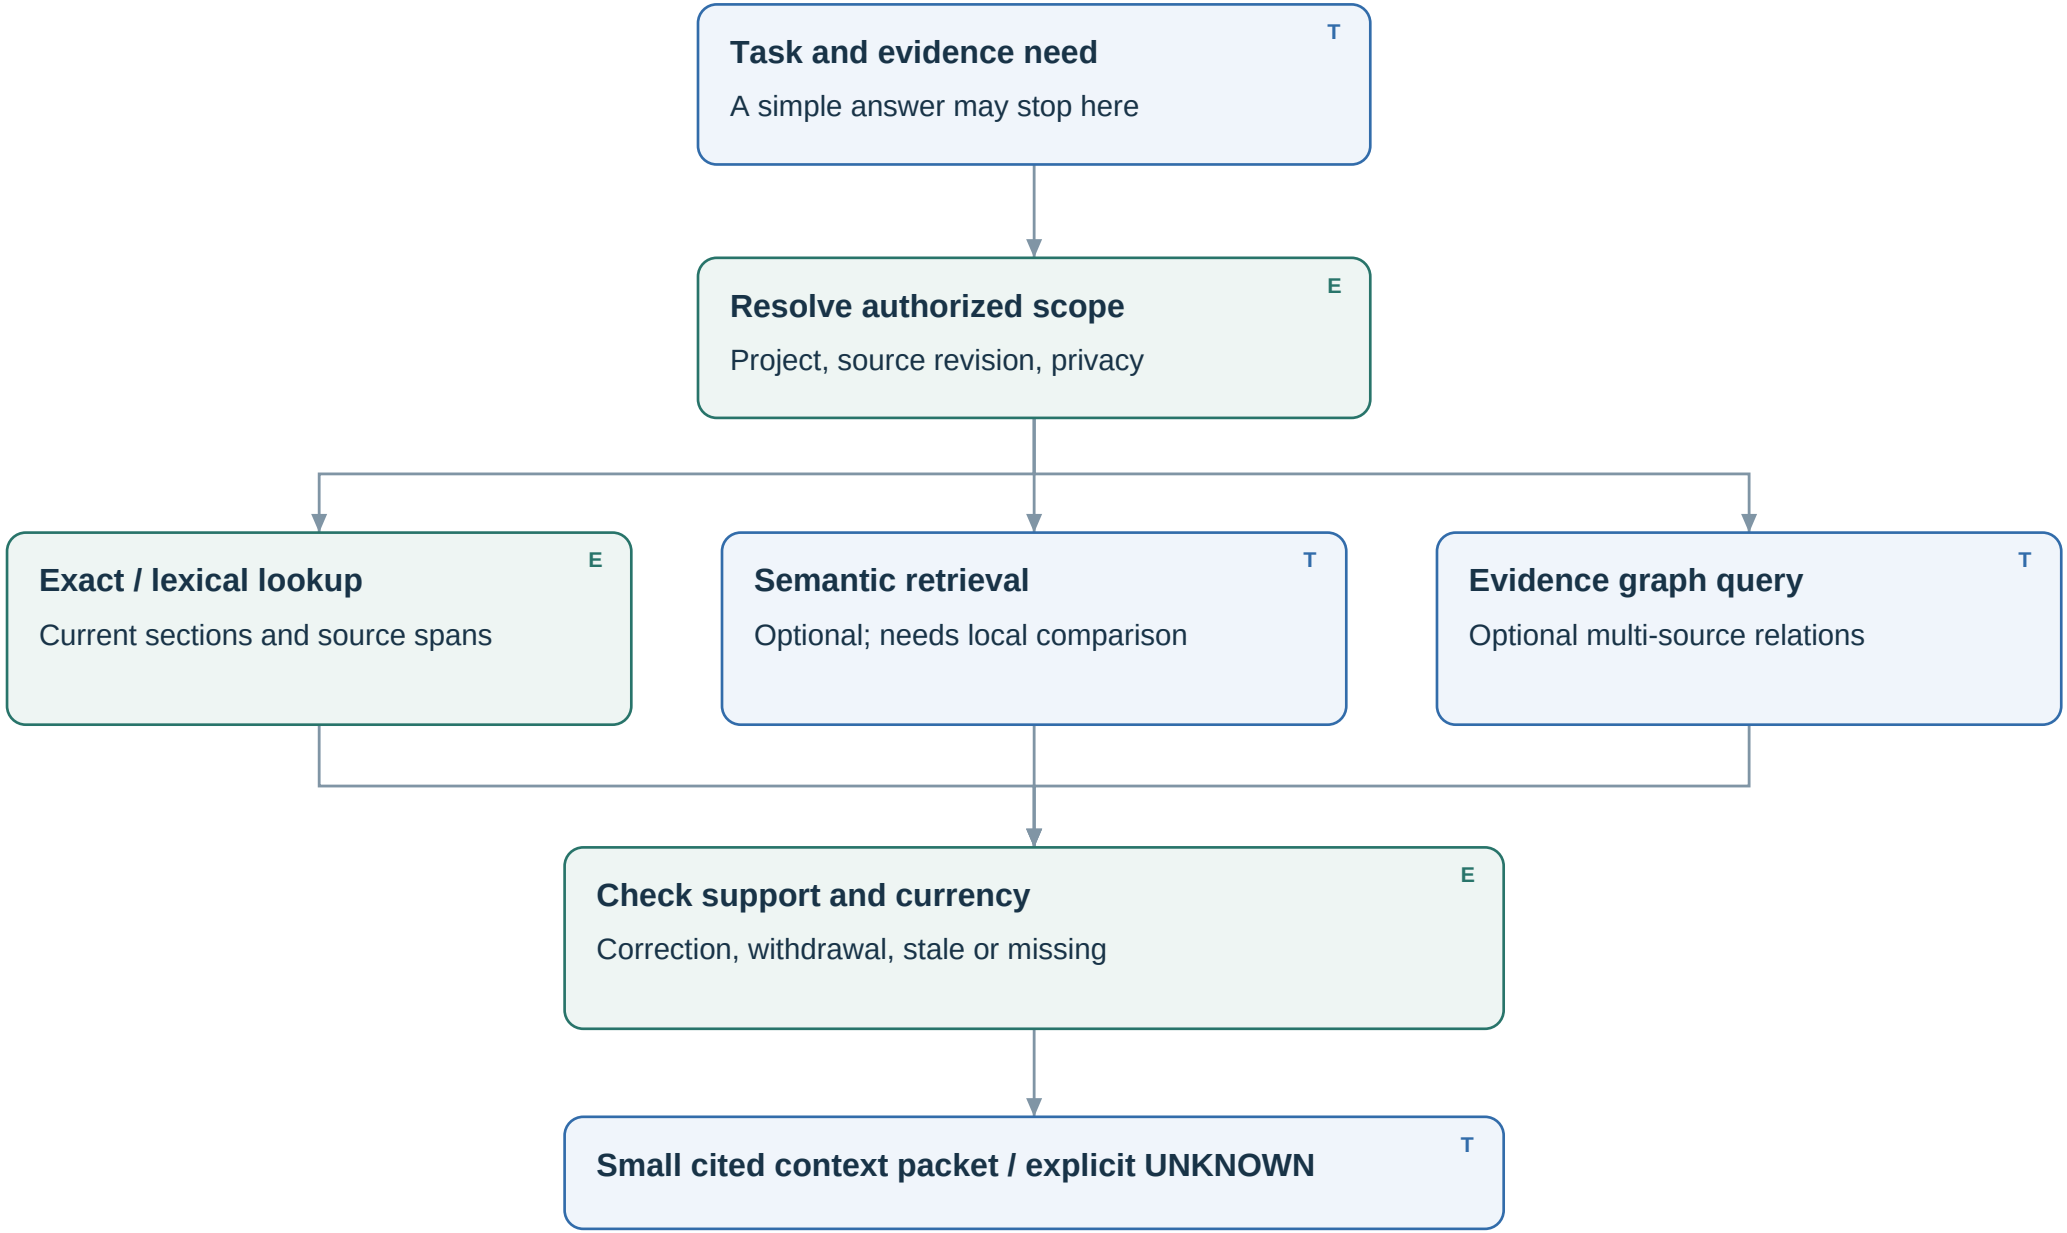

Originals and source receipts stay authoritative. Embeddings, summaries and graph views are rebuildable derivatives.

Cross-session pickup without message relays

Automatic structured outcomes replace user-written handoffs; offline clients catch up on the next read.

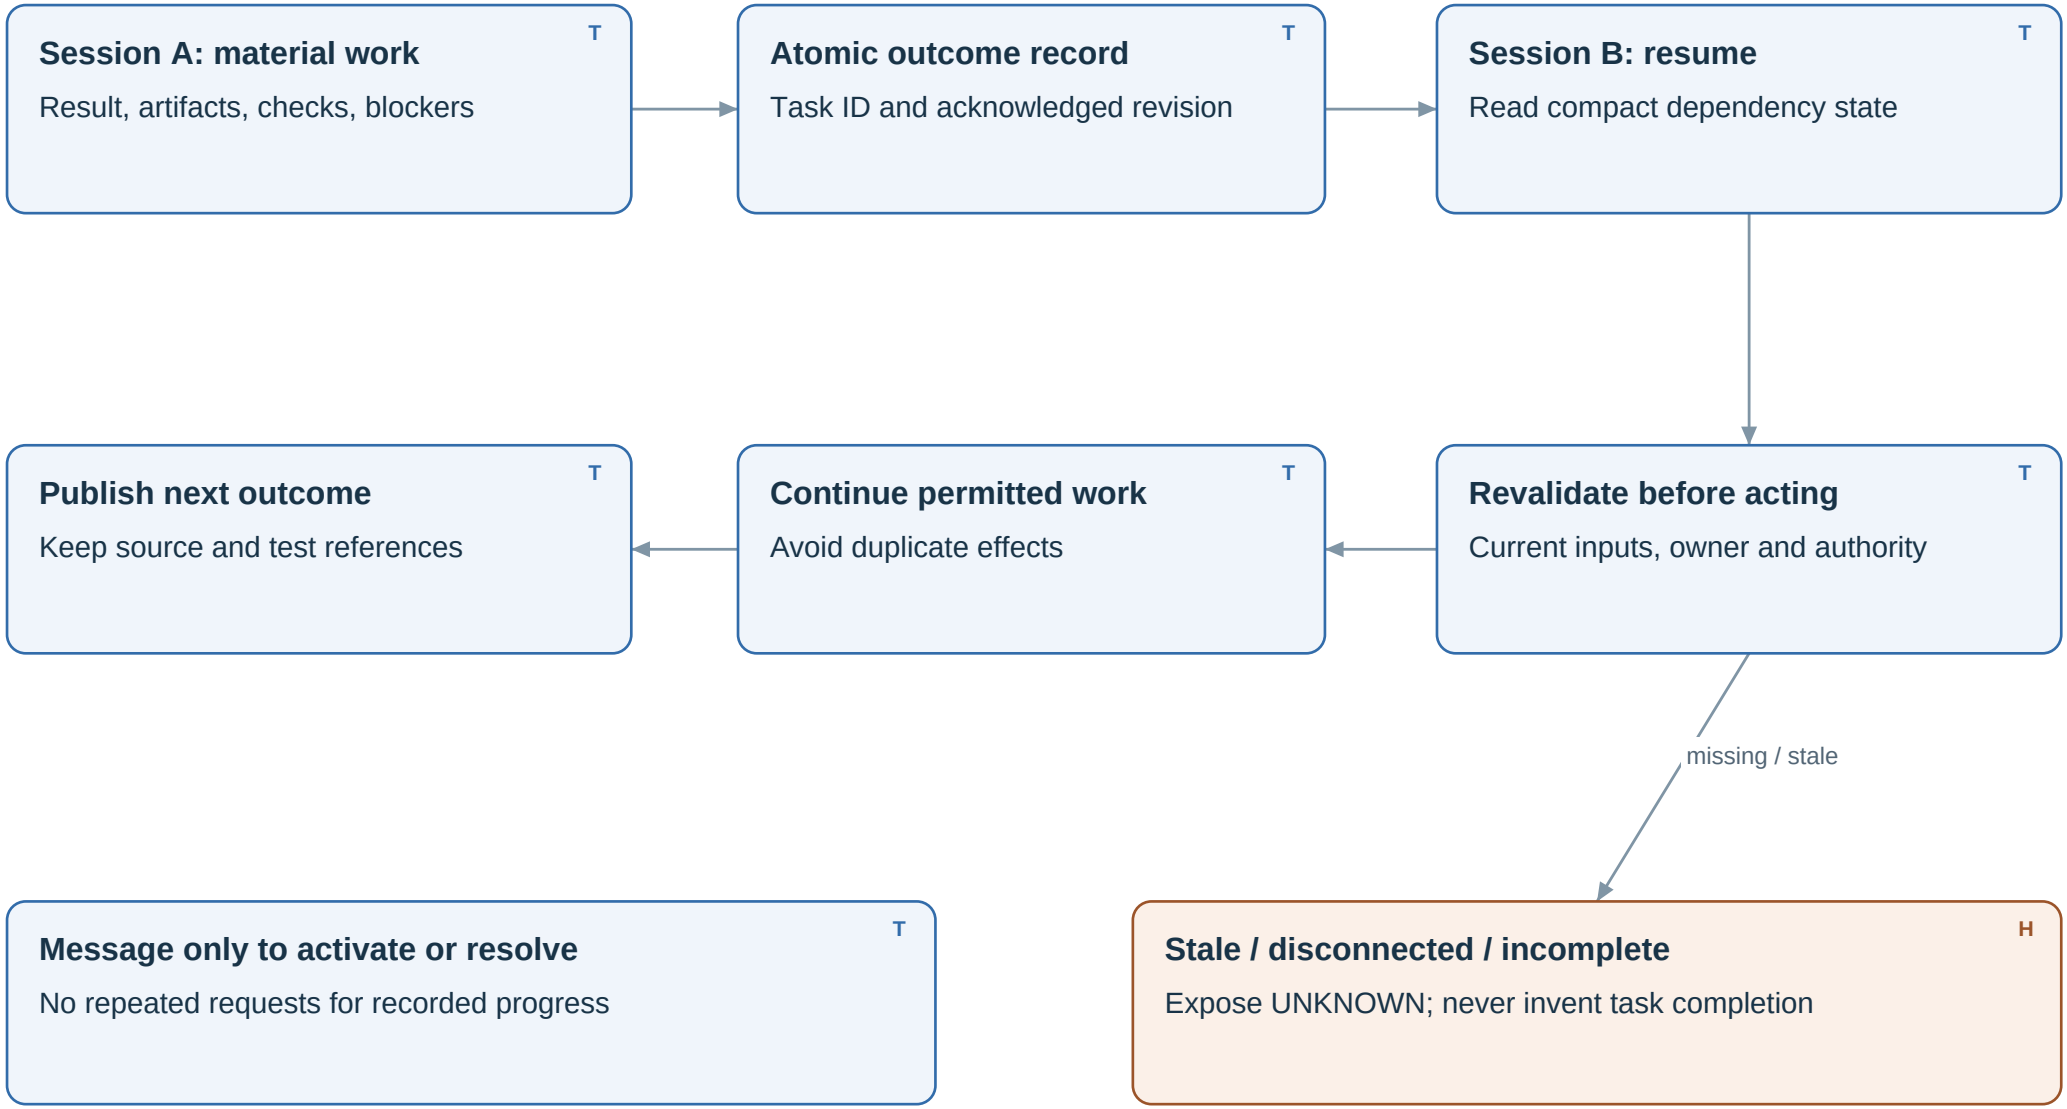

TARGET acceptance: a cold authorized session continues correctly without user recap or peer status messages.

Learning, evaluation and safe updates

Improve from trustworthy outcomes; discovery and candidate generation do not establish a benefit.

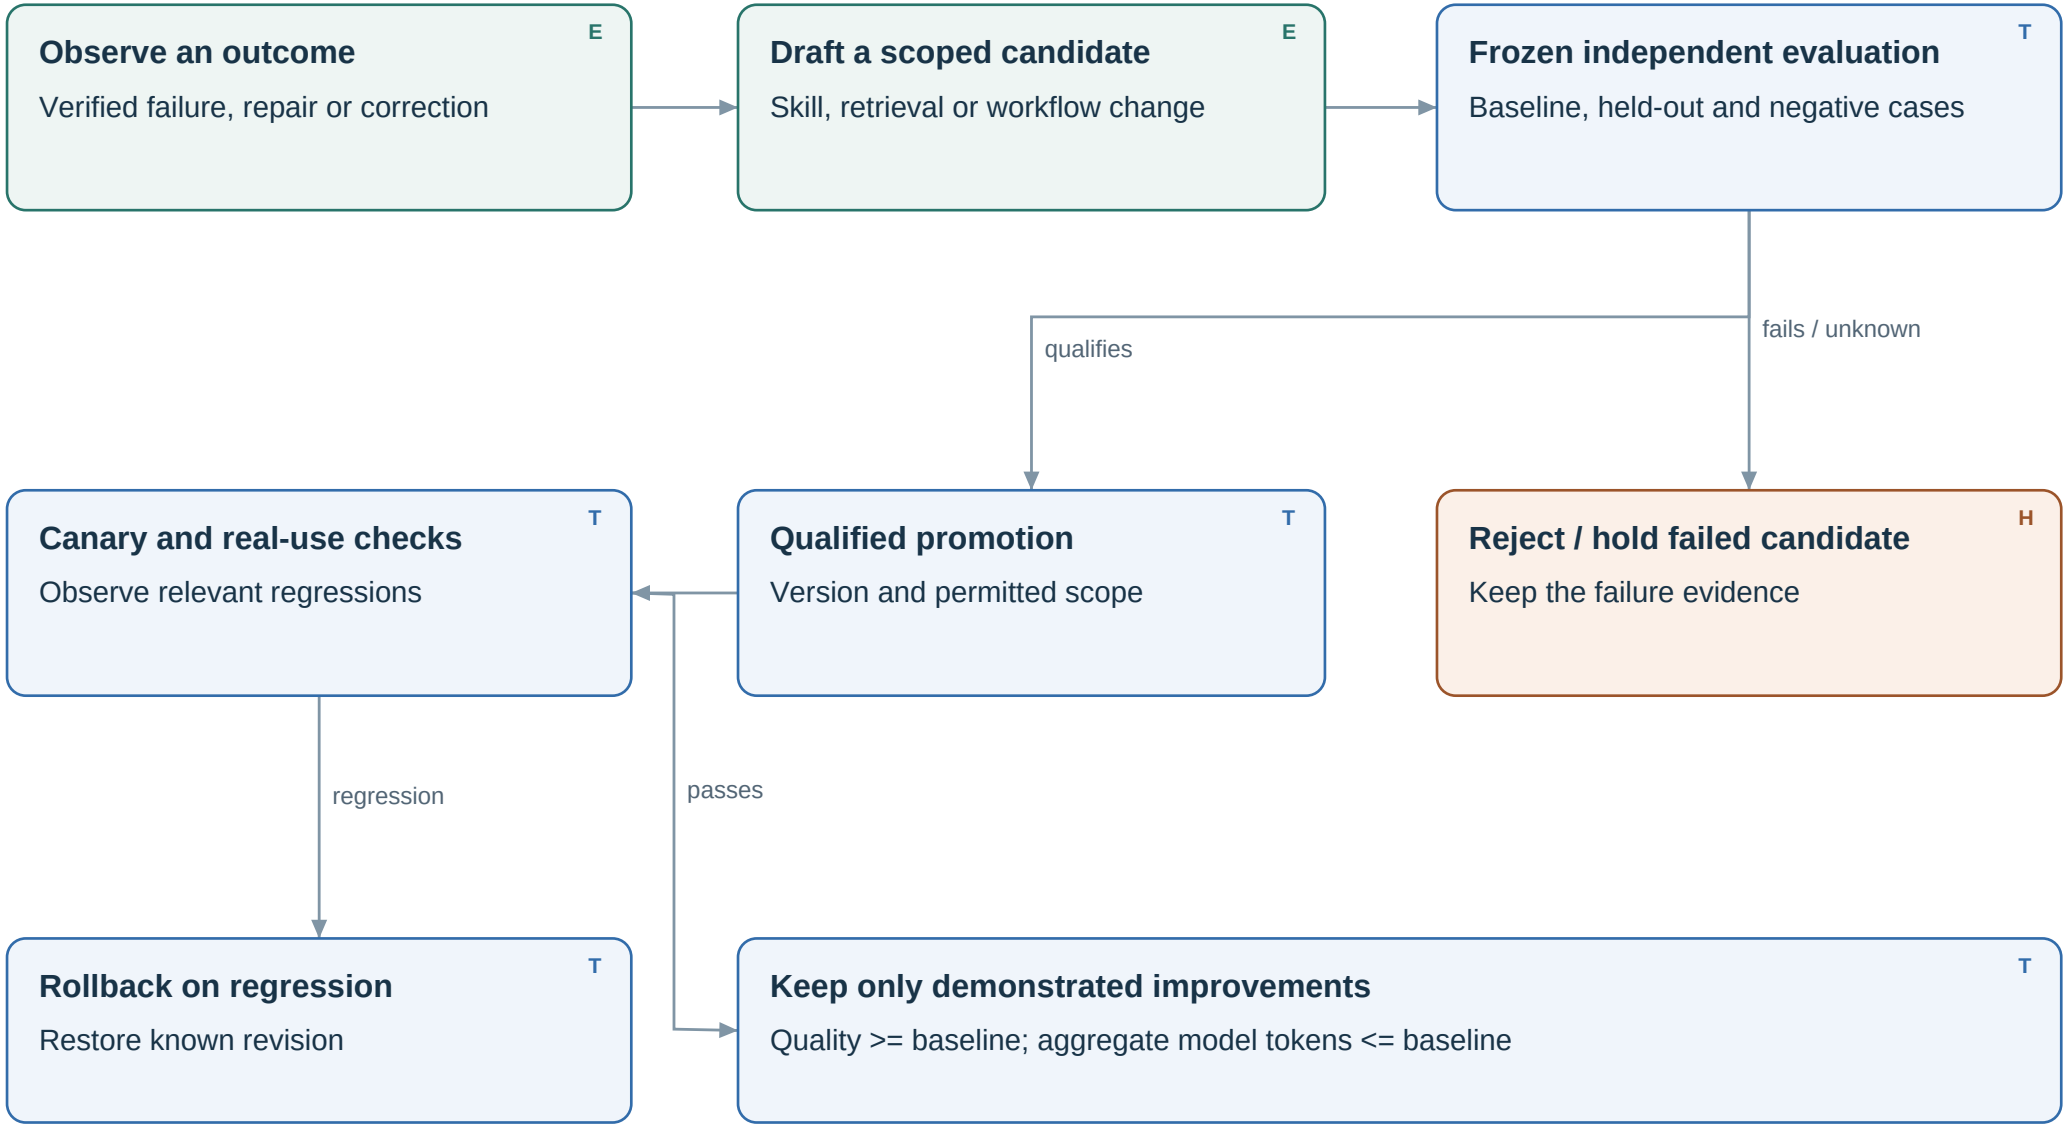

No candidate may edit its own evaluator or silently expand permissions. Broad automatic promotion remains unqualified.