

arXiv Researcher Churn Predictor

A production-grade pipeline that **predicts** which arXiv researchers will stop publishing, **explains why** through feature selection, PCA/SVD and co-authorship structure, and **acts** on it by recommending papers to re-engage at-risk authors — the academic analogue of Netflix/Spotify/LinkedIn retention systems.

Final project · Introduction to Data Science · Universidad Politécnica Taiwan–Paraguay (Informatics & Industrial Engineering, Units 8–9) · Author: Oscar Barrios

► **GitHub repository** — github.com/oscarbarr05/arxiv-churn

Public repo. The grader runs a single command: `git clone https://github.com/oscarbarr05/arxiv-churn.git && cd arxiv-churn && docker-compose up --build`, then opens `http://localhost:8000` (dashboard) or `/docs` (API). No API key, no manual steps — raw data and trained models are committed.

Headline results. 295 researchers (cs.CL), churn rate **18.6%**. Leakage-free temporal label. Consensus selection → 8 features. RandomForest 5-fold CV: **F1 0.65 / accuracy 88%** (original features), rising to **F1 0.68** when co-authorship centralities are added. SVD recommender (84% variance) gated at churn probability ≥ 0.5 . Fully Dockerized with an interactive dashboard (PCA 2D/3D, SVD space, importance, network).

1. Executive summary — the three jobs

- 1. **Predict** — a RandomForest scores each researcher's probability of going silent, served at `POST /predict`.
- 2. **Explain** — four feature-selection methods agree that **recency** dominates; PCA/SVD compress the signal; a co-authorship network shows isolated researchers churn more.
- 3. **Act** — an SVD collaborative filter recommends recent papers by active authors, but **only for at-risk researchers** (probability ≥ 0.5).

The guiding principle of the unit — “**better features beat better algorithms**” — is the thread through every section: a plain RandomForest on well-engineered temporal features outperforms anything fancier on raw fields.

2. How the deliverables map to the grading rubric

Rubric component	Weight	Where / evidence
Docker setup works (<code>docker-compose up</code>)	15–30%	§9. One command from a clean clone; robust pip (timeout/retries), runtime-only deps.
Data collection & churn label (justified threshold, balanced classes)	15%	§3, §4. Two-stage scraper; leakage-free 2024-06-30 cutoff; 18.6% balance + <code>class_weight</code> .
Feature generation (creativity, domain logic, 8+ features)	20%	§5. 14 features in 4 families (ratio / time / aggregation / binary).

All 4 selection methods + comparison table	25%	§6. Filter / RFE / DecisionTree / RandomForest + consensus table + 5-fold CV.
Working /predict (valid churn + probability)	15%	§8. Pydantic input → {churned, churn_probability}.
PCA elbow + 2D scatter colored by churn	10%	§7 & Figures A–B.
SVD decomposition + working /recommend	20%	§7, §10 & Figure C. Gated at prob ≥ 0.5.
Network graph (networkx) + centrality features in model	15%	§11 & Figure E. degree / betweenness / PageRank.
Updated feature-selection table incl. network features	10%	§11. 4 methods re-run with centralities.
Report: model comparison + recommendation logic + PM reflection	15%	§12, §10, §15.
Original 8-step deliverables	30%	§3–§9 (mapped in §16).

3. Data collection — two stages (`scraper.py`)

Source: the public **arXiv API** (no key, no login). Collection is split so the churn label reflects *real* activity, not a sampling artifact:

1. **Sampling frame** — 100 papers/quarter, 2014–2025, category `cs.CL` (~4 800 papers). Sampling across *all* years avoids the “recent papers only” bias that would exclude churned researchers entirely.
2. **Full histories** — for every researcher appearing $\geq 2\times$ in the frame, one `au: "Name"` query fetches their complete record (20 333 author-paper rows).

Engineering decisions. Rate-limited at **3 s/request** (arXiv terms of use); missing fields read defensively with `.get()` ; pagination via `start` ; network errors retried once. Raw output saved to `data/raw/` and committed so the build needs no network.

4. Churn label — definition & why it is leakage-free

Definition. A researcher has **churned** if they submitted **no arXiv paper after the cutoff date 2024-06-30** (≈ 2 years of silence at evaluation time).

A naïve `days_inactive > 180` label computed “today” would leak recency into *both* the label and the features, inflating every metric. Instead we **split time itself**:

- **Features** are computed only from papers **up to the cutoff** (recency is measured *at* the cutoff, so it is a legal predictor).
- **The label** looks only at activity **after** the cutoff.

This mirrors production churn systems: observe behaviour up to “today”, predict inactivity over the next window. Two years fits academia's rhythm (active `cs.CL` authors publish with median gaps well under a year, verified in the notebook).

Class balance. 18.6% churned (55 churned / 240 active) — comfortably above the $\sim 10\%$ danger zone. Eligibility filters: ≥ 3 pre-cutoff papers and ≥ 1 year of history. Every model also uses `class_weight="balanced"` as a second guard.

5. Feature engineering — the most important step (`features.py`)

No raw API field is used directly. 14 engineered features span the four required families and cover recency / frequency / magnitude:

Feature	Family	Why it predicts churn
<code>recency_days_at_cutoff</code>	time · recency	#1 churn signal: silence already growing at the cutoff
<code>recent_share_2y</code>	time · momentum	share of output in the last 2 pre-cutoff years; fading momentum precedes exit
<code>papers_per_year</code>	time · frequency	low cadence = weak attachment to the field

avg_gap_days / max_gap_days	time / aggregation	habitual & worst silence; past breaks predict future breaks
solo_ratio / is_solo_researcher	ratio / binary	isolation — solo authors lack collaborator “pull”
first_author_ratio	ratio	first authors are often students/postdocs — high-attrition population
categories_per_paper / n_categories / is_multidisciplinary	ratio / agg / binary	topical breadth; diversified researchers have more reasons to stay
avg_coauthors	aggregation · magnitude	team size proxies lab/network support
career_years	aggregation	seniority; veterans behave differently from newcomers
has_long_break	binary	ever silent > 1.5 yr before the cutoff — relapse risk

6. Feature selection — all four methods + comparison

Run in the notebook and shared with production via `model.py::consensus_selection` (notebook and API cannot drift apart):

1. **Filter** — variance threshold, correlation pruning ($|r| > 0.9$), ANOVA F-test.
2. **Wrapper** — RFE over LogisticRegression, top 5.
3. **Embedded** — DecisionTree importances (`max_depth=5`).
4. **Embedded** — RandomForest importances (`n_estimators=100`).

Feature	ANOVA rank	RFE	DT rank	RF rank	Decision
recency_days_at_cutoff	1	✓	1	1	KEEP
recent_share_2y	2	✓	7	2	KEEP
avg_gap_days	5	✓	3	3	KEEP
n_categories	3	✓	4	4	KEEP
papers_per_year	10	✓	2	5	KEEP
career_years	12	—	5	6	KEEP
categories_per_paper	6	—	10	8	KEEP
solo_ratio	8	—	6	11	KEEP
is_multidisciplinary	4	—	10	13	DROP
is_solo_researcher	—	—	—	—	DROP (constant)

Reading the disagreements. `papers_per_year` is ranked 10th by ANOVA (which scores features in isolation) yet selected by RFE and top-5 by both trees — its signal only appears *in combination*, exactly what filters miss. `is_multidisciplinary` is the mirror image: ANOVA ranks it 4th but RF last, because given `n_categories` it is redundant. When the single tree and the forest disagree, we trust the **average of 100 trees** over one greedy tree.

Final set (8): recency_days_at_cutoff, recent_share_2y, avg_gap_days, n_categories, papers_per_year, career_years, categories_per_paper, solo_ratio. Validated by 5-fold stratified CV — **accuracy 0.885, precision 0.746, recall 0.582, F1 0.652.**

7. Dimensionality reduction — PCA & SVD

The four methods *select* existing features; PCA/SVD **create new compressed ones**. PCA on standardized features $\approx$ SVD of the covariance matrix.

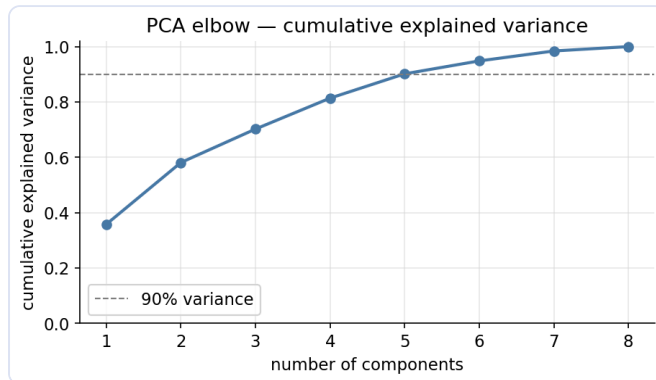


Figure A. PCA elbow — cumulative explained variance. 2 components $\approx$ 58%, 3 $\approx$ 70%.

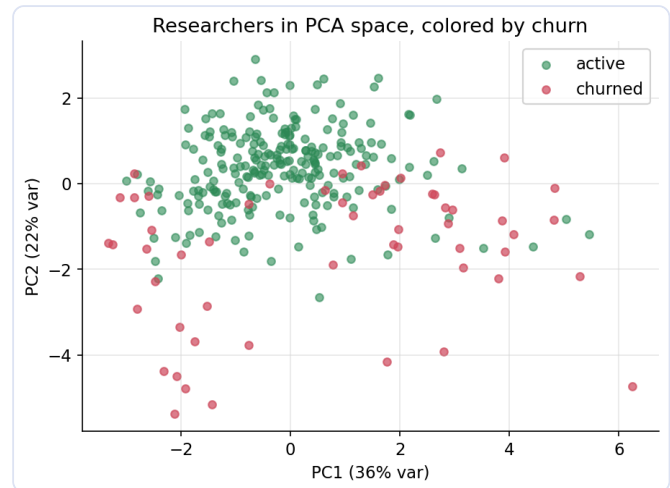


Figure B. Researchers in PCA space colored by churn. Visible red/green separation along PC1 (recency) = strong features.

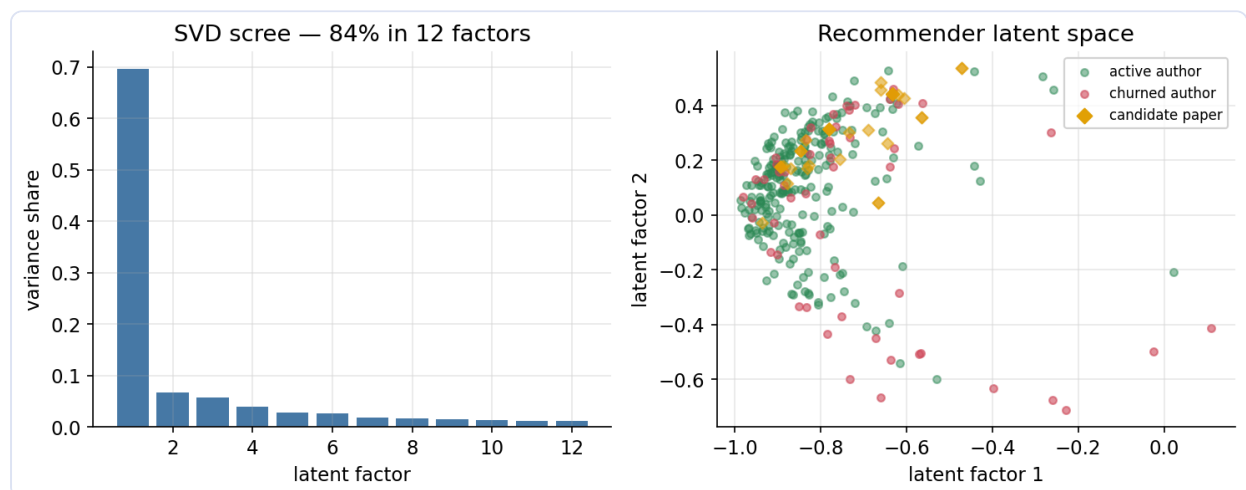


Figure C. Truncated SVD of the researcher $\times$ category matrix (`scipy.sparse.linalg.svds` , `k=12` , 84% variance). Left: scree. Right: authors (circles) and candidate papers (gold) in the recommender's latent space.

PCA as inputs vs originals. Training on 3 PCA components costs **0.115 F1** (0.537 vs 0.652) and drops recall from 0.582 to 0.473: PCA compresses for *variance*, not *churn discrimination*. It earns its keep as **explanation** (Figures A–B), not as the production feature set.

8. Train & serve (`model.py` , `main.py`)

Final model: **RandomForest** (`n_estimators=300` , `class_weight="balanced"` , `random_state=42`), saved with `joblib` and **loaded once at startup**. `main.py` is thin — endpoints only. Endpoints:

- `POST /predict` — Pydantic input $\rightarrow$ `{"churned": bool, "churn_probability": float}`. The 8 model features are required; the other engineered features are optional extras.

- `GET /health` → `{"status":"ok"}`.
- `GET /features` — self-documents the expected fields, churn definition and CV metrics.
- `GET /authors` , `POST /recommend` — see §10.

9. Docker — one command from a clean clone

`Dockerfile` : `python:3.11-slim` , requirements copied *before* code (layer caching), `uvicorn` on port 8000.
`docker-compose.yml` : one `churn-api` service, ports `8000:8000` , `./data` mounted.

Robustness decisions. `pip` runs with `--timeout=120 --retries=10 --prefer-binary` so the build survives slow networks; the image installs a **runtime-only** `requirements-docker.txt` (no `matplotlib` — only the notebook needs it), cutting ~8.5 MB and 6 wheels. `model.pkl` , `recommender.pkl` , `viz.json` and the raw CSVs are committed, so the container works offline on first run.

10. Recommendation engine (`recommender.py` , `/recommend`)

The researcher×category interaction matrix is factorized with truncated SVD ($k=12$, 84% variance). An at-risk researcher and every candidate paper live in the same latent space; `/recommend` returns the most cosine-similar **recent papers by still-active authors**, never the researcher's own work.

Business rule. Recommendations are returned **only when churn probability ≥ 0.5** ; engaged researchers get a “not at risk” message. Re-engagement budget belongs on the at-risk segment.

11. Network analysis as feature enrichment

A co-authorship graph (**networkx**) is built where an edge means two researchers share a pre-cutoff paper. **degree**, **betweenness** and **PageRank** centralities become new features, and all four selection methods are re-run with them included.

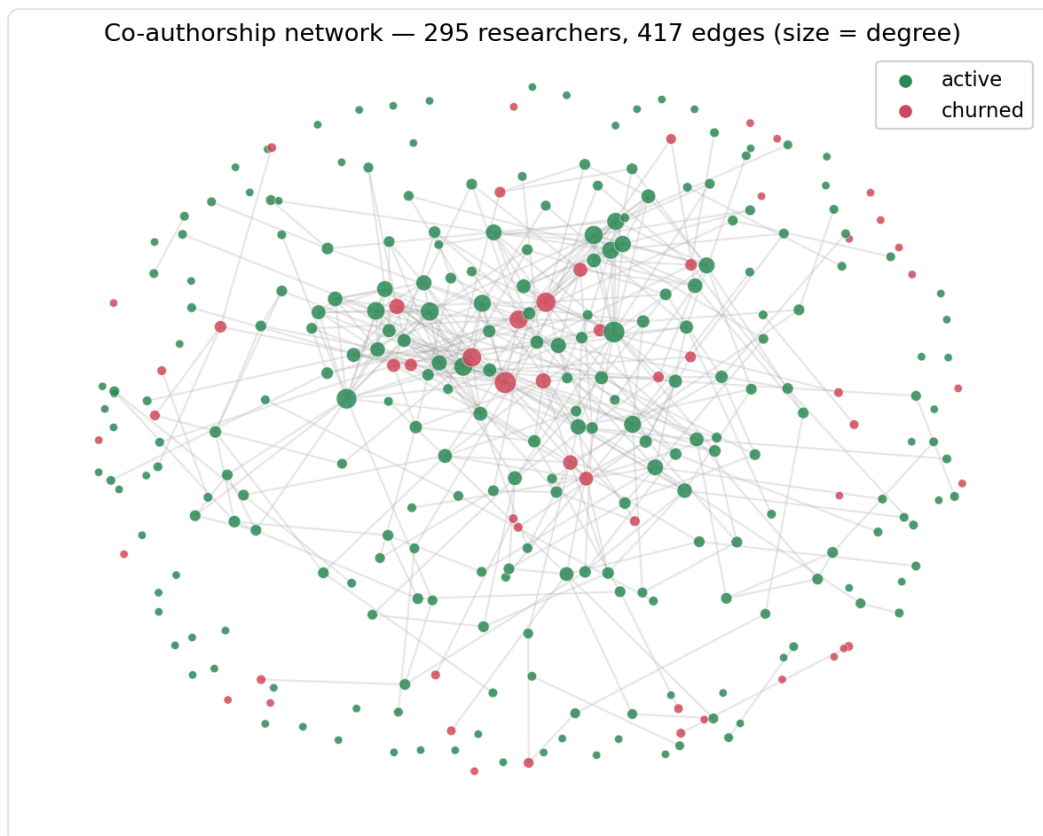


Figure D. Co-authorship network — 295 researchers, 417 edges (node size = degree). Isolated, low-degree nodes skew red.

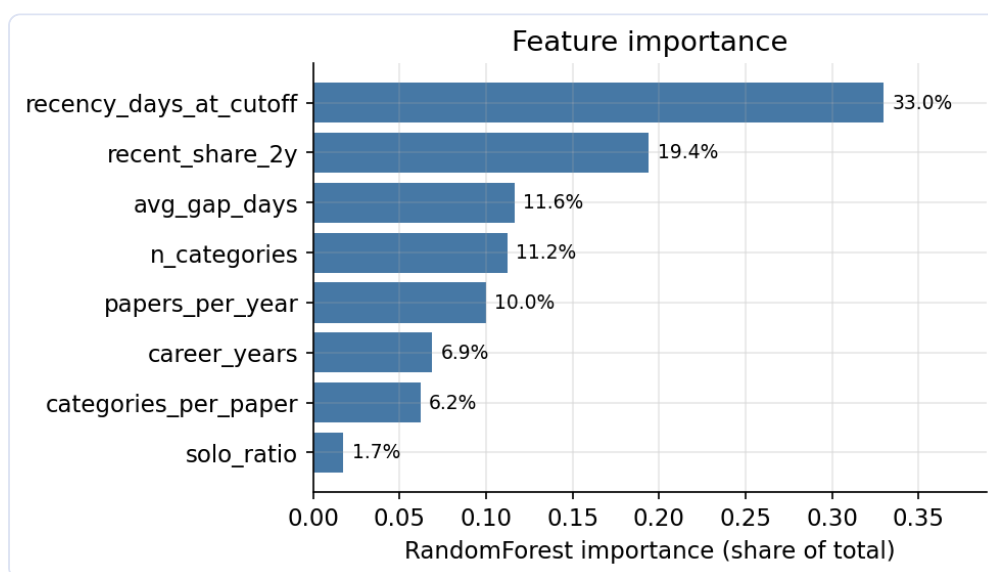


Figure E. RandomForest feature importance — recency (33%) and recent-output share (19%) dominate.

Honest nuance. No single centrality wins the consensus vote on its own — their signal emerges *jointly* with the temporal features (the same filter-vs-interaction lesson as `papers_per_year`). Yet added to

the model they lift F1 from 0.652 to **0.678** and recall to **0.618**. Sociological reading: **collaboration is retention** — isolated researchers churn more.

12. Model comparison — three setups (5-fold stratified CV)

Setup	Accuracy	Precision	Recall	F1
A — selected original features (served by the API)	0.885	0.746	0.582	0.652
B — PCA (3 components)	0.858	0.671	0.473	0.537
C — original + network centralities	0.892	0.759	0.618	0.678

Why the API serves setup A, not C: every input of A can be computed from a single researcher's public record; setup C would require recomputing graph centralities per request, coupling inference to a full dataset refresh. Setup C is the offline “analyst's model”; the trade-off is documented, not hidden.

13. Retention interventions tied to the top features

- High **recency / falling recent-share** → early-warning “new in your subfield” digest (exactly what `/recommend` produces) the moment cadence decays, not after two silent years.
- Low **degree / PageRank** → collaboration matchmaking (co-authors, workshops) for isolated researchers.
- **has_long_break** → soft re-onboarding (“what you missed”) after known gaps.
- High **first_author_ratio** + short career → the PhD-attribution profile; institutional mentoring matters more than content nudges.

14. Ethics — acting on predicted, not confirmed, churn

- **False positives must be harmless:** a relevant-papers digest is fine; this model must never feed hiring/funding/evaluation. Leaving arXiv ≠ leaving science.
- **Label honesty:** the ground truth is arXiv *silence*, a proxy — stated in the report and returned by `/features`.
- **Name ambiguity:** authors are string-matched; homonyms can merge records — disclosed as a limitation, and a reason not to make public individual claims.

15. PM reflection — if this were Netflix/Spotify

Treat the pipeline as one **predict** → **explain** → **act** loop. (1) Predict runs nightly, producing a *ranked re-engagement budget*, not a list of “doomed users”. (2) Explain routes the channel: recency-risk → content nudges (`/recommend`); isolation-risk (network features) → social features. The feature-selection table is literally the intervention router. (3) Act is an experiment, never a fiat: hold out a control group, measure *incremental* retention, feed it back into the threshold. The 0.5 gate is the first, deliberately simple version of that policy. The deepest lesson transfers across domains: **churn is rarely sudden — cadence decays first**, so systems that watch the derivative of engagement act while there is still something to save.

16. The original 8 steps — checklist

#	Step	Status
1	Data collection (reusable scraper, rate limits, pagination, missing fields)	✓ §3
2	Churn label (binary, justified threshold, class balance checked)	✓ §4
3	Feature generation (14 features, 4 families, recency/frequency/magnitude)	✓ §5
4	Four selection methods + consolidated table + 5-fold CV	✓ §6
5	Train RandomForest & serve (/predict, /health, /features)	✓ §8
6	PCA elbow + 2D scatter + SVD + comparison	✓ §7
7	SVD recommender (/recommend, churn-gated)	✓ §10
8	Network analysis + centralities + updated selection table	✓ §11
—	Docker (one command) + written report	✓ §9, this doc

17. Reproducibility, limitations & repository

Rebuild from scratch: `scripts/collect_data.py` → `build_model.py` → `scripts/make_viz.py` → `scripts/make_notebook.py` . **Stack:** Python 3.11, FastAPI, scikit-learn, pandas, numpy, scipy, networkx, matplotlib, joblib; dashboard uses vendored Plotly (offline).

Limitations: arXiv silence is a proxy for leaving research (venue migration looks like churn); author names are not disambiguated (no ORCID); one category (cs.CL); graph centralities are community-relative, not global.

▶ github.com/oscarbarr05/arxiv-churn

Run: `docker-compose up --build` → API on `localhost:8000` · dashboard at `/` · Swagger at `/docs` .