# Minimalist Beamer Theme

## User manual and example gallery

Version 1.0.0

pdfLaTeX • XeLaTeX • LuaLaTeX

October 2026

# Contents

1. Getting started

2. Page layout

3. Building blocks

4. Reference

# Getting started

## What is this theme?

A **minimalist, grayscale** Beamer theme: white background, sans-serif text, no navigation symbols, and a small set of reusable building blocks.

**Layout**

- Left-aligned title page and frame titles
- Optional section divider pages
- `onecol`, `twocol` and `threecol` environments

**Content**

- Figures: TikZ, `\flow`, images
- Tables: `booktabs`, `L/C/R`
- Boxes: `callout`, `statement`, ...
- Code listings and math

> Documentation and commands are in English; your slides can be in any `babel` language (e.g. Spanish: ñ, á, ¿, ¡).

## Quick start

```
\documentclass[11pt,aspectratio=169]{beamer}
\usepackage[spanish,es-tabla]{babel}   % or english, etc.
\usetheme[footer=total]{minimalist}

\title{My talk}
\author{Me}
\begin{document}
\frame{\titlepage}
\frame{\frametitle{Hello}
  Some text and a \concept{key term}.}
\end{document}
```

Put `beamerthememinimalist.sty` next to your `.tex` file (or in your local `texmf` tree) and compile with `latexmk -pdf`.

## Theme options

Pass options to the theme: `\usetheme[options]{minimalist}`.

| Option | Values | Default | Effect |
|---|---|---|---|
| `accent` | any color expr. | `black!75` | Color of bullets, rules, box frames and titles |
| `footer` | `number`, `total`, `none` | `number` | Frame counter style (bottom right) |
| `font` | `helvetica`, `default` | `helvetica` | Helvetica clone, or Beamer's default sans font |
| `titlerule` | boolean | `false` | Thin rule under each frame title |
| `sectionpages` | boolean | `false` | Automatic divider frame at each `\section` |

Example: `\usetheme[accent=blue!60!black,footer=total,titlerule]{minimalist}`

## Languages and TeX engines

### Languages

- The theme never loads `babel`: you choose the language.
- Captions follow `babel`: *Figure*, *Figura*, *Tabla*.
- With Spanish, `es-tabla` gives “Tabla” instead of “Cuadro”.
- Accents and `ñ ¿ ¡` work out of the box (UTF-8).

### Engines

- **pdfLaTeX**: T1 fonts and the Helvetica clone.
- **XeLaTeX** / **LuaLaTeX**: `fontspec` with TeX Gyre Heros.
- Detection is automatic (`iftex`).
- Listings accept accented characters under all engines.

```
\usepackage[spanish,es-tabla]{babel}  % load BEFORE \usetheme
\usetheme{minimalist}
```

# Page layout

## Title page and sections

The `\titlepage` shows title, subtitle, author, institute and date, left aligned with a short accent rule.

- `\section{...}` marks a section; with the option `sectionpages` a divider frame is inserted automatically.
- Without that option, insert one manually: `\begin{frame}\sectionpage\end{frame}`.
- `\tableofcontents` uses numbered sections.
- `\framesubtitle{...}` adds a subtitle under the frame title.

## One column

By default content uses the full text width, which is **one column**. For a narrower, centered measure use `onecol`:

```
\begin{onecol}[width=0.7]
  A narrower text block, centered
  on the slide. Good for quotes,
  definitions or short statements.
\end{onecol}
```

A narrower text block, centered on the slide. Good for quotes, definitions or short statements.

`width` is a fraction of the text width (default `0.8`).

## Two columns: result

Use `twocol` on the slides that need it

### Left column

- Plain text, lists, formulas…
- Any content works inside a column.

**Right column**

Boxes, figures and tables fit too.

Content after `\end{twocol}` goes back to the full width.

# Two or three columns: source and keys

```
\begin{twocol}[split=0.45]
  Left column content
\nextcol
  Right column content
\end{twocol}
% three columns: \begin{threecol} A \nextcol B \nextcol C \end{threecol}
```

| Key | Default | Meaning |
|---|---|---|
| `split` | `0.5` | Left column share of the width (`twocol` only) |
| `gap` | `0.04` / `0.06`* | Fraction of the width left empty between columns |
| `align` | `T` | Vertical alignment: `T`, `c` or `b` |

* default for `twocol` / `threecol`.

# Building blocks

## Text helpers

```
\concept{Key term} in bold,
\code{inline\_code()} in monospace,
\alert{alert} for emphasis.

\flowline{Design, Code, Test, Integrate}

Single arrow: A \arr\ B
```


**Key term** in bold,
`inline_code()` in monospace,
**alert** for emphasis.
**Design** → **Code** → **Test** → **Integrate**
Single arrow: A → B

Standard `itemize`, `enumerate` and `description` keep Beamer's behavior, tinted with the accent color.

## Figures: process flows with `\flow`

`\flow{A, B, C}` draws a centered chain of nodes joined by arrows and shrinks it to fit the line. Use `\\` for line breaks.

```
\flow{Requirements, Domain\\model, Design, Code}
```





Pass TikZ options in brackets: `\flow[node distance=1cm]{...}`.

# Figures: custom TikZ with theme styles

Styles: `mn node`, `mn arrow`, `mn dashed arrow`, `mn circle`.

```
\begin{tikzpicture}[mn circle/.append style={minimum size=1.5cm}]
  \node[mn circle] (r) {RED};
  \node[mn circle, right=1.4cm of r] (g) {GREEN};
  \node[mn circle, right=1.4cm of g] (f) {REFACTOR};
  \draw[mn arrow] (r) -- (g);  \draw[mn arrow] (g) -- (f);
  \draw[mn dashed arrow, bend left=30] (f) to (r);
\end{tikzpicture}
```

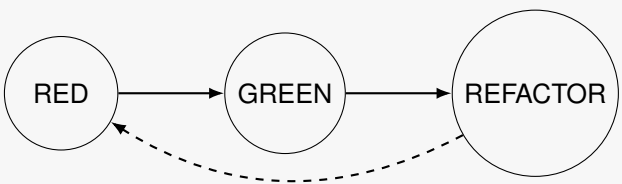

# Figures: images and captions

```
\begin{figure}
  \centering
  \includegraphics[width=0.6\linewidth]
    %
    {example-image-a}
  \caption{An example image.}
\end{figure}
```

Captions are numbered and follow the `babel` language.





**Figure 1:** An example image.

# Tables

Use `booktabs` rules and the column types `L{w}`, `C{w}`, `R{w}` (left, centered, right; fixed width, wrapped text).

```
\begin{table}
  \centering
  \begin{tabular}{@{}L{1.7cm}C{1cm}R{1.1cm}@{}}
    \toprule
    \textbf{Item} & \textbf{Qty} & \textbf{Price}\\
    \midrule
    Pencil & 3 & 1.20\\
    Notebook & 2 & 4.50\\
    \bottomrule
  \end{tabular}
  \caption{A table.}
\end{table}
```

| **Item** | **Qty** | **Price** |
|---|---|---|
| Pencil | 3 | 1.20 |
| Notebook | 2 | 4.50 |

**Table 1:** A table.

# **Boxes:** `callout` **and** `statement`

```
\begin{callout}
  Outlined box for a key idea.
\end{callout}

\begin{callout}[title=With a title]
  Any tcolorbox key can be passed.
\end{callout}

\begin{statement}
  A centered, emphasized sentence.
\end{statement}
```

Outlined box for a key idea.

**With a title**

Any tcolorbox key can be passed.

**A centered, emphasized sentence.**

## Boxes: `notebox` and Beamer blocks

```
\begin{notebox}[title=Note]
  Soft gray note with a left bar.
\end{notebox}

\begin{block}{Block}
  Standard Beamer block.
\end{block}

\begin{alertblock}{Alert}
  Use sparingly.
\end{alertblock}
```

**Note**

Soft gray note with a left bar.

**Block**

Standard Beamer block.

**Alert**

Use sparingly.

## Code listings

**Frames with listings need the `[fragile]` option.** The `minimalist` listings style is already active:

```
def peso_total(envio):
    # Suma el peso de cada línea de suministro
    return sum(l.peso * l.cantidad for l in envio.lineas)
```

Inline: `assert peso_total(e) <= v.capacidad`. Choose another language with `[language=Java]`, or set it for the whole deck with `\lstset{language=Python}`.

## Math, definitions and theorems

```
\begin{definition}
  A set $S$ is \emph{finite} if\ldots
\end{definition}
\begin{theorem}
  $\displaystyle\sum_{i=1}^{n} i = \frac{n(n+1)
    }{2}$
\end{theorem}
```

**Definition**
A set $S$ is *finite* if...

**Theorem**
$$\sum_{i=1}^{n} i = \frac{n(n+1)}{2}$$

The names (“Definition”, “Teorema”, ...) are translated by `babel`.

# Reference

# Command reference

| Command / environment | Purpose |
|---|---|
| `twocol[split,gap,align]`, `\nextcol` | Two columns; `\nextcol` starts the second one |
| `threecol[gap]`, `\nextcol` | Three equal columns (same `\nextcol`) |
| `onecol[width]` | Centered single column of a given fraction of the width |
| `callout[opts]` | Outlined box, optional `title=` |
| `statement[opts]` | Centered, emphasized box |
| `notebox[opts]` | Gray note with left bar |
| `\concept{}`, `\code{}`, `\arr` | Bold term, monospace, arrow |
| `\flowline{A,B,C}` | Inline chain A $\rightarrow$ B $\rightarrow$ C |
| `\flow[opts]{A,B,C}` | TikZ node chain joined by arrows |
| `mn node`, `mn arrow`, `mn dashed arrow`, `mn circle` | TikZ styles |
| `L{w}`, `C{w}`, `R{w}` | Fixed-width table columns |
| `lstlisting` (style `minimalist`) | Code listings (fragile frames) |

## Customization

- **Aspect ratio:** `\documentclass[aspectratio=43]{beamer}`.
- **Top alignment:** class option `t`; use `[c]` on a single frame to center it.
- **Accent color:** `\usetheme[accent=blue!50!black]{minimalist}`.
- **Margins:** `\setbeamersize{text margin left=1.2cm}`.
- **Node look:** `\tikzset{mn node/.append style={fill=black!5}}`.
- **Boxes:** `\tcbset{mn base/.append style={arc=3pt}}`.
- **Table spacing:** `\renewcommand{\arraystretch}{1.2}`.

Override these *after* `\usetheme`.

## Migrating from the original ad-hoc template

| Original | | Theme |
|---|---|---|
| `\concepto{...}` | → | `\concept{...}` |
| `\caja{\centering ...}` | → | `statement` or `callout` |
| `columns` + `\column{0.47\linewidth}` | → | `twocol[split=0.5]` + `\nextcol` |
| TikZ chain with `every node/.style` | → | `\flow{A, B, C}` or `mn node` |
| `p{4cm}` with `\raggedright` | → | `L{4cm}` |
| Preamble with fonts, colors, footline | → | `\usetheme{minimalist}` |