
Figure 16 — prior-based, sphere, η_{ig}=1 — local G-solver (100× interpolation); baselines not runnable


Ours — σ=0.0001

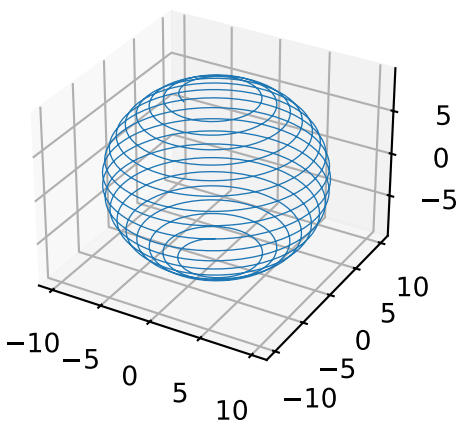

B-Spline
MISSING_BASELINE
(Hyperion not reproducible
from public artefacts)

Z-Spline
MISSING_BASELINE
(Hyperion not reproducible
from public artefacts)


Ours — σ=0.001

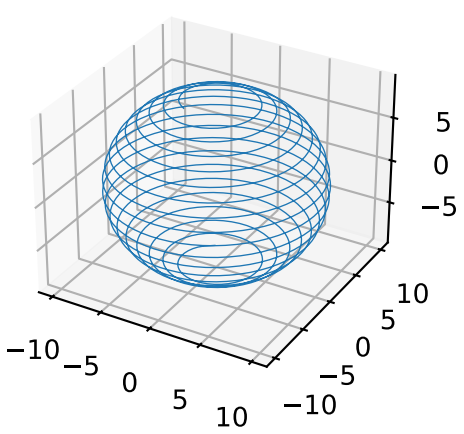

B-Spline
MISSING_BASELINE
(Hyperion not reproducible
from public artefacts)

Z-Spline
MISSING_BASELINE
(Hyperion not reproducible
from public artefacts)


Ours — σ=0.01

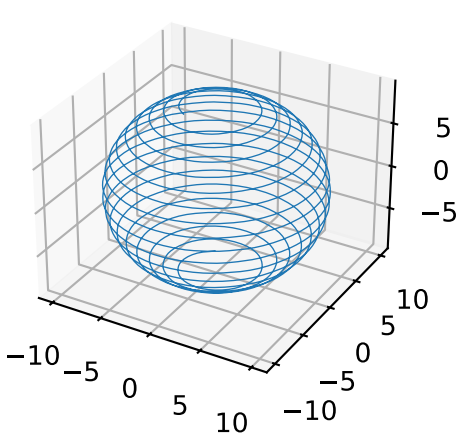

B-Spline
MISSING_BASELINE
(Hyperion not reproducible
from public artefacts)

Z-Spline
MISSING_BASELINE
(Hyperion not reproducible
from public artefacts)


Ours — σ=0.1

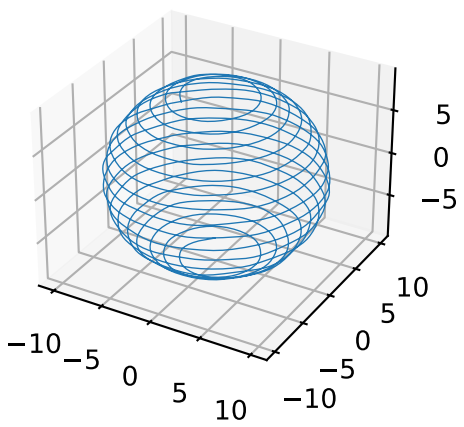

B-Spline
MISSING_BASELINE
(Hyperion not reproducible
from public artefacts)

Z-Spline
MISSING_BASELINE
(Hyperion not reproducible
from public artefacts)


Ours — σ=1.0

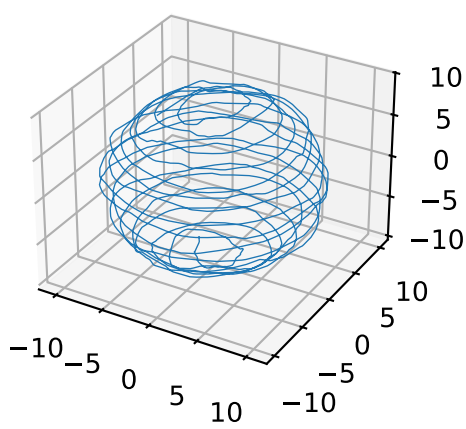

B-Spline
MISSING_BASELINE
(Hyperion not reproducible
from public artefacts)

Z-Spline
MISSING_BASELINE
(Hyperion not reproducible
from public artefacts)

Ours — σ=1.5

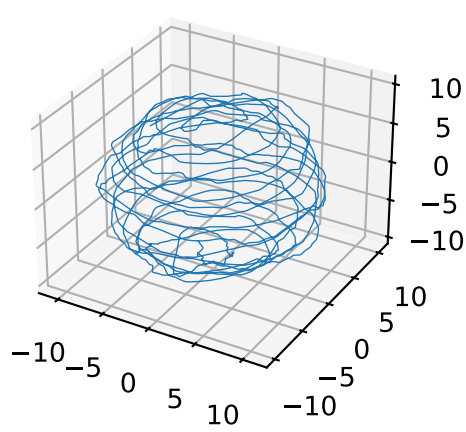

B-Spline
MISSING_BASELINE
(Hyperion not reproducible
from public artefacts)

Z-Spline
MISSING_BASELINE
(Hyperion not reproducible
from public artefacts)