

Guía: Cómo conectar GitHub Copilot con Huawei MaaS – Servicio de tokens



Author: Juan David Rincón Poveda

ID: j50056687

Email: juan.david.poveda@huawei.com

Huawei Technologies Co., Ltd.



1 Requisitos previos

- Disponer de una cuenta de Huawei Cloud que funcione (internacional o china).
- Una máquina (o máquina virtual) con Visual Studio Code instalado. Consulte el enlace oficial para la instalación: <https://code.visualstudio.com/download>

2 Walkthrough

2.1 Vaya a la página de MaaS - Servicio de tokens.

<https://console-intl.huaweicloud.com/modelarts/?locale=en-us®ion=ap-southeast-1#/model-studio/deployment>

2.2 Suscríbete a los modelos que planeas usar:

Built-in Services (7) ⓘ

Usage Guide ☒ Display in units of 1M tokens

Search or filter by name

Name/Resource ID ⓘ ⓘ	Status ⓘ	Type	Billing Mode	Infer Price	Discounts ⓘ	Model flow L...	Call Statistics	Operation
DeepSeek-V3.2 9167d9d0-31ef-4649-9b1c-35f11371dac1	Subscribed	Text Generation	token-based billing	input: \$0.27 USD/1M tokens output: \$0.404 USD/1M tokens	—	TPM: 500,000 RPM: 700		Unsubscribe View Call Description
DeepSeek-V3.1 —	Not Subscribed	Text Generation	token-based billing	input: \$0.539 USD/1M tokens output: \$1.617 USD/1M tokens	—	TPM: 500,000 RPM: 1,500		Subscribe View Call Description
Qwen3-32B-32K —	Not Subscribed	Text Generation	token-based billing	input: \$0.27 USD/1M tokens output: \$1.078 USD... \$2.868 US...	—	TPM: 500,000 RPM: 1,500		Subscribe View Call Description
DeepSeek-V3 —	Not Subscribed	Text Generation	token-based billing	input: \$0.27 USD/1M tokens output: \$2.426 USD...	—	TPM: 500,000 RPM: 1,500		Subscribe View Call Description
GLM-5 073d390b-e89b-48dd-89cf-6885288003a	Subscribed	Text Generation	token-based billing	input: \$0.539 USD... \$0.809 USD... output: \$2.426 USD... \$2.868 US...	—	TPM: 500,000 RPM: 30		Unsubscribe View Call Description
GLM-5.1 e342a1d4-4dca-45de-9364-6f4e4280d61	Subscribed	Text Generation	token-based billing	input: \$0.809 USD... \$1.078 USD... output: \$3.235 USD... \$3.774 US...	—	TPM: 500,000 RPM: 30		Unsubscribe View Call Description
DeepSeek-R1-0528 —	Not Subscribed	Text Generation	token-based billing	input: \$0.539 USD/1M tokens output: \$2.156 USD/1M tokens	—	TPM: 500,000 RPM: 1,500		Subscribe View Call Description

Subscribe to Built-in Services and Try Popular Models Now

Built-in Services offer paid API services. After subscription, charges are incurred based on actual usage during trials or calls. For details, see [Pricing Details](#). You will not pay for unused services, but you cannot disable them either. You can use all available versions of the service after subscription.


☒ Qwen3-32B-32K ☐ DeepSeek-V3.1
☐ DeepSeek-V3 ☐ DeepSeek-R1-0528

☐ All


☒ I have read and agree to the above terms and [MaaS Service Statement](#)

Subscribe

2.3 Presiona **View Call Description**.

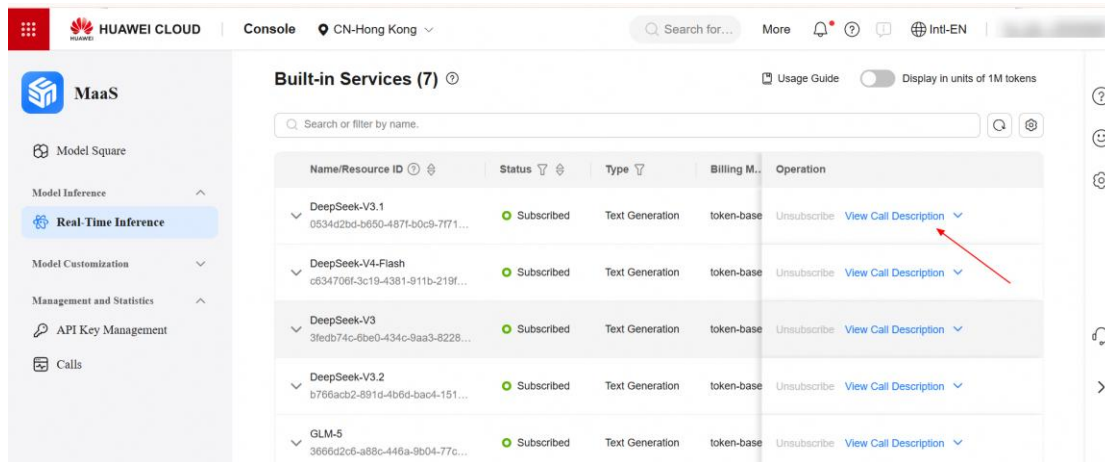


2.4 Seleccione la versión del modelo.

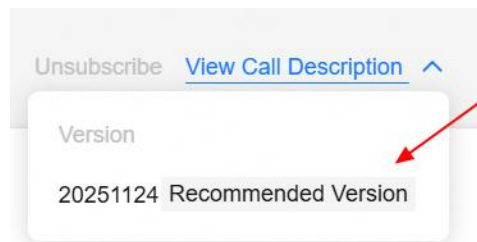

2.5 Seleccione una **OpenAI-compatible APIs** y guarde la URL de la API.

View Call Description

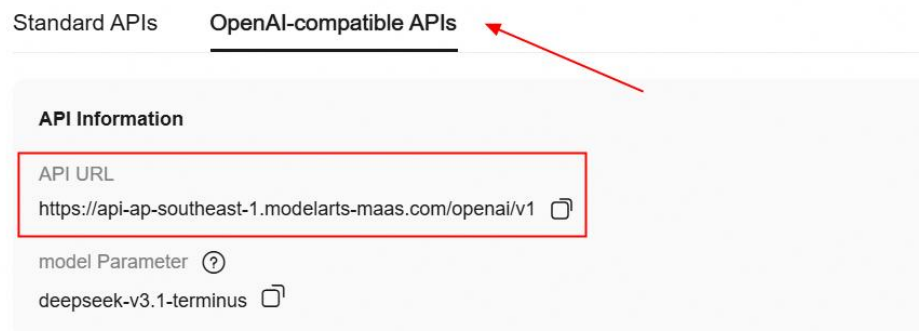

2.6 Dirígete a la página de administración de la API.

<https://console-intl.huaweicloud.com/modelarts/?locale=en-us®ion=ap-southeast-1#/model-studio/authmanage>

Standard APIs OpenAI-compatible APIs

API Information

API URL
<https://api-ap-southeast-1.modelarts-maas.com/openai/v1> 

model Parameter 
qwen3-32b 

Step 1: Obtain an API Key

When invoking Model Service of MaaS, you need to enter the API key for interface authentication. [Create a new API key](#) or use an existing API key. Go to [API Key Management](#)

2.7 Crea una nueva API key.

Create API Key 

 Your API key will be displayed only once when you create it. Keep it safe.

Basic information

Tag
 guide
Tags can include letters, digits, underscores (_), and hyphens (-). Maximum length: 100 characters

Description
 API key created for the OpenCode guide

Permission Settings


Permission Scope
All (Unrestricted access to all resources) 

2.8 Guarda la API key.




2.9 Abre Visual Studio Code y dirígete a Extensiones. (Ctrl + Shift + X)

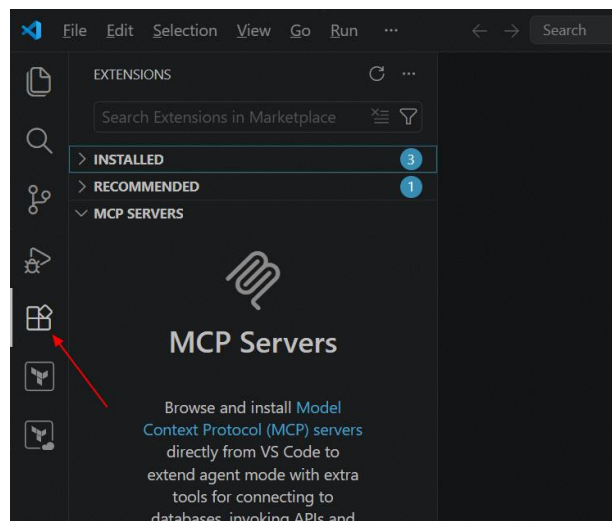


2.10 Obten GitHub Copilot Chat de marketplace.




2.11 Dado que Copilot no admite la opción "Trae tus propias claves" (BYOK), debemos usar un proveedor OAI. Obtén **OAI Compatible Provider for Copilot** en el marketplace.

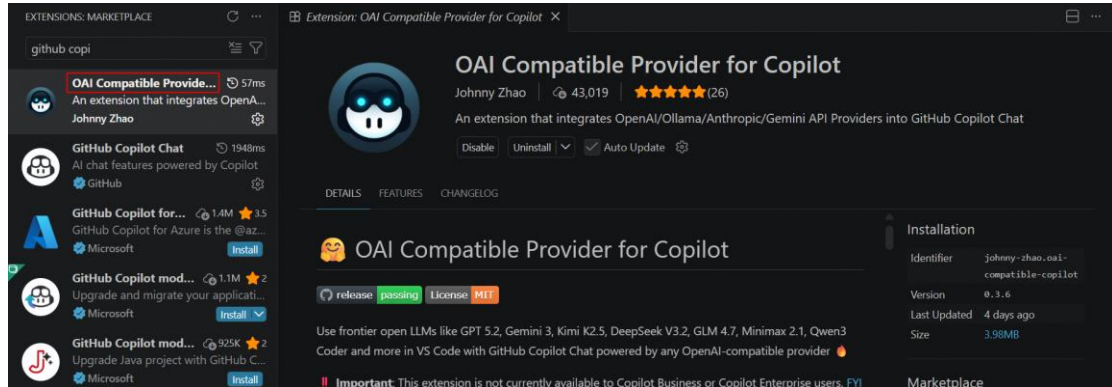


2.12 Busque el símbolo de configuración y, a continuación, click en **Configuración**.

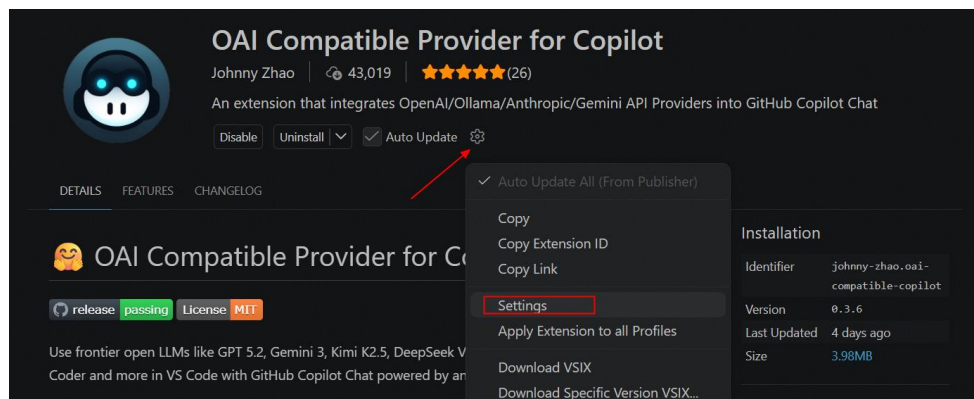


2.13 Ahora, simplemente cambia **Base URL** del campo **Oaicopilot** por la URL de la API de MaaS.

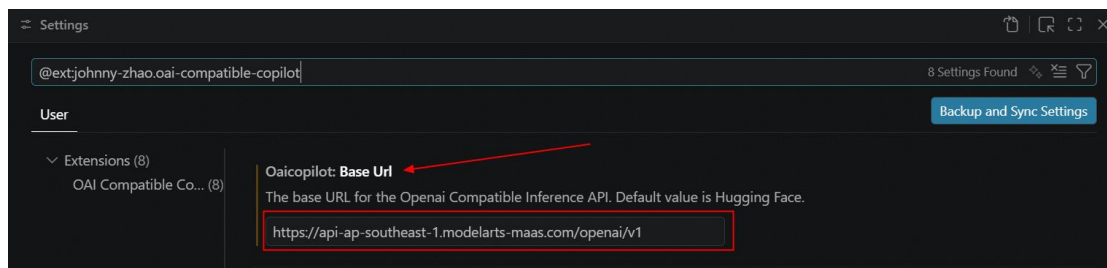


2.14 Cierra la ventana y busca el símbolo de chat.

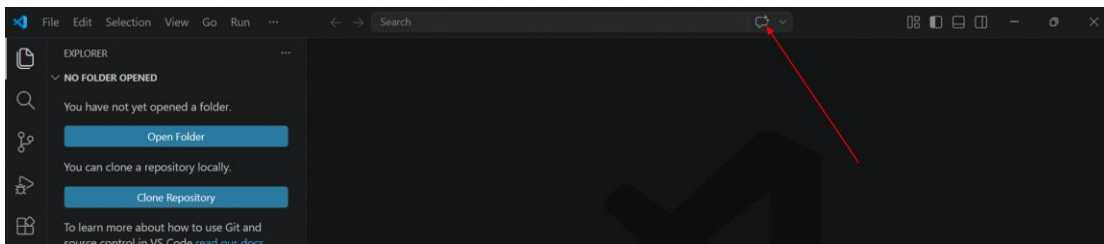


2.15 En la parte inferior del chat recién abierto, pulse el modelo y luego Manage Models.

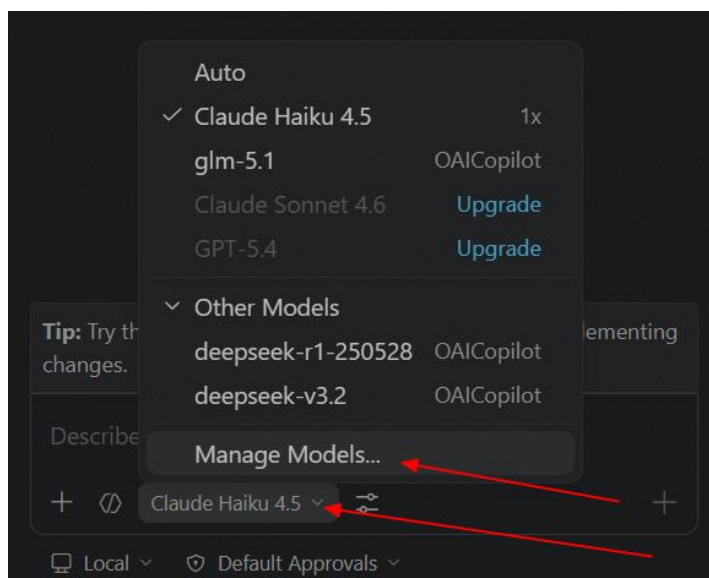


2.16 Click en **Add Models** y selecciona **OAI Compatible**.

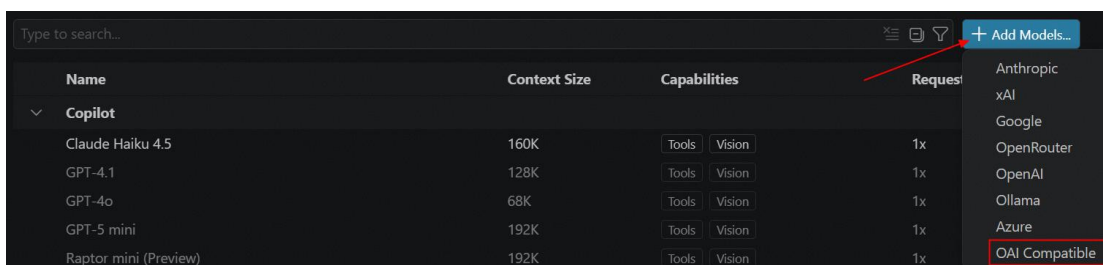

2.17 Pega la **API key** y presiona Enter.

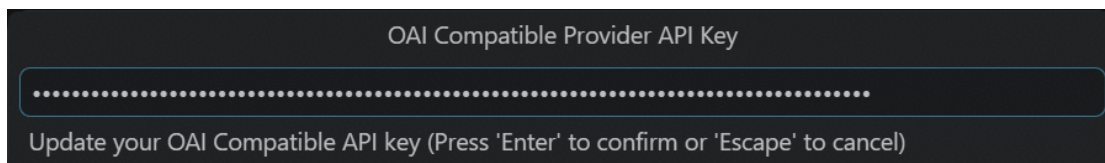


2.18 En la pestaña de **OAI Compatible tab**, se podrán ver los modelos a los que se ha suscrito. Asegúrese de que la visibilidad esté activada para los modelos que necesitamos.

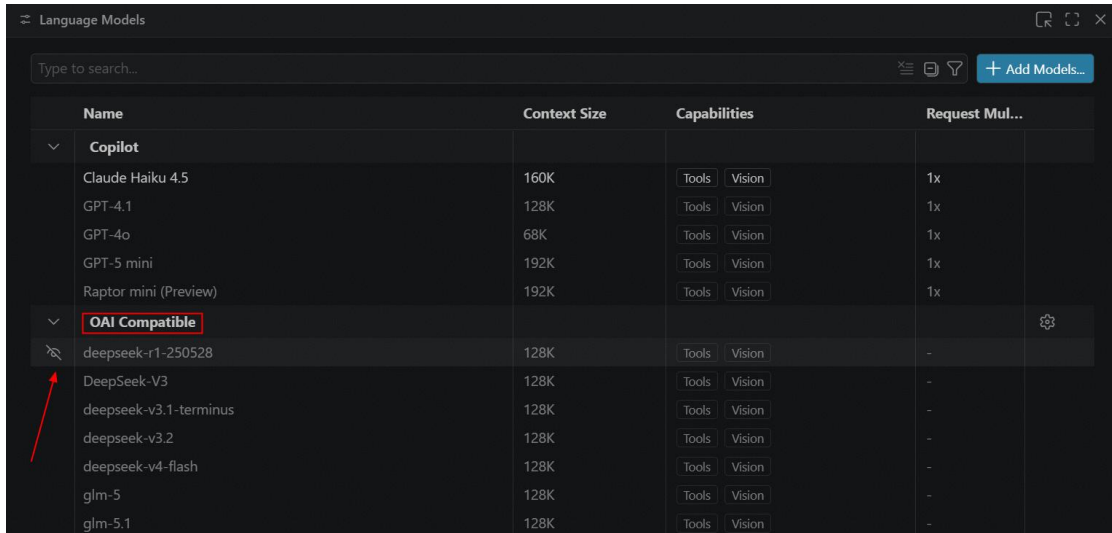

Name	Context Size	Capabilities	Request Mul...
Copilot			
Claude Haiku 4.5	160K	Tools Vision	1x
GPT-4.1	128K	Tools Vision	1x
GPT-4o	68K	Tools Vision	1x
GPT-5 mini	192K	Tools Vision	1x
Raptor mini (Preview)	192K	Tools Vision	1x
OAI Compatible			
deepseek-r1-250528	128K	Tools Vision	-
DeepSeek-V3	128K	Tools Vision	-
deepseek-v3.1-terminus	128K	Tools Vision	-
deepseek-v3.2	128K	Tools Vision	-
deepseek-v4-flash	128K	Tools Vision	-
glm-5	128K	Tools Vision	-
glm-5.1	128K	Tools Vision	-

2.19 Ahora podrás elegir el modelo MaaS y probarlos.

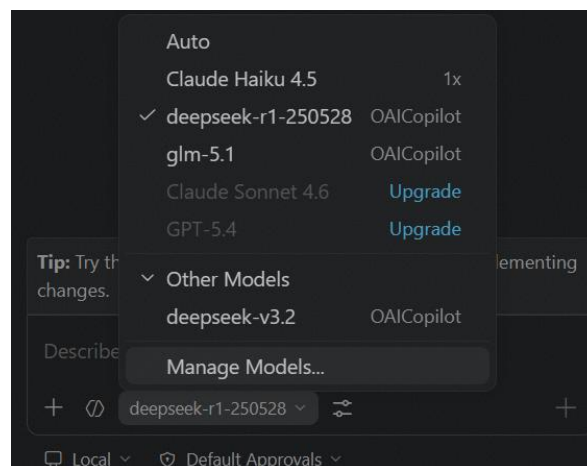

Siempre verifique el código generado por IA. Si bien las máquinas ofrecen un poder inmenso, la supervisión humana sigue siendo esencial para la calidad y el control.

3 Reference

<https://3ms.huawei.com/km/blogs/details/22262047>