[illegible]

Email: juan.david.poveda@huawei.com





1 Requisitos previos

- Disponer de una cuenta de Huawei Cloud que funcione (internacional o china).
- Disponer de OpenClaw instalado en el sistema.

2 Tutorial

2.1 Dirígete a la página MaaS - Servicio de tokens.

<https://console-intl.huaweicloud.com/modelarts/?locale=en-us®ion=ap-southeast-1#/model-studio/deployment>

2.2 Suscríbete a los modelos que planeas usar.


Built-in Services (7) ⓘ

Usage Guide ☒ Display in units of 1M tokens


Search or filter by name.

Name/Resource ID ⓘ	Status ⓘ	Type	Billing Mode	Infer Price	Discounts ⓘ	Model Flow L...	Call Statistics	Operation
DeepSeek-V3.2 916786d9-31ef-4649-961c-3911371d6c1	Subscribed	Text Generation	token-based billing	input: \$0.27 USD/1M tokens output: \$0.404 USD/1M tokens	—	TPM: 500,000 RPM: 700		Unsubscribe View Call Description
DeepSeek-V3.1 —	Not Subscribed	Text Generation	token-based billing	input: \$0.539 USD/1M tokens output: \$1.617 USD/1M tokens	—	TPM: 500,000 RPM: 1,500		Subscribe View Call Description
Owen3-32B-32K —	Not Subscribed	Text Generation	token-based billing	input: \$0.27 USD/1M tokens output: \$1.078 USD ; \$2.885 US...	—	TPM: 500,000 RPM: 1,500		Subscribe View Call Description
DeepSeek-V3 —	Not Subscribed	Text Generation	token-based billing	input: \$0.27 USD/1M tokens output: \$1.078 USD/1M tokens	—	TPM: 500,000 RPM: 1,500		Subscribe View Call Description
GLM-5 073d390b-e69b-48d4-89cf-8805288003a	Subscribed	Text Generation	token-based billing	input: \$0.539 USD ; \$0.899 USD... output: \$2.436 USD ; \$2.965 US...	—	TPM: 500,000 RPM: 30		Unsubscribe View Call Description
GLM-5.1 e342a1d4-dfca-45de-9364-6f6e428f8ed1	Subscribed	Text Generation	token-based billing	input: \$0.899 USD ; \$1.078 USD... output: \$3.235 USD ; \$3.774 US...	—	TPM: 500,000 RPM: 30		Unsubscribe View Call Description
DeepSeek-R1-652B —	Not Subscribed	Text Generation	token-based billing	input: \$0.539 USD/1M tokens output: \$2.156 USD/1M tokens	—	TPM: 500,000 RPM: 1,500		Subscribe View Call Description


2.3 Presione View Call Description en cualquier modelo que se desee usar.

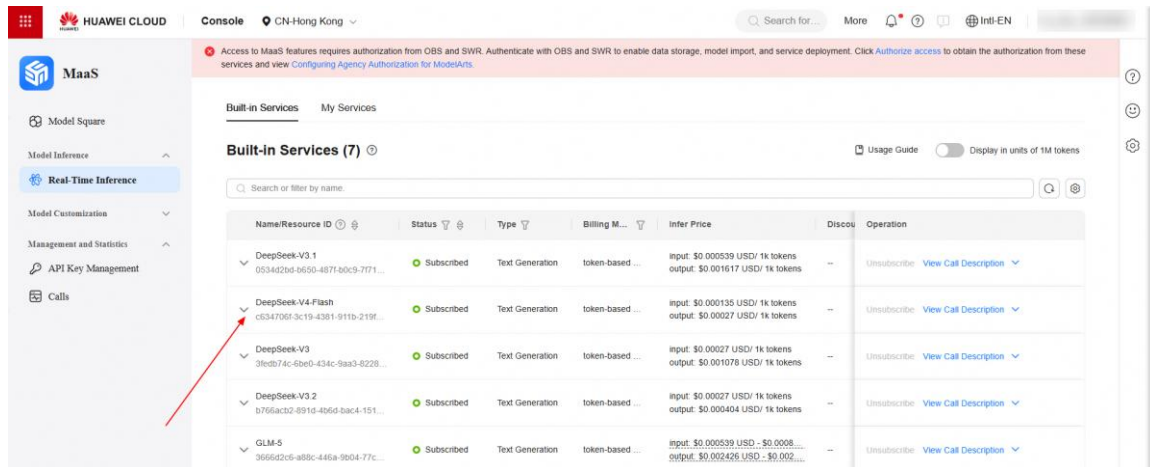

2.4 Selecciona la versión del modelo.

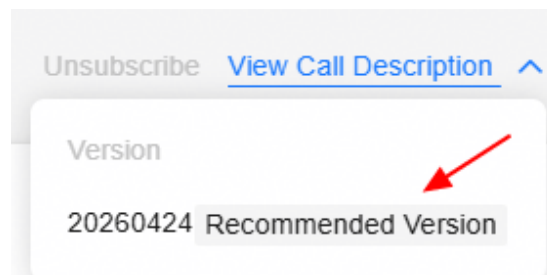

2.5 Escoge OpenAI-Compatible APIs y guarda la API URL y el model Parameter.

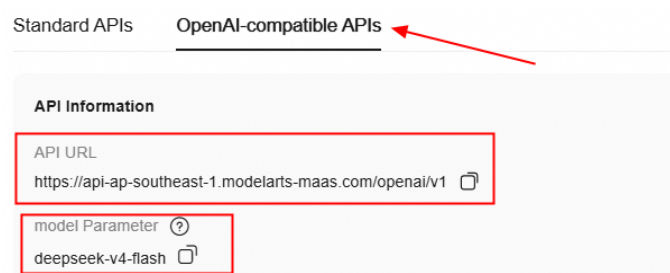

2.6 Dirígete a API Management Page.

<https://console-intl.huaweicloud.com/modelarts/?locale=en-us®ion=ap-southeast-1#/model-studio/authmanage>

View Call Description



Standard APIs

OpenAI-compatible APIs

API Information

API URL

<https://api-ap-southeast-1.modelarts-maas.com/openai/v1> model Parameter glm-5.1 

Step 1: Obtain an API Key

When invoking Model Service of MaaS, you need to enter the API key for interface authentication. [Create a new API key](#) or use an existing API key. Go to [API Key Management](#) 

2.7 Crea una nueva API key.

Create API Key

 Your API key will be displayed only once when you create it. Keep it safe.

Basic information

Tag

1

guide

Tags can include letters, digits, underscores (_), and hyphens (-). Maximum length: 100 characters

Description

2

API key created for the OpenCode guide

Permission Settings

Permission Scope


All (Unrestricted access to all resources) 

Cancel

3

OK

2.8 Guarda esta API Key.

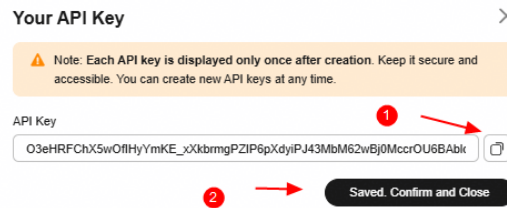

2.9 En la cmd usa el siguiente comando y selecciona **Local**.

```
Openclaw config
```

```
C:\>openclaw config

OpenClaw 2026.5.6 (c97b9f7) - You had me at 'openclaw gateway start.'

OpenClaw configure
Existing config detected -----
model: custom-api-ap-southeast-1-modelarts-maas-com/GLM-5.1
gateway.mode: local
gateway.port: 18789
gateway.bind: loopback
-----
* Where will the Gateway run?
> Local (this machine) (No gateway detected (ws://127.0.0.1:18789))
  Remote (info-only)
```

2.10 Entre las opciones que se muestran, selecciona **Model**.

```
* Select sections to configure
| Workspace
| > Model (Pick provider + credentials)
| Web tools
| Gateway
| Daemon
| Channels
| Plugins
| Skills
| Health check
| Continue
```

2.11 Buscamos **Custom Provider** y lo seleccionamos.

```
* Model/auth provider
Search:
Anthropic
Arcee AI
BytePlus
Cerebras
Chutes
Cloudflare AI Gateway
Codex
Copilot
> Custom Provider (Any OpenAI or Anthropic compatible endpoint)
DeepInfra
DeepSeek
Fireworks
Google
Google Vertex
Groq
Hugging Face
Kilo Gateway
LiteLLM
LM Studio
Microsoft Foundry
MiniMax
Mistral AI
Moonshot AI (Kimi K2.6)
...
↑/↓ to select • Enter: confirm • Type: to search
```

2.12 Ponemos la API URL que obtuvimos en MaaS.

```
* API Base URL
| https://api-ap-southeast-1.modelarts-maas.com/openai/v1
```

2.13 Escogemos Paste **API key now**.

```
* How do you want to provide this API key?
| > Paste API key now (Stores the key directly in OpenClaw config)
| Use external secret provider
|
```

2.14 Ponemos la **API Key** de MaaS.

```
API Key (leave blank if not required)
.....
```

2.15 Entre las opciones escogemos **OpenAI-compatible**.

```
* Endpoint compatibility
| > OpenAI-compatible (Uses /chat/completions)
| Anthropic-compatible
| Unknown (detect automatically)
|
```

2.16 En **Model ID**, ponemos el **model Parameter** que guardamos de MaaS.

```
* Model ID
| deepseek-v4-flash
```

Si la conexión es exitosa veremos este mensaje

```
o Verification successful.
```

2.17 Le podremos asignar el Endpoint ID y el Model alias como queramos.

```
* Endpoint ID
| custom-api-ap-southeast-1-modelarts-maas-com
```

```
* Model alias (optional)
| deepseek-v4-flash
```

2.18 Ponemos el siguiente comando.

```
OpenClaw
```

2.19 Y escribimos 'model' para ver que el modelo de MaaS se configuró correctamente.

```
model
```

```
model
```

```
Default model: custom-api-ap-southeast-1-modelarts-maas-com/deepseek-v4-flash
Codex: not found
Claude Code: not found
OpenAI key: not found
Anthropic key: not found
```