



A stylized illustration of a globe centered on Africa, surrounded by various icons representing technology, industry, and infrastructure. The globe is encircled by several intersecting colored lines (blue, green, orange, purple) that form orbital paths. Various icons are placed along these paths and around the globe, including a smartphone, a laptop, a cloud with signal waves, a camera, a wind turbine, a power button, a factory, a house, a person, a shopping cart, a train, and a classical building. In the bottom left corner, there are two interlocking gears and a small classical building icon. The entire graphic is set against a white background.

Email: juan.david.poveda@huawei.com





1 Requisitos previos

- Disponer de una cuenta de Huawei Cloud que funcione (internacional o china).
- Disponer de una cuenta en n8n con un flujo de trabajo que use un modelo de IA.

2 Tutorial

2.1 Dirígete a la página MaaS - Servicio de tokens.

<https://console-intl.huaweicloud.com/modelarts/?locale=en-us®ion=ap-southeast-1#/model-studio/deployment>

2.2 Suscríbete a los modelos que planeas usar.


Built-in Services (7) ⓘ

Usage Guide ☒ Display in units of 1M tokens


Search or filter by name.

Name/Resource ID ⓘ	Status ⓘ	Type	Billing Mode	Infer Price	Discounts ⓘ	Model Flow L...	Call Statistics	Operation
DeepSeek-V3.2 916786d9-31ef-4649-961c-3911371d6c1	Subscribed	Text Generation	token-based billing	input: \$0.27 USD/1M tokens output: \$0.404 USD/1M tokens	—	TPM: 500,000 RPM: 700		Unsubscribe View Call Description
DeepSeek-V3.1 —	Not Subscribed	Text Generation	token-based billing	input: \$0.539 USD/1M tokens output: \$1.617 USD/1M tokens	—	TPM: 500,000 RPM: 1,500		Subscribe View Call Description
Owen3-32B-32K —	Not Subscribed	Text Generation	token-based billing	input: \$0.27 USD/1M tokens output: \$1.078 USD ; \$2.885 US...	—	TPM: 500,000 RPM: 1,500		Subscribe View Call Description
DeepSeek-V3 —	Not Subscribed	Text Generation	token-based billing	input: \$0.27 USD/1M tokens output: \$1.078 USD/1M tokens	—	TPM: 500,000 RPM: 1,500		Subscribe View Call Description
GLM-5 073d390b-e69b-48d4-89cf-8805288003a	Subscribed	Text Generation	token-based billing	input: \$0.539 USD ; \$0.899 USD... output: \$2.426 USD ; \$2.965 US...	—	TPM: 500,000 RPM: 30		Unsubscribe View Call Description
GLM-5.1 e342a1d4-dfca-45de-9364-6f9e428f8ed1	Subscribed	Text Generation	token-based billing	input: \$0.899 USD ; \$1.078 USD... output: \$3.235 USD ; \$3.774 US...	—	TPM: 500,000 RPM: 30		Unsubscribe View Call Description
DeepSeek-R1-652B —	Not Subscribed	Text Generation	token-based billing	input: \$0.539 USD/1M tokens output: \$2.156 USD/1M tokens	—	TPM: 500,000 RPM: 1,500		Subscribe View Call Description


2.3 Presione View Call Description en cualquier modelo que se desee usar.

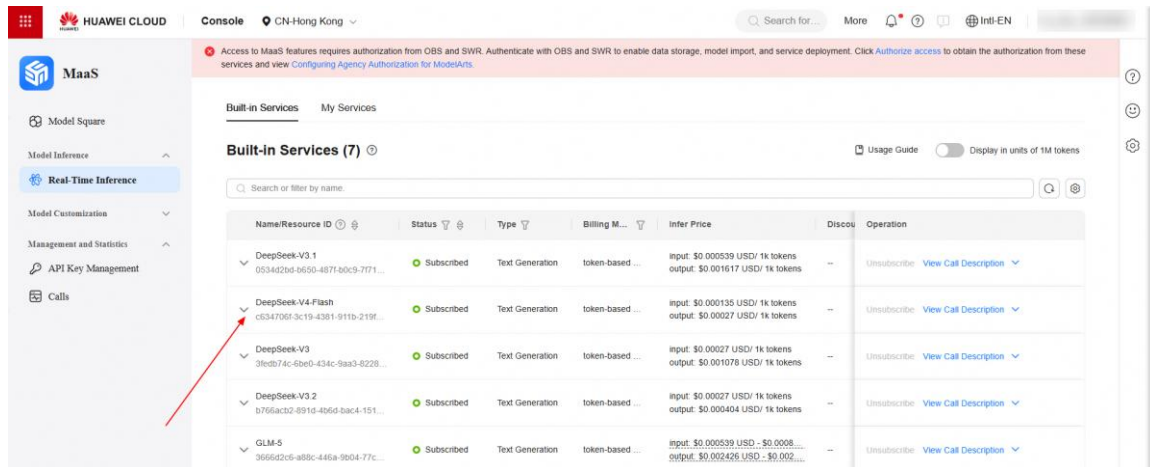

2.4 Selecciona la versión del modelo.

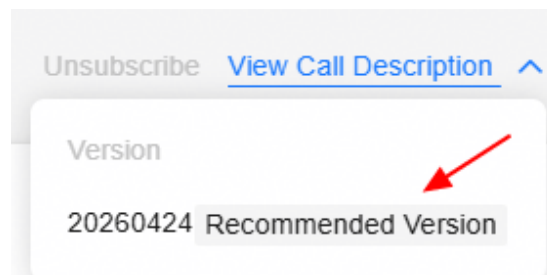

2.5 Escoge OpenAI-Compatible APIs y guarda la API URL.

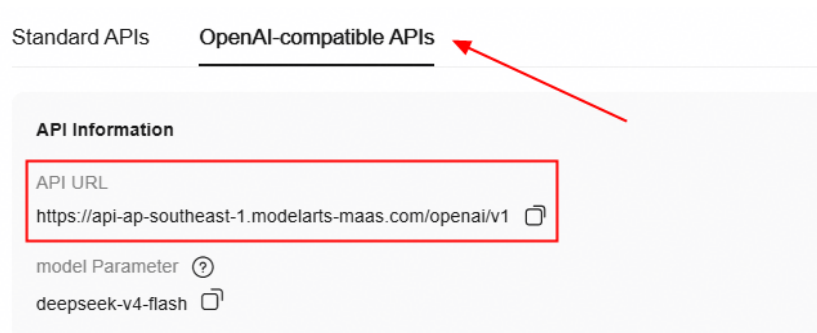

2.6 Dirígete a API Management Page.

<https://console-intl.huaweicloud.com/modelarts/?locale=en-us®ion=ap-southeast-1#/model-studio/authmanage>

View Call Description



Standard APIs

OpenAI-compatible APIs

API Information

API URL

<https://api-ap-southeast-1.modelarts-maas.com/openai/v1> model Parameter glm-5.1 

Step 1: Obtain an API Key

When invoking Model Service of MaaS, you need to enter the API key for interface authentication. [Create a new API key](#) or use an existing API key. Go to [API Key Management](#) 

2.7 Crea una nueva API key.

Create API Key

 Your API key will be displayed only once when you create it. Keep it safe.

Basic information

Tag

1

guide

Tags can include letters, digits, underscores (_), and hyphens (-). Maximum length: 100 characters

Description

2

API key created for the OpenCode guide

Permission Settings

Permission Scope


All (Unrestricted access to all resources) 

Cancel


3

OK


2.8 Guarda esta API Key.

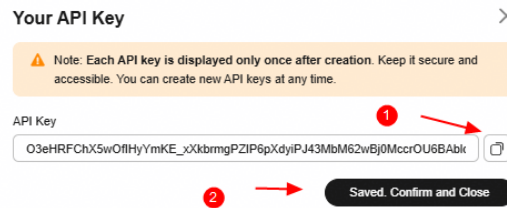


2.9 En n8n abre cualquier flujo de trabajo en donde se use un modelo de IA.

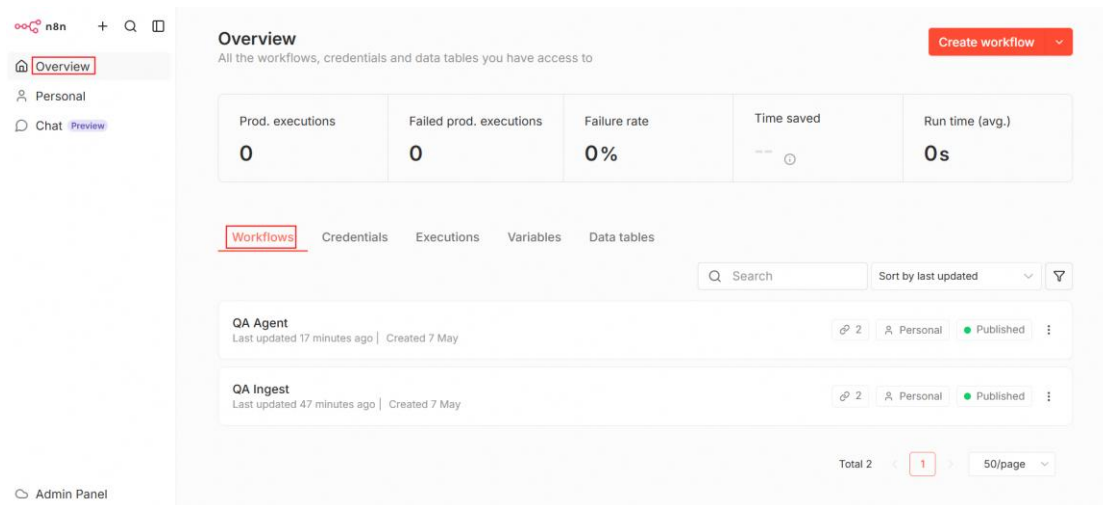


2.10 Una vez tenemos el flujo abierto, le damos al símbolo + en la sección del flujo que requiera de un modelo.

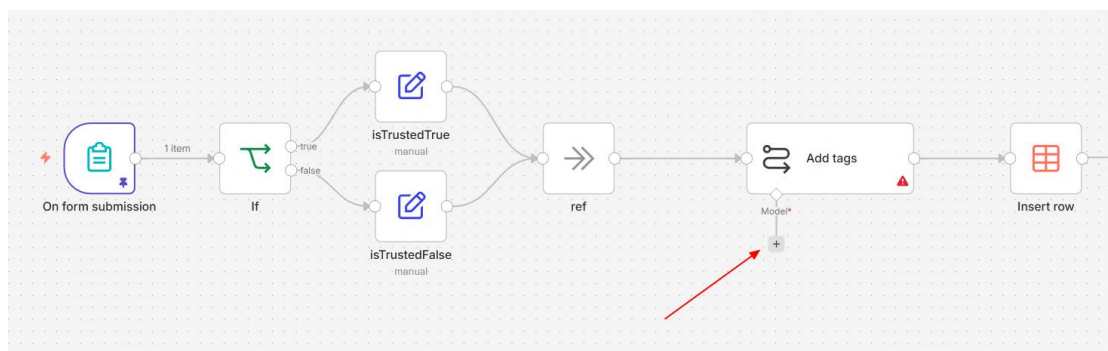


2.11 Buscamos **OpenAI Chat Model** y lo seleccionamos.

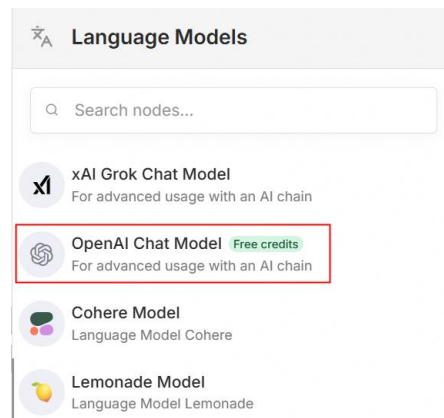


2.12 Seleccionamos **My Own Credential** y luego damos click en **Set Up credential**.

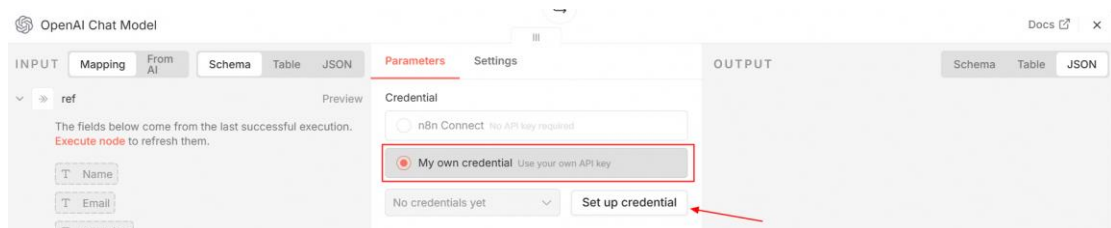


2.13 En la ventana emergente, llenamos los campos de **API Key** y de **Base URL** con los que obtuvimos previamente en MaaS y guardamos.

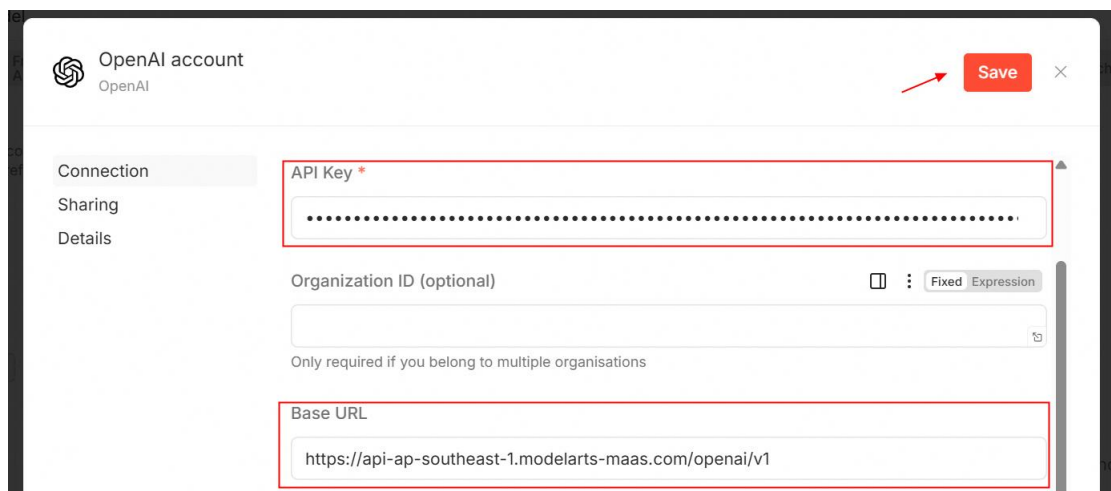

Si la conexión es exitosa veremos el siguiente mensaje.

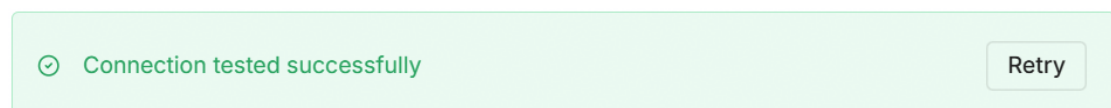

2.14 Cerramos la ventana y en el apartado de **Model** ponemos **From List** y veremos todos los modelos a los que estamos suscritos en MaaS.

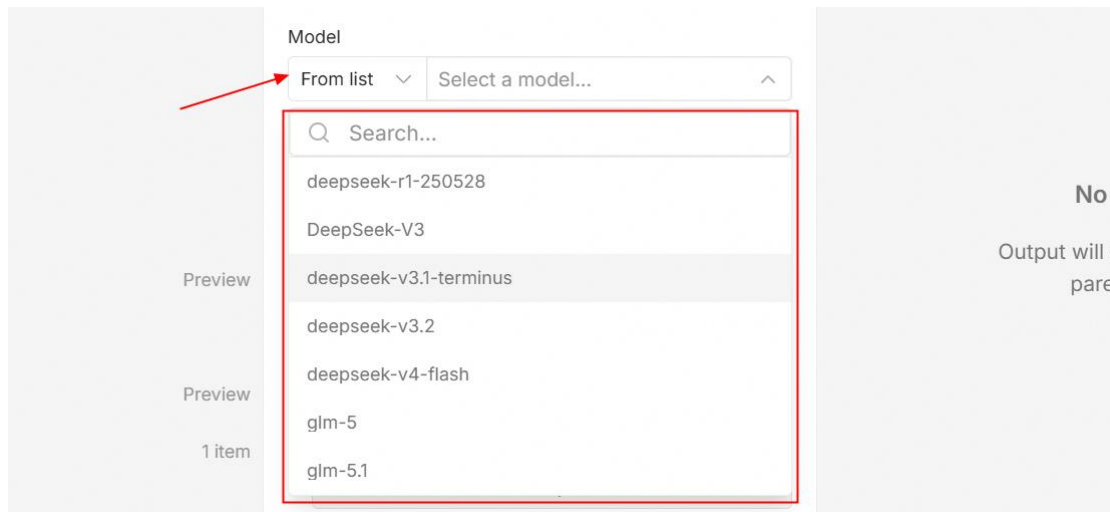

2.15 Seleccionamos un modelo y desactivamos la opción de Use API Response.



2.16 Para menor confusión podemos cambiar el nombre del nodo del modelo en la parte superior.



2.17 Finalmente podremos ver el flujo funcionando correctamente con el nuevo modelo.

