Loading Indicators

Page Spinner

Use for indefinite loading that cannot be pinpointed to a single component.

Spinner

The spinner uses low shadow and accent Secondary 1 and should be centered in the users window.

Use an overlay of background primary at 20% opacity

The page spinner blocks the user from doing anything, which we aim to communicate to the user with the overlay.



Animated component

Skeleton loading

✏️ Documentation In Progress

Use at the component level to give users a preview of the UI they can expect. This makes users feel things load faster than they actually do, and helps them prepare for their next action.

Background examples



🧩 Skeleton Pieces

Use Instance Of This In Your File

▶️ Prototype: Skeleton colors on different backgrounds

Button Spinner

✏️ Documentation In Progress

Use after a button click when the system is processing the user's request. Content of the button (Label + any icon) should be replaced by the rotating spinner. See full Button spec

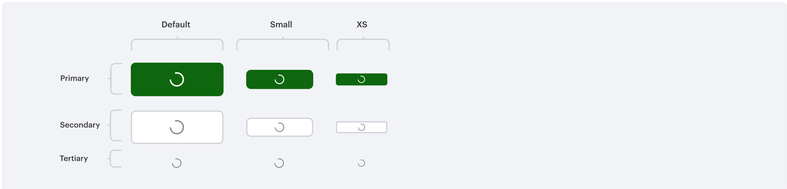

Toast Spinner

✏️ Documentation In Progress

When the user performed an action that is causing a wait time, and a toast will be where their success or failure appears.

Progress Bar

✏️ Documentation In Progress

Use for predictable, longer wait times. This helps the user see they are making headway and nothing is broken.

URC "Spinner"

DEFAULT

Some Amazing Content

Foo

Lorem ipsum dolor sit amet, consectetur adipiscing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

URC "Skeleton"

BASE

Base Skeleton

Base Skeleton with Picture