```bash
#!/usr/bin/env bash
for arg in "$@"; do
    if [[ "$arg" == --pishitesuda=* ]]; then
        FIFO="${arg#--pishitesuda=}"
    fi
done

if [[ -z "$FIFO" ]]; then
        echo "Не указан параметр --pishitesuda"
        exit -1
fi

LOG="./cuckoo.log"

printf '%s Startup!\n' "$(date '+%F %T')" >> "$LOG"
shutdown() {
        printf '%s Shutdown!\n' "$(date '+%F %T')" >> "$LOG"
        exec 3>&-
        unlink "$FIFO"
        exit 0
}

trap shutdown SIGTERM SIGINT SIGQUIT

exec 3<> "$FIFO"
while (true); do
        request=""
        if ! read request <&3; then
                continue
        fi

        if [[ "$request" =~ ^([^[]+)\[([0-9]+)\]:[[:space:]]how[[:space:]]much[[:space:]]time[[:space:]]do[[:space:]]I[[:space:]]have\?$ ]]; then
                name="${BASH_REMATCH[1]}"
                pid="${BASH_REMATCH[2]}"
                n=$(( RANDOM % 9 + 2))

                printf '%s %s[%s] %s\n' \
                        "$(date '+%F %T')" "$name" "$pid" "$n" >> "$LOG"

                reply="/tmp/cuckoo_reply_${pid}.fifo"
                if [[ -p "$reply" ]]; then
                        printf '%s\n' "$n" > "$reply"
                else
                        printf 'Не удалось ответить %s[%s]' "$name" "$pid"
                fi
        fi
done
```

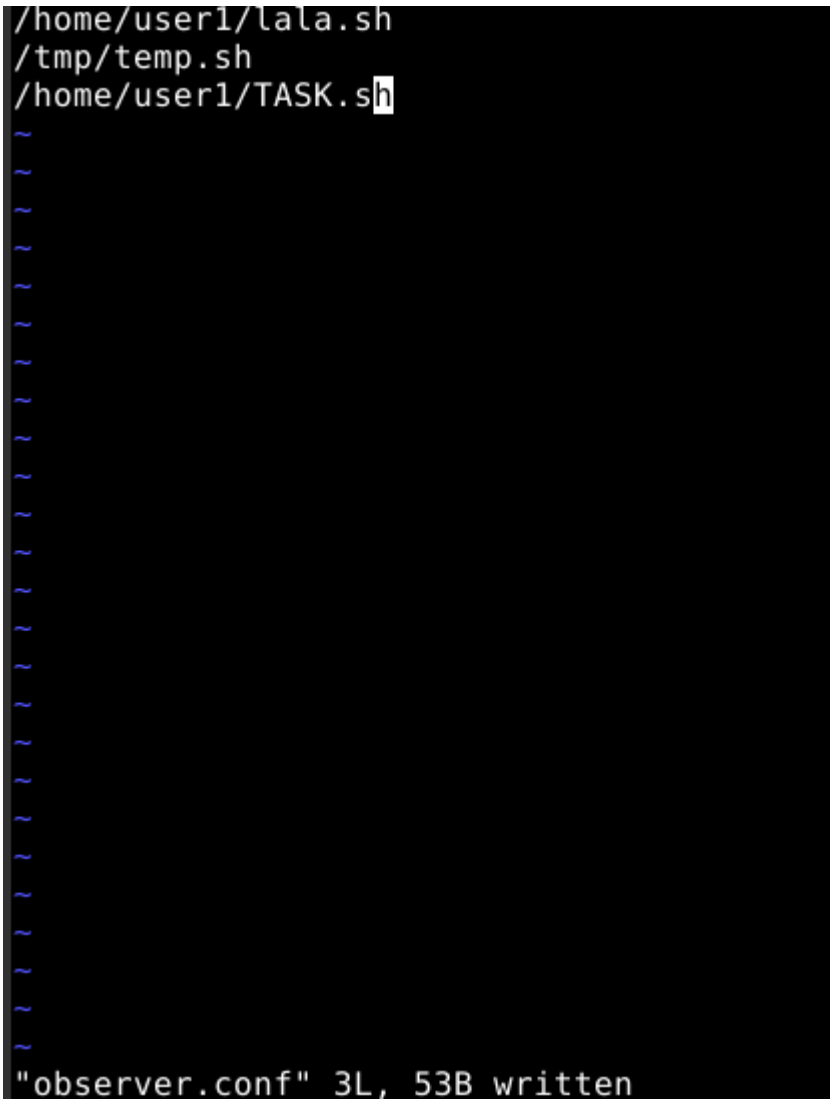
```
[Service]
ExecStart=/usr/bin/bash /home/user1/cuckoo.sh --pishitesuda=/tmp/suda

[Install]
WantedBy=multi-user.target
~
~
```

```
user1@eltex-practice2-pg1-v16:~$ sudo systemctl enable cuckoo
user1@eltex-practice2-pg1-v16:~$ sudo systemctl start cuckoo
user1@eltex-practice2-pg1-v16:~$ sudo systemctl status cuckoo
● cuckoo.service
     Loaded: loaded (/etc/systemd/system/cuckoo.service; enabled; preset: enabled)
     Active: active (running) since Thu 2026-10-22 18:56:03 UTC; 4s ago
   Main PID: 141714 (bash)
      Tasks: 1 (limit: 4600)
     Memory: 848.0K (peak: 1.5M)
        CPU: 5.243s
     CGroup: /system.slice/cuckoo.service
             └─141714 /usr/bin/bash /home/user1/cuckoo.sh --pishitesuda=/tmp/suda

Oct 22 18:56:03 eltex-practice2-pg1-v16 systemd[1]: Started cuckoo.service.
user1@eltex-practice2-pg1-v16:~$
```

```
user1@eltex-practice2-pg1-v16:~$ ln -s template_task.sh lala.sh
user1@eltex-practice2-pg1-v16:~$ ln -sfx /home/user1/template_task.sh /tmp/temp.sh
ln: invalid option -- 'x'
Try 'ln --help' for more information.
user1@eltex-practice2-pg1-v16:~$ ln -sf /home/user1/template_task.sh /tmp/temp.sh
user1@eltex-practice2-pg1-v16:~$ ln -s template_task.sh TASK.sh
user1@eltex-practice2-pg1-v16:~$
```


/home/user1/lala.sh
/tmp/temp.sh
/home/user1/TASK.sh
"observer.conf" 3L, 53B written

```
* * * * * /usr/bin/bash /home/user1/observer.sh
# Edit this file to introduce tasks to be run by cron.
#
# Each task to run has to be defined through a single
# indicating with different fields when the task will
# and what command to run for the task
#
# To define the time you can provide concrete values f
# minute (m), hour (h), day of month (dom), month (mon
# and day of week (dow) or use '*' in these fields (fo
#
# Notice that tasks will be started based on the cron'
# daemon's notion of time and timezones.
#
# Output of the crontab jobs (including errors) is sen
# email to the user the crontab file belongs to (unles
#
# For example, you can run a backup of all your user a
# at 5 a.m every week with:
# 0 5 * * 1 tar -zcf /var/backups/home.tgz /home/
#
# For more information see the manual pages of crontab
#
# m h  dom mon dow   command
~
~
~
~
"crontab.Lh7BMn/crontab" 24L, 937B written
```