
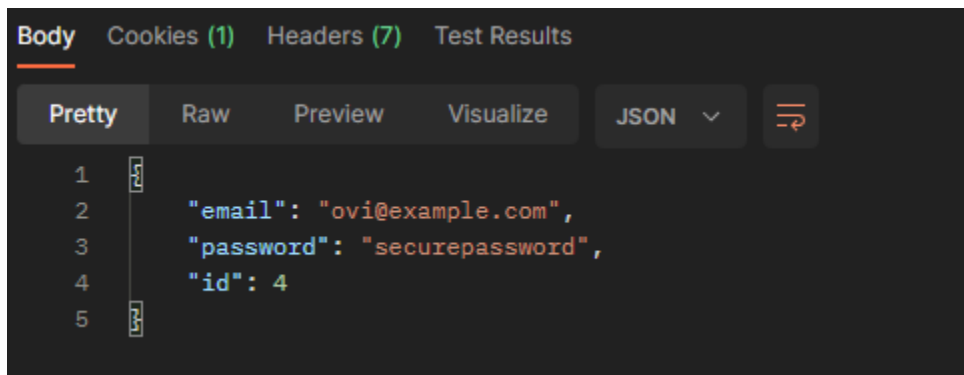


Register

POST <http://localhost:3000/buyer/register>

```
{  
  "email": "ovi@example.com",  
  "password": "securepassword"  
}
```

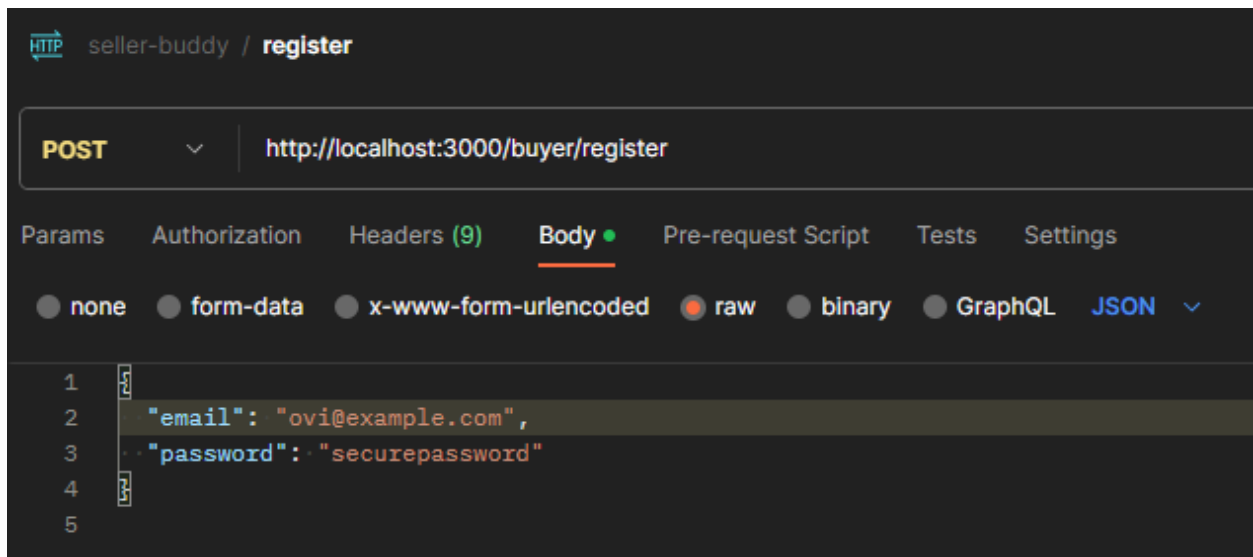

login

POST <http://localhost:3000/buyer/login>

```
{  
  "email": "auyer@example.com",  
  "password": "securepassword"  
}
```

HTTP seller-buddy / login

POST <http://localhost:3000/buyer/login>

Params Authorization Headers (9) **Body** Pre-request Script Tests Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary ☐ GraphQL **JSON** ▼

```
1 {  
2   "email": "buyer@example.com",  
3   "password": "securepassword"  
4 }  
5
```

Body **Cookies (1)** Headers (8) Test Results

Status: 200 OK Time: 105 ms Size: 391 B Save as Example

Name	Value	Domain	Path	Expires	HttpOnly	Secure
connect.sid	s%3AaFyc0V...	localhost	/	Session	true	false

see products

GET <http://localhost:3000/products>

The screenshot shows a REST client interface with the following elements:

- Top bar: **HTTP** seller-buddy / **see products** [Save] [Edit] [Comments]
- Request bar: **GET** [Dropdown] `http://localhost:3000/products` [Send] [Dropdown]
- Tabs: **Params** (selected), Auth, Headers (7), Body, Pre-req., Tests, Settings [More]
- Section: **Query Params**
- Table:

	Key	Value	Des...	...	Bulk Edit
	Key	Value	Description		

The screenshot shows the response body in a REST client interface with the following elements:



- Top bar: **Body** [Dropdown] [Globe] **200 OK** 195 ms 23.85 KB [Save as Example] [More]
- Tabs: **Pretty** (selected), Raw, Preview, Visualize, **JSON** [Dropdown] [Copy] [Search]
- Code editor showing the following JSON:

```
1 [
2   {
3     "id": 9,
4     "name": "Laptop - HP Spectre x360",
5     "price": "1299.99",
6     "description": "Powerful and sleek, perfect for
7                   professionals on the go."
8   },
9   {
10    "id": 10,
11    "name": "Book - Introduction to Computer Science",
12    "price": "39.99",
13    "description": "A comprehensive guide for beginners
14                  in computer science."
15  },
16  {
17    "id": 11,
18    "name": "Mobile Phone - Apple iPhone 13",
19    "price": "999.00",
20    "description": "The latest iPhone with an incredible
21                  camera and performance."
22  }
23 ]
```


addToCart

POST <http://localhost:3000/cart/add>



```
{  
  "productId": 22,  
  "quantity": 2  
}
```

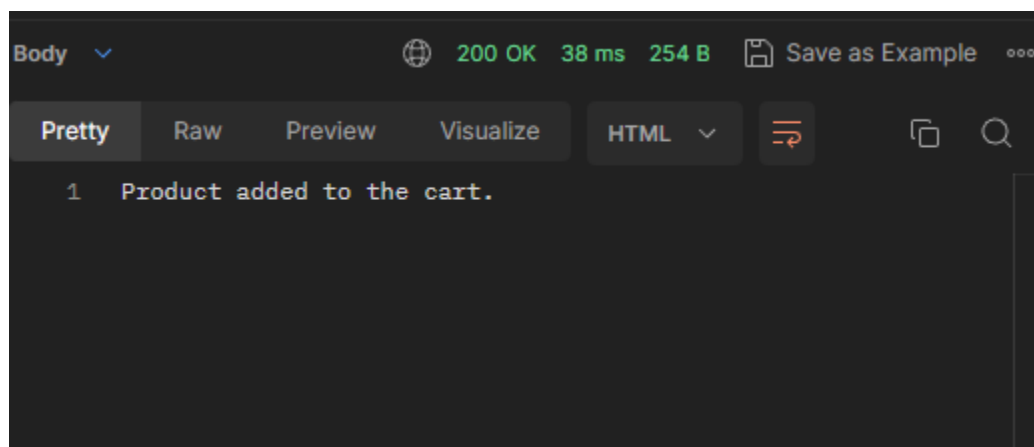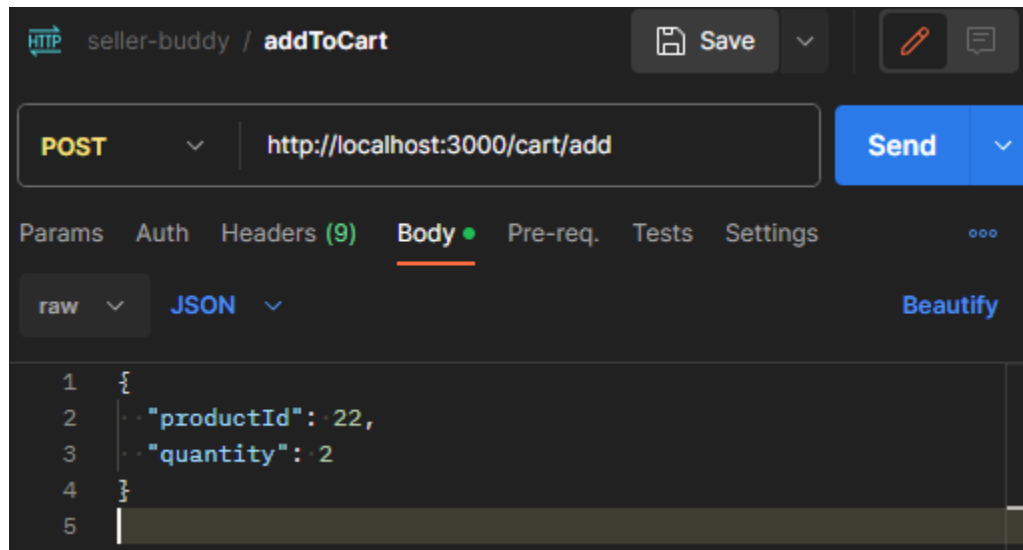

updateCart

POST <http://localhost:3000/cart/update>



```
{  
  "cartItemId": 1,  
  "quantity": 5  
}
```

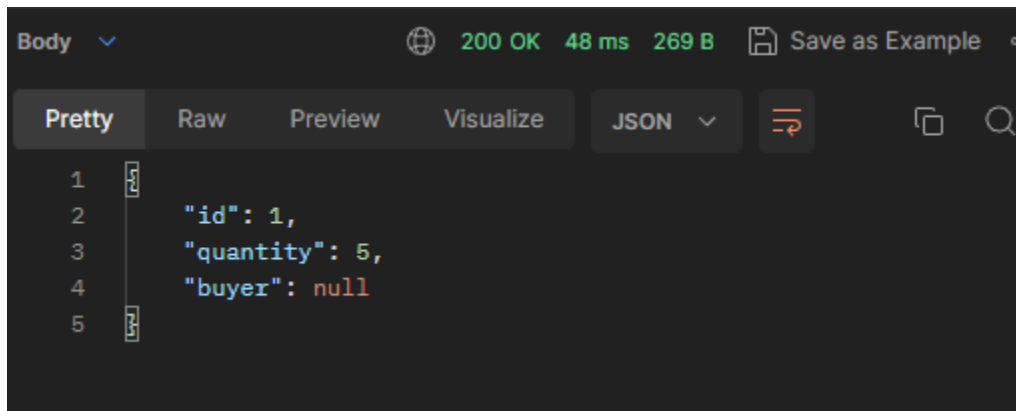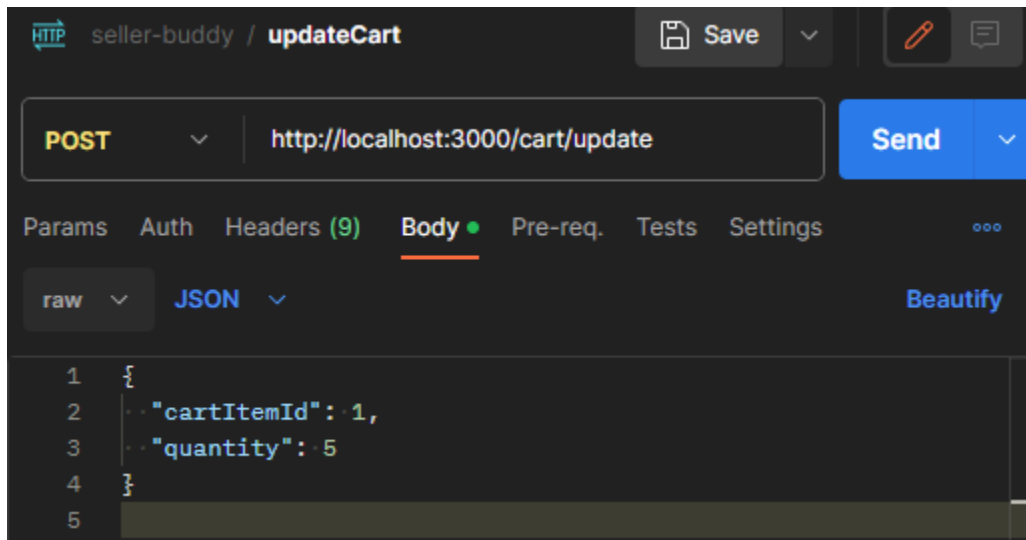

deleteFromCart

POST <http://localhost:3000/cart/delete>

```
{  
  "cartItemId": 1  
}
```

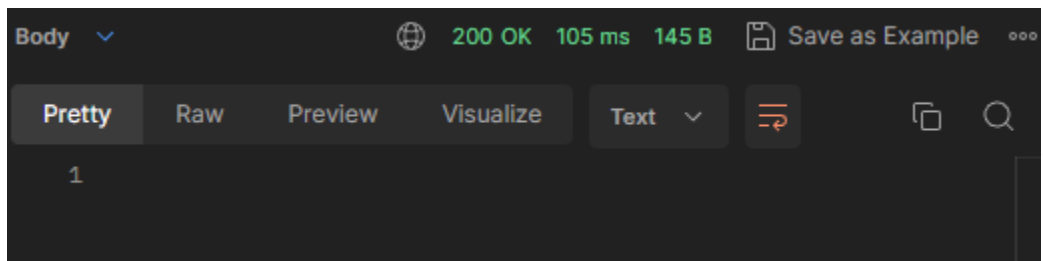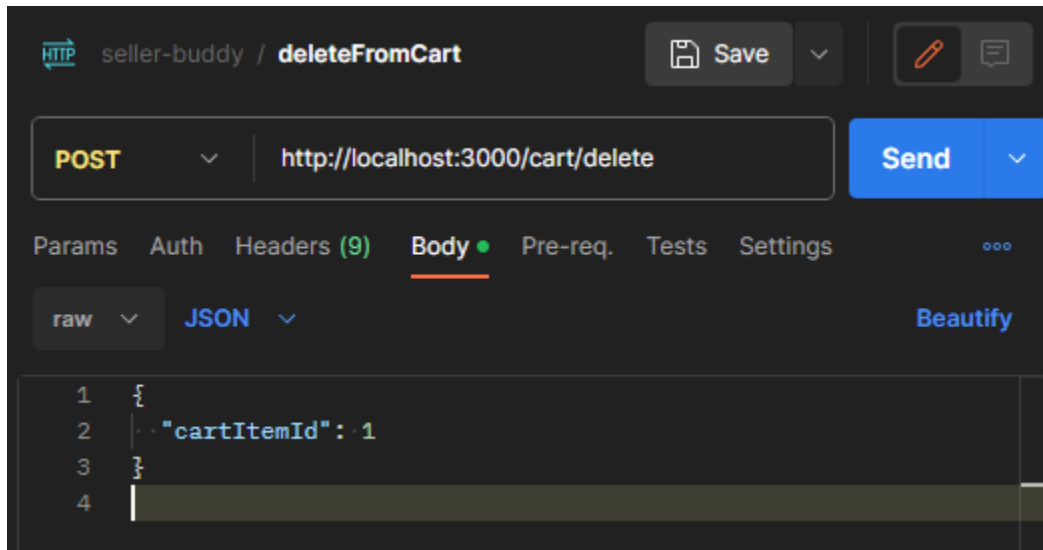

Logout

POST <http://localhost:3000/buyer/logout>

The screenshot shows the configuration for a POST request in an HTTP client. The URL is `http://localhost:3000/buyer/logout`. The interface includes tabs for Params, Auth, Headers (8), Body, Pre-req., Tests, and Settings. The Params tab is active, displaying a table for Query Params.

	Key	Value	Des...	...	Bulk Edit
	Key	Value	Description		

The screenshot shows the response body of the POST request. The status is 200 OK, with a response time of 5 ms and a body size of 266 B. The response is displayed in the Pretty view, showing a JSON object with a message field.

```
1 {
2   "message": "Logout successful"
3 }
```