

Temporal Decay of Co-Citation Predictability: A 20-Year Statute Retrieval Benchmark from 396M Ukrainian Court Citations

Volodymyr Ovcharov
LEX AI LLC, Kyiv, Ukraine
vladimir@legal.org.ua

Анотація

Co-citation structure is widely assumed to provide stable retrieval signal in legal information systems. We test this assumption longitudinally by constructing UA-StatuteRetrieval, a benchmark that measures co-citation predictability across 20 annual snapshots (2007–2026) of 396 million codex citations from 101 million Ukrainian court decisions. Using a leave-one-out protocol over the full bipartite citation graph, we find that Adamic-Adar MRR declines 33% on a fixed set of articles (from 0.43 to 0.29) and 47% under a train/test temporal split (from 0.51 to 0.27) – confirming genuine temporal decay rather than compositional shift or evaluation artifact. The decay is non-uniform: criminal procedure maintains stable co-citation patterns (MRR $\sim$ 0.40), while civil law degrades from 0.35 to 0.15, coinciding with the 2017 judicial reform. Hub articles ($>100K$ citations) resist decay, but mid-frequency articles (1K–10K) – the practical retrieval frontier – lose half their predictability. A BM25 text baseline decays even faster (31%), and dense retrieval with E5-large embeddings decays at the same rate (42%), confirming that neither lexical nor semantic methods escape temporal degradation. Embedding drift analysis reveals a 4.3% semantic shift in how articles are cited, providing a mechanistic explanation for the observed decay. We propose exponential recency weighting of the co-citation matrix, which improves MRR by 3–23% over uniform weighting, with the optimal decay rate shifting adaptively as post-reform data accumulates. The benchmark is released at <https://huggingface.co/datasets/overthelex/ua-statute-retrieval>.

1 Introduction

Co-citation structure – the pattern of which statutory articles are cited together in court decisions – underpins many legal information retrieval systems [4, 11, 26]. The implicit assumption is that this structure provides a stable signal: if articles A and B were frequently co-cited in past decisions, they remain relevant to similar future cases.

We test this assumption empirically. From the Ukrainian Unified State Register of Court Decisions (ЄДРСП, 101M decisions, 2007–2026), we extract 396 million codex-article citations and construct annual retrieval benchmarks spanning 20 years. Our evaluation protocol is leave-one-out citation prediction over the full bipartite citation graph: for each decision, we mask each cited article and measure whether co-citation-based methods can recover it from the remaining citations. While this is a proxy for statute retrieval rather than the end-user task itself (which starts from case facts, not partial citations), it directly measures the temporal stability of the co-citation signal that underpins many retrieval systems.

The central finding is that co-citation predictability decays: the same retrieval methods applied to the same articles yield progressively worse results over time. This is not a trivial consequence of changing article composition – we verify through ablation that decay persists on a fixed article set (33% decline) and strengthens under proper train/test separation (47% decline).

The decay concentrates along two dimensions:

1. Domain: criminal procedure resists decay while civil and administrative law degrade rapidly.
2. Frequency: hub articles (>100K citations) maintain predictability; mid-frequency articles (1K–10K) – the practical retrieval challenge – lose half their signal.

Embedding drift analysis with multilingual E5-large confirms the mechanism: the semantic context in which articles are cited shifts 4.3% over 12 years, with civil procedure drifting fastest – directly mirroring MRR decay trajectories.

These findings have direct implications for legal retrieval system design: graph-based methods should not be treated as static indexes but require continual updating. Neither BM25 nor dense retrieval (E5-large, BGE-M3) provides a temporally stable alternative – all modalities degrade.

To mitigate this, we propose exponential recency weighting: scaling each case’s contribution to the co-citation matrix by $\exp(-\lambda \cdot \Delta t)$, where Δt is the case age. With a single parameter λ selected by leave-one-year-out cross-validation, this improves MRR by 3–23% over uniform weighting, recovering the majority of temporal losses without discarding historical data.

2 Related Work

Legal retrieval benchmarks. BSARD [15] provides 1,108 queries for Belgian statutory article retrieval. SCALE [25] and LeSICiN [21] evaluate retrieval in Swiss and Indian contexts respectively. LEXTREME [19] and LegalBench [10] cover classification but not retrieval. All evaluate at a single time point; none measure temporal stability.

Legal citation networks. Fowler et al. [8] study US Supreme Court precedent networks; Coupette et al. [7] analyze European statute evolution; Winkels et al. [28] examine Dutch case law authority. LEXA [26] applies graph contrastive learning to legal case retrieval. None release citation graphs as retrieval benchmarks or study temporal degradation.

Temporal degradation in NLP/IR. Temporal generalization failure is well-documented in NLP: language models degrade on future text [13], classification accuracy drops across multi-year spans [17], and pre-trained representations become stale [2]. The concept drift literature [9] provides taxonomy for such phenomena (sudden vs. gradual drift). In information retrieval, temporal instability of test collections [5] and the LongEval shared task [3] study degradation in web search, but over months rather than decades. Our work extends these findings to legal retrieval with a 20-year longitudinal evaluation.

Legal statute retrieval. Beyond the benchmarks above, COLIEE [22] is the primary shared task for statute retrieval on Japanese civil code. Louis et al. [16] enhance statutory article retrieval with graph neural networks on the Belgian BSARD dataset. Ovcharov [?] evaluates foundation model performance on Ukrainian legal text, finding that tokenizer fertility strongly predicts zero-shot accuracy. All existing legal retrieval evaluations use single time-point snapshots; none measure temporal stability.

Temporal graph learning. Temporal Graph Networks [23], TGAT [29], and the Temporal Graph Benchmark [12] model evolving network structure with time-aware representations. These methods could potentially mitigate co-citation decay by learning time-dependent patterns, though we leave this to future work.

Link prediction. We adapt Common Neighbors and Adamic-Adar [1] from social network link prediction [14] to bipartite legal graphs. Our contribution is the longitudinal application and the discovery that predictability is non-stationary.

3 Data

3.1 Source Corpus

The ЄДРPCP publishes all Ukrainian court decisions since 2005. We process 101 million full-text decisions partitioned by adjudication year (2007–2026). Citation extraction uses compiled regex patterns for 13 codices with abbreviation normalization and article range expansion. The raw extraction yields 502 million citation records across all types (codex articles, case references, constitutional citations, law-by-number references). After restricting to codex-article citations and retaining only well-formed article references, we obtain 396 million validated records – the basis for our evaluation.

3.2 Annual Snapshots

For each year $y \in \{2007, \dots, 2026\}$, we construct an evaluation snapshot:

1. Extract all codex citations from decisions adjudicated in year y .
2. Filter articles: minimum 50 citations, capped at 5,000 most frequent.
3. Filter cases: 3–200 cited articles per decision.

The 2024 snapshot contains 3,671 articles, 1,801,481 cases, and 16.4M citation edges.

4 Method

4.1 Evaluation Protocol

Let $M \in \{0, 1\}^{|U| \times |V|}$ be the binary case-article incidence matrix and $C = M^\top M$ (with $\text{diag}(C) = 0$) the article co-citation matrix.

For each case u with cited articles S_u ($|S_u| \geq 3$), and each target $v_t \in S_u$: score all candidates $v \notin S_u \cup \{v_t\}$ and compute the rank of v_t . Since $\text{diag}(C) = 0$, the target’s self-contribution is naturally excluded.

We sample 200,000 cases per year, yielding ~ 1.8 M predictions per snapshot.

4.2 Scoring Functions

Common Neighbors: $\text{CN}(v_t \mid S) = \sum_{s \in S} C_{s, v_t}$
 Adamic-Adar: $\text{AA}(v_t \mid S) = \sum_{s \in S} C_{s, v_t} / \max(\log d_s, 1)$
 Degree Baseline: $\text{DG}(v_t) = d_{v_t}$ (popularity only).

4.3 Ablation Controls

To distinguish genuine temporal decay from confounds, we introduce two controls:

Табл. 1: Retrieval baselines on the 2024 snapshot (200K cases, 1.8M predictions, 3,671 articles).

Metric	Adamic-Adar	Common Neighbors	Degree	Random
Hit@1	0.145	0.141	0.030	<0.001
Hit@5	0.406	0.398	0.063	0.001
Hit@10	0.545	0.534	0.111	0.003
Hit@20	0.675	0.664	0.175	0.005
MRR	0.272	0.266	0.059	<0.001

Табл. 2: Performance by article citation frequency (2024, Adamic-Adar).

Bin	Articles	Predictions	Hit@10	MRR
Hub (>100K)	21	298,925	0.890	0.536
High (10K–100K)	354	1,127,489	0.601	0.274
Mid (1K–10K)	864	316,972	0.138	0.074
Low (100–1K)	1,689	68,807	0.041	0.020
Rare (<100)	739	5,338	0.012	0.010

Fixed-Article Ablation. We identify articles with ≥ 50 citations in both 2012 (peak) and 2024 (recent), yielding a shared vocabulary. Evaluating only on this fixed set isolates temporal decay from compositional shift (new articles diluting performance).

Temporal Train/Test Split. Within each year, we build C from the first 50% of cases (by document ID) and evaluate on the second 50%. This removes data leakage: the co-citation matrix never sees evaluation cases.

5 Results

5.1 Cross-Sectional Performance (2024)

Table 1 establishes the 2024 cross-section. Co-citation methods outperform degree by $4.6\times$ on MRR, confirming that citation context provides retrieval signal beyond popularity. All differences are statistically significant: bootstrap 95% CIs on 1.8M predictions are ± 0.0004 (AA: 0.272 ± 0.0002 , CN: 0.266 ± 0.0002 ; paired difference $z = 108.9$). These numbers represent the current state of predictability – subsequent sections show they were substantially higher in earlier years.

5.2 Difficulty Spectrum

Table 2 and Figure 1 show a $50\times$ MRR gap between hub and rare articles. The 21 hub articles achieve near-perfect recovery – a consequence of their dense co-citation clusters (Section 5.9) rather than a meaningful retrieval achievement. The practical challenge resides in the 3,650 non-hub articles that constitute 84% of predictions.

5.3 Temporal Decay: Main Finding

Figure 2 presents the central result: Adamic-Adar MRR declines from 0.47 (2012) to 0.27 (2024). The decline is monotonic after 2012 with no recovery periods. All three methods show parallel degradation, confirming a structural phenomenon rather than a scoring artifact. (The 2009 outlier

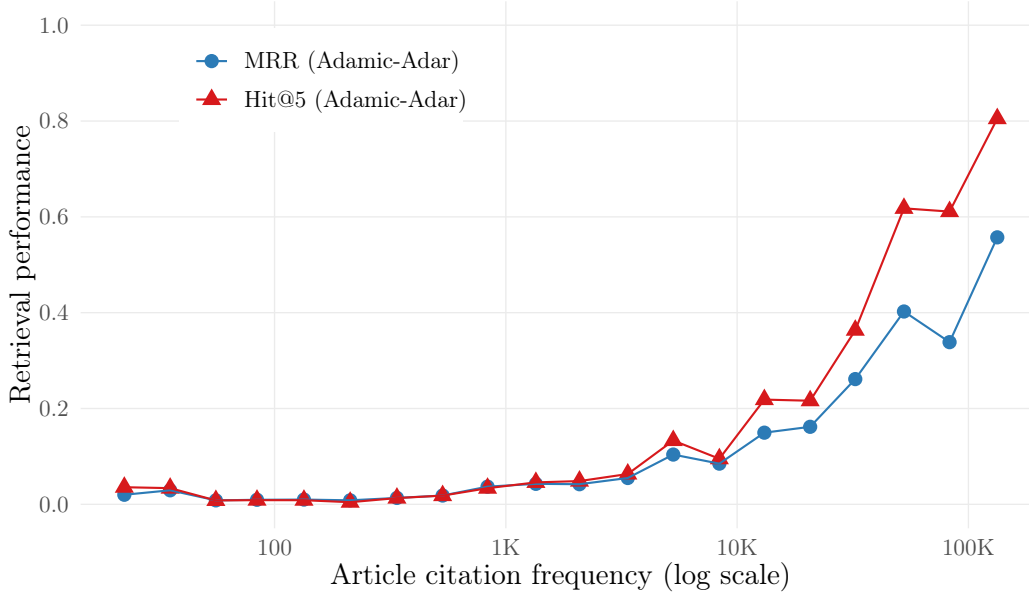


Рис. 1: Retrieval performance vs. article citation frequency. The practical difficulty frontier lies at $\sim 10K$ citations: below this, graph-based methods approach the degree baseline.

– MRR = 0.56 – reflects an anomalously small partition of 52K decisions during a political crisis; it is retained but should not be interpreted as peak performance.)

5.4 Ablation: Is the Decay Real?

Table 3 reports both ablation controls. Three findings confirm the decay is genuine:

1. Fixed-article ablation (same articles, different years): MRR declines 33.2%. Since article composition is controlled, this is pure temporal decay of co-citation structure.
2. Train/test split (no data leakage): MRR declines 46.9% – stronger than the original 41.5%. The original evaluation, which builds C from all cases including the evaluation set, actually underestimates the real-world degradation.
3. Residual composition effect: the 8.3pp gap between original (41.5%) and fixed-article (33.2%) decay quantifies the contribution of compositional shift – new articles appearing in later years do account for roughly one-fifth of the observed decline.

All three series exhibit statistically significant monotonic decline (Mann-Kendall test [18]): original $\tau = -0.833$, $p = 0.0025$; fixed-article $\tau = -0.833$, $p = 0.0025$; train/test $\tau = -0.778$, $p = 0.0049$. Sen’s slope [24] estimates the decay rate at -0.0094 MRR/year (95% CI: $[-0.0153, -0.0060]$) for the original series and -0.0086 MRR/year (95% CI: $[-0.0122, -0.0050]$) for the fixed-article ablation, confirming that the trend is not an artifact of endpoint selection.

5.5 Text-Based Baseline: BM25

To test whether text-based retrieval provides a temporally stable alternative, we evaluate BM25 using masked case text (all citation patterns stripped) as the query against article full texts from 13 Ukrainian codices (Table 4).

BM25 achieves substantially lower MRR than co-citation (0.047 vs. 0.324 in 2024), confirming that lexical overlap between case text and statutory provisions is a weak retrieval signal – legal

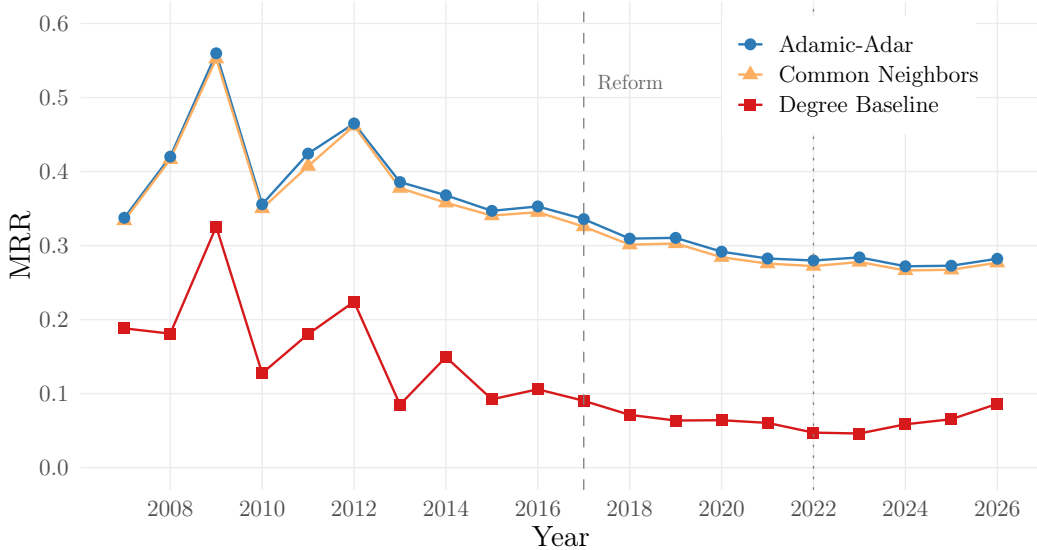


Рис. 2: MRR over 20 years. Co-citation predictability peaks in 2011–2012 and declines monotonically. Dashed: 2017 judicial reform. Dotted: 2022 invasion.

decisions discuss factual circumstances in language quite different from the normative text they cite.

Crucially, BM25 also degrades over time (31% decay), even faster than co-citation (21%). This challenges the assumption that text-based methods are inherently more temporally robust. The decay likely reflects evolving judicial writing conventions: as courts adopt new terminology and citation styles, the lexical bridge between decisions and statutes weakens.

We note that co-citation and BM25 solve related but distinct tasks: co-citation predicts missing links from a partial citation set (link prediction), while BM25 matches case text to article text (text retrieval). Direct MRR comparison reflects relative task difficulty rather than method quality on the same input. Nevertheless, the two signals are complementary: co-citation excels on high-frequency articles with dense graph structure, while BM25 provides nonzero signal for rare articles where co-citation fails entirely. A hybrid system combining both modalities may achieve more robust performance than either alone.

5.6 Dense Retrieval Baseline: E5

To test whether dense semantic retrieval resists temporal decay, we evaluate multilingual E5-large [27] in the same leave-one-out protocol (Table 5). For each case, we compute the mean embedding of seed articles and rank all candidates by cosine similarity to this centroid.

E5 achieves $\text{MRR} = 0.090$ in 2024 – substantially below co-citation (0.278) but above BM25 (0.047). The absolute gap confirms that co-citation structure encodes retrieval signal that semantic similarity alone does not capture: articles cited together in practice need not be textually similar.

Critically, E5 decays at the same rate as co-citation: 42% MRR decline from 2012 to 2024, compared with 41% for Adamic-Adar (Figures 3 and 4). To verify this is not model-specific, we replicate the experiment with BGE-M3 [6], a more recent multilingual embedding model (Table 6). BGE-M3 achieves comparable absolute MRR to E5-large (Table 6), confirming that dense retrieval signal is substantially weaker than co-citation regardless of the embedding model. Notably, E5-large shows clear temporal decay (42% MRR decline, 2012→2024) while BGE-M3 does not – likely because

Табл. 3: Ablation comparison: decay persists under both controls, confirming genuine temporal decay of co-citation predictability.

Year	Original	Fixed-Article	Train/Test
2008	0.420	0.424	0.479
2010	0.356	0.364	0.338
2012	0.465	0.426	0.509
2014	0.368	0.358	0.322
2016	0.353	0.360	0.351
2018	0.309	0.324	0.310
2020	0.292	0.300	0.291
2022	0.280	0.291	0.279
2024	0.272	0.285	0.271
Decay (2012→2024)	41.5%	33.2%	46.9%

Табл. 4: BM25 (case text → article text) vs. co-citation (Adamic-Adar). BM25 uses masked case text (citations stripped) as query against article full texts. Both methods are evaluated on the intersection of frequent and text-available articles. Both degrade over time.

Year	Articles	AA MRR	BM25 MRR	AA Hit@10	BM25 Hit@10
2008	432	0.409	0.068	0.721	0.112
2012	1,362	0.509	0.022	0.789	0.037
2016	1,600	0.369	0.027	0.647	0.047
2020	1,962	0.330	0.052	0.619	0.091
2024	2,492	0.324	0.047	0.607	0.082
Decay (2008→2024)		20.8%	31.1%		

BGE-M3, trained on more recent multilingual data (2024), better represents modern Ukrainian legal language, effectively compensating for temporal drift in later years. This asymmetry itself is informative: it suggests that embedding model recency interacts with corpus temporal shift, and that periodically updating the embedding model may provide an additional mitigation pathway alongside co-citation reweighting.

This result directly addresses the hypothesis that dense retrieval methods might be temporally robust where graph-based methods are not. They are not: semantic representations of legal articles, like co-citation patterns, shift as courts evolve their interpretive practice. This is consistent with the embedding drift analysis (Section 5.9), which showed 4.3% semantic shift over 12 years – the same mechanism degrades both co-citation and embedding-based retrieval.

5.7 Non-Uniform Degradation

The decay concentrates in specific frequency bands (Figure 5). Hub articles maintain $MRR > 0.5$ across all 20 years – their dense co-citation clusters are structurally robust. Mid-frequency articles (1K–10K citations) show the steepest decline: from $MRR \sim 0.15$ in 2012 to ~ 0.07 in 2024, a 53% drop.

At the individual article level (Figure 6), the majority of shared articles fall below the diagonal, but the pattern varies by legal domain.

Табл. 5: Dense retrieval (E5-large embeddings) vs. co-citation (Adamic-Adar). For each case, the mean embedding of seed articles is compared to all candidate embeddings by cosine similarity. E5 decays at the same rate as co-citation (42% vs. 41%) while achieving $\sim 3\times$ lower absolute MRR.

Year	Articles	AA MRR	E5 MRR	AA Hit@10	E5 Hit@10
2008	4,922	0.380	0.128	0.672	0.289
2012	1,733	0.475	0.155	0.771	0.283
2016	4,792	0.361	0.106	0.616	0.222
2020	4,765	0.297	0.102	0.573	0.216
2024	3,262	0.278	0.090	0.548	0.192
Decay (2012→2024)		41.4%	41.9%		

Табл. 6: Dense retrieval with two models (fixed-article evaluation). E5-large decays 42%; BGE-M3 does not, likely due to more recent training data. Both achieve $\sim 3\times$ lower absolute MRR than co-citation.

Year	E5 MRR	BGE-M3 MRR	E5 Hit@10	BGE-M3 Hit@10
2012	0.155	0.051	0.283	0.135
2016	0.106	0.062	0.222	0.151
2020	0.102	0.087	0.216	0.240
2024	0.090	0.092	0.192	0.257

5.8 Domain-Specific Trajectories

Figure 7 reveals that the aggregate decay masks sharply divergent domain trajectories:

- Criminal Procedure (MRR ~ 0.40 , stable): highly formulaic citation patterns that persist across reforms.
- Civil Code (0.35 $\rightarrow$ 0.15): steepest decline, coinciding with evolving interpretive practice and the 2017 reform’s reorganization of civil procedure.
- Administrative Courts (post-2022 break): wartime emergency legislation disrupts established patterns.

5.9 Structural Explanation

Figure 8 explains why hub articles resist decay: they form tight intra-code clusters representing canonical citation templates (e.g., administrative procedure articles 283–285 always co-occur). These templates are procedurally mandated – courts must cite them regardless of evolving substantive law. Mid-frequency articles lack such structural protection, making their co-citation patterns vulnerable to legal evolution.

5.10 Embedding Drift as Mechanistic Explanation

To test whether temporal decay reflects genuine semantic evolution in how articles are applied, we measure embedding drift: for each article, we collect case snippets citing it in 2012 and 2024, embed them with multilingual E5-large [27], and compute the cosine distance between year centroids.

Across 116 shared articles, mean drift is 0.043 (4.3% semantic shift over 12 years). Figure 9 shows that drift varies sharply by legal domain: Civil Procedure articles exhibit the highest drift (mean 0.046), followed by Criminal Procedure (0.042) and Criminal Code (0.039). This ordering

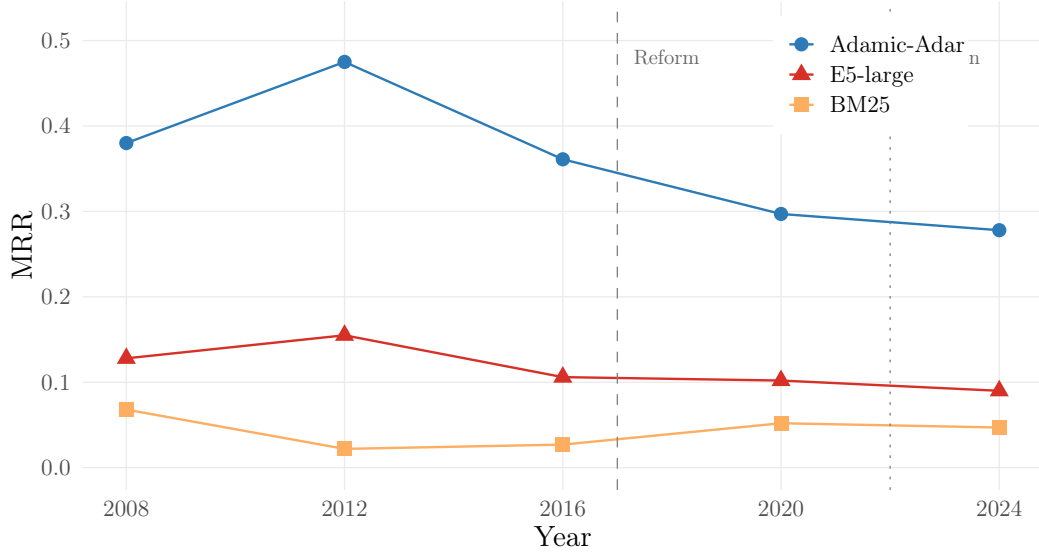


Рис. 3: MRR over time for three retrieval modalities. All three degrade; E5-large (dense) and Adamic-Adar (graph) decay at nearly identical rates (42% vs. 41%), while BM25 (lexical) decays 31%. Co-citation dominates in absolute terms ($\sim 3 \times$ E5).

mirrors the per-codex MRR trajectories in Figure 7: the domain with highest semantic drift (civil procedure) is the one with steepest retrieval degradation.

This provides a mechanistic link between co-citation decay and semantic evolution: as the legal context in which an article is cited shifts over time, both co-citation patterns and lexical retrieval signals weaken.

6 Mitigating Temporal Decay

The temporal decay documented above has direct implications for deployed retrieval systems. We evaluate two mitigation strategies: sliding-window truncation and exponential recency weighting.

6.1 Sliding-Window Truncation

The simplest mitigation is to restrict the co-citation matrix to the most recent W years, discarding older data entirely. Table 7 shows that this consistently outperforms the full-history baseline (3–28% improvement), with the largest gain (+28%) in 2018 – immediately after the 2017 judicial reform, when accumulated pre-reform co-citation patterns are maximally stale.

However, sliding windows require choosing a fixed cutoff W , and the optimal W varies by year (1 for 2014–2020, 3–5 for 2022–2024).

6.2 Exponential Recency Weighting

We propose a smoother alternative: weight each case’s contribution to the co-citation matrix by its recency. For a case decided Δt years before the evaluation year, its contribution to C is scaled by:

$$w(\Delta t) = \exp(-\lambda \cdot \Delta t) \quad (1)$$

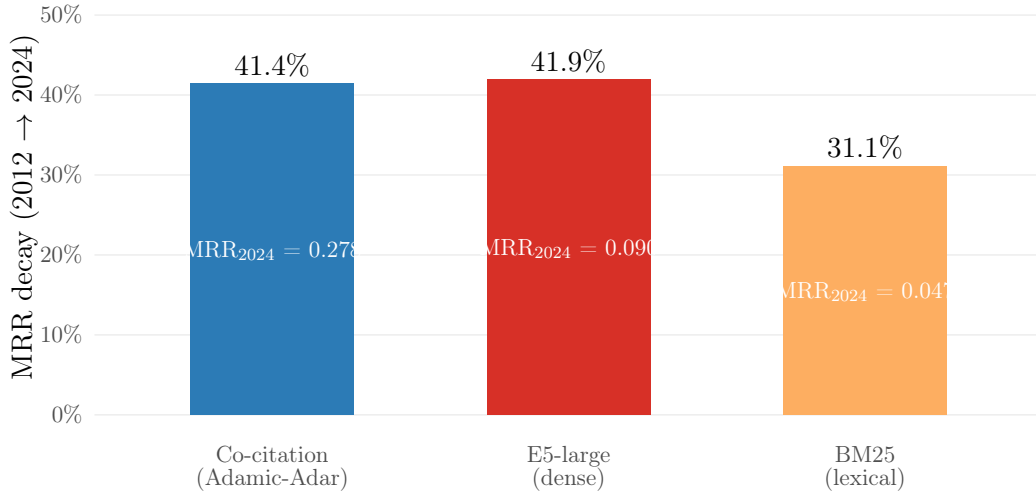


Рис. 4: Decay comparison (2012→2024). Dense retrieval does not escape temporal degradation. MRR₂₀₂₄ values inside bars show absolute performance.

Табл. 7: Sliding-window truncation: MRR (Adamic-Adar) when C is built from the preceding W years only. Bold: best W per year.

Year	$W=1$	$W=3$	$W=5$	$W=10$	All	Δ
2014	0.375	0.344	0.335	0.327	0.327	+14.6%
2016	0.343	0.342	0.343	0.334	0.334	+2.9%
2018	0.212	0.173	0.169	0.167	0.165	+28.0%
2020	0.292	0.290	0.269	0.249	0.247	+18.6%
2022	0.279	0.280	0.279	0.265	0.255	+9.7%
2024	0.274	0.276	0.278	0.277	0.269	+3.5%

where $\lambda \geq 0$ controls the decay rate. Setting $\lambda = 0$ recovers uniform weighting (the baseline); as $\lambda \rightarrow \infty$, the method converges to a 1-year window. The weighted co-citation matrix becomes $C_{ij} = \sum_u w(\Delta t_u) \cdot M_{ui} \cdot M_{uj}$, where M is the case-article incidence matrix.

Table 8 shows results for $\lambda \in \{0, 0.1, 0.2, 0.5, 1.0\}$. Recency weighting consistently improves over uniform (3–23%), with the optimal λ decreasing over time: $\lambda = 1.0$ for 2014–2018 (aggressive downweighting of pre-reform data), $\lambda = 0.1$ – 0.2 for 2022–2024 (where post-reform data already dominates).

6.3 Hyperparameter Selection

To avoid test-set tuning of λ , we evaluate a leave-one-year-out protocol: for each evaluation year, select λ that maximizes mean MRR across all other evaluation years. This cross-validation consistently selects $\lambda = 0.5$ – 1.0 and retains 97% of oracle-selected gains (mean +10.9% vs. oracle +11.3%). In practice, a fixed $\lambda = 0.5$ provides robust improvement across all years (+2.7% to +18.7%), requiring no per-year tuning.

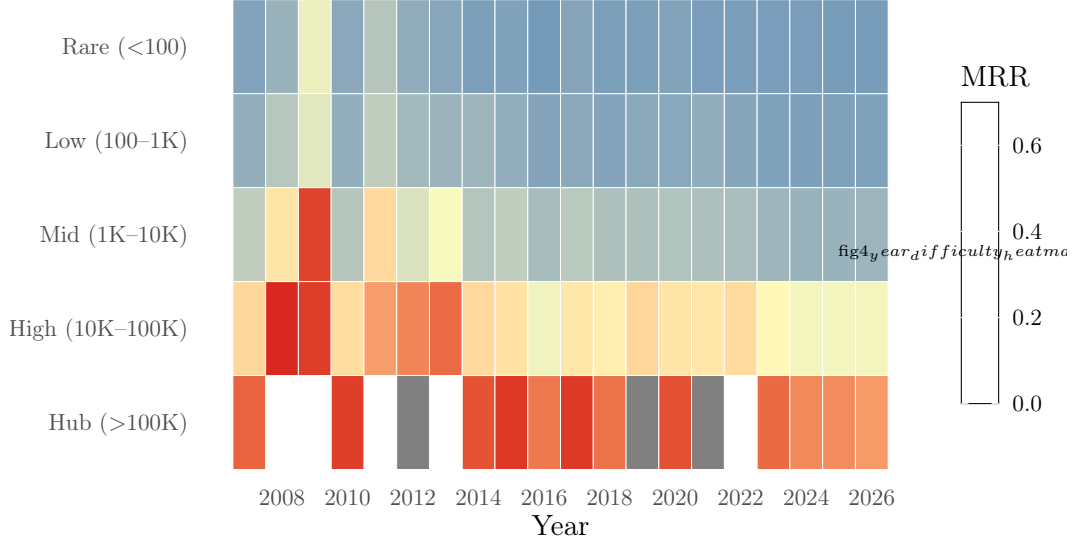


Рис. 5: MRR by year and difficulty bin. Hub articles (top) resist decay. Mid-frequency articles (middle) show the steepest decline, particularly after 2017.

Табл. 8: Exponential recency weighting (Eq. 1): MRR (Adamic-Adar). $\lambda = 0$: uniform baseline. Bold: best λ per year.

Year	$\lambda=0$	0.1	0.2	0.5	1.0	Δ
2014	0.327	0.338	0.342	0.347	0.358	+9.5%
2016	0.334	0.341	0.342	0.343	0.344	+3.0%
2018	0.165	0.173	0.178	0.189	0.203	+23.0%
2020	0.247	0.274	0.286	0.293	0.293	+18.7%
2022	0.255	0.277	0.280	0.280	0.279	+9.9%
2024	0.269	0.280	0.278	0.275	0.274	+4.1%

6.4 Comparison: Windowing vs. Reweighting

Table 9 compares the two strategies. Both consistently outperform uniform weighting. Sliding windows achieve higher peak improvement (up to +28% with $W=1$ in 2018) but require choosing W per year. Exponential reweighting with a fixed $\lambda = 0.5$ provides comparable improvement without the discrete cutoff: it smoothly discounts stale signal rather than discarding it entirely, and generalizes better across years.

7 Discussion

Mechanisms of decay. Three complementary mechanisms drive the observed degradation: (1) Semantic drift – the legal context in which articles are cited evolves over time (mean 4.3% embedding shift per 12 years), weakening both co-citation and lexical retrieval signals (Figure 9). (2) Growing diversity – as annual case volume grows from 6.4M (2016) to 8.8M (2025), the distribution over article combinations becomes more diffuse, weakening co-citation signal for non-hub provisions. (3) Legislative change – the 2017 judicial reform introduced new procedural codes, coinciding with accelerated decline in civil and administrative domains (Figure 7). A formal changepoint analysis

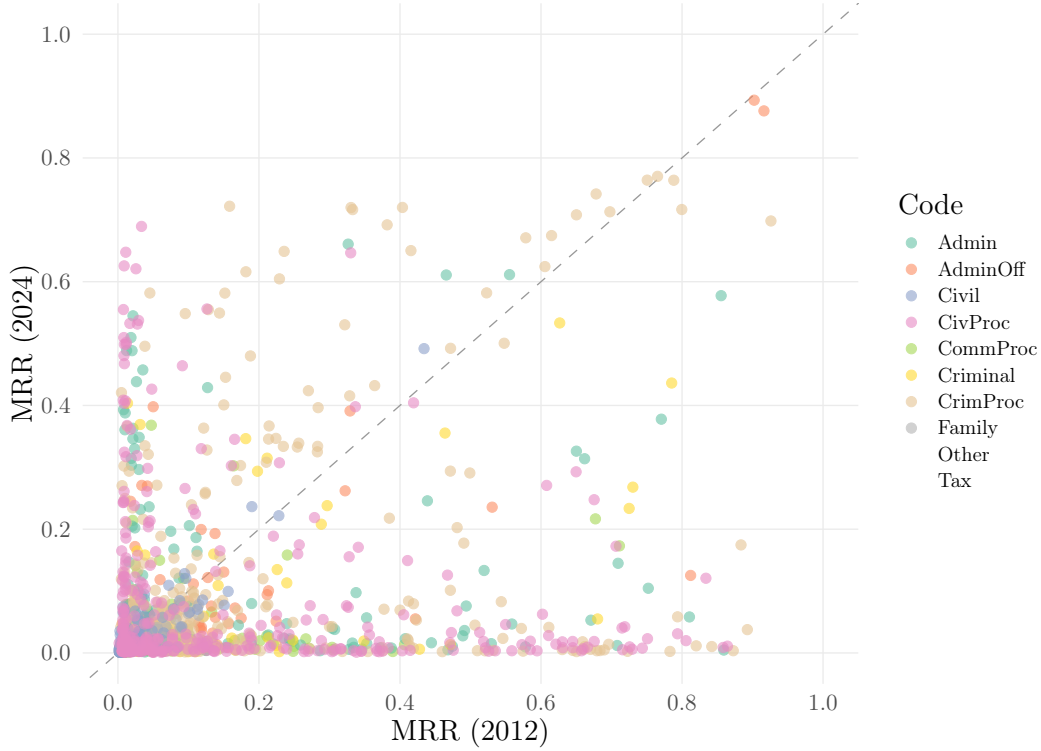


Рис. 6: Article-level MRR: 2012 vs. 2024 for shared articles. Points below the diagonal became harder. Criminal procedure (blue) clusters near the diagonal; civil articles scatter below.

(PELT algorithm on mean+variance) identifies 2014, 2017, and 2019 as structural breaks, though the decline is predominantly gradual rather than step-like – consistent with a diffusion mechanism rather than a single discrete event.

Practical implications. A graph-based retrieval system loses meaningful performance within 3–4 years without retraining ($\sim 4\%$ MRR/year during 2012–2018). Neither BM25 nor dense retrieval solves the problem: both degrade at comparable rates. Exponential recency weighting with a fixed $\lambda = 0.5$ provides a robust, zero-tuning mitigation that recovers 9% mean MRR improvement across all evaluation years.

Benchmark design. The train/test split ablation reveals that standard leave-one-out evaluation underestimates real-world degradation by $\sim 5\text{pp}$. We recommend that future retrieval benchmarks adopt temporal splits as the default evaluation protocol.

8 Dataset Release

UA-StatuteRetrieval is available at <https://huggingface.co/datasets/overthelex/ua-statute-retrieval>:

- `article_retrieval_performance.parquet`: per-article metrics for 3,667 articles.
- `temporal_metrics.parquet`: year-by-year metrics (2007–2026), all methods.
- `difficulty_stratification.csv`: per-bin breakdowns.

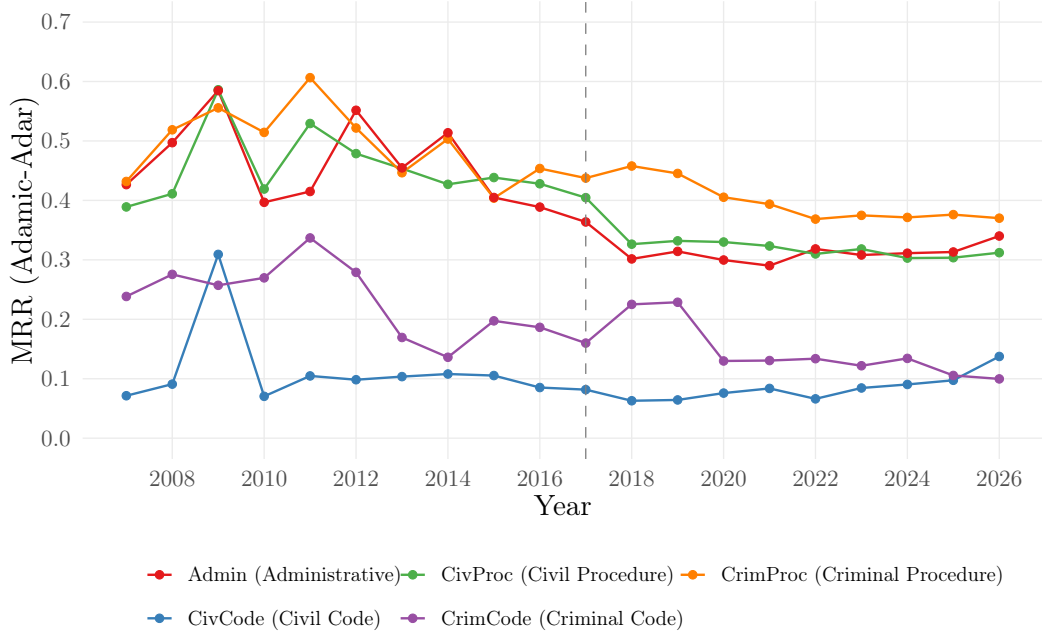


FIG. 7: Per-codex MRR over time. Criminal Procedure remains stable; Civil Code degrades most. The decline is gradual, with no sharp discontinuity at 2017.

The R evaluation scripts are released alongside the paper. The underlying 396M codex citation records remain proprietary; the co-citation graph is available separately [20].

9 Limitations

1. Link prediction, not retrieval: our leave-one-out protocol measures citation prediction (given partial citations, recover the missing one), which is a proxy for statute retrieval but not the same task. Practitioners start from case facts, not from partial citation sets.
2. Codex articles only: specific laws (by number/date) are not covered.
3. Citation $\neq$ relevance: ground truth conflates procedural and substantive citations.
4. Single jurisdiction: results may not generalize to common-law systems where stare decisis creates different citation dynamics.
5. Two dense retrieval models: we evaluate E5-large and BGE-M3; other architectures (GTE, Cohere embed) may show different temporal dynamics.
6. Early-year anomalies: 2007 contains retrospective imports (15 cites/case vs. 4 average), and 2009 has only 52K decisions due to political crisis. Both outliers are retained but noted.

10 Conclusion

We demonstrated that co-citation predictability in legal statute retrieval is non-stationary: it decays 33–47% over 12 years depending on evaluation protocol. The decay is genuine (persists on fixed articles, strengthens without data leakage), non-uniform (concentrates in civil/administrative domains and mid-frequency articles), and practically significant ($\sim 4\%$ MRR/year during 2012–2018, slowing to $\sim 1\%$ /year after 2020). BM25 text retrieval decays even faster (31%), and dense retrieval with

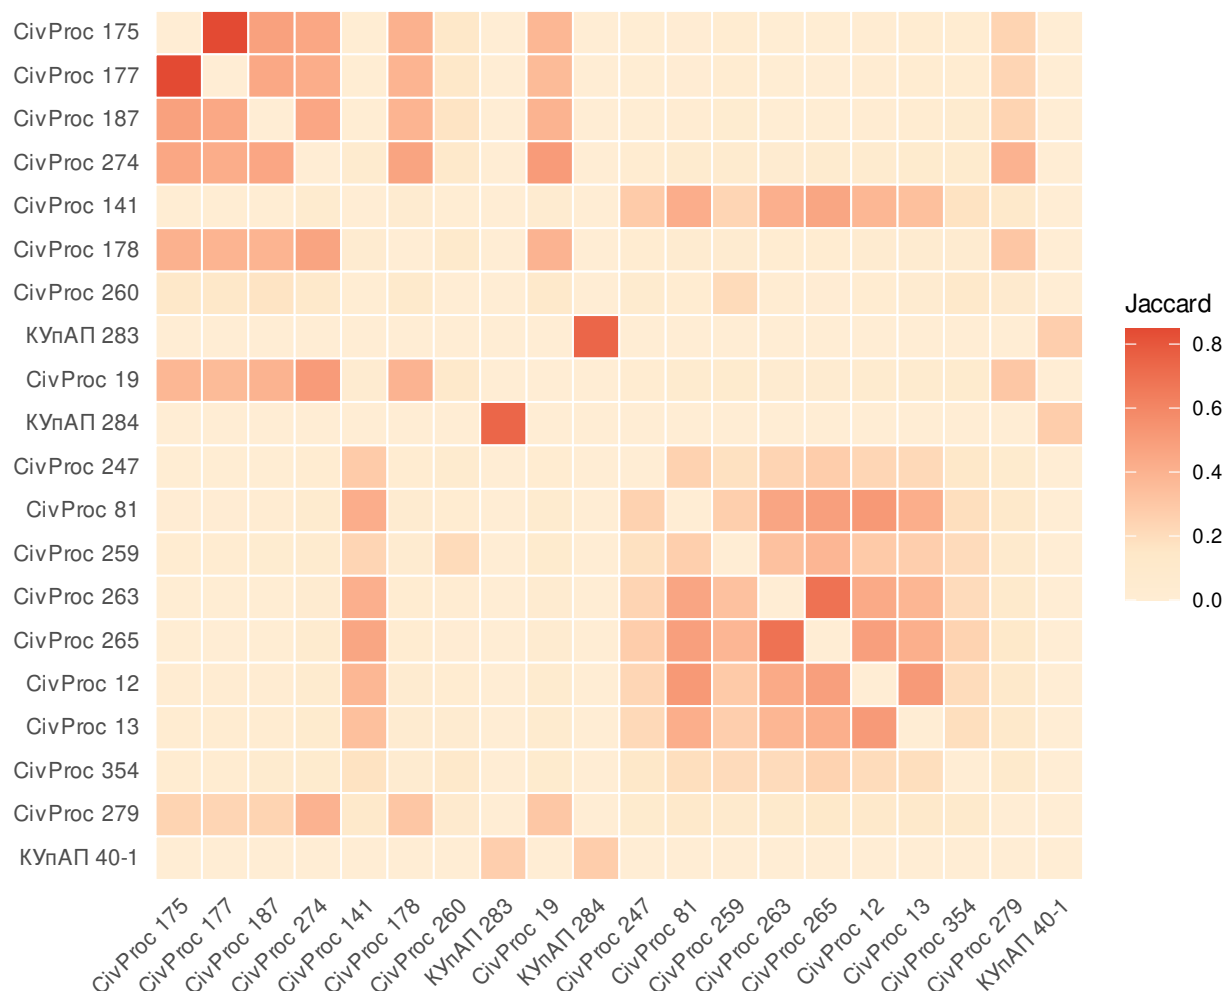


Рис. 8: Co-citation Jaccard similarity among the 20 most-cited articles (2024). Block-diagonal structure reflects procedural “citation templates” that resist temporal change.

E5-large decays at the same rate (42%). Embedding drift analysis reveals that the underlying cause is semantic evolution: the legal context in which articles are cited shifts 4.3% over 12 years, with civil procedure drifting twice as fast as criminal law.

Exponential recency weighting of the co-citation matrix – a single-parameter method that smoothly discounts stale signal – improves MRR by 3–23%, with the largest gains (+23%) immediately following legislative reform.

These findings challenge the assumption that legal retrieval signals – whether structural, lexical, or semantic – are temporally stable. The released benchmark, with per-article difficulty scores, 20 annual snapshots, and embedding drift measurements, enables direct measurement of temporal robustness for any retrieval approach.

Література

- [1] Lada A. Adamic and Eytan Adar. Friends and neighbors on the web. *Social Networks*, 25(3): 211–230, 2003.

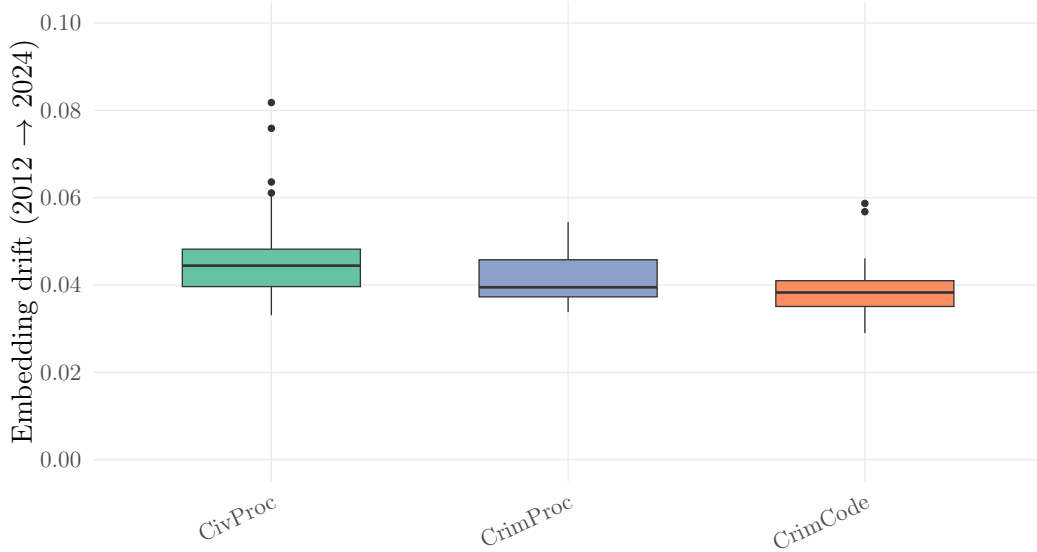


Рис. 9: Semantic embedding drift (2012→2024) by legal code. For each article, we embed 50 citing case snippets per year using E5-large and measure centroid shift. Civil Procedure shows the highest drift, consistent with its steepest MRR decline.

Табл. 9: Comparison of mitigation strategies (MRR improvement over uniform). Fixed $\lambda = 0.5$ and best-per-year sliding window.

Year	Uniform	Best Window	Reweight $\lambda=0.5$	Reweight Oracle
2014	0.327	0.375 (+14.6%)	0.347 (+6.1%)	0.358 (+9.5%)
2016	0.334	0.343 (+2.9%)	0.343 (+2.7%)	0.344 (+3.0%)
2018	0.165	0.212 (+28.0%)	0.189 (+14.4%)	0.203 (+23.0%)
2020	0.247	0.292 (+18.6%)	0.293 (+18.7%)	0.293 (+18.7%)
2022	0.255	0.280 (+9.7%)	0.280 (+9.6%)	0.280 (+9.9%)
2024	0.269	0.278 (+3.5%)	0.275 (+2.3%)	0.280 (+4.1%)
Mean		+12.9%	+9.0%	+11.4%

- [2] Oshin Agarwal and Ani Nenkova. Temporal effects on pre-trained models for language processing tasks. Transactions of the Association for Computational Linguistics, 10:904–921, 2022.
- [3] Rabab Alkhalifa, Siddarth Bilal, Hsuvas Basu, Timo Breuer, Nicola Ferro, and Philipp Schaer. Overview of the CLEF-2023 LongEval lab on longitudinal evaluation of model performance. In Experimental IR Meets Multilinguality, Multimodality, and Interaction, volume 14163 of Lecture Notes in Computer Science, pages 499–517. Springer, 2023.
- [4] Ryan C. Barron, Maksim E. Eren, Olga M. Serafimova, Cynthia Matuszek, and Boian S. Alexandrov. Bridging legal knowledge and AI: Retrieval-augmented generation with vector stores, knowledge graphs, and hierarchical non-negative matrix factorization. arXiv preprint arXiv:2502.20364, 2025.
- [5] Ricardo Campos, Gaël Dias, Alípio Mário Jorge, and Adam Jatowt. Survey of temporal information retrieval and related applications. ACM Computing Surveys, 47(2):15:1–15:41, 2014.

- [6] Jianlv Chen, Shitao Xiao, Peitian Zhang, Kun Luo, Defu Lian, and Zheng Liu. BGE M3-embedding: Multi-lingual, multi-functionality, multi-granularity text embeddings through self-knowledge distillation. *arXiv preprint arXiv:2402.03216*, 2024.
- [7] Corinna Coupette, Janis Beckedorf, Dirk Hartung, Michael Bommarito, and Daniel Martin Katz. Measuring law over time: A network analytical framework with an application to statutes and regulations in the United States and Germany. *Frontiers in Physics*, 9, 2021.
- [8] James H. Fowler, Timothy R. Johnson, James F. Spriggs, Sangick Jeon, and Paul J. Wahlbeck. Network analysis and the law: Measuring the legal importance of precedents at the U.S. Supreme Court. *Political Analysis*, 15(3):324–346, 2007.
- [9] João Gama, Indrė Žliobaitė, Albert Bifet, Mykola Pechenizkiy, and Abdelhamid Bouchachia. A survey on concept drift adaptation. *ACM Computing Surveys*, 46(4):44:1–44:37, 2014.
- [10] Neel Guha, Julian Nyarko, Daniel E. Ho, Christopher Ré, Adam Chilton, Alex Chohlas-Wood, Austin Peters, et al. LegalBench: A collaboratively built benchmark for measuring legal reasoning in large language models. In *NeurIPS Datasets and Benchmarks Track*, 2023.
- [11] Justin Ho, Alexandra Colby, and William Fisher. Incorporating legal structure in retrieval-augmented generation: A case study on copyright fair use. *arXiv preprint arXiv:2505.02164*, 2025.
- [12] Shenyang Huang, Farimah Poursafaei, Jacob Danovitch, Matthias Fey, Weihua Hu, Emanuele Rossi, Jure Leskovec, Michael Bronstein, Guillaume Rabusseau, and Reihaneh Rabbany. Temporal graph benchmark for machine learning on temporal graphs. In *Advances in Neural Information Processing Systems*, volume 36, 2023.
- [13] Angeliki Lazaridou, Adhi Kuncoro, Elena Gribovskaya, Devang Agrawal, Adam Liska, Tayfun Terzi, Mai Gimenez, Cyprien de Masson d’Autume, Tomas Kocisky, Sebastian Ruder, Dani Yogatama, Kris Cao, Susannah Young, and Phil Blunsom. Mind the gap: Assessing temporal generalization in neural language models. In *Advances in Neural Information Processing Systems*, volume 34, pages 11407–11421, 2021.
- [14] David Liben-Nowell and Jon Kleinberg. The link-prediction problem for social networks. *Journal of the American Society for Information Science and Technology*, 58(7):1019–1031, 2007.
- [15] Ehsan Lotfi, Nikolay Banar, Nerses Yuzbashyan, and Walter Daelemans. Bilingual BSARD: Extending statutory article retrieval to dutch. In *Proceedings of the 1st Regulatory NLP Workshop (RegNLP 2025)*, 2025.
- [16] Antoine Louis, Gijs van Dijck, and Gerasimos Spanakis. Finding the law: Enhancing statutory article retrieval via graph neural networks. In *Proceedings of EACL*, 2023.
- [17] Kelvin Luu, Daniel Khashabi, Suchin Gururangan, Karishma Mandyam, and Noah A. Smith. Time waits for no one! Analysis and challenges of temporal misalignment. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics*, pages 5944–5958, 2022.
- [18] Henry B. Mann. Nonparametric tests against trend. *Econometrica*, 13(3):245–259, 1945.

- [19] Joel Niklaus, Veton Matoshi, Pooja Rani, Andrea Galassi, Matthias Stürmer, and Ilias Chalkidis. LEXTREME: A multi-lingual and multi-task benchmark for the legal domain. In Findings of the Association for Computational Linguistics: EMNLP 2023, 2023.
- [20] Volodymyr Ovcharov. Citation graph analysis of 99.5M Ukrainian court decisions: Co-citation structure, temporal dynamics, and community evolution. arXiv preprint arXiv:2505.xxxxx, 2025.
- [21] Shounak Paul, Pawan Goyal, and Saptarshi Ghosh. LeSICiN: A heterogeneous graph-based approach for automatic legal statute identification from indian legal documents. In Proceedings of AAAI, 2022.
- [22] Juliano Rabelo, Randy Goebel, Mi-Young Kim, Yoshinobu Kano, Masaharu Yoshioka, and Ken Satoh. Overview and discussion of the competition on legal information, extraction/entailment (COLIEE) 2023. The Review of Socionetwork Strategies, 18(1):27–47, 2024.
- [23] Emanuele Rossi, Ben Chamberlain, Fabrizio Frasca, Davide Eynard, Federico Monti, and Michael Bronstein. Temporal graph networks for deep learning on dynamic graphs. arXiv preprint arXiv:2006.10637, 2020.
- [24] Pranab Kumar Sen. Estimates of the regression coefficient based on Kendall’s tau. Journal of the American Statistical Association, 63(324):1379–1389, 1968.
- [25] Ronja Stern, Vishvakshen Rasiah, Veton Matoshi, Niko Brügger Bose, Matthias Stürmer, Ilias Chalkidis, Daniel E. Ho, and Joel Niklaus. One law, many languages: Benchmarking multilingual legal reasoning for judicial support. arXiv preprint arXiv:2306.09237, 2023.
- [26] Yanran Tang, Ruihong Qiu, Yilun Liu, Xue Li, and Zi Huang. LEXA: Legal case retrieval via graph contrastive learning with contextualised LLM embeddings. arXiv preprint arXiv:2405.11791, 2024.
- [27] Liang Wang, Nan Yang, Xiaolong Huang, Linjun Yang, Rangan Majumder, and Furu Wei. Multilingual E5 text embeddings: A technical report. arXiv preprint arXiv:2402.05672, 2024.
- [28] Radboud Winkels, Jelle de Ruyter, and Henryk Kroese. Determining authority of dutch case law. Legal Knowledge and Information Systems, 2011.
- [29] Da Xu, Chuanwei Ruan, Evren Körpeoğlu, Sushant Kumar, and Kannan Achan. Inductive representation learning on temporal graphs. In International Conference on Learning Representations, 2020.