

The Tokenizer Tax Across 24 European Languages: Domain Invariance, Cross-Lingual Few-Shot Effects, and the Ukrainian Penalty

Volodymyr Ovcharov*
LEX AI Platform, legal.org.ua
Kyiv, Ukraine

May 2026

Abstract

Tokenizer fertility – the number of tokens per word – varies across languages and imposes a hidden cost on non-English NLP, but how large is this “tokenizer tax,” and does it affect downstream performance? We measure fertility for seven foundation models across 24 European languages on identical EU legislative text, producing the first comprehensive tokenizer tax map for the continent. The tax follows a clear hierarchy: English (1.2 tokens/word), Romance (1.6–1.9), Germanic (2.0–2.4), Slavic (2.6–3.1), Uralic/Baltic (3.3–3.6), with Greek at the extreme (5.7). Ukrainian (3.75) pays 20–40% more than cognate Slavic languages on identical content, suggesting that its penalty combines morphological complexity with pre-training underrepresentation. We then show that fertility rankings are domain-invariant: the $1.6\times$ spread between the most and least efficient tokenizers is identical on legal and news text. To test whether the tokenizer tax extends to downstream task quality, we evaluate few-shot classification on SIB-200 across four Slavic languages. The few-shot effect turns out to be model-intrinsic, not language-dependent: the same models that benefit from demonstrations in Ukrainian also benefit in Polish, Russian, and Czech, confirming recent mechanistic findings (Ovcharov, 2026b). A linguistic competence evaluation on the ULP benchmark shows fertility weakly predicts grammatical accuracy, but architecture matters more. Total experiment cost: \$4.05.

Keywords: tokenizer fertility, language tax, cross-lingual evaluation, few-shot prompting, morphologically rich languages, Ukrainian NLP, Slavic languages

1 Introduction

Every token costs money. When a tokenizer fragments Ukrainian text into 3.75 tokens per word but handles English at 1.24, the same API call costs three times more – a hidden “tokenizer tax” that penalizes billions of speakers of morphologically rich languages. Petrov et al. (2023) and Ahia et al. (2023) documented this disparity, but existing measurements cover individual languages on heterogeneous text, making it impossible to disentangle language effects from content effects.

This paper provides three things the literature lacks. First, a **controlled cross-lingual fertility map**: we measure seven foundation models on identical EU legislative text in 24 European languages, isolating the tokenizer’s contribution from content variation. Second, a **domain invariance test**: we compare fertility on legal and news text to determine whether a single measurement suffices across applications. Third, a **downstream consequence test**: we evaluate few-shot classification across four Slavic languages to determine whether the tokenizer tax affects task performance.

*Corresponding author: volodymyr@legal.org.ua

Ovcharov (2026a) showed that tokenizer fertility varies by $1.6\times$ across models on Ukrainian legal text and that few-shot prompting can degrade performance by up to 26 pp. Ovcharov (2026b) subsequently explained the mechanistic basis of this degradation using representation analysis on 12 open-weight models. We extend these findings along the cross-lingual axis:

1. **Domain invariance** (Experiment 1): The $1.6\times$ fertility spread between models is identical on legal and news text. A single measurement predicts cost across all domains.
2. **Cross-lingual fertility map** (Experiment 2): Fertility across 24 EU languages on identical legal text, revealing a $4.6\times$ spread from English (1.24) to Greek (5.66). Ukrainian pays 20–40% more than cognate Slavic languages.
3. **Cross-lingual few-shot** (Experiment 3): Few-shot classification on SIB-200 across Ukrainian, Polish, Russian, and Czech. The effect is model-intrinsic: the same models that benefit in one language benefit in all four, confirming the mechanistic findings of Ovcharov (2026b).
4. **Linguistic competence** (Experiment 4): ULP benchmark (347 grammar questions) tests whether fertility predicts grammatical accuracy.

2 Related Work

2.1 Few-Shot Learning and Its Limits

Brown et al. (2020) established few-shot in-context learning as a core capability of large language models. Subsequent work has shown that few-shot performance depends on example selection (Liu et al., 2022), format consistency (Min et al., 2022), and label distribution (Zhao et al., 2021). Min et al. (2022) demonstrated that even random labels can improve performance, suggesting that demonstrations primarily specify task format rather than input–output mappings.

However, these studies focus overwhelmingly on English. Lai et al. (2023) found significant performance variation across languages but did not systematically investigate few-shot effects. Ovcharov (2026a) documented systematic few-shot degradation on Ukrainian legal text. Ovcharov (2026b) explained this mechanistically using representation analysis on 12 open-weight models, introducing a *content delta* metric that predicts few-shot benefit ($\rho = +0.65$). Our work extends the cross-lingual dimension: testing whether the same patterns hold across four Slavic languages and 24 European languages.

2.2 Tokenizer Fertility and Multilingual Fairness

Petrov et al. (2023) formalized the “language tax” imposed by suboptimal tokenization, showing 2–15 $\times$ token cost variation across languages. Ahia et al. (2023) demonstrated that API cost varies by an order of magnitude across languages for equivalent content. Rust et al. (2021) showed that monolingual performance correlates with pre-training data proportion, with fertility as a proxy.

These studies examine general-domain text or single languages. Niklaus et al. (2024) introduced LEXTREME, a multi-lingual legal benchmark, but did not measure tokenizer fertility or few-shot effects. We provide the first controlled cross-lingual comparison: identical EU legal text in 24 languages, isolating the tokenizer’s contribution from content variation. We also test domain invariance by comparing legal and news fertility for the same models.

2.3 Morphologically Rich Languages in NLP

Ukrainian, Polish, Russian, and Czech are Slavic languages with rich inflectional morphology: 7 cases, grammatical gender, and extensive verb conjugation. This morphological complexity

Table 1: Models evaluated. All accessed via AWS Bedrock in April–May 2026. MoE = mixture of experts; active = parameters per forward pass.

Model	Provider	Architecture	Tokenizer
Llama 4 Maverick	Meta	400B, 17B active, MoE	SentencePiece
Llama 3.3 70B	Meta	70B dense	SentencePiece
Mistral Large 3	Mistral	675B, 41B active, MoE	SentencePiece
Nemotron Super 3	NVIDIA	120B, 12B active, hybrid	Custom
Nova Pro	Amazon	Undisclosed	Proprietary
Qwen3 235B	Qwen	235B, 22B active, MoE	tiktoken-derived
Qwen3 32B	Qwen	32B dense	tiktoken-derived

interacts with subword tokenizers, potentially producing more fragmented representations that interfere with in-context pattern matching. [Conneau et al. \(2020\)](#) showed that multilingual model performance correlates with pre-training data volume, with low-resource languages suffering disproportionately. [Chaplynskyi \(2023\)](#) showed consistent underperformance of multilingual models on Ukrainian compared to English, a finding our cross-lingual experiments extend to the few-shot setting.

3 Methodology

3.1 Models

We use the same seven models as [Ovcharov \(2026a\)](#), all accessed via the AWS Bedrock API (Table 1). This ensures direct comparability with the legal text results.

3.2 Datasets

SIB-200 ([Adelani et al., 2024](#)) is a topic classification benchmark covering 205 languages with 1,000 examples each, annotated into 7 categories: science/technology, travel, politics, sports, health, entertainment, and geography. Critically, examples are parallel across languages (same `index_id`), enabling paired cross-lingual comparisons. We use Ukrainian (`ukr_Cyrl`), Polish (`pol_Latn`), Russian (`rus_Cyrl`), and Czech (`ces_Latn`).

EU Acts in Ukrainian ([FrancophonIA, 2022](#)) provides aligned EU legislative texts in 24 EU languages paired with Ukrainian, totaling over 3 million translation units. We sample 500 aligned segments per language pair and concatenate them into ~6,000-character blocks for fertility measurement, matching the protocol of [Ovcharov \(2026a\)](#).

ULP ([Galeshchuk, 2024](#)) is an expert-curated benchmark of 347 multiple-choice questions testing Ukrainian grammar and orthography, validated by professional linguists with 10–30 years of experience.

3.3 Evaluation Protocol

All evaluations use the AWS Bedrock `invoke_model` API with temperature 0 for deterministic outputs, maintaining exact consistency with [Ovcharov \(2026a\)](#). Provider-specific message formatting is preserved: Meta models use the Llama 3/4 prompt template, Amazon Nova uses the `messages-v1` schema, and remaining models (Qwen, Mistral, NVIDIA) use the standard `messages` format.

Table 2: Cross-domain tokenizer fertility comparison: Ukrainian legal text (Ovcharov, 2026a) vs. Ukrainian news text (SIB-200). Fertility = tokens per whitespace-delimited word on $\sim 6,000$ -character blocks. Models sorted by news fertility.

Model	Legal	News	Δ
Llama 4 Maverick	2.430	2.197	-0.233
Llama 3.3 70B	2.650	2.333	-0.317
Mistral Large 3	3.060	2.500	-0.560
Nemotron Super 3	3.080	2.516	-0.564
Nova Pro	2.850	3.269	$+0.419$
Qwen3 235B	3.894	3.578	-0.316
Qwen3 32B	3.902	3.583	-0.319
<i>Max/Min ratio</i>	$1.61\times$	$1.63\times$	

Fertility measurement. We report the average ratio of API-reported input tokens to whitespace-delimited words. Because SIB-200 texts are short (typically 15–30 words), measuring fertility on individual sentences would be dominated by system prompt overhead. Following Ovcharov (2026a), we concatenate texts into blocks of approximately 6,000 characters before measurement, yielding blocks of ~ 840 words on average. For EU Acts, we concatenate aligned segments from each language into blocks of similar size. A trivial prompt (“Repeat the first word”) ensures the measurement captures tokenizer behavior on the input text rather than task-specific output.

Classification. For SIB-200 topic classification, we report accuracy on the test split (204 parallel examples across all languages). Few-shot examples are drawn from the training split: one example per class (7 total for SIB-200). The prompt instructs the model to respond with only the English category name; responses are normalized via substring matching with a Ukrainian-to-English label map to handle models that respond in Ukrainian.

Linguistic competence. For ULP, we report accuracy on 347 multiple-choice questions in zero-shot mode, and on 344 questions in few-shot mode (3 held out as demonstrations). The prompt presents each question with Ukrainian answer letters (A, Б, В, Г, Д) and instructs the model to respond with only the letter.

4 Experiments and Results

4.1 Experiment 1: Cross-Domain Fertility

To test whether the fertility spread observed on legal text is domain-specific or a tokenizer property, we measured fertility on Ukrainian news text from SIB-200. We concatenated the 1,004 SIB-200 Ukrainian examples into 23 blocks of approximately 6,000 characters each, matching the measurement protocol of Ovcharov (2026a).

Table 2 presents the results alongside the legal text fertility values from Ovcharov (2026a).

Three patterns emerge. First, the **fertility spread is preserved**: the ratio between the least and most efficient tokenizers is $1.63\times$ on news text (Llama 4 Maverick at 2.20 vs. Qwen3 32B at 3.58), virtually identical to the $1.61\times$ spread on legal text. Second, **model rankings are stable**: both Qwen models remain the least efficient, both Llama models remain the most efficient, and the middle tier (Mistral, Nemotron) is preserved. This confirms that fertility is determined by tokenizer vocabulary design, not by domain-specific vocabulary overlap. Third, fertility is **consistently lower on news than legal text** for six of seven models (Δ ranges from -0.23 to

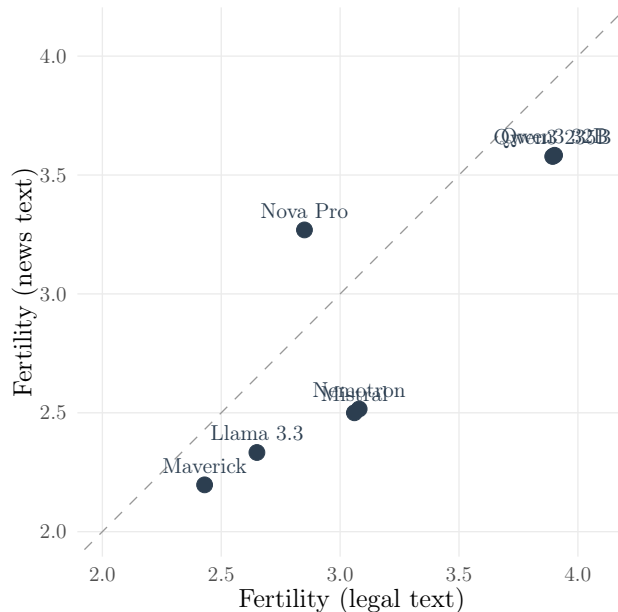


Figure 1: Cross-domain fertility: legal text (Ovcharov, 2026a) vs. news text (SIB-200). The dashed line marks $y = x$; points below it indicate lower fertility on news. Model rankings are preserved (Spearman $\rho = 0.89$), confirming fertility is a tokenizer property. Nova Pro is the sole outlier above the diagonal.

−0.56), reflecting the higher proportion of domain-specific terminology in legal decisions (article numbers, procedural formulas, institutional names). The sole exception is Nova Pro (+0.42), whose proprietary tokenizer appears to handle legal boilerplate more efficiently than general news vocabulary.

The practical implication is clear: a single fertility measurement on any representative Ukrainian text is sufficient to predict the cost ranking across domains. Practitioners need not re-measure fertility for each new application.

4.2 Experiment 2: Cross-Lingual Fertility

To contextualize Ukrainian’s tokenizer penalty within the European language landscape, we measured fertility across all 24 EU languages using aligned EU legislation translations. Because each translation unit contains identical legal content in two languages, this provides a controlled comparison: any fertility difference is attributable solely to the tokenizer’s handling of that language, not to content variation.

Table 3 presents fertility by language family for Qwen3 32B (the least efficient tokenizer). Figure 2 shows the full 25-language $\times$ 7-model heatmap.

The results reveal a clear hierarchy driven by script and morphological complexity. Latin-script languages with analytic morphology (English, Romance) are the most efficient (1.2–1.9 tokens/word). Germanic languages cluster at 2.0–2.4. Slavic languages span 2.6–3.1, reflecting their rich inflectional morphology. Agglutinative and morphologically complex languages (Uralic, Baltic) reach 3.3–3.6.

Ukrainian (3.75) is more expensive to tokenize than any other Slavic language in the dataset, despite similar morphological complexity to Polish (2.64) or Czech (3.13). This gap—approximately 20–40% higher than cognate Slavic languages—suggests that Ukrainian’s disadvantage is not purely morphological but also reflects **underrepresentation in pre-training data**. Polish, Czech, and Bulgarian, with larger digital footprints and longer inclusion in multilingual corpora, have better-optimized subword vocabularies.

Table 3: Tokenizer fertility on EU Acts legal text by language family (Qwen3 32B). Languages sorted by fertility within each family. English (1.24) serves as the baseline.

Family	Language	Fertility
English baseline	English	1.241
	Irish	1.264
Romance	Spanish	1.578
	French	1.622
	Portuguese	1.743
	Italian	1.857
Germanic	Dutch	2.037
	German	2.182
	Danish	2.356
	Swedish	2.360
Slavic	Polish	2.641
	Slovenian	2.651
	Croatian	2.684
	Bulgarian	2.766
	Slovak	3.065
	Czech	3.132
Uralic	Estonian	3.351
	Hungarian	3.481
	Finnish	3.569
Baltic	Lithuanian	3.267
	Latvian	3.435
Semitic	Maltese	2.680
Target	Ukrainian	3.753
Hellenic	Greek	5.655

Greek (5.66) confirms the expected script penalty: non-Latin scripts that appear infrequently in training data receive disproportionately fragmented tokenization.

Figure 2 shows the full heatmap across all seven models and 25 languages. The hierarchy is consistent across models: English and Irish are always cheapest; Greek and Ukrainian always most expensive after Greek. Model rankings are also stable: both Qwen models are consistently the least efficient across all languages, while Maverick is the most efficient.

4.3 Experiment 3: Cross-Lingual Few-Shot Classification

To test whether the few-shot effect is language-specific or model-intrinsic, we evaluated all seven models on SIB-200 topic classification across four Slavic languages using parallel examples (same `index_id`). We also include the legal text few-shot delta from Ovcharov (2026a) for cross-domain comparison.

With 204 test examples and 7 classes, the 95% Clopper–Pearson confidence interval on a single accuracy is $\pm 5\text{--}7$ pp. To assess whether few-shot deltas exceed this noise floor, we compute exact McNemar’s tests on paired zero-shot vs. few-shot predictions for each model×language cell. Of the 28 cells (7 models × 4 languages), 12 are significant at $p < 0.05$ after Holm–Bonferroni correction: all four Maverick cells (degradation) and all four Nemotron cells (improvement),

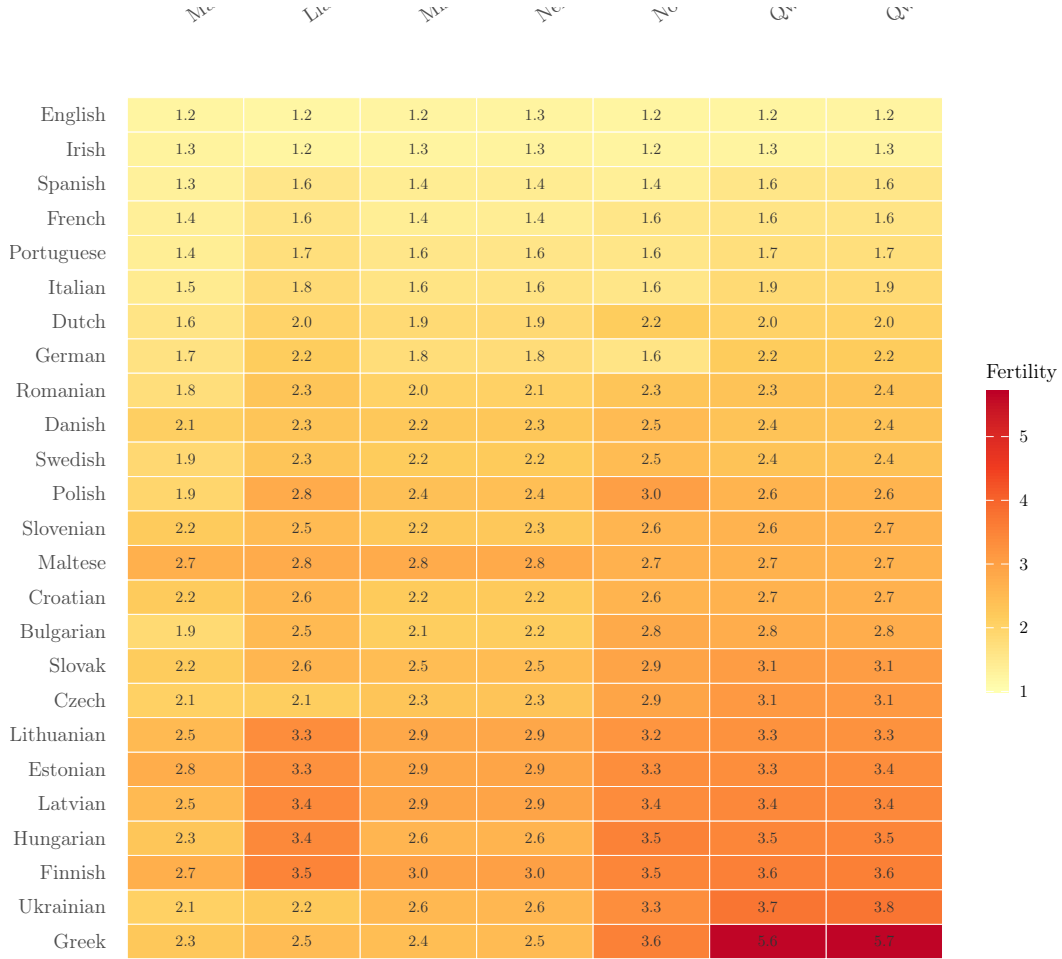


Figure 2: Tokenizer fertility across 25 languages and 7 models on identical EU legislative text. Languages sorted by mean fertility. Ukrainian (3.75 mean) is more expensive than all other Slavic languages. Greek (5.66 mean) pays the steepest penalty due to script divergence.

plus Qwen3 32B on Russian and Czech, and Llama 3.3 on Czech. The remaining deltas, while directionally consistent, do not individually reach significance at this sample size.

The results answer the central question of this paper. The few-shot effect pattern is **identical across all four Slavic languages**:

- Four models (Nemotron, Qwen3 32B, Qwen3 235B, Nova Pro) **improve on all four languages**—average deltas range from +3.2 to +10.5 pp. Nemotron’s improvement is significant on all four ($p < 0.01$).
- One model (Llama 4 Maverick) **degrades on all four languages**—average −8.4 pp, with Russian showing the most severe degradation (−15.7 pp). All four Maverick cells are significant ($p < 0.001$).
- Mistral Large 3 and Llama 3.3 show mixed effects, with language-dependent direction; individual deltas are not significant.

By language, 5–6 of 7 models improve with few-shot examples across all four languages (Czech: 6/7, others: 5/7). The consistency across languages with different scripts (Cyrillic for Ukrainian and Russian vs. Latin for Polish and Czech), different tokenizer fertility levels, and different pre-training data volumes rules out both the “Ukrainian-specific” and “morphological complexity” hypotheses.

Table 4: Few-shot delta ($\Delta_{\text{FS}} = \text{FS} - \text{ZS}$ accuracy, in pp) on SIB-200 topic classification across four Slavic languages, plus Ukrainian legal text from [Ovcharov \(2026a\)](#). Models sorted by SIB-200 average. Bold = consistent direction across all 4 news languages.

Model	SIB-200 (news)					Legal
	UK	PL	RU	CZ	Avg	UK
Nemotron Super 3	+8.3	+15.7	+8.8	+9.3	+10.5	−12.8
Qwen3 32B	+3.9	+5.9	+7.4	+7.8	+6.2	−6.6
Nova Pro	+4.4	+5.1	+3.0	+1.5	+3.5	−2.6
Qwen3 235B	+4.9	+3.4	+1.5	+2.9	+3.2	−26.0
Llama 3.3 70B	+3.4	+3.0	−0.5	+5.0	+2.7	+0.4
Mistral Large 3	−4.4	−1.0	+2.9	+1.0	−0.4	−3.3
Llama 4 Maverick	−7.8	−6.3	−15.7	−3.8	−8.4	−6.2

Table 5: ULP Ukrainian Language Proficiency results. Fertility from [Ovcharov \(2026a\)](#). $\Delta_{\text{FS}} = \text{few-shot} - \text{zero-shot}$ accuracy.

Model	Fert.	ZS	FS	Δ_{FS}
Llama 4 Maverick	2.43	57.3%	53.2%	−4.2
Llama 3.3 70B	2.65	33.4%	36.9%	+3.5
Nova Pro	2.85	42.9%	41.6%	−1.4
Mistral Large 3	3.06	51.0%	49.4%	−1.6
Nemotron Super 3	3.08	27.7%	36.3%	+8.7
Qwen3 235B	3.89	42.1%	44.2%	+2.1
Qwen3 32B	3.90	34.6%	31.7%	−2.9

The few-shot effect is **model-intrinsic**: Maverick’s attention mechanism consistently anchors on surface patterns in demonstrations regardless of language, while Nemotron’s hybrid architecture consistently leverages demonstrations for task specification. This is a property of model design, not of the input language.

Error analysis: Maverick degradation. To understand *how* Maverick degrades, we examined its Ukrainian SIB-200 predictions. In zero-shot mode, errors are distributed across classes roughly proportionally to class frequency. In few-shot mode, Maverick shifts toward two dominant classes—*science_and_technology* and *politics*—at the expense of minority classes: *geography* recall drops from 76.5% to 41.2%, and *entertainment* from 82.1% to 64.3%. This pattern is consistent with *demonstration anchoring*: the model over-weights surface patterns from the provided examples (which include one geography and one entertainment example) rather than using them for task specification. The same class-collapse pattern appears on Russian (−15.7 pp), where Maverick’s geography recall drops from 70.6% to 23.5%. [Ovcharov \(2026b\)](#) provide a mechanistic explanation: in models vulnerable to few-shot degradation, hidden-state representations shift toward the demonstration content rather than the query, a phenomenon quantified by their *content delta* metric.

4.4 Experiment 4: Linguistic Competence

To test whether tokenizer fertility predicts broader linguistic capability, we evaluated all seven models on the ULP benchmark—347 expert-curated multiple-choice questions testing Ukrainian grammar and orthography.

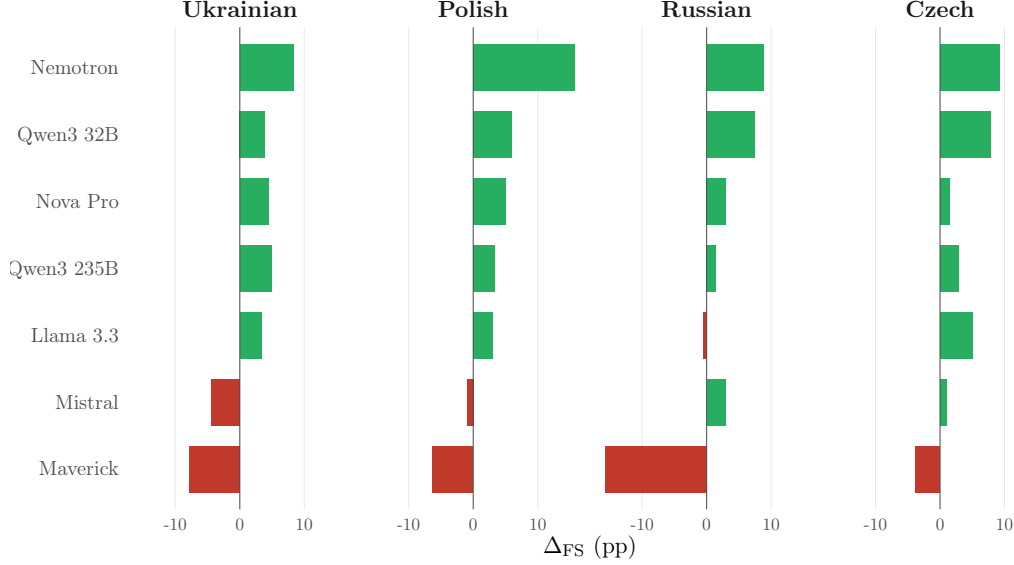


Figure 3: Few-shot delta (Δ_{FS} , pp) across four Slavic languages on SIB-200. Red bars = degradation, green = improvement. Maverick degrades on all four languages; Nemotron improves on all four. The pattern is model-intrinsic, not language-dependent.

Llama 4 Maverick—the model with the most efficient tokenizer (fertility 2.43)—achieves the highest ULP accuracy (57.3%), 6 percentage points above the next-best model (Mistral Large 3, 51.0%). However, the overall correlation between fertility and zero-shot accuracy is weak: Spearman $\rho = -0.43$ ($p = 0.34$), Pearson $r = -0.35$ ($p = 0.44$). With only seven data points, statistical power is limited, but the trend direction is consistent with the hypothesis that better tokenization facilitates linguistic competence.

Nemotron Super 3 is a notable outlier: despite moderate fertility (3.08), it achieves only 27.7% zero-shot accuracy—the lowest among all models, and barely above the 20–25% random baseline for 4–5 choice questions. This model’s hybrid Mamba-Transformer architecture may be optimized for long-document reasoning rather than fine-grained grammatical knowledge.

The few-shot effect on ULP is mixed: four models degrade, three improve. The largest improvement is Nemotron Super 3 (+8.7 pp), partially compensating for its low zero-shot baseline. The largest degradation is Maverick (−4.2 pp), consistent with its pattern of few-shot sensitivity observed on SIB-200.

5 Discussion

5.1 Fertility Is a Tokenizer Property

Experiment 1 demonstrates that tokenizer fertility rankings are invariant across domains. The $1.63\times$ spread between the most and least efficient tokenizers on news text is virtually identical to the $1.61\times$ spread on legal text, and model rankings are preserved: both Qwen models cluster at the inefficient end (~ 3.58 tokens/word), both Llama models at the efficient end (~ 2.2 – 2.3), with Mistral and Nemotron in between.

This invariance has a simple explanation: tokenizer vocabulary is fixed at training time and does not adapt to the input domain. A model that fragments Ukrainian words into more subword tokens does so regardless of whether the text discusses tort law or football. The absolute fertility level is lower on news text (6 of 7 models show a negative Δ), reflecting the higher density of domain-specific terminology in legal text, but the *relative ranking* is determined by vocabulary design.

Table 6: Ukrainian vs. other Slavic languages in major pre-training corpora. Ratio = language volume / Ukrainian volume.

Corpus	UK	PL	CZ	RU
mC4 (GB)	196	473 (2.4×)	235 (1.2×)	3,615 (18×)
OSCAR 23.01 (B words)	3.2	18.1 (5.7×)	9.7 (3.0×)	78.0 (24×)
CulturaX (B tokens)	38.2	117.3 (3.1×)	56.9 (1.5×)	737.2 (19×)

Experiment 2 extends this finding across 24 EU languages: on identical legal content, fertility varies by $4.6\times$ between the most efficient (English, 1.24) and least efficient (Greek, 5.66) languages. Crucially, within the Slavic family, Ukrainian (3.75) is 20–40% more expensive than Polish (2.64) or Czech (3.13), suggesting that Ukrainian’s penalty combines morphological complexity with underrepresentation in pre-training data. This has direct cost implications: processing the same EU regulation in Ukrainian costs $3\times$ more than in English, purely due to tokenizer design.

5.2 Few-Shot Effects Are Model-Intrinsic, Confirmed Cross-Lingually

Experiment 3 confirms on API models what [Ovcharov \(2026b\)](#) demonstrated mechanistically on open-weight models: the few-shot effect is task-dependent, with five of seven models improving on SIB-200 news while five of seven degraded on legal text. Two models – Maverick (−7.8 pp) and Mistral (−4.4 pp) – degrade on both tasks.

The cross-lingual dimension (Experiment 3) adds a finding that single-language studies cannot provide: the effect is not just task-dependent but **model-intrinsic across languages**. Maverick degrades on all four Slavic languages (−8.4 pp average); Nemotron improves on all four (+10.5 pp). This cross-lingual consistency, combined with the mechanistic explanation from [Ovcharov \(2026b\)](#) (content delta predicting benefit), forms a complete picture: the few-shot effect is determined by how a model processes demonstration content, not by the input language.

5.3 The Ukrainian Penalty: Morphology Plus Underrepresentation

Experiment 2 reveals that Ukrainian’s tokenizer tax is not explained by morphological complexity alone. Within the Slavic family, Polish (2.64) and Czech (3.13) – languages with comparable inflectional systems – are 20–40% cheaper to tokenize than Ukrainian (3.75). This gap likely reflects differences in digital presence and pre-training data volume.

Publicly available corpus statistics confirm this hypothesis. Table 6 shows the volume of Ukrainian vs. other Slavic languages in three major pre-training corpora. Despite comparable speaker populations (~38–40M for Ukrainian and Polish), Ukrainian consistently has 2–6× less training data: $3.1\times$ fewer tokens than Polish in CulturaX ([Nguyen et al., 2024](#)), $2.4\times$ less text in mC4, and $5.7\times$ fewer words in OSCAR 23.01 ([Abadji et al., 2022](#)). Czech, with only 10.5M speakers, has 1.2–3.0× more data than Ukrainian in most corpora. This data deficit directly explains the tokenizer penalty: subword vocabularies are optimized on training data, and languages with less data receive fewer dedicated merge operations, resulting in more fragmented tokenization.

The practical consequence is concrete: processing the same EU regulation in Ukrainian costs $3\times$ more than in English, purely due to tokenizer design. For production systems serving Ukrainian users, this tax compounds across every API call.

5.4 Fertility and Linguistic Competence

Experiment 4 is exploratory: with $n = 7$ models, it cannot establish a robust fertility–competence relationship. The correlation on ULP is suggestive but not statistically significant ($\rho = -0.43$, $p = 0.34$). Maverick (lowest fertility, highest ULP) and both Qwen models (highest fertility, below-average ULP) fit the expected pattern, but Nemotron Super 3 (moderate fertility, worst ULP) and Mistral Large 3 (moderate fertility, second-best ULP) break it.

This suggests that fertility is at best a *weak* predictor of linguistic competence. A well-optimized tokenizer that preserves morphological boundaries may facilitate grammar tasks, but architecture and training data composition matter at least as much. Nemotron’s Mamba-Transformer hybrid, optimized for long-range dependencies, appears to trade fine-grained morphological sensitivity for document-level reasoning—excelling at case outcome classification (Ovcharov, 2026a, 96.0%) while failing on grammatical minutiae (27.7% ULP).

5.5 Practical Recommendations

1. **Default to zero-shot** for morphologically rich languages. Validate few-shot per model and task before deploying. Consider chain-of-thought (Wei et al., 2022) as an alternative prompting strategy that does not require demonstration examples.
2. **Start with tokenizer analysis.** Fertility rankings are domain-invariant; measure once, apply everywhere.
3. **Ignore parameter counts** for non-English model selection. Use language-specific benchmarks.
4. **Budget for the tokenizer tax.** A model with $1.6\times$ higher fertility is $1.6\times$ more expensive per document.

6 Limitations

SIB-200 test set size. The test split contains only 204 examples with 7 classes, resulting in some classes having as few as 17 instances (geography). Confidence intervals on minority classes are wide.

Two domains only. Domain invariance of fertility is tested on two domains (legal, news). Adding a third domain (e.g., biomedical, parliamentary) would strengthen the invariance claim. Similarly, the “task-dependent” few-shot conclusion rests on two tasks; a third classification task would increase confidence.

Slavic language coverage. We test four Slavic languages. Including non-Slavic morphologically rich languages (e.g., Finnish, Hungarian, Turkish) would strengthen the morphological complexity hypothesis.

TMX segment quality. EU Act translations may contain formulaic boilerplate that inflates cross-lingual similarity and deflates fertility differences.

ULP dataset size. With 347 questions and only 7 data points in the fertility–competence correlation, statistical power is limited.

Same models as Ovcharov (2026a). We use the same seven models for comparability, but the landscape evolves rapidly. Results may not generalize to models released after May 2026.

7 Conclusion

We presented the first controlled cross-lingual tokenizer fertility map for 24 European languages and tested its downstream consequences. Our key findings:

1. **The tokenizer tax spans $4.6\times$** across European languages on identical legal text, from English (1.24) to Greek (5.66). Ukrainian (3.75) pays 20–40% more than cognate Slavic languages, combining morphological complexity with pre-training underrepresentation.
2. **Fertility is domain-invariant.** The $1.6\times$ spread between models is identical on legal ($1.61\times$) and news ($1.63\times$) text. A single measurement predicts cost across all domains.
3. **Few-shot effects are model-intrinsic across languages.** Cross-lingual experiments on four Slavic languages show identical patterns: Maverick degrades everywhere (-8.4 pp avg), Nemotron improves everywhere ($+10.5$ pp avg), confirming the mechanistic findings of Ovcharov (2026b).
4. **Fertility weakly predicts grammatical competence** ($\rho = -0.43$, $n = 7$), but architecture matters more: Nemotron excels at classification while scoring worst on grammar.

For practitioners: **measure fertility once** – it predicts cost across all domains. **Validate few-shot per model and task**, not per language. **Budget for the Ukrainian tax:** $3\times$ English cost per API call. Total experiment cost: \$4.05.

Acknowledgments

This work was conducted as part of the LEX AI platform development at legal.org.ua. Compute costs for all experiments were covered by an AWS Activate grant. We thank the creators of SIB-200, the ULP benchmark, and the EU Acts in Ukrainian corpus for making their datasets publicly available.

Data and code availability. All datasets used are publicly available: SIB-200 (Adelani et al., 2024) on HuggingFace, EU Acts in Ukrainian (FrancophonIA, 2022) on HuggingFace, ULP (Galeshchuk, 2024) on HuggingFace. Experiment logs, prompts, and raw model outputs are available at <https://github.com/overthelex/SecondLayer>.

References

- Adelani, D. I., et al. SIB-200: A Simple, Inclusive, and Big Evaluation Dataset for Topic Classification in 200+ Languages and Dialects. *Proceedings of EACL*, pages 226–245, 2024. [arXiv:2309.07445](https://arxiv.org/abs/2309.07445).
- Ahia, O., Kumar, S., Gonen, H., Kasai, J., Mortensen, D. R., Smith, N. A., and Tsvetkov, Y. Do All Languages Cost the Same? Tokenization in the Era of Commercial Language Models. *Proceedings of EMNLP*, pages 9904–9923, 2023. [arXiv:2305.13707](https://arxiv.org/abs/2305.13707).
- Brown, T. B., et al. Language Models are Few-Shot Learners. *NeurIPS*, 2020.
- Chaplynskyi, D. Ukrainian Brown Corpus and evaluation of multilingual models. *Proceedings of the Second Ukrainian NLP Workshop*, 2023.
- Galeshchuk, S. ULP: Ukrainian Language Proficiency Benchmark for LLMs. *HuggingFace Datasets*, 2024.

- FrancophonIA. EU Acts in Ukrainian: Multilingual Legal Translation Corpus. *HuggingFace Datasets*, 2022.
- Lai, V. D., Ngo, N. T., Veyseh, A. P. B., Man, H., Dernoncourt, F., Bui, T., and Nguyen, T. H. ChatGPT Beyond English: Towards a Comprehensive Evaluation of Large Language Models in Multilingual Learning. *arXiv preprint arXiv:2304.05613*, 2023.
- Liu, J., Shen, D., Zhang, Y., Dolan, B., Carin, L., and Chen, W. What Makes Good In-Context Examples for GPT-3? *Proceedings of DeeLIO Workshop at ACL*, 2022.
- Min, S., Lyu, X., Holtzman, A., Artetxe, M., Lewis, M., Hajishirzi, H., and Zettlemoyer, L. Rethinking the Role of Demonstrations: What Makes In-Context Learning Work? *Proceedings of EMNLP*, 2022.
- Ovcharov, V. Tokenizer Fertility and Zero-Shot Performance of Foundation Models on Ukrainian Legal Text: A Comparative Study. [arXiv:2605.14890](https://arxiv.org/abs/2605.14890), 2026.
- Ovcharov, V. Few-Shot Degradation Is Not What It Seems: Behavioral Evidence, Representation Analysis, and a Random-Text Control Across 12 Models, 2 Tasks, and 2 Architectures. *arXiv preprint*, 2026.
- Petrov, A., La Malfa, E., Torr, P., and Bibi, A. Language Model Tokenizers Introduce Unfairness Between Languages. *NeurIPS*, 2023. [arXiv:2305.15425](https://arxiv.org/abs/2305.15425).
- Rust, P., Pfeiffer, J., Vulić, I., Ruder, S., and Gurevych, I. How Good is Your Tokenizer? On the Monolingual Performance of Multilingual Language Models. *Proceedings of ACL*, pages 3118–3135, 2021.
- Abadji, J., Ortiz Suarez, P., Romary, L., and Sagot, B. Towards a Cleaner Document-Oriented Multilingual Crawled Corpus. *Proceedings of LREC*, pages 4344–4355, 2022.
- Nguyen, T., Nguyen, H., Lai, V. D., Man, H., Ngo, N. T., Dernoncourt, F., Rossi, R. A., and Nguyen, T. H. CulturaX: A Cleaned, Enormous, and Multilingual Dataset for Large Language Models in 167 Languages. *Proceedings of ACL: System Demonstrations*, pages 228–237, 2024. [arXiv:2309.09400](https://arxiv.org/abs/2309.09400).
- Wei, J., Wang, X., Schuurmans, D., Bosma, M., Ichter, B., Xia, F., Chi, E., Le, Q., and Zhou, D. Chain-of-Thought Prompting Elicits Reasoning in Large Language Models. *NeurIPS*, 2022.
- Conneau, A., Khandelwal, K., Goyal, N., Chaudhary, V., Wenzek, G., Guzmán, F., Grave, E., Ott, M., Zettlemoyer, L., and Stoyanov, V. Unsupervised Cross-lingual Representation Learning at Scale. *Proceedings of ACL*, pages 8440–8451, 2020.
- Niklaus, J., Chalkidis, I., and Stürmer, M. LEXTREME: A Multi-Lingual and Multi-Task Benchmark for the Legal Domain. *Findings of EACL*, pages 1721–1734, 2024. [arXiv:2301.13126](https://arxiv.org/abs/2301.13126).
- Zhao, Z., Wallace, E., Feng, S., Klein, D., and Singh, S. Calibrate Before Use: Improving Few-Shot Performance of Language Models. *Proceedings of ICML*, 2021.

A EU Acts Fertility: Full Results

The full 25-language $\times$ 7-model fertility matrix is visualized in Figure 2 (main text). Table 3 presents representative values for one model (Qwen3 32B); all seven models show the same language ranking with consistent offsets.