

LECOC Micro App Design:

- LECOC Micro App shall be designed as single endpoint supporting one LECOC_SERVER_SOCKET and one LECOC_CLIENT_SOCKET
- Data to be stored on LECOC Micro App
 - EndpointID
 - List of SockeInfo
 - SocketId or ConnId
 - remote_mtu


LECOC APP Interfaces

Interface	Parameter	Remarks
LECOC_App_Register	EndPoint_Id, AppMgr_CB	MicroApp → AppMgr → Q6 Need to invoke during boot time
LECOC_SOCKET_OPENED	EndPoint_Id, connId or socketId remote_mtu profile_type	Q6 → AppMgr → MicroApp
LECOC_App_Socket_Open_Cfm	EndPoint_Id, connId or socketId status	MicroApp → AppMgr → Q6 This will be handled within APP_Mgr
LECOC_SOCKET_CLOSED	EndPoint_Id, connId or socketId reason??	Q6 → AppMgr → MicroApp No response required
LECOC_SOCKET_DATA_IND	Endpoint_Id connId or socketId data_len, data	Q6 → AppMgr → MicroApp QAPI Event needed

LECOC_Socket_Data_Ind_Resp	Endpoint_Id connId or socketId	MicroApp → AppMgr → Q6
LECOC_Socket_Send_Data	Endpoint_Id connId or socketId data_len, data	MicroApp → AppMgr → Q6 QCLI option
LECOC_SOCKET_DATA_CFM	Endpoint_Id connId or socketId	Q6 → AppMgr → MicroApp
LECOC_APP_Close_Socket_Ind	connId or socketId Endpoint_Id (needed?) reason	Is this needed? MicroApp → AppMgr → Q6 QCLI option

LECOC Socket Open and Close MSC

- App Mgr Register Cfm - Success/Fail
- LECOC_App_Register - called from platform_init or App_Mgr
- Can socket_context be send as context param in Synergy API
- Micro app qcli shall be enabled only after Socket is offloaded

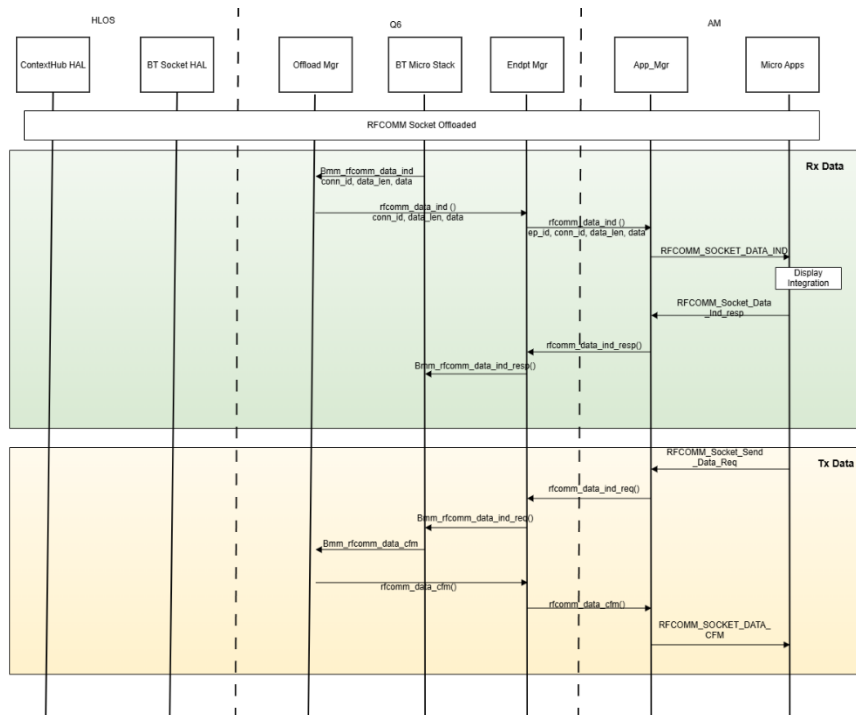

LECOC Micro App to HLOS App communication

- To send bd_name or any other info

qapi_bt_lecoc_init	endpt_id callback	Application to register it's end point along with callback. Callback to handle both lecoc events and contexthub events. This qapi internally initialize lecoc module.
qapi_bt_lecoc_deinit	endpt_id	Application deregister its endpoint and deinit lecoc module
QAPI_BT_LECOC_SOCKET_OPENED	endpt_id sock_id remote_mtu	Application receives this event when socket is opened successfully

QAPI_BT_LECOC_SOCKET_OPEN_REQ	endpt_id sock_id remote mtu	Application receives this event when lecoc socket is requested to offloaded
qapi_bt_lecoc_socket_open_resp	endpt_id sock_id status	Application uses this API to respond for lecoc socket open request
qapi_bt_lecoc_socket_data_req	endpt_id sock_id data len	Application uses this API to send lecoc Tx data on socket.
QAPI_BT_LECOC_SOCKET_DATA_CFM	endpt_id sock_id	Application receives this event as confirmation for data send request.
QAPI_BT_LECOC_SOCKET_DATA_IND	endpt_id sock_id data len	Application receives this event when remote sends LECOC RX data
qapi_bt_lecoc_socket_data_resp	endpt_id sock_id	Application uses this API to respond for received lecoc data.
qapi_bt_lecoc_socket_close_req	endpt_id sock_id	Application uses this API to request for closing the socket
QAPI_BT_LECOC_SOCKET_CLOSED	endpt_id sock_id	Application receives this event when socket is closed.

qapi_bt_lecoc_socket_set_capability	endpt_id sock_id local_mtu credits	This shall not be supported as synergy do not support configuring of MTU and credits for socket
-------------------------------------	---	---

LECOC Reference App Interface or QCLI options

lecoc_app_get_offloaded_socket	sock_id remote_mtu	LECOC App shall display list of stored offloaded socket details
lecoc_app_send_tx_data	sock_id pkt_size pkt_cnt	LECOC App to store pkt_size, pkt_cnt. LECOC App to send data in loop using - qapi_bt_lecoc_socket_data_req - QAPI_BT_LECOC_SOCKET_DATA_CFM
lecoc_app_data_loop_back	sock_id pkt_cnt	LECOC App to store loop_back flag and pkt_cnt. Each time app receives data, it should send data back as: - QAPI_BT_LECOC_SOCKET_DATA_IND - qapi_bt_lecoc_socket_data_resp - qapi_bt_lecoc_socket_data_req - QAPI_BT_LECOC_SOCKET_DATA_CFM
lecoc_app_set_mtu_credit	sock_id mtu credit	Not supported by Synergy
lecoc_app		

QAPIs for Endpoint Mgr or Context Hub

Application to use these APIs and events to interact with app on HLOS side.

The list below of APIs/events should be part of QAPIs in LECOC, RFCOMM and GATT

qapi_endpt_mgr_register	endpt_id, callback	Application to register its endpoint along with callback. can this callback be same as lecoc app callback
qapi_endpt_mgr_deregister	endpt_id	Application to deregister its endpoint.
QAPI_ENDPT_MGR_SESSION_OPEN_REQ	endpt_id session_id rem_endpt_id	Application receives this event when app on HLOS side wants to open session with this endpoint.
qapi_endpt_mgr_session_open_resp	endpt_id session_id	Application uses this api to send response for open session request
QAPI_ENDPT_MGR_SESSION_CLOSED	endpt_id session_id	Application receives this event when app on HLOS side closed the session with this endpoint.
QAPI_ENDPT_MGR_SESSION_MSG_RECEIVED	endpt_id session_id msg_id data len	Application receives this event when HLOS app sends data to this endpoint on session
qapi_endpt_mgr_session_msg_delivery_status	endpt_id session_id msg_id	Application use this api to send delivery response to received data from hlos app

qapi_endpt_mgr_session_msg_send	endpt_id session_id msg_id data len	Application uses this api to send data to app on HLOS side using this session
qapi_endpt_mgr_endpoints_started		
qapi_endpt_mgr_endpoints_stopped		