

Multiscale

1.0.0

Generated by Doxygen 1.8.3.1

Sun Oct 6 2013 14:42:19

Contents

1 Multiscale	1
1.1 Brief description	1
1.2 Contact	1
2 Namespace Index	3
2.1 Namespace List	3
3 Hierarchical Index	5
3.1 Class Hierarchy	5
4 Class Index	7
4.1 Class List	7
5 File Index	11
5.1 File List	11
6 Namespace Documentation	15
6.1 multiscale Namespace Reference	15
6.1.1 Enumeration Type Documentation	16
6.1.1.1 NumberIteratorType	16
6.1.2 Variable Documentation	17
6.1.2.1 ERR_CODE	17
6.1.2.2 ERR_MSG	17
6.2 multiscale::analysis Namespace Reference	17
6.2.1 Enumeration Type Documentation	18
6.2.1.1 Shape2D	18
6.3 multiscale::video Namespace Reference	18
6.4 multiscaletest Namespace Reference	18
7 Class Documentation	19
7.1 multiscale::video::AnnularSector Class Reference	19
7.1.1 Detailed Description	20
7.1.2 Constructor & Destructor Documentation	20
7.1.2.1 AnnularSector	20

7.1.2.2	<code>~AnnularSector</code>	20
7.1.3	Member Function Documentation	20
7.1.3.1	<code>getConcentration</code>	20
7.1.3.2	<code>getEndingAngle</code>	21
7.1.3.3	<code>getEndingRadius</code>	21
7.1.3.4	<code>getStartingAngle</code>	21
7.1.3.5	<code>getStartingRadius</code>	21
7.1.3.6	<code>initialise</code>	21
7.1.3.7	<code>toString</code>	21
7.1.4	Member Data Documentation	21
7.1.4.1	<code>concentration</code>	22
7.1.4.2	<code>endingAngle</code>	22
7.1.4.3	<code>endingRadius</code>	22
7.1.4.4	<code>startingAngle</code>	22
7.1.4.5	<code>startingRadius</code>	22
7.2	multiscale::video::CartesianToConcentrationsConverter Class Reference	22
7.2.1	Detailed Description	24
7.2.2	Constructor & Destructor Documentation	24
7.2.2.1	<code>CartesianToConcentrationsConverter</code>	24
7.2.2.2	<code>~CartesianToConcentrationsConverter</code>	24
7.2.3	Member Function Documentation	24
7.2.3.1	<code>convert</code>	24
7.2.3.2	<code>outputResults</code>	25
7.2.3.3	<code>readConcentrations</code>	26
7.2.3.4	<code>readHeaderLine</code>	26
7.2.3.5	<code>readInputData</code>	27
7.2.4	Member Data Documentation	27
7.2.4.1	<code>concentrations</code>	27
7.2.4.2	<code>ERR_CONC</code>	27
7.2.4.3	<code>ERR_IN_EXTRA_DATA</code>	27
7.2.4.4	<code>ERR_INPUT_OPEN</code>	28
7.2.4.5	<code>ERR_NEG_SIM_TIME</code>	28
7.2.4.6	<code>ERR_NONPOS_DIMENSION</code>	28
7.2.4.7	<code>height</code>	28
7.2.4.8	<code>inputFilepath</code>	28
7.2.4.9	<code>OUTPUT_FILE_EXTENSION</code>	28
7.2.4.10	<code>outputFilepath</code>	28
7.2.4.11	<code>RADIUS_MAX</code>	28
7.2.4.12	<code>RADIUS_MIN</code>	29
7.2.4.13	<code>simulationTime</code>	29

7.2.4.14	width	29
7.3	multiscale::CartesianToConcentrationsConverterException Class Reference	29
7.3.1	Detailed Description	31
7.3.2	Constructor & Destructor Documentation	31
7.3.2.1	CartesianToConcentrationsConverterException	32
7.3.2.2	CartesianToConcentrationsConverterException	32
7.4	multiscale::video::CartesianToPolarConverter Class Reference	32
7.4.1	Detailed Description	34
7.4.2	Constructor & Destructor Documentation	34
7.4.2.1	CartesianToPolarConverter	34
7.4.2.2	~CartesianToPolarConverter	34
7.4.3	Member Function Documentation	34
7.4.3.1	convert	34
7.4.3.2	outputResultsAsFile	35
7.4.3.3	outputResultsAsScript	36
7.4.3.4	readConcentrations	36
7.4.3.5	readHeaderLine	37
7.4.3.6	readInputData	37
7.4.3.7	transformToAnnularSectors	38
7.4.4	Member Data Documentation	38
7.4.4.1	annularSectors	39
7.4.4.2	concentrations	39
7.4.4.3	ERR_CONC	39
7.4.4.4	ERR_IN_EXTRA_DATA	39
7.4.4.5	ERR_INPUT_OPEN	39
7.4.4.6	ERR_NEG_SIM_TIME	39
7.4.4.7	ERR_NONPOS_DIMENSION	39
7.4.4.8	inputFilepath	39
7.4.4.9	nrOfConcentricCircles	40
7.4.4.10	nrOfSectors	40
7.4.4.11	OUTPUT_FILE_EXTENSION	40
7.4.4.12	outputFilepath	40
7.4.4.13	RADIUS_MAX	40
7.4.4.14	RADIUS_MIN	40
7.4.4.15	simulationTime	40
7.5	multiscale::CartesianToPolarConverterException Class Reference	41
7.5.1	Detailed Description	42
7.5.2	Constructor & Destructor Documentation	42
7.5.2.1	CartesianToPolarConverterException	43
7.5.2.2	CartesianToPolarConverterException	43

7.6	multiscale::analysis::CircularityMeasure Class Reference	43
7.6.1	Detailed Description	43
7.6.2	Member Function Documentation	43
7.6.2.1	compute	44
7.6.2.2	compute	44
7.7	multiscale::analysis::CircularMatFactory Class Reference	44
7.7.1	Detailed Description	47
7.7.2	Constructor & Destructor Documentation	47
7.7.2.1	CircularMatFactory	47
7.7.2.2	~CircularMatFactory	47
7.7.3	Member Function Documentation	47
7.7.3.1	createCircularMask	47
7.7.3.2	createFromViewerImage	48
7.7.3.3	isValidViewerImage	49
7.7.3.4	maxColourBarIntensityFromViewerImage	50
7.7.3.5	processConcentrations	51
7.7.4	Member Data Documentation	51
7.7.4.1	COLOURBAR_MAX_X	51
7.7.4.2	COLOURBAR_MAX_Y	51
7.7.4.3	ERR_UNIMPLEMENTED_METHOD	51
7.7.4.4	INPUT_IMG_HEIGHT	51
7.7.4.5	INPUT_IMG_WIDTH	51
7.7.4.6	INTENSITY_MAX	51
7.7.4.7	ROI_RADIUS	52
7.7.4.8	ROI_START_X	52
7.7.4.9	ROI_START_Y	52
7.8	multiscale::CircularMatFactoryException Class Reference	52
7.8.1	Detailed Description	54
7.8.2	Constructor & Destructor Documentation	54
7.8.2.1	CircularMatFactoryException	54
7.8.2.2	CircularMatFactoryException	55
7.9	multiscale::analysis::Cluster Class Reference	55
7.9.1	Detailed Description	59
7.9.2	Constructor & Destructor Documentation	59
7.9.2.1	Cluster	59
7.9.2.2	~Cluster	59
7.9.3	Member Function Documentation	60
7.9.3.1	addEntity	60
7.9.3.2	isValidOriginDependentValues	60
7.9.3.3	fieldNamesToString	60

7.9.3.4	fieldValuesToString	60
7.9.3.5	getEntities	61
7.9.3.6	getEntitiesCentrePoints	61
7.9.3.7	getEntitiesContourPoints	61
7.9.3.8	getEntitiesConvexHull	62
7.9.3.9	getMinAreaEnclosingCircleCentre	62
7.9.3.10	getMinAreaEnclosingCircleRadius	63
7.9.3.11	getMinAreaEnclosingRect	64
7.9.3.12	getMinAreaEnclosingTriangle	64
7.9.3.13	getPileUpDegree	65
7.9.3.14	initialise	65
7.9.3.15	isCircularMeasure	66
7.9.3.16	isRectangularMeasure	66
7.9.3.17	isTriangularMeasure	66
7.9.3.18	setOriginDependentMembers	67
7.9.3.19	updateArea	67
7.9.3.20	updateCentrePoint	68
7.9.3.21	updateClusterednessDegree	68
7.9.3.22	updatePerimeter	68
7.9.3.23	updatePileUpDegree	68
7.9.3.24	updateSpatialCollectionSpecificValues	69
7.9.3.25	validateOriginDependentValues	69
7.9.4	Member Data Documentation	69
7.9.4.1	entities	70
7.9.4.2	ERR_ORIGIN_DEPENDENT_VALUES	70
7.9.4.3	ERR_UNDEFINED_SHAPE	70
7.9.4.4	minAreaEnclosingCircleCentre	70
7.9.4.5	minAreaEnclosingCircleRadius	70
7.9.4.6	minAreaEnclosingRect	70
7.9.4.7	minAreaEnclosingTriangle	70
7.9.4.8	pileUpDegree	70
7.10	multiscale::analysis::ClusterDetector Class Reference	71
7.10.1	Detailed Description	75
7.10.2	Constructor & Destructor Documentation	75
7.10.2.1	ClusterDetector	75
7.10.2.2	~ClusterDetector	75
7.10.3	Member Function Documentation	75
7.10.3.1	addEntitiesToClusters	76
7.10.3.2	analyseClusters	76
7.10.3.3	analyseClustersOriginDependentValues	77

7.10.3.4	clearPreviousDetectionResults	77
7.10.3.5	computeAveragePileUpDegree	78
7.10.3.6	computeClusterednessIndex	78
7.10.3.7	convertEntities	79
7.10.3.8	convertEpsValue	79
7.10.3.9	convertNonPiledUpEntities	80
7.10.3.10	convertPiledUpEntities	80
7.10.3.11	createDetectorSpecificTrackbars	80
7.10.3.12	detectAndAnalyseClusters	80
7.10.3.13	detectClusters	81
7.10.3.14	detectEntitiesInImage	82
7.10.3.15	getClusterConvexHull	83
7.10.3.16	getClusters	83
7.10.3.17	getEps	83
7.10.3.18	getMinPoints	84
7.10.3.19	getValidMinPointsValue	84
7.10.3.20	initialiseDetectorSpecificFields	85
7.10.3.21	outputResultsToCsvFile	85
7.10.3.22	processImageAndDetect	85
7.10.3.23	setEps	86
7.10.3.24	setMinPoints	87
7.10.3.25	updateClusterOriginDependentValues	87
7.10.4	Member Data Documentation	88
7.10.4.1	avgPileUpDegree	88
7.10.4.2	clusterednessIndex	88
7.10.4.3	clusters	88
7.10.4.4	entityPileupDegree	88
7.10.4.5	eps	89
7.10.4.6	EPS_MAX	89
7.10.4.7	EPS_MIN	89
7.10.4.8	EPS_REAL_MAX	89
7.10.4.9	EPS_REAL_MIN	89
7.10.4.10	MIN_POINTS_MAX	89
7.10.4.11	MIN_POINTS_MIN	89
7.10.4.12	minPoints	89
7.10.4.13	OUTPUT_CLUSTEREDNESS	90
7.10.4.14	OUTPUT_PILE_UP	90
7.10.4.15	TRACKBAR_EPS	90
7.10.4.16	TRACKBAR_MINPOINTS	90
7.11	multiscale::ClusterException Class Reference	90

7.11.1	Detailed Description	92
7.11.2	Constructor & Destructor Documentation	92
7.11.2.1	ClusterException	92
7.11.2.2	ClusterException	93
7.12	multiscale::analysis::DataPoint Class Reference	93
7.12.1	Detailed Description	95
7.12.2	Constructor & Destructor Documentation	95
7.12.2.1	~DataPoint	95
7.12.3	Member Function Documentation	95
7.12.3.1	distanceTo	95
7.13	multiscale::analysis::DBSCAN Class Reference	96
7.13.1	Detailed Description	97
7.13.2	Constructor & Destructor Documentation	97
7.13.2.1	DBSCAN	97
7.13.2.2	~DBSCAN	97
7.13.3	Member Function Documentation	98
7.13.3.1	addUnclassifiedNodesToSeedsList	98
7.13.3.2	allocateDistanceMatrix	98
7.13.3.3	assignBorderNodesToClusters	98
7.13.3.4	constructDistanceMatrix	99
7.13.3.5	expandCoreCluster	100
7.13.3.6	findClosestCoreDataPoint	101
7.13.3.7	labelUnclassifiedAndNoiseAsBorder	102
7.13.3.8	retrieveNeighbours	102
7.13.3.9	run	103
7.13.3.10	runAlgorithm	104
7.13.4	Member Data Documentation	105
7.13.4.1	CLUSTERING_BORDER	105
7.13.4.2	CLUSTERING_NOISE	105
7.13.4.3	CLUSTERING_UNCLASSIFIED	105
7.13.4.4	distanceMatrix	105
7.13.4.5	eps	105
7.13.4.6	minPoints	105
7.13.4.7	nrOfDataPoints	106
7.14	multiscale::analysis::Detector Class Reference	106
7.14.1	Detailed Description	110
7.14.2	Constructor & Destructor Documentation	110
7.14.2.1	Detector	110
7.14.2.2	~Detector	110
7.14.3	Member Function Documentation	111

7.14.3.1	clearPreviousDetectionResults	111
7.14.3.2	createDetectorSpecificTrackbars	111
7.14.3.3	createTrackbars	111
7.14.3.4	createTrackbarsWindow	111
7.14.3.5	detect	111
7.14.3.6	detect	112
7.14.3.7	detectInDebugMode	112
7.14.3.8	detectInReleaseMode	112
7.14.3.9	displayImage	112
7.14.3.10	displayResultsInWindow	112
7.14.3.11	findGoodIntersectionPoints	112
7.14.3.12	findGoodPointsForAngle	113
7.14.3.13	initialise	113
7.14.3.14	initialiseDetectorSpecificFields	113
7.14.3.15	initialiseDetectorSpecificFieldsIfNotSet	113
7.14.3.16	initialiseDetectorSpecificImageDependentFields	114
7.14.3.17	initialiseImageDependentFields	114
7.14.3.18	initialiseImageOrigin	114
7.14.3.19	isValidInputImage	114
7.14.3.20	minAreaRectCentre	114
7.14.3.21	outputResults	114
7.14.3.22	outputResultsToCsvFile	115
7.14.3.23	outputResultsToCsvFile	115
7.14.3.24	outputResultsToFile	115
7.14.3.25	outputResultsToImage	115
7.14.3.26	polygonAngle	115
7.14.3.27	polygonAngle	116
7.14.3.28	printOutputErrorMessage	116
7.14.3.29	processImageAndDetect	117
7.14.3.30	processPressedKeyRequest	117
7.14.3.31	setDetectorSpecificFieldsInitialisationFlag	117
7.14.3.32	storeOutputImageOnDisk	118
7.14.4	Member Data Documentation	118
7.14.4.1	debugMode	118
7.14.4.2	detectMethodCalled	118
7.14.4.3	detectorSpecificFieldsInitialised	118
7.14.4.4	ERR_INVALID_IMAGE	118
7.14.4.5	ERR_OUTPUT_FILE	118
7.14.4.6	ERR_OUTPUT_WITHOUT_DETECT	118
7.14.4.7	image	118

7.14.4.8	IMG_EXTENSION	119
7.14.4.9	KEY_ESC	119
7.14.4.10	KEY_SAVE	119
7.14.4.11	origin	119
7.14.4.12	OUTPUT_EXTENSION	119
7.14.4.13	outputFilepath	119
7.14.4.14	outputImage	119
7.14.4.15	WIN_OUTPUT_IMAGE	119
7.15	multiscale::DetectorException Class Reference	120
7.15.1	Detailed Description	121
7.15.2	Constructor & Destructor Documentation	121
7.15.2.1	DetectorException	121
7.15.2.2	DetectorException	122
7.16	multiscale::analysis::Entity Class Reference	122
7.16.1	Detailed Description	125
7.16.2	Constructor & Destructor Documentation	125
7.16.2.1	Entity	125
7.16.2.2	Entity	126
7.16.2.3	\sim Entity	126
7.16.3	Member Function Documentation	126
7.16.3.1	isValid	126
7.16.3.2	distanceTo	127
7.16.3.3	distanceTo	127
7.16.3.4	getArea	128
7.16.3.5	getCentre	128
7.16.3.6	getContourPoints	128
7.16.3.7	getPerimeter	128
7.16.3.8	getPileUpDegree	128
7.16.3.9	toString	128
7.16.3.10	validateInputValues	128
7.16.4	Member Data Documentation	129
7.16.4.1	area	129
7.16.4.2	centre	129
7.16.4.3	contourPoints	129
7.16.4.4	ERR_DISTANCE	129
7.16.4.5	ERR_INPUT	130
7.16.4.6	OUTPUT_SEPARATOR	130
7.16.4.7	perimeter	130
7.16.4.8	pileUpDegree	130
7.17	multiscale::EntityException Class Reference	130

7.17.1	Detailed Description	132
7.17.2	Constructor & Destructor Documentation	132
7.17.2.1	EntityException	132
7.17.2.2	EntityException	133
7.18	EuclideanDataPoint Class Reference	133
7.18.1	Detailed Description	134
7.18.2	Constructor & Destructor Documentation	134
7.18.2.1	EuclideanDataPoint	134
7.18.2.2	EuclideanDataPoint	135
7.18.2.3	\sim EuclideanDataPoint	135
7.18.3	Member Function Documentation	135
7.18.3.1	distanceTo	135
7.18.4	Member Data Documentation	135
7.18.4.1	x	135
7.18.4.2	y	135
7.19	multiscale::ExceptionHandler Class Reference	135
7.19.1	Detailed Description	136
7.19.2	Member Function Documentation	136
7.19.2.1	printErrorMessage	136
7.20	multiscale::Geometry2D Class Reference	136
7.20.1	Detailed Description	139
7.20.2	Member Function Documentation	140
7.20.2.1	angleBtwPoints	140
7.20.2.2	angleOfLineWrtOxAxis	140
7.20.2.3	areaOfTriangle	141
7.20.2.4	areCollinear	141
7.20.2.5	areEqualPoints	141
7.20.2.6	areIdenticalLines	142
7.20.2.7	areIdenticalLines	143
7.20.2.8	areOnTheSameSideOfLine	144
7.20.2.9	distanceBtwPoints	144
7.20.2.10	distanceFromPointToLine	145
7.20.2.11	findPointsOnEdge	146
7.20.2.12	inverseTranslate	146
7.20.2.13	isAngleBetween	147
7.20.2.14	isAngleBetweenNonReflex	147
7.20.2.15	isBetweenCoordinates	148
7.20.2.16	isBetweenCoordinates	148
7.20.2.17	isOppositeAngleBetween	148
7.20.2.18	isOppositeAngleBetweenNonReflex	148

7.20.2.19	isPointOnEdge	149
7.20.2.20	isPointOnLineSegment	150
7.20.2.21	lineCircleIntersection	150
7.20.2.22	lineCircleOneIntersectionPoint	151
7.20.2.23	lineCircleTwoIntersectionPoints	152
7.20.2.24	lineEquationDeterminedByPoints	153
7.20.2.25	lineIntersection	153
7.20.2.26	lineIntersection	154
7.20.2.27	lineIntersection	155
7.20.2.28	lineSegmentCircleIntersection	156
7.20.2.29	lineSegmentIntersection	156
7.20.2.30	middlePoint	157
7.20.2.31	minimumDistancePointIndex	158
7.20.2.32	oppositeAngle	158
7.20.2.33	orthogonalLineToAnotherLineEdgePoints	159
7.20.2.34	slopeOfLine	160
7.20.2.35	translate	160
7.20.3	Member Data Documentation	160
7.20.3.1	MATRIX_START_INDEX	160
7.20.3.2	PI	161
7.21	multiscale::LexicographicNumberIterator Class Reference	161
7.21.1	Detailed Description	164
7.21.2	Constructor & Destructor Documentation	164
7.21.2.1	LexicographicNumberIterator	164
7.21.2.2	\sim LexicographicNumberIterator	165
7.21.3	Member Function Documentation	165
7.21.3.1	digitsToNumber	165
7.21.3.2	hasNextInitialised	165
7.21.3.3	initialise	166
7.21.3.4	isLargerThanUpperBound	166
7.21.3.5	number	167
7.21.3.6	numberToDigits	167
7.21.3.7	padWithZeros	168
7.21.3.8	resetCurrentNumber	169
7.21.3.9	reverseDigits	169
7.21.4	Member Data Documentation	169
7.21.4.1	currentNumberDigits	169
7.21.4.2	upperBoundDigits	170
7.22	multiscale::analysis::MatFactory Class Reference	170
7.22.1	Detailed Description	173

7.22.2	Constructor & Destructor Documentation	173
7.22.2.1	MatFactory	173
7.22.2.2	~MatFactory	173
7.22.3	Member Function Documentation	173
7.22.3.1	convertToIntensity	173
7.22.3.2	create	174
7.22.3.3	createFromViewerImage	174
7.22.3.4	initInputFile	174
7.22.3.5	isValidViewerImage	175
7.22.3.6	maxColourBarIntensityFromViewerImage	175
7.22.3.7	processConcentrations	175
7.22.4	Member Data Documentation	176
7.22.4.1	cols	176
7.22.4.2	ERR_IMG_RESOLUTION	176
7.22.4.3	ERR_IN_EXTRA_DATA	176
7.22.4.4	ERR_INPUT_OPEN	176
7.22.4.5	rows	176
7.22.4.6	simulationTime	176
7.23	multiscale::MatFactoryException Class Reference	177
7.23.1	Detailed Description	178
7.23.2	Constructor & Destructor Documentation	178
7.23.2.1	MatFactoryException	178
7.23.2.2	MatFactoryException	179
7.24	multiscale::MinEnclosingTriangleFinder Class Reference	179
7.24.1	Detailed Description	183
7.24.2	Constructor & Destructor Documentation	183
7.24.2.1	MinEnclosingTriangleFinder	183
7.24.2.2	~MinEnclosingTriangleFinder	183
7.24.3	Member Function Documentation	183
7.24.3.1	advance	183
7.24.3.2	advanceBToRightChain	184
7.24.3.3	areIdenticalLines	185
7.24.3.4	areIntersectingLines	186
7.24.3.5	find	186
7.24.3.6	findGammaIntersectionPoints	187
7.24.3.7	findMinEnclosingTriangle	188
7.24.3.8	findMinEnclosingTriangle	189
7.24.3.9	findMinTriangle	189
7.24.3.10	findVertexCOnSideB	190
7.24.3.11	gamma	191

7.24.3.12 height	192
7.24.3.13 height	193
7.24.3.14 initialise	194
7.24.3.15 initialiseAlgorithmVariables	195
7.24.3.16 initialiseConvexPolygon	195
7.24.3.17 intersects	195
7.24.3.18 intersectsAbove	196
7.24.3.19 intersectsAboveOrBelow	197
7.24.3.20 intersectsBelow	198
7.24.3.21 isFlushAngleBetweenPredecessorAndSuccessor	199
7.24.3.22 isGammaAngleBetween	199
7.24.3.23 isGammaAngleEqualTo	200
7.24.3.24 isLocalMinimalTriangle	201
7.24.3.25 isNotBTangency	201
7.24.3.26 isValidMinimalTriangle	202
7.24.3.27 lineEquationParameters	203
7.24.3.28 middlePointOfSideB	204
7.24.3.29 moveAIfLowAndBIfHigh	204
7.24.3.30 predecessor	205
7.24.3.31 returnMinEnclosingTriangle	206
7.24.3.32 searchForBTangency	207
7.24.3.33 successor	207
7.24.3.34 updateMinEnclosingTriangle	208
7.24.3.35 updateSideB	209
7.24.3.36 updateSidesBA	209
7.24.3.37 updateSidesCA	210
7.24.4 Member Data Documentation	211
7.24.4.1 a	211
7.24.4.2 area	211
7.24.4.3 b	211
7.24.4.4 c	211
7.24.4.5 CONVEX_HULL_CLOCKWISE	211
7.24.4.6 ERR_MIDPOINT_SIDE_B	212
7.24.4.7 ERR_NR_POINTS	212
7.24.4.8 ERR_SIDE_B_GAMMA	212
7.24.4.9 ERR_TRIANGLE_VERTICES	212
7.24.4.10 ERR_VERTEX_C_ON_SIDE_B	212
7.24.4.11 INTERSECTS_ABOVE	212
7.24.4.12 INTERSECTS_BELOW	212
7.24.4.13 INTERSECTS_CRITICAL	212

7.24.4.14 INTERSECTS_LIMIT	212
7.24.4.15 nrOfPoints	213
7.24.4.16 polygon	213
7.24.4.17 sideAEndVertex	213
7.24.4.18 sideAStartVertex	213
7.24.4.19 sideBEndVertex	213
7.24.4.20 sideBStartVertex	213
7.24.4.21 sideCEndVertex	213
7.24.4.22 sideCStartVertex	214
7.24.4.23 VALIDATION_SIDE_A_TANGENT	214
7.24.4.24 VALIDATION_SIDE_B_TANGENT	214
7.24.4.25 VALIDATION_SIDES_FLUSH	214
7.24.4.26 validationFlag	214
7.24.4.27 vertexA	214
7.24.4.28 vertexB	214
7.24.4.29 vertexC	215
7.25 multiscale::MinEnclosingTriangleFinderException Class Reference	215
7.25.1 Detailed Description	216
7.25.2 Constructor & Destructor Documentation	216
7.25.2.1 MinEnclosingTriangleFinderException	217
7.25.2.2 ~MinEnclosingTriangleFinderException	217
7.26 multiscaletest::MinEnclosingTriangleFinderTest Class Reference	217
7.26.1 Detailed Description	221
7.26.2 Constructor & Destructor Documentation	221
7.26.2.1 MinEnclosingTriangleFinderTest	221
7.26.2.2 ~MinEnclosingTriangleFinderTest	221
7.26.3 Member Function Documentation	221
7.26.3.1 ArePointsEnclosed	221
7.26.3.2 GetRandomNrOfExecutions	221
7.26.3.3 GetRandomNrOfPoints	221
7.26.3.4 IsOneEdgeFlush	221
7.26.3.5 IsTriangleTouchingPolygon	221
7.26.3.6 RunTest	221
7.26.3.7 TestMorePoints	222
7.26.3.8 TestMorePointsAndNonEmptyTriangle	222
7.26.3.9 TestNoPoints	222
7.26.3.10 TestOnePoint	222
7.26.3.11 TestPointsWithNegativeCoordinates	222
7.26.3.12 TestPointsWithNegativeXCoordinate	222
7.26.3.13 TestPointsWithNegativeYCoordinate	222

7.26.3.14	TestRandomPoints	223
7.26.3.15	TestThreePoints	223
7.26.3.16	TestTwoPoints	223
7.26.3.17	ValidateTestResults	223
7.26.4	Member Data Documentation	223
7.26.4.1	area	223
7.26.4.2	convexHull	223
7.26.4.3	MAX_NR_EXECUTIONS	223
7.26.4.4	MAX_NR_POINTS	223
7.26.4.5	MIN_NR_EXECUTIONS	223
7.26.4.6	MIN_NR_POINTS	224
7.26.4.7	POINT_IN_TRIANGLE_THRESH	224
7.26.4.8	points	224
7.26.4.9	triangle	224
7.27	multiscale::MultiscaleException Class Reference	224
7.27.1	Detailed Description	225
7.27.2	Constructor & Destructor Documentation	225
7.27.2.1	MultiscaleException	226
7.27.2.2	MultiscaleException	226
7.27.3	Member Function Documentation	226
7.27.3.1	constructExplanatoryString	226
7.27.3.2	what	226
7.27.4	Member Data Documentation	226
7.27.4.1	explanatoryString	226
7.28	multiscaletest::MultiscaleTest Class Reference	226
7.28.1	Detailed Description	228
7.28.2	Constructor & Destructor Documentation	228
7.28.2.1	~MultiscaleTest	229
7.28.3	Member Function Documentation	229
7.28.3.1	RunTest	229
7.28.3.2	SetUp	229
7.28.3.3	TearDown	229
7.28.3.4	ValidateTestResults	229
7.28.4	Member Data Documentation	229
7.28.4.1	validationFlag	229
7.29	multiscale::NumberIterator Class Reference	229
7.29.1	Detailed Description	232
7.29.2	Constructor & Destructor Documentation	232
7.29.2.1	NumberIterator	232
7.29.2.2	~NumberIterator	232

7.29.3 Member Function Documentation	232
7.29.3.1 hasNext	232
7.29.3.2 hasNextInitialised	233
7.29.3.3 hasNextNotInitialised	233
7.29.3.4 init	233
7.29.3.5 initialise	234
7.29.3.6 number	234
7.29.3.7 reset	234
7.29.3.8 resetCurrentNumber	235
7.29.4 Member Data Documentation	235
7.29.4.1 isInitialised	235
7.29.4.2 upperBound	235
7.30 multiscale::Numeric Class Reference	236
7.30.1 Detailed Description	236
7.30.2 Member Function Documentation	237
7.30.2.1 almostEqual	237
7.30.2.2 greaterOrEqual	238
7.30.2.3 lessOrEqual	238
7.30.2.4 maximum	239
7.30.2.5 sign	239
7.30.3 Member Data Documentation	240
7.30.3.1 epsilon	240
7.31 multiscale::NumericRangeManipulator Class Reference	240
7.31.1 Detailed Description	240
7.31.2 Member Function Documentation	240
7.31.2.1 convertFromRange	240
7.32 multiscale::video::PolarCsvToInputFilesConverter Class Reference	241
7.32.1 Detailed Description	244
7.32.2 Constructor & Destructor Documentation	244
7.32.2.1 PolarCsvToInputFilesConverter	244
7.32.2.2 ~PolarCsvToInputFilesConverter	244
7.32.3 Member Function Documentation	245
7.32.3.1 computeConcentration	245
7.32.3.2 computeConcentrationWrtArea	245
7.32.3.3 computeNextPositionConcentration	245
7.32.3.4 computeNonScaledConcentration	245
7.32.3.5 computeNormalisedConcentration	246
7.32.3.6 computeScaledConcentration	246
7.32.3.7 computeSimulationTime	246
7.32.3.8 convert	246

7.32.3.9	initInputFile	247
7.32.3.10	initIterators	247
7.32.3.11	initMaximumConcentration	247
7.32.3.12	initOutputFile	247
7.32.3.13	processInputFile	248
7.32.3.14	processLine	248
7.32.3.15	splitFirstPartInConcentrations	248
7.32.3.16	splitLineInConcentrations	249
7.32.3.17	splitOtherPartsInConcentrations	249
7.32.3.18	updateMaximumConcentration	249
7.32.3.19	validateInput	249
7.32.3.20	validateInputLine	250
7.32.3.21	validateSelectedConcentrationIndex	250
7.32.4	Member Data Documentation	250
7.32.4.1	circlesIterator	250
7.32.4.2	concentrationsIndex	250
7.32.4.3	ERR_INPUT_OPEN	251
7.32.4.4	ERR_INVALID_VALUE_LINE	251
7.32.4.5	ERR_INVALID_VALUE_TOKEN	251
7.32.4.6	ERR_NEG_CONCENTRATION	251
7.32.4.7	ERR_NEG_SIM_TIME	251
7.32.4.8	ERR_NR_CONCENTRATIONS	251
7.32.4.9	ERR_SELECTED_CONCENTRATION_INDEX	251
7.32.4.10	INPUT_FILE_SEPARATOR	251
7.32.4.11	inputFilepath	251
7.32.4.12	maximumConcentration	251
7.32.4.13	nrOfConcentrationsForPosition	252
7.32.4.14	nrOfConcentricCircles	252
7.32.4.15	nrOfSectors	252
7.32.4.16	OUTPUT_EXTENSION	252
7.32.4.17	OUTPUT_FILE_SEPARATOR	252
7.32.4.18	OUTPUT_SEPARATOR	252
7.32.4.19	outputFilepath	252
7.32.4.20	RADIUS_MIN	252
7.32.4.21	sectorsIterator	252
7.32.4.22	selectedConcentrationIndex	252
7.32.4.23	useLogScaling	253
7.33	multiscale::PolarCsvToInputFilesConverterException Class Reference	253
7.33.1	Detailed Description	254
7.33.2	Constructor & Destructor Documentation	254

7.33.2.1	PolarCsvToInputFilesConverterException	255
7.33.2.2	PolarCsvToInputFilesConverterException	255
7.34	multiscale::video::PolarGnuplotScriptGenerator Class Reference	255
7.34.1	Detailed Description	256
7.34.2	Member Function Documentation	257
7.34.2.1	generateBody	257
7.34.2.2	generateFooter	257
7.34.2.3	generateHeader	257
7.34.2.4	generateScript	257
7.34.2.5	outputContent	258
7.34.2.6	outputFooter	258
7.34.2.7	outputHeader	259
7.34.2.8	readContentTemplate	259
7.34.3	Member Data Documentation	259
7.34.3.1	CONTENT_IN	259
7.34.3.2	FOOTER_IN	259
7.34.3.3	GNUPLOT_EXTENSION	260
7.34.3.4	HEADER_IN	260
7.34.3.5	REPLACE_CONTENT_CONCENTRATION	260
7.34.3.6	REPLACE_CONTENT_END_ANGLE	260
7.34.3.7	REPLACE_CONTENT_INDEX	260
7.34.3.8	REPLACE_CONTENT_RADIUS	260
7.34.3.9	REPLACE_CONTENT_START_ANGLE	260
7.34.3.10	REPLACE_HEADER_FILENAME	260
7.34.3.11	REPLACE_HEADER_SIM_TIME	260
7.35	multiscale::video::RectangularCsvToInputFilesConverter Class Reference	261
7.35.1	Detailed Description	263
7.35.2	Constructor & Destructor Documentation	263
7.35.2.1	RectangularCsvToInputFilesConverter	263
7.35.2.2	\sim RectangularCsvToInputFilesConverter	263
7.35.3	Member Function Documentation	264
7.35.3.1	computeConcentration	264
7.35.3.2	computeNextPositionConcentration	264
7.35.3.3	computeNonScaledConcentration	264
7.35.3.4	computeNormalisedConcentration	264
7.35.3.5	computeScaledConcentration	264
7.35.3.6	computeSimulationTime	265
7.35.3.7	convert	265
7.35.3.8	initInputFile	265
7.35.3.9	initIterators	265

7.35.3.10	initMaximumConcentration	266
7.35.3.11	initOutputFile	266
7.35.3.12	processInputFile	266
7.35.3.13	processLine	267
7.35.3.14	splitLineInConcentrations	267
7.35.3.15	splitLineInConcentrations	267
7.35.3.16	updateMaximumConcentration	268
7.35.3.17	validateInput	268
7.35.3.18	validateInputLine	268
7.35.3.19	validateSelectedConcentrationIndex	268
7.35.4	Member Data Documentation	269
7.35.4.1	columnsIterator	269
7.35.4.2	concentrationsIndex	269
7.35.4.3	ERR_INPUT_OPEN	269
7.35.4.4	ERR_INVALID_VALUE_LINE	269
7.35.4.5	ERR_INVALID_VALUE_TOKEN	269
7.35.4.6	ERR_NEG_CONCENTRATION	269
7.35.4.7	ERR_NEG_SIM_TIME	269
7.35.4.8	ERR_NR_CONCENTRATIONS	269
7.35.4.9	ERR_SELECTED_CONCENTRATION_INDEX	269
7.35.4.10	height	270
7.35.4.11	INPUT_FILE_SEPARATOR	270
7.35.4.12	inputFilepath	270
7.35.4.13	maximumConcentration	270
7.35.4.14	nrOfConcentrationsForPosition	270
7.35.4.15	OUTPUT_EXTENSION	270
7.35.4.16	OUTPUT_FILE_SEPARATOR	270
7.35.4.17	OUTPUT_SEPARATOR	270
7.35.4.18	outputFilepath	270
7.35.4.19	rowsIterator	270
7.35.4.20	selectedConcentrationIndex	271
7.35.4.21	useLogScaling	271
7.35.4.22	width	271
7.36	multiscale::RectangularCsvToInputFilesConverterException Class Reference	271
7.36.1	Detailed Description	273
7.36.2	Constructor & Destructor Documentation	273
7.36.2.1	RectangularCsvToInputFilesConverterException	274
7.36.2.2	RectangularCsvToInputFilesConverterException	274
7.37	multiscale::video::RectangularEntityCsvToInputFilesConverter Class Reference	274
7.37.1	Detailed Description	277

7.37.2	Constructor & Destructor Documentation	277
7.37.2.1	RectangularEntityCsvToInputFilesConverter	277
7.37.2.2	~RectangularEntityCsvToInputFilesConverter	277
7.37.3	Member Function Documentation	277
7.37.3.1	computeCoordinate	277
7.37.3.2	computeSimulationTime	277
7.37.3.3	convert	278
7.37.3.4	initInputFile	278
7.37.3.5	initIterators	278
7.37.3.6	initOutputFile	278
7.37.3.7	processInputFile	279
7.37.3.8	processLine	279
7.37.3.9	splitLineInCoordinates	279
7.37.3.10	validateCoordinate	280
7.37.3.11	validateEntitiesGrid	280
7.37.3.12	validateInput	280
7.37.3.13	validateInputLine	280
7.37.3.14	validateMaxNrOfEntitiesPerPosition	281
7.37.3.15	validateSimulationTime	281
7.37.4	Member Data Documentation	281
7.37.4.1	entitiesIterator	281
7.37.4.2	ERR_INPUT_OPEN	281
7.37.4.3	ERR_INVALID_NR_ENTITIES	282
7.37.4.4	ERR_INVALID_OX_COORDINATE	282
7.37.4.5	ERR_INVALID_OY_COORDINATE	282
7.37.4.6	ERR_INVALID_VALUE_LINE	282
7.37.4.7	ERR_INVALID_VALUE_TOKEN	282
7.37.4.8	ERR_MAX_NR_ENTITIES	282
7.37.4.9	ERR_NEG_SIM_TIME	282
7.37.4.10	ERR_NR_COORDINATES	282
7.37.4.11	height	282
7.37.4.12	INPUT_FILE_SEPARATOR	282
7.37.4.13	inputFilepath	283
7.37.4.14	maxNrOfEntitiesPerPosition	283
7.37.4.15	nrOfEntities	283
7.37.4.16	OUTPUT_EXTENSION	283
7.37.4.17	OUTPUT_FILE_SEPARATOR	283
7.37.4.18	OUTPUT_SEPARATOR	283
7.37.4.19	outputFilepath	283
7.37.4.20	width	283

7.38 multiscale::RectangularEntityCsvToInputFilesConverterException Class Reference	283
7.38.1 Detailed Description	285
7.38.2 Constructor & Destructor Documentation	285
7.38.2.1 RectangularEntityCsvToInputFilesConverterException	286
7.38.2.2 RectangularEntityCsvToInputFilesConverterException	286
7.39 multiscale::video::RectangularGnuplotScriptGenerator Class Reference	286
7.39.1 Detailed Description	287
7.39.2 Member Function Documentation	287
7.39.2.1 generateBody	287
7.39.2.2 generateFooter	288
7.39.2.3 generateHeader	288
7.39.2.4 generateScript	288
7.39.2.5 outputContent	289
7.39.2.6 outputFooter	289
7.39.2.7 outputHeader	289
7.39.3 Member Data Documentation	290
7.39.3.1 CONTENT_IN	290
7.39.3.2 FOOTER_IN	290
7.39.3.3 GNUPLOT_EXTENSION	290
7.39.3.4 HEADER_IN	290
7.39.3.5 OUTPUT_SEPARATOR	290
7.39.3.6 REPLACE_DIMENSION_EXTRA	290
7.39.3.7 REPLACE_HEADER_FILENAME	290
7.39.3.8 REPLACE_HEADER_HEIGHT	291
7.39.3.9 REPLACE_HEADER_SIM_TIME	291
7.39.3.10 REPLACE_HEADER_WIDTH	291
7.40 multiscale::analysis::RectangularMatFactory Class Reference	291
7.40.1 Detailed Description	294
7.40.2 Constructor & Destructor Documentation	294
7.40.2.1 RectangularMatFactory	294
7.40.2.2 \sim RectangularMatFactory	294
7.40.3 Member Function Documentation	294
7.40.3.1 createFromViewerImage	294
7.40.3.2 isValidViewerImage	295
7.40.3.3 maxColourBarIntensityFromViewerImage	296
7.40.3.4 processConcentrations	297
7.40.4 Member Data Documentation	297
7.40.4.1 COLOURBAR_MAX_X	297
7.40.4.2 COLOURBAR_MAX_Y	297
7.40.4.3 ERR_CONC	297

7.40.4.4	INPUT_IMG_HEIGHT	297
7.40.4.5	INPUT_IMG_WIDTH	298
7.40.4.6	ROI_HEIGHT	298
7.40.4.7	ROI_START_X	298
7.40.4.8	ROI_START_Y	298
7.40.4.9	ROI_WIDTH	298
7.41	multiscale::RectangularMatFactoryException Class Reference	298
7.41.1	Detailed Description	300
7.41.2	Constructor & Destructor Documentation	300
7.41.2.1	RectangularMatFactoryException	300
7.41.2.2	RectangularMatFactoryException	301
7.42	multiscale::analysis::Region Class Reference	301
7.42.1	Detailed Description	304
7.42.2	Constructor & Destructor Documentation	305
7.42.2.1	Region	305
7.42.2.2	\sim Region	305
7.42.3	Member Function Documentation	305
7.42.3.1	areValidInputValues	305
7.42.3.2	fieldNamesToString	306
7.42.3.3	fieldValuesToString	306
7.42.3.4	getDensity	307
7.42.3.5	getPolygon	307
7.42.3.6	isCircularMeasure	307
7.42.3.7	isRectangularMeasure	308
7.42.3.8	isTriangularMeasure	308
7.42.3.9	updateArea	309
7.42.3.10	updateCentrePoint	309
7.42.3.11	updateClusterednessDegree	309
7.42.3.12	updatePerimeter	309
7.42.3.13	updateSpatialCollectionSpecificValues	309
7.42.3.14	validateInputValues	309
7.42.4	Member Data Documentation	310
7.42.4.1	CONTOUR_CLOSED	310
7.42.4.2	CONTOUR_ORIENTED	310
7.42.4.3	density	310
7.42.4.4	polygon	310
7.43	multiscale::analysis::RegionDetector Class Reference	311
7.43.1	Detailed Description	315
7.43.2	Constructor & Destructor Documentation	315
7.43.2.1	RegionDetector	315

7.43.2.2	~RegionDetector	315
7.43.3	Member Function Documentation	316
7.43.3.1	changeContrastAndBrightness	316
7.43.3.2	clearPreviousDetectionResults	316
7.43.3.3	computeAverageClusterednessDegree	316
7.43.3.4	computeAverageDensity	317
7.43.3.5	computeAverageMeasures	318
7.43.3.6	convertAlpha	318
7.43.3.7	convertBeta	319
7.43.3.8	createDetectorSpecificTrackbars	319
7.43.3.9	createRegionFromPolygon	319
7.43.3.10	findContoursInImage	320
7.43.3.11	findRegions	320
7.43.3.12	getAlpha	321
7.43.3.13	getBeta	322
7.43.3.14	getBlurKernelSize	322
7.43.3.15	getEpsilon	322
7.43.3.16	getMorphologicalCloselterations	323
7.43.3.17	getOriginXCoordinate	323
7.43.3.18	getOriginYCoordinate	323
7.43.3.19	getRegionAreaThresh	323
7.43.3.20	getRegions	324
7.43.3.21	getThresholdValue	324
7.43.3.22	initialiseDetectorSpecificFields	324
7.43.3.23	initialiseDetectorSpecificImageDependentFields	324
7.43.3.24	isValidRegion	325
7.43.3.25	morphologicalClose	325
7.43.3.26	outputAveragedMeasuresToCsvFile	325
7.43.3.27	outputRegionsToCsvFile	326
7.43.3.28	outputResultsToCsvFile	326
7.43.3.29	outputResultsToImage	327
7.43.3.30	processImageAndDetect	327
7.43.3.31	regionArea	328
7.43.3.32	regionClusterednessDegree	328
7.43.3.33	regionDensity	329
7.43.3.34	regionHolesArea	329
7.43.3.35	setAlpha	330
7.43.3.36	setBeta	331
7.43.3.37	setBlurKernelSize	331
7.43.3.38	setEpsilon	332

7.43.3.39	setMorphologicalCloselterations	333
7.43.3.40	setOriginXCoordinate	333
7.43.3.41	setOriginYCoordinate	334
7.43.3.42	setRegionAreaThresh	334
7.43.3.43	setThresholdValue	335
7.43.3.44	smoothImage	336
7.43.3.45	thresholdImage	336
7.43.4	Member Data Documentation	337
7.43.4.1	alpha	337
7.43.4.2	ALPHA_MAX	337
7.43.4.3	ALPHA_REAL_MAX	337
7.43.4.4	ALPHA_REAL_MIN	337
7.43.4.5	avgClusterednessDegree	337
7.43.4.6	avgDensity	337
7.43.4.7	beta	338
7.43.4.8	BETA_MAX	338
7.43.4.9	BETA_REAL_MAX	338
7.43.4.10	BETA_REAL_MIN	338
7.43.4.11	blurKernelSize	338
7.43.4.12	CANNY_THRESH_MAX	338
7.43.4.13	CONTOUR_AREA_ORIENTED	338
7.43.4.14	DISPLAY_LINE_THICKNESS	338
7.43.4.15	epsilon	338
7.43.4.16	EPSILON_MAX	339
7.43.4.17	INTENSITY_MAX	339
7.43.4.18	KERNEL_MAX	339
7.43.4.19	MORPH_ITER_MAX	339
7.43.4.20	morphologicalCloselterations	339
7.43.4.21	OUTPUT_CLUSTEREDNESS	339
7.43.4.22	OUTPUT_DENSITY	339
7.43.4.23	POLYGON_CLOSED	339
7.43.4.24	REGION_AREA_THRESH_MAX	340
7.43.4.25	regionAreaThresh	340
7.43.4.26	regions	340
7.43.4.27	THRESHOLD_CLUSTEREDNESS	340
7.43.4.28	THRESHOLD_MAX	340
7.43.4.29	thresholdValue	340
7.43.4.30	TRACKBAR_ALPHA	340
7.43.4.31	TRACKBAR_BETA	340
7.43.4.32	TRACKBAR_CANNY	341

7.43.4.33 TRACKBAR_EPSILON	341
7.43.4.34 TRACKBAR_KERNEL	341
7.43.4.35 TRACKBAR_MORPH	341
7.43.4.36 TRACKBAR_REGION_AREA_THRESH	341
7.43.4.37 TRACKBAR_THRESHOLD	341
7.43.4.38 USE_CANNY_L2	341
7.44 multiscale::RegionException Class Reference	341
7.44.1 Detailed Description	343
7.44.2 Constructor & Destructor Documentation	343
7.44.2.1 RegionException	343
7.44.2.2 RegionException	344
7.45 multiscale::RGBColourGenerator Class Reference	344
7.45.1 Detailed Description	345
7.45.2 Member Function Documentation	345
7.45.2.1 computeRGBValues	345
7.45.2.2 convertHSVToRGB	345
7.45.2.3 convertRGBToString	346
7.45.2.4 generate	346
7.45.2.5 generate	346
7.45.3 Member Data Documentation	346
7.45.3.1 blue	346
7.45.3.2 green	347
7.45.3.3 HUE_MAX	347
7.45.3.4 HUE_MIN	347
7.45.3.5 red	347
7.45.3.6 SATURATION	347
7.45.3.7 VALUE	347
7.46 multiscale::analysis::Silhouette Class Reference	347
7.46.1 Detailed Description	348
7.46.2 Member Function Documentation	349
7.46.2.1 computeAverageDissimilarityBtwEntityAndCluster	349
7.46.2.2 computeAverageDissimilarityToOtherClusters	349
7.46.2.3 computeAverageDissimilarityWithinCluster	349
7.46.2.4 computeAverageMeasure	350
7.46.2.5 computeMeasure	350
7.46.2.6 computeOverallAverageMeasure	350
7.47 multiscale::analysis::SimulationClusterDetector Class Reference	351
7.47.1 Detailed Description	354
7.47.2 Constructor & Destructor Documentation	355
7.47.2.1 SimulationClusterDetector	355

7.47.2.2	<code>~SimulationClusterDetector</code>	355
7.47.3	Member Function Documentation	355
7.47.3.1	<code>computePileUpDegreeAtPosition</code>	355
7.47.3.2	<code>detectEntitiesInImage</code>	355
7.47.3.3	<code>getEntityCentrePoint</code>	356
7.47.3.4	<code>getEntityContourPoints</code>	357
7.47.3.5	<code>initialiseDetectorSpecificImageDependentFields</code>	357
7.47.3.6	<code>initialiseThresholdedImage</code>	358
7.47.3.7	<code>isEntityAtPosition</code>	358
7.47.3.8	<code>outputClusterCircularShape</code>	359
7.47.3.9	<code>outputClusterRectangularShape</code>	360
7.47.3.10	<code>outputClusterShape</code>	360
7.47.3.11	<code>outputClusterToImage</code>	361
7.47.3.12	<code>outputClusterTriangularShape</code>	362
7.47.3.13	<code>outputResultsToImage</code>	362
7.47.4	Member Data Documentation	363
7.47.4.1	<code>DATAPOINT_THICKNESS</code>	363
7.47.4.2	<code>DATAPOINT_WIDTH</code>	363
7.47.4.3	<code>ENTITY_THRESH</code>	363
7.47.4.4	<code>entityHeight</code>	363
7.47.4.5	<code>entityWidth</code>	363
7.47.4.6	<code>height</code>	364
7.47.4.7	<code>THRESHOLD</code>	364
7.47.4.8	<code>THRESHOLD_MAX</code>	364
7.47.4.9	<code>thresholdedImage</code>	364
7.47.4.10	<code>width</code>	364
7.48	<code>multiscale::SimulationClusterDetectorException</code> Class Reference	364
7.48.1	Detailed Description	366
7.48.2	Constructor & Destructor Documentation	366
7.48.2.1	<code>SimulationClusterDetectorException</code>	367
7.48.2.2	<code>SimulationClusterDetectorException</code>	367
7.49	<code>multiscale::analysis::SpatialCollection2D</code> Class Reference	367
7.49.1	Detailed Description	371
7.49.2	Constructor & Destructor Documentation	371
7.49.2.1	<code>SpatialCollection2D</code>	371
7.49.2.2	<code>~SpatialCollection2D</code>	372
7.49.3	Member Function Documentation	372
7.49.3.1	<code>convertPoints</code>	372
7.49.3.2	<code>fieldValuesToString</code>	372
7.49.3.3	<code>getAngle</code>	373

7.49.3.4	getArea	373
7.49.3.5	getCentre	373
7.49.3.6	getClusterednessDegree	374
7.49.3.7	getDistanceFromOrigin	374
7.49.3.8	getPerimeter	375
7.49.3.9	getShape	375
7.49.3.10	initialise	376
7.49.3.11	isCircularMeasure	376
7.49.3.12	isRectangularMeasure	377
7.49.3.13	isTriangularMeasure	378
7.49.3.14	shapeAsString	378
7.49.3.15	toString	379
7.49.3.16	updateArea	379
7.49.3.17	updateCentrePoint	380
7.49.3.18	updateClusterednessDegree	380
7.49.3.19	updateMeasures	381
7.49.3.20	updateMeasuresIfRequired	382
7.49.3.21	updatePerimeter	384
7.49.3.22	updateShape	384
7.49.3.23	updateSpatialCollectionSpecificValues	385
7.49.4	Member Data Documentation	386
7.49.4.1	angle	386
7.49.4.2	area	386
7.49.4.3	centre	386
7.49.4.4	circularMeasure	387
7.49.4.5	clusterednessDegree	387
7.49.4.6	CONVEX_HULL_CLOCKWISE	387
7.49.4.7	distanceFromOrigin	387
7.49.4.8	ERR_INPUT	387
7.49.4.9	OUTPUT_SEPARATOR	387
7.49.4.10	perimeter	387
7.49.4.11	rectangularMeasure	388
7.49.4.12	shape	388
7.49.4.13	STR_CIRCLE	388
7.49.4.14	STR_RECTANGLE	388
7.49.4.15	STR_TRIANGLE	388
7.49.4.16	STR_UNDEFINED	388
7.49.4.17	triangularMeasure	388
7.49.4.18	updateFlag	388
7.50	multiscale::StandardNumberIterator Class Reference	389

7.50.1	Detailed Description	391
7.50.2	Constructor & Destructor Documentation	391
7.50.2.1	StandardNumberIterator	391
7.50.2.2	\sim StandardNumberIterator	391
7.50.3	Member Function Documentation	391
7.50.3.1	hasNextInitialised	391
7.50.3.2	initialise	391
7.50.3.3	number	392
7.50.3.4	resetCurrentNumber	392
7.50.4	Member Data Documentation	392
7.50.4.1	currentNumber	392
7.51	multiscale::StringManipulator Class Reference	392
7.51.1	Detailed Description	393
7.51.2	Member Function Documentation	393
7.51.2.1	filenameFromPath	393
7.51.2.2	replace	394
7.51.2.3	split	395
7.51.2.4	toString	395
7.51.3	Member Data Documentation	396
7.51.3.1	DIR_SEPARATOR	396
8	File Documentation	397
8.1	doc/mainpage.dox File Reference	397
8.2	include/multiscale/core/Multiscale.hpp File Reference	397
8.3	include/multiscale/core/MultiscaleTest.hpp File Reference	398
8.4	include/multiscale/exception/CartesianToConcentrationsConverterException.hpp File Reference	399
8.5	include/multiscale/exception/CartesianToPolarConverterException.hpp File Reference	400
8.6	include/multiscale/exception/CircularMatFactoryException.hpp File Reference	401
8.7	include/multiscale/exception/ClusterException.hpp File Reference	402
8.8	include/multiscale/exception/DetectorException.hpp File Reference	403
8.9	include/multiscale/exception/EntityException.hpp File Reference	404
8.10	include/multiscale/exception/ExceptionHandler.hpp File Reference	405
8.11	include/multiscale/exception/MatFactoryException.hpp File Reference	406
8.12	include/multiscale/exception/MinEnclosingTriangleFinderException.hpp File Reference	407
8.13	include/multiscale/exception/MultiscaleException.hpp File Reference	408
8.13.1	Macro Definition Documentation	409
8.13.1.1	MS_throw	409
8.14	include/multiscale/exception/PolarCsvToInputFilesConverterException.hpp File Reference	409
8.15	include/multiscale/exception/RectangularCsvToInputFilesConverterException.hpp File Reference	411

8.16	include/multiscale/exception/RectangularEntityCsvToInputFilesConverterException.hpp File Reference	412
8.17	include/multiscale/exception/RectangularMatFactoryException.hpp File Reference	413
8.18	include/multiscale/exception/RegionException.hpp File Reference	414
8.19	include/multiscale/exception/SimulationClusterDetectorException.hpp File Reference	415
8.20	modules/analysis/spatial/include/multiscale/analysis/spatial/CircularityMeasure.hpp File Reference	416
8.21	modules/analysis/spatial/include/multiscale/analysis/spatial/Cluster.hpp File Reference	417
8.22	modules/analysis/spatial/include/multiscale/analysis/spatial/cluster/SimulationClusterDetector.hpp File Reference	418
8.23	modules/analysis/spatial/include/multiscale/analysis/spatial/ClusterDetector.hpp File Reference	419
8.24	modules/analysis/spatial/include/multiscale/analysis/spatial/DataPoint.hpp File Reference	420
8.25	modules/analysis/spatial/include/multiscale/analysis/spatial/DBSCAN.hpp File Reference	421
8.26	modules/analysis/spatial/include/multiscale/analysis/spatial/Detector.hpp File Reference	423
8.27	modules/analysis/spatial/include/multiscale/analysis/spatial/Entity.hpp File Reference	423
8.28	modules/analysis/spatial/include/multiscale/analysis/spatial/factory/CircularMatFactory.hpp File Reference	425
8.29	modules/analysis/spatial/include/multiscale/analysis/spatial/factory/RectangularMatFactory.hpp File Reference	426
8.30	modules/analysis/spatial/include/multiscale/analysis/spatial/MatFactory.hpp File Reference	426
8.31	modules/analysis/spatial/include/multiscale/analysis/spatial/Region.hpp File Reference	427
8.32	modules/analysis/spatial/include/multiscale/analysis/spatial/RegionDetector.hpp File Reference	429
8.32.1	Variable Documentation	430
8.32.1.1	ENCLOSING_RECT_VERTICES	430
8.33	modules/analysis/spatial/include/multiscale/analysis/spatial/Shape2D.hpp File Reference	430
8.34	modules/analysis/spatial/include/multiscale/analysis/spatial/Silhouette.hpp File Reference	431
8.35	modules/analysis/spatial/include/multiscale/analysis/spatial/SpatialCollection2D.hpp File Reference	432
8.36	modules/analysis/spatial/sample/CircularMatFactorySample.cpp File Reference	433
8.36.1	Function Documentation	433
8.36.1.1	main	433
8.37	modules/analysis/spatial/sample/LexicographicIteratorSample.cpp File Reference	434
8.37.1	Function Documentation	434
8.37.1.1	main	434
8.38	modules/analysis/spatial/sample/RectangularMatFactorySample.cpp File Reference	435
8.38.1	Function Documentation	435
8.38.1.1	main	435
8.39	modules/analysis/spatial/src/CircularDetectRegions.cpp File Reference	436
8.39.1	Function Documentation	437
8.39.1.1	areValidParameters	437
8.39.1.2	initArgumentsConfig	437
8.39.1.3	loadDetectorParameterValues	438
8.39.1.4	loadDetectorParameterValues	438

8.39.1.5	main	439
8.39.1.6	printHelpInformation	440
8.39.1.7	printWrongParameters	441
8.39.1.8	saveDetectorParameterValues	441
8.39.1.9	saveDetectorParameterValues	442
8.39.2	Variable Documentation	443
8.39.2.1	CONFIG_FILE	443
8.39.2.2	LABEL_ALPHA	443
8.39.2.3	LABEL_BETA	443
8.39.2.4	LABEL_BLUR_KERNEL_SIZE	443
8.39.2.5	LABEL_EPSILON	443
8.39.2.6	LABEL_MORPHOLOGICAL_CLOSE_ITERATIONS	444
8.39.2.7	LABEL_REGION_AREA_THRESH	444
8.39.2.8	LABEL_ROOT_COMMENT	444
8.39.2.9	LABEL_THRESHOLD_VALUE	444
8.39.2.10	ROOT_COMMENT	444
8.40	modules/analysis/spatial/src/CircularityMeasure.cpp File Reference	444
8.41	modules/analysis/spatial/src/Cluster.cpp File Reference	445
8.42	modules/analysis/spatial/src/cluster/SimulationClusterDetector.cpp File Reference	445
8.43	modules/analysis/spatial/src/ClusterDetector.cpp File Reference	445
8.44	modules/analysis/spatial/src/DBSCAN.cpp File Reference	446
8.45	modules/analysis/spatial/src/Detector.cpp File Reference	446
8.46	modules/analysis/spatial/src/Entity.cpp File Reference	447
8.47	modules/analysis/spatial/src/factory/CircularMatFactory.cpp File Reference	447
8.48	modules/analysis/spatial/src/factory/RectangularMatFactory.cpp File Reference	448
8.49	modules/analysis/spatial/src/MatFactory.cpp File Reference	448
8.50	modules/analysis/spatial/src/RectangularDetectRegions.cpp File Reference	449
8.50.1	Function Documentation	450
8.50.1.1	isValidParameters	450
8.50.1.2	initArgumentsConfig	450
8.50.1.3	loadDetectorParameterValues	450
8.50.1.4	loadDetectorParameterValues	451
8.50.1.5	main	452
8.50.1.6	printHelpInformation	452
8.50.1.7	printWrongParameters	453
8.50.1.8	saveDetectorParameterValues	453
8.50.1.9	saveDetectorParameterValues	453
8.50.2	Variable Documentation	454
8.50.2.1	CONFIG_FILE	454
8.50.2.2	LABEL_ALPHA	454

8.50.2.3	LABEL_BETA	454
8.50.2.4	LABEL_BLUR_KERNEL_SIZE	454
8.50.2.5	LABEL_EPSILON	454
8.50.2.6	LABEL_MORPHOLOGICAL_CLOSE_ITERATIONS	454
8.50.2.7	LABEL_REGION_AREA_THRESH	455
8.50.2.8	LABEL_ROOT_COMMENT	455
8.50.2.9	LABEL_THRESHOLD_VALUE	455
8.50.2.10	ROOT_COMMENT	455
8.51	modules/analysis/spatial/src/Region.cpp File Reference	455
8.52	modules/analysis/spatial/src/RegionDetector.cpp File Reference	455
8.52.1	Function Documentation	456
8.52.1.1	convertVertices	456
8.53	modules/analysis/spatial/src/Silhouette.cpp File Reference	456
8.54	modules/analysis/spatial/src/SimulationDetectClusters.cpp File Reference	457
8.54.1	Function Documentation	458
8.54.1.1	isValidParameters	458
8.54.1.2	initArgumentsConfig	458
8.54.1.3	loadDetectorParameterValues	458
8.54.1.4	loadDetectorParameterValues	458
8.54.1.5	main	459
8.54.1.6	printHelpInformation	460
8.54.1.7	printWrongParameters	460
8.54.1.8	saveDetectorParameterValues	461
8.54.1.9	saveDetectorParameterValues	461
8.54.2	Variable Documentation	461
8.54.2.1	CONFIG_FILE	461
8.54.2.2	LABEL_EPS	462
8.54.2.3	LABEL_MINPOINTS	462
8.54.2.4	LABEL_ROOT_COMMENT	462
8.54.2.5	ROOT_COMMENT	462
8.55	modules/analysis/spatial/src/SpatialCollection2D.cpp File Reference	462
8.56	modules/analysis/spatial/test/DBSCANTest.cpp File Reference	463
8.56.1	Function Documentation	463
8.56.1.1	convertPoints	463
8.56.1.2	main	464
8.56.1.3	printResults	464
8.56.1.4	runTest	465
8.56.1.5	runTest1	466
8.56.1.6	runTest2	467
8.56.1.7	runTest3	467

8.56.1.8	runTest4	468
8.56.1.9	runTest5	468
8.56.1.10	runTests	469
8.57	modules/util/include/multiscale/util/Geometry2D.hpp File Reference	470
8.58	modules/util/include/multiscale/util/iterator/LexicographicNumberIterator.hpp File Reference	471
8.59	modules/util/include/multiscale/util/iterator/NumberIteratorType.hpp File Reference	472
8.60	modules/util/include/multiscale/util/iterator/StandardNumberIterator.hpp File Reference	472
8.61	modules/util/include/multiscale/util/MinEnclosingTriangleFinder.hpp File Reference	473
8.62	modules/util/include/multiscale/util/NumberIterator.hpp File Reference	474
8.63	modules/util/include/multiscale/util/Numeric.hpp File Reference	474
8.64	modules/util/include/multiscale/util/NumericRangeManipulator.hpp File Reference	475
8.65	modules/util/include/multiscale/util/RGBColourGenerator.hpp File Reference	475
8.66	modules/util/include/multiscale/util/StringManipulator.hpp File Reference	476
8.67	modules/util/sample/LineCircleIntersectionSample.cpp File Reference	477
8.67.1	Function Documentation	478
8.67.1.1	main	478
8.67.1.2	printPoints	478
8.68	modules/util/sample/MinEnclosingTriangleFinderSample.cpp File Reference	479
8.68.1	Function Documentation	480
8.68.1.1	arePointsEnclosed	480
8.68.1.2	generateRandomSetOf2DPoints	480
8.68.1.3	isOneEdgeFlush	480
8.68.1.4	isTriangleTouchingPolygon	481
8.68.1.5	isValidTriangle	481
8.68.1.6	main	482
8.68.1.7	outputMinEnclosingTriangleFinderResults	482
8.68.1.8	printPolygon	483
8.68.1.9	runMinEnclosingTriangleFinder	483
8.68.1.10	runMinEnclosingTriangleFinder	484
8.68.1.11	runMinEnclosingTriangleFinderUsingRandomPolygons	484
8.68.2	Variable Documentation	485
8.68.2.1	KEY_ESC	485
8.68.2.2	LINE_THICKNESS	485
8.68.2.3	MAX_POLYGON_POINTS	485
8.68.2.4	NR RAND POLYGONS	485
8.68.2.5	POINT_IN_TRIANGLE_THRESH	485
8.68.2.6	POLYGON_POINT_X_MAX	485
8.68.2.7	POLYGON_POINT_Y_MAX	485
8.68.2.8	RADIUS	486
8.68.2.9	WIN_MIN_AREA_TRIANGLE	486

8.69	modules/util/sample/RGBColourGeneratorSample.cpp File Reference	486
8.69.1	Function Documentation	486
8.69.1.1	main	486
8.70	modules/util/src/Geometry2D.cpp File Reference	487
8.71	modules/util/src/iterator/LexicographicNumberIterator.cpp File Reference	487
8.72	modules/util/src/iterator/StandardNumberIterator.cpp File Reference	488
8.73	modules/util/src/MinEnclosingTriangleFinder.cpp File Reference	488
8.74	modules/util/src/NumberIterator.cpp File Reference	489
8.75	modules/util/src/Numeric.cpp File Reference	489
8.76	modules/util/src/RGBColourGenerator.cpp File Reference	490
8.77	modules/util/src/StringManipulator.cpp File Reference	490
8.78	modules/util/test/Geometry2DTest.cpp File Reference	491
8.78.1	Function Documentation	491
8.78.1.1	main	491
8.78.1.2	TEST	492
8.78.1.3	TEST	492
8.78.2	Variable Documentation	492
8.78.2.1	DOUBLE_COMP_ERROR	492
8.79	modules/util/test/MinEnclosingTriangleFinderTest.cpp File Reference	492
8.79.1	Function Documentation	493
8.79.1.1	main	493
8.79.1.2	TEST_F	493
8.79.1.3	TEST_F	493
8.79.1.4	TEST_F	493
8.79.1.5	TEST_F	493
8.80	modules/video/circular/include/multiscale/video/circular/AnnularSector.hpp File Reference	493
8.81	modules/video/circular/include/multiscale/video/circular/CartesianToPolarConverter.hpp File Reference	494
8.82	modules/video/circular/include/multiscale/video/circular/PolarCsvToInputFilesConverter.hpp File Reference	496
8.83	modules/video/circular/include/multiscale/video/circular/PolarGnuplotScriptGenerator.hpp File Reference	496
8.84	modules/video/circular/src/AnnularSector.cpp File Reference	498
8.84.1	Variable Documentation	498
8.84.1.1	SEPARATOR	498
8.85	modules/video/circular/src/CartesianToPolarConverter.cpp File Reference	498
8.86	modules/video/circular/src/MapCartesianToPolarScript.cpp File Reference	499
8.86.1	Function Documentation	499
8.86.1.1	isValidParameters	499
8.86.1.2	initArgumentsConfig	500
8.86.1.3	isValidOutputType	500

8.86.1.4	main	500
8.86.1.5	printHelpInformation	501
8.86.1.6	printWrongParameters	501
8.87	modules/video/circular/src/PolarCsvToInputFilesConverter.cpp File Reference	501
8.88	modules/video/circular/src/PolarGnuplotScriptGenerator.cpp File Reference	502
8.89	modules/video/circular/src/PolarMapCsvToInputFiles.cpp File Reference	502
8.89.1	Function Documentation	503
8.89.1.1	isValidParameters	503
8.89.1.2	initArgumentsConfig	504
8.89.1.3	isValidNrOfConcentrationsForPosition	504
8.89.1.4	main	505
8.89.1.5	printHelpInformation	505
8.89.1.6	printWrongParameters	505
8.89.1.7	setLogScaling	505
8.89.1.8	setNumberIteratorType	506
8.89.1.9	setSelectedConcentrationIndex	506
8.90	modules/video/rectangular/include/multiscale/video/rectangular/CartesianToConcentrationsConverter.hpp File Reference	506
8.91	modules/video/rectangular/include/multiscale/video/rectangular/RectangularCsvToInputFiles-Converter.hpp File Reference	508
8.92	modules/video/rectangular/include/multiscale/video/rectangular/RectangularEntityCsvToInputFiles-Converter.hpp File Reference	509
8.93	modules/video/rectangular/include/multiscale/video/rectangular/RectangularGnuplotScriptGenerator.hpp File Reference	510
8.94	modules/video/rectangular/src/CartesianToConcentrationsConverter.cpp File Reference	511
8.95	modules/video/rectangular/src/MapCartesianToScript.cpp File Reference	511
8.95.1	Function Documentation	512
8.95.1.1	isValidParameters	512
8.95.1.2	initArgumentsConfig	512
8.95.1.3	main	512
8.95.1.4	printHelpInformation	513
8.95.1.5	printWrongParameters	513
8.96	modules/video/rectangular/src/RectangularCsvToInputFilesConverter.cpp File Reference	513
8.97	modules/video/rectangular/src/RectangularEntityCsvToInputFilesConverter.cpp File Reference	513
8.98	modules/video/rectangular/src/RectangularGnuplotScriptGenerator.cpp File Reference	514
8.99	modules/video/rectangular/src/RectangularMapCsvToInputFiles.cpp File Reference	514
8.99.1	Function Documentation	515
8.99.1.1	isValidParameters	515
8.99.1.2	initArgumentsConfig	516
8.99.1.3	isValidNrOfConcentrationsForPosition	516
8.99.1.4	main	516

8.99.1.5 printHelpInformation	517
8.99.1.6 printWrongParameters	517
8.99.1.7 setLogScaling	517
8.99.1.8 setNumberIteratorType	517
8.99.1.9 setSelectedConcentrationIndex	517
8.100modules/video/rectangular/src/RectangularMapEntityCsvToInputFiles.cpp File Reference	517
8.100.1 Function Documentation	518
8.100.1.1 areValidParameters	518
8.100.1.2 initArgumentsConfig	519
8.100.1.3 main	519
8.100.1.4 printHelpInformation	519
8.100.1.5 printWrongParameters	519
8.100.1.6 setNumberIteratorType	519
Index	519

Chapter 1

Multiscale

1.1 Brief description

The "Multiscale" software is a multiscale model checker implemented during the PhD research project carried out by Ovidiu Parvu, Brunel University, London, United Kingdom, October 2012 - present.

1.2 Contact

For more information, comments, recommendations or suggestions please visit the author's [institutional web page](#), where contact details are provided.

Chapter 2

Namespace Index

2.1 Namespace List

Here is a list of all namespaces with brief descriptions:

<code>multiscale</code>	15
<code>multiscale::analysis</code>	17
<code>multiscale::video</code>	18
<code>multiscaletest</code>	18

Chapter 3

Hierarchical Index

3.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

multiscale::video::AnnularSector	19
multiscale::video::CartesianToConcentrationsConverter	22
multiscale::video::CartesianToPolarConverter	32
multiscale::analysis::CircularityMeasure	43
multiscale::analysis::DataPoint	93
EuclideanDataPoint	133
multiscale::analysis::Entity	122
multiscale::analysis::DBSCAN	96
multiscale::analysis::Detector	106
multiscale::analysis::ClusterDetector	71
multiscale::analysis::SimulationClusterDetector	351
multiscale::analysis::RegionDetector	311
multiscale::ExceptionHandler	135
multiscale::Geometry2D	136
multiscale::analysis::MatFactory	170
multiscale::analysis::CircularMatFactory	44
multiscale::analysis::RectangularMatFactory	291
multiscale::MinEnclosingTriangleFinder	179
multiscale::NumberIterator	229
multiscale::LexicographicNumberIterator	161
multiscale::StandardNumberIterator	389
multiscale::Numeric	236
multiscale::NumericRangeManipulator	240
multiscale::video::PolarCsvToInputFilesConverter	241
multiscale::video::PolarGnuplotScriptGenerator	255
multiscale::video::RectangularCsvToInputFilesConverter	261
multiscale::video::RectangularEntityCsvToInputFilesConverter	274
multiscale::video::RectangularGnuplotScriptGenerator	286
multiscale::RGBColourGenerator	344
runtime_error	
multiscale::MultiscaleException	224
multiscale::CartesianToConcentrationsConverterException	29
multiscale::CartesianToPolarConverterException	41
multiscale::CircularMatFactoryException	52
multiscale::ClusterException	90
multiscale::DetectorException	120
multiscale::EntityException	130

multiscale::MatFactoryException	177
multiscale::MinEnclosingTriangleFinderException	215
multiscale::PolarCsvToInputFilesConverterException	253
multiscale::RectangularCsvToInputFilesConverterException	271
multiscale::RectangularEntityCsvToInputFilesConverterException	283
multiscale::RectangularMatFactoryException	298
multiscale::RegionException	341
multiscale::SimulationClusterDetectorException	364
multiscale::analysis::Silhouette	347
multiscale::analysis::SpatialCollection2D	367
multiscale::analysis::Cluster	55
multiscale::analysis::Region	301
multiscale::StringManipulator	392
Test	
multiscaletest::MultiscaleTest	226
multiscaletest::MinEnclosingTriangleFinderTest	217

Chapter 4

Class Index

4.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

multiscale::video::AnnularSector	An annular sector is the basic element in the considered circular geometry	19
multiscale::video::CartesianToConcentrationsConverter	Scale the values of the rectangular geometry grid cells	22
multiscale::CartesianToConcentrationsConverterException	Exception class for the CartesianToConcentrationsConverter class	29
multiscale::video::CartesianToPolarConverter	Converter from the rectangular geometry grid cells to annular sectors	32
multiscale::CartesianToPolarConverterException	Exception class for the CartesianToPolarConverter class	41
multiscale::analysis::CircularityMeasure	Class for computing the circularity measure for the given collection of points	43
multiscale::analysis::CircularMatFactory	Class for creating a Mat object considering a circular grid	44
multiscale::CircularMatFactoryException	Exception class for the CircularMatFactory instances	52
multiscale::analysis::Cluster	Class for representing a cluster of entities in an image	55
multiscale::analysis::ClusterDetector	Class for detecting clusters in 2D images	71
multiscale::ClusterException	Exception class for the Cluster instances	90
multiscale::analysis::DataPoint	Class for representing a data point	93
multiscale::analysis::DBSCAN	Class which implements an improved version of the DBSCAN algorithm	96
multiscale::analysis::Detector	Abstract class for detecting entities of interest in images	106
multiscale::DetectorException	Exception class for the Detector class	120
multiscale::analysis::Entity	Class for representing an entity in an image (e.g. cell, organism etc.)	122
multiscale::EntityException	Exception class for the Entity instances	130
EuclideanDataPoint	133
multiscale::ExceptionHandler	Exception handler class	135

multiscale::Geometry2D	Two-dimensional geometric operations	136
multiscale::LexicographicNumberIterator	Iterator class starting at 1 and ending at the provided upper bound considering that each number is followed by an " _"	161
multiscale::analysis::MatFactory	Class for creating a Mat object	170
multiscale::MatFactoryException	Exception class for the MatFactory class	177
multiscale::MinEnclosingTriangleFinder	Class for computing the minimum area enclosing triangle for a given polygon	179
multiscale::MinEnclosingTriangleFinderException	Exception class for the minimum area enclosing triangle module	215
multiscaletest::MinEnclosingTriangleFinderTest	Class for testing the minimum enclosing triangle algorithm	217
multiscale::MultiscaleException	Parent exception class for the project	224
multiscaletest::MultiscaleTest		226
multiscale::NumberIterator	Abstract class representing a number iterator	229
multiscale::Numeric	Class for manipulating numbers (shorts, ints, floats, doubles etc.)	236
multiscale::NumericRangeManipulator	Operations for ranges of numeric values	240
multiscale::video::PolarCsvToInputFilesConverter	Csv file to input file converter considering polar coordinates	241
multiscale::PolarCsvToInputFilesConverterException	Exception class for the PolarCsvToInputFilesConverter class	253
multiscale::video::PolarGnuplotScriptGenerator	Gnuplot script generator from the provided annular sectors	255
multiscale::video::RectangularCsvToInputFilesConverter	Csv file to input file converter considering cartesian coordinates	261
multiscale::RectangularCsvToInputFilesConverterException	Exception class for the RectangularCsvToInputFilesConverter class	271
multiscale::video::RectangularEntityCsvToInputFilesConverter	Csv entity file to input file converter considering cartesian coordinates	274
multiscale::RectangularEntityCsvToInputFilesConverterException	Exception class for the RectangularEntityCsvToInputFilesConverter class	283
multiscale::video::RectangularGnuplotScriptGenerator	Gnuplot script generator from the provided concentrations considering a rectangular geometry	286
multiscale::analysis::RectangularMatFactory	Class for creating a Mat object considering a rectangular grid	291
multiscale::RectangularMatFactoryException	Exception class for the RectangularMatFactory instances	298
multiscale::analysis::Region	Class for representing a region	301
multiscale::analysis::RegionDetector	Class for detecting regions of high intensity in grayscale images	311
multiscale::RegionException	Exception class for the Region instances	341
multiscale::RGBColourGenerator	Generate a RGB colour	344
multiscale::analysis::Silhouette	Class for computing the "Silhouette" clustering index	347
multiscale::analysis::SimulationClusterDetector	Class for detecting clusters in 2D images obtained from simulations	351
multiscale::SimulationClusterDetectorException	Exception class for the SimulationClusterDetector instances	364

multiscale::analysis::SpatialCollection2D	Class for representing a collection of objects in 2D space	367
multiscale::StandardNumberIterator	Iterator class starting at 1 and iterating over all natural numbers until the provided upper bound is reached	389
multiscale::StringManipulator	Class for manipulating strings	392

Chapter 5

File Index

5.1 File List

Here is a list of all files with brief descriptions:

include/multiscale/core/ Multiscale.hpp	397
include/multiscale/core/ MultiscaleTest.hpp	398
include/multiscale/exception/ CartesianToConcentrationsConverterException.hpp	399
include/multiscale/exception/ CartesianToPolarConverterException.hpp	400
include/multiscale/exception/ CircularMatFactoryException.hpp	401
include/multiscale/exception/ ClusterException.hpp	402
include/multiscale/exception/ DetectorException.hpp	403
include/multiscale/exception/ EntityException.hpp	404
include/multiscale/exception/ ExceptionHandler.hpp	405
include/multiscale/exception/ MatFactoryException.hpp	406
include/multiscale/exception/ MinEnclosingTriangleFinderException.hpp	407
include/multiscale/exception/ MultiscaleException.hpp	408
include/multiscale/exception/ PolarCsvToInputFilesConverterException.hpp	409
include/multiscale/exception/ RectangularCsvToInputFilesConverterException.hpp	411
include/multiscale/exception/ RectangularEntityCsvToInputFilesConverterException.hpp	412
include/multiscale/exception/ RectangularMatFactoryException.hpp	413
include/multiscale/exception/ RegionException.hpp	414
include/multiscale/exception/ SimulationClusterDetectorException.hpp	415
modules/analysis/spatial/include/multiscale/analysis/spatial/ CircularityMeasure.hpp	416
modules/analysis/spatial/include/multiscale/analysis/spatial/ Cluster.hpp	417
modules/analysis/spatial/include/multiscale/analysis/spatial/ ClusterDetector.hpp	419
modules/analysis/spatial/include/multiscale/analysis/spatial/ DataPoint.hpp	420
modules/analysis/spatial/include/multiscale/analysis/spatial/ DBSCAN.hpp	421
modules/analysis/spatial/include/multiscale/analysis/spatial/ Detector.hpp	423
modules/analysis/spatial/include/multiscale/analysis/spatial/ Entity.hpp	423
modules/analysis/spatial/include/multiscale/analysis/spatial/ MatFactory.hpp	426
modules/analysis/spatial/include/multiscale/analysis/spatial/ Region.hpp	427
modules/analysis/spatial/include/multiscale/analysis/spatial/ RegionDetector.hpp	429
modules/analysis/spatial/include/multiscale/analysis/spatial/ Shape2D.hpp	430
modules/analysis/spatial/include/multiscale/analysis/spatial/ Silhouette.hpp	431
modules/analysis/spatial/include/multiscale/analysis/spatial/ SpatialCollection2D.hpp	432
modules/analysis/spatial/include/multiscale/analysis/spatial/cluster/ SimulationClusterDetector.hpp	418
modules/analysis/spatial/include/multiscale/analysis/spatial/factory/ CircularMatFactory.hpp	425
modules/analysis/spatial/include/multiscale/analysis/spatial/factory/ RectangularMatFactory.hpp	426
modules/analysis/spatial/sample/ CircularMatFactorySample.cpp	433
modules/analysis/spatial/sample/ LexicographicIteratorSample.cpp	434
modules/analysis/spatial/sample/ RectangularMatFactorySample.cpp	435
modules/analysis/spatial/src/ CircularDetectRegions.cpp	436

modules/analysis/spatial/src/CircularityMeasure.cpp	444
modules/analysis/spatial/src/Cluster.cpp	445
modules/analysis/spatial/src/ClusterDetector.cpp	445
modules/analysis/spatial/src/DBSCAN.cpp	446
modules/analysis/spatial/src/Detector.cpp	446
modules/analysis/spatial/src/Entity.cpp	447
modules/analysis/spatial/src/MatFactory.cpp	448
modules/analysis/spatial/src/RectangularDetectRegions.cpp	449
modules/analysis/spatial/src/Region.cpp	455
modules/analysis/spatial/src/RegionDetector.cpp	455
modules/analysis/spatial/src/Silhouette.cpp	456
modules/analysis/spatial/src/SimulationDetectClusters.cpp	457
modules/analysis/spatial/src/SpatialCollection2D.cpp	462
modules/analysis/spatial/src/cluster/SimulationClusterDetector.cpp	445
modules/analysis/spatial/src/factory/CircularMatFactory.cpp	447
modules/analysis/spatial/src/factory/RectangularMatFactory.cpp	448
modules/analysis/spatial/test/DBSCANTest.cpp	463
modules/util/include/multiscale/util/Geometry2D.hpp	470
modules/util/include/multiscale/util/MinEnclosingTriangleFinder.hpp	473
modules/util/include/multiscale/util/NumberIterator.hpp	474
modules/util/include/multiscale/util/Numeric.hpp	474
modules/util/include/multiscale/util/NumericRangeManipulator.hpp	475
modules/util/include/multiscale/util/RGBColourGenerator.hpp	475
modules/util/include/multiscale/util/StringManipulator.hpp	476
modules/util/include/multiscale/util/iterator/LexicographicNumberIterator.hpp	471
modules/util/include/multiscale/util/iterator/NumberIteratorType.hpp	472
modules/util/include/multiscale/util/iterator/StandardNumberIterator.hpp	472
modules/util/sample/LineCircleIntersectionSample.cpp	477
modules/util/sample/MinEnclosingTriangleFinderSample.cpp	479
modules/util/sample/RGBColourGeneratorSample.cpp	486
modules/util/src/Geometry2D.cpp	487
modules/util/src/MinEnclosingTriangleFinder.cpp	488
modules/util/src/NumberIterator.hpp	489
modules/util/src/Numeric.hpp	489
modules/util/src/RGBColourGenerator.hpp	490
modules/util/src/StringManipulator.hpp	490
modules/util/src/iterator/LexicographicNumberIterator.hpp	487
modules/util/src/iterator/StandardNumberIterator.hpp	488
modules/util/test/Geometry2DTest.cpp	491
modules/util/test/MinEnclosingTriangleFinderTest.cpp	492
modules/video/circular/include/multiscale/video/circular/AnnularSector.hpp	493
modules/video/circular/include/multiscale/video/circular/CartesianToPolarConverter.hpp	494
modules/video/circular/include/multiscale/video/circular/PolarCsvToInputFilesConverter.hpp	496
modules/video/circular/include/multiscale/video/circular/PolarGnuplotScriptGenerator.hpp	496
modules/video/circular/src/AnnularSector.cpp	498
modules/video/circular/src/CartesianToPolarConverter.cpp	498
modules/video/circular/src/MapCartesianToPolarScript.cpp	499
modules/video/circular/src/PolarCsvToInputFilesConverter.hpp	501
modules/video/circular/src/PolarGnuplotScriptGenerator.hpp	502
modules/video/circular/src/PolarMapCsvToInputFiles.hpp	502
modules/video/rectangular/include/multiscale/video/rectangular/CartesianToConcentrationsConverter.- hpp	506
modules/video/rectangular/include/multiscale/video/rectangular/RectangularCsvToInputFilesConverter.- hpp	508
modules/video/rectangular/include/multiscale/video/rectangular/RectangularEntityCsvToInputFiles- Converter.hpp	509
modules/video/rectangular/include/multiscale/video/rectangular/RectangularGnuplotScriptGenerator.hpp	510
modules/video/rectangular/src/CartesianToConcentrationsConverter.cpp	511

modules/video/rectangular/src/MapCartesianToScript.cpp	511
modules/video/rectangular/src/RectangularCsvToInputFilesConverter.cpp	513
modules/video/rectangular/src/RectangularEntityCsvToInputFilesConverter.cpp	513
modules/video/rectangular/src/RectangularGnuplotScriptGenerator.cpp	514
modules/video/rectangular/src/RectangularMapCsvToInputFiles.cpp	514
modules/video/rectangular/src/RectangularMapEntityCsvToInputFiles.cpp	517

Chapter 6

Namespace Documentation

6.1 multiscale Namespace Reference

Namespaces

- namespace [analysis](#)
- namespace [video](#)

Classes

- class [CartesianToConcentrationsConverterException](#)
Exception class for the CartesianToConcentrationsConverter class.
- class [CartesianToPolarConverterException](#)
Exception class for the CartesianToPolarConverter class.
- class [CircularMatFactoryException](#)
Exception class for the CircularMatFactory instances.
- class [ClusterException](#)
Exception class for the Cluster instances.
- class [DetectorException](#)
Exception class for the Detector class.
- class [EntityException](#)
Exception class for the Entity instances.
- class [ExceptionHandler](#)
Exception handler class.
- class [MatFactoryException](#)
Exception class for the MatFactory class.
- class [MinEnclosingTriangleFinderException](#)
Exception class for the minimum area enclosing triangle module.
- class [MultiscaleException](#)
Parent exception class for the project.
- class [PolarCsvToInputFilesConverterException](#)
Exception class for the PolarCsvToInputFilesConverter class.
- class [RectangularCsvToInputFilesConverterException](#)
Exception class for the RectangularCsvToInputFilesConverter class.
- class [RectangularEntityCsvToInputFilesConverterException](#)
Exception class for the RectangularEntityCsvToInputFilesConverter class.
- class [RectangularMatFactoryException](#)

- class [RegionException](#)

Exception class for the `RectangularMatFactory` instances.
- class [SimulationClusterDetectorException](#)

Exception class for the `SimulationClusterDetector` instances.
- class [Geometry2D](#)

Two-dimensional geometric operations.
- class [LexicographicNumberIterator](#)

Iterator class starting at 1 and ending at the provided upper bound considering that each number is followed by an " ".
- class [StandardNumberIterator](#)

Iterator class starting at 1 and iterating over all natural numbers until the provided upper bound is reached.
- class [MinEnclosingTriangleFinder](#)

Class for computing the minimum area enclosing triangle for a given polygon.
- class [NumberIterator](#)

Abstract class representing a number iterator.
- class [Numeric](#)

Class for manipulating numbers (shorts, ints, floats, doubles etc.)
- class [NumericRangeManipulator](#)

Operations for ranges of numeric values.
- class [RGBColourGenerator](#)

Generate a RGB colour.
- class [StringManipulator](#)

Class for manipulating strings.

Enumerations

- enum [NumberIteratorType](#) { **STANDARD** = 1, **LEXICOGRAPHIC** = 2 }
- The type of the number iterator.*

Variables

- const int [ERR_CODE](#) = 1
- const std::string [ERR_MSG](#) = "An error occurred: "

6.1.1 Enumeration Type Documentation

6.1.1.1 enum multiscale::NumberIteratorType

The type of the number iterator.

Enumerator

- STANDARD** Standard number iterator
- LEXICOGRAPHIC** Lexicographic number iterator

Definition at line 7 of file `NumberIteratorType.hpp`.

6.1.2 Variable Documentation

6.1.2.1 const int multiscale::ERR_CODE = 1

Definition at line 11 of file Multiscale.hpp.

Referenced by main().

6.1.2.2 const std::string multiscale::ERR_MSG = "An error occurred: "

Definition at line 12 of file Multiscale.hpp.

Referenced by isValidNrOfConcentrationsForPosition(), isValidOutputType(), multiscale::ExceptionHandler::printErrorMessage(), and printWrongParameters().

6.2 multiscale::analysis Namespace Reference

Classes

- class [CircularityMeasure](#)
Class for computing the circularity measure for the given collection of points.
- class [SimulationClusterDetector](#)
Class for detecting clusters in 2D images obtained from simulations.
- class [Cluster](#)
Class for representing a cluster of entities in an image.
- class [ClusterDetector](#)
Class for detecting clusters in 2D images.
- class [DataPoint](#)
Class for representing a data point.
- class [DBSCAN](#)
Class which implements an improved version of the [DBSCAN](#) algorithm.
- class [Detector](#)
Abstract class for detecting entities of interest in images.
- class [Entity](#)
Class for representing an entity in an image (e.g. cell, organism etc.)
- class [CircularMatFactory](#)
Class for creating a Mat object considering a circular grid.
- class [RectangularMatFactory](#)
Class for creating a Mat object considering a rectangular grid.
- class [MatFactory](#)
Class for creating a Mat object.
- class [Region](#)
Class for representing a region.
- class [RegionDetector](#)
Class for detecting regions of high intensity in grayscale images.
- class [Silhouette](#)
Class for computing the "Silhouette" clustering index.
- class [SpatialCollection2D](#)
Class for representing a collection of objects in 2D space.

Enumerations

- enum [Shape2D](#) { **Triangle** = 1, **Rectangle** = 2, **Circle** = 3, **Undefined** = 4 }
- Enumeration for determining the type of a 2D shape.*

6.2.1 Enumeration Type Documentation

6.2.1.1 enum multiscale::analysis::Shape2D

Enumeration for determining the type of a 2D shape.

Enumerator

- Triangle** Triangular 2D shape
- Rectangle** Rectangular 2D shape
- Circle** Circular 2D shape
- Undefined** Undefined 2D shape

Definition at line 10 of file Shape2D.hpp.

6.3 multiscale::video Namespace Reference

Classes

- class [AnnularSector](#)
An annular sector is the basic element in the considered circular geometry.
- class [CartesianToPolarConverter](#)
Converter from the rectangular geometry grid cells to annular sectors.
- class [PolarCsvToInputFilesConverter](#)
Csv file to input file converter considering polar coordinates.
- class [PolarGnuplotScriptGenerator](#)
Gnuplot script generator from the provided annular sectors.
- class [CartesianToConcentrationsConverter](#)
Scale the values of the rectangular geometry grid cells.
- class [RectangularCsvToInputFilesConverter](#)
Csv file to input file converter considering cartesian coordinates.
- class [RectangularEntityCsvToInputFilesConverter](#)
Csv entity file to input file converter considering cartesian coordinates.
- class [RectangularGnuplotScriptGenerator](#)
Gnuplot script generator from the provided concentrations considering a rectangular geometry.

6.4 multiscaletest Namespace Reference

Classes

- class [MultiscaleTest](#)
- class [MinEnclosingTriangleFinderTest](#)
Class for testing the minimum enclosing triangle algorithm.

Chapter 7

Class Documentation

7.1 multiscale::video::AnnularSector Class Reference

An annular sector is the basic element in the considered circular geometry.

```
#include <AnnularSector.hpp>
```

Collaboration diagram for multiscale::video::AnnularSector:

multiscale::video:: AnnularSector
- startingRadius - endingRadius - startingAngle - endingAngle - concentration
+ AnnularSector() + ~AnnularSector() + initialise() + getConcentration() + getEndingAngle() + getEndingRadius() + getStartingAngle() + getStartingRadius() + toString()

Public Member Functions

- [AnnularSector \(\)](#)
- [~AnnularSector \(\)](#)

- void `initialise` (double `startingRadius`, double `endingRadius`, double `startingAngle`, double `endingAngle`, double `concentration`)
Initialise the members of the class.
- double `getConcentration` () const
Get the value of the concentration.
- double `getEndingAngle` () const
Get the value of the ending angle.
- double `getEndingRadius` () const
Get the value of the ending radius.
- double `getStartingAngle` () const
Get the value of the starting angle.
- double `getStartingRadius` () const
Get the value of the starting radius.
- string `toString` ()
Get the string representation of the annular sector.

Private Attributes

- double `startingRadius`
- double `endingRadius`
- double `startingAngle`
- double `endingAngle`
- double `concentration`

7.1.1 Detailed Description

An annular sector is the basic element in the considered circular geometry.

More information about annuli and sectors of annuli can be found online (e.g. Wikipedia).

Definition at line 16 of file AnnularSector.hpp.

7.1.2 Constructor & Destructor Documentation

7.1.2.1 AnnularSector::AnnularSector ()

Definition at line 11 of file AnnularSector.cpp.

References `concentration`, `endingAngle`, `endingRadius`, `startingAngle`, and `startingRadius`.

7.1.2.2 AnnularSector::~AnnularSector ()

Definition at line 19 of file AnnularSector.cpp.

7.1.3 Member Function Documentation

7.1.3.1 double AnnularSector::getConcentration () const

Get the value of the concentration.

Definition at line 30 of file AnnularSector.cpp.

References `concentration`.

7.1.3.2 double AnnularSector::getEndingAngle () const

Get the value of the ending angle.

Definition at line 34 of file AnnularSector.cpp.

References endingAngle.

7.1.3.3 double AnnularSector::getEndingRadius () const

Get the value of the ending radius.

Definition at line 38 of file AnnularSector.cpp.

References endingRadius.

7.1.3.4 double AnnularSector::getStartingAngle () const

Get the value of the starting angle.

Definition at line 42 of file AnnularSector.cpp.

References startingAngle.

7.1.3.5 double AnnularSector::getStartingRadius () const

Get the value of the starting radius.

Definition at line 46 of file AnnularSector.cpp.

References startingRadius.

7.1.3.6 void AnnularSector::initialise (double *startingRadius*, double *endingRadius*, double *startingAngle*, double *endingAngle*, double *concentration*)

Initialise the members of the class.

Parameters

<i>startingRadius</i>	Starting radius
<i>endingRadius</i>	Ending radius
<i>startingAngle</i>	Starting angle
<i>endingAngle</i>	Ending angle
<i>concentration</i>	Concentration

Definition at line 21 of file AnnularSector.cpp.

References concentration, endingAngle, endingRadius, startingAngle, and startingRadius.

7.1.3.7 string AnnularSector::toString ()

Get the string representation of the annular sector.

Definition at line 50 of file AnnularSector.cpp.

References concentration, endingAngle, endingRadius, SEPARATOR, startingAngle, and startingRadius.

7.1.4 Member Data Documentation

7.1.4.1 double multiscale::video::AnnularSector::concentration [private]

Definition at line 24 of file AnnularSector.hpp.

Referenced by AnnularSector(), getConcentration(), initialise(), and toString().

7.1.4.2 double multiscale::video::AnnularSector::endingAngle [private]

Definition at line 23 of file AnnularSector.hpp.

Referenced by AnnularSector(), getEndingAngle(), initialise(), and toString().

7.1.4.3 double multiscale::video::AnnularSector::endingRadius [private]

Definition at line 21 of file AnnularSector.hpp.

Referenced by AnnularSector(), getEndingRadius(), initialise(), and toString().

7.1.4.4 double multiscale::video::AnnularSector::startingAngle [private]

Definition at line 22 of file AnnularSector.hpp.

Referenced by AnnularSector(), getStartingAngle(), initialise(), and toString().

7.1.4.5 double multiscale::video::AnnularSector::startingRadius [private]

Definition at line 20 of file AnnularSector.hpp.

Referenced by AnnularSector(), getStartingRadius(), initialise(), and toString().

The documentation for this class was generated from the following files:


- modules/video/circular/include/multiscale/video/circular/AnnularSector.hpp
- modules/video/circular/src/AnnularSector.cpp

7.2 multiscale::video::CartesianToConcentrationsConverter Class Reference

Scale the values of the rectangular geometry grid cells.

```
#include <CartesianToConcentrationsConverter.hpp>
```

Collaboration diagram for multiscale::video::CartesianToConcentrationsConverter:

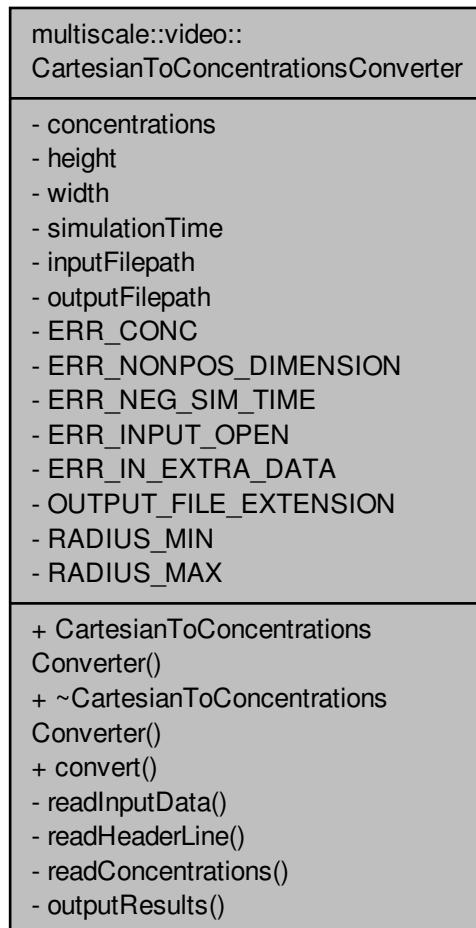

Public Member Functions

- `CartesianToConcentrationsConverter (const string &inputfilepath, const string &outputfilepath)`
- `~CartesianToConcentrationsConverter ()`
- `void convert ()`

Start the conversion.

Private Member Functions

- `void readInputData ()`
Read the input data.
- `void readHeaderLine (ifstream &fin)`
Read the header line.
- `void readConcentrations (ifstream &fin)`
Read the concentrations.
- `void outputResults ()`

Output the results.

Private Attributes

- `vector< double > concentrations`
- `unsigned long height`
- `unsigned long width`
- `double simulationTime`
- `string inputfilepath`
- `string outputfilepath`

Static Private Attributes

- `static const string ERR_CONC = "All concentrations have to be between 0 and 1."`
- `static const string ERR_NONPOS_DIMENSION = "The dimensions N and M must be positive."`
- `static const string ERR_NEG_SIM_TIME = "The simulation time must be non-negative."`
- `static const string ERR_INPUT_OPEN = "The input file could not be opened"`
- `static const string ERR_IN_EXTRA_DATA = "The input file contains more data than required."`
- `static const string OUTPUT_FILE_EXTENSION = ".out"`
- `static const double RADIUS_MIN = 0.001`
- `static const double RADIUS_MAX = 0.3`

7.2.1 Detailed Description

Scale the values of the rectangular geometry grid cells.

Definition at line 15 of file `CartesianToConcentrationsConverter.hpp`.

7.2.2 Constructor & Destructor Documentation

7.2.2.1 `CartesianToConcentrationsConverter::CartesianToConcentrationsConverter (const string & inputfilepath, const string & outputfilepath)`

Definition at line 15 of file `CartesianToConcentrationsConverter.cpp`.

References `height`, `simulationTime`, and `width`.

7.2.2.2 `CartesianToConcentrationsConverter::~CartesianToConcentrationsConverter ()`

Definition at line 24 of file `CartesianToConcentrationsConverter.cpp`.

7.2.3 Member Function Documentation

7.2.3.1 `void CartesianToConcentrationsConverter::convert ()`


Start the conversion.

Definition at line 26 of file `CartesianToConcentrationsConverter.cpp`.


References `outputResults()`, and `readInputData()`.

Referenced by `main()`.

Here is the call graph for this function:

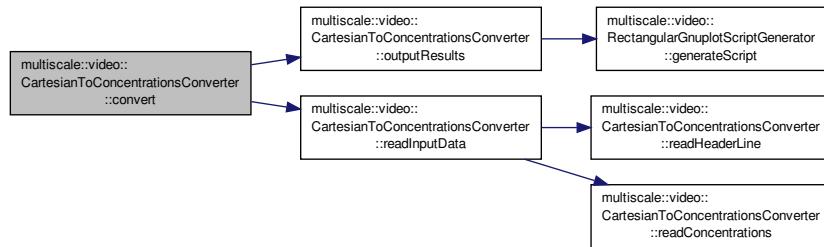

Here is the caller graph for this function:



7.2.3.2 void CartesianToConcentrationsConverter::outputResults() [private]


Output the results.

Definition at line 84 of file `CartesianToConcentrationsConverter.cpp`.


References `concentrations`, `multiscale::video::RectangularGnuplotScriptGenerator::generateScript()`, `height`, `outputFilepath`, `simulationTime`, and `width`.

Referenced by `convert()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.2.3.3 void `CartesianToConcentrationsConverter::readConcentrations (ifstream & fin)` [private]

Read the concentrations.

Parameters

<code>fin</code>	Input file stream
------------------	-------------------

Definition at line 64 of file `CartesianToConcentrationsConverter.cpp`.

References concentrations, ERR_CONC, height, MS_throw, and width.

Referenced by `readInputData()`.

Here is the caller graph for this function:



7.2.3.4 void `CartesianToConcentrationsConverter::readHeaderLine (ifstream & fin)` [private]

Read the header line.

The header line contains values for number of concentric circles, number of sectors and simulation time

Parameters

<code>fin</code>	Input file stream
------------------	-------------------

Definition at line 55 of file `CartesianToConcentrationsConverter.cpp`.

References ERR_NEG_SIM_TIME, ERR_NONPOS_DIMENSION, height, MS_throw, simulationTime, and width.

Referenced by `readInputData()`.

Here is the caller graph for this function:



7.2.3.5 void CartesianToConcentrationsConverter::readInputData() [private]


Read the input data.

Definition at line 31 of file `CartesianToConcentrationsConverter.cpp`.


References `ERR_IN_EXTRA_DATA`, `ERR_INPUT_OPEN`, `inputFilepath`, `MS_throw`, `readConcentrations()`, and `readHeaderLine()`.

Referenced by `convert()`.

Here is the call graph for this function:

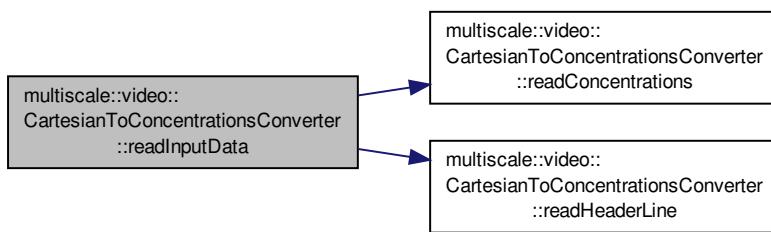

Here is the caller graph for this function:



7.2.4 Member Data Documentation

7.2.4.1 `vector<double> multiscale::video::CartesianToConcentrationsConverter::concentrations` [private]

Concentrations received as input

Definition at line 19 of file `CartesianToConcentrationsConverter.hpp`.

Referenced by `outputResults()`, and `readConcentrations()`.

7.2.4.2 `const string CartesianToConcentrationsConverter::ERR_CONC = "All concentrations have to be between 0 and 1."` [static], [private]

Definition at line 62 of file `CartesianToConcentrationsConverter.hpp`.

Referenced by `readConcentrations()`.

7.2.4.3 `const string CartesianToConcentrationsConverter::ERR_IN_EXTRA_DATA = "The input file contains more data than required."` [static], [private]

Definition at line 66 of file `CartesianToConcentrationsConverter.hpp`.

Referenced by `readInputData()`.

7.2.4.4 const string CartesianToConcentrationsConverter::ERR_INPUT_OPEN = "The input file could not be opened"
[static], [private]

Definition at line 65 of file `CartesianToConcentrationsConverter.hpp`.

Referenced by `readInputData()`.

7.2.4.5 const string CartesianToConcentrationsConverter::ERR_NEG_SIM_TIME = "The simulation time must be non-negative."
[static], [private]

Definition at line 64 of file `CartesianToConcentrationsConverter.hpp`.

Referenced by `readHeaderLine()`.

7.2.4.6 const string CartesianToConcentrationsConverter::ERR_NONPOS_DIMENSION = "The dimensions N and M must be positive." [static], [private]

Definition at line 63 of file `CartesianToConcentrationsConverter.hpp`.

Referenced by `readHeaderLine()`.

7.2.4.7 unsigned long multiscale::video::CartesianToConcentrationsConverter::height [private]

Height of the grid

Definition at line 21 of file `CartesianToConcentrationsConverter.hpp`.

Referenced by `CartesianToConcentrationsConverter()`, `outputResults()`, `readConcentrations()`, and `readHeaderLine()`.

7.2.4.8 string multiscale::video::CartesianToConcentrationsConverter::inputFilepath [private]

Path to the input file

Definition at line 25 of file `CartesianToConcentrationsConverter.hpp`.

Referenced by `readInputData()`.

7.2.4.9 const string CartesianToConcentrationsConverter::OUTPUT_FILE_EXTENSION = ".out" [static], [private]

Definition at line 68 of file `CartesianToConcentrationsConverter.hpp`.

7.2.4.10 string multiscale::video::CartesianToConcentrationsConverter::outputFilepath [private]

Path to the output file

Definition at line 26 of file `CartesianToConcentrationsConverter.hpp`.

Referenced by `outputResults()`.

7.2.4.11 const double CartesianToConcentrationsConverter::RADIUS_MAX = 0.3 [static], [private]

Definition at line 71 of file `CartesianToConcentrationsConverter.hpp`.

7.2.4.12 const double CartesianToConcentrationsConverter::RADIUS_MIN = 0.001 [static], [private]

Definition at line 70 of file `CartesianToConcentrationsConverter.hpp`.

7.2.4.13 double multiscale::video::CartesianToConcentrationsConverter::simulationTime [private]

Simulation time

Definition at line 23 of file `CartesianToConcentrationsConverter.hpp`.

Referenced by `CartesianToConcentrationsConverter()`, `outputResults()`, and `readHeaderLine()`.

7.2.4.14 unsigned long multiscale::video::CartesianToConcentrationsConverter::width [private]

Width of the grid

Definition at line 22 of file `CartesianToConcentrationsConverter.hpp`.

Referenced by `CartesianToConcentrationsConverter()`, `outputResults()`, `readConcentrations()`, and `readHeaderLine()`.

The documentation for this class was generated from the following files:


- `modules/video/rectangular/include/multiscale/video/rectangular/CartesianToConcentrationsConverter.hpp`
- `modules/video/rectangular/src/CartesianToConcentrationsConverter.cpp`

7.3 multiscale::CartesianToConcentrationsConverterException Class Reference


Exception class for the `CartesianToConcentrationsConverter` class.

```
#include <CartesianToConcentrationsConverterException.hpp>
```

Inheritance diagram for multiscale::CartesianToConcentrationsConverterException:

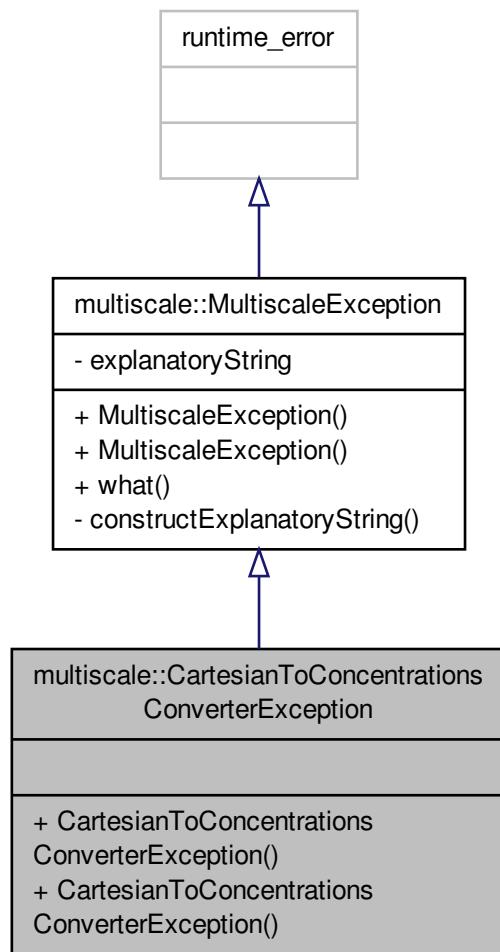

Collaboration diagram for multiscale::CartesianToConcentrationsConverterException:

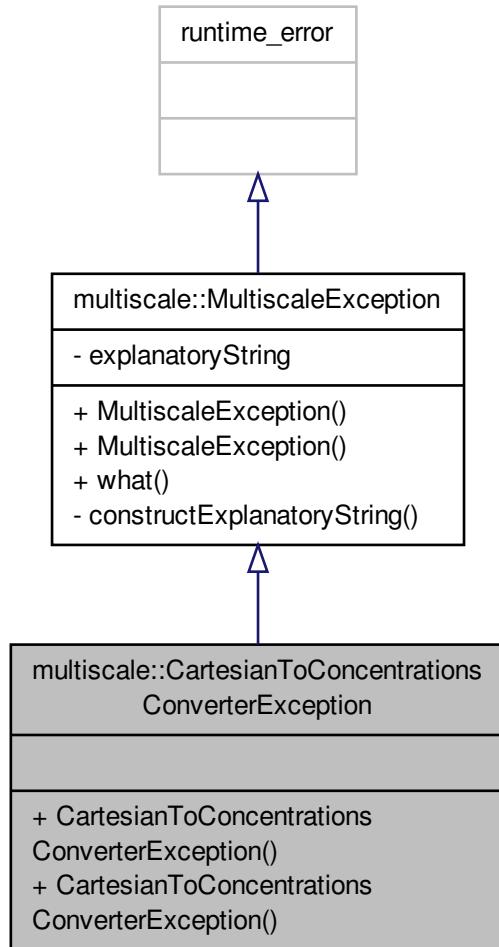

Public Member Functions

- [CartesianToConcentrationsConverterException](#) (const string &file, int line, const string &msg)
- [CartesianToConcentrationsConverterException](#) (const string &file, int line, const char *msg)

7.3.1 Detailed Description

Exception class for the `CartesianToConcentrationsConverter` class.

Definition at line 14 of file `CartesianToConcentrationsConverterException.hpp`.

7.3.2 Constructor & Destructor Documentation

7.3.2.1 `multiscale::CartesianToConcentrationsConverterException::CartesianToConcentrationsConverterException (const string & file, int line, const string & msg) [inline]`

Definition at line 18 of file `CartesianToConcentrationsConverterException.hpp`.

7.3.2.2 `multiscale::CartesianToConcentrationsConverterException::CartesianToConcentrationsConverterException (const string & file, int line, const char * msg) [inline]`

Definition at line 20 of file `CartesianToConcentrationsConverterException.hpp`.

The documentation for this class was generated from the following file:

- `include/multiscale/exception/CartesianToConcentrationsConverterException.hpp`

7.4 `multiscale::video::CartesianToPolarConverter` Class Reference

Converter from the rectangular geometry grid cells to annular sectors.

```
#include <CartesianToPolarConverter.hpp>
```

Collaboration diagram for multiscale::video::CartesianToPolarConverter:

multiscale::video:: CartesianToPolarConverter
<ul style="list-style-type: none"> - annularSectors - concentrations - nrOfConcentricCircles - nrOfSectors - simulationTime - inputfilepath - outputfilepath - ERR_CONC - ERR_NONPOS_DIMENSION - ERR_NEG_SIM_TIME - ERR_INPUT_OPEN - ERR_IN_EXTRA_DATA - OUTPUT_FILE_EXTENSION - RADIUS_MIN - RADIUS_MAX
<ul style="list-style-type: none"> + <code>CartesianToPolarConverter()</code> + <code>~CartesianToPolarConverter()</code> + <code>convert()</code> - <code>readInputData()</code> - <code>readHeaderLine()</code> - <code>readConcentrations()</code> - <code>transformToAnnularSectors()</code> - <code>outputResultsAsFile()</code> - <code>outputResultsAsScript()</code>

Public Member Functions

- `CartesianToPolarConverter (const string &inputfilepath, const string &outputfilepath)`
- `~CartesianToPolarConverter ()`
- `void convert (bool outputToScript)`

Start the conversion.

Private Member Functions

- `void readInputData ()`
Read the input data.
- `void readHeaderLine (ifstream &fin)`
Read the header line.
- `void readConcentrations (ifstream &fin)`
Read the concentrations.

- void `transformToAnnularSectors ()`
Convert the concentrations to annular sectors.
- void `outputResultsAsFile ()`
Output the results as a plain file.
- void `outputResultsAsScript ()`
Output the results as a gnuplot script.

Private Attributes

- `vector< AnnularSector > annularSectors`
- `vector< double > concentrations`
- `unsigned long nrOfConcentricCircles`
- `unsigned long nrOfSectors`
- `double simulationTime`
- `string inputfilepath`
- `string outputfilepath`

Static Private Attributes

- `static const string ERR_CONC = "All concentrations have to be between 0 and 1."`
- `static const string ERR_NONPOS_DIMENSION = "The dimensions N and M must be positive."`
- `static const string ERR_NEG_SIM_TIME = "The simulation time must be non-negative."`
- `static const string ERR_INPUT_OPEN = "The input file could not be opened"`
- `static const string ERR_IN_EXTRA_DATA = "The input file contains more data than required."`
- `static const string OUTPUT_FILE_EXTENSION = ".out"`
- `static const double RADIUS_MIN = 0.001`
- `static const double RADIUS_MAX = 0.3`

7.4.1 Detailed Description

Converter from the rectangular geometry grid cells to annular sectors.

Definition at line 17 of file `CartesianToPolarConverter.hpp`.

7.4.2 Constructor & Destructor Documentation

7.4.2.1 `CartesianToPolarConverter::CartesianToPolarConverter (const string & inputfilepath, const string & outputfilepath)`

Definition at line 15 of file `CartesianToPolarConverter.cpp`.

References `nrOfConcentricCircles`, `nrOfSectors`, and `simulationTime`.

7.4.2.2 `CartesianToPolarConverter::~CartesianToPolarConverter ()`

Definition at line 24 of file `CartesianToPolarConverter.cpp`.

7.4.3 Member Function Documentation

7.4.3.1 `void CartesianToPolarConverter::convert (bool outputToScript)`

Start the conversion.

Parameters


<code>outputToScript</code>	Output to script or to plain file
-----------------------------	-----------------------------------

Definition at line 26 of file `CartesianToPolarConverter.cpp`.


References `outputResultsAsFile()`, `outputResultsAsScript()`, `readInputData()`, and `transformToAnnularSectors()`.

Referenced by `main()`.

Here is the call graph for this function:

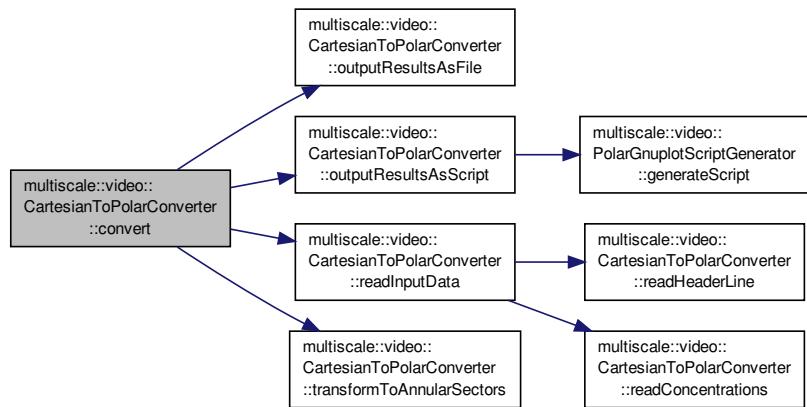

Here is the caller graph for this function:



7.4.3.2 void `CartesianToPolarConverter::outputResultsAsFile()` [private]


Output the results as a plain file.

Definition at line 115 of file `CartesianToPolarConverter.cpp`.

References `annularSectors`, `OUTPUT_FILE_EXTENSION`, and `outputFilepath`.

Referenced by `convert()`.

Here is the caller graph for this function:



7.4.3.3 void `CartesianToPolarConverter::outputResultsAsScript()` [private]


Output the results as a gnuplot script.

Definition at line 130 of file `CartesianToPolarConverter.cpp`.


References `annularSectors`, `multiscale::video::PolarGnuplotScriptGenerator::generateScript()`, `outputFilepath`, and `simulationTime`.

Referenced by `convert()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.4.3.4 void `CartesianToPolarConverter::readConcentrations(ifstream & fin)` [private]

Read the concentrations.

Parameters


<code>fin</code>	Input file stream
------------------	-------------------

Definition at line 70 of file `CartesianToPolarConverter.cpp`.

References `concentrations`, `ERR_CONC`, `MS_throw`, `nrOfConcentricCircles`, and `nrOfSectors`.

Referenced by `readInputData()`.

Here is the caller graph for this function:



7.4.3.5 void `CartesianToPolarConverter::readHeaderLine (ifstream & fin)` [private]

Read the header line.

The header line contains values for number of concentric circles, number of sectors and simulation time

Parameters


<code>fin</code>	Input file stream
------------------	-------------------

Definition at line 61 of file `CartesianToPolarConverter.cpp`.

References `ERR_NEG_SIM_TIME`, `ERR_NONPOS_DIMENSION`, `MS_throw`, `nrOfConcentricCircles`, `nrOfSectors`, and `simulationTime`.

Referenced by `readInputData()`.

Here is the caller graph for this function:



7.4.3.6 void `CartesianToPolarConverter::readInputData ()` [private]


Read the input data.

Definition at line 37 of file `CartesianToPolarConverter.cpp`.


References `ERR_IN_EXTRA_DATA`, `ERR_INPUT_OPEN`, `inputFilepath`, `MS_throw`, `readConcentrations()`, and `readHeaderLine()`.

Referenced by `convert()`.

Here is the call graph for this function:

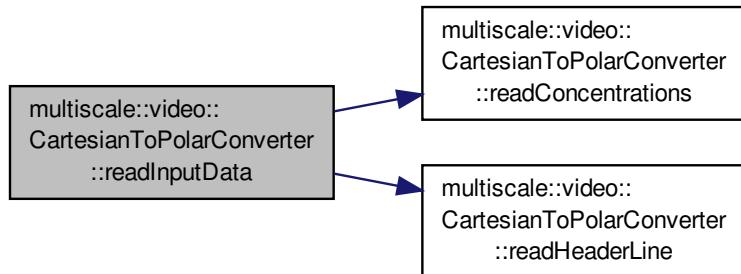

Here is the caller graph for this function:



7.4.3.7 void `CartesianToPolarConverter::transformToAnnularSectors()` [private]


Convert the concentrations to annular sectors.

Definition at line 90 of file `CartesianToPolarConverter.cpp`.

References `annularSectors`, `concentrations`, `nrOfConcentricCircles`, `nrOfSectors`, `RADIUS_MAX`, and `RADIUS_MIN`.

Referenced by `convert()`.

Here is the caller graph for this function:



7.4.4 Member Data Documentation

7.4.4.1 `vector<AnnularSector> multiscale::video::CartesianToPolarConverter::annularSectors` [private]

Resulting annular sectors

Definition at line 21 of file `CartesianToPolarConverter.hpp`.

Referenced by `outputResultsAsFile()`, `outputResultsAsScript()`, and `transformToAnnularSectors()`.

7.4.4.2 `vector<double> multiscale::video::CartesianToPolarConverter::concentrations` [private]

Concentrations received as input

Definition at line 22 of file `CartesianToPolarConverter.hpp`.

Referenced by `readConcentrations()`, and `transformToAnnularSectors()`.

7.4.4.3 `const string CartesianToPolarConverter::ERR_CONC = "All concentrations have to be between 0 and 1."` [static], [private]

Definition at line 74 of file `CartesianToPolarConverter.hpp`.

Referenced by `readConcentrations()`.

7.4.4.4 `const string CartesianToPolarConverter::ERR_IN_EXTRA_DATA = "The input file contains more data than required."` [static], [private]

Definition at line 78 of file `CartesianToPolarConverter.hpp`.

Referenced by `readInputData()`.

7.4.4.5 `const string CartesianToPolarConverter::ERR_INPUT_OPEN = "The input file could not be opened"` [static], [private]

Definition at line 77 of file `CartesianToPolarConverter.hpp`.

Referenced by `readInputData()`.

7.4.4.6 `const string CartesianToPolarConverter::ERR_NEG_SIM_TIME = "The simulation time must be non-negative."` [static], [private]

Definition at line 76 of file `CartesianToPolarConverter.hpp`.

Referenced by `readHeaderLine()`.

7.4.4.7 `const string CartesianToPolarConverter::ERR_NONPOS_DIMENSION = "The dimensions N and M must be positive."` [static], [private]

Definition at line 75 of file `CartesianToPolarConverter.hpp`.

Referenced by `readHeaderLine()`.

7.4.4.8 `string multiscale::video::CartesianToPolarConverter::inputFilepath` [private]

Path to the input file

Definition at line 28 of file `CartesianToPolarConverter.hpp`.

Referenced by `readInputData()`.

7.4.4.9 unsigned long multiscale::video::CartesianToPolarConverter::nrOfConcentricCircles [private]

Number of concentric circles

Definition at line 24 of file `CartesianToPolarConverter.hpp`.

Referenced by `CartesianToPolarConverter()`, `readConcentrations()`, `readHeaderLine()`, and `transformToAnnularSectors()`.

7.4.4.10 unsigned long multiscale::video::CartesianToPolarConverter::nrOfSectors [private]

Number of sectors

Definition at line 25 of file `CartesianToPolarConverter.hpp`.

Referenced by `CartesianToPolarConverter()`, `readConcentrations()`, `readHeaderLine()`, and `transformToAnnularSectors()`.

7.4.4.11 const string CartesianToPolarConverter::OUTPUT_FILE_EXTENSION = ".out" [static], [private]

Definition at line 80 of file `CartesianToPolarConverter.hpp`.

Referenced by `outputResultsAsFile()`.

7.4.4.12 string multiscale::video::CartesianToPolarConverter::outputFilepath [private]

Path to the output file

Definition at line 29 of file `CartesianToPolarConverter.hpp`.

Referenced by `outputResultsAsFile()`, and `outputResultsAsScript()`.

7.4.4.13 const double CartesianToPolarConverter::RADIUS_MAX = 0.3 [static], [private]

Definition at line 83 of file `CartesianToPolarConverter.hpp`.

Referenced by `transformToAnnularSectors()`.

7.4.4.14 const double CartesianToPolarConverter::RADIUS_MIN = 0.001 [static], [private]

Definition at line 82 of file `CartesianToPolarConverter.hpp`.

Referenced by `transformToAnnularSectors()`.

7.4.4.15 double multiscale::video::CartesianToPolarConverter::simulationTime [private]

Simulation time corresponding to the input data

Definition at line 26 of file `CartesianToPolarConverter.hpp`.

Referenced by `CartesianToPolarConverter()`, `outputResultsAsScript()`, and `readHeaderLine()`.

The documentation for this class was generated from the following files:


- `modules/video/circular/include/multiscale/video/circular/CartesianToPolarConverter.hpp`
- `modules/video/circular/src/CartesianToPolarConverter.cpp`

7.5 multiscale::CartesianToPolarConverterException Class Reference


Exception class for the `CartesianToPolarConverter` class.

```
#include <CartesianToPolarConverterException.hpp>
```

Inheritance diagram for `multiscale::CartesianToPolarConverterException`:

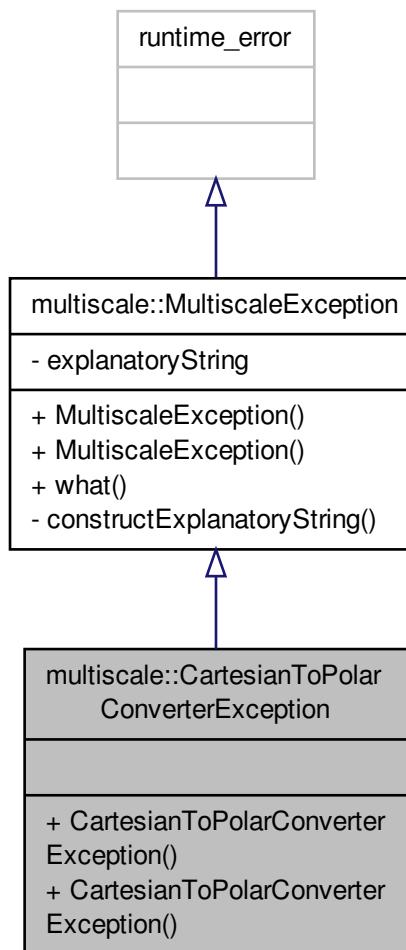

Collaboration diagram for multiscale::CartesianToPolarConverterException:

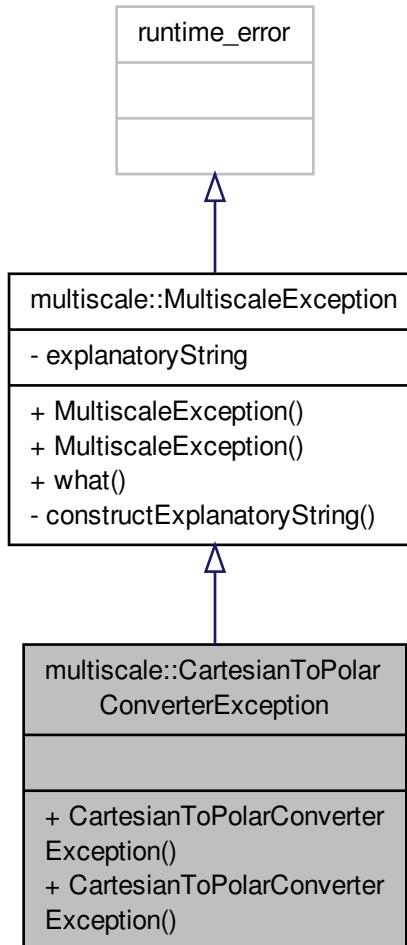

Public Member Functions

- [CartesianToPolarConverterException](#) (const string &file, int line, const string &msg)
- [CartesianToPolarConverterException](#) (const string &file, int line, const char *msg)

7.5.1 Detailed Description

Exception class for the `CartesianToPolarConverter` class.

Definition at line 14 of file `CartesianToPolarConverterException.hpp`.

7.5.2 Constructor & Destructor Documentation

7.5.2.1 `multiscale::CartesianToPolarConverterException::CartesianToPolarConverterException (const string & file, int line, const string & msg) [inline]`

Definition at line 18 of file `CartesianToPolarConverterException.hpp`.

7.5.2.2 `multiscale::CartesianToPolarConverterException::CartesianToPolarConverterException (const string & file, int line, const char * msg) [inline]`

Definition at line 20 of file `CartesianToPolarConverterException.hpp`.

The documentation for this class was generated from the following file:


- [include/multiscale/exception/CartesianToPolarConverterException.hpp](#)

7.6 multiscale::analysis::CircularityMeasure Class Reference

Class for computing the circularity measure for the given collection of points.

`#include <CircularityMeasure.hpp>`

Collaboration diagram for `multiscale::analysis::CircularityMeasure`:



Static Public Member Functions

- `static double compute (const vector< Point2f > &points)`
Compute circularity measure for the given collection of points.
- `static double compute (const vector< Point > &points)`
Compute circularity measure for the given collection of points.

7.6.1 Detailed Description

Class for computing the circularity measure for the given collection of points.

Definition at line 18 of file `CircularityMeasure.hpp`.

7.6.2 Member Function Documentation

7.6.2.1 double CircularityMeasure::compute (const vector< Point2f > & *points*) [static]

Compute circularity measure for the given collection of points.

The circularity measure is equal to the standard circularity measure described in the following paper:

Joviša Žunić, Kaoru Hirota, Paul L. Rosin, A Hu moment invariant as a shape circularity measure, Pattern Recognition, Volume 43, Issue 1, January 2010, Pages 47-57, ISSN 0031-3203, <http://dx.doi.org/10.1016/j.patcog.2009.06.017>.

Definition at line 7 of file CircularityMeasure.cpp.

References multiscale::Geometry2D::PI.

7.6.2.2 double CircularityMeasure::compute (const vector< Point > & *points*) [static]

Compute circularity measure for the given collection of points.

The circularity measure is equal to the standard circularity measure described in the following paper:

Joviša Žunić, Kaoru Hirota, Paul L. Rosin, A Hu moment invariant as a shape circularity measure, Pattern Recognition, Volume 43, Issue 1, January 2010, Pages 47-57, ISSN 0031-3203, <http://dx.doi.org/10.1016/j.patcog.2009.06.017>.

Definition at line 23 of file CircularityMeasure.cpp.

References multiscale::Geometry2D::PI.

The documentation for this class was generated from the following files:


- [modules/analysis/spatial/include/multiscale/analysis/spatial/CircularityMeasure.hpp](#)
- [modules/analysis/spatial/src/CircularityMeasure.cpp](#)

7.7 multiscale::analysis::CircularMatFactory Class Reference


Class for creating a Mat object considering a circular grid.

```
#include <CircularMatFactory.hpp>
```

Inheritance diagram for multiscale::analysis::CircularMatFactory:

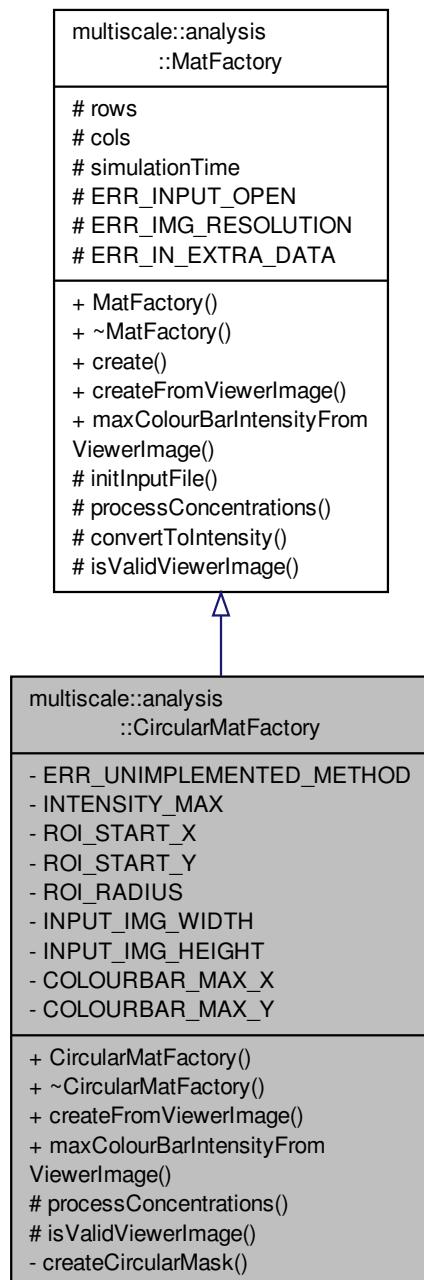

Collaboration diagram for multiscale::analysis::CircularMatFactory:

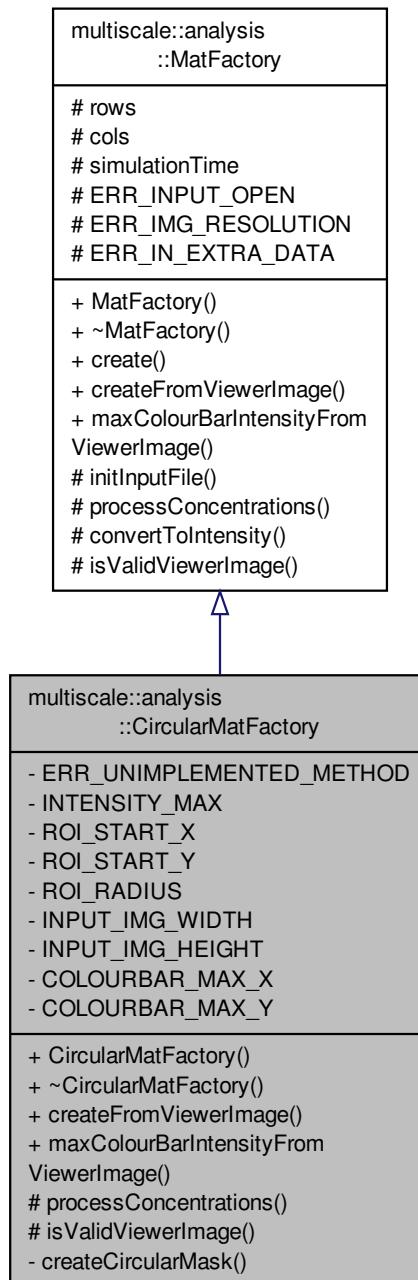

Public Member Functions

- [CircularMatFactory \(\)](#)
- [~CircularMatFactory \(\)](#)
- Mat [createFromViewerImage \(const string &inputFile\)](#) override

Create a Mat object from the image file obtained from the CircularGeometryViewer.

- double [maxColourBarIntensityFromViewerImage \(const string &inputFile\)](#) override

Get the maximum grayscale intensity of the colour bar in the image.

Protected Member Functions

- `unsigned char * processConcentrations (ifstream &fin) override`
Process the concentrations from the input file.
- `bool isValidViewerImage (const Mat &image) override`
Check if the image generated by the viewer has the required resolution.

Private Member Functions

- `Mat createCircularMask (unsigned int originX, unsigned int originY, unsigned int radius, const Mat &image)`
Create a mask with 255 intensity pixels inside the circle with origin at (originX, originY) and the given radius.

Static Private Attributes

- `static const string ERR_UNIMPLEMENTED_METHOD = "The method you called is not implemented."`
- `static const int INTENSITY_MAX = 255`
- `static const int ROI_START_X = 1024`
- `static const int ROI_START_Y = 786`
- `static const int ROI_RADIUS = 615`
- `static const int INPUT_IMG_WIDTH = 2048`
- `static const int INPUT_IMG_HEIGHT = 1572`
- `static const int COLOURBAR_MAX_X = 1775`
- `static const int COLOURBAR_MAX_Y = 56`

Additional Inherited Members

7.7.1 Detailed Description

Class for creating a Mat object considering a circular grid.

Definition at line 15 of file CircularMatFactory.hpp.

7.7.2 Constructor & Destructor Documentation

7.7.2.1 CircularMatFactory::CircularMatFactory ()

Definition at line 9 of file CircularMatFactory.cpp.

7.7.2.2 CircularMatFactory::~CircularMatFactory ()

Definition at line 11 of file CircularMatFactory.cpp.

7.7.3 Member Function Documentation

7.7.3.1 Mat CircularMatFactory::createCircularMask (unsigned int *originX*, unsigned int *originY*, unsigned int *radius*, const Mat & *image*) [private]

Create a mask with 255 intensity pixels inside the circle with origin at (originX, originY) and the given radius.

All the other pixels have intensity zero.

The original image is provided only for getting the size correctly

Parameters


<i>originX</i>	The x coordinate for the origin
<i>originY</i>	The y coordinate for the origin
<i>radius</i>	The size of the radius
<i>image</i>	The original image

Definition at line 47 of file CircularMatFactory.cpp.

References INTENSITY_MAX.

Referenced by createFromViewerImage().

Here is the caller graph for this function:



7.7.3.2 Mat CircularMatFactory::createFromViewerImage (const string & *inputFile*) [override], [virtual]

Create a Mat object from the image file obtained from the CircularGeometryViewer.

Create the Mat instance from the given image file

Parameters

<i>inputFile</i>	The path to the image file
------------------	----------------------------


Implements [multiscale::analysis::MatFactory](#).

Definition at line 13 of file CircularMatFactory.cpp.


References createCircularMask(), isValidViewerImage(), ROI_RADIUS, ROI_START_X, and ROI_START_Y.

Referenced by main().

Here is the call graph for this function:

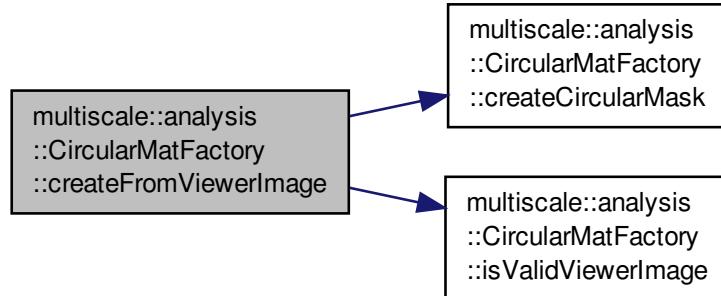

Here is the caller graph for this function:

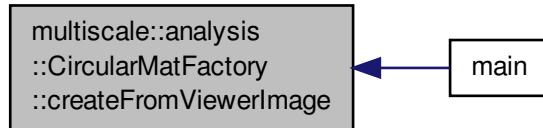

7.7.3.3 `bool CircularMatFactory::isValidViewerImage (const Mat & image)` [override], [protected], [virtual]

Check if the image generated by the viewer has the required resolution.

Parameters

<code>image</code>	Image generated by the viewer
--------------------	-------------------------------


Implements [multiscale::analysis::MatFactory](#).

Definition at line 56 of file CircularMatFactory.cpp.

References `multiscale::analysis::MatFactory::ERR_IMG_RESOLUTION`, `multiscale::analysis::MatFactory::ERR_INPUT_OPEN`, `INPUT_IMG_HEIGHT`, `INPUT_IMG_WIDTH`, and `MS_throw`.

Referenced by `createFromViewerImage()`, and `maxColourBarIntensityFromViewerImage()`.

Here is the caller graph for this function:

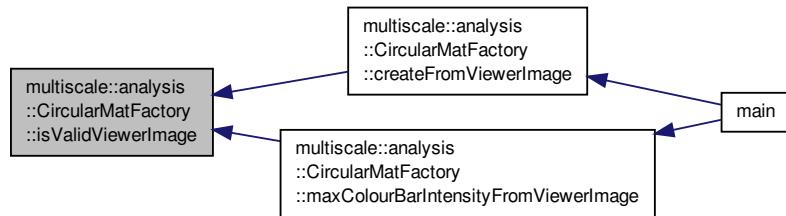

7.7.3.4 `double CircularMatFactory::maxColourBarIntensityFromViewerImage (const string & inputFile) [override], [virtual]`

Get the maximum grayscale intensity of the colour bar in the image.

Parameters

`inputFile` The path to the image file

Implements [multiscale::analysis::MatFactory](#).

Definition at line 32 of file CircularMatFactory.cpp.

References COLOURBAR_MAX_X, COLOURBAR_MAX_Y, and `isValidViewerImage()`.

Referenced by `main()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.7.3.5 `unsigned char * CircularMatFactory::processConcentrations (ifstream & fin)` [override], [protected], [virtual]

Process the concentrations from the input file.

REMARK: This method is not implemented and throws an error when called.

Parameters

<i>fin</i>	Input file stream from which the concentrations are read
------------	--

Implements [multiscale::analysis::MatFactory](#).

Definition at line 40 of file CircularMatFactory.cpp.

References `ERR_UNIMPLEMENTED_METHOD`, and `MS_throw`.

7.7.4 Member Data Documentation

7.7.4.1 `const int CircularMatFactory::COLOURBAR_MAX_X = 1775` [static], [private]

Definition at line 82 of file CircularMatFactory.hpp.

Referenced by `maxColourBarIntensityFromViewerImage()`.

7.7.4.2 `const int CircularMatFactory::COLOURBAR_MAX_Y = 56` [static], [private]

Definition at line 83 of file CircularMatFactory.hpp.

Referenced by `maxColourBarIntensityFromViewerImage()`.

7.7.4.3 `const string CircularMatFactory::ERR_UNIMPLEMENTED_METHOD = "The method you called is not implemented."` [static], [private]

Definition at line 71 of file CircularMatFactory.hpp.

Referenced by `processConcentrations()`.

7.7.4.4 `const int CircularMatFactory::INPUT_IMG_HEIGHT = 1572` [static], [private]

Definition at line 80 of file CircularMatFactory.hpp.

Referenced by `isValidViewerImage()`.

7.7.4.5 `const int CircularMatFactory::INPUT_IMG_WIDTH = 2048` [static], [private]

Definition at line 79 of file CircularMatFactory.hpp.

Referenced by `isValidViewerImage()`.

7.7.4.6 `const int CircularMatFactory::INTENSITY_MAX = 255` [static], [private]

Definition at line 73 of file CircularMatFactory.hpp.

Referenced by `createCircularMask()`.

7.7.4.7 `const int CircularMatFactory::ROI_RADIUS = 615` [static], [private]

Definition at line 77 of file CircularMatFactory.hpp.

Referenced by `createFromViewerImage()`.

7.7.4.8 `const int CircularMatFactory::ROI_START_X = 1024` [static], [private]

Definition at line 75 of file CircularMatFactory.hpp.

Referenced by `createFromViewerImage()`.

7.7.4.9 `const int CircularMatFactory::ROI_START_Y = 786` [static], [private]

Definition at line 76 of file CircularMatFactory.hpp.

Referenced by `createFromViewerImage()`.

The documentation for this class was generated from the following files:


- `modules/analysis/spatial/include/multiscale/analysis/spatial/factory/CircularMatFactory.hpp`
- `modules/analysis/spatial/src/factory/CircularMatFactory.cpp`

7.8 multiscale::CircularMatFactoryException Class Reference


Exception class for the CircularMatFactory instances.

```
#include <CircularMatFactoryException.hpp>
```

Inheritance diagram for multiscale::CircularMatFactoryException:

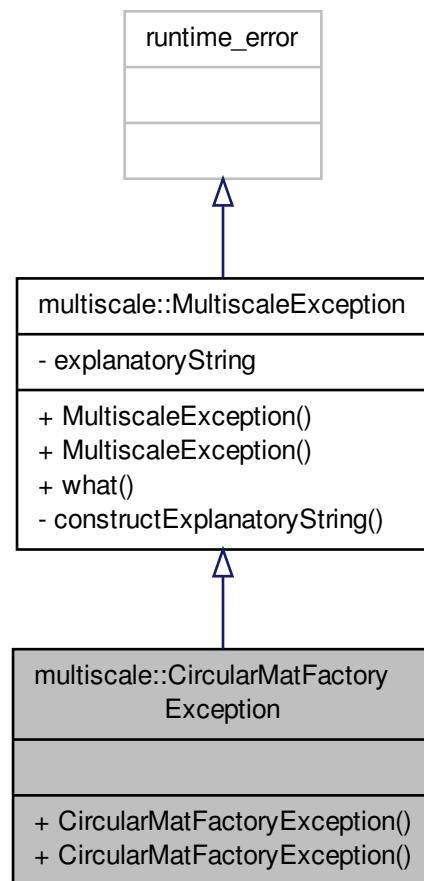

Collaboration diagram for multiscale::CircularMatFactoryException:

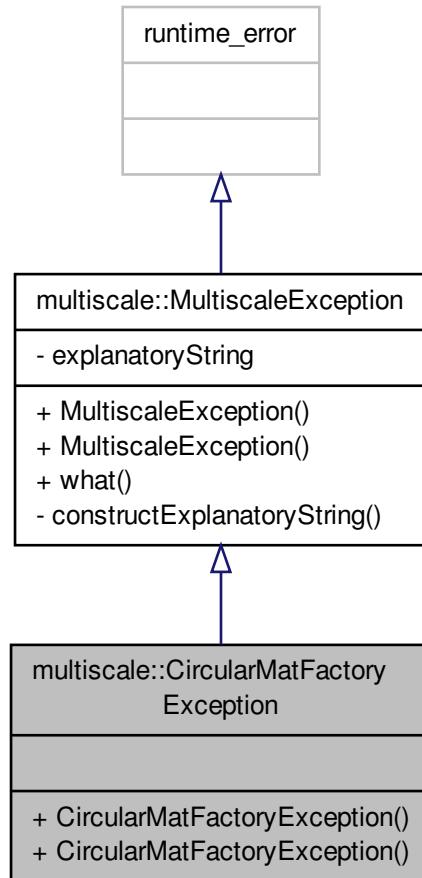

Public Member Functions

- [CircularMatFactoryException](#) (const string &file, int line, const string &msg)
- [CircularMatFactoryException](#) (const string &file, int line, const char *msg)

7.8.1 Detailed Description

Exception class for the CircularMatFactory instances.

Definition at line 14 of file CircularMatFactoryException.hpp.

7.8.2 Constructor & Destructor Documentation

7.8.2.1 [multiscale::CircularMatFactoryException::CircularMatFactoryException](#) (const string & *file*, int *line*, const string & *msg*) [inline]

Definition at line 18 of file CircularMatFactoryException.hpp.

```
7.8.2.2 multiscale::CircularMatFactoryException::CircularMatFactoryException ( const string & file, int line, const char * msg
) [inline]
```

Definition at line 20 of file CircularMatFactoryException.hpp.

The documentation for this class was generated from the following file:


- [include/multiscale/exception/CircularMatFactoryException.hpp](#)

7.9 multiscale::analysis::Cluster Class Reference


Class for representing a cluster of entities in an image.

```
#include <Cluster.hpp>
```

Inheritance diagram for multiscale::analysis::Cluster:

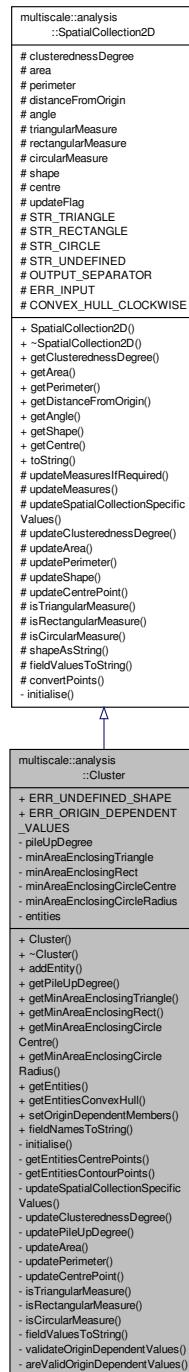

Collaboration diagram for multiscale::analysis::Cluster:

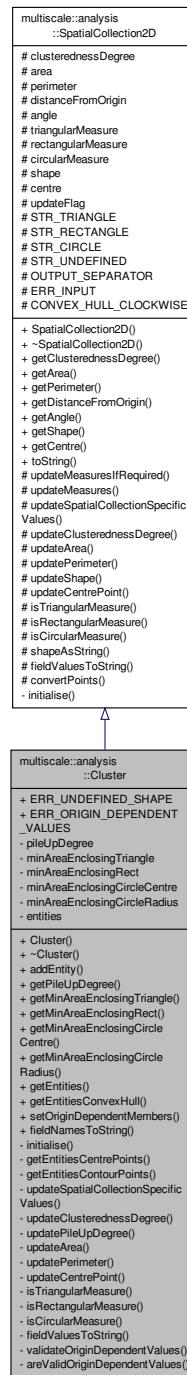

Public Member Functions

- [Cluster \(\)](#)
- [~Cluster \(\)](#)
- void [addEntity \(const Entity &entity\)](#)

Add a new entity to the cluster.
- double [getPileUpDegree \(\)](#)

- `vector< Point2f > getMinAreaEnclosingTriangle ()`

Get the degree of pile up.
- `RotatedRect getMinAreaEnclosingRect ()`

Get the minimum area enclosing rectangle.
- `Point2f getMinAreaEnclosingCircleCentre ()`

Get the minimum area enclosing circle centre.
- `float getMinAreaEnclosingCircleRadius ()`

Get the minimum area enclosing circle radius.
- `vector< Entity > getEntities () const`

Get the collection of underlying entities.
- `vector< Point2f > getEntitiesConvexHull ()`

Get the convex hull enclosing the collection of entities' contour points.
- `void setOriginDependentMembers (double distanceFromOrigin, double angleWrtOrigin)`

Set the values of the origin dependent members.

Static Public Member Functions

- `static string fieldNamesToString ()`

Get a string representation of all the field names printed in the "toString" method.

Static Public Attributes

- `static const string ERR_UNDEFINED_SHAPE` = "The `shape` of the given cluster is undefined."
- `static const string ERR_ORIGIN_DEPENDENT_VALUES` = "The origin dependent values are invalid (i.e. negative)."

Private Member Functions

- `void initialise ()`

Initialisation function for the class.
- `vector< Point2f > getEntitiesCentrePoints ()`

Get the collection of entities' centres.
- `vector< Point2f > getEntitiesContourPoints ()`

Get the collection of entities' contour points.
- `void updateSpatialCollectionSpecificValues () override`

Update the values of all measures.
- `void updateClusterednessDegree () override`

Update the value of the clusteredness degree.
- `void updatePileUpDegree ()`

Update the value of the pile up degree.
- `void updateArea () override`

Update the value of the area.
- `void updatePerimeter () override`

Update the value of the perimeter.
- `void updateCentrePoint () override`

Update the point defining the centre of the cluster.
- `double isTriangularMeasure () override`

Get the measure that the cluster has a triangular shape.
- `double isRectangularMeasure () override`

Get the measure that the cluster has a rectangular shape.

- `double isCircularMeasure () override`

Get the measure that the cluster has a circular shape.

- `string fieldValuesToString () override`

Get a string representation of all the field values.

- `void validateOriginDependentValues (double distanceFromOrigin, double angleWrtOrigin)`

Validate the origin dependent values (i.e. non-negative)

- `bool areValidOriginDependentValues (double distanceFromOrigin, double angleWrtOrigin)`

Check if the origin dependent values are valid (i.e. non-negative)

Private Attributes

- `double pileUpDegree`
- `vector< Point2f > minAreaEnclosingTriangle`
- `RotatedRect minAreaEnclosingRect`
- `Point2f minAreaEnclosingCircleCentre`
- `float minAreaEnclosingCircleRadius`
- `vector< Entity > entities`

Additional Inherited Members

7.9.1 Detailed Description

Class for representing a cluster of entities in an image.

Definition at line 21 of file Cluster.hpp.


7.9.2 Constructor & Destructor Documentation

7.9.2.1 Cluster::Cluster ()

Definition at line 11 of file Cluster.cpp.

References initialise().

Here is the call graph for this function:



7.9.2.2 Cluster::~Cluster ()

Definition at line 15 of file Cluster.cpp.

7.9.3 Member Function Documentation

7.9.3.1 void Cluster::addEntity (const Entity & entity)

Add a new entity to the cluster.

Definition at line 17 of file Cluster.cpp.

References entities, and multiscale::analysis::SpatialCollection2D::updateFlag.

7.9.3.2 bool Cluster::isValidOriginDependentValues (double *distanceFromOrigin*, double *angleWrtOrigin*) [private]

Check if the origin dependent values are valid (i.e. non-negative)

Parameters

<i>distanceFrom- Origin</i>	Distance from the origin
<i>angleWrtOrigin</i>	Angle with respect to the origin

Definition at line 233 of file Cluster.cpp.

Referenced by validateOriginDependentValues().

Here is the caller graph for this function:




7.9.3.3 string Cluster::fieldNamesToString () [static]

Get a string representation of all the field names printed in the "toString" method.

Definition at line 75 of file Cluster.cpp.

Referenced by multiscale::analysis::ClusterDetector::outputResultsToCsvFile().

Here is the caller graph for this function:



7.9.3.4 string Cluster::fieldValuesToString () [override], [private], [virtual]


Get a string representation of all the field values.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 208 of file Cluster.cpp.

References multiscale::analysis::SpatialCollection2D::angle, multiscale::analysis::SpatialCollection2D::area, multiscale::analysis::SpatialCollection2D::centre, multiscale::analysis::SpatialCollection2D::circularMeasure, multiscale::analysis::SpatialCollection2D::clusterednessDegree, multiscale::analysis::SpatialCollection2D::distanceFromOrigin, multiscale::analysis::SpatialCollection2D::OUTPUT_SEPARATOR, multiscale::analysis::SpatialCollection2D::perimeter, pileUpDegree, multiscale::analysis::SpatialCollection2D::rectangularMeasure, multiscale::analysis::SpatialCollection2D::shapeAsString(), and multiscale::analysis::SpatialCollection2D::triangularMeasure.

Here is the call graph for this function:



7.9.3.5 `vector< Entity > Cluster::getEntities() const`


Get the collection of underlying entities.

Definition at line 53 of file Cluster.cpp.

References entities.

Referenced by multiscale::analysis::SimulationClusterDetector::outputClusterToImage().

Here is the caller graph for this function:



7.9.3.6 `vector< Point2f > Cluster::getEntitiesCentrePoints() [private]`

Get the collection of entities' centres.

Definition at line 94 of file Cluster.cpp.

References entities.

7.9.3.7 `vector< Point2f > Cluster::getEntitiesContourPoints() [private]`


Get the collection of entities' contour points.

Definition at line 104 of file Cluster.cpp.

References entities.

Referenced by getEntitiesConvexHull(), isCircularMeasure(), and isRectangularMeasure().

Here is the caller graph for this function:



7.9.3.8 `vector< Point2f > Cluster::getEntitiesConvexHull()`


Get the convex hull enclosing the collection of entities' contour points.

Definition at line 57 of file Cluster.cpp.


References multiscale::analysis::SpatialCollection2D::CONVEX_CLOCKWISE, entities, and getEntitiesContourPoints().

Referenced by multiscale::analysis::ClusterDetector::getClusterConvexHull(), isTriangularMeasure(), and updatePerimeter().

Here is the call graph for this function:



Here is the caller graph for this function:



7.9.3.9 `Point2f Cluster::getMinAreaEnclosingCircleCentre()`


Get the minimum area enclosing circle centre.

Definition at line 41 of file Cluster.cpp.


References minAreaEnclosingCircleCentre, and multiscale::analysis::SpatialCollection2D::updateMeasuresIfRequired().

Referenced by multiscale::analysis::SimulationClusterDetector::outputClusterCircularShape().

Here is the call graph for this function:

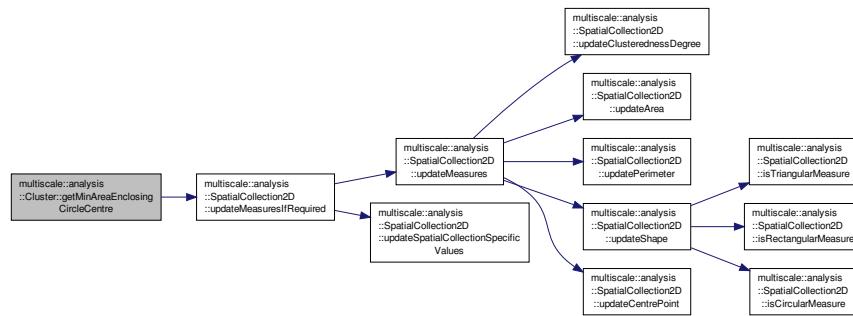

Here is the caller graph for this function:



7.9.3.10 float Cluster::getMinAreaEnclosingCircleRadius ()


Get the minimum area enclosing circle radius.

Definition at line 47 of file Cluster.cpp.


References minAreaEnclosingCircleRadius, and multiscale::analysis::SpatialCollection2D::updateMeasuresIfRequired().

Referenced by multiscale::analysis::SimulationClusterDetector::outputClusterCircularShape().

Here is the call graph for this function:

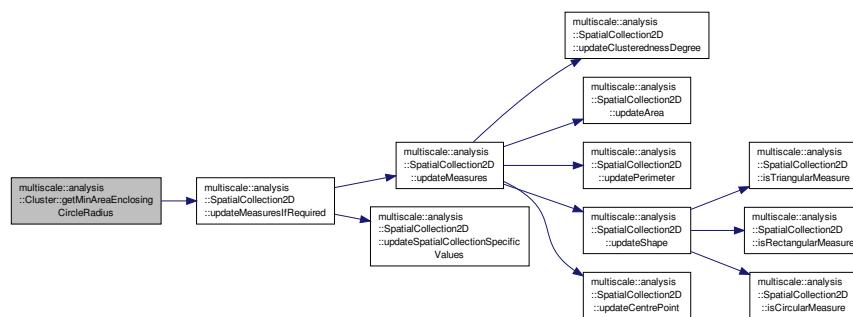

Here is the caller graph for this function:



7.9.3.11 `RotatedRect Cluster::getMinAreaEnclosingRect()`


Get the minimum area enclosing rectangle.

Definition at line 35 of file Cluster.cpp.


References minAreaEnclosingRect, and multiscale::analysis::SpatialCollection2D::updateMeasuresIfRequired().

Referenced by multiscale::analysis::SimulationClusterDetector::outputClusterRectangularShape().

Here is the call graph for this function:

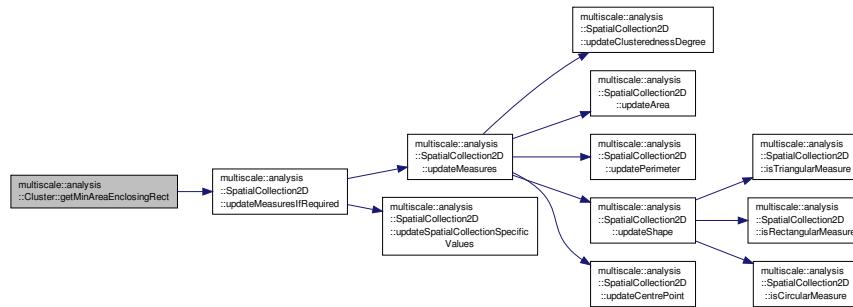

Here is the caller graph for this function:



7.9.3.12 `vector< Point2f > Cluster::getMinAreaEnclosingTriangle()`


Get the minimum area enclosing triangle.

Definition at line 29 of file Cluster.cpp.


References minAreaEnclosingTriangle, and multiscale::analysis::SpatialCollection2D::updateMeasuresIfRequired().

Referenced by multiscale::analysis::SimulationClusterDetector::outputClusterTriangularShape().

Here is the call graph for this function:

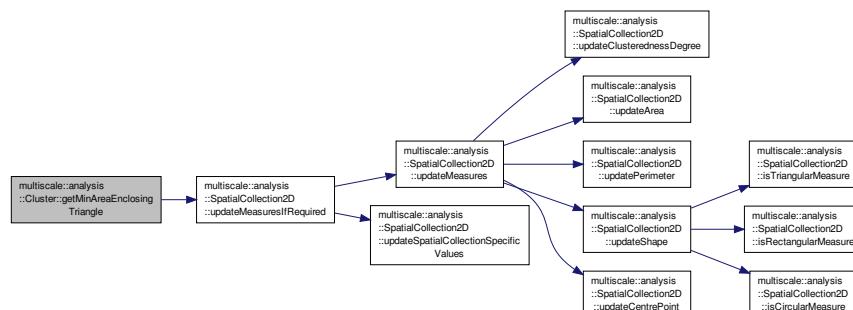

Here is the caller graph for this function:




7.9.3.13 double Cluster::getPileUpDegree ()

Get the degree of pile up.

Definition at line 23 of file Cluster.cpp.

References pileUpDegree, and multiscale::analysis::SpatialCollection2D::updateMeasuresIfRequired().

Here is the call graph for this function:

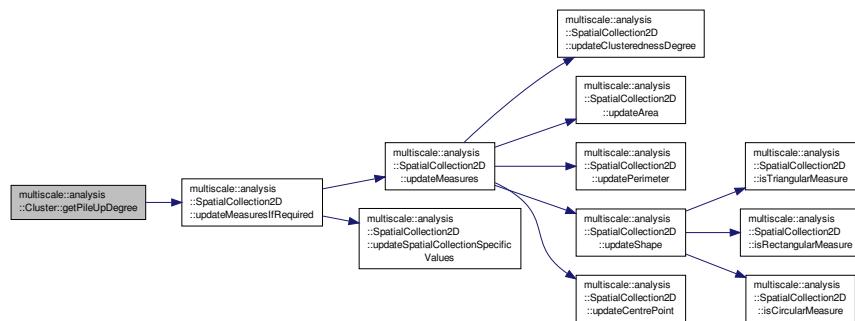

7.9.3.14 void Cluster::initialise () [private]


Initialisation function for the class.

Definition at line 79 of file Cluster.cpp.

References multiscale::analysis::SpatialCollection2D::angle, multiscale::analysis::SpatialCollection2D::clusterednessDegree, multiscale::analysis::SpatialCollection2D::distanceFromOrigin, entities, minAreaEnclosingCircleRadius, minAreaEnclosingTriangle, pileUpDegree, and multiscale::analysis::SpatialCollection2D::updateFlag.

Referenced by Cluster().

Here is the caller graph for this function:



7.9.3.15 double Cluster::isCircularMeasure() [override], [private], [virtual]


Get the measure that the cluster has a circular shape.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 196 of file Cluster.cpp.

References `multiscale::Numeric::almostEqual()`, `multiscale::analysis::SpatialCollection2D::area`, `getEntitiesContourPoints()`, `minAreaEnclosingCircleCentre`, `minAreaEnclosingCircleRadius`, and `multiscale::Geometry2D::PI`.

Here is the call graph for this function:

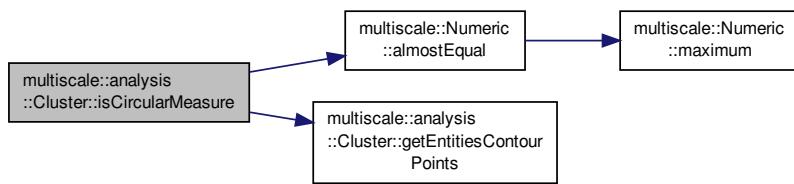

7.9.3.16 double Cluster::isRectangularMeasure() [override], [private], [virtual]


Get the measure that the cluster has a rectangular shape.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 184 of file Cluster.cpp.

References `multiscale::Numeric::almostEqual()`, `multiscale::analysis::SpatialCollection2D::area`, `getEntitiesContourPoints()`, and `minAreaEnclosingRect`.

Here is the call graph for this function:

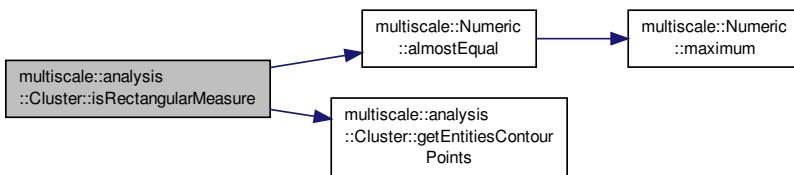

7.9.3.17 double Cluster::isTriangularMeasure() [override], [private], [virtual]


Get the measure that the cluster has a triangular shape.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 175 of file Cluster.cpp.

References `multiscale::Numeric::almostEqual()`, `multiscale::analysis::SpatialCollection2D::area`, `multiscale::MinEnclosingTriangleFinder::find()`, `getEntitiesConvexHull()`, and `minAreaEnclosingTriangle`.

Here is the call graph for this function:

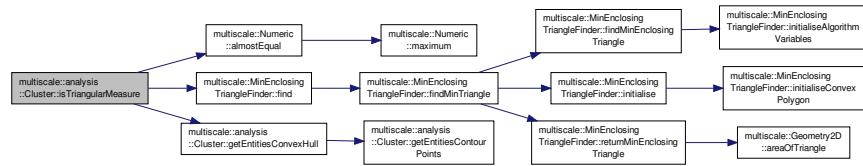

7.9.3.18 void Cluster::setOriginDependentMembers (double *distanceFromOrigin*, double *angleWrtOrigin*)

Set the values of the origin dependent members.

Parameters


<i>distanceFromOrigin</i>	Distance from the origin
<i>angleWrtOrigin</i>	Angle with respect to the origin

Definition at line 68 of file Cluster.cpp.

References multiscale::analysis::SpatialCollection2D::angle, multiscale::analysis::SpatialCollection2D::distanceFromOrigin, and validateOriginDependentValues().

Referenced by multiscale::analysis::ClusterDetector::updateClusterOriginDependentValues().

Here is the call graph for this function:



Here is the caller graph for this function:



7.9.3.19 void Cluster::updateArea () [override], [private], [virtual]

Update the value of the area.

Implements multiscale::analysis::SpatialCollection2D.

Definition at line 150 of file Cluster.cpp.

References multiscale::analysis::SpatialCollection2D::area, and entities.

7.9.3.20 void Cluster::updateCentrePoint() [override], [private], [virtual]

Update the point defining the centre of the cluster.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 164 of file Cluster.cpp.

References multiscale::analysis::SpatialCollection2D::centre, and entities.

7.9.3.21 void Cluster::updateClusterednessDegree() [override], [private], [virtual]

Update the value of the clusteredness degree.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 120 of file Cluster.cpp.

References multiscale::analysis::SpatialCollection2D::clusterednessDegree, and entities.

7.9.3.22 void Cluster::updatePerimeter() [override], [private], [virtual]


Update the value of the perimeter.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 158 of file Cluster.cpp.

References getEntitiesConvexHull(), and multiscale::analysis::SpatialCollection2D::perimeter.

Here is the call graph for this function:



7.9.3.23 void Cluster::updatePileUpDegree() [private]


Update the value of the pile up degree.

Definition at line 140 of file Cluster.cpp.

References entities, and pileUpDegree.

Referenced by updateSpatialCollectionSpecificValues().

Here is the caller graph for this function:



7.9.3.24 void Cluster::updateSpatialCollectionSpecificValues () [override], [private], [virtual]


Update the values of all measures.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 116 of file Cluster.cpp.

References [updatePileUpDegree\(\)](#).

Here is the call graph for this function:

7.9.3.25 void Cluster::validateOriginDependentValues (double *distanceFromOrigin*, double *angleWrtOrigin*) [private]

Validate the origin dependent values (i.e. non-negative)

Parameters


<i>distanceFromOrigin</i>	Distance from the origin
<i>angleWrtOrigin</i>	Angle with respect to the origin

Definition at line 227 of file Cluster.cpp.

References [isValidOriginDependentValues\(\)](#), [ERR_ORIGIN_DEPENDENT_VALUES](#), and [MS_throw](#).

Referenced by [setOriginDependentMembers\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:



7.9.4 Member Data Documentation

7.9.4.1 `vector<Entity> multiscale::analysis::Cluster::entities` [private]

Entities which belong to this cluster

Definition at line 34 of file Cluster.hpp.

Referenced by addEntity(), getEntities(), getEntitiesCentrePoints(), getEntitiesContourPoints(), getEntitiesConvexHull(), initialise(), updateArea(), updateCentrePoint(), updateClusterednessDegree(), and updatePileUpDegree().

7.9.4.2 `const string Cluster::ERR_ORIGIN_DEPENDENT_VALUES = "The origin dependent values are invalid (i.e. negative)." [static]`

Definition at line 135 of file Cluster.hpp.

Referenced by validateOriginDependentValues().

7.9.4.3 `const string Cluster::ERR_UNDEFINED_SHAPE = "The shape of the given cluster is undefined." [static]`

Definition at line 134 of file Cluster.hpp.

Referenced by multiscale::analysis::SimulationClusterDetector::outputClusterShape().

7.9.4.4 `Point2f multiscale::analysis::Cluster::minAreaEnclosingCircleCentre` [private]

The minimum area enclosing circle centre point

Definition at line 31 of file Cluster.hpp.

Referenced by getMinAreaEnclosingCircleCentre(), and isCircularMeasure().

7.9.4.5 `float multiscale::analysis::Cluster::minAreaEnclosingCircleRadius` [private]

The minimum area enclosing circle radius

Definition at line 32 of file Cluster.hpp.

Referenced by getMinAreaEnclosingCircleRadius(), initialise(), and isCircularMeasure().

7.9.4.6 `RotatedRect multiscale::analysis::Cluster::minAreaEnclosingRect` [private]

The minimum area enclosing rectangle

Definition at line 29 of file Cluster.hpp.

Referenced by getMinAreaEnclosingRect(), and isRectangularMeasure().

7.9.4.7 `vector<Point2f> multiscale::analysis::Cluster::minAreaEnclosingTriangle` [private]

The minimum area enclosing triangle

Definition at line 27 of file Cluster.hpp.

Referenced by getMinAreaEnclosingTriangle(), initialise(), and isTriangularMeasure().

7.9.4.8 `double multiscale::analysis::Cluster::pileUpDegree` [private]

Degree of pile up

Definition at line 25 of file Cluster.hpp.

Referenced by `fieldValuesToString()`, `getPileUpDegree()`, `initialise()`, and `updatePileUpDegree()`.

The documentation for this class was generated from the following files:


- `modules/analysis/spatial/include/multiscale/analysis/spatial/Cluster.hpp`
- `modules/analysis/spatial/src/Cluster.cpp`

7.10 multiscale::analysis::ClusterDetector Class Reference


Class for detecting clusters in 2D images.

```
#include <ClusterDetector.hpp>
```

Inheritance diagram for multiscale::analysis::ClusterDetector:

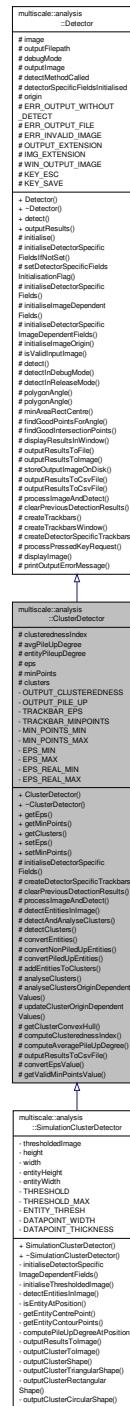

Collaboration diagram for multiscale::analysis::ClusterDetector:

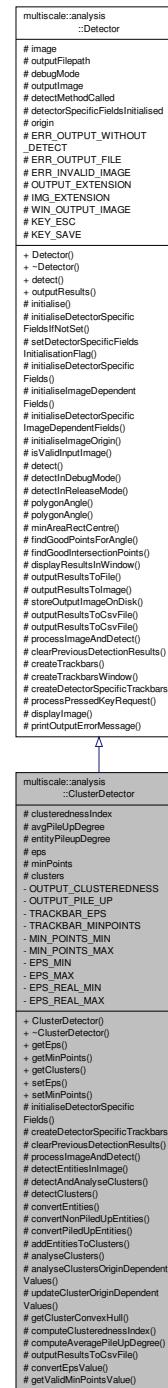

Public Member Functions

- **ClusterDetector** (int maxPileupNumber, double maxPileupIntensity, bool **debugMode**=false)
- virtual **~ClusterDetector ()**
- double **getEps ()**

Get the value of the clustering algorithm parameter eps.

- int **getMinPoints ()**

- `vector< Cluster > const & getClusters ()`

Get the value of the clustering algorithm parameter MinPoints.
- `void setEps (double eps)`

Set the value of the clustering algorithm parameter eps.
- `void setMinPoints (int minPoints)`

Set the value of the clustering algorithm parameter MinPoints.

Protected Member Functions

- `void initialiseDetectorSpecificFields () override`

Initialise clustering values.
- `void createDetectorSpecificTrackbars () override`

Create the trackbars.
- `void clearPreviousDetectionResults () override`

Clear the clusters from the previous detection.
- `void processImageAndDetect () override`

Process the provided image and detect clusters in it.
- `virtual void detectEntitiesInImage (vector< Entity > &entities)=0`

Detect the entities in the image.
- `void detectAndAnalyseClusters (const vector< Entity > &entities, vector< Cluster > &clusters)`

Detect and analyse the clusters of entities in the image.
- `void detectClusters (const vector< Entity > &entities, vector< int > &clusterIndexes, int &nrOfClusters)`

Detect the clusters of entities in the image.
- `vector< shared_ptr< DataPoint > > convertEntities (const vector< Entity > &entities)`

Convert the entities to the format required by the `DBSCAN` class.
- `void convertNonPiledUpEntities (const vector< Entity > &entities, vector< shared_ptr< DataPoint > > &dataPoints)`

Convert the non pile up entities to the format required by the `DBSCAN` class.
- `void convertPiledUpEntities (const vector< Entity > &entities, vector< shared_ptr< DataPoint > > &dataPoints)`

Convert the entities to the required format by the `DBSCAN` class.
- `void addEntitiesToClusters (const vector< Entity > &entities, const vector< int > &clusterIndexes, int nrOfClusters, vector< Cluster > &clusters)`

Add the entities to the clusters as indicated by the clusterIndexes parameter.
- `void analyseClusters (vector< Cluster > &clusters)`

Analyse the clusters.
- `void analyseClustersOriginDependentValues (vector< Cluster > &clusters)`

Analyse the clusters and compute the origin dependent values.
- `void updateClusterOriginDependentValues (Cluster &cluster, const vector< Point > &clusterConvexHull)`

Update the cluster and compute the origin dependent values considering the convex hull.
- `vector< Point > getClusterConvexHull (Cluster &cluster)`

Return the convex hull of the given cluster.
- `double computeClusterednessIndex (const vector< Cluster > &clusters)`

Compute the clusteredness index for all the entities detected in the image.
- `double computeAveragePileUpDegree (vector< Cluster > &clusters)`

Compute the average pile up degree for all entities in the image.
- `void outputResultsToCsvFile (ofstream &fout) override`

Output the information computed for the clusters to a csv file.
- `double convertEpsValue ()`

Convert the value of eps from integer to double.
- `int getValidMinPointsValue ()`

Return non-zero value for minPoints.

Protected Attributes

- double clusterednessIndex
- double avgPileUpDegree
- double entityPileupDegree
- int `eps`
- int `minPoints`
- vector< `Cluster` > `clusters`

Static Private Attributes

- static const string `OUTPUT_CLUSTEREDNESS` = "Clusteredness index: "
- static const string `OUTPUT_PILE_UP` = "Average pile up degree: "
- static const string `TRACKBAR_EPS` = "Eps (Multiplied by 10)"
- static const string `TRACKBAR_MINPOINTS` = "Minimum number of points"
- static const int `MIN_POINTS_MIN` = 0
- static const int `MIN_POINTS_MAX` = 100
- static const int `EPS_MIN` = 0
- static const int `EPS_MAX` = 10000
- static const int `EPS_REAL_MIN` = 0
- static const int `EPS_REAL_MAX` = 1000

Additional Inherited Members

7.10.1 Detailed Description

Class for detecting clusters in 2D images.

Definition at line 20 of file ClusterDetector.hpp.

7.10.2 Constructor & Destructor Documentation

7.10.2.1 ClusterDetector::ClusterDetector (int `maxPileupNumber`, double `maxPileupIntensity`, bool `debugMode` = `false`)

Parameters

<code>debugMode</code>	Flag indicating if detector should run in debug mode or not
<code>maxPileup-Number</code>	The maximum number of entities which can occupy a grid position at the same time
<code>maxPileup-Intensity</code>	The grayscale intensity of a maximally piled up grid position

Definition at line 15 of file ClusterDetector.cpp.

References `avgPileUpDegree`, `clusterednessIndex`, `entityPileupDegree`, `eps`, and `minPoints`.

7.10.2.2 ClusterDetector::~ClusterDetector () [virtual]

Definition at line 25 of file ClusterDetector.cpp.

7.10.3 Member Function Documentation

7.10.3.1 `void ClusterDetector::addEntitiesToClusters (const vector< Entity > & entities, const vector< int > & clusterIndexes, int nrOfClusters, vector< Cluster > & clusters) [protected]`

Add the entities to the clusters as indicated by the clusterIndexes parameter.

Add the entities to the clusters as indicated by the clusterIndexes parameter


Parameters

<code>entities</code>	Entities detected in the image
<code>clusterIndexes</code>	Indexes to which cluster each entity belongs
<code>nrOfClusters</code>	Total number of clusters
<code>clusters</code>	Collection of clusters, each one with the updated measures

Definition at line 111 of file ClusterDetector.cpp.

Referenced by `detectAndAnalyseClusters()`.

Here is the caller graph for this function:



7.10.3.2 `void ClusterDetector::analyseClusters (vector< Cluster > & clusters) [protected]`

Analyse the clusters.

Analyse the clusters and compute the angle and distance from the centre, average clusteredness degree and pile up degree

Parameters


<code>clusters</code>	Collection of clusters, each one with the updated measures
-----------------------	--

Definition at line 122 of file ClusterDetector.cpp.


References `analyseClustersOriginDependentValues()`, `avgPileUpDegree`, `clusterednessIndex`, `computeAveragePileUpDegree()`, and `computeClusterednessIndex()`.

Referenced by `detectAndAnalyseClusters()`.

Here is the call graph for this function:

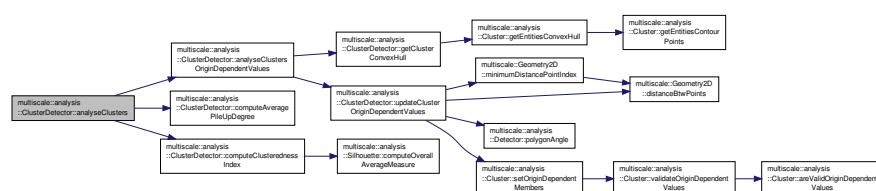

Here is the caller graph for this function:



7.10.3.3 void ClusterDetector::analyseClustersOriginDependentValues (vector< Cluster > & clusters) [protected]

Analyse the clusters and compute the origin dependent values.

The values which depend on the origin point are the distance of the cluster from the centre and the angle

Parameters


<i>clusters</i>	Collection of clusters, each one with the updated measures
-----------------	--

Definition at line 129 of file ClusterDetector.cpp.


References `getClusterConvexHull()`, and `updateClusterOriginDependentValues()`.

Referenced by `analyseClusters()`.

Here is the call graph for this function:

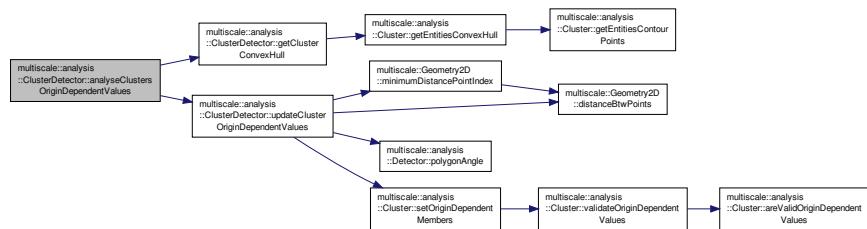

Here is the caller graph for this function:



7.10.3.4 void ClusterDetector::clearPreviousDetectionResults () [override], [protected], [virtual]

Clear the clusters from the previous detection.

Implements [multiscale::analysis::Detector](#).

Definition at line 61 of file ClusterDetector.cpp.

References `clusters`.

7.10.3.5 double ClusterDetector::computeAveragePileUpDegree (`vector< Cluster > & clusters`) [protected]

Compute the average pile up degree for all entities in the image.

Compute the average pile up degree for all entities in the image as the sum of the average pile up degrees of all clusters divided by the number of clusters


Parameters

<code>clusters</code>	Clusters of entities detected in the image
-----------------------	--

Definition at line 162 of file ClusterDetector.cpp.

Referenced by `analyseClusters()`.

Here is the caller graph for this function:



7.10.3.6 double ClusterDetector::computeClusterednessIndex (`const vector< Cluster > & clusters`) [protected]

Compute the clusteredness index for all the entities detected in the image.

Compute the clusteredness index for all the entities detected in the image using [Silhouette](#) cluster validity index

Parameters

<code>clusters</code>	Collection of clusters, each one with the updated measures
-----------------------	--

Definition at line 158 of file ClusterDetector.cpp.

References `multiscale::analysis::Silhouette::computeOverallAverageMeasure()`.

Referenced by `analyseClusters()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.10.3.7 `vector< shared_ptr< DataPoint > > ClusterDetector::convertEntities (const vector< Entity > & entities)` [protected]

Convert the entities to the format required by the [DBSCAN](#) class.

Parameters


<code>entities</code>	Entities detected in the image
-----------------------	--------------------------------

Definition at line 85 of file ClusterDetector.cpp.

References `convertNonPiledUpEntities()`, and `convertPiledUpEntities()`.

Referenced by `detectClusters()`.

Here is the call graph for this function:

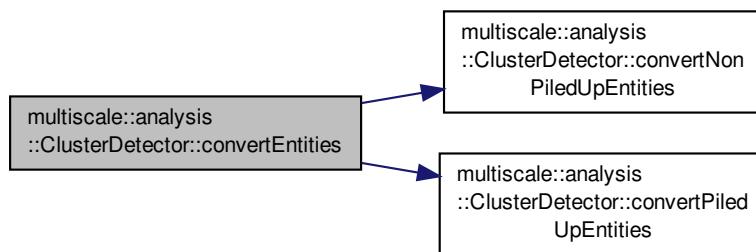

Here is the caller graph for this function:



7.10.3.8 `double ClusterDetector::convertEpsValue ()` [protected]


Convert the value of eps from integer to double.

Definition at line 191 of file ClusterDetector.cpp.

References `eps`, `EPS_MAX`, `EPS_MIN`, `EPS_REAL_MAX`, and `EPS_REAL_MIN`.

Referenced by `detectClusters()`, and `getEps()`.

Here is the caller graph for this function:



7.10.3.9 void ClusterDetector::convertNonPiledUpEntities (const vector< Entity > & *entities*, vector< shared_ptr< DataPoint > > & *dataPoints*) [protected]

Convert the non pile up entities to the format required by the [DBSCAN](#) class.


Parameters

<i>entities</i>	Entities detected in the image
<i>dataPoints</i>	Collection of DataPoint instances required by the DBSCAN class

Definition at line 94 of file ClusterDetector.cpp.

Referenced by convertEntities().

Here is the caller graph for this function:



7.10.3.10 void ClusterDetector::convertPiledUpEntities (const vector< Entity > & *entities*, vector< shared_ptr< DataPoint > > & *dataPoints*) [protected]

Convert the entities to the required format by the [DBSCAN](#) class.

Parameters

<i>entities</i>	Entities detected in the image
<i>dataPoints</i>	Collection of DataPoint instances required by the DBSCAN class

Definition at line 100 of file ClusterDetector.cpp.

Referenced by convertEntities().

Here is the caller graph for this function:



7.10.3.11 void ClusterDetector::createDetectorSpecificTrackbars () [override], [protected], [virtual]

Create the trackbars.

Implements [multiscale::analysis::Detector](#).

Definition at line 56 of file ClusterDetector.cpp.

References *eps*, *EPS_MAX*, *MIN_POINTS_MAX*, *minPoints*, *TRACKBAR_EPS*, *TRACKBAR_MINPOINTS*, and [multiscale::analysis::Detector::WIN_OUTPUT_IMAGE](#).

7.10.3.12 void ClusterDetector::detectAndAnalyseClusters (const vector< Entity > & *entities*, vector< Cluster > & *clusters*) [protected]

Detect and analyse the clusters of entities in the image.

Detect and analyse the clusters of entities in the image

Parameters


<i>entities</i>	Entities detected in the image
<i>clusters</i>	Clusters of entities detected in the image

Definition at line 72 of file ClusterDetector.cpp.


References addEntitiesToClusters(), analyseClusters(), multiscale::analysis::DBSCAN::CLUSTERING_UNCLASSIFIED, and detectClusters().

Referenced by processImageAndDetect().

Here is the call graph for this function:

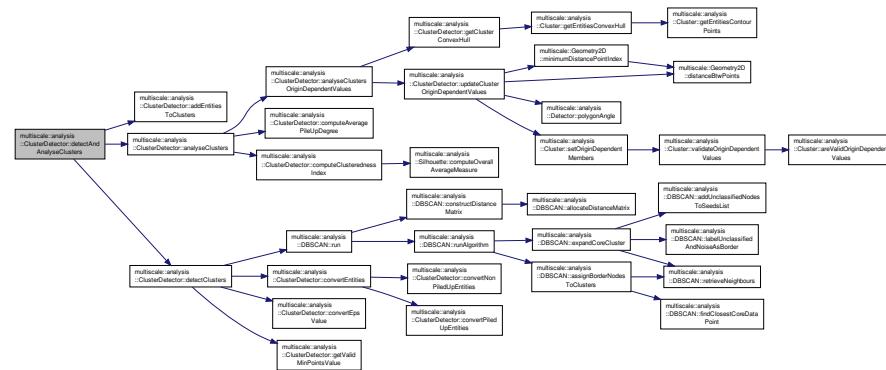

Here is the caller graph for this function:



7.10.3.13 void ClusterDetector::detectClusters (const vector< Entity > & entities, vector< int > & clusterIndexes, int & nrOfClusters) [protected]

Detect the clusters of entities in the image.

Detect the clusters of entities in the image using Density Based scan (DBscan) clustering algorithm Clusters start from index 1, because cluster 0 contains only noise data/points.

Parameters


<i>entities</i>	Entities detected in the image
<i>clusterIndexes</i>	Indexes to which cluster each entity belongs
<i>nrOfClusters</i>	Total number of clusters

Definition at line 81 of file ClusterDetector.cpp.

References convertEntities(), convertEpsValue(), getValidMinPointsValue(), and multiscale::analysis::DBSCAN::run().

Referenced by detectAndAnalyseClusters().

Here is the call graph for this function:

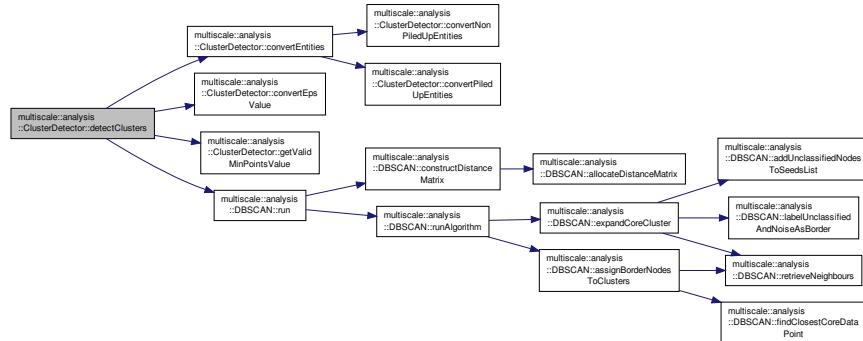

Here is the caller graph for this function:



7.10.3.14 virtual void multiscale::analysis::ClusterDetector::detectEntitiesInImage (`vector< Entity > & entities`) [protected], [pure virtual]

Detect the entities in the image.

Detect the entities in the image, compute their centre point and degree of pile up


Parameters

<code>entities</code>	Entities detected in the image
-----------------------	--------------------------------

Implemented in [multiscale::analysis::SimulationClusterDetector](#).

Referenced by processImageAndDetect().

Here is the caller graph for this function:



7.10.3.15 `vector< Point > ClusterDetector::getClusterConvexHull (Cluster & cluster)` [protected]

Return the convex hull of the given cluster.

Parameters


<code>cluster</code>	The given cluster
----------------------	-------------------

Definition at line 148 of file ClusterDetector.cpp.


References multiscale::analysis::Cluster::getEntitiesConvexHull().

Referenced by analyseClustersOriginDependentValues().

Here is the call graph for this function:



Here is the caller graph for this function:

7.10.3.16 `vector< Cluster > const & ClusterDetector::getClusters ()`

Get a const reference to the vector of detected clusters.

Definition at line 35 of file ClusterDetector.cpp.

References clusters.

7.10.3.17 `double ClusterDetector::getEps ()`


Get the value of the clustering algorithm parameter eps.

Definition at line 27 of file ClusterDetector.cpp.


References convertEpsValue().

Referenced by saveDetectorParameterValues().

Here is the call graph for this function:



Here is the caller graph for this function:



7.10.3.18 int ClusterDetector::getMinPoints ()


Get the value of the clustering algorithm parameter MinPoints.

Definition at line 31 of file ClusterDetector.cpp.

References minPoints.

Referenced by saveDetectorParameterValues().

Here is the caller graph for this function:



7.10.3.19 int ClusterDetector::getValidMinPointsValue () [protected]


Return non-zero value for minPoints.

Definition at line 195 of file ClusterDetector.cpp.

References minPoints.

Referenced by detectClusters().

Here is the caller graph for this function:



7.10.3.20 void ClusterDetector::initialiseDetectorSpecificFields() [override], [protected], [virtual]

Initialise clustering values.

Implements [multiscale::analysis::Detector](#).

Definition at line 51 of file ClusterDetector.cpp.

References eps, and minPoints.

7.10.3.21 void ClusterDetector::outputResultsToCsvFile(ostream & fout) [override], [protected], [virtual]

Output the information computed for the clusters to a csv file.

Parameters


<i>fout</i>	Output file stream
-------------	--------------------

Implements [multiscale::analysis::Detector](#).

Definition at line 177 of file ClusterDetector.cpp.

References avgPileUpDegree, clusterednessIndex, clusters, multiscale::analysis::Cluster::fieldNamesToString(), OUTPUT_CLUSTEREDNESS, and OUTPUT_PILE_UP.

Here is the call graph for this function:



7.10.3.22 void ClusterDetector::processImageAndDetect() [override], [protected], [virtual]


Process the provided image and detect clusters in it.

Implements [multiscale::analysis::Detector](#).

Definition at line 65 of file ClusterDetector.cpp.

References clusters, detectAndAnalyseClusters(), and detectEntitiesInImage().

Here is the call graph for this function:

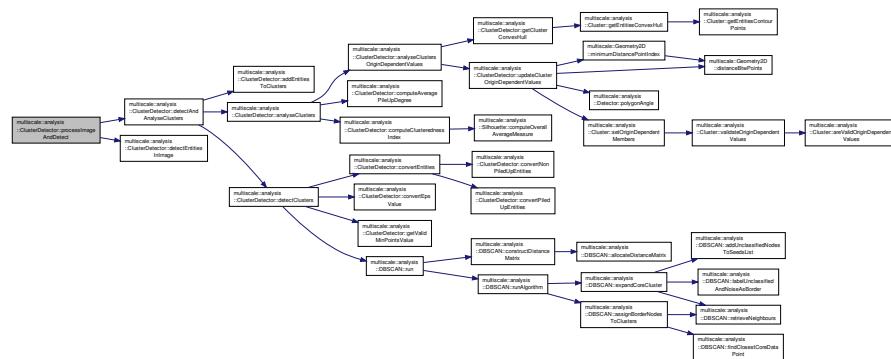

7.10.3.23 void ClusterDetector::setEps (double eps)

Set the value of the clustering algorithm parameter eps .

Parameters


<code>eps</code>	Value of the clustering algorithm parameter <code>eps</code>
------------------	--

Definition at line 39 of file ClusterDetector.cpp.


References `eps`, `EPS_MAX`, `EPS_MIN`, `EPS_REAL_MAX`, `EPS_REAL_MIN`, and `multiscale::analysis::Detector::setDetectorSpecificFieldsInitialisationFlag()`.

Referenced by `loadDetectorParameterValues()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.10.3.24 void ClusterDetector::setMinPoints (int *minPoints*)

Set the value of the clustering algorithm parameter MinPoints.

Parameters


<i>minPoints</i>	Value of the clustering algorithm parameter MinPoints
------------------	---

Definition at line 45 of file ClusterDetector.cpp.


References *minPoints*, and multiscale::analysis::Detector::setDetectorSpecificFieldsInitialisationFlag().

Referenced by *loadDetectorParameterValues()*.

Here is the call graph for this function:



Here is the caller graph for this function:

7.10.3.25 void ClusterDetector::updateClusterOriginDependentValues (Cluster & *cluster*, const vector< Point > & *clusterConvexHull*) [protected]

Update the cluster and compute the origin dependent values considering the convex hull.

The values which depend on the origin point are the distance of the cluster from the centre and the angle

Parameters


<i>cluster</i>	Cluster
<i>clusterConvex-Hull</i>	Convex hull of the cluster

Definition at line 139 of file ClusterDetector.cpp.

References multiscale::Geometry2D::distanceBtwPoints(), multiscale::Geometry2D::minimumDistancePointIndex(), multiscale::analysis::Detector::origin, multiscale::analysis::Detector::polygonAngle(), and multiscale::analysis::Cluster::setOriginDependentMembers().

Referenced by *analyseClustersOriginDependentValues()*.

Here is the call graph for this function:

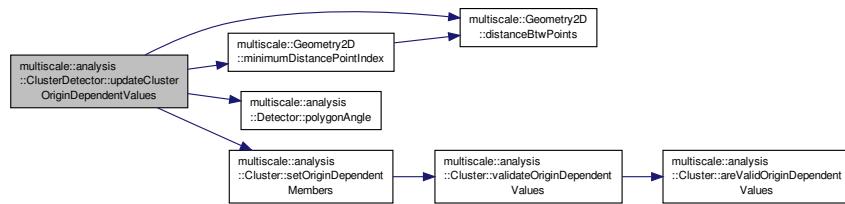

Here is the caller graph for this function:



7.10.4 Member Data Documentation

7.10.4.1 double multiscale::analysis::ClusterDetector::avgPileUpDegree [protected]

Average pile up degree of all clusters

Definition at line 25 of file ClusterDetector.hpp.

Referenced by analyseClusters(), ClusterDetector(), and outputResultsToCsvFile().

7.10.4.2 double multiscale::analysis::ClusterDetector::clusterednessIndex [protected]

Index of clusteredness for all clusters

Definition at line 24 of file ClusterDetector.hpp.

Referenced by analyseClusters(), ClusterDetector(), and outputResultsToCsvFile().

7.10.4.3 vector<Cluster> multiscale::analysis::ClusterDetector::clusters [protected]

Clusters found in the image

Definition at line 35 of file ClusterDetector.hpp.

Referenced by clearPreviousDetectionResults(), getClusters(), outputResultsToCsvFile(), multiscale::analysis::SimulationClusterDetector::outputResultsToImage(), and processImageAndDetect().

7.10.4.4 double multiscale::analysis::ClusterDetector::entityPileupDegree [protected]

The pile up degree (intensity) of a grid position occupied by only one entity

Definition at line 27 of file ClusterDetector.hpp.

Referenced by ClusterDetector(), and multiscale::analysis::SimulationClusterDetector::computePileUpDegreeAtPosition().

7.10.4.5 **int multiscale::analysis::ClusterDetector::eps** [protected]

DBSCAN algorithm parameter for specifying the maximum radius

of the neighbourhood

Definition at line 30 of file ClusterDetector.hpp.

Referenced by ClusterDetector(), convertEpsValue(), createDetectorSpecificTrackbars(), initialiseDetectorSpecificFields(), and setEps().

7.10.4.6 **const int ClusterDetector::EPS_MAX = 10000** [static], [private]

Definition at line 210 of file ClusterDetector.hpp.

Referenced by convertEpsValue(), createDetectorSpecificTrackbars(), and setEps().

7.10.4.7 **const int ClusterDetector::EPS_MIN = 0** [static], [private]

Definition at line 209 of file ClusterDetector.hpp.

Referenced by convertEpsValue(), and setEps().

7.10.4.8 **const int ClusterDetector::EPS_REAL_MAX = 1000** [static], [private]

Definition at line 212 of file ClusterDetector.hpp.

Referenced by convertEpsValue(), and setEps().

7.10.4.9 **const int ClusterDetector::EPS_REAL_MIN = 0** [static], [private]

Definition at line 211 of file ClusterDetector.hpp.

Referenced by convertEpsValue(), and setEps().

7.10.4.10 **const int ClusterDetector::MIN_POINTS_MAX = 100** [static], [private]

Definition at line 207 of file ClusterDetector.hpp.

Referenced by createDetectorSpecificTrackbars().

7.10.4.11 **const int ClusterDetector::MIN_POINTS_MIN = 0** [static], [private]

Definition at line 206 of file ClusterDetector.hpp.

7.10.4.12 **int multiscale::analysis::ClusterDetector::minPoints** [protected]

DBSCAN algorithm parameter for specifying the minimum number

of points in an eps-neighbourhood of that point

Definition at line 32 of file ClusterDetector.hpp.

Referenced by ClusterDetector(), createDetectorSpecificTrackbars(), getMinPoints(), getValidMinPointsValue(), initialiseDetectorSpecificFields(), and setMinPoints().

7.10.4.13 `const string ClusterDetector::OUTPUT_CLUSTEREDNESS = "Clusteredness index:"` [static], [private]

Definition at line 200 of file ClusterDetector.hpp.

Referenced by `outputResultsToCsvFile()`.

7.10.4.14 `const string ClusterDetector::OUTPUT_PILE_UP = "Average pile up degree:"` [static], [private]

Definition at line 201 of file ClusterDetector.hpp.

Referenced by `outputResultsToCsvFile()`.

7.10.4.15 `const string ClusterDetector::TRACKBAR_EPS = "Eps (Multiplied by 10)"` [static], [private]

Definition at line 203 of file ClusterDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`.

7.10.4.16 `const string ClusterDetector::TRACKBAR_MINPOINTS = "Minimum number of points"` [static], [private]

Definition at line 204 of file ClusterDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`.

The documentation for this class was generated from the following files:


- `modules/analysis/spatial/include/multiscale/analysis/spatial/ClusterDetector.hpp`
- `modules/analysis/spatial/src/ClusterDetector.cpp`

7.11 multiscale::ClusterException Class Reference


Exception class for the Cluster instances.

```
#include <ClusterException.hpp>
```

Inheritance diagram for multiscale::ClusterException:

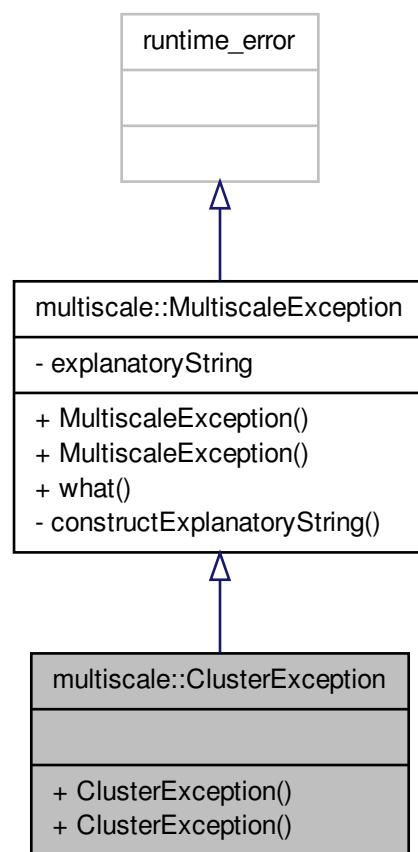

Collaboration diagram for multiscale::ClusterException:

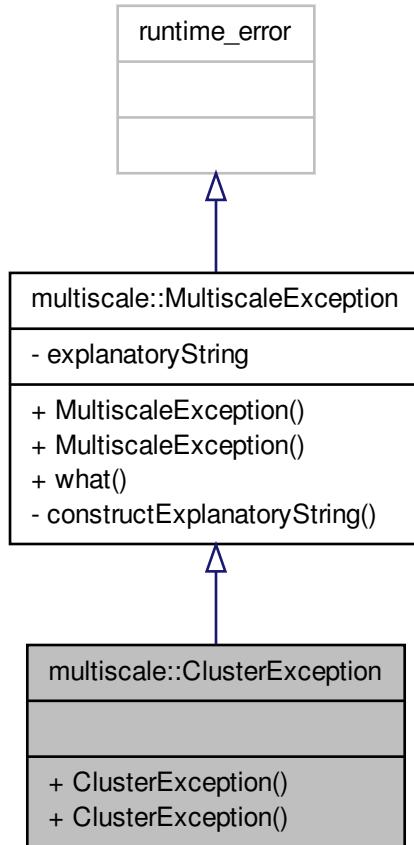

Public Member Functions

- `ClusterException (const string &file, int line, const string &msg)`
- `ClusterException (const string &file, int line, const char *msg)`

7.11.1 Detailed Description

Exception class for the Cluster instances.

Definition at line 14 of file `ClusterException.hpp`.

7.11.2 Constructor & Destructor Documentation

7.11.2.1 `multiscale::ClusterException::ClusterException (const string & file, int line, const string & msg) [inline]`

Definition at line 18 of file `ClusterException.hpp`.

7.11.2.2 `multiscale::ClusterException::ClusterException (const string & file, int line, const char * msg) [inline]`

Definition at line 20 of file ClusterException.hpp.

The documentation for this class was generated from the following file:


- [include/multiscale/exception/ClusterException.hpp](#)

7.12 multiscale::analysis::DataPoint Class Reference


Class for representing a data point.

```
#include <DataPoint.hpp>
```

Inheritance diagram for multiscale::analysis::DataPoint:

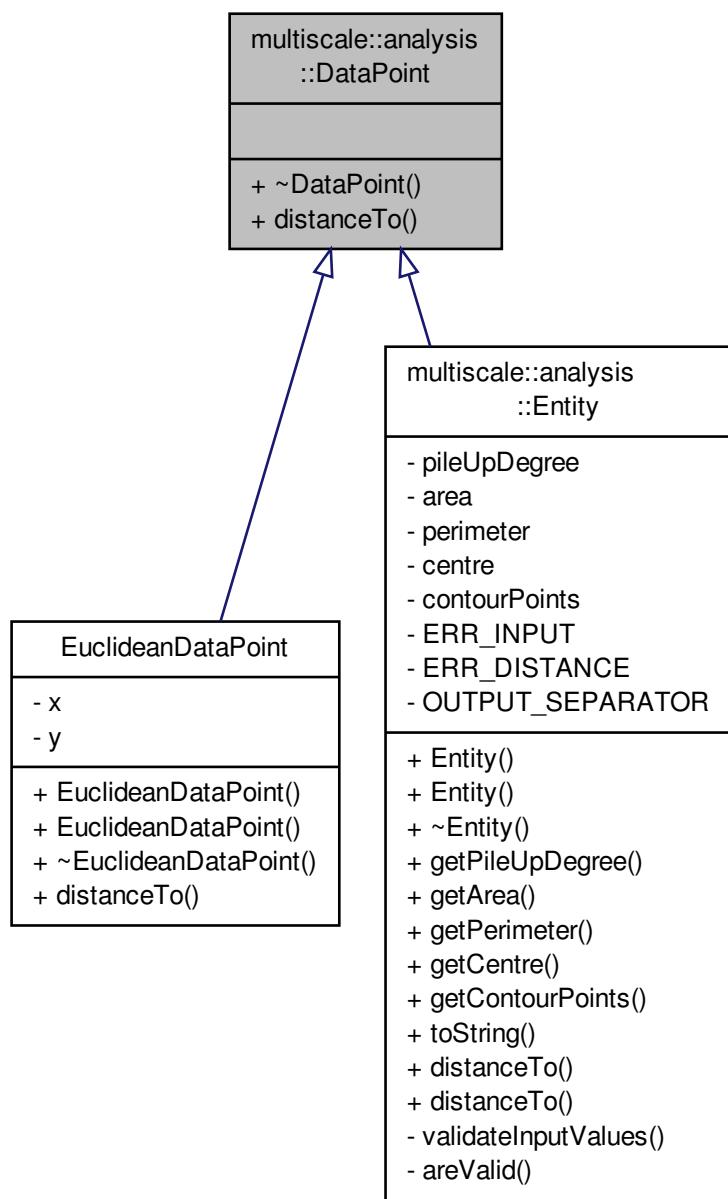

Collaboration diagram for multiscale::analysis::DataPoint:



Public Member Functions

- virtual `~DataPoint ()`
- virtual double `distanceTo (shared_ptr< DataPoint > point)=0`
Compute the distance between this data point and another one.

7.12.1 Detailed Description

Class for representing a data point.

Definition at line 13 of file DataPoint.hpp.

7.12.2 Constructor & Destructor Documentation

7.12.2.1 virtual multiscale::analysis::DataPoint::~DataPoint () [inline], [virtual]

Definition at line 17 of file DataPoint.hpp.

7.12.3 Member Function Documentation

7.12.3.1 virtual double multiscale::analysis::DataPoint::distanceTo (shared_ptr< DataPoint > point) [pure virtual]

Compute the distance between this data point and another one.

Parameters

<code>point</code>	Data point to which the distance is measured
--------------------	--

Implemented in [multiscale::analysis::Entity](#), and [EuclideanDataPoint](#).

The documentation for this class was generated from the following file:


- [modules/analysis/spatial/include/multiscale/analysis/spatial/DataPoint.hpp](#)

7.13 multiscale::analysis::DBSCAN Class Reference

Class which implements an improved version of the [DBSCAN](#) algorithm.

```
#include <DBSCAN.hpp>
```

Collaboration diagram for multiscale::analysis::DBSCAN:

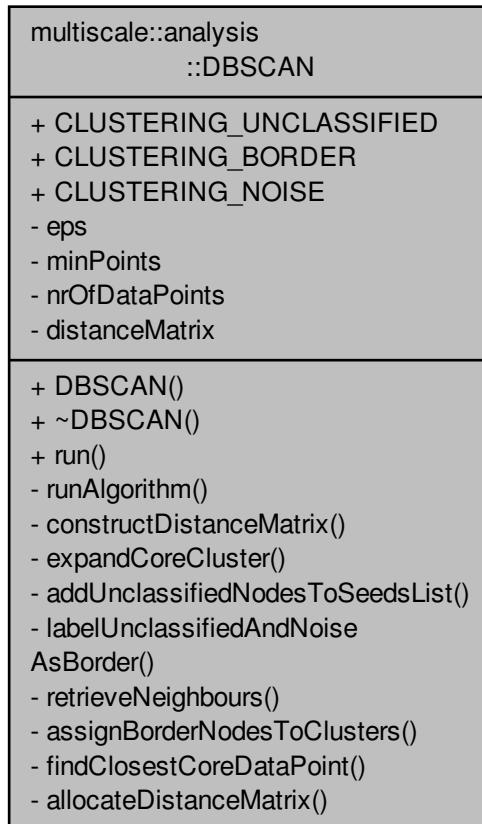

Public Member Functions

- [DBSCAN \(\)](#)
- [~DBSCAN \(\)](#)
- void [run](#) (const vector< shared_ptr< [DataPoint](#) >> &dataPoints, vector< int > &clusterIndexes, int &nrOfClusters, double [eps](#), int [minPoints](#))

Run the improved [DBSCAN](#) algorithm on the provided set of points.

Static Public Attributes

- static const int [CLUSTERING_UNCLASSIFIED](#) = -2
- static const int [CLUSTERING_BORDER](#) = -1
- static const int [CLUSTERING_NOISE](#) = 0

Private Member Functions

- void `runAlgorithm` (const vector< shared_ptr< `DataPoint` >> &dataPoints, vector< int > &clusterIndexes, int &nrOfClusters)

Run the improved `DBSCAN` algorithm on the provided set of points.
- void `constructDistanceMatrix` (const vector< shared_ptr< `DataPoint` >> &dataPoints)

Construct the distance matrix between any two data points.
- bool `expandCoreCluster` (vector< int > &clusterIndexes, int coreDataPointIndex, int clusterId)

Expand the cluster around the given core data point.
- void `addUnclassifiedNodesToSeedsList` (const vector< int > &neighbours, const vector< int > &clusterIndexes, vector< int > &seeds)

Add all unclassified neighbour nodes to the seeds list.
- void `labelUnclassifiedAndNoiseAsBorder` (const vector< int > &neighbours, vector< int > &clusterIndexes)

Label all unclassified and noise neighbour nodes as border nodes.
- vector< int > `retrieveNeighbours` (int dataPointIndex)

Retrieve the list of neighbour indexes which are at a distance < `eps` far from the given data point.
- void `assignBorderNodesToClusters` (vector< int > &clusterIndexes)

Assign the border nodes to the clusters to which the closest core objects belong.
- int `findClosestCoreDataPoint` (const vector< int > &neighbours, int borderDataPointIndex, const vector< int > &clusterIndexes)

Find the closest core data point from the given set of neighbours to the given border data point.
- void `allocateDistanceMatrix` ()

Allocate the distance matrix.

Private Attributes

- double `eps`
- unsigned int `minPoints`
- unsigned int `nrOfDataPoints`
- vector< vector< double > > `distanceMatrix`

7.13.1 Detailed Description

Class which implements an improved version of the `DBSCAN` algorithm.

Definition at line 17 of file DBSCAN.hpp.

7.13.2 Constructor & Destructor Documentation

7.13.2.1 DBSCAN::DBSCAN()

Definition at line 9 of file DBSCAN.cpp.

7.13.2.2 DBSCAN::~DBSCAN()

Definition at line 11 of file DBSCAN.cpp.

References `distanceMatrix`.

7.13.3 Member Function Documentation

7.13.3.1 `void DBSCAN::addUnclassifiedNodesToSeedsList (const vector< int > & neighbours, const vector< int > & clusterIndexes, vector< int > & seeds) [private]`

Add all unclassified neighbour nodes to the seeds list.

Parameters


<code>neighbours</code>	Neighbour nodes
<code>clusterIndexes</code>	Indexes to which cluster each data point belongs
<code>seeds</code>	List of seeds (see DBSCAN algorithm)

Definition at line 85 of file DBSCAN.cpp.

References CLUSTERING_UNCLASSIFIED.

Referenced by `expandCoreCluster()`.

Here is the caller graph for this function:

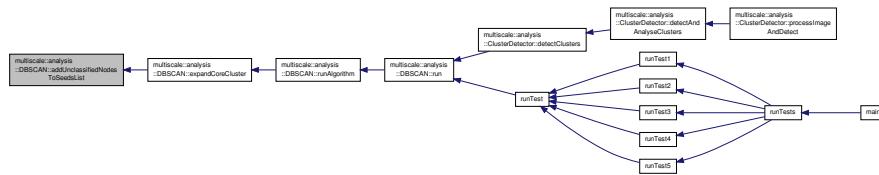

7.13.3.2 `void DBSCAN::allocateDistanceMatrix () [private]`


Allocate the distance matrix.

Definition at line 148 of file DBSCAN.cpp.

References `distanceMatrix`, and `nrOfDataPoints`.

Referenced by `constructDistanceMatrix()`.

Here is the caller graph for this function:

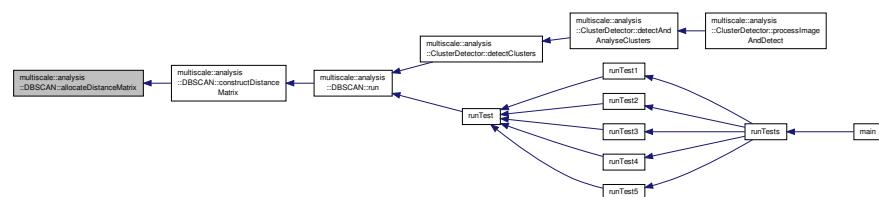

7.13.3.3 `void DBSCAN::assignBorderNodesToClusters (vector< int > & clusterIndexes) [private]`

Assign the border nodes to the clusters to which the closest core objects belong.

Parameters


<code>clusterIndexes</code>	Indexes to which cluster each data point belongs
-----------------------------	--

Definition at line 117 of file DBSCAN.cpp.


References CLUSTERING_BORDER, findClosestCoreDataPoint(), nrOfDataPoints, and retrieveNeighbours().

Referenced by runAlgorithm().

Here is the call graph for this function:

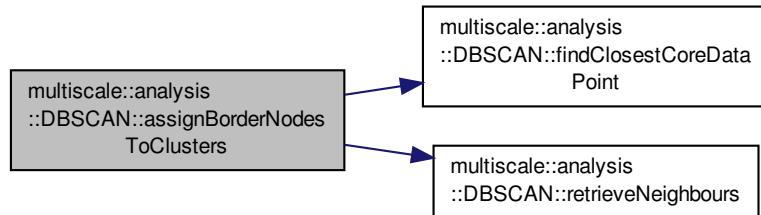

Here is the caller graph for this function:

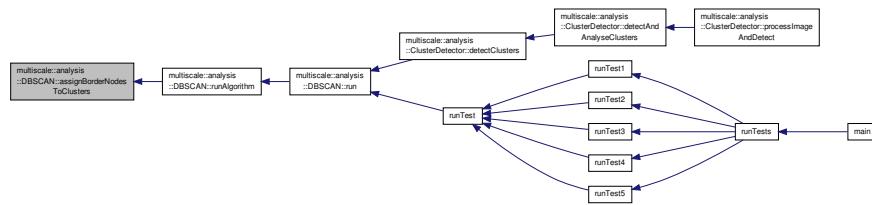

7.13.3.4 void DBSCAN::constructDistanceMatrix (const vector< shared_ptr< DataPoint >> & dataPoints) [private]

Construct the distance matrix between any two data points.

Parameters


<i>dataPoints</i>	Data points
-------------------	-------------

Definition at line 44 of file DBSCAN.cpp.


References allocateDistanceMatrix(), distanceMatrix, and nrOfDataPoints.

Referenced by run().

Here is the call graph for this function:



Here is the caller graph for this function:

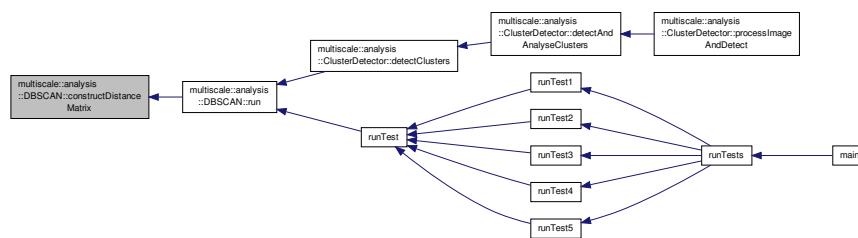

7.13.3.5 `bool DBSCAN::expandCoreCluster (vector< int > & clusterIndexes, int coreDataPointIndex, int clusterId)`
[private]

Expand the cluster around the given core data point.

Parameters


<code>clusterIndexes</code>	Indexes to which cluster each data point belongs
<code>coreDataPoint- Index</code>	Core data point index
<code>clusterId</code>	Id of the cluster to which the core data point belongs

Definition at line 57 of file DBSCAN.cpp.


References `addUnclassifiedNodesToSeedsList()`, `CLUSTERING_NOISE`, `labelUnclassifiedAndNoiseAsBorder()`, `minPoints`, and `retrieveNeighbours()`.

Referenced by `runAlgorithm()`.

Here is the call graph for this function:

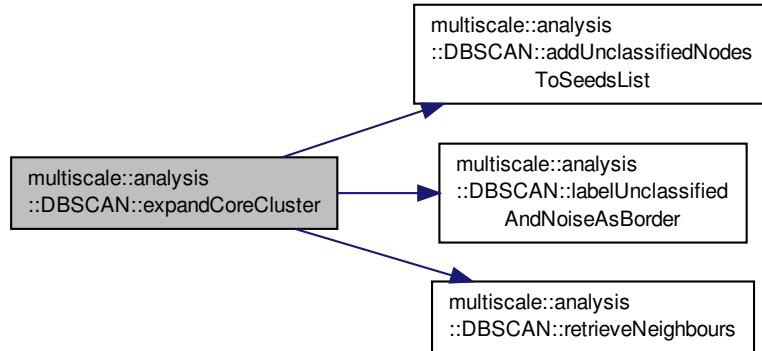

Here is the caller graph for this function:

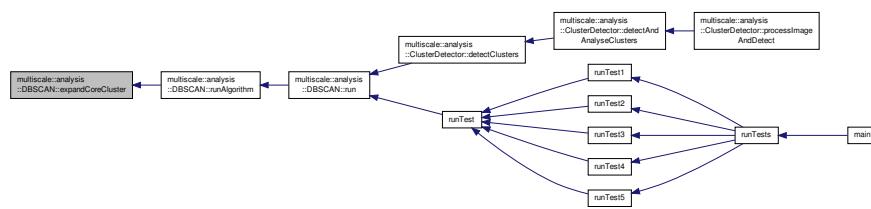

7.13.3.6 `int DBSCAN::findClosestCoreDataPoint (const vector< int > & neighbours, int borderDataPointIndex, const vector< int > & clusterIndexes) [private]`

Find the closest core data point from the given set of neighbours to the given border data point.

Parameters


<code>neighbours</code>	Set of neighbours
<code>borderDataPoint- Index</code>	Index of the border data point
<code>clusterIndexes</code>	Indexes to which cluster each data point belongs

Definition at line 128 of file DBSCAN.cpp.

References `distanceMatrix`.

Referenced by `assignBorderNodesToClusters()`.

Here is the caller graph for this function:

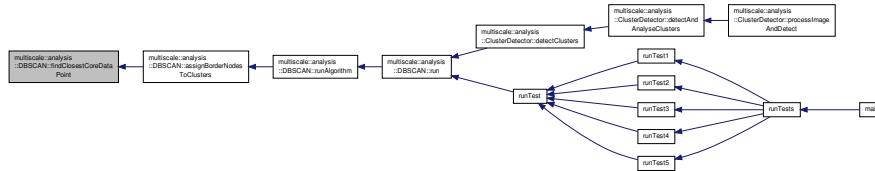

7.13.3.7 void DBSCAN::labelUnclassifiedAndNoiseAsBorder (const vector< int > & *neighbours*, vector< int > & *clusterIndexes*) [private]

Label all unclassified and noise neighbour nodes as border nodes.

Parameters


<i>neighbours</i>	Neighbour nodes
<i>clusterIndexes</i>	Indexes to which cluster each data point belongs

Definition at line 94 of file DBSCAN.cpp.

References CLUSTERING_BORDER, CLUSTERING_NOISE, and CLUSTERING_UNCLASSIFIED.

Referenced by `expandCoreCluster()`.

Here is the caller graph for this function:

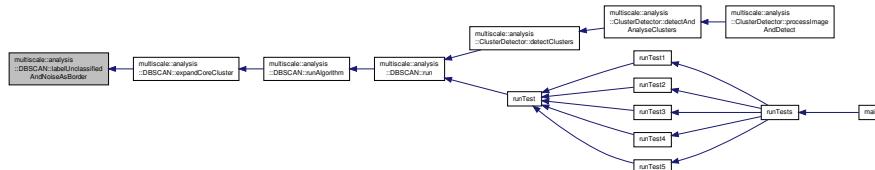

7.13.3.8 `vector< int > DBSCAN::retrieveNeighbours (int dataPointIndex)` [private]

Retrieve the list of neighbour indexes which are at a distance $< \text{eps}$ far from the given data point.

Parameters


`dataPointIndex` Index of the data point for which the neighbours will be retrieved

Definition at line 103 of file DBSCAN.cpp.

References distanceMatrix, eps, and nrOfDataPoints

Referenced by `assignBorderNodesToClusters()`, and `expandCoreCluster()`.

Here is the caller graph for this function:

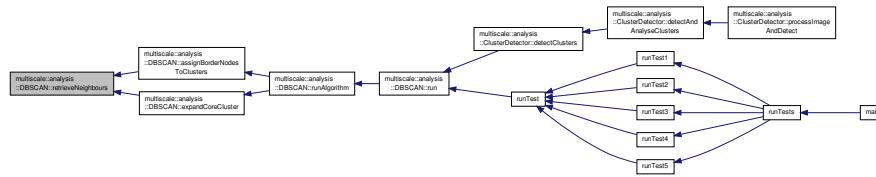

```
7.13.3.9 void DBSCAN::run ( const vector< shared_ptr< DataPoint >> & dataPoints, vector< int > & clusterIndexes, int & nrOfClusters, double eps, int minPoints )
```

Run the improved DBSCAN algorithm on the provided set of points.

The implementation of the improved DBSCAN algorithm is based on the paper: T. N. Tran, K. Drab, and M. Daszykowski, 'Revised DBSCAN algorithm to cluster data with dense adjacent clusters', *Chemometrics and Intelligent Laboratory Systems*, vol. 120, pp. 92–96, Jan. 2013.

Clusters start from index 1, because cluster 0 contains only noise data/points.

Parameters


<i>dataPoints</i>	Collection of data points
<i>clusterIndexes</i>	Indexes to which cluster each data point belongs
<i>nrOfClusters</i>	Total number of clusters
<i>eps</i>	Maximum distance between two neighbours
<i>minPoints</i>	Minimum number of points in one cluster

Definition at line 15 of file DBSCAN.cpp.


References `constructDistanceMatrix()`, `eps`, `minPoints`, `nrOfDataPoints`, and `runAlgorithm()`.

Referenced by multiscale::analysis::ClusterDetector::detectClusters(), and runTest().

Here is the call graph for this function:

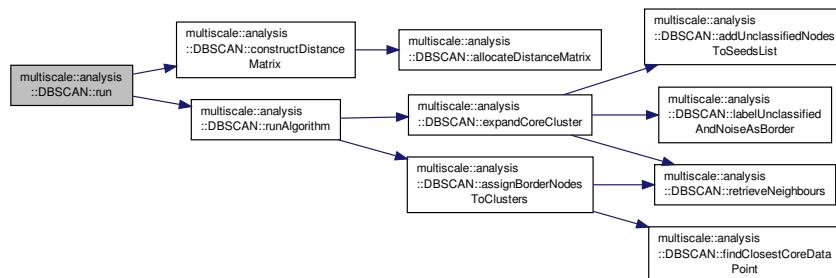

Here is the caller graph for this function:

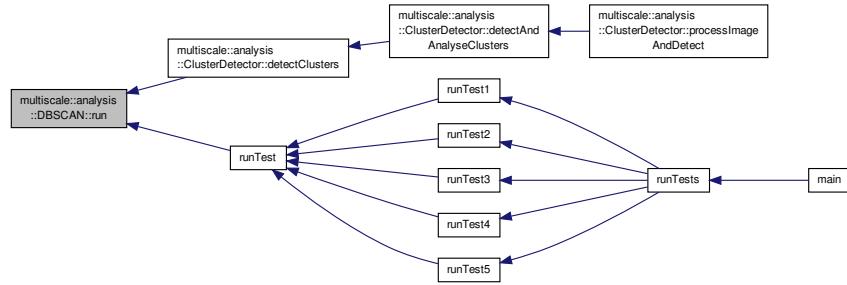

7.13.3.10 `void DBSCAN::runAlgorithm (const vector< shared_ptr< DataPoint >> & dataPoints, vector< int > & clusterIndexes, int & nrOfClusters) [private]`

Run the improved [DBSCAN](#) algorithm on the provided set of points.

The implementation of the improved [DBSCAN](#) algorithm is based on the paper: T. N. Tran, K. Drab, and M. Daszykowski, 'Revised [DBSCAN](#) algorithm to cluster data with dense adjacent clusters', *Chemometrics and Intelligent Laboratory Systems*, vol. 120, pp. 92–96, Jan. 2013.

Clusters start from index 1, because cluster 0 contains only noise data/points.

Parameters


<code>dataPoints</code>	Collection of data points
<code>clusterIndexes</code>	Indexes to which cluster each data point belongs
<code>nrOfClusters</code>	Total number of clusters

Definition at line 26 of file DBSCAN.cpp.


References `assignBorderNodesToClusters()`, `CLUSTERING_UNCLASSIFIED`, `expandCoreCluster()`, and `nrOfDataPoints`.

Referenced by `run()`.

Here is the call graph for this function:

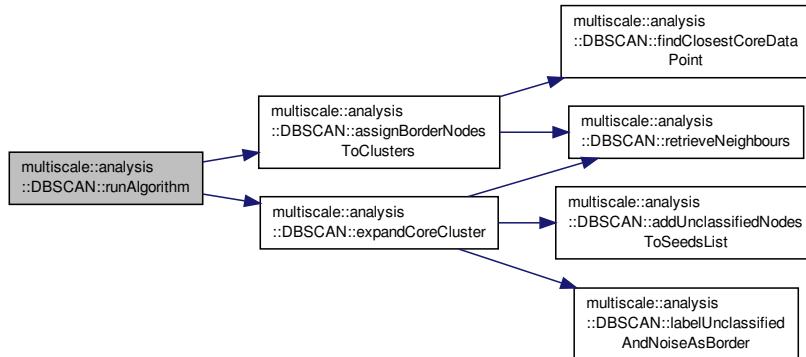

Here is the caller graph for this function:

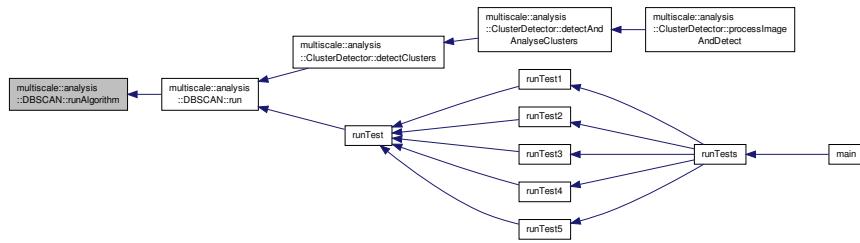

7.13.4 Member Data Documentation

7.13.4.1 const int DBSCAN::CLUSTERING_BORDER = -1 [static]

Definition at line 122 of file DBSCAN.hpp.

Referenced by assignBorderNodesToClusters(), and labelUnclassifiedAndNoiseAsBorder().

7.13.4.2 const int DBSCAN::CLUSTERING_NOISE = 0 [static]

Definition at line 123 of file DBSCAN.hpp.

Referenced by expandCoreCluster(), and labelUnclassifiedAndNoiseAsBorder().

7.13.4.3 const int DBSCAN::CLUSTERING_UNCLASSIFIED = -2 [static]

Definition at line 121 of file DBSCAN.hpp.

Referenced by addUnclassifiedNodesToSeedsList(), multiscale::analysis::ClusterDetector::detectAndAnalyseClusters(), labelUnclassifiedAndNoiseAsBorder(), and runAlgorithm().

7.13.4.4 vector<vector<double>> multiscale::analysis::DBSCAN::distanceMatrix [private]

The matrix containing the distances between any two data points

Definition at line 28 of file DBSCAN.hpp.

Referenced by allocateDistanceMatrix(), constructDistanceMatrix(), findClosestCoreDataPoint(), retrieveNeighbours(), and ~DBSCAN().

7.13.4.5 double multiscale::analysis::DBSCAN::eps [private]

DBSCAN algorithm parameter for specifying the maximum radius

of the neighbourhood

Definition at line 21 of file DBSCAN.hpp.

Referenced by retrieveNeighbours(), and run().

7.13.4.6 unsigned int multiscale::analysis::DBSCAN::minPoints [private]

DBSCAN algorithm parameter for specifying the minimum number

of points in an eps -neighbourhood of that point
Definition at line 23 of file DBSCAN.hpp.
Referenced by expandCoreCluster(), and run().

7.13.4.7 `unsigned int multiscale::analysis::DBSCAN::nrOfDataPoints` [private]

Number of data points in the data set

Definition at line 26 of file DBSCAN.hpp.
Referenced by allocateDistanceMatrix(), assignBorderNodesToClusters(), constructDistanceMatrix(), retrieveNeighbours(), run(), and runAlgorithm().

The documentation for this class was generated from the following files:


- modules/analysis/spatial/include/multiscale/analysis/spatial/[DBSCAN.hpp](#)
- modules/analysis/spatial/src/[DBSCAN.cpp](#)

7.14 multiscale::analysis::Detector Class Reference


Abstract class for detecting entities of interest in images.

```
#include <Detector.hpp>
```

Inheritance diagram for multiscale::analysis::Detector:

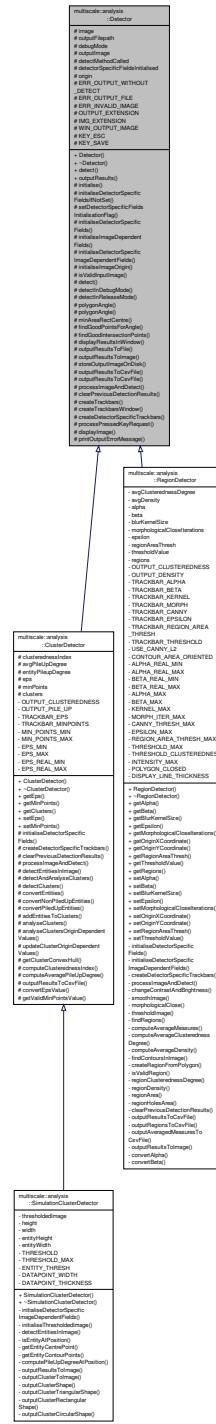

Collaboration diagram for multiscale::analysis::Detector:

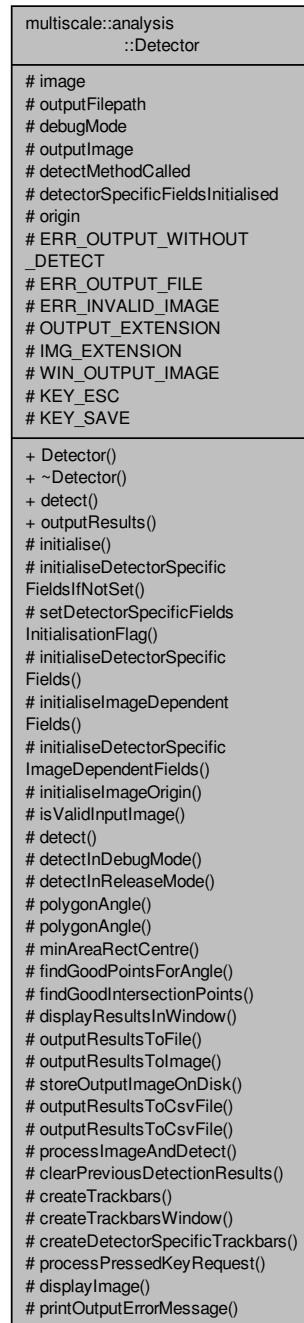

Public Member Functions

- **Detector** (bool `debugMode=false`)
- **virtual ~Detector ()**
- **void detect** (const `Mat &inputImage`)

Run the detection procedure on the given image.

- **void outputResults** (const `string &outputFilepath`)

Output the results to the given file.

Protected Member Functions

- void **initialise** ()

Initialisation function for the class.
- void **initialiseDetectorSpecificFieldsIfNotSet** ()

Initialisation of the detector specific values in case they were not set.
- void **setDetectorSpecificFieldsInitialisationFlag** (bool flag=true)

Set the detector specific fields initialisation flag to true.
- virtual void **initialiseDetectorSpecificFields** ()=0

Initialisation of the detector specific values.
- void **initialiseImageDependentFields** ()

Initialisation of the image dependent values.
- virtual void **initialiseDetectorSpecificImageDependentFields** ()=0

Initialisation of the detector specific image dependent values.
- void **initialiseImageOrigin** ()

Initialisation of the image origin.
- bool **isValidInputImage** (const Mat &inputImage)

Check if the image is valid.
- void **detect** ()

Run the detection procedure.
- void **detectInDebugMode** ()

Run the detection procedure when in debug mode.
- void **detectInReleaseMode** ()

Run the detection procedure when in release mode (i.e. non-debug mode)
- double **polygonAngle** (const vector< Point > &polygon, unsigned int closestPointIndex)

Compute the angle of the polygon.
- double **polygonAngle** (const vector< Point > &polygonConvexHull, const Point &closestPoint)

Compute the angle of the polygon.
- void **minAreaRectCentre** (const vector< Point > &polygon, Point ¢re)

Get the centre of the minimum area bounding rectangle.
- void **findGoodPointsForAngle** (const vector< Point > &polygonConvexHull, const Point &boundingRectCentre, const Point &closestPoint, vector< Point > &goodPointsForAngle)

Find the points for determining the angle of the polygon.
- void **findGoodIntersectionPoints** (const vector< Point > &polygonConvexHull, const Point &edgePointA, const Point &edgePointB, vector< Point > &goodPointsForAngle)

Find good intersection points for computing the angle of the polygon.
- void **displayResultsInWindow** ()

Display the results in a window.
- void **outputResultsToFile** ()

Output the results to file(s)
- virtual void **outputResultsToImage** ()=0

Output the results to an image.
- void **storeOutputImageOnDisk** ()

Store the image with the output results on disk.
- void **outputResultsToCsvFile** ()

Output the results to a file.
- virtual void **outputResultsToCsvFile** (ofstream &fout)=0

Output the results to a file using the provided output file stream.
- virtual void **processImageAndDetect** ()=0

Process the input image and detect objects/entities of interest.

- virtual void `clearPreviousDetectionResults ()=0`
Clear the results from the previous detection.
- void `createTrackbars ()`
Create the trackbars which allow the user to change the values of the parameters.
- void `createTrackbarsWindow ()`
Create the window in which the trackbars are placed.
- virtual void `createDetectorSpecificTrackbars ()=0`
Create the trackbars specific to the used detector.
- void `processPressedKeyRequest (char &pressedKey)`
Process the request of the user by pressing the key.
- void `displayImage (const Mat &image, const string &windowName)`
Display an image in a particular window.
- void `printOutputErrorMessage ()`
Print error message, because the `detect` method was not called before calling the `output` method.

Protected Attributes

- Mat `image`
- string `outputFilepath`
- bool `debugMode`
- Mat `outputImage`
- bool `detectMethodCalled`
- bool `detectorSpecificFieldsInitialised`
- Point `origin`

Static Protected Attributes

- static const string `ERR_OUTPUT_WITHOUT_DETECT` = "Unable to output results if the `detect` method was not called previously."
- static const string `ERR_OUTPUT_FILE` = "Unable to create output file."
- static const string `ERR_INVALID_IMAGE` = "The input `image` is invalid."
- static const string `OUTPUT_EXTENSION` = ".out"
- static const string `IMG_EXTENSION` = ".png"
- static const string `WIN_OUTPUT_IMAGE` = "Output `image`"
- static const int `KEY_ESC` = 27
- static const int `KEY_SAVE` = 115

7.14.1 Detailed Description

Abstract class for detecting entities of interest in images.

Definition at line 18 of file `Detector.hpp`.

7.14.2 Constructor & Destructor Documentation

7.14.2.1 `Detector::Detector (bool debugMode = false)`

Definition at line 11 of file `Detector.cpp`.

7.14.2.2 `Detector::~Detector () [virtual]`

Definition at line 18 of file `Detector.cpp`.

7.14.3 Member Function Documentation

7.14.3.1 `virtual void multiscale::analysis::Detector::clearPreviousDetectionResults () [protected], [pure virtual]`

Clear the results from the previous detection.

Implemented in [multiscale::analysis::RegionDetector](#), and [multiscale::analysis::ClusterDetector](#).

7.14.3.2 `virtual void multiscale::analysis::Detector::createDetectorSpecificTrackbars () [protected], [pure virtual]`

Create the trackbars specific to the used detector.

Implemented in [multiscale::analysis::RegionDetector](#), and [multiscale::analysis::ClusterDetector](#).

7.14.3.3 `void Detector::createTrackbars () [protected]`

Create the trackbars which allow the user to change the values of the parameters.

Definition at line 187 of file `Detector.cpp`.

7.14.3.4 `void Detector::createTrackbarsWindow () [protected]`

Create the window in which the trackbars are placed.

Definition at line 192 of file `Detector.cpp`.

7.14.3.5 `void Detector::detect (const Mat & inputImage)`

Run the detection procedure on the given image.

Parameters


<code><i>inputImage</i></code>	The input image
--------------------------------	-----------------

Definition at line 23 of file `Detector.cpp`.

References `MS_throw`.

Referenced by `main()`.

Here is the caller graph for this function:



7.14.3.6 void **Detector::detect**() [protected]

Run the detection procedure.

Definition at line 77 of file *Detector.cpp*.

7.14.3.7 void **Detector::detectInDebugMode**() [protected]

Run the detection procedure when in debug mode.

Definition at line 87 of file *Detector.cpp*.

References *KEY_ESC*.

7.14.3.8 void **Detector::detectInReleaseMode**() [protected]

Run the detection procedure when in release mode (i.e. non-debug mode)

Definition at line 102 of file *Detector.cpp*.

7.14.3.9 void **Detector::displayImage**(const *Mat* & *image*, const *string* & *windowName*) [protected]

Display an image in a particular window.

Parameters

<i>image</i>	The image
<i>windowName</i>	The name of the window

Definition at line 203 of file *Detector.cpp*.

7.14.3.10 void **Detector::displayResultsInWindow**() [protected]

Display the results in a window.

Definition at line 157 of file *Detector.cpp*.

7.14.3.11 void **Detector::findGoodIntersectionPoints**(const *vector*< *Point* > & *polygonConvexHull*, const *Point* & *edgePointA*, const *Point* & *edgePointB*, *vector*< *Point* > & *goodPointsForAngle*) [protected]

Find good intersection points for computing the angle of the polygon.

Parameters

<i>polygonConvex-Hull</i>	The convex hull of the polygon
<i>edgePointA</i>	Point A on the edge
<i>edgePointB</i>	Point B on the edge
<i>goodPointsFor-Angle</i>	The "good" points for computing the angle

Definition at line 144 of file *Detector.cpp*.

References *multiscale::Geometry2D::lineSegmentIntersection()*.

Here is the call graph for this function:



7.14.3.12 void Detector::findGoodPointsForAngle (const vector< Point > & *polygonConvexHull*, const Point & *boundingRectCentre*, const Point & *closestPoint*, vector< Point > & *goodPointsForAngle*) [protected]

Find the points for determining the angle of the polygon.


Parameters

<i>polygonConvex-Hull</i>	Convex hull of polygon
<i>boundingRectCentre</i>	Centre of the rotated rectangle enclosing the polygon convex hull
<i>closestPoint</i>	Closest point to the origin from the set of points defining the polygon
<i>goodPointsForAngle</i>	The points which are relevant for computing the angle

Definition at line 132 of file Detector.cpp.

References multiscale::Geometry2D::orthogonalLineToAnotherLineEdgePoints().

Here is the call graph for this function:



7.14.3.13 void Detector::initialise () [protected]

Initialisation function for the class.

Definition at line 44 of file Detector.cpp.

7.14.3.14 virtual void multiscale::analysis::Detector::initialiseDetectorSpecificFields () [protected], [pure virtual]

Initialisation of the detector specific values.

Implemented in [multiscale::analysis::RegionDetector](#), and [multiscale::analysis::ClusterDetector](#).

7.14.3.15 void Detector::initialiseDetectorSpecificFieldsIfNotSet () [protected]

Initialisation of the detector specific values in case they were not set.

Definition at line 49 of file Detector.cpp.

7.14.3.16 `virtual void multiscale::analysis::Detector::initialiseDetectorSpecificImageDependentFields()` [protected],
 [pure virtual]

Initialisation of the detector specific image dependent values.

Implemented in [multiscale::analysis::RegionDetector](#), and [multiscale::analysis::SimulationClusterDetector](#).

7.14.3.17 `void Detector::initialiseImageDependentFields()` [protected]

Initialisation of the image dependent values.

Definition at line 61 of file `Detector.cpp`.

7.14.3.18 `void Detector::initialiseImageOrigin()` [protected]

Definition at line 66 of file `Detector.cpp`.

7.14.3.19 `bool Detector::isValidInputImage(const Mat & inputImage)` [protected]

Check if the image is valid.

Check if the number of dimensions = 2, if the number of rows and number of columns is greater than one and if the image is of type `CV_8UC1`

Parameters

<code><i>inputImage</i></code>	The input image
--------------------------------	-----------------

Definition at line 73 of file `Detector.cpp`.

7.14.3.20 `void Detector::minAreaRectCentre(const vector< Point > & polygon, Point & centre)` [protected]

Get the centre of the minimum area bounding rectangle.

Parameters

<code><i>polygon</i></code>	The polygon
<code><i>centre</i></code>	The centre of the bounding rectangle

Definition at line 126 of file `Detector.cpp`.

7.14.3.21 `void Detector::outputResults(const string & outputFilepath)`

Output the results to the given file.


Parameters

<code><i>outputFilepath</i></code>	Path to the output file
------------------------------------	-------------------------

Definition at line 34 of file `Detector.cpp`.

Referenced by `main()`.

Here is the caller graph for this function:



7.14.3.22 void Detector::outputResultsToCsvFile () [protected]

Output the results to a file.

Definition at line 175 of file Detector.cpp.

References MS_throw.

7.14.3.23 virtual void multiscale::analysis::Detector::outputResultsToCsvFile (ostream & *fout*) [protected], [pure virtual]

Output the results to a file using the provided output file stream.

Parameters

<i>fout</i>	Output file stream
-------------	--------------------

Implemented in [multiscale::analysis::RegionDetector](#), and [multiscale::analysis::ClusterDetector](#).

7.14.3.24 void Detector::outputResultsToFile () [protected]

Output the results to file(s)

Definition at line 162 of file Detector.cpp.

7.14.3.25 virtual void multiscale::analysis::Detector::outputResultsToImage () [protected], [pure virtual]

Output the results to an image.

Implemented in [multiscale::analysis::RegionDetector](#), and [multiscale::analysis::SimulationClusterDetector](#).

7.14.3.26 double Detector::polygonAngle (const vector< Point > & *polygon*, unsigned int *closestPointIndex*) [protected]

Compute the angle of the polygon.

Compute the angle determined by the closest point to the origin and the points P1 and P2. These points are obtained from the intersection of the polygon with the line which is orthogonal to the line AB where:

- Point A is the polygon point closest to the origin;
- Point B is the centre point of the bounding rotated rectangle.


Parameters

<i>polygon</i>	Given polygon
<i>closestPoint-Index</i>	Index of the closest point to the origin from the set of points defining the polygon

Definition at line 107 of file Detector.cpp.

Referenced by multiscale::analysis::RegionDetector::createRegionFromPolygon(), and multiscale::analysis::ClusterDetector::updateClusterOriginDependentValues().

Here is the caller graph for this function:



7.14.3.27 double Detector::polygonAngle (const vector< Point > & *polygonConvexHull*, const Point & *closestPoint*) [protected]

Compute the angle of the polygon.

Compute the angle determined by the closest point to the origin and the points P1 and P2. These points are obtained from the intersection of the convex hull with the line AB, determined by points A and B. Points A and B are the middle points of the sides of the rotated rectangle enclosing the polygon that are orthogonal to the line which is the nearest to the closestPoint.


Parameters

<i>polygonConvex-Hull</i>	Convex hull of polygon
<i>closestPoint</i>	Closest point to the origin from the set of points defining the polygon

Definition at line 115 of file Detector.cpp.

References multiscale::Geometry2D::angleBtwPoints().

Here is the call graph for this function:



7.14.3.28 void Detector::printOutputErrorMessage () [protected]

Print error message, because the detect method was not called before calling the output method.

Definition at line 208 of file Detector.cpp.

7.14.3.29 `virtual void multiscale::analysis::Detector::processImageAndDetect() [protected], [pure virtual]`

Process the input image and detect objects/entities of interest.

Implemented in `multiscale::analysis::RegionDetector`, and `multiscale::analysis::ClusterDetector`.

7.14.3.30 `void Detector::processPressedKeyRequest(char & pressedKey) [protected]`

Process the request of the user by pressing the key.

Parameters

<code>pressedKey</code>	Key pressed by the user, if a key was pressed, or "-1", otherwise
-------------------------	---

Definition at line 197 of file `Detector.cpp`.


7.14.3.31 `void Detector::setDetectorSpecificFieldsInitialisationFlag(bool flag = true) [protected]`

Set the detector specific fields initialisation flag to true.

Definition at line 57 of file `Detector.cpp`.

Referenced by `multiscale::analysis::RegionDetector::setAlpha()`, `multiscale::analysis::RegionDetector::setBeta()`, `multiscale::analysis::RegionDetector::setBlurKernelSize()`, `multiscale::analysis::ClusterDetector::setEps()`, `multiscale::analysis::RegionDetector::setEpsilon()`, `multiscale::analysis::ClusterDetector::setMinPoints()`, `multiscale::analysis::RegionDetector::setMorphologicalCloseIterations()`, `multiscale::analysis::RegionDetector::setOriginXCoordinate()`, `multiscale::analysis::RegionDetector::setOriginYCoordinate()`, `multiscale::analysis::RegionDetector::setRegionAreaThresh()`, and `multiscale::analysis::RegionDetector::setThresholdValue()`.

Here is the caller graph for this function:

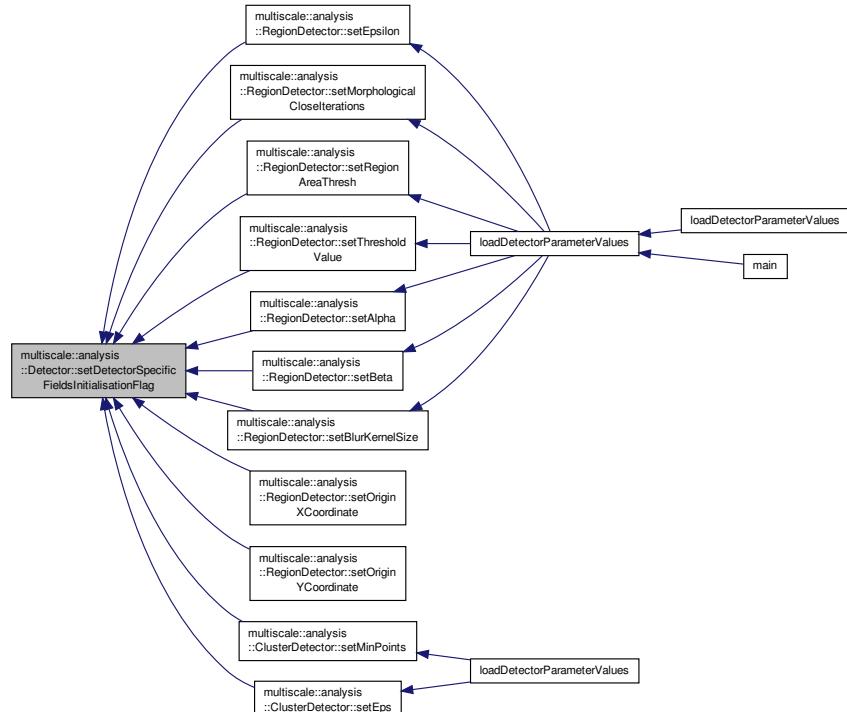

7.14.3.32 void Detector::storeOutputImageOnDisk() [protected]

Store the image with the output results on disk.

Definition at line 169 of file Detector.cpp.

7.14.4 Member Data Documentation

7.14.4.1 bool multiscale::analysis::Detector::debugMode [protected]

Flag for indicating if debug mode is set

Definition at line 24 of file Detector.hpp.

7.14.4.2 bool multiscale::analysis::Detector::detectMethodCalled [protected]

Flag for indicating if the detect method was called

Definition at line 28 of file Detector.hpp.

7.14.4.3 bool multiscale::analysis::Detector::detectorSpecificFieldsInitialised [protected]

Flag for indicating if the parameters were

Definition at line 29 of file Detector.hpp.

7.14.4.4 const string Detector::ERR_INVALID_IMAGE = "The input image is invalid." [static], [protected]

Definition at line 200 of file Detector.hpp.

7.14.4.5 const string Detector::ERR_OUTPUT_FILE = "Unable to create output file." [static], [protected]

Definition at line 199 of file Detector.hpp.

7.14.4.6 const string Detector::ERR_OUTPUT_WITHOUT_DETECT = "Unable to output results if the detect method was not called previously." [static], [protected]

Definition at line 198 of file Detector.hpp.

7.14.4.7 Mat multiscale::analysis::Detector::image [protected]

Input image

Definition at line 22 of file Detector.hpp.

Referenced by multiscale::analysis::RegionDetector::changeContrastAndBrightness(), multiscale::analysis::SimulationClusterDetector::computePileUpDegreeAtPosition(), multiscale::analysis::SimulationClusterDetector::initialiseDetectorSpecificImageDependentFields(), multiscale::analysis::SimulationClusterDetector::initialiseThresholdedImage(), multiscale::analysis::SimulationClusterDetector::outputResultsToImage(), multiscale::analysis::RegionDetector::outputResultsToImage(), multiscale::analysis::RegionDetector::regionArea(), multiscale::analysis::RegionDetector::regionClusterednessDegree(), and multiscale::analysis::RegionDetector::regionDensity().

7.14.4.8 `const string Detector::IMG_EXTENSION = ".png" [static], [protected]`

Definition at line 203 of file Detector.hpp.

7.14.4.9 `const int Detector::KEY_ESC = 27 [static], [protected]`

Definition at line 207 of file Detector.hpp.

7.14.4.10 `const int Detector::KEY_SAVE = 115 [static], [protected]`

Definition at line 208 of file Detector.hpp.

7.14.4.11 `Point multiscale::analysis::Detector::origin [protected]`

The point representing the origin

Definition at line 31 of file Detector.hpp.

Referenced by multiscale::analysis::RegionDetector::createRegionFromPolygon(), multiscale::analysis::RegionDetector::getOriginXCoordinate(), multiscale::analysis::RegionDetector::getOriginYCoordinate(), multiscale::analysis::RegionDetector::setOriginXCoordinate(), multiscale::analysis::RegionDetector::setOriginYCoordinate(), and multiscale::analysis::ClusterDetector::updateClusterOriginDependentValues().

7.14.4.12 `const string Detector::OUTPUT_EXTENSION = ".out" [static], [protected]`

Definition at line 202 of file Detector.hpp.

7.14.4.13 `string multiscale::analysis::Detector::outputFilepath [protected]`

Path of the output file

Definition at line 23 of file Detector.hpp.

7.14.4.14 `Mat multiscale::analysis::Detector::outputImage [protected]`

Image for displaying the results

Definition at line 26 of file Detector.hpp.

Referenced by multiscale::analysis::SimulationClusterDetector::outputResultsToImage(), and multiscale::analysis::RegionDetector::outputResultsToImage().

7.14.4.15 `const string Detector::WIN_OUTPUT_IMAGE = "Output image" [static], [protected]`

Definition at line 205 of file Detector.hpp.

Referenced by multiscale::analysis::ClusterDetector::createDetectorSpecificTrackbars(), and multiscale::analysis::RegionDetector::createDetectorSpecificTrackbars().

The documentation for this class was generated from the following files:


- [modules/analysis/spatial/include/multiscale/analysis/spatial/Detector.hpp](#)
- [modules/analysis/spatial/src/Detector.cpp](#)

7.15 multiscale::DetectorException Class Reference


Exception class for the Detector class.

```
#include <DetectorException.hpp>
```

Inheritance diagram for multiscale::DetectorException:

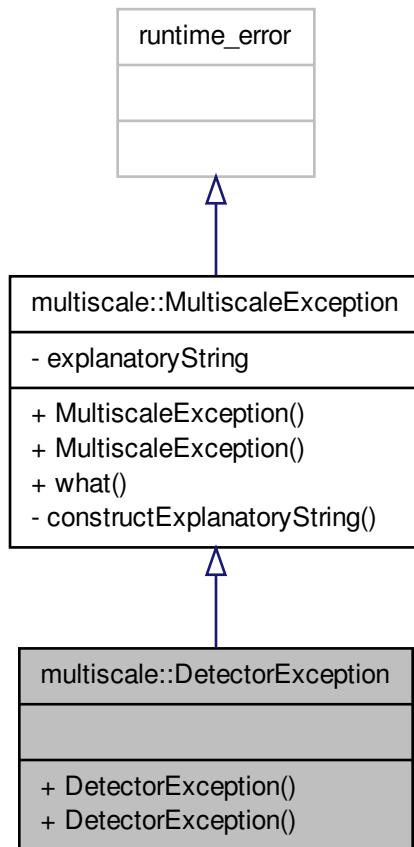

Collaboration diagram for multiscale::DetectorException:

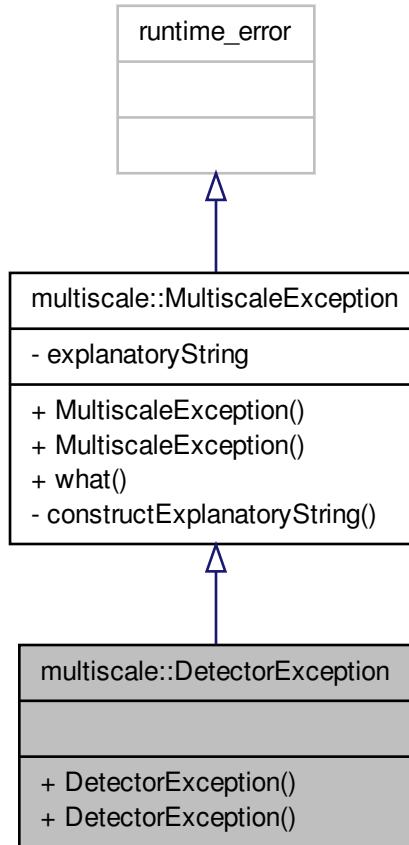

Public Member Functions

- [DetectorException \(const string &file, int line, const string &msg\)](#)
- [DetectorException \(const string &file, int line, const char *msg\)](#)

7.15.1 Detailed Description

Exception class for the Detector class.

Definition at line 14 of file `DetectorException.hpp`.

7.15.2 Constructor & Destructor Documentation

7.15.2.1 multiscale::DetectorException::DetectorException (const string & file, int line, const string & msg) [inline]

Definition at line 18 of file `DetectorException.hpp`.

7.15.2.2 `multiscale::DetectorException::DetectorException (const string & file, int line, const char * msg) [inline]`

Definition at line 20 of file `DetectorException.hpp`.

The documentation for this class was generated from the following file:


- `include/multiscale/exception/DetectorException.hpp`

7.16 multiscale::analysis::Entity Class Reference


Class for representing an entity in an image (e.g. cell, organism etc.)

```
#include <Entity.hpp>
```

Inheritance diagram for multiscale::analysis::Entity:

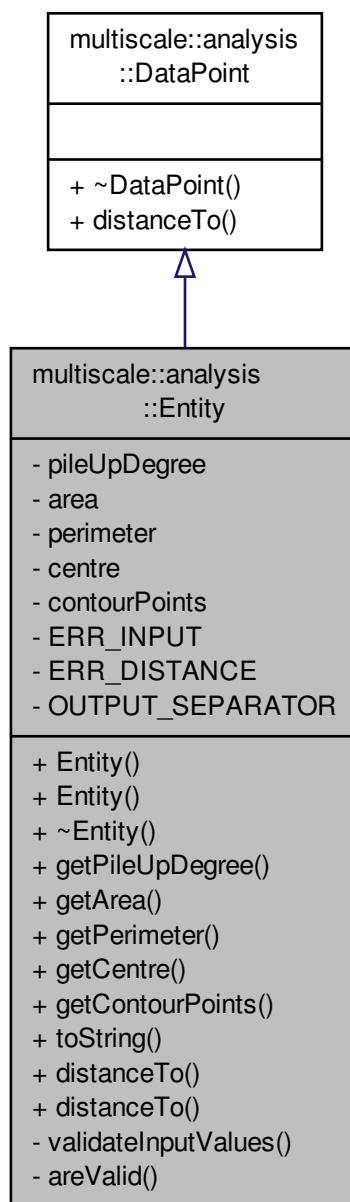

Collaboration diagram for multiscale::analysis::Entity:

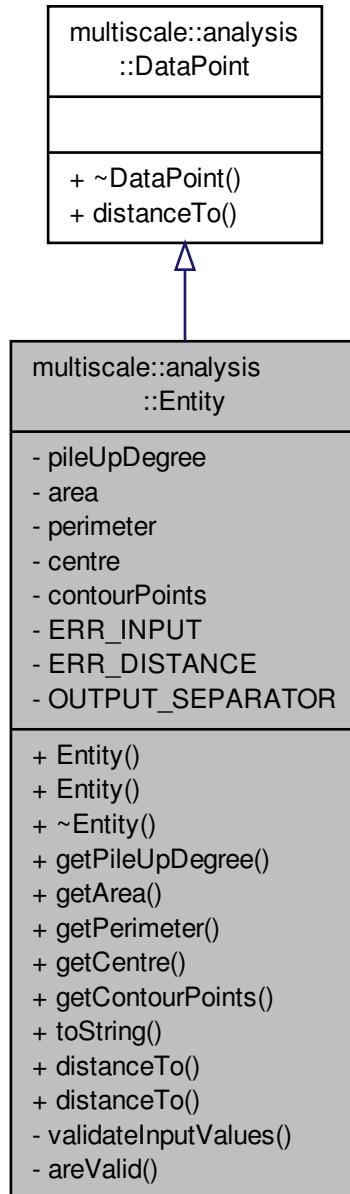

Public Member Functions

- `Entity` (unsigned int `pileUpDegree`, double `area`, double `perimeter`, const `Point2f` &`centre`, const `vector<Point2f>` &`contourPoints`)
- `Entity` (const `Entity` &`entity`)
- `~Entity` ()
- unsigned int `getPileUpDegree` () const
 - Get the degree of pile up.*
- double `getArea` () const

- `Get the area.`
• `double getPerimeter () const`
Get the perimeter.
- `Point2f getCentre () const`
Get the point defining the centre of the entity.
- `vector< Point2f > getContourPoints () const`
Get the set of points defining the contour of the entity.
- `string toString ()`
Get a string representation of all the field values.
- `double distanceTo (shared_ptr< DataPoint > point) override`
Get the distance between this entity and another one.
- `double distanceTo (const Entity &entity)`
Get the distance between this entity and another one.

Private Member Functions

- `void validateInputValues (unsigned int pileUpDegree, double area, double perimeter, const Point2f ¢re, const vector< Point2f > &contourPoints)`
- `bool areValid (unsigned int pileUpDegree, double area, double perimeter, const Point2f ¢re, const vector< Point2f > &contourPoints)`

Check if the provided degree of pile up, area, centre and contour points are valid.

Private Attributes

- `unsigned int pileUpDegree`
- `double area`
- `double perimeter`
- `Point2f centre`
- `vector< Point2f > contourPoints`

Static Private Attributes

- `static const string ERR_INPUT = "Invalid input parameters were provided to the constructor."`
- `static const string ERR_DISTANCE = "The distance to an object of a different type cannot be computed."`
- `static const string OUTPUT_SEPARATOR = ","`

7.16.1 Detailed Description

Class for representing an entity in an image (e.g. cell, organism etc.)

Definition at line 19 of file Entity.hpp.


7.16.2 Constructor & Destructor Documentation

7.16.2.1 Entity::Entity (`unsigned int pileUpDegree, double area, double perimeter, const Point2f & centre, const vector< Point2f > & contourPoints`)

Definition at line 9 of file Entity.cpp.

References area, centre, contourPoints, perimeter, pileUpDegree, and validateInputValues().

Here is the call graph for this function:




7.16.2.2 Entity::Entity (const Entity & entity)

Definition at line 19 of file Entity.cpp.

References area, centre, contourPoints, perimeter, pileUpDegree, and validateInputValues().

Here is the call graph for this function:



7.16.2.3 Entity::~Entity ()

Definition at line 29 of file Entity.cpp.

7.16.3 Member Function Documentation

7.16.3.1 bool Entity::isValid (unsigned int pileUpDegree, double area, double perimeter, const Point2f & centre, const vector< Point2f > & contourPoints) [private]

Check if the provided degree of pile up, area, centre and contour points are valid.

Parameters


<i>pileUpDegree</i>	Degree of pile up
<i>area</i>	Area
<i>perimeter</i>	Perimeter
<i>centre</i>	Centre of the entity
<i>contourPoints</i>	Points defining the contour of the entity

Definition at line 74 of file Entity.cpp.


References multiscale::Numeric::greaterOrEqual().

Referenced by validateInputValues().

Here is the call graph for this function:



Here is the caller graph for this function:



7.16.3.2 double Entity::distanceTo (shared_ptr< DataPoint > point) [override], [virtual]


Get the distance between this entity and another one.

Implements [multiscale::analysis::DataPoint](#).

Definition at line 57 of file Entity.cpp.

References centre, and [multiscale::Geometry2D::distanceBtwPoints\(\)](#).

Here is the call graph for this function:




7.16.3.3 double Entity::distanceTo (const Entity & entity)

Get the distance between this entity and another one.

Definition at line 63 of file Entity.cpp.

References centre, and [multiscale::Geometry2D::distanceBtwPoints\(\)](#).

Here is the call graph for this function:



7.16.3.4 double Entity::getArea () const

Get the area.

Definition at line 35 of file Entity.cpp.

References area.

7.16.3.5 Point2f Entity::getCentre () const

Get the point defining the centre of the entity.

Definition at line 43 of file Entity.cpp.

References centre.

7.16.3.6 vector< Point2f > Entity::getContourPoints () const

Get the set of points defining the contour of the entity.

Definition at line 47 of file Entity.cpp.

References contourPoints.

7.16.3.7 double Entity::getPerimeter () const

Get the perimeter.

Definition at line 39 of file Entity.cpp.

References perimeter.

7.16.3.8 unsigned int Entity::getPileUpDegree () const

Get the degree of pile up.

Definition at line 31 of file Entity.cpp.

References pileUpDegree.

7.16.3.9 string Entity::toString ()

Get a string representation of all the field values.

Definition at line 51 of file Entity.cpp.

References centre, OUTPUT_SEPARATOR, and pileUpDegree.

7.16.3.10 void Entity::validateInputValues (unsigned int *pileUpDegree*, double *area*, double *perimeter*, const Point2f & *centre*, const vector< Point2f > & *contourPoints*) [private]

Parameters


<i>pileUpDegree</i>	Degree of pile up
<i>area</i>	Area
<i>perimeter</i>	Perimeter
<i>centre</i>	Centre of the entity
<i>contourPoints</i>	Points defining the contour of the entity

Definition at line 67 of file Entity.cpp.


References `isValid()`, `ERR_INPUT`, and `MS_throw`.

Referenced by `Entity()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.16.4 Member Data Documentation

7.16.4.1 double multiscale::analysis::Entity::area [private]

Area of the entity

Definition at line 24 of file `Entity.hpp`.

Referenced by `Entity()`, and `getArea()`.

7.16.4.2 Point2f multiscale::analysis::Entity::centre [private]

Point defining the centre of the entity

Definition at line 27 of file `Entity.hpp`.

Referenced by `distanceTo()`, `Entity()`, `getCentre()`, and `toString()`.

7.16.4.3 vector<Point2f> multiscale::analysis::Entity::contourPoints [private]

Set of points defining the contour of the entity

Definition at line 28 of file `Entity.hpp`.

Referenced by `Entity()`, and `getContourPoints()`.

7.16.4.4 const string Entity::ERR_DISTANCE = "The distance to an object of a different type cannot be computed." [static], [private]

Definition at line 89 of file `Entity.hpp`.

7.16.4.5 `const string Entity::ERR_INPUT = "Invalid input parameters were provided to the constructor." [static], [private]`

Definition at line 88 of file Entity.hpp.

Referenced by validateInputValues().

7.16.4.6 `const string Entity::OUTPUT_SEPARATOR = "" [static], [private]`

Definition at line 91 of file Entity.hpp.

Referenced by toString().

7.16.4.7 `double multiscale::analysis::Entity::perimeter [private]`

Perimeter of the entity

Definition at line 25 of file Entity.hpp.

Referenced by Entity(), and getPerimeter().

7.16.4.8 `unsigned int multiscale::analysis::Entity::pileUpDegree [private]`

Degree of pile up (relevant only if entities can pile up onto each other)

Definition at line 23 of file Entity.hpp.

Referenced by Entity(), getPileUpDegree(), and toString().

The documentation for this class was generated from the following files:


- [modules/analysis/spatial/include/multiscale/analysis/spatial/Entity.hpp](#)
- [modules/analysis/spatial/src/Entity.cpp](#)

7.17 multiscale::EntityException Class Reference


Exception class for the Entity instances.

```
#include <EntityException.hpp>
```

Inheritance diagram for multiscale::EntityException:

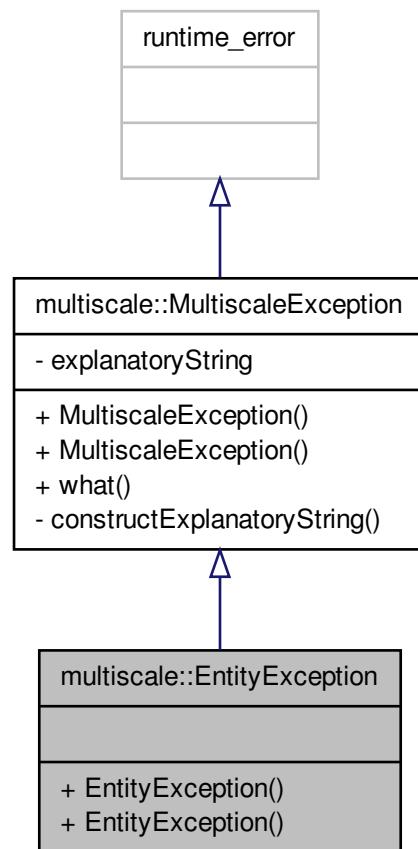

Collaboration diagram for multiscale::EntityException:

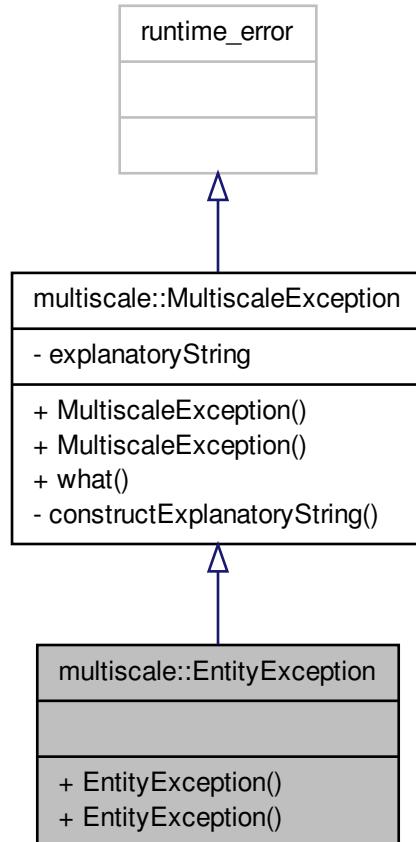

Public Member Functions

- [EntityException](#) (const string &file, int line, const string &msg)
- [EntityException](#) (const string &file, int line, const char *msg)

7.17.1 Detailed Description

Exception class for the Entity instances.

Definition at line 14 of file EntityException.hpp.

7.17.2 Constructor & Destructor Documentation

7.17.2.1 multiscale::EntityException::EntityException (const string & file, int line, const string & msg) [inline]

Definition at line 18 of file EntityException.hpp.

7.17.2.2 `multiscale::EntityException::EntityException (const string & file, int line, const char * msg) [inline]`


Definition at line 20 of file EntityException.hpp.

The documentation for this class was generated from the following file:


- [include/multiscale/exception/EntityException.hpp](#)

7.18 EuclideanDataPoint Class Reference

Inheritance diagram for EuclideanDataPoint:

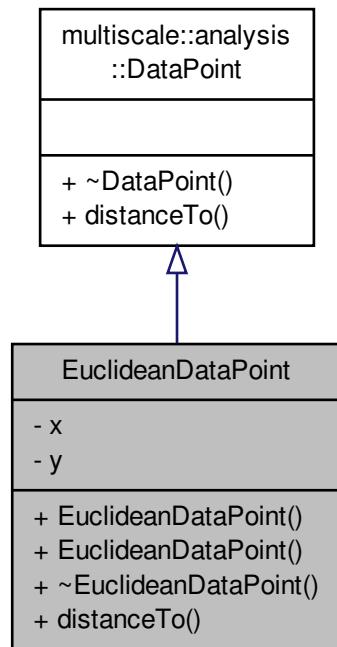

Collaboration diagram for EuclideanDataPoint:

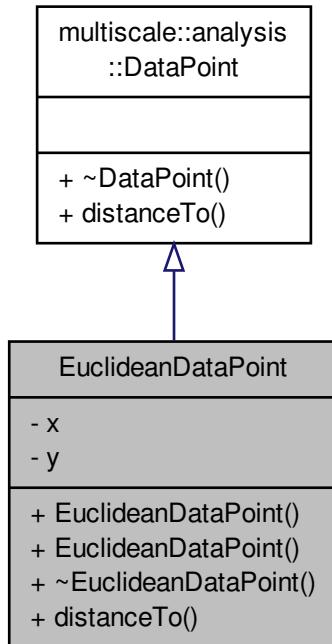

Public Member Functions

- `EuclideanDataPoint (double x, double y)`
- `EuclideanDataPoint (const EuclideanDataPoint &point)`
- `~EuclideanDataPoint ()`
- `double distanceTo (shared_ptr< DataPoint > point) override`

Compute the distance between this data point and another one.

Private Attributes

- `double x`
- `double y`

7.18.1 Detailed Description

Definition at line 16 of file DBSCANTest.cpp.

7.18.2 Constructor & Destructor Documentation

7.18.2.1 EuclideanDataPoint::EuclideanDataPoint (double x, double y) [inline]

Definition at line 23 of file DBSCANTest.cpp.

7.18.2.2 `EuclideanDataPoint::EuclideanDataPoint (const EuclideanDataPoint & point)` [inline]

Definition at line 24 of file DBSCANTest.cpp.

7.18.2.3 `EuclideanDataPoint::~EuclideanDataPoint ()` [inline]

Definition at line 25 of file DBSCANTest.cpp.

7.18.3 Member Function Documentation

7.18.3.1 `double EuclideanDataPoint::distanceTo (shared_ptr< DataPoint > point)` [inline], [override], [virtual]

Compute the distance between this data point and another one.

Parameters

<code>point</code>	Data point to which the distance is measured
--------------------	--

Implements [multiscale::analysis::DataPoint](#).

Definition at line 27 of file DBSCANTest.cpp.

7.18.4 Member Data Documentation

7.18.4.1 `double EuclideanDataPoint::x` [private]

Definition at line 19 of file DBSCANTest.cpp.

7.18.4.2 `double EuclideanDataPoint::y` [private]

Definition at line 20 of file DBSCANTest.cpp.

The documentation for this class was generated from the following file:


- [modules/analysis/spatial/test/DBSCANTest.cpp](#)

7.19 multiscale::ExceptionHandler Class Reference

Exception handler class.

```
#include <ExceptionHandler.hpp>
```

Collaboration diagram for multiscale::ExceptionHandler:

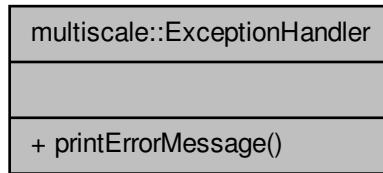

Static Public Member Functions

- static void [printErrorMessage](#) (const exception &ex)
Print the error message.

7.19.1 Detailed Description

Exception handler class.

Definition at line 15 of file `ExceptionHandler.hpp`.

7.19.2 Member Function Documentation

7.19.2.1 static void multiscale::ExceptionHandler::printErrorMessage (const exception & ex) [inline], [static]

Print the error message.

The error message is printed using the `ex.what()` method

Parameters

ex	Exception
----	-----------

Definition at line 24 of file `ExceptionHandler.hpp`.

References `multiscale::ERR_MSG`.

The documentation for this class was generated from the following file:

- [include/multiscale/exception/ExceptionHandler.hpp](#)

7.20 multiscale::Geometry2D Class Reference

Two-dimensional geometric operations.

```
#include <Geometry2D.hpp>
```

Collaboration diagram for multiscale::Geometry2D:

multiscale::Geometry2D
+ PI
+ MATRIX_START_INDEX
+ isBetweenCoordinates() + angleOfLineWrtOxAxis() + isAngleBetween() + isOppositeAngleBetween() + isAngleBetweenNonReflex() + isOppositeAngleBetweenNonReflex() + oppositeAngle() + slopeOfLine() + distanceBtwPoints() + distanceFromPointToLine() + middlePoint() + orthogonalLineToAnotherLine EdgePoints() + areOnTheSameSideOfLine() + lineEquationDeterminedBy Points() + areIdenticalLines() + areIdenticalLines() + lineIntersection() + lineIntersection() + lineIntersection() + lineSegmentIntersection() + lineCircleIntersection() + lineSegmentCircleIntersection() + angleBtwPoints() + findPointsOnEdge() + minimumDistancePointIndex() + areaOfTriangle() + isPointOnLineSegment() + areEqualPoints() + areCollinear() - isPointOnEdge() - isBetweenCoordinates() - translate() - inverseTranslate() - lineCircleTwoIntersection Points() - lineCircleOneIntersection Point()

Public Member Functions

- template<typename T , typename U >
bool **isBetweenCoordinates** (T c, U c1, U c2)

Static Public Member Functions

- static double `angleOfLineWrtOxAxis` (const `Point2f` &`a`, const `Point2f` &`b`)
Get the angle of the line measured from the Ox axis in counterclockwise direction.
- static bool `isAngleBetween` (double `angle1`, double `angle2`, double `angle3`)
Check if angle1 lies between angles 2 and 3.
- static bool `isOppositeAngleBetween` (double `angle1`, double `angle2`, double `angle3`)
Check if the opposite of angle1, ((angle1 + 180) % 360), lies between angles 2 and 3.
- static bool `isAngleBetweenNonReflex` (double `angle1`, double `angle2`, double `angle3`)
Check if angle1 lies between non reflex angle determined by angles 2 and 3.
- static bool `isOppositeAngleBetweenNonReflex` (double `angle1`, double `angle2`, double `angle3`)
Check if the opposite of angle1, ((angle1 + 180) % 360), lies between non reflex angle determined by angles 2 and 3.
- static double `oppositeAngle` (double `angle`)
Return the angle opposite to the given angle.
- static bool `slopeOfLine` (const `Point2f` &`a`, const `Point2f` &`b`, double &`slope`)
Compute the slope of the line defined by points "a" and "b".
- static double `distanceBtwPoints` (const `Point2f` &`a`, const `Point2f` &`b`)
Compute the distance between two points.
- static double `distanceFromPointToLine` (const `Point2f` &`a`, const `Point2f` &`linePointB`, const `Point2f` &`linePointC`)
Compute the distance from a point "a" to a line specified by two points "B" and "C".
- static `Point2f` `middlePoint` (const `Point2f` &`a`, const `Point2f` &`b`)
Get the point in the middle of the segment determined by points "a" and "b".
- static void `orthogonalLineToAnotherLineEdgePoints` (const `Point` &`a1`, const `Point` &`b1`, `Point` &`a2`, `Point` &`b2`, int `nrOfRows`, int `nrOfCols`)
Find the points which are on the edge and on the line orthogonal to the line defined by 2 given points.
- static bool `areOnTheSameSideOfLine` (const `Point2f` &`p1`, const `Point2f` &`p2`, const `Point2f` &`a`, const `Point2f` &`b`)
Check if p1 and p2 are on the same side of the line determined by points a and b.
- static void `lineEquationDeterminedByPoints` (const `Point2f` &`p`, const `Point2f` &`q`, double &`a`, double &`b`, double &`c`)
Get the values of "a", "b" and "c" of the line equation $ax + by + c = 0$ knowing that point "p" and "q" are on the line.
- static bool `areIdenticalLines` (double `a1`, double `b1`, double `c1`, double `a2`, double `b2`, double `c2`)
Check if two lines are identical.
- static bool `areIdenticalLines` (const `Point2f` &`a1`, const `Point2f` &`b1`, const `Point2f` &`a2`, const `Point2f` &`b2`)
Check if two lines are identical.
- static bool `lineIntersection` (const `Point2f` &`a1`, const `Point2f` &`b1`, const `Point2f` &`a2`, const `Point2f` &`b2`, `Point2f` &`intersection`)
Determine the intersection point of two lines, if this point exists.
- static bool `lineIntersection` (const `Point` &`a1`, const `Point` &`b1`, const `Point` &`a2`, const `Point` &`b2`, `Point` &`intersection`)
Determine the intersection point of two lines, if this point exists.
- static bool `lineIntersection` (double `a1`, double `b1`, double `c1`, double `a2`, double `b2`, double `c2`, `Point2f` &`intersection`)
Determine the intersection point of two lines, if this point exists.
- static bool `lineSegmentIntersection` (const `Point` &`a1`, const `Point` &`b1`, const `Point` &`a2`, const `Point` &`b2`, `Point` &`intersection`)
Determine the intersection point of two line segments, if this point exists.
- static bool `lineCircleIntersection` (`Point2f` `a`, `Point2f` `b`, const `Point2f` &`circleOrigin`, double `radius`, `vector<Point2f>` &`intersectionPoints`)
Determine if a line and a circle intersect and return the intersection points if they exist.

- static bool `lineSegmentCircleIntersection` (const `Point2f &a`, const `Point2f &b`, const `Point2f &circleOrigin`, double `radius`, `vector< Point2f > &intersectionPoints`)

Determine if a line segment and a circle intersect and return the intersection points if they exist.
- static double `angleBtwPoints` (const `Point2f &a`, const `Point2f &b`, const `Point2f &c`)

Compute the angle between three points.
- static `vector< Point2f > findPointsOnEdge` (const `vector< Point2f > &points`, unsigned int `nrOfRows`, unsigned int `nrOfCols`)

Find the subset of points from the given set of points which lie on the edge.
- static unsigned int `minimumDistancePointIndex` (const `vector< Point > &points`, const `Point2f &origin`)

Get the index of the point which is the closest to the origin.
- static double `areaOfTriangle` (const `Point2f &a`, const `Point2f &b`, const `Point2f &c`)

Compute the area of a triangle defined by three points.
- static bool `isPointOnLineSegment` (const `Point2f &point`, const `Point2f &lineSegmentStart`, const `Point2f &lineSegmentEnd`)

Check if one point lies between two other points.
- static bool `areEqualPoints` (const `Point2f &point1`, const `Point2f &point2`)

Check if points point1 and point2 are equal or not.
- static bool `areCollinear` (const `Point2f &point1`, const `Point2f &point2`, const `Point2f &point3`)

Check if the three points are collinear.

Static Public Attributes

- static const double `PI` = 3.14159265358979323846264338327950288419716939937510
- static const int `MATRIX_START_INDEX` = 1

Static Private Member Functions

- static bool `isPointOnEdge` (const `Point2f &p`, int `nrOfRows`, int `nrOfCols`)

Check if the given point is on the edge.
- template<typename T, typename U>
static bool `isBetweenCoordinates` (T `c`, U `c1`, U `c2`)

Check if the coordinate c lies between c1 and c2.
- static void `translate` (`Point2f &point`, const `Point2f &translation`)

Translate a point by the given values.
- static void `inverseTranslate` (`Point2f &point`, const `Point2f &translation`)

Inverse translate a point by the given values.
- static void `lineCircleTwoIntersectionPoints` (const `Point2f &circleOrigin`, double `A`, double `B`, double `C`, double `delta`, `vector< Point2f > &intersectionPoints`)

Treat the case when the line and circle intersect in two points.
- static void `lineCircleOneIntersectionPoint` (const `Point2f &circleOrigin`, double `A`, double `B`, double `C`, double `delta`, `vector< Point2f > &intersectionPoints`)

Treat the case when the line and circle intersect in one point.

7.20.1 Detailed Description

Two-dimensional geometric operations.

Definition at line 16 of file `Geometry2D.hpp`.

7.20.2 Member Function Documentation

7.20.2.1 double Geometry2D::angleBtwPoints (const Point2f & a, const Point2f & b, const Point2f & c) [static]

Compute the angle between three points.

Compute the angle between the lines determined by points A, B and B, C

Parameters


<i>a</i>	Point2f a
<i>b</i>	Point2f b
<i>c</i>	Point2f c

Definition at line 307 of file Geometry2D.cpp.

References PI.

Referenced by multiscale::analysis::Detector::polygonAngle().

Here is the caller graph for this function:



7.20.2.2 double Geometry2D::angleOfLineWrtOxAxis (const Point2f & a, const Point2f & b) [static]

Get the angle of the line measured from the Ox axis in counterclockwise direction.

The line is specified by points "a" and "b". The value of the angle is expressed in degrees.

Parameters


<i>a</i>	Point2f a
<i>b</i>	Point2f b

Definition at line 9 of file Geometry2D.cpp.

References PI.

Referenced by multiscale::MinEnclosingTriangleFinder::intersects(), multiscale::MinEnclosingTriangleFinder::intersectsAbove(), and multiscale::MinEnclosingTriangleFinder::intersectsBelow().

Here is the caller graph for this function:

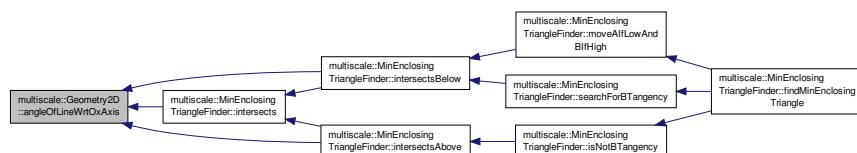

7.20.2.3 double Geometry2D::areaOfTriangle (const Point2f & a, const Point2f & b, const Point2f & c) [static]

Compute the area of a triangle defined by three points.

The area is computed using the determinant method. An example is presented at <http://demonstrations.-wolfram.com/TheAreaOfATriangleUsingADeterminant/> (Last access: 10.07.2013)


Parameters

a	Point2f a
b	Point2f b
c	Point2f c

Definition at line 352 of file Geometry2D.cpp.

Referenced by multiscale::MinEnclosingTriangleFinder::returnMinEnclosingTriangle(), and multiscale::MinEnclosingTriangleFinder::updateMinEnclosingTriangle().

Here is the caller graph for this function:



7.20.2.4 bool Geometry2D::areCollinear (const Point2f & point1, const Point2f & point2, const Point2f & point3) [static]

Check if the three points are collinear.


Parameters

point1	Point 1
point2	Point 2
point3	Point 3

Definition at line 374 of file Geometry2D.cpp.

References multiscale::Numeric::almostEqual().

Here is the call graph for this function:



7.20.2.5 bool Geometry2D::areEqualPoints (const Point2f & point1, const Point2f & point2) [static]

Check if points point1 and point2 are equal or not.

Parameters


<i>point1</i>	One point
<i>point2</i>	The other point

Definition at line 370 of file Geometry2D.cpp.


References multiscale::Numeric::almostEqual().

Referenced by multiscale::MinEnclosingTriangleFinder::isValidMinimalTriangle(), and lineEquationDeterminedByPoints().

Here is the call graph for this function:



Here is the caller graph for this function:

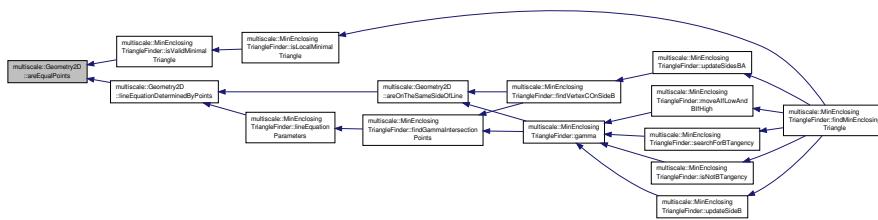

7.20.2.6 bool Geometry2D::areIdenticalLines (double *a1*, double *b1*, double *c1*, double *a2*, double *b2*, double *c2*) [static]

Check if two lines are identical.

Lines are be specified in the following form: $A_1x + B_1x = C_1$ $A_2x + B_2x = C_2$

If $(A_1/A_2) == (B_1/B_2) == (C_1/C_2)$, then the lines are identical else they are not

Parameters


<i>a1</i>	A1
<i>b1</i>	B1
<i>c1</i>	C1
<i>a2</i>	A2
<i>b2</i>	B2
<i>c2</i>	C2

Definition at line 161 of file Geometry2D.cpp.


References multiscale::Numeric::almostEqual().

Referenced by multiscale::MinEnclosingTriangleFinder::areIdenticalLines().

Here is the call graph for this function:



Here is the caller graph for this function:

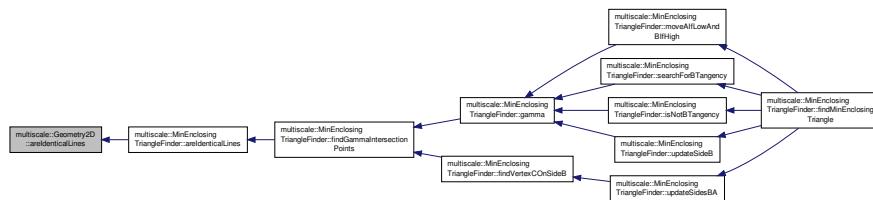

7.20.2.7 bool Geometry2D::areIdenticalLines (const Point2f & a1, const Point2f & b1, const Point2f & a2, const Point2f & b2) [static]

Check if two lines are identical.

The lines are specified by a pair of points each. If they are identical, then the function returns true, else it returns false.

Lines can be specified in the following form: $A_1x + B_1x = C_1$ $A_2x + B_2x = C_2$

If $(A_1/A_2) == (B_1/B_2) == (C_1/C_2)$, then the lines are identical else they are not


Parameters

<i>a1</i>	First point for determining the first line
<i>b1</i>	Second point for determining the first line
<i>a2</i>	First point for determining the second line
<i>b2</i>	Second point for determining the second line

Definition at line 172 of file Geometry2D.cpp.

References multiscale::Numeric::almostEqual().

Here is the call graph for this function:



7.20.2.8 `bool Geometry2D::areOnTheSameSideOfLine (const Point2f & p1, const Point2f & p2, const Point2f & a, const Point2f & b) [static]`

Check if p1 and p2 are on the same side of the line determined by points a and b.

Parameters


<i>p1</i>	Point p1
<i>p2</i>	Point p2
<i>a</i>	First point for determining line
<i>b</i>	Second point for determining line

Definition at line 141 of file Geometry2D.cpp.


References `lineEquationDeterminedByPoints()`, and `multiscale::Numeric::sign()`.

Referenced by `multiscale::MinEnclosingTriangleFinder::findVertexCOnSideB()`, and `multiscale::MinEnclosingTriangleFinder::gamma()`.

Here is the call graph for this function:



Here is the caller graph for this function:

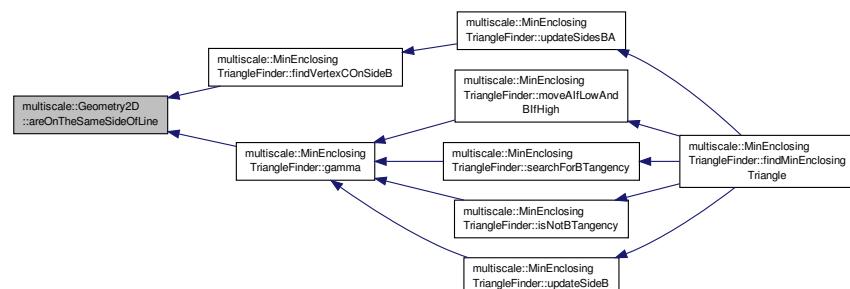

7.20.2.9 `double Geometry2D::distanceBtwPoints (const Point2f & a, const Point2f & b) [static]`

Compute the distance between two points.

Compute the Euclidean distance between two points

Parameters


<i>a</i>	Point2f a
<i>b</i>	Point2f b

Definition at line 69 of file Geometry2D.cpp.

Referenced by `multiscale::analysis::RegionDetector::computeAverageClusterednessDegree()`, `multiscale::analysis::Silhouette::computeAverageDissimilarityBtwEntityAndCluster()`, and `multiscale::analysis::Silhouette::compute-`

AverageDissimilarityWithinCluster(), multiscale::analysis::RegionDetector::createRegionFromPolygon(), multiscale::analysis::Entity::distanceTo(), isPointOnLineSegment(), minimumDistancePointIndex(), and multiscale::analysis::ClusterDetector::updateClusterOriginDependentValues().

Here is the caller graph for this function:

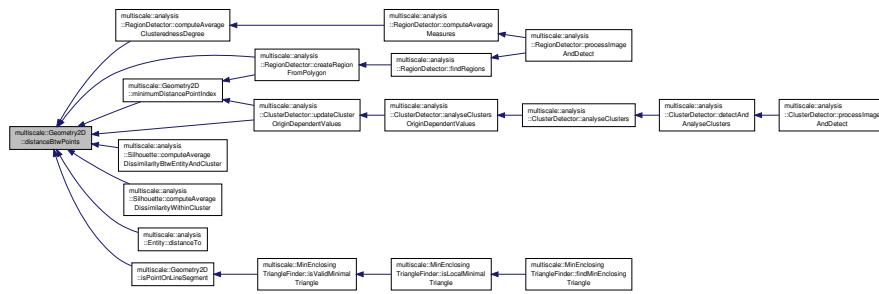

7.20.2.10 double Geometry2D::distanceFromPointToLine (const Point2f & a, const Point2f & linePointB, const Point2f & linePointC) [static]

Compute the distance from a point "a" to a line specified by two points "B" and "C".

Formula used:

$$| (x_c - x_b) * (y_b - y_a) - (x_b - x_a) * (y_c - y_b) |$$

$$d = \sqrt{((x_c - x_b)^2 + (y_c - y_b)^2)}$$

Reference: <http://mathworld.wolfram.com/Point-LineDistance2-Dimensional.html>


Parameters

a	Point2f from which the distance is measures
linePointB	One of the points determining the line
linePointC	One of the points determining the line

Definition at line 76 of file Geometry2D.cpp.

Referenced by multiscale::MinEnclosingTriangleFinder::height().

Here is the caller graph for this function:

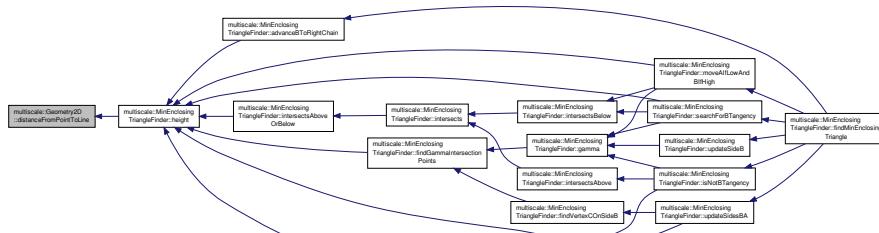

7.20.2.11 `vector< Point2f > Geometry2D::findPointsOnEdge (const vector< Point2f > & points, unsigned int nrOfRows, unsigned int nrOfCols) [static]`

Find the subset of points from the given set of points which lie on the edge.

A point "p" is considered to be on the edge if: $((p.x == 1) \&\& (p.y > 1) \&\& (p.y < \text{nrOfCols}))$ OR $((p.x == \text{nrOfRows}) \&\& (p.y > 1) \&\& (p.y < \text{nrOfCols}))$ OR $((p.y == 1) \&\& (p.x > 1) \&\& (p.x < \text{nrOfRows}))$ OR $((p.y == \text{nrOfCols}) \&\& (p.x > 1) \&\& (p.x < \text{nrOfRows}))$


Parameters

<i>points</i>	The set of points
<i>nrOfRows</i>	The number of rows
<i>nrOfCols</i>	The number of columns

Definition at line 319 of file Geometry2D.cpp.

References `isPointOnEdge()`.

Here is the call graph for this function:



7.20.2.12 `void Geometry2D::inverseTranslate (Point2f & point, const Point2f & translation) [static], [private]`

Inverse translate a point by the given values.


Parameters

<i>point</i>	The point
<i>translation</i>	Translation values

Definition at line 400 of file Geometry2D.cpp.

Referenced by `lineCircleOneIntersectionPoint()`, and `lineCircleTwoIntersectionPoints()`.

Here is the caller graph for this function:



7.20.2.13 bool Geometry2D::isAngleBetween (double angle1, double angle2, double angle3) [static]

Check if angle1 lies between angles 2 and 3.


Parameters

<i>angle1</i>	The angle which lies between angle2 and angle3 or not
<i>angle2</i>	One of the boundary angles
<i>angle3</i>	The other boundary angle

Definition at line 19 of file Geometry2D.cpp.

Referenced by isAngleBetweenNonReflex(), and isOppositeAngleBetween().

Here is the caller graph for this function:



7.20.2.14 bool Geometry2D::isAngleBetweenNonReflex (double angle1, double angle2, double angle3) [static]

Check if angle1 lies between non reflex angle determined by angles 2 and 3.

Parameters


<i>angle1</i>	The angle which lies between angle2 and angle3 or not
<i>angle2</i>	One of the boundary angles
<i>angle3</i>	The other boundary angle

Definition at line 33 of file Geometry2D.cpp.

References isAngleBetween(), and multiscale::Numeric::lessOrEqual().

Referenced by multiscale::MinEnclosingTriangleFinder::isFlushAngleBetweenPredecessorAndSuccessor(), multiscale::MinEnclosingTriangleFinder::isGammaAngleBetween(), and isOppositeAngleBetweenNonReflex().

Here is the call graph for this function:



Here is the caller graph for this function:



7.20.2.15 `template<typename T, typename U> bool multiscale::Geometry2D::isBetweenCoordinates (T c, U c1, U c2)`

Definition at line 391 of file Geometry2D.cpp.

7.20.2.16 `template<typename T, typename U> static bool multiscale::Geometry2D::isBetweenCoordinates (T c, U c1, U c2) [static], [private]`

Check if the coordinate c lies between c1 and c2.

Parameters

<code>c</code>	Coordinate c
<code>c1</code>	Coordinate c1
<code>c2</code>	Coordinate c2

7.20.2.17 `bool Geometry2D::isOppositeAngleBetween (double angle1, double angle2, double angle3) [static]`

Check if the opposite of angle1, ((angle1 + 180) % 360), lies between angles 2 and 3.


Parameters

<code>angle1</code>	The angle for which the opposite angle lies between angle2 and angle3 or not
<code>angle2</code>	One of the boundary angles
<code>angle3</code>	The other boundary angle

Definition at line 27 of file Geometry2D.cpp.

References `isAngleBetween()`, and `oppositeAngle()`.

Here is the call graph for this function:

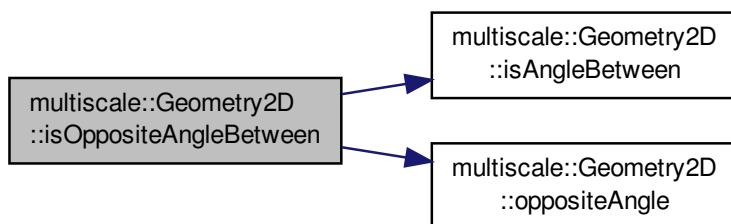

7.20.2.18 `bool Geometry2D::isOppositeAngleBetweenNonReflex (double angle1, double angle2, double angle3) [static]`

Check if the opposite of angle1, ((angle1 + 180) % 360), lies between non reflex angle determined by angles 2 and 3.

Parameters


<code>angle1</code>	The angle which lies between angle2 and angle3 or not
<code>angle2</code>	One of the boundary angles
<code>angle3</code>	The other boundary angle

Definition at line 45 of file Geometry2D.cpp.


References isAngleBetweenNonReflex(), and oppositeAngle().

Referenced by multiscale::MinEnclosingTriangleFinder::isFlushAngleBetweenPredecessorAndSuccessor().

Here is the call graph for this function:



Here is the caller graph for this function:



7.20.2.19 bool Geometry2D::isPointOnEdge (const Point2f & p, int nrOfRows, int nrOfCols) [static], [private]

Check if the given point is on the edge.

A point "p" is considered to be on the edge if: $((p.x == 1) \&\& (p.y > 1) \&\& (p.y < nrOfCols))$ OR $((p.x == nrOfRows) \&\& (p.y > 1) \&\& (p.y < nrOfCols))$ OR $((p.y == 1) \&\& (p.x > 1) \&\& (p.x < nrOfRows))$ OR $((p.y == nrOfCols) \&\& (p.x > 1) \&\& (p.x < nrOfRows))$

Parameters


<i>p</i>	Point2f p
<i>nrOfRows</i>	The number of rows
<i>nrOfCols</i>	The number of columns

Definition at line 381 of file Geometry2D.cpp.

References MATRIX_START_INDEX.

Referenced by findPointsOnEdge(), and orthogonalLineToAnotherLineEdgePoints().

Here is the caller graph for this function:

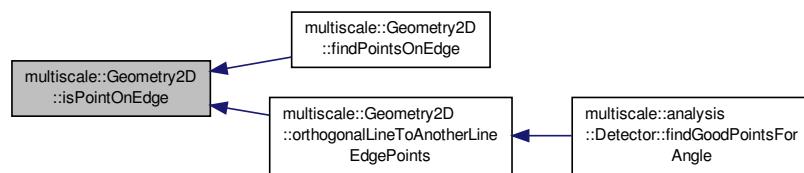

7.20.2.20 `bool Geometry2D::isPointOnLineSegment (const Point2f & point, const Point2f & lineSegmentStart, const Point2f & lineSegmentEnd) [static]`

Check if one point lies between two other points.

Parameters


<i>point</i>	Point lying possibly outside the line segment
<i>lineSegment- Start</i>	First point determining the line segment
<i>lineSegmentEnd</i>	Second point determining the line segment

Definition at line 361 of file Geometry2D.cpp.


References multiscale::Numeric::almostEqual(), and distanceBtwPoints().

Referenced by multiscale::MinEnclosingTriangleFinder::isValidMinimalTriangle().

Here is the call graph for this function:

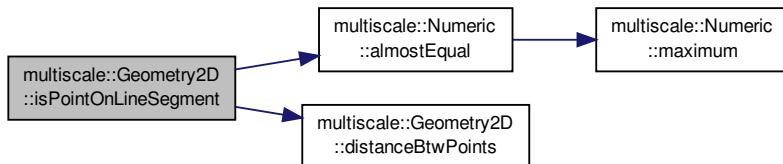

Here is the caller graph for this function:



7.20.2.21 `bool Geometry2D::lineCircleIntersection (Point2f a, Point2f b, const Point2f & circleOrigin, double radius, vector< Point2f > & intersectionPoints) [static]`

Determine if a line and a circle intersect and return the intersection points if they exist.

We translate all the points such that the circle origin coincides with the origin of the coordinate system. When returning the results, the intersection points are inverse translated.

Parameters

<i>a</i>	First point for determining the line
<i>b</i>	Second point for determining the line
<i>circleOrigin</i>	Origin of the circle
<i>radius</i>	Radius of the circle
<i>intersection- Points</i>	The intersection points between the circle and the line

< Two intersection points


< One intersection point

Definition at line 259 of file Geometry2D.cpp.


References lineCircleOneIntersectionPoint(), lineCircleTwoIntersectionPoints(), and translate().

Referenced by lineSegmentCircleIntersection().

Here is the call graph for this function:

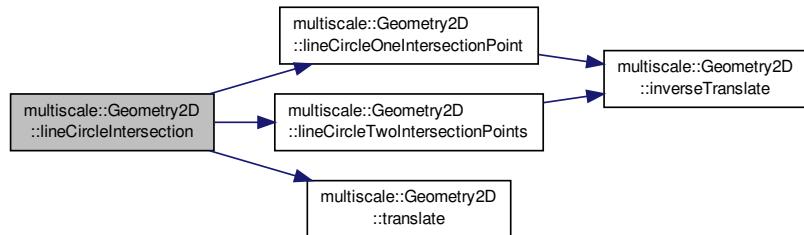

Here is the caller graph for this function:



7.20.2.22 void Geometry2D::lineCircleOneIntersectionPoint (const Point2f & *circleOrigin*, double *A*, double *B*, double *C*, double *delta*, vector< Point2f > & *intersectionPoints*) [static], [private]

Treat the case when the line and circle intersect in one point.

Parameters

<i>circleOrigin</i>	Origin of the circle
<i>A</i>	$y_2 - y_1$
<i>B</i>	$x_1 - x_2$
<i>C</i>	$A \cdot x_1 + B \cdot y_1$
<i>delta</i>	$(4 * B^2 * C^2) - (4 * (A^2 + B^2) * (C^2 - (R^2 * A^2)))$
<i>intersection-Points</i>	Intersection points

Definition at line 423 of file Geometry2D.cpp.


References inverseTranslate().

Referenced by lineCircleIntersection().

Here is the call graph for this function:



Here is the caller graph for this function:



7.20.2.23 `void Geometry2D::lineCircleTwoIntersectionPoints (const Point2f & circleOrigin, double A, double B, double C, double delta, vector< Point2f > & intersectionPoints) [static], [private]`

Treat the case when the line and circle intersect in two points.

Parameters


<i>circleOrigin</i>	Origin of the circle
<i>A</i>	$y_2 - y_1$
<i>B</i>	$x_1 - x_2$
<i>C</i>	$A \cdot x_1 + B \cdot y_1$
<i>delta</i>	$(4 * B^2 * C^2) - (4 * (A^2 + B^2) * (C^2 - (R^2 * A^2)))$
<i>intersection-Points</i>	Intersection points

Definition at line 405 of file Geometry2D.cpp.


References `inverseTranslate()`.

Referenced by `lineCircleIntersection()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.20.2.24 `void Geometry2D::lineEquationDeterminedByPoints (const Point2f & p, const Point2f & q, double & a, double & b, double & c) [static]`

Get the values of "a", "b" and "c" of the line equation $ax + by + c = 0$ knowing that point "p" and "q" are on the line.

$$a = q.y - p.y \quad b = p.x - q.x \quad c = - (p.x * a) - (p.y * b)$$

Parameters


<i>p</i>	Point2f p
<i>q</i>	Point2f q
<i>a</i>	Parameter "a" from the line equation
<i>b</i>	Parameter "b" from the line equation
<i>c</i>	Parameter "c" from the line equation

Definition at line 153 of file Geometry2D.cpp.


References areEqualPoints().

Referenced by areOnTheSameSideOfLine(), and multiscale::MinEnclosingTriangleFinder::lineEquationParameters().

Here is the call graph for this function:



Here is the caller graph for this function:

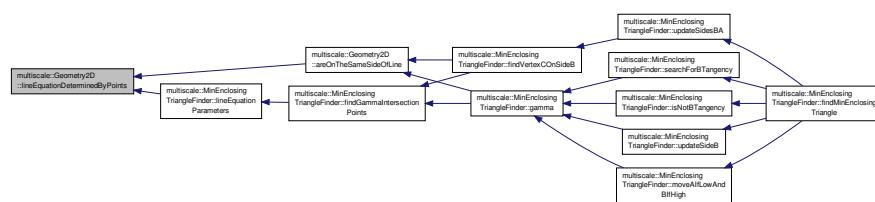

7.20.2.25 `bool Geometry2D::lineIntersection (const Point2f & a1, const Point2f & b1, const Point2f & a2, const Point2f & b2, Point2f & intersection) [static]`

Determine the intersection point of two lines, if this point exists.

Two lines intersect if they are not parallel (Parallel lines intersect at +/- infinity, but we do not consider this case here).

The lines are specified by a pair of points each. If they intersect, then the function returns true, else it returns false.

Lines can be specified in the following form: $A_1x + B_1x = C_1$ $A_2x + B_2x = C_2$

If $\det (= A_1B_2 - A_2B_1) == 0$, then lines are parallel else they intersect

If they intersect, then let us denote the intersection point with $P(x, y)$ where: $x = (C_1B_2 - C_2B_1) / (\det)$ $y = (C_2A_1 - C_1A_2) / (\det)$

Parameters


<i>a1</i>	First point for determining the first line
<i>b1</i>	Second point for determining the first line
<i>a2</i>	First point for determining the second line
<i>b2</i>	Second point for determining the second line
<i>intersection</i>	The intersection point, if this point exists

Definition at line 212 of file Geometry2D.cpp.


References multiscale::Numeric::almostEqual().

Referenced by multiscale::MinEnclosingTriangleFinder::areIntersectingLines(), multiscale::MinEnclosingTriangleFinder::isLocalMinimalTriangle(), lineSegmentIntersection(), and multiscale::MinEnclosingTriangleFinder::middlePointOfSideB().

Here is the call graph for this function:



Here is the caller graph for this function:

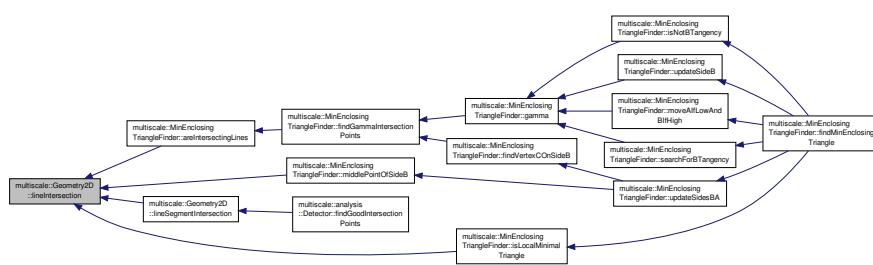

7.20.2.26 `bool Geometry2D::lineIntersection (const Point & a1, const Point & b1, const Point & a2, const Point & b2, Point & intersection) [static]`

Determine the intersection point of two lines, if this point exists.

Two lines intersect if they are not parallel (Parallel lines intersect at +/- infinity, but we do not consider this case here).

The lines are specified by a pair of points each. If they intersect, then the function returns true, else it returns false.

Lines can be specified in the following form: $A1x + B1x = C1$ $A2x + B2x = C2$

If $\det (= A1xB2 - A2xB1) == 0$, then lines are parallel else they intersect

If they intersect, then let us denote the intersection point with $P(x, y)$ where: $x = (C1xB2 - C2xB1) / (\det)$ $y = (C2xA1 - C1xA2) / (\det)$


Parameters

<i>a1</i>	First point for determining the first line
<i>b1</i>	Second point for determining the first line
<i>a2</i>	First point for determining the second line
<i>b2</i>	Second point for determining the second line
<i>intersection</i>	The intersection point, if this point exists

Definition at line 191 of file Geometry2D.cpp.

References multiscale::Numeric::almostEqual().

Here is the call graph for this function:



7.20.2.27 `bool Geometry2D::lineIntersection (double a1, double b1, double c1, double a2, double b2, double c2, Point2f & intersection) [static]`

Determine the intersection point of two lines, if this point exists.

Two lines intersect if they are not parallel (Parallel lines intersect at +/- infinity, but we do not consider this case here).

The lines are specified in the following form: $A1x + B1x = C1$ $A2x + B2x = C2$

If $\det (= A1xB2 - A2xB1) == 0$, then lines are parallel else they intersect

If they intersect, then let us denote the intersection point with $P(x, y)$ where: $x = (C1xB2 - C2xB1) / (\det)$ $y = (C2xA1 - C1xA2) / (\det)$


Parameters

<i>a1</i>	A1
<i>b1</i>	B1
<i>c1</i>	C1
<i>a2</i>	A2
<i>b2</i>	B2
<i>c2</i>	C2
<i>intersection</i>	The intersection point, if this point exists

Definition at line 233 of file Geometry2D.cpp.

References multiscale::Numeric::almostEqual().

Here is the call graph for this function:



7.20.2.28 `bool Geometry2D::lineSegmentCircleIntersection (const Point2f & a, const Point2f & b, const Point2f & circleOrigin, double radius, vector< Point2f > & intersectionPoints) [static]`

Determine if a line segment and a circle intersect and return the intersection points if they exist.

We translate all the points such that the circle origin coincides with the origin of the coordinate system. When returning the results, the intersection points are inverse translated.


Parameters

<i>a</i>	First point for determining the line
<i>b</i>	Second point for determining the line
<i>circleOrigin</i>	Origin of the circle
<i>radius</i>	Radius of the circle
<i>intersection- Points</i>	The intersection points between the circle and the line

Definition at line 288 of file Geometry2D.cpp.

References `lineCircleIntersection()`.

Here is the call graph for this function:

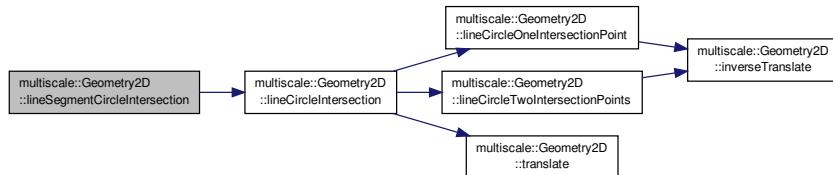

7.20.2.29 `bool Geometry2D::lineSegmentIntersection (const Point & a1, const Point & b1, const Point & a2, const Point & b2, Point & intersection) [static]`

Determine the intersection point of two line segments, if this point exists.

Find the intersection point of the lines, if this point exists. Let us assume that this point exists and let us denote it with $P(x, y)$. Then, in order for the point to be the intersection of the segments and not of the lines, we have to verify the following conditions:

1. $\min(a1.x, b1.x) \leq x \leq \max(a1.x, b1.x) - x$ coordinate is valid for first line segment
2. $\min(a2.x, b2.x) \leq x \leq \max(a2.x, b2.x) - x$ coordinate is valid for second line segment

3. $\min(a1.y, b1.y) \leq y \leq \max(a1.y, b1.y)$ – y coordinate is valid for first line segment
4. $\min(a2.y, b2.y) \leq y \leq \max(a2.y, b2.y)$ – y coordinate is valid for second line segment

Parameters

<i>a1</i>	First point for determining the first line
<i>b1</i>	Second point for determining the first line
<i>a2</i>	First point for determining the second line
<i>b2</i>	Second point for determining the second line
<i>intersection</i>	The intersection point, if this point exists

Definition at line 246 of file Geometry2D.cpp.


References lineIntersection().

Referenced by multiscale::analysis::Detector::findGoodIntersectionPoints().

Here is the call graph for this function:



Here is the caller graph for this function:



7.20.2.30 Point2f Geometry2D::middlePoint (const Point2f & a, const Point2f & b) [static]

Get the point in the middle of the segment determined by points "a" and "b".


Parameters

<i>a</i>	Point2f a
<i>b</i>	Point2f b

Definition at line 88 of file Geometry2D.cpp.

Referenced by multiscale::MinEnclosingTriangleFinder::isValidMinimalTriangle(), and multiscale::MinEnclosingTriangleFinder::middlePointOfSideB().

Here is the caller graph for this function:



7.20.2.31 `unsigned int Geometry2D::minimumDistancePointIndex (const vector< Point > & points, const Point2f & origin) [static]`

Get the index of the point which is the closest to the origin.

Get the index of the point P from the given set of points, such that for any point A from the set of points $\text{dist}(A, \text{origin}) \geq \text{dist}(P, \text{origin})$.

Parameters

<code>points</code>	The set of points
<code>origin</code>	The origin

Definition at line 333 of file Geometry2D.cpp.


References `distanceBtwPoints()`.

Referenced by `multiscale::analysis::RegionDetector::createRegionFromPolygon()`, and `multiscale::analysis::ClusterDetector::updateClusterOriginDependentValues()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.20.2.32 `double Geometry2D::oppositeAngle (double angle) [static]`

Return the angle opposite to the given angle.

`if (angle < 180) then return (angle + 180); else return (angle - 180); endif`


Parameters

<i>angle</i>	Angle
--------------	-------

Definition at line 51 of file Geometry2D.cpp.

Referenced by multiscale::MinEnclosingTriangleFinder::isFlushAngleBetweenPredecessorAndSuccessor(), isOppositeAngleBetween(), and isOppositeAngleBetweenNonReflex().

Here is the caller graph for this function:



7.20.2.33 void Geometry2D::orthogonalLineToAnotherLineEdgePoints (const Point & a1, const Point & b1, Point & a2, Point & b2, int nrOfRows, int nrOfCols) [static]

Find the points which are on the edge and on the line orthogonal to the line defined by 2 given points.

Parameters


<i>a1</i>	First point for determining the first line
<i>b1</i>	Second point for determining the first line
<i>a2</i>	First point for determining the second line
<i>b2</i>	Second point for determining the second line
<i>nrOfRows</i>	Maximum number of rows in the considered matrix
<i>nrOfCols</i>	Maximum number of columns in the considered matrix

Definition at line 95 of file Geometry2D.cpp.


References isPointOnEdge().

Referenced by multiscale::analysis::Detector::findGoodPointsForAngle().

Here is the call graph for this function:



Here is the caller graph for this function:



7.20.2.34 bool Geometry2D::slopeOfLine (const Point2f & a, const Point2f & b, double & slope) [static]

Compute the slope of the line defined by points "a" and "b".

Returns true if the slope of the line can be computed and false otherwise.

Parameters

<i>a</i>	Point2f a
<i>b</i>	Point2f b
<i>slope</i>	Slope of the line if it is different from (+/-)infinity

Definition at line 56 of file Geometry2D.cpp.

7.20.2.35 void Geometry2D::translate (Point2f & point, const Point2f & translation) [static], [private]

Translate a point by the given values.

Parameters

<i>point</i>	The point
<i>translation</i>	Translation values

Definition at line 395 of file Geometry2D.cpp.

Referenced by lineCircleIntersection().

Here is the caller graph for this function:



7.20.3 Member Data Documentation

7.20.3.1 const int Geometry2D::MATRIX_START_INDEX = 1 [static]

Definition at line 445 of file Geometry2D.hpp.

Referenced by isPointOnEdge().

7.20.3.2 const double Geometry2D::PI = 3.14159265358979323846264338327950288419716939937510 [static]

Definition at line 444 of file Geometry2D.hpp.

Referenced by angleBtwPoints(), angleOfLineWrtOxAxis(), multiscale::analysis::CircularityMeasure::compute(), multiscale::analysis::Region::isCircularMeasure(), and multiscale::analysis::Cluster::isCircularMeasure().

The documentation for this class was generated from the following files:


- modules/util/include/multiscale/util/[Geometry2D.hpp](#)
- modules/util/src/[Geometry2D.cpp](#)

7.21 multiscale::LexicographicNumberIterator Class Reference


Iterator class starting at 1 and ending at the provided upper bound considering that each number is followed by an `"_"`.

```
#include <LexicographicNumberIterator.hpp>
```

Inheritance diagram for multiscale::LexicographicNumberIterator:

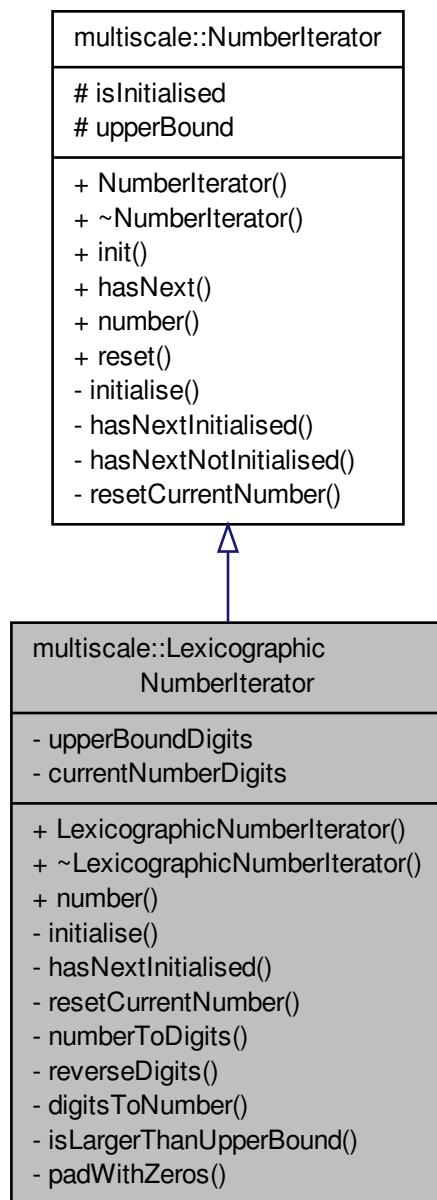

Collaboration diagram for multiscale::LexicographicNumberIterator:

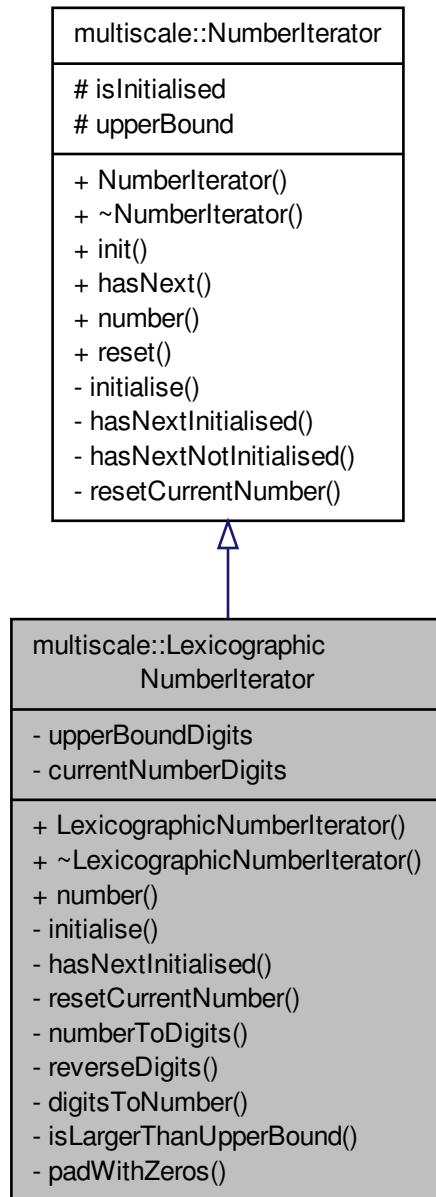

Public Member Functions

- [LexicographicNumberIterator](#) (unsigned int `upperBound`)
- [~LexicographicNumberIterator](#) ()
- unsigned int [number](#) ()

Get the number pointed by the iterator.

Private Member Functions

- void `initialise ()`
Initialise the vectors of digits.
- bool `hasNextInitialised ()`
Check if there is a next number when in initialised state.
- void `resetCurrentNumber ()`
Reset the digits of the current number to the initial value.
- void `numberToDigits (unsigned int number, vector< unsigned char > &digits)`
Convert the number to a vector of digits.
- void `reverseDigits (vector< unsigned char > &digits)`
Reverse the order of the digits.
- unsigned int `digitsToNumber (vector< unsigned char > &digits)`
Convert the vector of digits to the number they represent.
- bool `isLargerThanUpperBound (unsigned char lastDigit)`
Check if the current number with the provided last digit is greater than the upper bound.
- void `padWithZeros ()`
Pad the current number with zeros.

Private Attributes

- `vector< unsigned char > upperBoundDigits`
- `vector< unsigned char > currentNumberDigits`

Additional Inherited Members

7.21.1 Detailed Description

Iterator class starting at 1 and ending at the provided upper bound considering that each number is followed by an `"_"`.

Definition at line 14 of file LexicographicNumberIterator.hpp.


7.21.2 Constructor & Destructor Documentation

7.21.2.1 LexicographicNumberIterator::LexicographicNumberIterator (`unsigned int upperBound`)

Definition at line 6 of file LexicographicNumberIterator.cpp.

References `initialise()`, and `multiscale::NumberIterator::reset()`.

Here is the call graph for this function:



7.21.2.2 LexicographicNumberIterator::~LexicographicNumberIterator ()

Definition at line 11 of file LexicographicNumberIterator.cpp.

References currentNumberDigits, and upperBoundDigits.

7.21.3 Member Function Documentation

7.21.3.1 `unsigned int LexicographicNumberIterator::digitsToNumber (vector< unsigned char > & digits) [private]`

Convert the vector of digits to the number they represent.

Parameters


<i>digits</i>	The digits
---------------	------------

Definition at line 74 of file LexicographicNumberIterator.cpp.


References number().

Referenced by number(), and padWithZeros().

Here is the call graph for this function:



Here is the caller graph for this function:

7.21.3.2 `bool LexicographicNumberIterator::hasNextInitialised () [private], [virtual]`


Check if there is a next number when in initialised state.

Implements [multiscale::NumberIterator](#).

Definition at line 26 of file LexicographicNumberIterator.cpp.

References currentNumberDigits, isLargerThanUpperBound(), and padWithZeros().

Here is the call graph for this function:



7.21.3.3 void LexicographicNumberIterator::initialise() [private], [virtual]

Initialise the vectors of digits.


Implements [multiscale::NumberIterator](#).

Definition at line 20 of file LexicographicNumberIterator.cpp.


References `currentNumberDigits`, `numberToDigits()`, `multiscale::NumberIterator::upperBound`, and `upperBound-Digits`.

Referenced by `LexicographicNumberIterator()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.21.3.4 bool LexicographicNumberIterator::isLargerThanUpperBound(unsigned char lastDigit) [private]

Check if the current number with the provided last digit is greater than the upper bound.

Check if the current number is greater than the upper bound when replacing the last digit of the current number with the provided digit

Parameters


<code>lastDigit</code>	The last digit
------------------------	----------------

Definition at line 86 of file LexicographicNumberIterator.cpp.

References `currentNumberDigits`, and `upperBoundDigits`.

Referenced by `hasNextInitialised()`.

Here is the caller graph for this function:



7.21.3.5 `unsigned int LexicographicNumberIterator::number() [virtual]`

Get the number pointed by the iterator.


Implements [multiscale::NumberIterator](#).

Definition at line 16 of file `LexicographicNumberIterator.cpp`.


References `currentNumberDigits`, and `digitsToNumber()`.

Referenced by `digitsToNumber()`, and `main()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.21.3.6 `void LexicographicNumberIterator::numberToDigits(unsigned int number, vector< unsigned char > & digits) [private]`

Convert the number to a vector of digits.

Parameters


<code>number</code>	The number
<code>digits</code>	The digits of the number

Definition at line 53 of file LexicographicNumberIterator.cpp.


References reverseDigits().

Referenced by initialise().

Here is the call graph for this function:



Here is the caller graph for this function:



7.21.3.7 void LexicographicNumberIterator::padWithZeros() [private]

Pad the current number with zeros.

Pad the current number with the maximum number of zeros such that it does not become larger than the upper bound

Definition at line 107 of file LexicographicNumberIterator.cpp.


References currentNumberDigits, digitsToNumber(), multiscale::NumberIterator::upperBound, and upperBoundDigits.

Referenced by hasNextInitialised().

Here is the call graph for this function:



Here is the caller graph for this function:



7.21.3.8 void LexicographicNumberIterator::resetCurrentNumber () [private], [virtual]

Reset the digits of the current number to the initial value.

Implements [multiscale::NumberIterator](#).

Definition at line 42 of file LexicographicNumberIterator.cpp.

References currentNumberDigits, and upperBoundDigits.

7.21.3.9 void LexicographicNumberIterator::reverseDigits (vector< unsigned char > & digits) [private]

Reverse the order of the digits.

Reverse the order of the digits such that the first one is swapped with the last one, the second one is swapped with the last but one and so on.


Parameters

<i>digits</i>	The digits
---------------	------------

Definition at line 63 of file LexicographicNumberIterator.cpp.

Referenced by [numberToDigits\(\)](#).

Here is the caller graph for this function:



7.21.4 Member Data Documentation

7.21.4.1 vector<unsigned char> multiscale::LexicographicNumberIterator::currentNumberDigits [private]

The digits of the number to which the iterator points

Definition at line 19 of file LexicographicNumberIterator.hpp.

Referenced by [hasNextInitialised\(\)](#), [initialise\(\)](#), [isLargerThanUpperBound\(\)](#), [number\(\)](#), [padWithZeros\(\)](#), [resetCurrentNumber\(\)](#), and [~LexicographicNumberIterator\(\)](#).

7.21.4.2 `vector<unsigned char> multiscale::LexicographicNumberIterator::upperBoundDigits` [private]

The digits of the upper bound

Definition at line 18 of file `LexicographicNumberIterator.hpp`.

Referenced by `initialise()`, `isLargerThanUpperBound()`, `padWithZeros()`, `resetCurrentNumber()`, and `~LexicographicNumberIterator()`.

The documentation for this class was generated from the following files:


- `modules/util/include/multiscale/util/iterator/LexicographicNumberIterator.hpp`
- `modules/util/src/iterator/LexicographicNumberIterator.cpp`

7.22 `multiscale::analysis::MatFactory` Class Reference


Class for creating a `Mat` object.

```
#include <MatFactory.hpp>
```

Inheritance diagram for multiscale::analysis::MatFactory:

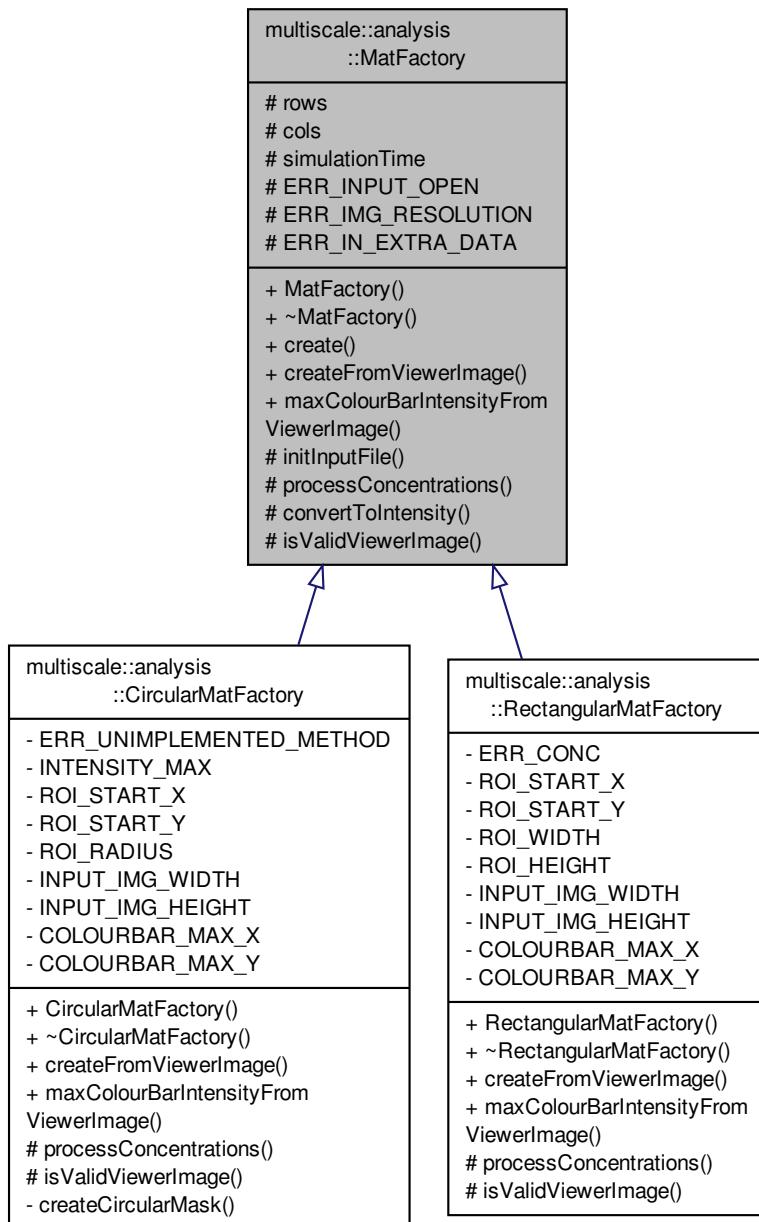

Collaboration diagram for multiscale::analysis::MatFactory:

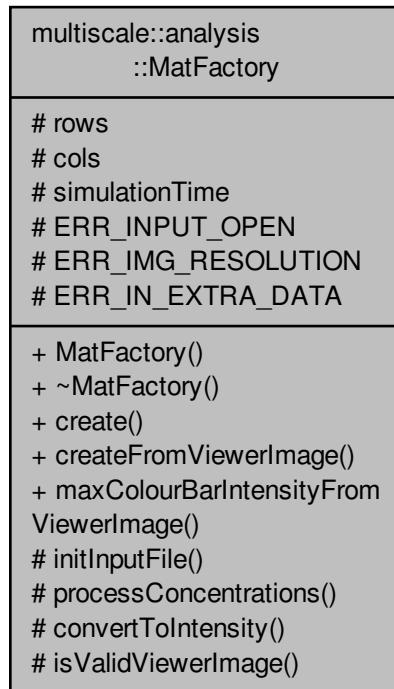

Public Member Functions

- **MatFactory ()**
- virtual **~MatFactory ()**
- Mat **create** (const string &inputFile)

Create a Mat object from the input file.
- virtual Mat **createFromViewerImage** (const string &inputFile)=0

Create a Mat object from the image file obtained from Rectangular/CircularGeometryViewer.
- virtual double **maxColourBarIntensityFromViewerImage** (const string &inputFile)=0

Get the maximum grayscale intensity of the colour bar in the image.

Protected Member Functions

- void **initInputFile** (ifstream &fin, const string &inputFile)

Initialise the input file.
- virtual unsigned char * **processConcentrations** (ifstream &fin)=0

Process concentrations from file.
- unsigned char **convertToIntensity** (double concentration)

Convert concentration to intensity.
- virtual bool **isValidViewerImage** (const Mat &image)=0

Check if the image generated by the viewer has the required resolution.

Protected Attributes

- int `rows`
- int `cols`
- double `simulationTime`

Static Protected Attributes

- static const string `ERR_INPUT_OPEN` = "The input file could not be opened."
- static const string `ERR_IMG_RESOLUTION` = "The resolution of the input image is not the expected one."
- static const string `ERR_IN_EXTRA_DATA` = "The input file contains more data than required."

7.22.1 Detailed Description

Class for creating a Mat object.

Definition at line 16 of file MatFactory.hpp.

7.22.2 Constructor & Destructor Documentation

7.22.2.1 MatFactory::MatFactory()

Definition at line 9 of file MatFactory.cpp.

7.22.2.2 MatFactory::~MatFactory() [virtual]

Definition at line 11 of file MatFactory.cpp.

7.22.3 Member Function Documentation

7.22.3.1 unsigned char MatFactory::convertToIntensity(double *concentration*) [protected]

Convert concentration to intensity.

Convert the concentration (real value between 0 and 1) to intensity (integer value between 0 and 255)


Parameters

<code>concentration</code>	A value between 0 and 1
----------------------------	-------------------------

Definition at line 43 of file MatFactory.cpp.

Referenced by multiscale::analysis::RectangularMatFactory::processConcentrations().

Here is the caller graph for this function:



7.22.3.2 Mat MatFactory::create (const string & *inputFile*)

Create a Mat object from the input file.

Create the Mat instance from the values given in the input file

FORMAT OF INPUT FILE:

- 1st line contains two positive integers and a real value: nr_rows, nr_cols and simulation_time
- 2nd - (nr_rows + 1)th lines contain the concentrations of the positions in the grid


Parameters

<i>inputFile</i>	The path to the input file
------------------	----------------------------

Definition at line 13 of file MatFactory.cpp.

References cols, ERR_IN_EXTRA_DATA, initInputFile(), MS_throw, processConcentrations(), and rows.

Here is the call graph for this function:

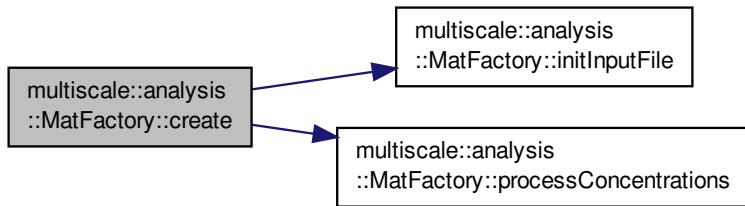

7.22.3.3 virtual Mat multiscale::analysis::MatFactory::createFromViewerImage (const string & *inputFile*) [pure virtual]

Create a Mat object from the image file obtained from Rectangular/CircularGeometryViewer.

Create the Mat instance from the given image file

Parameters

<i>inputFile</i>	The path to the image file
------------------	----------------------------

Implemented in [multiscale::analysis::CircularMatFactory](#), and [multiscale::analysis::RectangularMatFactory](#).

7.22.3.4 void MatFactory::initInputFile (ifstream & *fin*, const string & *inputFile*) [protected]

Initialise the input file.

Initialise the input file. Open an input file stream to the given input file path.

Parameters


<i>fin</i>	An input stream for reading data from the input file
<i>inputFile</i>	The path to the input file

Definition at line 33 of file MatFactory.cpp.

References cols, ERR_INPUT_OPEN, MS_throw, rows, and simulationTime.

Referenced by create().

Here is the caller graph for this function:



7.22.3.5 `virtual bool multiscale::analysis::MatFactory::isValidViewerImage (const Mat & image) [protected], [pure virtual]`

Check if the image generated by the viewer has the required resolution.

Parameters

<code><i>image</i></code>	Image generated by the viewer
---------------------------	-------------------------------

Implemented in [multiscale::analysis::RectangularMatFactory](#), and [multiscale::analysis::CircularMatFactory](#).

7.22.3.6 `virtual double multiscale::analysis::MatFactory::maxColourBarIntensityFromViewerImage (const string & inputFile) [pure virtual]`

Get the maximum grayscale intensity of the colour bar in the image.

Parameters

<code><i>inputFile</i></code>	The path to the image file
-------------------------------	----------------------------

Implemented in [multiscale::analysis::CircularMatFactory](#), and [multiscale::analysis::RectangularMatFactory](#).

7.22.3.7 `virtual unsigned char* multiscale::analysis::MatFactory::processConcentrations (ifstream & fin) [protected], [pure virtual]`

Process concentrations from file.

Process the concentrations from the file. This method will be implemented only by subclasses of this abstract class

Implemented in [multiscale::analysis::RectangularMatFactory](#), and [multiscale::analysis::CircularMatFactory](#).

Referenced by create().

Here is the caller graph for this function:



7.22.4 Member Data Documentation

7.22.4.1 int multiscale::analysis::MatFactory::cols [protected]

Number of columns in the Mat object

Definition at line 21 of file MatFactory.hpp.

Referenced by create(), initInputFile(), and multiscale::analysis::RectangularMatFactory::processConcentrations().

7.22.4.2 const string MatFactory::ERR_IMG_RESOLUTION = "The resolution of the input image is not the expected one." [static], [protected]

Definition at line 91 of file MatFactory.hpp.

Referenced by multiscale::analysis::CircularMatFactory::isValidViewerImage(), and multiscale::analysis::RectangularMatFactory::isValidViewerImage().

7.22.4.3 const string MatFactory::ERR_IN_EXTRA_DATA = "The input file contains more data than required." [static], [protected]

Definition at line 92 of file MatFactory.hpp.

Referenced by create().

7.22.4.4 const string MatFactory::ERR_INPUT_OPEN = "The input file could not be opened." [static], [protected]

Definition at line 90 of file MatFactory.hpp.

Referenced by initInputFile(), multiscale::analysis::CircularMatFactory::isValidViewerImage(), and multiscale::analysis::RectangularMatFactory::isValidViewerImage().

7.22.4.5 int multiscale::analysis::MatFactory::rows [protected]

Number of rows in the Mat object

Definition at line 20 of file MatFactory.hpp.

Referenced by create(), initInputFile(), and multiscale::analysis::RectangularMatFactory::processConcentrations().

7.22.4.6 double multiscale::analysis::MatFactory::simulationTime [protected]

Simulation time read from the input file

Definition at line 22 of file MatFactory.hpp.

Referenced by initInputFile().

The documentation for this class was generated from the following files:


- modules/analysis/spatial/include/multiscale/analysis/spatial/[MatFactory.hpp](#)
- modules/analysis/spatial/src/[MatFactory.cpp](#)

7.23 multiscale::MatFactoryException Class Reference


Exception class for the MatFactory class.

```
#include <MatFactoryException.hpp>
```

Inheritance diagram for multiscale::MatFactoryException:

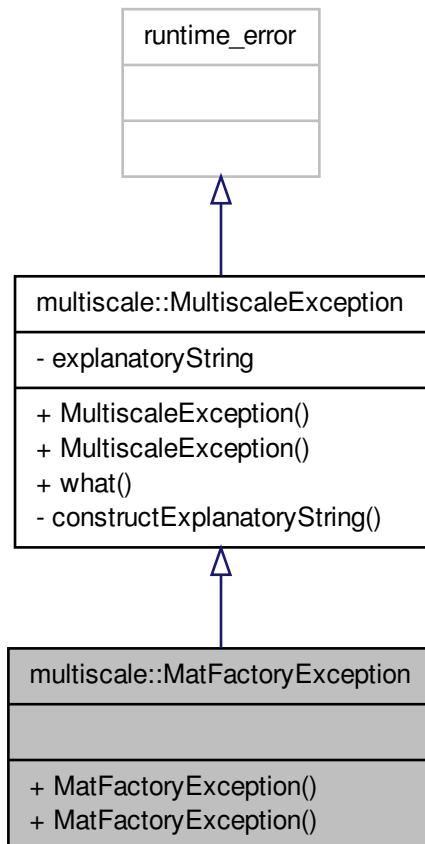

Collaboration diagram for multiscale::MatFactoryException:

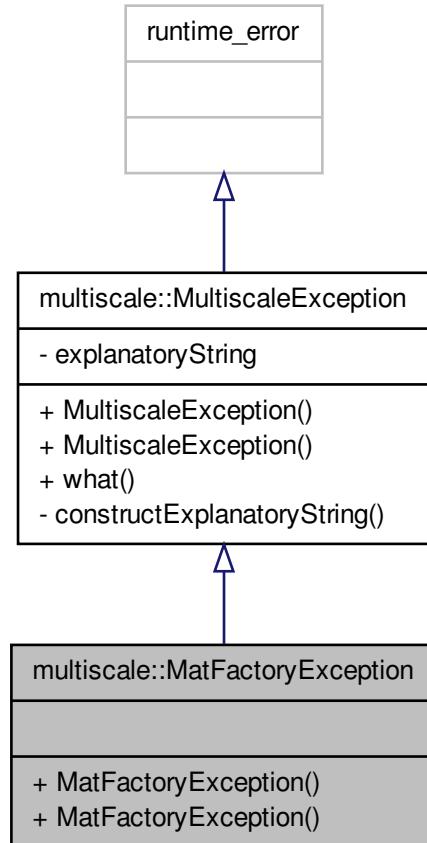

Public Member Functions

- [MatFactoryException](#) (const string &file, int line, const string &msg)
- [MatFactoryException](#) (const string &file, int line, const char *msg)

7.23.1 Detailed Description

Exception class for the MatFactory class.

Definition at line 14 of file MatFactoryException.hpp.

7.23.2 Constructor & Destructor Documentation

7.23.2.1 [multiscale::MatFactoryException::MatFactoryException](#) (const string & *file*, int *line*, const string & *msg*)
 [inline]

Definition at line 18 of file MatFactoryException.hpp.

7.23.2.2 `multiscale::MatFactoryException::MatFactoryException (const string & file, int line, const char * msg)`
[inline]

Definition at line 20 of file `MatFactoryException.hpp`.

The documentation for this class was generated from the following file:

- [include/multiscale/exception/MatFactoryException.hpp](#)

7.24 multiscale::MinEnclosingTriangleFinder Class Reference

Class for computing the minimum area enclosing triangle for a given polygon.

```
#include <MinEnclosingTriangleFinder.hpp>
```

Collaboration diagram for multiscale::MinEnclosingTriangleFinder:

multiscale::MinEnclosingTriangleFinder	
- validationFlag	
- vertexA	
- vertexB	
- vertexC	
- sideAStartVertex	
- sideAEndVertex	
- sideBStartVertex	
- sideBEndVertex	
- sideCStartVertex	
- sideCEndVertex	
- area	
- a	
- b	
- c	
- nrOfPoints	
- polygon	
- CONVEX_HULL_CLOCKWISE	
- INTERSECTS_BELOW	
- INTERSECTS_ABOVE	
- INTERSECTS_CRITICAL	
- INTERSECTS_LIMIT	
- ERR_NR_POINTS	
- ERR_MIDPOINT_SIDE_B	
- ERR_SIDE_B_GAMMA	
- ERR_VERTEX_C_ON_SIDE_B	
- ERR_TRIANGLE_VERTICES	
- VALIDATION_SIDE_A_TANGENT	
- VALIDATION_SIDE_B_TANGENT	
- VALIDATION_SIDES_FLUSH	
+ MinEnclosingTriangleFinder()	
+ ~MinEnclosingTriangleFinder()	
+ find()	
- findMinTriangle()	
- initialise()	
- initialiseConvexPolygon()	
- findMinEnclosingTriangle()	
- returnMinEnclosingTriangle()	
- initialiseAlgorithmVariables()	
- findMinEnclosingTriangle()	
- advanceBToRightChain()	
- moveAllIfLowAndIfHigh()	
- searchForBTangency()	
- isNotBTangency()	
- updateSidesCA()	
- updateSidesBA()	
- updateSideB()	
- isLocalMinimalTriangle()	
- isValidateMinimalTriangle()	
- updateMinEnclosingTriangle()	
- middlePointOfSideB()	
- intersectsBelow()	
- intersectsAbove()	
- intersects()	
- intersectsAboveOrBelow()	
- isFlushAngleBetweenPredecessorAndSuccessor()	
- isGammaAngleBetween()	
- isGammaAngleEqualTo()	
- height()	
- height()	
- gamma()	
- findVertexCOnSideB()	
- findGammaIntersectionPoints()	
- areIdenticalLines()	
- areIntersectingLines()	
- lineEquationParameters()	
- advance()	
- successor()	
- predecessor()	

Public Member Functions

- [MinEnclosingTriangleFinder \(\)](#)
- [~MinEnclosingTriangleFinder \(\)](#)
- double [find \(const vector< Point2f > &points, vector< Point2f > &minEnclosingTriangle\)](#)

Find the minimum area enclosing triangle for the given 2D point set.

Private Member Functions

- `double findMinTriangle (const vector< Point2f > &points, vector< Point2f > &minEnclosingTriangle)`

Find the minimum area enclosing triangle for the given 2D point set.
- `void initialise (const vector< Point2f > &points, vector< Point2f > &minEnclosingTriangle)`

Initialisation function for the class.
- `void initialiseConvexPolygon (const vector< Point2f > &points)`

Initialise polygon as the convex hull of the given set of points.
- `double findMinEnclosingTriangle (const vector< Point2f > &polygon, vector< Point2f > &minEnclosingTriangle)`

Find the minimum area enclosing triangle for the given polygon.
- `double returnMinEnclosingTriangle (const vector< Point2f > &polygon, vector< Point2f > &minEnclosingTriangle)`

Return the minimum area enclosing triangle in case the given polygon has at most three points.
- `void initialiseAlgorithmVariables ()`

Initialisation of the algorithm variables.
- `void findMinEnclosingTriangle (vector< Point2f > &minEnclosingTriangle, double &minEnclosingArea)`

Find the minimum area enclosing triangle for the given polygon.
- `void advanceBToRightChain ()`

Advance b to the right chain.
- `void moveAIfLowAndBIfHigh ()`

Move "a" if it is low and "b" if it is high.
- `void searchForBTangency ()`

Search for the tangency of side B.
- `bool isNotBTangency ()`

Check if tangency for side B was not obtained.
- `void updateSidesCA ()`

Update sides A and C.
- `void updateSidesBA ()`

Update sides B and possibly A if tangency for side B was not obtained.
- `void updateSideB ()`

Set side B if tangency for side B was obtained.
- `bool isLocalMinimalTriangle ()`

Update the triangle vertices after all sides were set and check if a local minimal triangle was found or not.
- `bool isValidMinimalTriangle ()`

Check if the found minimal triangle is valid.
- `void updateMinEnclosingTriangle (vector< Point2f > &minEnclosingTriangle, double &minEnclosingArea)`

Update the current minimum area enclosing triangle if the newly obtained one has a smaller area.
- `bool middlePointOfSideB (Point2f &middlePointOfSideB)`

Return the middle point of side B.
- `bool intersectsBelow (const Point2f &gammaPoint, unsigned int polygonPointIndex)`

Check if the line determined by gammaPoint and polygon[polygonPointIndex] intersects the polygon below the point polygon[polygonPointIndex].
- `bool intersectsAbove (const Point2f &gammaPoint, unsigned int polygonPointIndex)`

Check if the line determined by gammaPoint and polygon[polygonPointIndex] intersects the polygon above the point polygon[polygonPointIndex].
- `unsigned int intersects (double angleOfGammaAndPoint, unsigned int polygonPointIndex)`

Check if/where the line determined by gammaPoint and polygon[polygonPointIndex] intersects the polygon.
- `unsigned int intersectsAboveOrBelow (unsigned int successorOrPredecessorIndex, unsigned int pointIndex)`

- **bool isFlushAngleBetweenPredecessorAndSuccessor** (double &angleFlushEdge, double anglePredecessor, double angleSuccessor)

Check if the angle of the flush edge or its opposite angle lie between the angle of the predecessor and successor.
- **bool isGammaAngleBetween** (double &gammaAngle, double angle1, double angle2)

Check if the angle of the line (gamma(p) p) or its opposite angle lie between angle1 and angle2.
- **bool isGammaAngleEqualTo** (double &gammaAngle, double angle)

Check if the angle of the line (gamma(p) p) or its opposite angle is equal to the given angle.
- **double height** (unsigned int polygonPointIndex)

Compute the height of the point specified by the given index.
- **double height** (const Point2f &polygonPoint)

Compute the height of the point.
- **bool gamma** (unsigned int polygonPointIndex, Point2f &gammaPoint)

Find gamma for a given point "p" specified by its index.
- **Point2f findVertexCOnSideB ()**

*Find vertex C which lies on side B at a distance = 2 * height(a-1) from side C.*
- **bool findGammaIntersectionPoints** (unsigned int polygonPointIndex, const Point2f &side1StartVertex, const Point2f &side1EndVertex, const Point2f &side2StartVertex, const Point2f &side2EndVertex, Point2f &intersectionPoint1, Point2f &intersectionPoint2)

Find the intersection points to compute gamma(point)
- **bool areIdenticalLines** (const vector< double > &side1Params, const vector< double > &side2Params, double sideCExtraParam)

Check if the given lines are identical or not.
- **bool areIntersectingLines** (const vector< double > &side1Params, const vector< double > &side2Params, double sideCExtraParam, Point2f &intersectionPoint1, Point2f &intersectionPoint2)

Check if the given lines intersect or not. If the lines intersect find their intersection points.
- **vector< double > lineEquationParameters** (const Point2f &p, const Point2f &q)

Get the line equation parameters "a", "b" and "c" for the line determined by points "p" and "q".
- **void advance** (unsigned int &index)

Advance the given index with one position.
- **unsigned int successor** (unsigned int index)

Return the successor of the provided point index.
- **unsigned int predecessor** (unsigned int index)

Return the predecessor of the provided point index.

Private Attributes

- **unsigned int validationFlag**
- **Point2f vertexA**
- **Point2f vertexB**
- **Point2f vertexC**
- **Point2f sideAStartVertex**
- **Point2f sideAEndVertex**
- **Point2f sideBStartVertex**
- **Point2f sideBEndVertex**
- **Point2f sideCStartVertex**
- **Point2f sideCEndVertex**
- **double area**
- **unsigned int a**
- **unsigned int b**
- **unsigned int c**
- **unsigned int nrOfPoints**
- **vector< Point2f > polygon**

Static Private Attributes

- static const bool `CONVEX_HULL_CLOCKWISE` = true
- static const unsigned int `INTERSECTS_BELOW` = 1
- static const unsigned int `INTERSECTS_ABOVE` = 2
- static const unsigned int `INTERSECTS_CRITICAL` = 3
- static const unsigned int `INTERSECTS_LIMIT` = 4
- static const string `ERR_NR_POINTS` = "The number of 2D points in the input vector should be greater than 0."
- static const string `ERR_MIDPOINT_SIDE_B` = "The position of the middle point of side B could not be determined."
- static const string `ERR_SIDE_B_GAMMA` = "The position of side B could not be determined, because `gamma(b)` could not be computed."
- static const string `ERR_VERTEX_C_ON_SIDE_B` = "The position of the vertex C on side B could not be determined, because the considered lines do not intersect."
- static const string `ERR_TRIANGLE_VERTICES` = "The position of the triangle vertices could not be determined, because the sides of the triangle do not intersect."
- static const unsigned int `VALIDATION_SIDE_A_TANGENT` = 0
- static const unsigned int `VALIDATION_SIDE_B_TANGENT` = 1
- static const unsigned int `VALIDATION_SIDES_FLUSH` = 2

7.24.1 Detailed Description

Class for computing the minimum area enclosing triangle for a given polygon.

This implementation has a linear complexity ($\theta(n)$) with respect to the number of points defining the convex polygon and is based on the algorithm described in the following paper:

J. O'Rourke, A. Aggarwal, S. Maddila, and M. Baldwin, 'An optimal algorithm for finding minimal enclosing triangles', Journal of Algorithms, vol. 7, no. 2, pp. 258–269, Jun. 1986.

Definition at line 20 of file `MinEnclosingTriangleFinder.hpp`.

7.24.2 Constructor & Destructor Documentation

7.24.2.1 `MinEnclosingTriangleFinder::MinEnclosingTriangleFinder()`

Definition at line 12 of file `MinEnclosingTriangleFinder.cpp`.

References `a`, `area`, `b`, `c`, `nrOfPoints`, and `validationFlag`.

7.24.2.2 `MinEnclosingTriangleFinder::~MinEnclosingTriangleFinder()`

Definition at line 24 of file `MinEnclosingTriangleFinder.cpp`.

7.24.3 Member Function Documentation

7.24.3.1 `void MinEnclosingTriangleFinder::advance(unsigned int & index) [private]`

Advance the given index with one position.

Parameters


<code>index</code>	Index of the point
--------------------	--------------------

Definition at line 414 of file `MinEnclosingTriangleFinder.cpp`.


References `successor()`.

Referenced by `advanceBToRightChain()`, `moveAlfLowAndBIfHigh()`, and `searchForBTangency()`.

Here is the call graph for this function:



Here is the caller graph for this function:

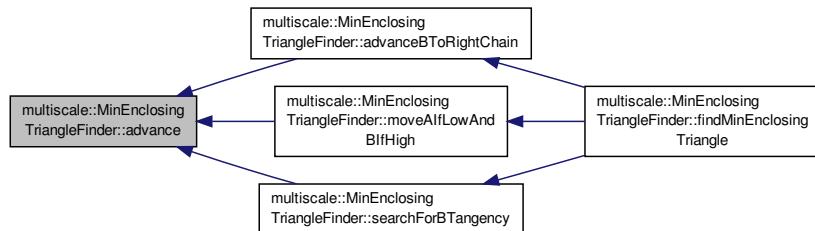

7.24.3.2 void `MinEnclosingTriangleFinder::advanceBToRightChain()` [private]

Advance b to the right chain.


See paper for more details

Definition at line 111 of file `MinEnclosingTriangleFinder.cpp`.


References `advance()`, `b`, `multiscale::Numeric::greaterOrEqual()`, `height()`, and `successor()`.

Referenced by `findMinEnclosingTriangle()`.

Here is the call graph for this function:

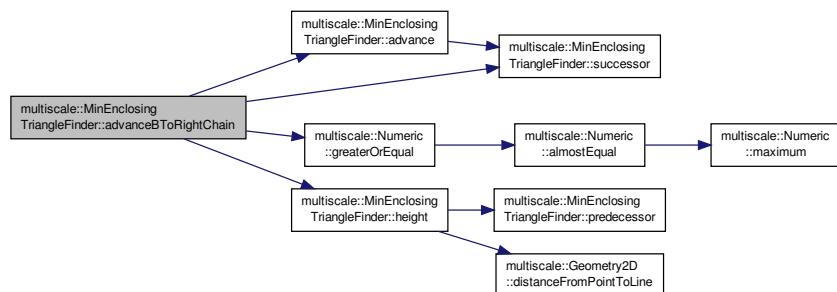

Here is the caller graph for this function:



7.24.3.3 bool MinEnclosingTriangleFinder::areIdenticalLines (const vector< double > & side1Params, const vector< double > & side2Params, double sideCExtraParam) [private]

Check if the given lines are identical or not.

The lines are specified as: $ax + by + c = 0$ OR $ax + by + c (+/-) \text{sideCExtraParam} = 0$

Parameters


<code>side1Params</code>	Vector containing the values of a, b and c for side 1
<code>side2Params</code>	Vector containing the values of a, b and c for side 2
<code>sideCExtraParam</code>	Extra parameter for the flush edge C

Definition at line 379 of file MinEnclosingTriangleFinder.cpp.


References multiscale::Geometry2D::areIdenticalLines().

Referenced by findGammalIntersectionPoints().

Here is the call graph for this function:



Here is the caller graph for this function:

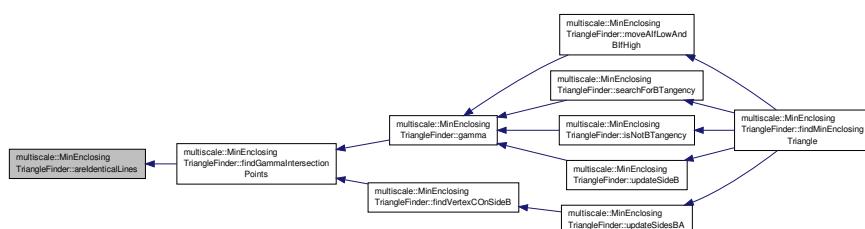

7.24.3.4 `bool MinEnclosingTriangleFinder::areIntersectingLines (const vector< double > & side1Params, const vector< double > & side2Params, double sideCEExtraParam, Point2f & intersectionPoint1, Point2f & intersectionPoint2) [private]`

Check if the given lines intersect or not. If the lines intersect find their intersection points.

The lines are specified as: $ax + by + c = 0$ OR $ax + by + c (+/-) \text{sideCEExtraParam} = 0$

Parameters


<code>side1Params</code>	Vector containing the values of a, b and c for side 1
<code>side2Params</code>	Vector containing the values of a, b and c for side 2
<code>sideCEExtraParam</code>	Extra parameter for the flush edge C
<code>intersectionPoint1</code>	The first intersection point, if it exists
<code>intersectionPoint2</code>	The second intersection point, if it exists

Definition at line 389 of file `MinEnclosingTriangleFinder.cpp`.


References `multiscale::Geometry2D::lineIntersection()`.

Referenced by `findGammaIntersectionPoints()`.

Here is the call graph for this function:



Here is the caller graph for this function:

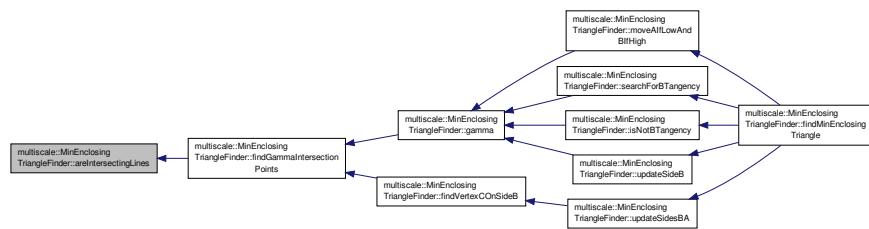

7.24.3.5 `double MinEnclosingTriangleFinder::find (const vector< Point2f > & points, vector< Point2f > & minEnclosingTriangle)`

Find the minimum area enclosing triangle for the given 2D point set.

Precondition: Number of points in the set is at least 1.

Parameters


<code>points</code>	Set of points
<code>minEnclosingTriangle</code>	Minimum area triangle enclosing the given polygon

Definition at line 26 of file MinEnclosingTriangleFinder.cpp.


References ERR_NR_POINTS, findMinTriangle(), and MS_throw.

Referenced by multiscale::analysis::Region::isTriangularMeasure(), multiscale::analysis::Cluster::isTriangularMeasure(), runMinEnclosingTriangleFinder(), and multiscaletest::MinEnclosingTriangleFinderTest::RunTest().

Here is the call graph for this function:

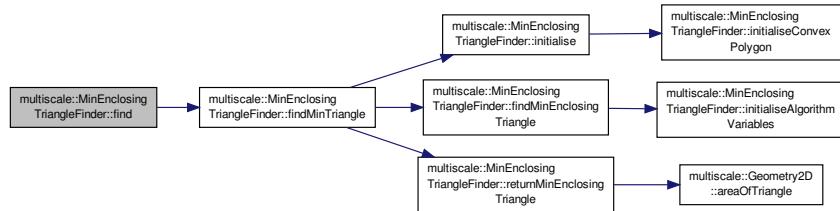

Here is the caller graph for this function:

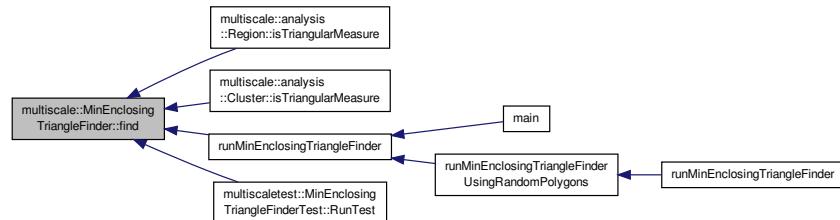

7.24.3.6 bool MinEnclosingTriangleFinder::findGammaIntersectionPoints (*unsigned int polygonPointIndex, const Point2f & side1StartVertex, const Point2f & side1EndVertex, const Point2f & side2StartVertex, const Point2f & side2EndVertex, Point2f & intersectionPoint1, Point2f & intersectionPoint2*) [private]

Find the intersection points to compute gamma(point)

Parameters


<i>polygonPoint-Index</i>	Index of the polygon point for which the distance is known
<i>side1StartVertex</i>	Start vertex for side 1
<i>side1EndVertex</i>	End vertex for side 1
<i>side2StartVertex</i>	Start vertex for side 2
<i>side2EndVertex</i>	End vertex for side 2
<i>intersection-Point1</i>	First intersection point between one pair of lines
<i>intersection-Point2</i>	Second intersection point between another pair of lines

Definition at line 356 of file MinEnclosingTriangleFinder.cpp.


References areIdenticalLines(), areIntersectingLines(), height(), and lineEquationParameters().

Referenced by findVertexCOnSideB(), and gamma().

Here is the call graph for this function:

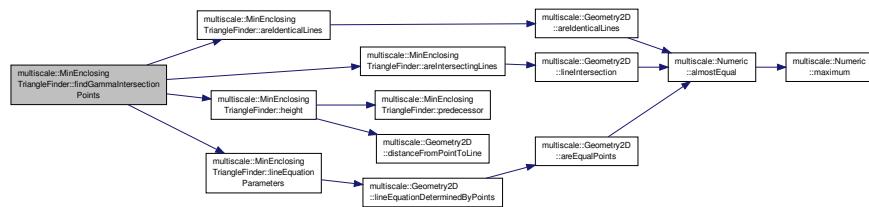

Here is the caller graph for this function:

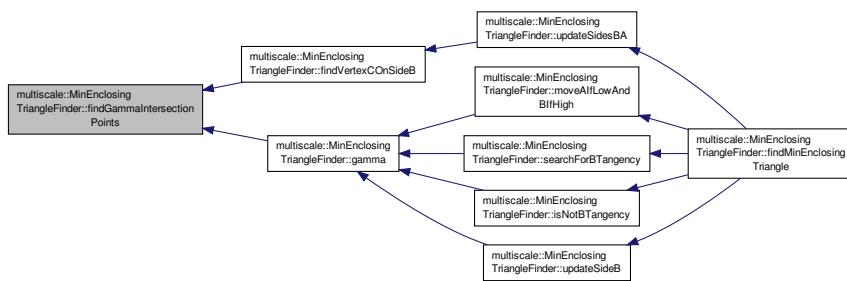

7.24.3.7 double MinEnclosingTriangleFinder::findMinEnclosingTriangle (const vector< Point2f > & polygon, vector< Point2f > & minEnclosingTriangle) [private]

Find the minimum area enclosing triangle for the given polygon.

Parameters


<i>polygon</i>	Polygon of points for which the minimum area enclosing triangle will be found
<i>minEnclosingTriangle</i>	Minimum area triangle enclosing the given polygon

Definition at line 60 of file MinEnclosingTriangleFinder.cpp.


References initialiseAlgorithmVariables().

Referenced by findMinTriangle().

Here is the call graph for this function:



Here is the caller graph for this function:

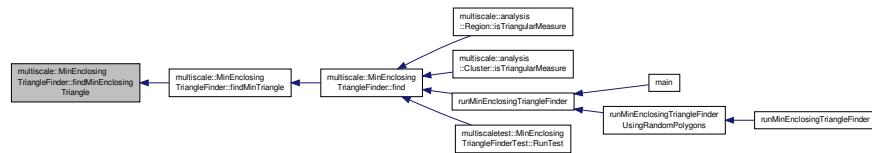

7.24.3.8 void MinEnclosingTriangleFinder::findMinEnclosingTriangle (`vector< Point2f > & minEnclosingTriangle, double & minEnclosingTriangleArea`) [private]

Find the minimum area enclosing triangle for the given polygon.


Parameters

<code>minEnclosingTriangle</code>	Minimum area triangle enclosing the given polygon
<code>minEnclosingTriangleArea</code>	Area of the minimum area enclosing triangle

Definition at line 90 of file MinEnclosingTriangleFinder.cpp.

References `advanceBToRightChain()`, `c`, `isLocalMinimalTriangle()`, `isNotBTangency()`, `moveAlfLowAndBlfHigh()`, `nrOfPoints`, `searchForBTangency()`, `updateMinEnclosingTriangle()`, `updateSideB()`, `updateSidesBA()`, and `updateSidesCA()`.

Here is the call graph for this function:

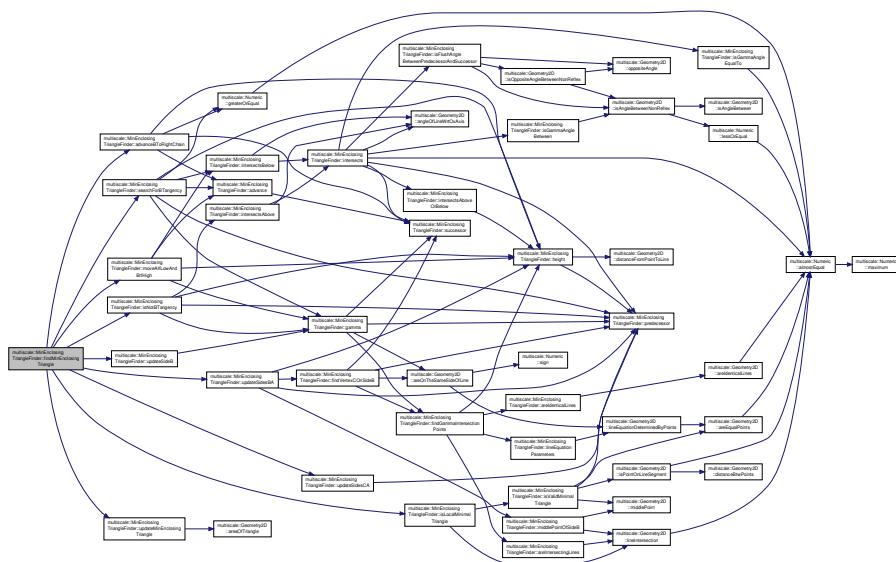

7.24.3.9 double MinEnclosingTriangleFinder::findMinTriangle (`const vector< Point2f > & points, vector< Point2f > & minEnclosingTriangle`) [private]

Find the minimum area enclosing triangle for the given 2D point set.

Parameters


<code>points</code>	Set of points
<code>minEnclosingTriangle</code>	Minimum area triangle enclosing the given polygon

Definition at line 37 of file MinEnclosingTriangleFinder.cpp.


References `findMinEnclosingTriangle()`, `initialise()`, `polygon`, and `returnMinEnclosingTriangle()`.

Referenced by `find()`.

Here is the call graph for this function:

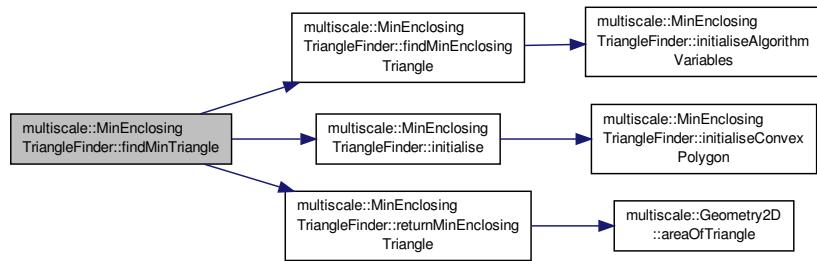

Here is the caller graph for this function:

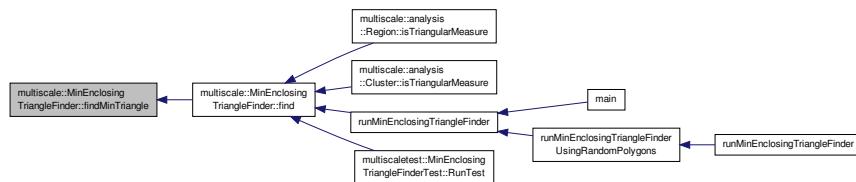

7.24.3.10 Point2f MinEnclosingTriangleFinder::findVertexCOnSideB() [private]

Find vertex C which lies on side B at a distance = $2 * \text{height}(a-1)$ from side C.

Considering that line (x y) is a line parallel to (c c-1) and that the distance between the lines is equal to $2 * \text{height}(a-1)$, we can have two possible (x y) lines.

Therefore, we will compute two intersection points between the lines (x y) and (b b-1) and take the point which is closest to point polygon[b].


See paper and formula for distance from point to a line for more details

Definition at line 339 of file MinEnclosingTriangleFinder.cpp.


References `a`, `multiscale::Geometry2D::areOnTheSameSideOfLine()`, `c`, `ERR_VERTEX_C_ON_SIDE_B`, `findGammaIntersectionPoints()`, `MS_throw`, `polygon`, `predecessor()`, `sideBEndVertex`, `sideBStartVertex`, `sideCEndVertex`, `sideCStartVertex`, and `successor()`.

Referenced by `updateSidesBA()`.

Here is the call graph for this function:

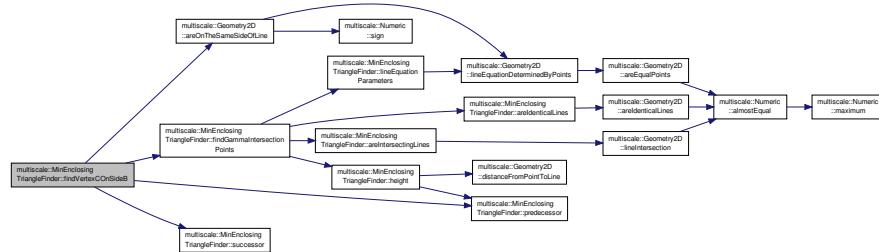

Here is the caller graph for this function:



7.24.3.11 `bool MinEnclosingTriangleFinder::gamma (unsigned int polygonPointIndex, Point2f & gammaPoint)`
[private]

Find gamma for a given point "p" specified by its index.

The function returns true if gamma exists i.e. if lines (a a-1) and (x y) intersect and false otherwise. In case the two lines intersect in point intersectionPoint, gamma is computed.

Considering that line (x y) is a line parallel to (c c-1) and that the distance between the lines is equal to $2 * \text{height}(p)$, we can have two possible (x y) lines.

Therefore, we will compute two intersection points between the lines (x y) and (a a-1) and take the point which is closest to point polygon[a].

See paper and formula for distance from point to a line for more details

Parameters


<i>polygonPoint-Index</i>	Index of the polygon point
<i>gammaPoint</i>	Point2f $\text{gamma}(\text{polygon}[\text{polygonPointIndex}])$

Definition at line 320 of file MinEnclosingTriangleFinder.cpp.


References a, multiscale::Geometry2D::areOnTheSameSideOfLine(), c, findGammaIntersectionPoints(), polygon, predecessor(), and successor().

Referenced by isNotBTangency(), moveAIfLowAndBIfHigh(), searchForBTangency(), and updateSideB().

Here is the call graph for this function:

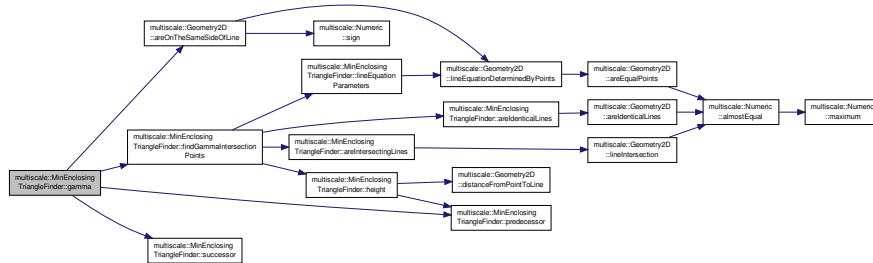

Here is the caller graph for this function:

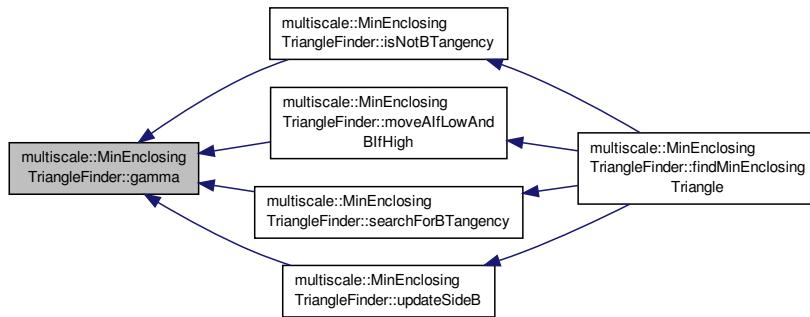

7.24.3.12 double MinEnclosingTriangleFinder::height (*unsigned int polygonPointIndex*) [private]

Compute the height of the point specified by the given index.

See paper for more details

Parameters


<i>polygonPoint-Index</i>	Index of the polygon point
---------------------------	----------------------------

Definition at line 304 of file MinEnclosingTriangleFinder.cpp.


References c, multiscale::Geometry2D::distanceFromPointToLine(), polygon, and predecessor().

Referenced by advanceBToRightChain(), findGammaIntersectionPoints(), intersectsAboveOrBelow(), isNotBTangency(), moveAlfLowAndBIfHigh(), searchForBTangency(), and updateSidesBA().

Here is the call graph for this function:

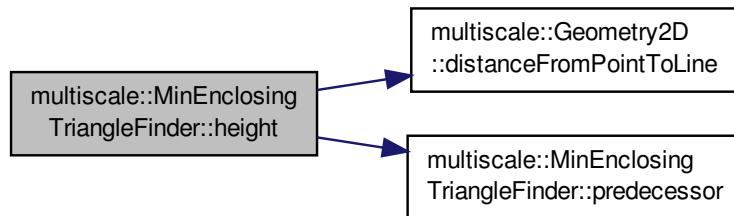

Here is the caller graph for this function:

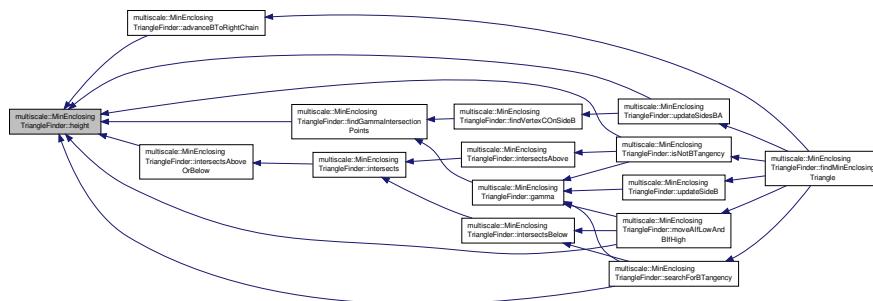

7.24.3.13 double MinEnclosingTriangleFinder::height (const Point2f & polygonPoint) [private]

Compute the height of the point.

See paper for more details


Parameters

<i>polygonPoint</i>	Polygon point
---------------------	---------------

Definition at line 313 of file MinEnclosingTriangleFinder.cpp.

References c, multiscale::Geometry2D::distanceFromPointToLine(), polygon, and predecessor().

Here is the call graph for this function:

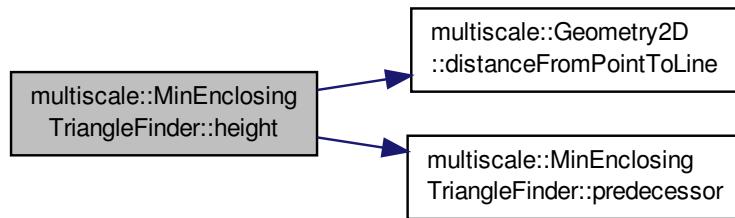

7.24.3.14 `void MinEnclosingTriangleFinder::initialise (const vector< Point2f > & points, vector< Point2f > & minEnclosingTriangle) [private]`

Initialisation function for the class.

Initialise the polygon and other class' fields.

Parameters


<code>points</code>	Set of points
<code>minEnclosingTriangle</code>	Minimum area triangle enclosing the given polygon

Definition at line 47 of file `MinEnclosingTriangleFinder.cpp`.


References `initialiseConvexPolygon()`.

Referenced by `findMinTriangle()`.

Here is the call graph for this function:



Here is the caller graph for this function:

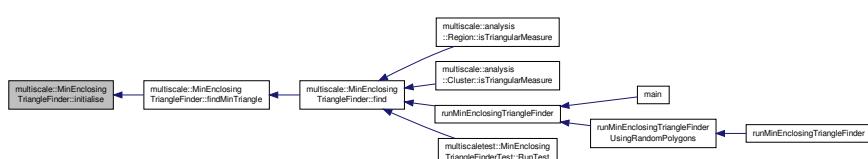

7.24.3.15 void MinEnclosingTriangleFinder::initialiseAlgorithmVariables () [private]


Initialisation of the algorithm variables.

Definition at line 82 of file MinEnclosingTriangleFinder.cpp.

References a, b, c, nrOfPoints, and polygon.

Referenced by findMinEnclosingTriangle().

Here is the caller graph for this function:



7.24.3.16 void MinEnclosingTriangleFinder::initialiseConvexPolygon (const vector< Point2f > & points) [private]

Initialise polygon as the convex hull of the given set of points.

Parameters


points	Set of points
--------	---------------

Definition at line 54 of file MinEnclosingTriangleFinder.cpp.

References CONVEX_HULL_CLOCKWISE, and polygon.

Referenced by initialise().

Here is the caller graph for this function:



7.24.3.17 unsigned int MinEnclosingTriangleFinder::intersects (double angleOfGammaAndPoint, unsigned int polygonPointIndex) [private]

Check if/where the line determined by gammaPoint and polygon[polygonPointIndex] intersects the polygon.

Parameters

angleOfGamma-AndPoint	Angle between gammaPoint and polygon[polygonPointIndex]
polygonPoint-Index	Index of the polygon point which is considered when determining the line


Definition at line 251 of file MinEnclosingTriangleFinder.cpp.

References multiscale::Numeric::almostEqual(), multiscale::Geometry2D::angleOfLineWrtOxAxis(), c, INTERSECTS_BELOW, INTERSECTS_CRITICAL, intersectsAboveOrBelow(), isFlushAngleBetweenPredecessorAnd-


Successor(), isGammaAngleBetween(), isGammaAngleEqualTo(), polygon, predecessor(), and successor().

Referenced by intersectsAbove(), and intersectsBelow().

Here is the call graph for this function:

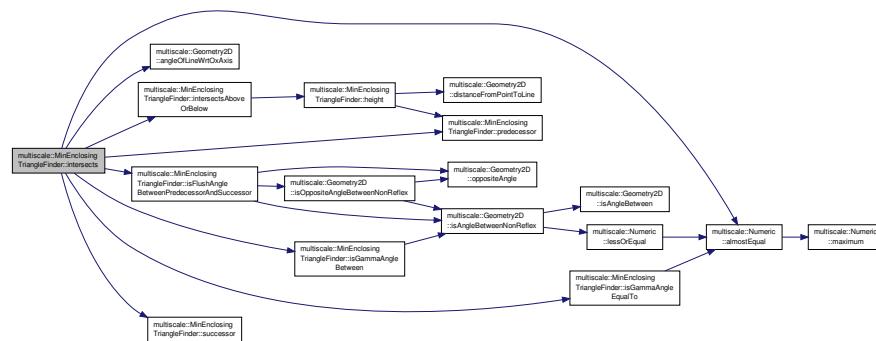

Here is the caller graph for this function:

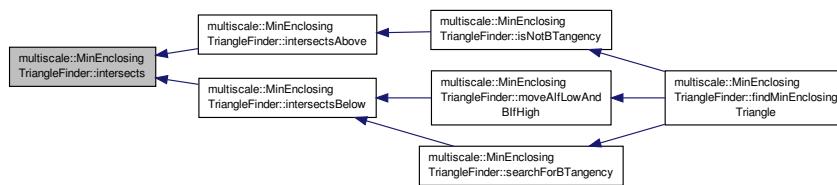

7.24.3.18 bool MinEnclosingTriangleFinder::intersectsAbove (const Point2f & *gammaPoint*, unsigned int *polygonPointIndex*) [private]

Check if the line determined by *gammaPoint* and *polygon[polygonPointIndex]* intersects the polygon above the point *polygon[polygonPointIndex]*.

Parameters


<i>gammaPoint</i>	Gamma(p)
<i>polygonPoint-Index</i>	Index of the polygon point which is considered when determining the line

Definition at line 245 of file MinEnclosingTriangleFinder.cpp.


References multiscale::Geometry2D::angleOfLineWrtOxAxis(), intersects(), INTERSECTS_ABOVE, and polygon.

Referenced by isNotBTangency().

Here is the call graph for this function:

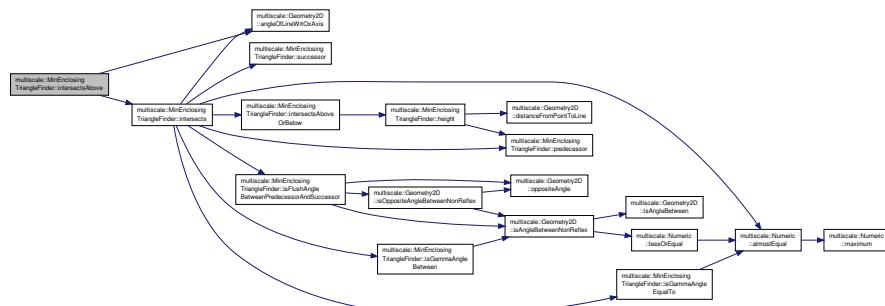

Here is the caller graph for this function:



7.24.3.19 `unsigned int MinEnclosingTriangleFinder::intersectsAboveOrBelow (unsigned int successorOrPredecessorIndex, unsigned int pointIndex) [private]`

If ($\text{gamma}(x) \neq P$) intersects P between `successorOrPredecessorIndex` and `pointIndex` is it above/below?

Parameters

<code>successorOrPredecessorIndex</code>	Index of the successor or predecessor
<code>pointIndex</code>	Index of the point x in the polygon

Definition at line 275 of file `MinEnclosingTriangleFinder.cpp`.


References `height()`, `INTERSECTS_ABOVE`, and `INTERSECTS_BELOW`.

Referenced by `intersects()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.24.3.20 bool MinEnclosingTriangleFinder::intersectsBelow (const Point2f & *gammaPoint*, unsigned int *polygonPointIndex*) [private]

Check if the line determined by *gammaPoint* and *polygon[polygonPointIndex]* intersects the polygon below the point *polygon[polygonPointIndex]*.

Parameters


<i>gammaPoint</i>	Gamma(p)
<i>polygonPoint-Index</i>	Index of the polygon point which is considered when determining the line

Definition at line 239 of file MinEnclosingTriangleFinder.cpp.


References multiscale::Geometry2D::angleOfLineWrtOxAxis(), intersects(), INTERSECTS_BELOW, and polygon.

Referenced by moveAllLowAndBifHigh(), and searchForBTangency().

Here is the call graph for this function:

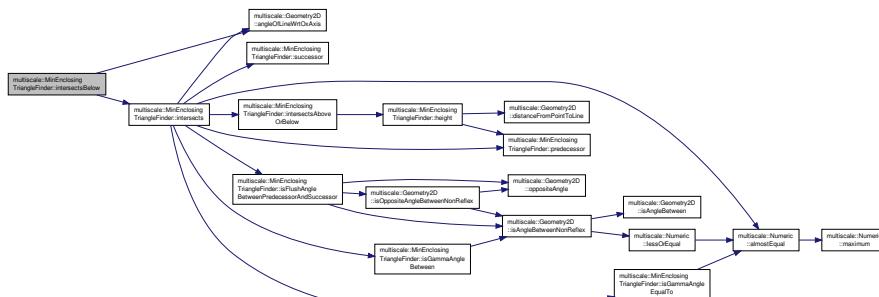

Here is the caller graph for this function:

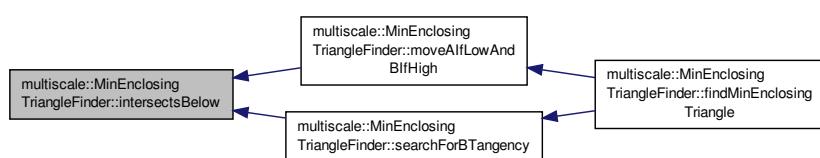

7.24.3.21 `bool MinEnclosingTriangleFinder::isFlushAngleBetweenPredecessorAndSuccessor (double & angleFlushEdge, double anglePredecessor, double angleSuccessor) [private]`

Check if the angle of the flush edge or its opposite angle lie between the angle of the predecessor and successor.

Parameters


<i>angleFlushEdge</i>	Angle of the flush edge
<i>anglePredecessor</i>	Angle of the predecessor
<i>angleSuccessor</i>	Angle of the successor

Definition at line 283 of file MinEnclosingTriangleFinder.cpp.


References multiscale::Geometry2D::isAngleBetweenNonReflex(), multiscale::Geometry2D::isOppositeAngleBetweenNonReflex(), and multiscale::Geometry2D::oppositeAngle().

Referenced by intersects().

Here is the call graph for this function:



Here is the caller graph for this function:



7.24.3.22 `bool MinEnclosingTriangleFinder::isGammaAngleBetween (double & gammaAngle, double angle1, double angle2) [private]`

Check if the angle of the line (gamma(p) p) or its opposite angle lie between angle1 and angle2.

Parameters


<i>gammaAngle</i>	Angle of the line (gamma(p) p)
<i>angle1</i>	One of the boundary angles
<i>angle2</i>	Another boundary angle

Definition at line 296 of file MinEnclosingTriangleFinder.cpp.


References multiscale::Geometry2D::isAngleBetweenNonReflex().

Referenced by intersects().

Here is the call graph for this function:



Here is the caller graph for this function:



7.24.3.23 bool MinEnclosingTriangleFinder::isGammaAngleEqualTo (double & gammaAngle, double angle) [private]

Check if the angle of the line (gamma(p) p) or its opposite angle is equal to the given angle.

Parameters


<i>gammaAngle</i>	Angle of the line (gamma(p) p)
<i>angle</i>	Angle to compare against

Definition at line 300 of file MinEnclosingTriangleFinder.cpp.


References multiscale::Numeric::almostEqual().

Referenced by intersects().

Here is the call graph for this function:



Here is the caller graph for this function:



7.24.3.24 bool MinEnclosingTriangleFinder::isLocalMinimalTriangle() [private]

Update the triangle vertices after all sides were set and check if a local minimal triangle was found or not.


See paper for more details

Definition at line 184 of file MinEnclosingTriangleFinder.cpp.


References isValidMinimalTriangle(), multiscale::Geometry2D::lineIntersection(), sideAEndVertex, sideAStartVertex, sideBEndVertex, sideBStartVertex, sideCEndVertex, sideCStartVertex, vertexA, vertexB, and vertexC.

Referenced by findMinEnclosingTriangle().

Here is the call graph for this function:

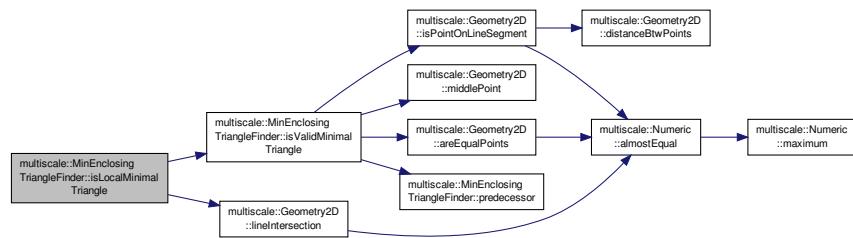

Here is the caller graph for this function:



7.24.3.25 bool MinEnclosingTriangleFinder::isNotBTangency() [private]

Check if tangency for side B was not obtained.


See paper for more details

Definition at line 138 of file MinEnclosingTriangleFinder.cpp.


References a, b, gamma(), height(), intersectsAbove(), and predecessor().

Referenced by findMinEnclosingTriangle().

Here is the call graph for this function:

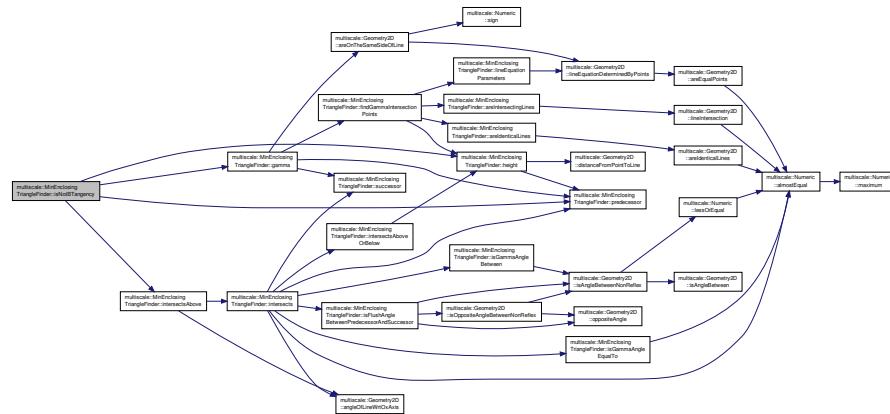

Here is the caller graph for this function:



7.24.3.26 bool MinEnclosingTriangleFinder::isValidMinimalTriangle () [private]

Check if the found minimal triangle is valid.

This means that all midpoints of the triangle should touch the polygon.


See paper for more details

Definition at line 194 of file MinEnclosingTriangleFinder.cpp.


References a, multiscale::Geometry2D::areEqualPoints(), b, multiscale::Geometry2D::isPointOnLineSegment(), multiscale::Geometry2D::middlePoint(), polygon, predecessor(), sideAEndVertex, sideAStartVertex, sideBEndVertex, sideBStartVertex, sideCEndVertex, sideCStartVertex, VALIDATION_SIDE_A_TANGENT, VALIDATION_SIDE_B_TANGENT, validationFlag, vertexA, vertexB, and vertexC.

Referenced by `isLocalMinimalTriangle()`.

Here is the call graph for this function:

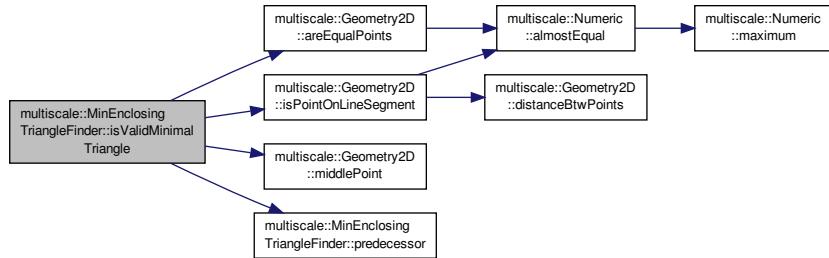

Here is the caller graph for this function:



7.24.3.27 `vector< double > MinEnclosingTriangleFinder::lineEquationParameters (const Point2f & p, const Point2f & q)`
[private]

Get the line equation parameters "a", "b" and "c" for the line determined by points "p" and "q".

The equation of the line is considered in the general form: $ax + by + c = 0$

Parameters

<code>p</code>	One point for defining the equation of the line
<code>q</code>	Second point for defining the equation of the line

Definition at line 401 of file MinEnclosingTriangleFinder.cpp.


References a, b, c, and multiscale::Geometry2D::lineEquationDeterminedByPoints().

Referenced by findGammalIntersectionPoints().

Here is the call graph for this function:



Here is the caller graph for this function:

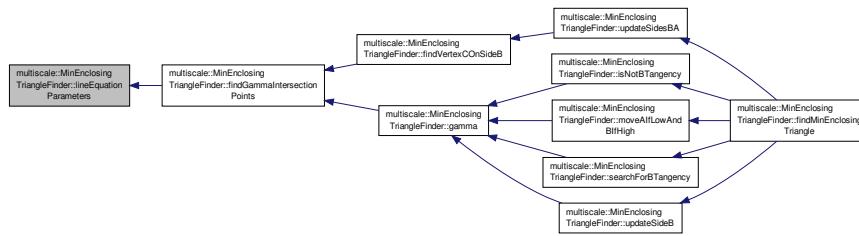

7.24.3.28 bool MinEnclosingTriangleFinder::middlePointOfSideB (Point2f & *middlePointOfSideB*) [private]


Return the middle point of side B.

Definition at line 226 of file MinEnclosingTriangleFinder.cpp.

References multiscale::Geometry2D::lineIntersection(), multiscale::Geometry2D::middlePoint(), sideAEndVertex, sideAStartVertex, sideBEndVertex, sideBStartVertex, sideCEndVertex, sideCStartVertex, vertexA, and vertexC.

Referenced by updateSidesBA().

Here is the call graph for this function:



Here is the caller graph for this function:



7.24.3.29 void MinEnclosingTriangleFinder::moveAIfLowAndBIfHigh () [private]

Move "a" if it is low and "b" if it is high.


See paper for more details

Definition at line 117 of file MinEnclosingTriangleFinder.cpp.


References a, advance(), b, gamma(), height(), and intersectsBelow().

Referenced by findMinEnclosingTriangle().

Here is the call graph for this function:

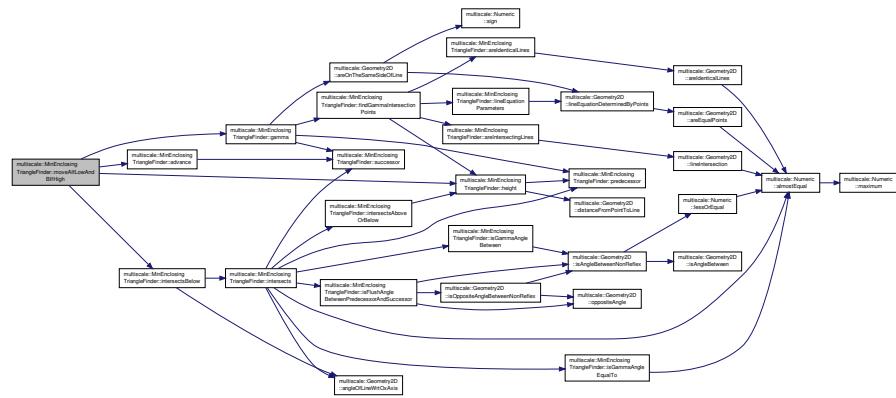

Here is the caller graph for this function:



7.24.3.30 `unsigned int MinEnclosingTriangleFinder::predecessor (unsigned int index)` [private]

Return the predecessor of the provided point index.

The predecessor of the first polygon point is the last polygon point (circular referencing)

Parameters


<i>index</i>	Index of the point
--------------	--------------------

Definition at line 422 of file MinEnclosingTriangleFinder.cpp.

References nrOfPoints.

Referenced by `findVertexCOnSideB()`, `gamma()`, `height()`, `intersects()`, `isNotBTangency()`, `isValidMinimalTriangle()`, `searchForBTangency()`, `updateSidesBA()`, and `updateSidesCA()`.

Here is the caller graph for this function:

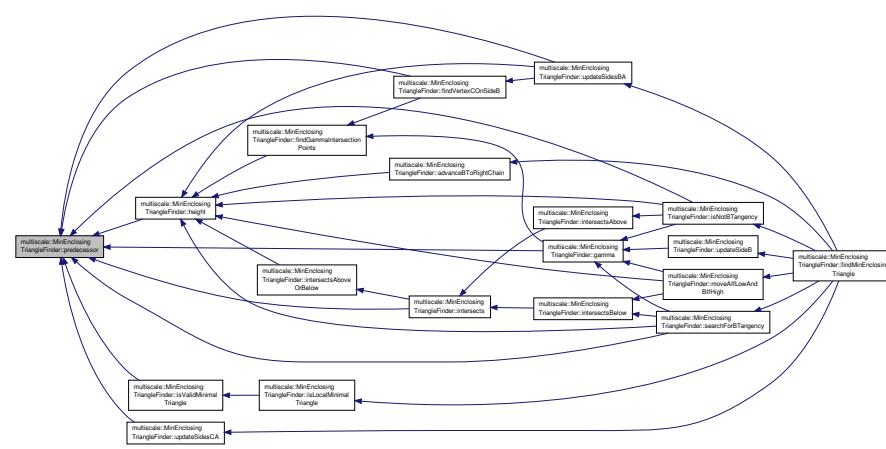

7.24.3.31 `double MinEnclosingTriangleFinder::returnMinEnclosingTriangle (const vector< Point2f > & polygon, vector< Point2f > & minEnclosingTriangle) [private]`

Return the minimum area enclosing triangle in case the given polygon has at most three points.

Parameters


<code>polygon</code>	Polygon of points for which the minimum area enclosing triangle will be found
<code>minEnclosingTriangle</code>	Minimum area triangle enclosing the given polygon

Definition at line 71 of file MinEnclosingTriangleFinder.cpp.


References `multiscale::Geometry2D::areaOfTriangle()`.

Referenced by `findMinTriangle()`.

Here is the call graph for this function:



Here is the caller graph for this function:

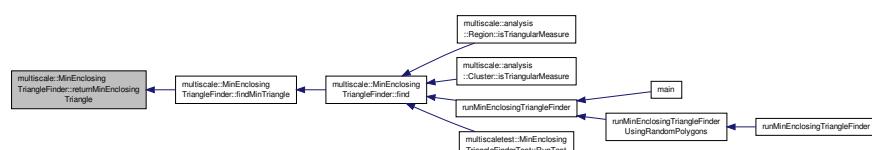

7.24.3.32 void MinEnclosingTriangleFinder::searchForBTangency() [private]

Search for the tangency of side B.


See paper for more details

Definition at line 129 of file MinEnclosingTriangleFinder.cpp.


References a, advance(), b, gamma(), multiscale::Numeric::greaterOrEqual(), height(), intersectsBelow(), and predecessor().

Referenced by `findMinEnclosingTriangle()`.

Here is the call graph for this function:

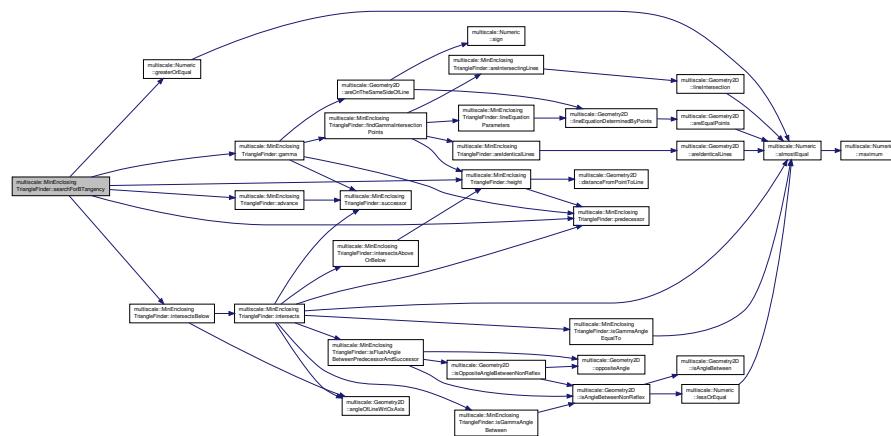

Here is the caller graph for this function:



7.24.3.33 `unsigned int MinEnclosingTriangleFinder::successor (unsigned int index)` [private]

Return the successor of the provided point index.

The successor of the last polygon point is the first polygon point (circular referencing).

Parameters


<i>index</i>	Index of the point
--------------	--------------------

Definition at line 418 of file MinEnclosingTriangleFinder.cpp.

References nrOfPoints.

Referenced by `advance()`, `advanceBToRightChain()`, `findVertexCOnSideB()`, `gamma()`, and `intersects()`.

Here is the caller graph for this function:

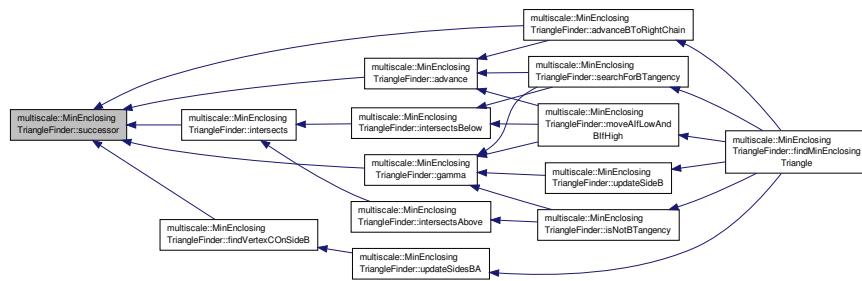

7.24.3.34 `void MinEnclosingTriangleFinder::updateMinEnclosingTriangle (vector< Point2f > & minEnclosingTriangle, double & minEnclosingTriangleArea) [private]`

Update the current minimum area enclosing triangle if the newly obtained one has a smaller area.

Parameters


<code>minEnclosingTriangle</code>	Minimum area triangle enclosing the given polygon
<code>minEnclosingTriangleArea</code>	Area of the minimum area triangle enclosing the given polygon

Definition at line 212 of file `MinEnclosingTriangleFinder.cpp`.


References `area`, `multiscale::Geometry2D::areaOfTriangle()`, `vertexA`, `vertexB`, and `vertexC`.

Referenced by `findMinEnclosingTriangle()`.

Here is the call graph for this function:



Here is the caller graph for this function:



7.24.3.35 void MinEnclosingTriangleFinder::updateSideB() [private]

Set side B if tangency for side B was obtained.


See paper for more details

Definition at line 174 of file MinEnclosingTriangleFinder.cpp.


References b, ERR_SIDE_B_GAMMA, gamma(), MS_throw, polygon, sideBEndVertex, sideBStartVertex, VALIDATION_SIDE_B_TANGENT, and validationFlag.

Referenced by findMinEnclosingTriangle().

Here is the call graph for this function:

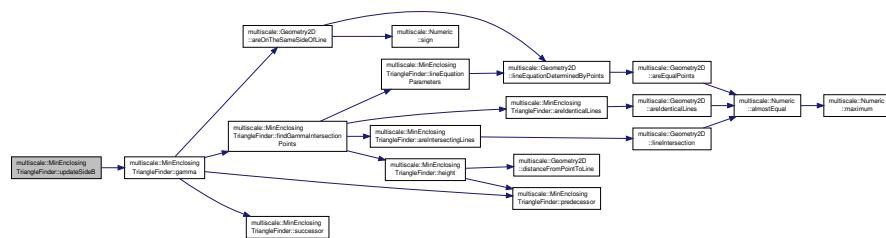

Here is the caller graph for this function:



7.24.3.36 void MinEnclosingTriangleFinder::updateSidesBA() [private]

Update sides B and possibly A if tangency for side B was not obtained.


See paper for more details

Definition at line 156 of file MinEnclosingTriangleFinder.cpp.


References a, b, findVertexCOnSideB(), height(), middlePointOfSideB(), polygon, predecessor(), sideAEndVertex, sideAStartVertex, sideBEndVertex, sideBStartVertex, VALIDATION_SIDE_A_TANGENT, VALIDATION_SIDES_FLUSH, and validationFlag.

Referenced by findMinEnclosingTriangle().

Here is the call graph for this function:

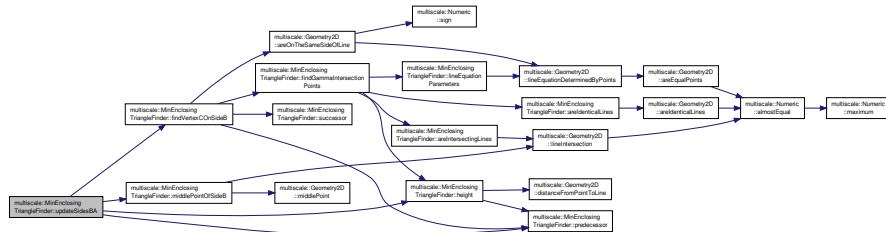

Here is the caller graph for this function:



7.24.3.37 void MinEnclosingTriangleFinder::updateSidesCA() [private]

Update sides A and C.


Side C will have as start and end vertices the polygon points "c" and "c-1" Side A will have as start and end vertices the polygon points "a" and "a-1"

Definition at line 148 of file MinEnclosingTriangleFinder.cpp.


References a, c, polygon, predecessor(), sideAEndVertex, sideAStartVertex, sideCEndVertex, and sideCStartVertex.

Referenced by findMinEnclosingTriangle().

Here is the call graph for this function:



Here is the caller graph for this function:



7.24.4 Member Data Documentation

7.24.4.1 `unsigned int multiscale::MinEnclosingTriangleFinder::a` [private]

Index of point "a"; see paper for more details

Definition at line 45 of file MinEnclosingTriangleFinder.hpp.

Referenced by `findVertexCOnSideB()`, `gamma()`, `initialiseAlgorithmVariables()`, `isNotBTangency()`, `isValidMinimalTriangle()`, `lineEquationParameters()`, `MinEnclosingTriangleFinder()`, `moveAIfLowAndBIfHigh()`, `searchForBTangency()`, `updateSidesBA()`, and `updateSidesCA()`.

7.24.4.2 `double multiscale::MinEnclosingTriangleFinder::area` [private]

Area of the current considered enclosing triangle

Definition at line 43 of file MinEnclosingTriangleFinder.hpp.

Referenced by `MinEnclosingTriangleFinder()`, and `updateMinEnclosingTriangle()`.

7.24.4.3 `unsigned int multiscale::MinEnclosingTriangleFinder::b` [private]

Index of point "b"; see paper for more details

Definition at line 46 of file MinEnclosingTriangleFinder.hpp.

Referenced by `advanceBToRightChain()`, `initialiseAlgorithmVariables()`, `isNotBTangency()`, `isValidMinimalTriangle()`, `lineEquationParameters()`, `MinEnclosingTriangleFinder()`, `moveAIfLowAndBIfHigh()`, `searchForBTangency()`, `updateSideB()`, and `updateSidesBA()`.

7.24.4.4 `unsigned int multiscale::MinEnclosingTriangleFinder::c` [private]

Index of point "c"; see paper for more details

Definition at line 47 of file MinEnclosingTriangleFinder.hpp.

Referenced by `findMinEnclosingTriangle()`, `findVertexCOnSideB()`, `gamma()`, `height()`, `initialiseAlgorithmVariables()`, `intersects()`, `lineEquationParameters()`, `MinEnclosingTriangleFinder()`, and `updateSidesCA()`.

7.24.4.5 `const bool MinEnclosingTriangleFinder::CONVEX_HULL_CLOCKWISE = true` [static], [private]

Definition at line 360 of file MinEnclosingTriangleFinder.hpp.

Referenced by `initialiseConvexPolygon()`.

7.24.4.6 `const string MinEnclosingTriangleFinder::ERR_MIDPOINT_SIDE_B = "The position of the middle point of side B could not be determined." [static], [private]`

Definition at line 368 of file MinEnclosingTriangleFinder.hpp.

7.24.4.7 `const string MinEnclosingTriangleFinder::ERR_NR_POINTS = "The number of 2D points in the input vector should be greater than 0." [static], [private]`

Definition at line 367 of file MinEnclosingTriangleFinder.hpp.

Referenced by `find()`.

7.24.4.8 `const string MinEnclosingTriangleFinder::ERR_SIDE_B_GAMMA = "The position of side B could not be determined, because gamma(b) could not be computed." [static], [private]`

Definition at line 369 of file MinEnclosingTriangleFinder.hpp.

Referenced by `updateSideB()`.

7.24.4.9 `const string MinEnclosingTriangleFinder::ERR_TRIANGLE_VERTICES = "The position of the triangle vertices could not be determined, because the sides of the triangle do not intersect." [static], [private]`

Definition at line 371 of file MinEnclosingTriangleFinder.hpp.

7.24.4.10 `const string MinEnclosingTriangleFinder::ERR_VERTEX_C_ON_SIDE_B = "The position of the vertex C on side B could not be determined, because the considered lines do not intersect." [static], [private]`

Definition at line 370 of file MinEnclosingTriangleFinder.hpp.

Referenced by `findVertexCOnSideB()`.

7.24.4.11 `const unsigned int MinEnclosingTriangleFinder::INTERSECTS ABOVE = 2 [static], [private]`

Definition at line 363 of file MinEnclosingTriangleFinder.hpp.

Referenced by `intersectsAbove()`, and `intersectsAboveOrBelow()`.

7.24.4.12 `const unsigned int MinEnclosingTriangleFinder::INTERSECTS BELOW = 1 [static], [private]`

Definition at line 362 of file MinEnclosingTriangleFinder.hpp.

Referenced by `intersects()`, `intersectsAboveOrBelow()`, and `intersectsBelow()`.

7.24.4.13 `const unsigned int MinEnclosingTriangleFinder::INTERSECTS CRITICAL = 3 [static], [private]`

Definition at line 364 of file MinEnclosingTriangleFinder.hpp.

Referenced by `intersects()`.

7.24.4.14 `const unsigned int MinEnclosingTriangleFinder::INTERSECTS LIMIT = 4 [static], [private]`

Definition at line 365 of file MinEnclosingTriangleFinder.hpp.

7.24.4.15 `unsigned int multiscale::MinEnclosingTriangleFinder::nrOfPoints` [private]

Number of points defining the polygon

Definition at line 49 of file MinEnclosingTriangleFinder.hpp.

Referenced by `findMinEnclosingTriangle()`, `initialiseAlgorithmVariables()`, `MinEnclosingTriangleFinder()`, `predecessor()`, and `successor()`.

7.24.4.16 `vector<Point2f> multiscale::MinEnclosingTriangleFinder::polygon` [private]

Polygon for which the minimum area enclosing triangle is computed

Definition at line 51 of file MinEnclosingTriangleFinder.hpp.

Referenced by `findMinTriangle()`, `findVertexCOnSideB()`, `gamma()`, `height()`, `initialiseAlgorithmVariables()`, `initialiseConvexPolygon()`, `intersects()`, `intersectsAbove()`, `intersectsBelow()`, `isValidMinimalTriangle()`, `updateSideB()`, `updateSidesBA()`, and `updateSidesCA()`.

7.24.4.17 `Point2f multiscale::MinEnclosingTriangleFinder::sideAEndVertex` [private]

Ending vertex for side A of triangle

Definition at line 35 of file MinEnclosingTriangleFinder.hpp.

Referenced by `isLocalMinimalTriangle()`, `isValidMinimalTriangle()`, `middlePointOfSideB()`, `updateSidesBA()`, and `updateSidesCA()`.

7.24.4.18 `Point2f multiscale::MinEnclosingTriangleFinder::sideAStartVertex` [private]

Starting vertex for side A of triangle

Definition at line 34 of file MinEnclosingTriangleFinder.hpp.

Referenced by `isLocalMinimalTriangle()`, `isValidMinimalTriangle()`, `middlePointOfSideB()`, `updateSidesBA()`, and `updateSidesCA()`.

7.24.4.19 `Point2f multiscale::MinEnclosingTriangleFinder::sideBEndVertex` [private]

Ending vertex for side B of triangle

Definition at line 38 of file MinEnclosingTriangleFinder.hpp.

Referenced by `findVertexCOnSideB()`, `isLocalMinimalTriangle()`, `isValidMinimalTriangle()`, `middlePointOfSideB()`, `updateSideB()`, and `updateSidesBA()`.

7.24.4.20 `Point2f multiscale::MinEnclosingTriangleFinder::sideBStartVertex` [private]

Starting vertex for side B of triangle

Definition at line 37 of file MinEnclosingTriangleFinder.hpp.

Referenced by `findVertexCOnSideB()`, `isLocalMinimalTriangle()`, `isValidMinimalTriangle()`, `middlePointOfSideB()`, `updateSideB()`, and `updateSidesBA()`.

7.24.4.21 `Point2f multiscale::MinEnclosingTriangleFinder::sideCEndVertex` [private]

Ending vertex for side C of triangle

Definition at line 41 of file MinEnclosingTriangleFinder.hpp.

Referenced by `findVertexCOnSideB()`, `isLocalMinimalTriangle()`, `isValidMinimalTriangle()`, `middlePointOfSideB()`, and `updateSidesCA()`.

7.24.4.22 `Point2f multiscale::MinEnclosingTriangleFinder::sideCStartVertex` [private]

Starting vertex for side C of triangle

Definition at line 40 of file `MinEnclosingTriangleFinder.hpp`.

Referenced by `findVertexCOnSideB()`, `isLocalMinimalTriangle()`, `isValidMinimalTriangle()`, `middlePointOfSideB()`, and `updateSidesCA()`.

7.24.4.23 `const unsigned int MinEnclosingTriangleFinder::VALIDATION_SIDE_A_TANGENT = 0` [static], [private]

Definition at line 373 of file `MinEnclosingTriangleFinder.hpp`.

Referenced by `isValidMinimalTriangle()`, and `updateSidesBA()`.

7.24.4.24 `const unsigned int MinEnclosingTriangleFinder::VALIDATION_SIDE_B_TANGENT = 1` [static], [private]

Definition at line 374 of file `MinEnclosingTriangleFinder.hpp`.

Referenced by `isValidMinimalTriangle()`, and `updateSideB()`.

7.24.4.25 `const unsigned int MinEnclosingTriangleFinder::VALIDATION_SIDES_FLUSH = 2` [static], [private]

Definition at line 375 of file `MinEnclosingTriangleFinder.hpp`.

Referenced by `updateSidesBA()`.

7.24.4.26 `unsigned int multiscale::MinEnclosingTriangleFinder::validationFlag` [private]

Validation flag can take the following values:

- `VALIDATION_SIDE_A_TANGENT`;
- `VALIDATION_SIDE_B_TANGENT`;
- `VALIDATION_SIDES_FLUSH`.

Definition at line 24 of file `MinEnclosingTriangleFinder.hpp`.

Referenced by `isValidMinimalTriangle()`, `MinEnclosingTriangleFinder()`, `updateSideB()`, and `updateSidesBA()`.

7.24.4.27 `Point2f multiscale::MinEnclosingTriangleFinder::vertexA` [private]

Vertex A of the current considered enclosing triangle

Definition at line 30 of file `MinEnclosingTriangleFinder.hpp`.

Referenced by `isLocalMinimalTriangle()`, `isValidMinimalTriangle()`, `middlePointOfSideB()`, and `updateMinEnclosingTriangle()`.

7.24.4.28 `Point2f multiscale::MinEnclosingTriangleFinder::vertexB` [private]

Vertex B of the current considered enclosing triangle

Definition at line 31 of file `MinEnclosingTriangleFinder.hpp`.

Referenced by `isLocalMinimalTriangle()`, `isValidMinimalTriangle()`, and `updateMinEnclosingTriangle()`.

7.24.4.29 Point2f multiscale::MinEnclosingTriangleFinder::vertexC [private]

Vertex C of the current considered enclosing triangle

Definition at line 32 of file MinEnclosingTriangleFinder.hpp.

Referenced by isLocalMinimalTriangle(), isValidMinimalTriangle(), middlePointOfSideB(), and updateMinEnclosingTriangle().

The documentation for this class was generated from the following files:


- modules/util/include/multiscale/util/[MinEnclosingTriangleFinder.hpp](#)
- modules/util/src/[MinEnclosingTriangleFinder.cpp](#)

7.25 multiscale::MinEnclosingTriangleFinderException Class Reference


Exception class for the minimum area enclosing triangle module.

```
#include <MinEnclosingTriangleFinderException.hpp>
```

Inheritance diagram for multiscale::MinEnclosingTriangleFinderException:

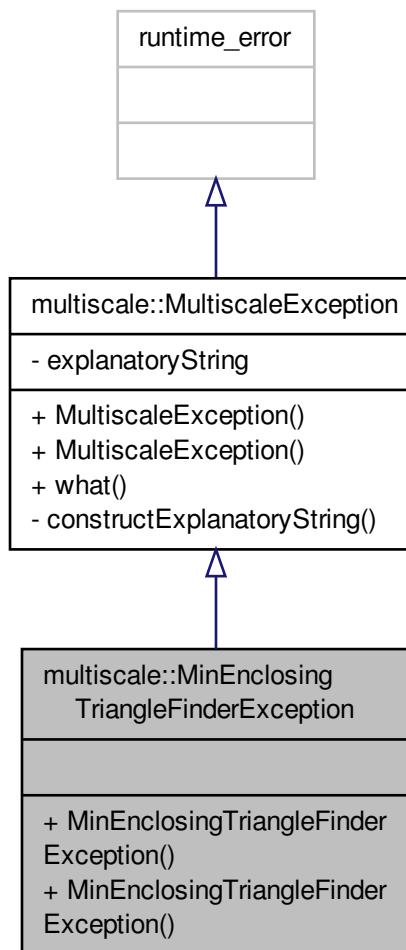

Collaboration diagram for multiscale::MinEnclosingTriangleFinderException:

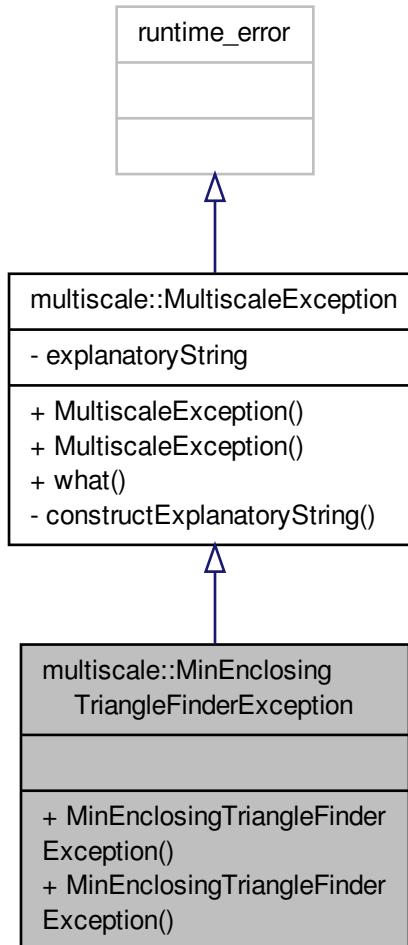

Public Member Functions

- [MinEnclosingTriangleFinderException](#) (const string &file, int line, const string &msg)
- [MinEnclosingTriangleFinderException](#) (const string &file, int line, const char *msg)

7.25.1 Detailed Description

Exception class for the minimum area enclosing triangle module.

Definition at line 14 of file `MinEnclosingTriangleFinderException.hpp`.

7.25.2 Constructor & Destructor Documentation

7.25.2.1 `multiscale::MinEnclosingTriangleFinderException::MinEnclosingTriangleFinderException (const string & file, int line, const string & msg) [inline]`

Definition at line 18 of file `MinEnclosingTriangleFinderException.hpp`.

7.25.2.2 `multiscale::MinEnclosingTriangleFinderException::MinEnclosingTriangleFinderException (const string & file, int line, const char * msg) [inline]`

Definition at line 20 of file `MinEnclosingTriangleFinderException.hpp`.


The documentation for this class was generated from the following file:

- [include/multiscale/exception/MinEnclosingTriangleFinderException.hpp](#)


7.26 multiscaletest::MinEnclosingTriangleFinderTest Class Reference

Class for testing the minimum enclosing triangle algorithm.

Inheritance diagram for multiscaletest::MinEnclosingTriangleFinderTest:

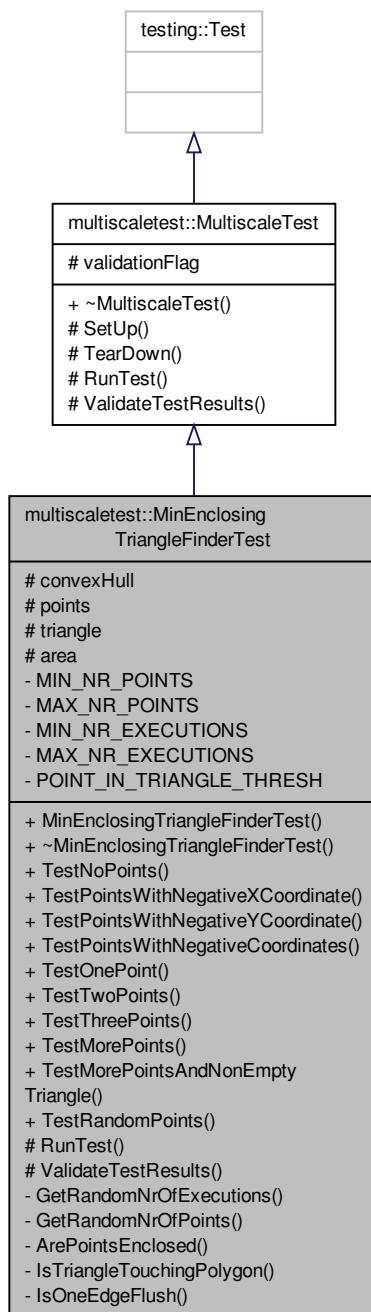

Collaboration diagram for multiscaletest::MinEnclosingTriangleFinderTest:

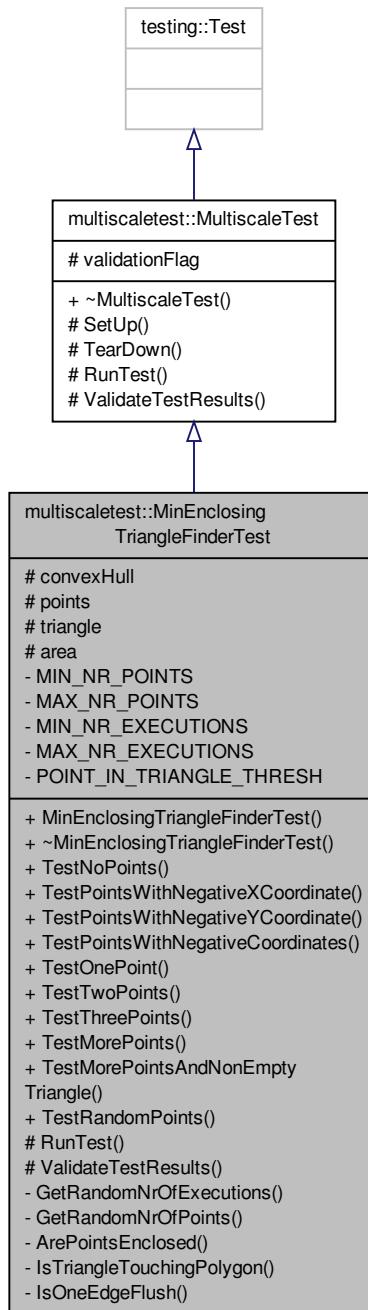

Public Member Functions

- [MinEnclosingTriangleFinderTest \(\)](#)
- [~MinEnclosingTriangleFinderTest \(\)](#)
- [bool TestNoPoints \(\)](#)

Test the scenario when an empty vector of points is provided.

- [bool TestPointsWithNegativeXCoordinate \(\)](#)

- `bool TestPointsWithNegativeYCoordinate ()`

Test the scenario when there exists at least one point with negative x coordinate.
- `bool TestPointsWithNegativeCoordinates ()`

Test the scenario when there exists at least one point with negative y coordinate.
- `bool TestOnePoint ()`

Test the scenario when there exists at least one point with negative coordinates.
- `bool TestTwoPoints ()`

Test the scenario when only one input point is provided.
- `bool TestThreePoints ()`

Test the scenario when only two input points are provided.
- `bool TestMorePoints ()`

Test the scenario when only three input points are provided.
- `bool TestMorePointsAndNonEmptyTriangle ()`

Test the scenario when more than three input points are provided.
- `bool TestRandomPoints ()`

Test the scenario when the output vector is not empty.
- `bool TestRandomPointsWithRandomInput ()`

Test the scenario when randomly initialised vectors of input points are provided.

Protected Member Functions

- `void RunTest () override`

Run the test for the given set of points.
- `void ValidateTestResults () override`

Check if the obtained results are valid.

Protected Attributes

- `vector< Point2f > convexHull`
- `vector< Point2f > points`
- `vector< Point2f > triangle`
- `double area`

Private Member Functions

- `int GetRandomNrOfExecutions ()`

Get a random number of executions.
- `int GetRandomNrOfPoints ()`

Get a random number of points.
- `bool ArePointsEnclosed ()`

Check if all the points are enclosed by the polygon.
- `bool IsTriangleTouchingPolygon ()`

Check if the triangle's middle points are touching the polygon.
- `bool IsOneEdgeFlush ()`

Check if at least one of the triangle sides is flush with a polygon edge.

Static Private Attributes

- `static const int MIN_NR_POINTS = 1`
- `static const int MAX_NR_POINTS = 10000`
- `static const int MIN_NR_EXECUTIONS = 5000`
- `static const int MAX_NR_EXECUTIONS = 10000`
- `static const double POINT_IN_TRIANGLE_THRESH = 1E-4`

7.26.1 Detailed Description

Class for testing the minimum enclosing triangle algorithm.

Definition at line 16 of file MinEnclosingTriangleFinderTest.cpp.

7.26.2 Constructor & Destructor Documentation

7.26.2.1 multiscaletest::MinEnclosingTriangleFinderTest::MinEnclosingTriangleFinderTest()

Definition at line 98 of file MinEnclosingTriangleFinderTest.cpp.

7.26.2.2 multiscaletest::MinEnclosingTriangleFinderTest::~MinEnclosingTriangleFinderTest()

Definition at line 103 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3 Member Function Documentation

7.26.3.1 bool multiscaletest::MinEnclosingTriangleFinderTest::ArePointsEnclosed() [private]

Check if all the points are enclosed by the polygon.

Definition at line 238 of file MinEnclosingTriangleFinderTest.cpp.

References POINT_IN_TRIANGLE_THRESH.

7.26.3.2 int multiscaletest::MinEnclosingTriangleFinderTest::GetRandomNrOfExecutions() [private]

Get a random number of executions.

Definition at line 228 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3.3 int multiscaletest::MinEnclosingTriangleFinderTest::GetRandomNrOfPoints() [private]

Get a random number of points.

Definition at line 233 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3.4 bool multiscaletest::MinEnclosingTriangleFinderTest::IsOneEdgeFlush() [private]

Check if at least one of the triangle sides is flush with a polygon edge.

Definition at line 274 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3.5 bool multiscaletest::MinEnclosingTriangleFinderTest::IsTriangleTouchingPolygon() [private]

Check if the triangle's middle points are touching the polygon.

Definition at line 252 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3.6 void multiscaletest::MinEnclosingTriangleFinderTest::RunTest() [override], [protected], [virtual]


Run the test for the given set of points.

Implements [multiscaletest::MultiscaleTest](#).

Definition at line 214 of file MinEnclosingTriangleFinderTest.cpp.

References multiscale::MinEnclosingTriangleFinder::find().

Here is the call graph for this function:

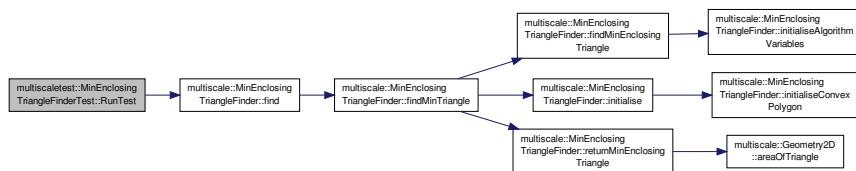

7.26.3.7 bool multiscaletest::MinEnclosingTriangleFinderTest::TestMorePoints ()

Test the scenario when more than three input points are provided.

Definition at line 169 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3.8 bool multiscaletest::MinEnclosingTriangleFinderTest::TestMorePointsAndNonEmptyTriangle ()

Test the scenario when the output vector is not empty.

Definition at line 178 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3.9 bool multiscaletest::MinEnclosingTriangleFinderTest::TestNoPoints ()

Test the scenario when an empty vector of points is provided.

Definition at line 108 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3.10 bool multiscaletest::MinEnclosingTriangleFinderTest::TestOnePoint ()

Test the scenario when only one input point is provided.

Definition at line 142 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3.11 bool multiscaletest::MinEnclosingTriangleFinderTest::TestPointsWithNegativeCoordinates ()

Test the scenario when there exists at least one point with negative coordinates.

Definition at line 133 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3.12 bool multiscaletest::MinEnclosingTriangleFinderTest::TestPointsWithNegativeXCoordinate ()

Test the scenario when there exists at least one point with negative x coordinate.

Definition at line 115 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3.13 bool multiscaletest::MinEnclosingTriangleFinderTest::TestPointsWithNegativeYCoordinate ()

Test the scenario when there exists at least one point with negative y coordinate.

Definition at line 124 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3.14 `bool multiscaletest::MinEnclosingTriangleFinderTest::TestRandomPoints()`

Test the scenario when randomly initialised vectors of input points are provided.

Definition at line 189 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3.15 `bool multiscaletest::MinEnclosingTriangleFinderTest::TestThreePoints()`

Test the scenario when only three input points are provided.

Definition at line 160 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3.16 `bool multiscaletest::MinEnclosingTriangleFinderTest::TestTwoPoints()`

Test the scenario when only two input points are provided.

Definition at line 151 of file MinEnclosingTriangleFinderTest.cpp.

7.26.3.17 `void multiscaletest::MinEnclosingTriangleFinderTest::ValidateTestResults()` [override], [protected], [virtual]

Check if the obtained results are valid.

Implements [multiscaletest::MultiscaleTest](#).

Definition at line 220 of file MinEnclosingTriangleFinderTest.cpp.

7.26.4 Member Data Documentation

7.26.4.1 `double multiscaletest::MinEnclosingTriangleFinderTest::area` [protected]

Area of the minimum enclosing triangle

Definition at line 24 of file MinEnclosingTriangleFinderTest.cpp.

7.26.4.2 `vector<Point2f> multiscaletest::MinEnclosingTriangleFinderTest::convexHull` [protected]

Convex hull of the 2D point set

Definition at line 20 of file MinEnclosingTriangleFinderTest.cpp.

7.26.4.3 `const int multiscaletest::MinEnclosingTriangleFinderTest::MAX_NR_EXECUTIONS = 10000` [static], [private]

Definition at line 92 of file MinEnclosingTriangleFinderTest.cpp.

7.26.4.4 `const int multiscaletest::MinEnclosingTriangleFinderTest::MAX_NR_POINTS = 10000` [static], [private]

Definition at line 90 of file MinEnclosingTriangleFinderTest.cpp.

7.26.4.5 `const int multiscaletest::MinEnclosingTriangleFinderTest::MIN_NR_EXECUTIONS = 5000` [static], [private]

Definition at line 91 of file MinEnclosingTriangleFinderTest.cpp.

7.26.4.6 `const int multiscaletest::MinEnclosingTriangleFinderTest::MIN_NR_POINTS = 1` [static], [private]

Definition at line 89 of file MinEnclosingTriangleFinderTest.cpp.

7.26.4.7 `const double multiscaletest::MinEnclosingTriangleFinderTest::POINT_IN_TRIANGLE_THRESH = 1E-4` [static], [private]

Definition at line 94 of file MinEnclosingTriangleFinderTest.cpp.

7.26.4.8 `vector<Point2f> multiscaletest::MinEnclosingTriangleFinderTest::points` [protected]

Collection of 2D points

Definition at line 22 of file MinEnclosingTriangleFinderTest.cpp.

7.26.4.9 `vector<Point2f> multiscaletest::MinEnclosingTriangleFinderTest::triangle` [protected]

Minimum enclosing triangle

Definition at line 23 of file MinEnclosingTriangleFinderTest.cpp.

The documentation for this class was generated from the following file:


- `modules/util/test/MinEnclosingTriangleFinderTest.cpp`

7.27 multiscale::MultiscaleException Class Reference


Parent exception class for the project.

```
#include <MultiscaleException.hpp>
```

Inheritance diagram for multiscale::MultiscaleException:



Collaboration diagram for multiscale::MultiscaleException:

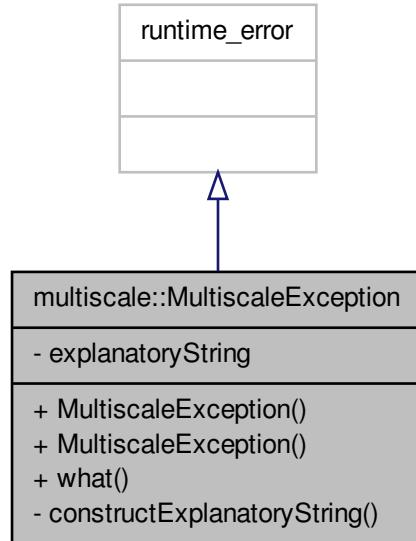

Public Member Functions

- [MultiscaleException](#) (const string &file, int line, const string &msg)
- [MultiscaleException](#) (const string &file, int line, const char *msg)
- const char * [what](#) () const noexcept

Returns an explanatory string.

Private Member Functions

- template<typename T >
void [constructExplanatoryString](#) (const string &file, int line, T msg)

Construct the explanatory string.

Private Attributes

- string [explanatoryString](#)

7.27.1 Detailed Description

Parent exception class for the project.

Definition at line 18 of file MultiscaleException.hpp.

7.27.2 Constructor & Destructor Documentation

7.27.2.1 `multiscale::MultiscaleException::MultiscaleException (const string & file, int line, const string & msg)`
 [inline], [explicit]

Definition at line 27 of file MultiscaleException.hpp.

7.27.2.2 `multiscale::MultiscaleException::MultiscaleException (const string & file, int line, const char * msg)` [inline],
 [explicit]

Definition at line 32 of file MultiscaleException.hpp.

7.27.3 Member Function Documentation

7.27.3.1 `template<typename T > void multiscale::MultiscaleException::constructExplanatoryString (const string & file, int line, T msg)` [inline], [private]

Construct the explanatory string.

Parameters

<i>file</i>	File where the error occurred
<i>line</i>	Line number where the error occurred
<i>msg</i>	Error message

Definition at line 50 of file MultiscaleException.hpp.

7.27.3.2 `const char* multiscale::MultiscaleException::what () const` [inline], [noexcept]

Returns an explanatory string.

Definition at line 37 of file MultiscaleException.hpp.

7.27.4 Member Data Documentation

7.27.4.1 `string multiscale::MultiscaleException::explanatoryString` [private]

Definition at line 22 of file MultiscaleException.hpp.


The documentation for this class was generated from the following file:

- [include/multiscale/exception/MultiscaleException.hpp](#)


7.28 multiscaletest::MultiscaleTest Class Reference

#include <MultiscaleTest.hpp>

Inheritance diagram for multiscaletest::MultiscaleTest:

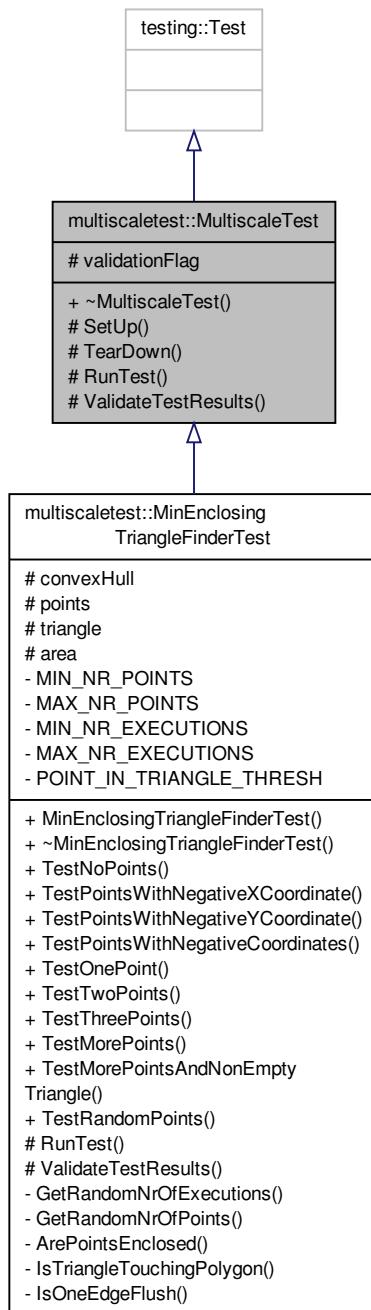

Collaboration diagram for multiscaletest::MultiscaleTest:

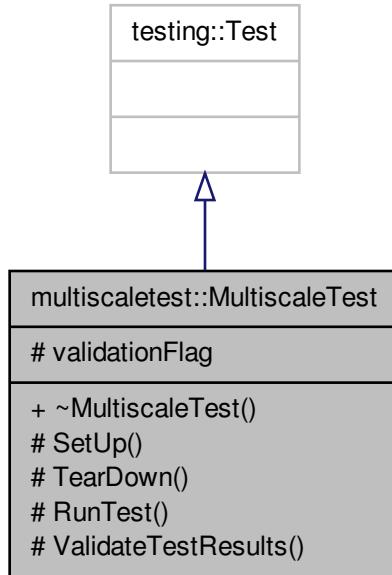

Public Member Functions

- virtual [~MultiscaleTest \(\)](#)

Protected Member Functions

- virtual void [SetUp \(\)](#)
- virtual void [TearDown \(\)](#)
- virtual void [RunTest \(\)=0](#)

Run the test.
- virtual void [ValidateTestResults \(\)=0](#)

Validate the results of the test.

Protected Attributes

- bool [validationFlag](#)

7.28.1 Detailed Description

Definition at line 8 of file MultiscaleTest.hpp.

7.28.2 Constructor & Destructor Documentation

7.28.2.1 `virtual multiscaletest::MultiscaleTest::~MultiscaleTest()` [inline], [virtual]

Definition at line 16 of file MultiscaleTest.hpp.

7.28.3 Member Function Documentation

7.28.3.1 `virtual void multiscaletest::MultiscaleTest::RunTest()` [protected], [pure virtual]

Run the test.

Implemented in [multiscaletest::MinEnclosingTriangleFinderTest](#).

7.28.3.2 `virtual void multiscaletest::MultiscaleTest::SetUp()` [inline], [protected], [virtual]

Definition at line 20 of file MultiscaleTest.hpp.

7.28.3.3 `virtual void multiscaletest::MultiscaleTest::TearDown()` [inline], [protected], [virtual]

Definition at line 21 of file MultiscaleTest.hpp.

7.28.3.4 `virtual void multiscaletest::MultiscaleTest::ValidateTestResults()` [protected], [pure virtual]

Validate the results of the test.

Implemented in [multiscaletest::MinEnclosingTriangleFinderTest](#).

7.28.4 Member Data Documentation

7.28.4.1 `bool multiscaletest::MultiscaleTest::validationFlag` [protected]

Flag indicating if the test results are valid

Definition at line 12 of file MultiscaleTest.hpp.

The documentation for this class was generated from the following file:


- `include/multiscale/core/MultiscaleTest.hpp`

7.29 multiscale::NumberIterator Class Reference


Abstract class representing a number iterator.

```
#include <NumberIterator.hpp>
```

Inheritance diagram for multiscale::NumberIterator:

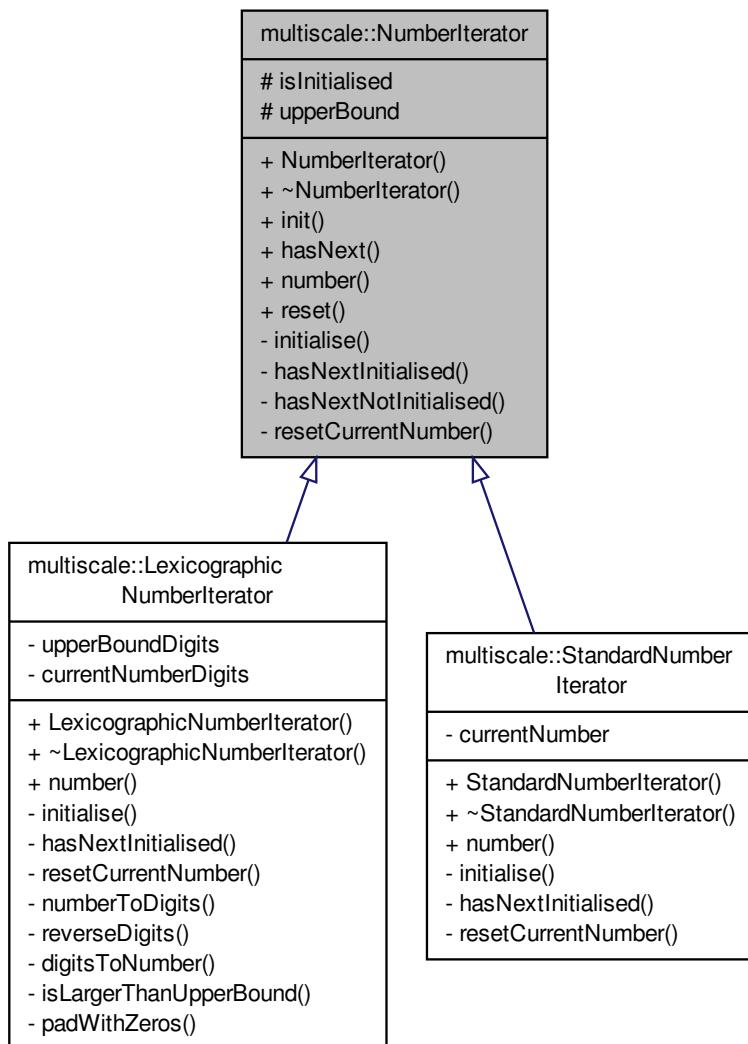

Collaboration diagram for multiscale::NumberIterator:

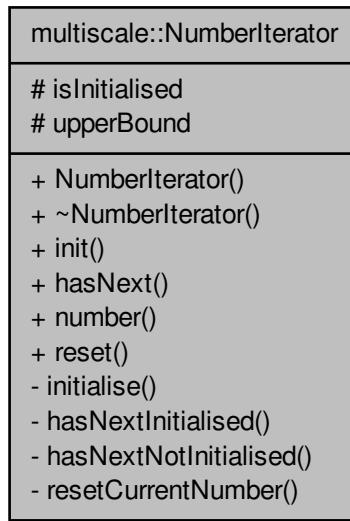

Public Member Functions

- `NumberIterator (unsigned int upperBound)`
- virtual `~NumberIterator ()`
- void `init (unsigned int upperBound)`

Initialise the iterator considering the given upper bound.
- bool `hasNext ()`

Check if there is a next number.
- virtual unsigned int `number ()=0`

Get the number pointed by the iterator.
- void `reset ()`

Reset the iterator.

Protected Attributes

- bool `isInitialised`
- unsigned int `upperBound`

Private Member Functions

- virtual void `initialise ()=0`

Initialisation of the members of the class.
- virtual bool `hasNextInitialised ()=0`

Check if there is a next number when in initialised state.
- bool `hasNextNotInitialised ()`

Check if there is a next number when in not initialised state.
- virtual void `resetCurrentNumber ()=0`

Reset the current number to its initial value.

7.29.1 Detailed Description

Abstract class representing a number iterator.

Definition at line 7 of file NumberIterator.hpp.


7.29.2 Constructor & Destructor Documentation

7.29.2.1 NumberIterator::NumberIterator (*unsigned int upperBound*)

Definition at line 6 of file NumberIterator.cpp.

References init().

Here is the call graph for this function:



7.29.2.2 virtual multiscale::NumberIterator::~NumberIterator() [inline], [virtual]

Definition at line 17 of file NumberIterator.hpp.

7.29.3 Member Function Documentation

7.29.3.1 bool NumberIterator::hasNext()


Check if there is a next number.

Definition at line 14 of file NumberIterator.cpp.


References hasNextInitialised(), hasNextNotInitialised(), and isInitialised.

Referenced by main().

Here is the call graph for this function:

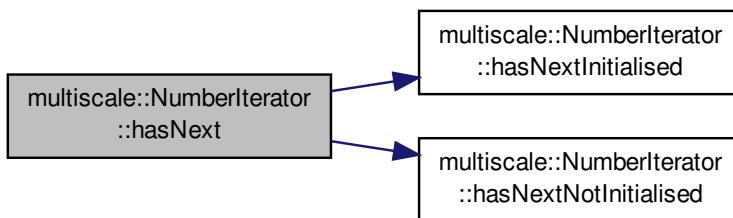

Here is the caller graph for this function:




7.29.3.2 virtual bool multiscale::NumberIterator::hasNextInitialised () [private], [pure virtual]

Check if there is a next number when in initialised state.

Implemented in [multiscale::LexicographicNumberIterator](#), and [multiscale::StandardNumberIterator](#).

Referenced by [hasNext\(\)](#).

Here is the caller graph for this function:



7.29.3.3 bool NumberIterator::hasNextNotInitialised () [private]


Check if there is a next number when in not initialised state.

Definition at line 28 of file [NumberIterator.cpp](#).

References [isInitialised](#).

Referenced by [hasNext\(\)](#).

Here is the caller graph for this function:



7.29.3.4 void NumberIterator::init (unsigned int *upperBound*)

Initialise the iterator considering the given upper bound.

Parameters


<i>upperBound</i>	The upper bound
-------------------	-----------------

Definition at line 10 of file NumberIterator.cpp.

References *upperBound*.

Referenced by *NumberIterator()*.

Here is the caller graph for this function:



7.29.3.5 virtual void multiscale::NumberIterator::initialise() [private], [pure virtual]

Initialisation of the members of the class.

Implemented in [multiscale::LexicographicNumberIterator](#), and [multiscale::StandardNumberIterator](#).

7.29.3.6 virtual unsigned int multiscale::NumberIterator::number() [pure virtual]

Get the number pointed by the iterator.

Implemented in [multiscale::LexicographicNumberIterator](#), and [multiscale::StandardNumberIterator](#).

7.29.3.7 void NumberIterator::reset()

Reset the iterator.


Reset the iterator such that it is not initialised and the value of the current number is reset to its initial value

Definition at line 22 of file NumberIterator.cpp.


References *isInitialised*, and *resetCurrentNumber()*.

Referenced by [multiscale::LexicographicNumberIterator::LexicographicNumberIterator\(\)](#), and [multiscale::StandardNumberIterator::StandardNumberIterator\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:

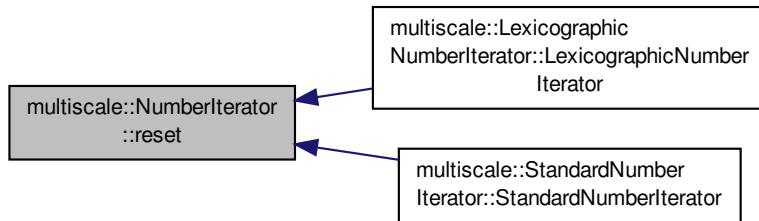


7.29.3.8 virtual void multiscale::NumberIterator::resetCurrentNumber() [private], [pure virtual]

Reset the current number to its initial value.

Implemented in [multiscale::LexicographicNumberIterator](#), and [multiscale::StandardNumberIterator](#).

Referenced by [reset\(\)](#).

Here is the caller graph for this function:

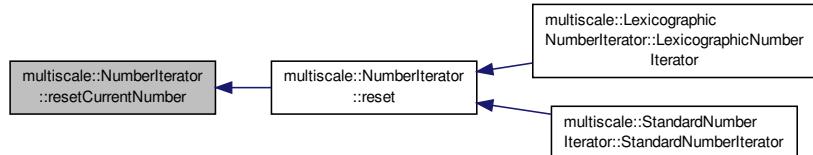

7.29.4 Member Data Documentation

7.29.4.1 bool multiscale::NumberIterator::isInitialised [protected]

Flag for checking if the iterator was initialised

Definition at line 11 of file [NumberIterator.hpp](#).

Referenced by [hasNext\(\)](#), [hasNextNotInitialised\(\)](#), and [reset\(\)](#).

7.29.4.2 unsigned int multiscale::NumberIterator::upperBound [protected]

Upper bound of the iterator

Definition at line 12 of file [NumberIterator.hpp](#).

Referenced by [multiscale::StandardNumberIterator::hasNextInitialised\(\)](#), [init\(\)](#), [multiscale::LexicographicNumberIterator::initialise\(\)](#), and [multiscale::LexicographicNumberIterator::padWithZeros\(\)](#).

The documentation for this class was generated from the following files:

- [modules/util/include/multiscale/util/NumberIterator.hpp](#)


- modules/util/src/NumberIterator.cpp

7.30 multiscale::Numeric Class Reference

Class for manipulating numbers (shorts, ints, floats, doubles etc.)

```
#include <Numeric.hpp>
```

Collaboration diagram for multiscale::Numeric:



Static Public Member Functions

- static bool [greaterOrEqual](#) (double number1, double number2)

Check if the first number is greater than or equal to the second number.
- static bool [lessOrEqual](#) (double number1, double number2)

Check if the first number is less than or equal to the second number.
- static bool [almostEqual](#) (double number1, double number2)

Check if the two numbers are equal (almost)
- static double [maximum](#) (double number1, double number2, double number3)

Return the maximum of the provided numbers.
- static int [sign](#) (double number)

Return the sign of the number.

Static Private Attributes

- static double [epsilon](#) = 1E-5

7.30.1 Detailed Description

Class for manipulating numbers (shorts, ints, floats, doubles etc.)

Definition at line 14 of file Numeric.hpp.

7.30.2 Member Function Documentation

7.30.2.1 `bool Numeric::almostEqual (double number1, double number2) [static]`

Check if the two numbers are equal (almost)

The expression for determining if two real numbers are equal is: if ($\text{Abs}(x - y) \leq \text{EPSILON} * \text{Max}(1.0f, \text{Abs}(x), \text{Abs}(y))$).

Parameters


<code>number1</code>	First number
<code>number2</code>	Second number

Definition at line 17 of file Numeric.cpp.


References `epsilon`, and `maximum()`.

Referenced by `multiscale::Geometry2D::areCollinear()`, `multiscale::Geometry2D::areEqualPoints()`, `multiscale::Geometry2D::areIdenticalLines()`, `greaterOrEqual()`, `multiscale::MinEnclosingTriangleFinder::intersects()`, `multiscale::analysis::Region::isCircularMeasure()`, `multiscale::analysis::Cluster::isCircularMeasure()`, `multiscale::MinEnclosingTriangleFinder::isGammaAngleEqual()`, `multiscale::Geometry2D::isPointOnLineSegment()`, `multiscale::analysis::Region::isRectangularMeasure()`, `multiscale::analysis::Cluster::isRectangularMeasure()`, `multiscale::analysis::Region::isTriangularMeasure()`, `multiscale::analysis::Cluster::isTriangularMeasure()`, `lessOrEqual()`, and `multiscale::Geometry2D::lineIntersection()`.

Here is the call graph for this function:



Here is the caller graph for this function:

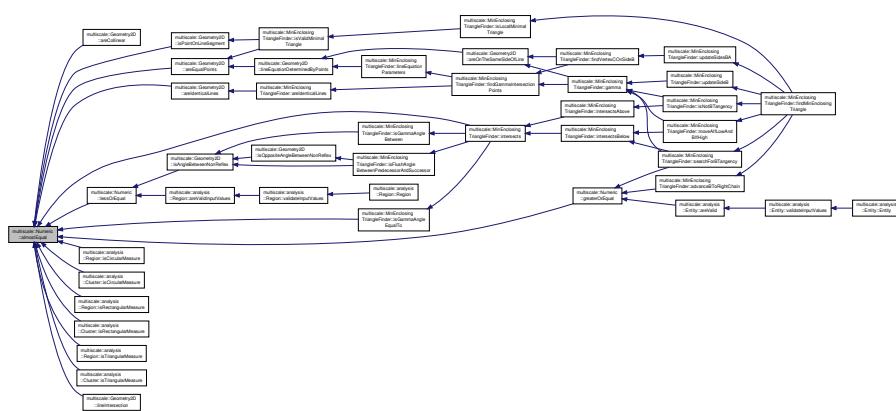

7.30.2.2 `bool Numeric::greaterOrEqual (double number1, double number2) [static]`


Check if the first number is greater than or equal to the second number.

Definition at line 9 of file Numeric.cpp.


References `almostEqual()`.

Referenced by `multiscale::MinEnclosingTriangleFinder::advanceBToRightChain()`, `multiscale::analysis::Entity::isValid()`, and `multiscale::MinEnclosingTriangleFinder::searchForBTangency()`.

Here is the call graph for this function:



Here is the caller graph for this function:

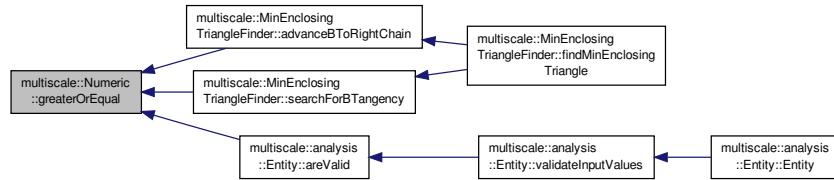

7.30.2.3 `bool Numeric::lessOrEqual (double number1, double number2) [static]`


Check if the first number is less than or equal to the second number.

Definition at line 13 of file Numeric.cpp.


References `almostEqual()`.

Referenced by `multiscale::analysis::Region::isValidInputValues()`, and `multiscale::Geometry2D::isAngleBetweenNonReflex()`.

Here is the call graph for this function:



Here is the caller graph for this function:




7.30.2.4 double Numeric::maximum (double *number1*, double *number2*, double *number3*) [static]

Return the maximum of the provided numbers.

Definition at line 21 of file Numeric.cpp.

Referenced by almostEqual().

Here is the caller graph for this function:

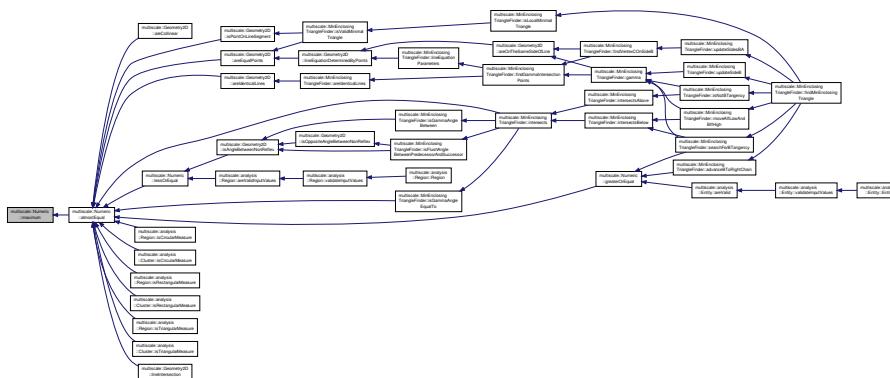

7.30.2.5 int Numeric::sign (double *number*) [static]


Return the sign of the number.

The sign function returns: -1, if number < 0 +1, if number > 0 0, otherwise

Definition at line 25 of file Numeric.cpp.

Referenced by multiscale::Geometry2D::areOnTheSameSideOfLine().

Here is the caller graph for this function:

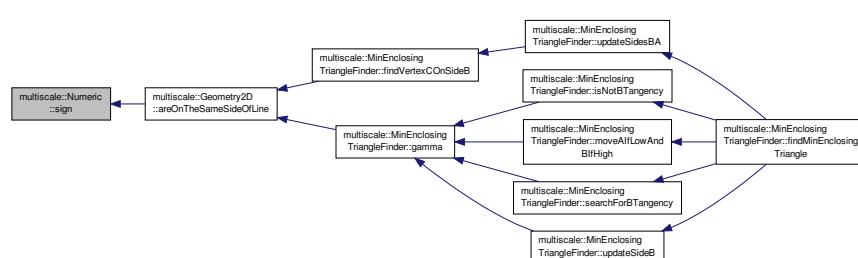

7.30.3 Member Data Documentation

7.30.3.1 double Numeric::epsilon = 1E-5 [static], [private]

Value of epsilon used to compare two real numbers

Definition at line 18 of file Numeric.hpp.

Referenced by almostEqual().

The documentation for this class was generated from the following files:


- modules/util/include/multiscale/util/Numeric.hpp
- modules/util/src/Numeric.cpp

7.31 multiscale::NumericRangeManipulator Class Reference

Operations for ranges of numeric values.

```
#include <NumericRangeManipulator.hpp>
```

Collaboration diagram for multiscale::NumericRangeManipulator:

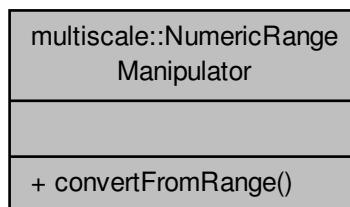

Static Public Member Functions

- template<class T, class U>
`static U convertFromRange (T oldRangeMin, T oldRangeMax, U newRangeMin, U newRangeMax, T oldValue)`
Convert a value from an old range to a new one.

7.31.1 Detailed Description

Operations for ranges of numeric values.

Definition at line 7 of file NumericRangeManipulator.hpp.

7.31.2 Member Function Documentation

7.31.2.1 template<class T, class U> static U multiscale::NumericRangeManipulator::convertFromRange (T oldRangeMin, T oldRangeMax, U newRangeMin, U newRangeMax, T oldValue) [inline], [static]

Convert a value from an old range to a new one.

Parameters

<i>oldRangeMin</i>	The minimum of the old range
<i>oldRangeMax</i>	The maximum of the old range
<i>newRangeMin</i>	The minimum of the new range
<i>newRangeMax</i>	The maximum of the new range
<i>oldValue</i>	The old value

Definition at line 20 of file NumericRangeManipulator.hpp.

The documentation for this class was generated from the following file:


- modules/util/include/multiscale/util/[NumericRangeManipulator.hpp](#)

7.32 multiscale::video::PolarCsvToInputFilesConverter Class Reference

Csv file to input file converter considering polar coordinates.

```
#include <PolarCsvToInputFilesConverter.hpp>
```

Collaboration diagram for multiscale::video::PolarCsvToInputFilesConverter:

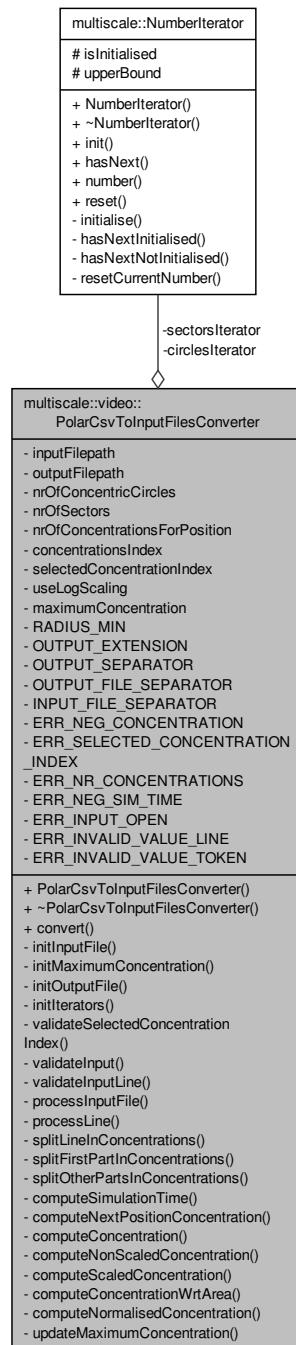

Public Member Functions

- `PolarCsvToInputFilesConverter (const string &inputfilepath, const string &outputfilepath, unsigned int nrOfConcentricCircles, unsigned int nrOfSectors, unsigned int nrOfConcentrationsForPosition, unsigned int selectedConcentrationIndex, bool useLogScaling, NumberIteratorType numberIteratorType)`
- `~PolarCsvToInputFilesConverter ()`
- `void convert ()`

Start the conversion.

Private Member Functions

- void `initInputFile` (ifstream &fin)

Initialise the input file stream over the given input file.
- void `initMaximumConcentration` (ifstream &fin)

Compute the value of member maximum concentration.
- void `initOutputFile` (ofstream &fout, unsigned int index, double &simulationTime)

Initialise the output file with the given index and simulation time.
- void `initIterators` (const NumberIteratorType &numberIteratorType)

Initialise the iterators considering the given number iterator type.
- void `validateSelectedConcentrationIndex` ()

Validate the selected concentration index in case of more than one concentration for each position.
- void `validateInput` (ifstream &fin)

Validate the input.
- void `validateInputLine` (const string &line, unsigned int lineNumber)

Validate the provided line identified by a line number.
- void `processInputFile` (ifstream &fin)

Process the input file.
- void `processLine` (const string &line, unsigned int outputIndex)

Process the provided line.
- vector< double > `splitLineInConcentrations` (const string &line, double &simulationTime)

Split the line in concentrations.
- void `splitFirstPartInConcentrations` (vector< double > &concentrations, const vector< string > &tokens, unsigned int circleIndex)

Split first part of the line (i.e. part representing the origin) into concentrations.
- void `splitOtherPartsInConcentrations` (vector< double > &concentrations, const vector< string > &tokens, unsigned int circleIndex)

Split other parts of the line (i.e. non-first part) into concentrations.
- double `computeSimulationTime` (const string &token)

Compute the simulation time from the given token and check if it is valid.
- double `computeNextPositionConcentration` (unsigned int circleIndex, int concentrationIndex, const vector< string > &tokens)

Compute the concentration for the next position.
- double `computeConcentration` (const string &concentration, int circleIndex)

Compute the concentration from the given string considering the index of the current concentric circle.
- double `computeNonScaledConcentration` (const string &concentration, int circleIndex)

Compute the non-scaled concentration from the given string considering the index of the current concentric circle.
- double `computeScaledConcentration` (const string &concentration, int circleIndex)

Compute the scaled concentration from the given string considering the index of the current concentric circle.
- double `computeConcentrationWrtArea` (double amount, int circleIndex)

Compute the concentration wrt. the area of the annular sector.
- double `computeNormalisedConcentration` (double concentration, int circleIndex)

Normalise the concentration considering the index of the current concentric circle by dividing it to the maximum concentration.
- void `updateMaximumConcentration` (const string &line, double &maximumConcentration)

Update the maximum concentration if the values from the given line are greater than it.

Private Attributes

- string `inputFilepath`
- string `outputFilepath`
- unsigned int `nrOfConcentricCircles`
- unsigned int `nrOfSectors`
- unsigned int `nrOfConcentrationsForPosition`
- unsigned int `concentrationsIndex`
- unsigned int `selectedConcentrationIndex`
- bool `useLogScaling`
- double `maximumConcentration`
- `NumberIterator * circlesIterator`
- `NumberIterator * sectorsIterator`

Static Private Attributes

- static const int `RADIUS_MIN` = 1
- static const string `OUTPUT_EXTENSION` = ".in"
- static const string `OUTPUT_SEPARATOR` = " "
- static const string `OUTPUT_FILE_SEPARATOR` = "_"
- static const string `INPUT_FILE_SEPARATOR` = ","
- static const string `ERR_NEG_CONCENTRATION` = "All concentrations must be non-negative."
- static const string `ERR_SELECTED_CONCENTRATION_INDEX` = "The selected concentration index (0-based indexing) should be smaller than the number of concentrations."
- static const string `ERR_NR_CONCENTRATIONS` = "The number of concentrations in the input file does not match the values of the input parameters height and width."
- static const string `ERR_NEG_SIM_TIME` = "The simulation time must be non-negative."
- static const string `ERR_INPUT_OPEN` = "The input file could not be opened."
- static const string `ERR_INVALID_VALUE_LINE` = "Invalid value on line: "
- static const string `ERR_INVALID_VALUE_TOKEN` = ", value: "

7.32.1 Detailed Description

Csv file to input file converter considering polar coordinates.

Definition at line 18 of file `PolarCsvToInputFilesConverter.hpp`.

7.32.2 Constructor & Destructor Documentation

7.32.2.1 `PolarCsvToInputFilesConverter::PolarCsvToInputFilesConverter (const string & inputFilepath, const string & outputFilepath, unsigned int nrOfConcentricCircles, unsigned int nrOfSectors, unsigned int nrOfConcentrationsForPosition, unsigned int selectedConcentrationIndex, bool useLogScaling, NumberIteratorType numberIteratorType)`

Definition at line 20 of file `PolarCsvToInputFilesConverter.cpp`.

7.32.2.2 `PolarCsvToInputFilesConverter::~PolarCsvToInputFilesConverter ()`

Definition at line 44 of file `PolarCsvToInputFilesConverter.cpp`.

7.32.3 Member Function Documentation

7.32.3.1 `double PolarCsvToInputFilesConverter::computeConcentration (const string & concentration, int circleIndex) [inline], [private]`

Compute the concentration from the given string considering the index of the current concentric circle.

Parameters

<i>concentration</i>	String representing the concentration
<i>circleIndex</i>	Index of the concentric circle

Definition at line 306 of file PolarCsvToInputFilesConverter.cpp.

7.32.3.2 `double PolarCsvToInputFilesConverter::computeConcentrationWrtArea (double amount, int circleIndex) [inline], [private]`

Compute the concentration wrt. the area of the annular sector.

Parameters

<i>amount</i>	Amount in annular sector
<i>circleIndex</i>	Index of the concentric circle which will be used to determine the area

Definition at line 332 of file PolarCsvToInputFilesConverter.cpp.

7.32.3.3 `double PolarCsvToInputFilesConverter::computeNextPositionConcentration (unsigned int circleIndex, int concentrationIndex, const vector< string > & tokens) [inline], [private]`

Compute the concentration for the next position.

Parameters

<i>circleIndex</i>	Index of the current concentric circle
<i>concentration-Index</i>	Index of the current concentration from the vector of tokens
<i>tokens</i>	Vector of tokens

Definition at line 277 of file PolarCsvToInputFilesConverter.cpp.

7.32.3.4 `double PolarCsvToInputFilesConverter::computeNonScaledConcentration (const string & concentration, int circleIndex) [inline], [private]`

Compute the non-scaled concentration from the given string considering the index of the current concentric circle.

Parameters

<i>concentration</i>	String representing the concentration
<i>circleIndex</i>	Index of the concentric circle

Definition at line 312 of file PolarCsvToInputFilesConverter.cpp.

7.32.3.5 `double PolarCsvToInputFilesConverter::computeNormalisedConcentration (double concentration, int circleIndex)`
 [inline], [private]

Normalise the concentration considering the index of the current concentric circle by dividing it to the maximum concentration.

Parameters

<code>concentration</code>	The concentration
<code>circleIndex</code>	Index of the concentric circle

Definition at line 336 of file PolarCsvToInputFilesConverter.cpp.

7.32.3.6 `double PolarCsvToInputFilesConverter::computeScaledConcentration (const string & concentration, int circleIndex)`
 [inline], [private]

Compute the scaled concentration from the given string considering the index of the current concentric circle.

Compute the scaled concentration from the given string by applying a logit transformation to it

Parameters

<code>concentration</code>	String representing the concentration
<code>circleIndex</code>	Index of the concentric circle

Definition at line 318 of file PolarCsvToInputFilesConverter.cpp.

7.32.3.7 `double PolarCsvToInputFilesConverter::computeSimulationTime (const string & token)` [inline],
 [private]

Compute the simulation time from the given token and check if it is valid.

Parameters

<code>token</code>	Token (string)
--------------------	----------------

Definition at line 267 of file PolarCsvToInputFilesConverter.cpp.

References [MS_throw](#).

7.32.3.8 `void PolarCsvToInputFilesConverter::convert ()`

Start the conversion.

Definition at line 49 of file PolarCsvToInputFilesConverter.cpp.

Referenced by [main\(\)](#).

Here is the caller graph for this function:



7.32.3.9 void PolarCsvToInputFilesConverter::initInputFile (ifstream & fin) [private]

Initialise the input file stream over the given input file.

Parameters

<i>fin</i>	Input file stream
------------	-------------------

Definition at line 62 of file PolarCsvToInputFilesConverter.cpp.

References MS_throw.

7.32.3.10 void PolarCsvToInputFilesConverter::initIterators (const NumberIteratorType & numberIteratorType) [private]

Initialise the iterators considering the given number iterator type.

Parameters

<i>numberIteratorType</i>	The type of the number iterator
---------------------------	---------------------------------

Definition at line 111 of file PolarCsvToInputFilesConverter.cpp.

References multiscale::LEXICOGRAPHIC, and multiscale::STANDARD.

7.32.3.11 void PolarCsvToInputFilesConverter::initMaximumConcentration (ifstream & fin) [private]

Compute the value of member maximum concentration.

Parameters

<i>fin</i>	Input file stream
------------	-------------------

Definition at line 70 of file PolarCsvToInputFilesConverter.cpp.

References MS_throw.

7.32.3.12 void PolarCsvToInputFilesConverter::initOutputFile (ofstream & fout, unsigned int index, double & simulationTime) [private]

Initialise the output file with the given index and simulation time.


Parameters

<i>fout</i>	Output file stream
<i>index</i>	Index of the output file
<i>simulationTime</i>	Simulation time

Definition at line 94 of file PolarCsvToInputFilesConverter.cpp.

References multiscale::StringManipulator::toString().

Here is the call graph for this function:



7.32.3.13 void PolarCsvToInputFilesConverter::processInputFile (ifstream & *fin*) [private]

Process the input file.

Read the concentrations and normalise them if it is the case.

Parameters

<i>fin</i>	Input file stream
------------	-------------------

Definition at line 178 of file PolarCsvToInputFilesConverter.cpp.

7.32.3.14 void PolarCsvToInputFilesConverter::processLine (const string & *line*, unsigned int *outputIndex*) [private]

Process the provided line.

Parameters

<i>line</i>	Line
<i>outputIndex</i>	Index integrated in the name of the output file

Definition at line 193 of file PolarCsvToInputFilesConverter.cpp.

7.32.3.15 void PolarCsvToInputFilesConverter::splitFirstPartInConcentrations (vector< double > & *concentrations*, const vector< string > & *tokens*, unsigned int *circleIndex*) [private]

Split first part of the line (i.e. part representing the origin) into concentrations.

Parameters

<i>concentrations</i>	Concentrations extracted from tokens
<i>tokens</i>	Tokens representing the line
<i>circleIndex</i>	Index of the current concentric circle

Definition at line 237 of file PolarCsvToInputFilesConverter.cpp.

7.32.3.16 `vector< double > PolarCsvToInputFilesConverter::splitLineInConcentrations (const string & line, double & simulationTime) [private]`

Split the line in concentrations.


Parameters

<i>line</i>	Line
<i>simulationTime</i>	Simulation time associated with the line

Definition at line 212 of file PolarCsvToInputFilesConverter.cpp.

References multiscale::StringManipulator::split().

Here is the call graph for this function:



7.32.3.17 `void PolarCsvToInputFilesConverter::splitOtherPartsInConcentrations (vector< double > & concentrations, const vector< string > & tokens, unsigned int circleIndex) [private]`

Split other parts of the line (i.e. non-first part) into concentrations.

Parameters

<i>concentrations</i>	Concentrations extracted from tokens
<i>tokens</i>	Tokens representing the line
<i>circleIndex</i>	Index of the current concentric circle

Definition at line 251 of file PolarCsvToInputFilesConverter.cpp.

7.32.3.18 `void PolarCsvToInputFilesConverter::updateMaximumConcentration (const string & line, double & maximumConcentration) [private]`

Update the maximum concentration if the values from the given line are greater than it.

Parameters

<i>line</i>	Line from input file
<i>maximum-Concentration</i>	The maximum concentration

Definition at line 340 of file PolarCsvToInputFilesConverter.cpp.

7.32.3.19 `void PolarCsvToInputFilesConverter::validateInput (ifstream & fin) [private]`

Validate the input.

Parameters

<i>fin</i>	Input file stream
------------	-------------------

Definition at line 134 of file PolarCsvToInputFilesConverter.cpp.

References MS_throw.

7.32.3.20 void PolarCsvToInputFilesConverter::validateInputLine (const string & *line*, unsigned int *lineNumber*) [private]

Validate the provided line identified by a line number.


Parameters

<i>line</i>	Line from input file
<i>lineNumber</i>	Number of the line

Definition at line 158 of file PolarCsvToInputFilesConverter.cpp.

References MS_throw, and multiscale::StringManipulator::split().

Here is the call graph for this function:



7.32.3.21 void PolarCsvToInputFilesConverter::validateSelectedConcentrationIndex () [private]

Validate the selected concentration index in case of more than one concentration for each position.

Definition at line 128 of file PolarCsvToInputFilesConverter.cpp.

References MS_throw.

7.32.4 Member Data Documentation

7.32.4.1 NumberIterator* multiscale::video::PolarCsvToInputFilesConverter::circlesIterator [private]

Iterator over the number of concentric circles

Definition at line 42 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.2 unsigned int multiscale::video::PolarCsvToInputFilesConverter::concentrationsIndex [private]

Index of the current concentration

Definition at line 29 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.3 `const string PolarCsvToInputFilesConverter::ERR_INPUT_OPEN = "The input file could not be opened." [static], [private]`

Definition at line 218 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.4 `const string PolarCsvToInputFilesConverter::ERR_INVALID_VALUE_LINE = "Invalid value on line: " [static], [private]`

Definition at line 219 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.5 `const string PolarCsvToInputFilesConverter::ERR_INVALID_VALUE_TOKEN = ", value: " [static], [private]`

Definition at line 220 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.6 `const string PolarCsvToInputFilesConverter::ERR_NEG_CONCENTRATION = "All concentrations must be non-negative." [static], [private]`

Definition at line 214 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.7 `const string PolarCsvToInputFilesConverter::ERR_NEG_SIM_TIME = "The simulation time must be non-negative." [static], [private]`

Definition at line 217 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.8 `const string PolarCsvToInputFilesConverter::ERR_NR_CONCENTRATIONS = "The number of concentrations in the input file does not match the values of the input parameters height and width." [static], [private]`

Definition at line 216 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.9 `const string PolarCsvToInputFilesConverter::ERR_SELECTED_CONCENTRATION_INDEX = "The selected concentration index (0-based indexing) should be smaller than the number of concentrations." [static], [private]`

Definition at line 215 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.10 `const string PolarCsvToInputFilesConverter::INPUT_FILE_SEPARATOR = "," [static], [private]`

Definition at line 212 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.11 `string multiscale::video::PolarCsvToInputFilesConverter::inputFilepath [private]`

Path to the input file

Definition at line 22 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.12 `double multiscale::video::PolarCsvToInputFilesConverter::maximumConcentration [private]`

The maximum concentration in the input file

Definition at line 40 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.13 `unsigned int multiscale::video::PolarCsvToInputFilesConverter::nrOfConcentrationsForPosition` [private]

Number of concentrations for each position

Definition at line 27 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.14 `unsigned int multiscale::video::PolarCsvToInputFilesConverter::nrOfConcentricCircles` [private]

Number of concentric circles

Definition at line 25 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.15 `unsigned int multiscale::video::PolarCsvToInputFilesConverter::nrOfSectors` [private]

Number of sectors

Definition at line 26 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.16 `const string PolarCsvToInputFilesConverter::OUTPUT_EXTENSION = ".in"` [static], [private]

Definition at line 209 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.17 `const string PolarCsvToInputFilesConverter::OUTPUT_FILE_SEPARATOR = "_"` [static], [private]

Definition at line 211 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.18 `const string PolarCsvToInputFilesConverter::OUTPUT_SEPARATOR = " "` [static], [private]

Definition at line 210 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.19 `string multiscale::video::PolarCsvToInputFilesConverter::outputFilepath` [private]

Path to the output file

Definition at line 23 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.20 `const int PolarCsvToInputFilesConverter::RADIUS_MIN = 1` [static], [private]

Definition at line 207 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.21 `NumberIterator* multiscale::video::PolarCsvToInputFilesConverter::sectorsIterator` [private]

Iterator over the number of sectors

Definition at line 43 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.22 `unsigned int multiscale::video::PolarCsvToInputFilesConverter::selectedConcentrationIndex` [private]

Index of the concentration A in case the number of

concentrations for each position is greater than 1

$\text{finalConcentration} = A / (A_1 + A_2 + \dots + A_N)$, where N is the number of concentrations for each position

Definition at line 31 of file PolarCsvToInputFilesConverter.hpp.

7.32.4.23 `bool multiscale::video::PolarCsvToInputFilesConverter::useLogScaling` [private]

Flag for using logarithmic scaling for concentrations or not

Definition at line 38 of file `PolarCsvToInputFilesConverter.hpp`.

The documentation for this class was generated from the following files:


- `modules/video/circular/include/multiscale/video/circular/PolarCsvToInputFilesConverter.hpp`
- `modules/video/circular/src/PolarCsvToInputFilesConverter.cpp`

7.33 multiscale::PolarCsvToInputFilesConverterException Class Reference


Exception class for the `PolarCsvToInputFilesConverter` class.

```
#include <PolarCsvToInputFilesConverterException.hpp>
```

Inheritance diagram for `multiscale::PolarCsvToInputFilesConverterException`:

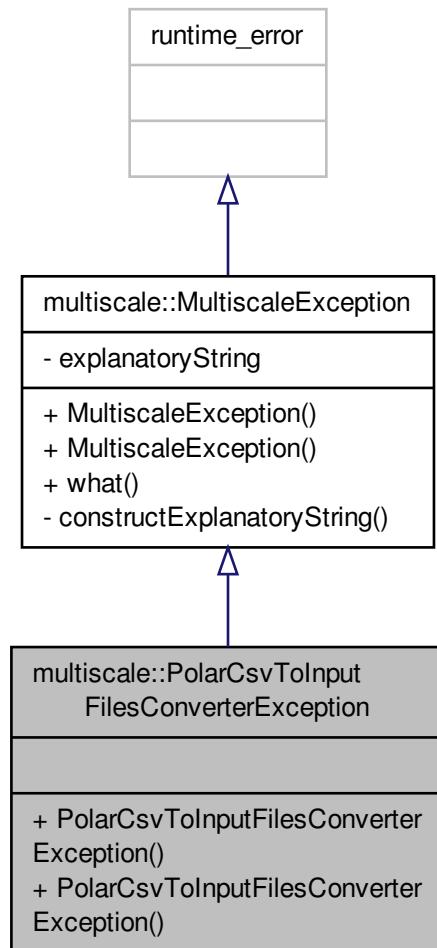

Collaboration diagram for multiscale::PolarCsvToInputFilesConverterException:

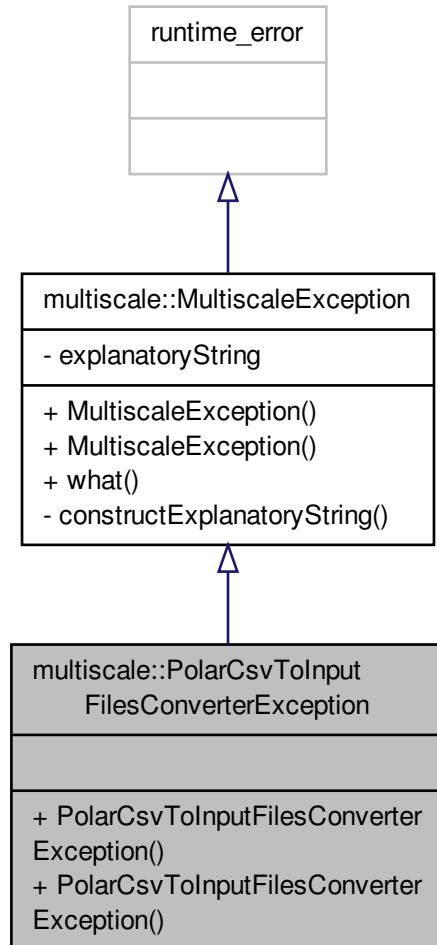

Public Member Functions

- [PolarCsvToInputFilesConverterException](#) (const string &file, int line, const string &msg)
- [PolarCsvToInputFilesConverterException](#) (const string &file, int line, const char *msg)

7.33.1 Detailed Description

Exception class for the PolarCsvToInputFilesConverter class.

Definition at line 14 of file PolarCsvToInputFilesConverterException.hpp.

7.33.2 Constructor & Destructor Documentation

7.33.2.1 `multiscale::PolarCsvToInputFilesConverterException::PolarCsvToInputFilesConverterException (const string & file, int line, const string & msg) [inline]`

Definition at line 18 of file `PolarCsvToInputFilesConverterException.hpp`.

7.33.2.2 `multiscale::PolarCsvToInputFilesConverterException::PolarCsvToInputFilesConverterException (const string & file, int line, const char * msg) [inline]`

Definition at line 20 of file `PolarCsvToInputFilesConverterException.hpp`.

The documentation for this class was generated from the following file:


- [include/multiscale/exception/PolarCsvToInputFilesConverterException.hpp](#)

7.34 multiscale::video::PolarGnuplotScriptGenerator Class Reference

Gnuplot script generator from the provided annular sectors.

```
#include <PolarGnuplotScriptGenerator.hpp>
```

Collaboration diagram for multiscale::video::PolarGnuplotScriptGenerator:

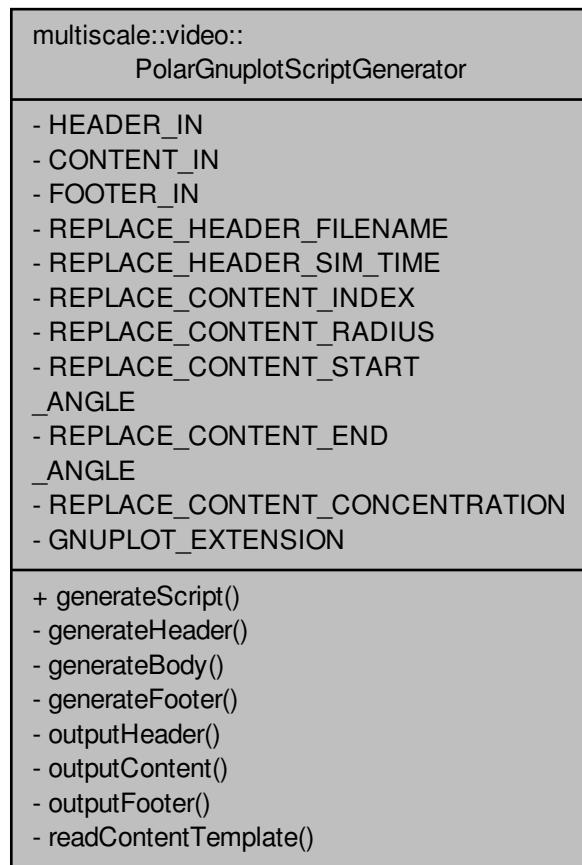

Static Public Member Functions

- static void `generateScript` (const vector< `AnnularSector` > &annularSectors, double simulationTime, const string &outputFilepath)

Generate the script.

Static Private Member Functions

- static void `generateHeader` (ofstream &fout, const string &outputFilepath, double simulationTime)
Generate the header of the script.
- static void `generateBody` (const vector< `AnnularSector` > &annularSectors, ofstream &fout)
Generate the body/content of the script.
- static void `generateFooter` (ofstream &fout)
Generate the footer of the script.
- static void `outputHeader` (ifstream &fin, const string &outputFilename, double simulationTime, ofstream &fout)
Output the header of the script.
- static void `outputContent` (const vector< `AnnularSector` > &annularSectors, const string &contentTemplate, ofstream &fout)
Output the content of the script.
- static void `outputFooter` (ifstream &fin, ofstream &fout)
Output the footer of the script.
- static string `readContentTemplate` (ifstream &fin)
Read content template.

Static Private Attributes

- static const string `HEADER_IN` = "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/video/circular/header.in"
- static const string `CONTENT_IN` = "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/video/circular/content.in"
- static const string `FOOTER_IN` = "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/video/circular/footer.in"
- static const string `REPLACE_HEADER_FILENAME` = "OUTPUT_FILENAME"
- static const string `REPLACE_HEADER_SIM_TIME` = "OUTPUT_SIM_TIME"
- static const string `REPLACE_CONTENT_INDEX` = "OBJ_INDEX"
- static const string `REPLACE_CONTENT_RADIUS` = "OBJ_END_RADIUS"
- static const string `REPLACE_CONTENT_START_ANGLE` = "OBJ_START_ANGLE"
- static const string `REPLACE_CONTENT_END_ANGLE` = "OBJ_END_ANGLE"
- static const string `REPLACE_CONTENT_CONCENTRATION` = "OBJ_CONCENTRATION"
- static const string `GNUPLOT_EXTENSION` = ".plt"

7.34.1 Detailed Description

Gnuplot script generator from the provided annular sectors.

Definition at line 16 of file `PolarGnuplotScriptGenerator.hpp`.

7.34.2 Member Function Documentation

7.34.2.1 `void PolarGnuplotScriptGenerator::generateBody (const vector< AnnularSector > & annularSectors, ofstream & fout) [static], [private]`

Generate the body/content of the script.

Parameters

<i>annularSectors</i>	Annular sectors
<i>fout</i>	Output file stream

Definition at line 40 of file PolarGnuplotScriptGenerator.cpp.

7.34.2.2 `void PolarGnuplotScriptGenerator::generateFooter (ofstream & fout) [static], [private]`

Generate the footer of the script.

Parameters

<i>fout</i>	Output file stream
-------------	--------------------

Definition at line 52 of file PolarGnuplotScriptGenerator.cpp.

7.34.2.3 `void PolarGnuplotScriptGenerator::generateHeader (ofstream & fout, const string & outputfilepath, double simulationTime) [static], [private]`

Generate the header of the script.


Parameters

<i>fout</i>	Output file stream
<i>outputfilepath</i>	Path to the output file
<i>simulationTime</i>	Simulation time

Definition at line 28 of file PolarGnuplotScriptGenerator.cpp.

References multiscale::StringManipulator::filenameFromPath().

Here is the call graph for this function:



7.34.2.4 `void PolarGnuplotScriptGenerator::generateScript (const vector< AnnularSector > & annularSectors, double simulationTime, const string & outputfilepath) [static]`

Generate the script.


Parameters

<i>annularSectors</i>	Annular sectors
<i>simulationTime</i>	Simulation time
<i>outputFilepath</i>	Path of the output file

Definition at line 14 of file PolarGnuplotScriptGenerator.cpp.

Referenced by multiscale::video::CartesianToPolarConverter::outputResultsAsScript().

Here is the caller graph for this function:



7.34.2.5 void PolarGnuplotScriptGenerator::outputContent (const vector< AnnularSector > & *annularSectors*, const string & *contentTemplate*, ofstream & *fout*) [static], [private]

Output the content of the script.


Parameters

<i>annularSectors</i>	Annular sectors
<i>contentTemplate</i>	Template used for generating output for each annular sector
<i>fout</i>	Output file stream

Definition at line 75 of file PolarGnuplotScriptGenerator.cpp.

References multiscale::StringManipulator::replace().

Here is the call graph for this function:



7.34.2.6 void PolarGnuplotScriptGenerator::outputFooter (ifstream & *fin*, ofstream & *fout*) [static], [private]

Output the footer of the script.

Parameters

<i>fin</i>	Input file stream
<i>fout</i>	Output file stream

Definition at line 93 of file PolarGnuplotScriptGenerator.cpp.

7.34.2.7 void PolarGnuplotScriptGenerator::outputHeader (ifstream & *fin*, const string & *outputFilename*, double *simulationTime*, ofstream & *fout*) [static], [private]

Output the header of the script.


Parameters

<i>fin</i>	Input file stream
<i>outputFilename</i>	Name of the output file
<i>simulationTime</i>	Simulation time
<i>fout</i>	Output file stream

Definition at line 62 of file PolarGnuplotScriptGenerator.cpp.

References multiscale::StringManipulator::replace().

Here is the call graph for this function:



7.34.2.8 string PolarGnuplotScriptGenerator::readContentTemplate (ifstream & *fin*) [static], [private]

Read content template.

Parameters

<i>fin</i>	Input file stream
------------	-------------------

Definition at line 103 of file PolarGnuplotScriptGenerator.cpp.

7.34.3 Member Data Documentation

7.34.3.1 const string PolarGnuplotScriptGenerator::CONTENT_IN =
 "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/video/circular/content.in"
 [static], [private]

Definition at line 92 of file PolarGnuplotScriptGenerator.hpp.

7.34.3.2 const string PolarGnuplotScriptGenerator::FOOTER_IN =
 "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/video/circular/footer.in"
 [static], [private]

Definition at line 93 of file PolarGnuplotScriptGenerator.hpp.

7.34.3.3 `const string PolarGnuplotScriptGenerator::GNUPLOT_EXTENSION = ".plt" [static], [private]`

Definition at line 104 of file PolarGnuplotScriptGenerator.hpp.

7.34.3.4 `const string PolarGnuplotScriptGenerator::HEADER_IN = "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/video/circular/header.in" [static], [private]`

Definition at line 91 of file PolarGnuplotScriptGenerator.hpp.

7.34.3.5 `const string PolarGnuplotScriptGenerator::REPLACE_CONTENT_CONCENTRATION = "OBJ_CONCENTRATION" [static], [private]`

Definition at line 102 of file PolarGnuplotScriptGenerator.hpp.

7.34.3.6 `const string PolarGnuplotScriptGenerator::REPLACE_CONTENT_END_ANGLE = "OBJ_END_ANGLE" [static], [private]`

Definition at line 101 of file PolarGnuplotScriptGenerator.hpp.

7.34.3.7 `const string PolarGnuplotScriptGenerator::REPLACE_CONTENT_INDEX = "OBJ_INDEX" [static], [private]`

Definition at line 98 of file PolarGnuplotScriptGenerator.hpp.

7.34.3.8 `const string PolarGnuplotScriptGenerator::REPLACE_CONTENT_RADIUS = "OBJ_END_RADIUS" [static], [private]`

Definition at line 99 of file PolarGnuplotScriptGenerator.hpp.

7.34.3.9 `const string PolarGnuplotScriptGenerator::REPLACE_CONTENT_START_ANGLE = "OBJ_START_ANGLE" [static], [private]`

Definition at line 100 of file PolarGnuplotScriptGenerator.hpp.

7.34.3.10 `const string PolarGnuplotScriptGenerator::REPLACE_HEADER_FILENAME = "OUTPUT_FILENAME" [static], [private]`

Definition at line 95 of file PolarGnuplotScriptGenerator.hpp.

7.34.3.11 `const string PolarGnuplotScriptGenerator::REPLACE_HEADER_SIM_TIME = "OUTPUT_SIM_TIME" [static], [private]`

Definition at line 96 of file PolarGnuplotScriptGenerator.hpp.

The documentation for this class was generated from the following files:


- [modules/video/circular/include/multiscale/video/circular/PolarGnuplotScriptGenerator.hpp](#)
- [modules/video/circular/src/PolarGnuplotScriptGenerator.cpp](#)

7.35 multiscale::video::RectangularCsvToInputFilesConverter Class Reference

Csv file to input file converter considering cartesian coordinates.

```
#include <RectangularCsvToInputFilesConverter.hpp>
```

Collaboration diagram for multiscale::video::RectangularCsvToInputFilesConverter:

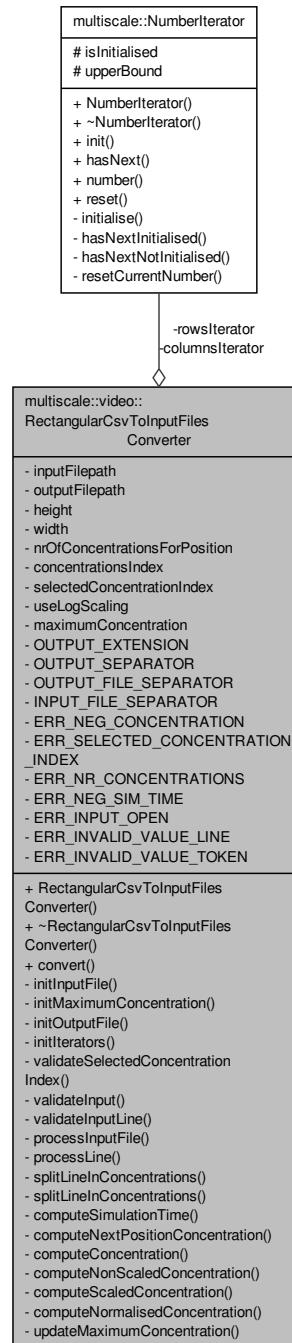

Public Member Functions

- `RectangularCsvToInputFilesConverter` (const string &`inputFilepath`, const string &`outputFilepath`, unsigned int `height`, unsigned int `width`, unsigned int `nrOfConcentrationsForPosition`, unsigned int `selectedConcentrationIndex`, bool `useLogScaling`, NumberIteratorType `numberIteratorType`)
- `~RectangularCsvToInputFilesConverter` ()
- `void convert` ()

Start the conversion.

Private Member Functions

- `void initInputFile` (ifstream &`fin`)

Initialise the input file stream over the given input file.
- `void initMaximumConcentration` (ifstream &`fin`)

Compute the value of member maximum concentration.
- `void initOutputFile` (ofstream &`fout`, unsigned int `index`, double &`simulationTime`)

Initialise the output file with the given index and simulation time.
- `void initIterators` (const NumberIteratorType &`numberIteratorType`)

Initialise the iterators considering the given number iterator type.
- `void validateSelectedConcentrationIndex` ()

Validate the selected concentration index in case of more than one concentration for each position.
- `void validateInput` (ifstream &`fin`)

Validate the input.
- `void validateInputLine` (const string &`line`, unsigned int `lineNumber`)

Validate the provided line identified by a line number.
- `void processInputFile` (ifstream &`fin`)

Process the input file.
- `void processLine` (const string &`line`, unsigned int `outputIndex`)

Process the provided line.
- `vector< double > splitLineInConcentrations` (const string &`line`, double &`simulationTime`)

Split the line in concentrations.
- `void splitLineInConcentrations` (vector< double > &`concentrations`, vector< string > &`tokens`, unsigned int `rowIndex`)

Split line into concentrations.
- `double computeSimulationTime` (const string &`token`)

Compute the simulation time from the given token and check if it is valid.
- `double computeNextPositionConcentration` (int `concentrationIndex`, vector< string > &`tokens`)

Compute the concentration for the next position.
- `double computeConcentration` (const string &`concentration`)

Compute the concentration from the given string.
- `double computeNonScaledConcentration` (const string &`concentration`)

Compute the non-scaled concentration from the given string.
- `double computeScaledConcentration` (const string &`concentration`)

Compute the scaled concentration from the given string.
- `double computeNormalisedConcentration` (double `concentration`)

Normalise the given concentration by dividing it to the maximum concentration.
- `void updateMaximumConcentration` (const string &`line`, double &`maximumConcentration`)

Update the maximum concentration if the values from the given line are greater than it.

Private Attributes

- string `inputfilepath`
- string `outputfilepath`
- unsigned int `height`
- unsigned int `width`
- unsigned int `nrOfConcentrationsForPosition`
- unsigned int `concentrationsIndex`
- unsigned int `selectedConcentrationIndex`
- bool `useLogScaling`
- double `maximumConcentration`
- `NumberIterator * rowsIterator`
- `NumberIterator * columnsIterator`

Static Private Attributes

- static const string `OUTPUT_EXTENSION` = ".in"
- static const string `OUTPUT_SEPARATOR` = " "
- static const string `OUTPUT_FILE_SEPARATOR` = "_"
- static const string `INPUT_FILE_SEPARATOR` = ","
- static const string `ERR_NEG_CONCENTRATION` = "All concentrations must be non-negative."
- static const string `ERR_SELECTED_CONCENTRATION_INDEX` = "The selected concentration index (0-based indexing) should be smaller than the number of concentrations."
- static const string `ERR_NR_CONCENTRATIONS` = "The number of concentrations in the input file does not match the values of the input parameters `height` and `width`."
- static const string `ERR_NEG_SIM_TIME` = "The simulation time must be non-negative."
- static const string `ERR_INPUT_OPEN` = "The input file could not be opened."
- static const string `ERR_INVALID_VALUE_LINE` = "Invalid value on line: "
- static const string `ERR_INVALID_VALUE_TOKEN` = ", value: "

7.35.1 Detailed Description

Csv file to input file converter considering cartesian coordinates.

Definition at line 18 of file RectangularCsvToInputFilesConverter.hpp.

7.35.2 Constructor & Destructor Documentation

7.35.2.1 `RectangularCsvToInputFilesConverter::RectangularCsvToInputFilesConverter (const string & inputfilepath, const string & outputfilepath, unsigned int height, unsigned int width, unsigned int nrOfConcentrationsForPosition, unsigned int selectedConcentrationIndex, bool useLogScaling, NumberIteratorType numberIteratorType)`

Definition at line 19 of file RectangularCsvToInputFilesConverter.cpp.

7.35.2.2 `RectangularCsvToInputFilesConverter::~RectangularCsvToInputFilesConverter ()`

Definition at line 43 of file RectangularCsvToInputFilesConverter.cpp.

7.35.3 Member Function Documentation

7.35.3.1 `double RectangularCsvToInputFilesConverter::computeConcentration (const string & concentration) [inline], [private]`

Compute the concentration from the given string.

Parameters

<code>concentration</code>	String representing the concentration
----------------------------	---------------------------------------

Definition at line 282 of file RectangularCsvToInputFilesConverter.cpp.

7.35.3.2 `double RectangularCsvToInputFilesConverter::computeNextPositionConcentration (int concentrationIndex, vector<string > & tokens) [inline], [private]`

Compute the concentration for the next position.

Parameters

<code>concentration-Index</code>	Index of the current concentration from the vector of tokens
<code>tokens</code>	Vector of tokens

Definition at line 255 of file RectangularCsvToInputFilesConverter.cpp.

7.35.3.3 `double RectangularCsvToInputFilesConverter::computeNonScaledConcentration (const string & concentration) [inline], [private]`

Compute the non-scaled concentration from the given string.

Parameters

<code>concentration</code>	String representing the concentration
----------------------------	---------------------------------------

Definition at line 288 of file RectangularCsvToInputFilesConverter.cpp.

7.35.3.4 `double RectangularCsvToInputFilesConverter::computeNormalisedConcentration (double concentration) [inline], [private]`

Normalise the given concentration by dividing it to the maximum concentration.

Parameters

<code>concentration</code>	The concentration
----------------------------	-------------------

Definition at line 304 of file RectangularCsvToInputFilesConverter.cpp.

7.35.3.5 `double RectangularCsvToInputFilesConverter::computeScaledConcentration (const string & concentration) [inline], [private]`

Compute the scaled concentration from the given string.

Compute the scaled concentration from the given string by applying a logit transformation to it

Parameters

<i>concentration</i>	String representing the concentration
----------------------	---------------------------------------

Definition at line 292 of file RectangularCsvToInputFilesConverter.cpp.

7.35.3.6 double RectangularCsvToInputFilesConverter::computeSimulationTime (const string & *token*) [inline], [private]

Compute the simulation time from the given token and check if it is valid.

Parameters

<i>token</i>	Token (string)
--------------	----------------

Definition at line 245 of file RectangularCsvToInputFilesConverter.cpp.

References MS_throw.

7.35.3.7 void RectangularCsvToInputFilesConverter::convert ()

Start the conversion.

Definition at line 48 of file RectangularCsvToInputFilesConverter.cpp.

Referenced by main().

Here is the caller graph for this function:



7.35.3.8 void RectangularCsvToInputFilesConverter::initInputFile (ifstream & *fin*) [private]

Initialise the input file stream over the given input file.

Parameters

<i>fin</i>	Input file stream
------------	-------------------

Definition at line 61 of file RectangularCsvToInputFilesConverter.cpp.

References MS_throw.

7.35.3.9 void RectangularCsvToInputFilesConverter::initIterators (const NumberIteratorType & *numberIteratorType*) [private]

Initialise the iterators considering the given number iterator type.

Parameters

<i>numberIterator- Type</i>	The type of the number iterator
---------------------------------	---------------------------------

Definition at line 110 of file RectangularCsvToInputFilesConverter.cpp.

References multiscale::LEXICOGRAPHIC, and multiscale::STANDARD.

7.35.3.10 void RectangularCsvToInputFilesConverter::initMaximumConcentration (ifstream & *fin*) [private]

Compute the value of member maximum concentration.

Parameters

<i>fin</i>	Input file stream
------------	-------------------

Definition at line 69 of file RectangularCsvToInputFilesConverter.cpp.

References MS_throw.

7.35.3.11 void RectangularCsvToInputFilesConverter::initOutputFile (ofstream & *fout*, unsigned int *index*, double & *simulationTime*) [private]

Initialise the output file with the given index and simulation time.


Parameters

<i>fout</i>	Output file stream
<i>index</i>	Index of the output file
<i>simulationTime</i>	Simulation time

Definition at line 93 of file RectangularCsvToInputFilesConverter.cpp.

References multiscale::StringManipulator::toString().

Here is the call graph for this function:



7.35.3.12 void RectangularCsvToInputFilesConverter::processInputFile (ifstream & *fin*) [private]

Process the input file.

Read the concentrations and normalise them if it is the case.

Parameters

<i>fin</i>	Input file stream
------------	-------------------

Definition at line 177 of file RectangularCsvToInputFilesConverter.cpp.

7.35.3.13 `void RectangularCsvToInputFilesConverter::processLine (const string & line, unsigned int outputIndex) [private]`

Process the provided line.

Parameters

<i>line</i>	Line
<i>outputIndex</i>	Index integrated in the name of the output file

Definition at line 192 of file RectangularCsvToInputFilesConverter.cpp.

7.35.3.14 `vector< double > RectangularCsvToInputFilesConverter::splitLineInConcentrations (const string & line, double & simulationTime) [private]`

Split the line in concentrations.


Parameters

<i>line</i>	Line
<i>simulationTime</i>	Simulation time associated with the line

Definition at line 209 of file RectangularCsvToInputFilesConverter.cpp.

References multiscale::StringManipulator::split().

Here is the call graph for this function:



7.35.3.15 `void RectangularCsvToInputFilesConverter::splitLineInConcentrations (vector< double > & concentrations, vector< string > & tokens, unsigned int rowIndex) [private]`

Split line into concentrations.

Parameters

<i>concentrations</i>	Concentrations extracted from tokens
<i>tokens</i>	Tokens representing the line
<i>rowIndex</i>	Index of the current row

Definition at line 230 of file RectangularCsvToInputFilesConverter.cpp.

7.35.3.16 void `RectangularCsvToInputFilesConverter::updateMaximumConcentration (const string & line, double & maximumConcentration) [private]`

Update the maximum concentration if the values from the given line are greater than it.

Parameters

<i>line</i>	Line from input file
<i>maximumConcentration</i>	The maximum concentration

Definition at line 308 of file `RectangularCsvToInputFilesConverter.cpp`.

7.35.3.17 void `RectangularCsvToInputFilesConverter::validateInput (ifstream & fin) [private]`

Validate the input.

Parameters

<i>fin</i>	Input file stream
------------	-------------------

Definition at line 133 of file `RectangularCsvToInputFilesConverter.cpp`.

References `MS_throw`.

7.35.3.18 void `RectangularCsvToInputFilesConverter::validateInputLine (const string & line, unsigned int lineNumber) [private]`

Validate the provided line identified by a line number.


Parameters

<i>line</i>	Line from input file
<i>lineNumber</i>	Number of the line

Definition at line 157 of file `RectangularCsvToInputFilesConverter.cpp`.

References `MS_throw`, and `multiscale::StringManipulator::split()`.

Here is the call graph for this function:



7.35.3.19 void `RectangularCsvToInputFilesConverter::validateSelectedConcentrationIndex () [private]`

Validate the selected concentration index in case of more than one concentration for each position.

Definition at line 127 of file `RectangularCsvToInputFilesConverter.cpp`.

References MS_throw.

7.35.4 Member Data Documentation

7.35.4.1 `NumberIterator* multiscale::video::RectangularCsvToInputFilesConverter::columnsIterator` [private]

Iterator over the number of columns

Definition at line 43 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.2 `unsigned int multiscale::video::RectangularCsvToInputFilesConverter::concentrationsIndex` [private]

Index of the current concentration

Definition at line 29 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.3 `const string RectangularCsvToInputFilesConverter::ERR_INPUT_OPEN = "The input file could not be opened."` [static], [private]

Definition at line 197 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.4 `const string RectangularCsvToInputFilesConverter::ERR_INVALID_VALUE_LINE = "Invalid value on line: "` [static], [private]

Definition at line 198 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.5 `const string RectangularCsvToInputFilesConverter::ERR_INVALID_VALUE_TOKEN = ", value: "` [static], [private]

Definition at line 199 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.6 `const string RectangularCsvToInputFilesConverter::ERR_NEG_CONCENTRATION = "All concentrations must be non-negative."` [static], [private]

Definition at line 193 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.7 `const string RectangularCsvToInputFilesConverter::ERR_NEG_SIM_TIME = "The simulation time must be non-negative."` [static], [private]

Definition at line 196 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.8 `const string RectangularCsvToInputFilesConverter::ERR_NR_CONCENTRATIONS = "The number of concentrations in the input file does not match the values of the input parameters height and width."` [static], [private]

Definition at line 195 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.9 `const string RectangularCsvToInputFilesConverter::ERR_SELECTED_CONCENTRATION_INDEX = "The selected concentration index (0-based indexing) should be smaller than the number of concentrations."` [static], [private]

Definition at line 194 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.10 `unsigned int multiscale::video::RectangularCsvToInputFilesConverter::height` [private]

Height of the grid

Definition at line 25 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.11 `const string RectangularCsvToInputFilesConverter::INPUT_FILE_SEPARATOR = ","` [static], [private]

Definition at line 191 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.12 `string multiscale::video::RectangularCsvToInputFilesConverter::inputFilepath` [private]

Path to the input file

Definition at line 22 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.13 `double multiscale::video::RectangularCsvToInputFilesConverter::maximumConcentration` [private]

The maximum concentration in the input file

Definition at line 40 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.14 `unsigned int multiscale::video::RectangularCsvToInputFilesConverter::nrOfConcentrationsForPosition` [private]

Number of concentrations for each position

Definition at line 27 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.15 `const string RectangularCsvToInputFilesConverter::OUTPUT_EXTENSION = ".in"` [static], [private]

Definition at line 188 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.16 `const string RectangularCsvToInputFilesConverter::OUTPUT_FILE_SEPARATOR = "_"` [static], [private]

Definition at line 190 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.17 `const string RectangularCsvToInputFilesConverter::OUTPUT_SEPARATOR = " "` [static], [private]

Definition at line 189 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.18 `string multiscale::video::RectangularCsvToInputFilesConverter::outputFilepath` [private]

Path to the output file

Definition at line 23 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.19 `NumberIterator* multiscale::video::RectangularCsvToInputFilesConverter::rowsIterator` [private]

Iterator over the number of rows

Definition at line 42 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.20 `unsigned int multiscale::video::RectangularCsvToInputFilesConverter::selectedConcentrationIndex` [private]

Index of the concentration A in case the number of

concentrations for each position is greater than 1

$\text{finalConcentration} = A / (A_1 + A_2 + \dots + A_N)$, where N is the number of concentrations for each position

Definition at line 31 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.21 `bool multiscale::video::RectangularCsvToInputFilesConverter::useLogScaling` [private]

Flag for using logarithmic scaling for concentrations or not

Definition at line 38 of file RectangularCsvToInputFilesConverter.hpp.

7.35.4.22 `unsigned int multiscale::video::RectangularCsvToInputFilesConverter::width` [private]

Width of the grid

Definition at line 26 of file RectangularCsvToInputFilesConverter.hpp.

The documentation for this class was generated from the following files:


- modules/video/rectangular/include/multiscale/video/rectangular/RectangularCsvToInputFilesConverter.hpp
- modules/video/rectangular/src/RectangularCsvToInputFilesConverter.cpp

7.36 multiscale::RectangularCsvToInputFilesConverterException Class Reference


Exception class for the RectangularCsvToInputFilesConverter class.

```
#include <RectangularCsvToInputFilesConverterException.hpp>
```

Inheritance diagram for multiscale::RectangularCsvToInputFilesConverterException:

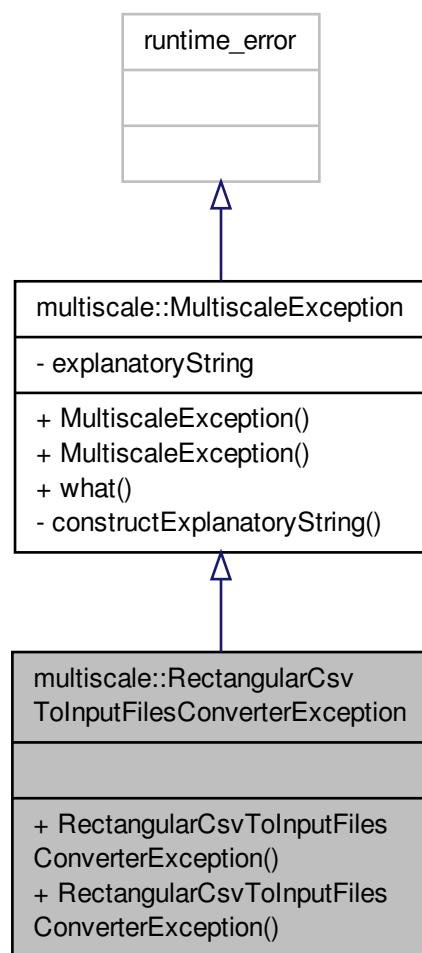

Collaboration diagram for multiscale::RectangularCsvToInputFilesConverterException:

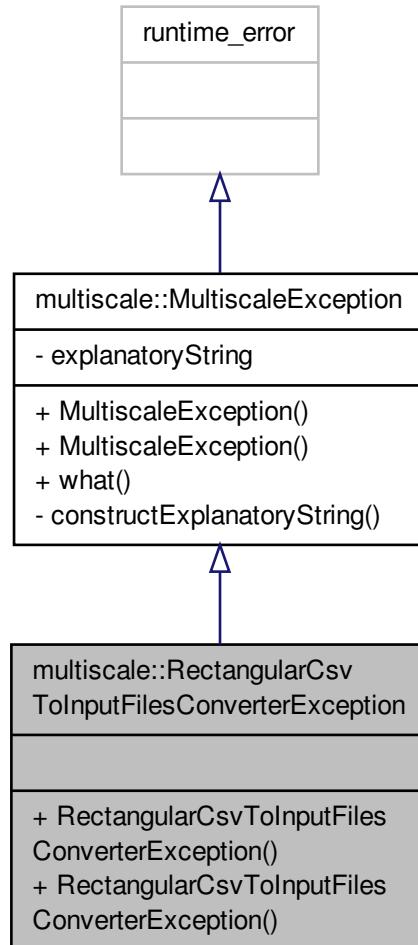

Public Member Functions

- [RectangularCsvToInputFilesConverterException \(const string &file, int line, const string &msg\)](#)
- [RectangularCsvToInputFilesConverterException \(const string &file, int line, const char *msg\)](#)

7.36.1 Detailed Description

Exception class for the RectangularCsvToInputFilesConverter class.

Definition at line 14 of file RectangularCsvToInputFilesConverterException.hpp.

7.36.2 Constructor & Destructor Documentation

7.36.2.1 `multiscale::RectangularCsvToInputFilesConverterException::RectangularCsvToInputFilesConverterException (const string & file, int line, const string & msg) [inline]`

Definition at line 18 of file `RectangularCsvToInputFilesConverterException.hpp`.

7.36.2.2 `multiscale::RectangularCsvToInputFilesConverterException::RectangularCsvToInputFilesConverterException (const string & file, int line, const char * msg) [inline]`

Definition at line 20 of file `RectangularCsvToInputFilesConverterException.hpp`.

The documentation for this class was generated from the following file:


- `include/multiscale/exception/RectangularCsvToInputFilesConverterException.hpp`

7.37 `multiscale::video::RectangularEntityCsvToInputFilesConverter` Class Reference

Csv entity file to input file converter considering cartesian coordinates.

```
#include <RectangularEntityCsvToInputFilesConverter.hpp>
```

Collaboration diagram for multiscale::video::RectangularEntityCsvToInputFilesConverter:

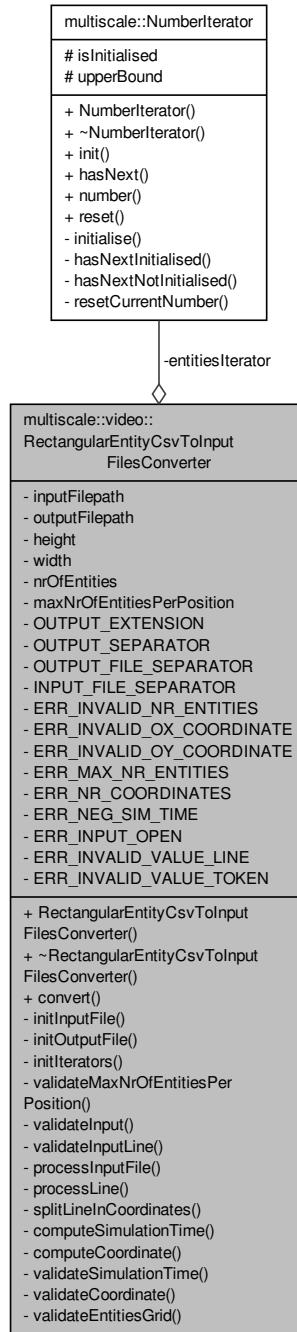

Public Member Functions

- [RectangularEntityCsvToInputFilesConverter](#) (const string &`inputfilepath`, const string &`outputfilepath`, unsigned int `height`, unsigned int `width`, unsigned int `nrOfEntities`, unsigned int `maxNrOfEntitiesPerPosition`, [NumberIteratorType](#) `numberIteratorType`)
- [~RectangularEntityCsvToInputFilesConverter](#) ()
- [void convert](#) ()

Start the conversion.

Private Member Functions

- void `initInputFile` (ifstream &fin)

Initialise the input file stream over the given input file.
- void `initOutputFile` (ofstream &fout, unsigned int index, double &simulationTime)

Initialise the output file with the given index and simulation time.
- void `initIterators` (const NumberIteratorType &numberIteratorType)

Initialise the iterators considering the given number iterator type.
- void `validateMaxNrOfEntitiesPerPosition` ()

Check if the maximum number of entities per position is a non-zero natural number.
- void `validateInput` (ifstream &fin)

Validate the input.
- void `validateInputLine` (const string &line, unsigned int lineNumber)

Validate the provided line identified by a line number.
- void `processInputFile` (ifstream &fin)

Process the input file.
- void `processLine` (const string &line, unsigned int outputIndex)

Process the provided line.
- vector< double > `splitLineInCoordinates` (const string &line, double &simulationTime)

*Split the line in coordinates and return the grid of size height * width showing the position of the entities.*
- double `computeSimulationTime` (const string &token)

Compute the simulation time from the given token and check if it is valid.
- unsigned int `computeCoordinate` (const string &token, bool isOxCoordinate)

Compute the coordinate from the given string and check if it is valid.
- void `validateSimulationTime` (const string &token, unsigned int lineNumber)

Check if the simulation time is valid.
- void `validateCoordinate` (const string &token, unsigned int lineNumber, bool isOxCoordinate)

Check if the coordinate is valid.
- void `validateEntitiesGrid` (const vector< double > &entitiesGrid)

Check if the entities grid contains only values between zero and one.

Private Attributes

- string `inputFilepath`
- string `outputFilepath`
- unsigned int `height`
- unsigned int `width`
- unsigned int `nrOfEntities`
- unsigned int `maxNrOfEntitiesPerPosition`
- NumberIterator * `entitiesIterator`

Static Private Attributes

- static const string `OUTPUT_EXTENSION` = ".in"
- static const string `OUTPUT_SEPARATOR` = " "
- static const string `OUTPUT_FILE_SEPARATOR` = "_"
- static const string `INPUT_FILE_SEPARATOR` = ","
- static const string `ERR_INVALID_NR_ENTITIES` = "The number of entities at the given position is invalid."
- static const string `ERR_INVALID_OX_COORDINATE` = "The value of the Ox coordinate is invalid."
- static const string `ERR_INVALID_OY_COORDINATE` = "The value of the Oy coordinate is invalid."
- static const string `ERR_MAX_NR_ENTITIES` = "The maximum number of entities per grid position is equal to zero."

- static const string `ERR_NR_COORDINATES` = "The number of coordinates in the input file does not match the values of the input parameters `height`, `width` and `nrOfEntities`."
- static const string `ERR_NEG_SIM_TIME` = "The simulation time must be non-negative."
- static const string `ERR_INPUT_OPEN` = "The input file could not be opened."
- static const string `ERR_INVALID_VALUE_LINE` = "Invalid value on line: "
- static const string `ERR_INVALID_VALUE_TOKEN` = ", value: "

7.37.1 Detailed Description

Csv entity file to input file converter considering cartesian coordinates.

Definition at line 18 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.2 Constructor & Destructor Documentation

7.37.2.1 `RectangularEntityCsvToInputFilesConverter::RectangularEntityCsvToInputFilesConverter (const string & inputFilepath, const string & outputFilepath, unsigned int height, unsigned int width, unsigned int nrOfEntities, unsigned int maxNrOfEntitiesPerPosition, NumberIteratorType numberIteratorType)`

Definition at line 19 of file RectangularEntityCsvToInputFilesConverter.cpp.

7.37.2.2 `RectangularEntityCsvToInputFilesConverter::~RectangularEntityCsvToInputFilesConverter ()`

Definition at line 38 of file RectangularEntityCsvToInputFilesConverter.cpp.

7.37.3 Member Function Documentation

7.37.3.1 `unsigned int RectangularEntityCsvToInputFilesConverter::computeCoordinate (const string & token, bool isOxCoordinate) [inline], [private]`

Compute the coordinate from the given string and check if it is valid.

Parameters

<code>token</code>	Token (string)
<code>isOxCoordinate</code>	Flag which indicates if the coordinate corresponds to Ox axis or not

Definition at line 208 of file RectangularEntityCsvToInputFilesConverter.cpp.

References `MS_throw`.

7.37.3.2 `double RectangularEntityCsvToInputFilesConverter::computeSimulationTime (const string & token) [inline], [private]`

Compute the simulation time from the given token and check if it is valid.

Parameters

<code>token</code>	Token (string)
--------------------	----------------

Definition at line 198 of file RectangularEntityCsvToInputFilesConverter.cpp.

References `MS_throw`.

7.37.3.3 void RectangularEntityCsvToInputFilesConverter::convert ()

Start the conversion.

Definition at line 42 of file RectangularEntityCsvToInputFilesConverter.cpp.

Referenced by main().

Here is the caller graph for this function:



7.37.3.4 void RectangularEntityCsvToInputFilesConverter::initInputFile (ifstream & fin) [private]

Initialise the input file stream over the given input file.

Parameters

<i>fin</i>	Input file stream
------------	-------------------

Definition at line 54 of file RectangularEntityCsvToInputFilesConverter.cpp.

References MS_throw.

7.37.3.5 void RectangularEntityCsvToInputFilesConverter::initIterators (const NumberIteratorType & numberIteratorType) [private]

Initialise the iterators considering the given number iterator type.

Parameters

<i>numberIteratorType</i>	The type of the number iterator
---------------------------	---------------------------------

Definition at line 79 of file RectangularEntityCsvToInputFilesConverter.cpp.

References multiscale::LEXICOGRAPHIC, and multiscale::STANDARD.

7.37.3.6 void RectangularEntityCsvToInputFilesConverter::initOutputFile (ofstream & fout, unsigned int index, double & simulationTime) [private]

Initialise the output file with the given index and simulation time.


Parameters

<i>fout</i>	Output file stream
<i>index</i>	Index of the output file
<i>simulationTime</i>	Simulation time

Definition at line 62 of file RectangularEntityCsvToInputFilesConverter.cpp.

References multiscale::StringManipulator::toString().

Here is the call graph for this function:



7.37.3.7 void RectangularEntityCsvToInputFilesConverter::processInputFile (ifstream & fin) [private]

Process the input file.

Read the concentrations and normalise them if it is the case.

Parameters

<i>fin</i>	Input file stream
------------	-------------------

Definition at line 142 of file RectangularEntityCsvToInputFilesConverter.cpp.

7.37.3.8 void RectangularEntityCsvToInputFilesConverter::processLine (const string & line, unsigned int outputIndex) [private]

Process the provided line.

Parameters

<i>line</i>	Line
<i>outputIndex</i>	Index integrated in the name of the output file

Definition at line 157 of file RectangularEntityCsvToInputFilesConverter.cpp.

7.37.3.9 vector< double > RectangularEntityCsvToInputFilesConverter::splitLineInCoordinates (const string & line, double & simulationTime) [private]

Split the line in coordinates and return the grid of size height * width showing the position of the entities.

The number of entities per grid position is normalised to the range [0, 1]


Parameters

<i>line</i>	Line
<i>simulationTime</i>	Simulation time associated with the line

Definition at line 176 of file RectangularEntityCsvToInputFilesConverter.cpp.

References multiscale::StringManipulator::split().

Here is the call graph for this function:



7.37.3.10 void RectangularEntityCsvToInputFilesConverter::validateCoordinate (const string & *token*, unsigned int *lineNumber*, bool *isOxCoordinate*) [inline], [private]

Check if the coordinate is valid.

Parameters

<i>token</i>	Token (string)
<i>lineNumber</i>	Number of the line
<i>isOxCoordinate</i>	Flag which indicates if the coordinate corresponds to Ox axis or not

Definition at line 237 of file RectangularEntityCsvToInputFilesConverter.cpp.

References MS_throw.

7.37.3.11 void RectangularEntityCsvToInputFilesConverter::validateEntitiesGrid (const vector< double > & *entitiesGrid*) [inline], [private]

Check if the entities grid contains only values between zero and one.

Parameters

<i>entitiesGrid</i>	The grid of entities
---------------------	----------------------

Definition at line 250 of file RectangularEntityCsvToInputFilesConverter.cpp.

References MS_throw.

7.37.3.12 void RectangularEntityCsvToInputFilesConverter::validateInput (ifstream & *fin*) [private]

Validate the input.

Parameters

<i>fin</i>	Input file stream
------------	-------------------

Definition at line 101 of file RectangularEntityCsvToInputFilesConverter.cpp.

References MS_throw.

7.37.3.13 void RectangularEntityCsvToInputFilesConverter::validateInputLine (const string & *line*, unsigned int *lineNumber*) [private]

Validate the provided line identified by a line number.


Parameters

<i>line</i>	Line from input file
<i>lineNumber</i>	Number of the line

Definition at line 125 of file RectangularEntityCsvToInputFilesConverter.cpp.

References MS_throw, and multiscale::StringManipulator::split().

Here is the call graph for this function:



7.37.3.14 void RectangularEntityCsvToInputFilesConverter::validateMaxNrOfEntitiesPerPosition () [private]

Check if the maximum number of entities per position is a non-zero natural number.

Definition at line 95 of file RectangularEntityCsvToInputFilesConverter.cpp.

References MS_throw.

7.37.3.15 void RectangularEntityCsvToInputFilesConverter::validateSimulationTime (const string & token, unsigned int lineNumber) [inline], [private]

Check if the simulation time is valid.

Parameters

<i>token</i>	Token (string)
<i>lineNumber</i>	Number of the line

Definition at line 224 of file RectangularEntityCsvToInputFilesConverter.cpp.

References MS_throw.

7.37.4 Member Data Documentation

7.37.4.1 NumberIterator* multiscale::video::RectangularEntityCsvToInputFilesConverter::entitiesIterator [private]

Iterator over the number of rows

Definition at line 31 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.2 const string RectangularEntityCsvToInputFilesConverter::ERR_INPUT_OPEN = "The input file could not be opened." [static], [private]

Definition at line 158 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.3 `const string RectangularEntityCsvToInputFilesConverter::ERR_INVALID_NR_ENTITIES = "The number of entities at the given position is invalid." [static], [private]`

Definition at line 152 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.4 `const string RectangularEntityCsvToInputFilesConverter::ERR_INVALID_OX_COORDINATE = "The value of the Ox coordinate is invalid." [static], [private]`

Definition at line 153 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.5 `const string RectangularEntityCsvToInputFilesConverter::ERR_INVALID_OY_COORDINATE = "The value of the Oy coordinate is invalid." [static], [private]`

Definition at line 154 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.6 `const string RectangularEntityCsvToInputFilesConverter::ERR_INVALID_VALUE_LINE = "Invalid value on line: " [static], [private]`

Definition at line 159 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.7 `const string RectangularEntityCsvToInputFilesConverter::ERR_INVALID_VALUE_TOKEN = ", value: " [static], [private]`

Definition at line 160 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.8 `const string RectangularEntityCsvToInputFilesConverter::ERR_MAX_NR_ENTITIES = "The maximum number of entities per grid position is equal to zero." [static], [private]`

Definition at line 155 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.9 `const string RectangularEntityCsvToInputFilesConverter::ERR_NEG_SIM_TIME = "The simulation time must be non-negative." [static], [private]`

Definition at line 157 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.10 `const string RectangularEntityCsvToInputFilesConverter::ERR_NR_COORDINATES = "The number of coordinates in the input file does not match the values of the input parameters height, width and nrOfEntities." [static], [private]`

Definition at line 156 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.11 `unsigned int multiscale::video::RectangularEntityCsvToInputFilesConverter::height [private]`

Height of the grid

Definition at line 25 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.12 `const string RectangularEntityCsvToInputFilesConverter::INPUT_FILE_SEPARATOR = "," [static], [private]`

Definition at line 150 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.13 `string multiscale::video::RectangularEntityCsvToInputFilesConverter::inputFilepath` [private]

Path to the input file

Definition at line 22 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.14 `unsigned int multiscale::video::RectangularEntityCsvToInputFilesConverter::maxNrOfEntitiesPerPosition` [private]

The maximum number of entities per position

Definition at line 29 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.15 `unsigned int multiscale::video::RectangularEntityCsvToInputFilesConverter::nrOfEntities` [private]

Number of entities

Definition at line 27 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.16 `const string RectangularEntityCsvToInputFilesConverter::OUTPUT_EXTENSION = ".in"` [static], [private]

Definition at line 147 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.17 `const string RectangularEntityCsvToInputFilesConverter::OUTPUT_FILE_SEPARATOR = "_"` [static], [private]

Definition at line 149 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.18 `const string RectangularEntityCsvToInputFilesConverter::OUTPUT_SEPARATOR = " "` [static], [private]

Definition at line 148 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.19 `string multiscale::video::RectangularEntityCsvToInputFilesConverter::outputFilepath` [private]

Path to the output file

Definition at line 23 of file RectangularEntityCsvToInputFilesConverter.hpp.

7.37.4.20 `unsigned int multiscale::video::RectangularEntityCsvToInputFilesConverter::width` [private]

Width of the grid

Definition at line 26 of file RectangularEntityCsvToInputFilesConverter.hpp.

The documentation for this class was generated from the following files:


- modules/video/rectangular/include/multiscale/video/rectangular/[RectangularEntityCsvToInputFilesConverter.hpp](#)
- modules/video/rectangular/src/[RectangularEntityCsvToInputFilesConverter.cpp](#)

7.38 multiscale::RectangularEntityCsvToInputFilesConverterException Class Reference


Exception class for the RectangularEntityCsvToInputFilesConverter class.

```
#include <RectangularEntityCsvToInputFilesConverterException.hpp>
```

Inheritance diagram for multiscale::RectangularEntityCsvToInputFilesConverterException:

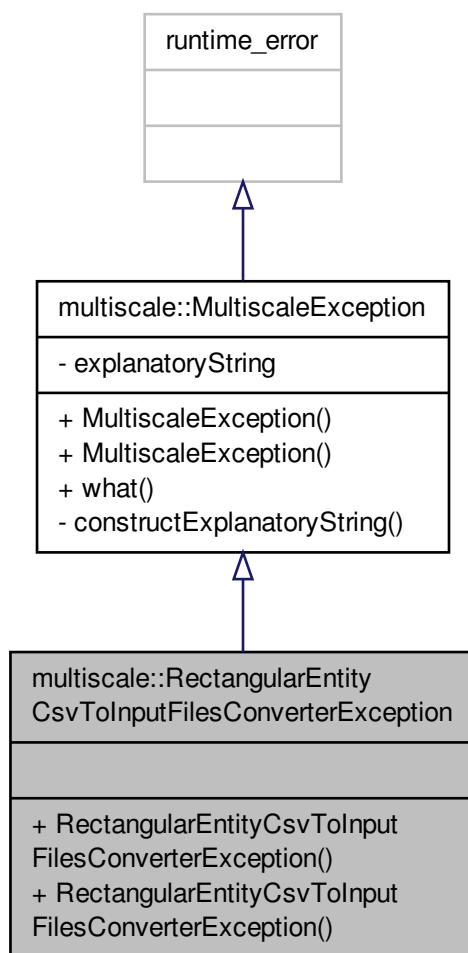

Collaboration diagram for multiscale::RectangularEntityCsvToInputFilesConverterException:

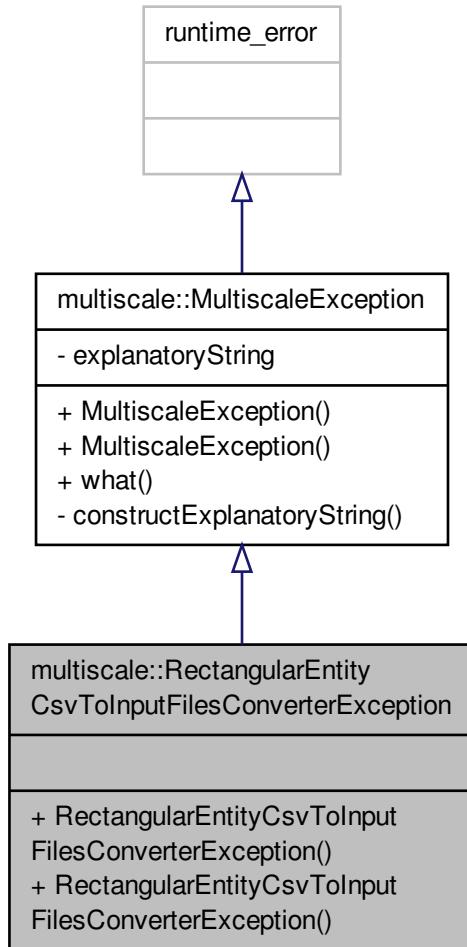

Public Member Functions

- [RectangularEntityCsvToInputFilesConverterException](#) (const string &file, int line, const string &msg)
- [RectangularEntityCsvToInputFilesConverterException](#) (const string &file, int line, const char *msg)

7.38.1 Detailed Description

Exception class for the `RectangularEntityCsvToInputFilesConverter` class.

Definition at line 14 of file `RectangularEntityCsvToInputFilesConverterException.hpp`.

7.38.2 Constructor & Destructor Documentation

7.38.2.1 `multiscale::RectangularEntityCsvToInputFilesConverterException::RectangularEntityCsvToInputFilesConverterException (const string & file, int line, const string & msg) [inline]`

Definition at line 18 of file `RectangularEntityCsvToInputFilesConverterException.hpp`.

7.38.2.2 `multiscale::RectangularEntityCsvToInputFilesConverterException::RectangularEntityCsvToInputFilesConverterException (const string & file, int line, const char * msg) [inline]`

Definition at line 20 of file `RectangularEntityCsvToInputFilesConverterException.hpp`.

The documentation for this class was generated from the following file:

- [include/multiscale/exception/RectangularEntityCsvToInputFilesConverterException.hpp](#)

7.39 multiscale::video::RectangularGnuplotScriptGenerator Class Reference

Gnuplot script generator from the provided concentrations considering a rectangular geometry.

`#include <RectangularGnuplotScriptGenerator.hpp>`

Collaboration diagram for multiscale::video::RectangularGnuplotScriptGenerator:

<code>multiscale::video:: RectangularGnuplotScriptGenerator</code>	
- HEADER_IN	
- CONTENT_IN	
- FOOTER_IN	
- REPLACE_HEADER_FILENAME	
- REPLACE_HEADER_HEIGHT	
- REPLACE_HEADER_WIDTH	
- REPLACE_HEADER_SIM_TIME	
- REPLACE_DIMENSION_EXTRA	
- OUTPUT_SEPARATOR	
- GNUPLOT_EXTENSION	
+ generateScript()	
- generateHeader()	
- generateBody()	
- generateFooter()	
- outputHeader()	
- outputContent()	
- outputFooter()	

Static Public Member Functions

- `static void generateScript (const vector< double > &concentrations, double simulationTime, unsigned long height, unsigned long width, const string &outputFilepath)`

Generate the script.

Static Private Member Functions

- static void `generateHeader` (ofstream &fout, const string &outputfilepath, double simulationTime, unsigned long height, unsigned long width)

Generate the header of the script.
- static void `generateBody` (const vector< double > &concentrations, unsigned long height, unsigned long width, ofstream &fout)

Generate the body/content of the script.
- static void `generateFooter` (ofstream &fout)

Generate the footer of the script.
- static void `outputHeader` (ifstream &fin, const string &outputfilename, double simulationTime, unsigned long height, unsigned long width, ofstream &fout)

Output the header of the script.
- static void `outputContent` (const vector< double > &concentrations, unsigned long height, unsigned long width, ofstream &fout)

Output the content of the script.
- static void `outputFooter` (ifstream &fin, ofstream &fout)

Output the footer of the script.

Static Private Attributes

- static const string `HEADER_IN` = "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/video/rectangular/header.in"
- static const string `CONTENT_IN` = "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/video/rectangular/content.in"
- static const string `FOOTER_IN` = "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/video/rectangular/footer.in"
- static const string `REPLACE_HEADER_FILENAME` = "OUTPUT_FILENAME"
- static const string `REPLACE_HEADER_HEIGHT` = "OUTPUT_DIMENSION1"
- static const string `REPLACE_HEADER_WIDTH` = "OUTPUT_DIMENSION2"
- static const string `REPLACE_HEADER_SIM_TIME` = "OUTPUT_SIM_TIME"
- static const double `REPLACE_DIMENSION_EXTRA` = 0.5
- static const string `OUTPUT_SEPARATOR` = " "
- static const string `GNUPLOT_EXTENSION` = ".plt"

7.39.1 Detailed Description

Gnuplot script generator from the provided concentrations considering a rectangular geometry.

Definition at line 15 of file RectangularGnuplotScriptGenerator.hpp.

7.39.2 Member Function Documentation

7.39.2.1 void RectangularGnuplotScriptGenerator::generateBody (const vector< double > & *concentrations*, unsigned long *height*, unsigned long *width*, ofstream & *fout*) [static], [private]

Generate the body/content of the script.

Parameters

<code>concentrations</code>	The concentrations
<code>height</code>	The height of the grid
<code>width</code>	The width of the grid
<code>fout</code>	Output file stream

Definition at line 44 of file RectangularGnuplotScriptGenerator.cpp.

7.39.2.2 void RectangularGnuplotScriptGenerator::generateFooter (ostream & *fout*) [static], [private]

Generate the footer of the script.

Parameters

<i>fout</i>	Output file stream
-------------	--------------------

Definition at line 55 of file RectangularGnuplotScriptGenerator.cpp.

7.39.2.3 void RectangularGnuplotScriptGenerator::generateHeader (ostream & *fout*, const string & *outputfilepath*, double *simulationTime*, unsigned long *height*, unsigned long *width*) [static], [private]

Generate the header of the script.


Parameters

<i>fout</i>	Output file stream
<i>outputfilepath</i>	Path to the output file
<i>simulationTime</i>	Simulation time
<i>height</i>	Height of the grid
<i>width</i>	Width of the grid

Definition at line 30 of file RectangularGnuplotScriptGenerator.cpp.

References multiscale::StringManipulator::filenameFromPath().

Here is the call graph for this function:



7.39.2.4 void RectangularGnuplotScriptGenerator::generateScript (const vector< double > & *concentrations*, double *simulationTime*, unsigned long *height*, unsigned long *width*, const string & *outputfilepath*) [static]

Generate the script.


Parameters

<i>concentrations</i>	Concentrations
<i>simulationTime</i>	Simulation time
<i>height</i>	Height of the grid
<i>width</i>	Width of the grid
<i>outputfilepath</i>	Path of the output file

Definition at line 14 of file RectangularGnuplotScriptGenerator.cpp.

Referenced by multiscale::video::CartesianToConcentrationsConverter::outputResults().

Here is the caller graph for this function:



7.39.2.5 void RectangularGnuplotScriptGenerator::outputContent (const vector< double > & concentrations, unsigned long height, unsigned long width, ofstream & fout) [static], [private]

Output the content of the script.

Parameters

<i>concentrations</i>	The concentrations
<i>height</i>	The height of the grid
<i>width</i>	The width of the grid
<i>fout</i>	Output file stream

Definition at line 81 of file RectangularGnuplotScriptGenerator.cpp.

7.39.2.6 void RectangularGnuplotScriptGenerator::outputFooter (ifstream & fin, ofstream & fout) [static], [private]

Output the footer of the script.

Parameters

<i>fin</i>	Input file stream
<i>fout</i>	Output file stream

Definition at line 94 of file RectangularGnuplotScriptGenerator.cpp.

7.39.2.7 void RectangularGnuplotScriptGenerator::outputHeader (ifstream & fin, const string & outputFilename, double simulationTime, unsigned long height, unsigned long width, ofstream & fout) [static], [private]

Output the header of the script.


Parameters

<i>fin</i>	Input file stream
<i>outputFilename</i>	Name of the output file
<i>simulationTime</i>	Simulation time
<i>height</i>	The height of the grid
<i>width</i>	The width of the grid
<i>fout</i>	Output file stream

Definition at line 65 of file RectangularGnuplotScriptGenerator.cpp.

References multiscale::StringManipulator::replace().

Here is the call graph for this function:



7.39.3 Member Data Documentation

7.39.3.1 `const string RectangularGnuplotScriptGenerator::CONTENT_IN =
"/home/ovidiu/Repositories/git/multiscale/Multiscale/config/video/rectangular/content.in"
[static], [private]`

Definition at line 104 of file RectangularGnuplotScriptGenerator.hpp.

7.39.3.2 `const string RectangularGnuplotScriptGenerator::FOOTER_IN =
"/home/ovidiu/Repositories/git/multiscale/Multiscale/config/video/rectangular/footer.in"
[static], [private]`

Definition at line 105 of file RectangularGnuplotScriptGenerator.hpp.

7.39.3.3 `const string RectangularGnuplotScriptGenerator::GNUPLOT_EXTENSION = ".plt" [static], [private]`

Definition at line 116 of file RectangularGnuplotScriptGenerator.hpp.

7.39.3.4 `const string RectangularGnuplotScriptGenerator::HEADER_IN =
"/home/ovidiu/Repositories/git/multiscale/Multiscale/config/video/rectangular/header.in"
[static], [private]`

Definition at line 103 of file RectangularGnuplotScriptGenerator.hpp.

7.39.3.5 `const string RectangularGnuplotScriptGenerator::OUTPUT_SEPARATOR = "" [static], [private]`

Definition at line 114 of file RectangularGnuplotScriptGenerator.hpp.

7.39.3.6 `const double RectangularGnuplotScriptGenerator::REPLACE_DIMENSION_EXTRA = 0.5 [static],
[private]`

Definition at line 112 of file RectangularGnuplotScriptGenerator.hpp.

7.39.3.7 `const string RectangularGnuplotScriptGenerator::REPLACE_HEADER_FILENAME = "OUTPUT_FILENAME"
[static], [private]`

Definition at line 107 of file RectangularGnuplotScriptGenerator.hpp.

```
7.39.3.8 const string RectangularGnuplotScriptGenerator::REPLACE_HEADER_HEIGHT = "OUTPUT_DIMENSION1"  
[static], [private]
```

Definition at line 108 of file RectangularGnuplotScriptGenerator.hpp.

```
7.39.3.9 const string RectangularGnuplotScriptGenerator::REPLACE_HEADER_SIM_TIME = "OUTPUT_SIM_TIME"  
[static], [private]
```

Definition at line 110 of file RectangularGnuplotScriptGenerator.hpp.

```
7.39.3.10 const string RectangularGnuplotScriptGenerator::REPLACE_HEADER_WIDTH = "OUTPUT_DIMENSION2"  
[static], [private]
```

Definition at line 109 of file RectangularGnuplotScriptGenerator.hpp.

The documentation for this class was generated from the following files:


- modules/video/rectangular/include/multiscale/video/rectangular/[RectangularGnuplotScriptGenerator.hpp](#)
- modules/video/rectangular/src/[RectangularGnuplotScriptGenerator.cpp](#)

7.40 multiscale::analysis::RectangularMatFactory Class Reference


Class for creating a Mat object considering a rectangular grid.

```
#include <RectangularMatFactory.hpp>
```

Inheritance diagram for multiscale::analysis::RectangularMatFactory:

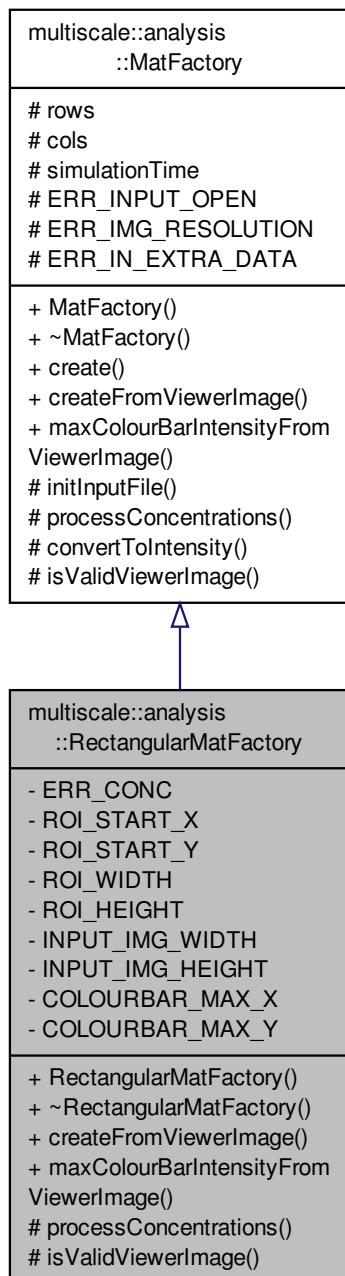

Collaboration diagram for multiscale::analysis::RectangularMatFactory:

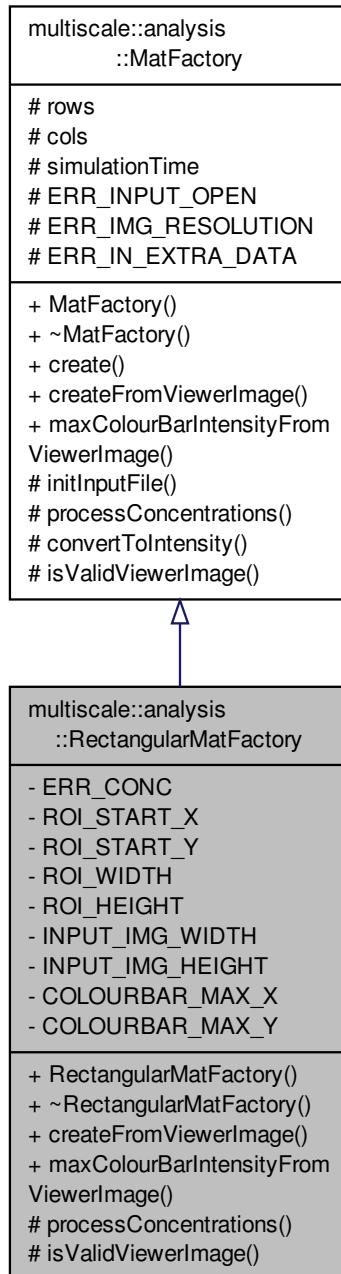

Public Member Functions

- `RectangularMatFactory ()`
- `~RectangularMatFactory ()`
- Mat `createFromViewerImage (const string &inputFile)` override

Create a Mat object from the image file obtained from the RectangularGeometryViewer.

- double `maxColourBarIntensityFromViewerImage (const string &inputFile)` override

Get the maximum grayscale intensity of the colour bar in the image.

Protected Member Functions

- `unsigned char * processConcentrations (ifstream &fin) override`
Process the concentrations from the input file.
- `bool isValidViewerImage (const Mat &image) override`
Check if the image generated by the viewer has the required resolution.

Static Private Attributes

- `static const string ERR_CONC = "All concentrations have to be between 0 and 1."`
- `static const int ROI_START_X = 321`
- `static const int ROI_START_Y = 318`
- `static const int ROI_WIDTH = 1407`
- `static const int ROI_HEIGHT = 1358`
- `static const int INPUT_IMG_WIDTH = 2048`
- `static const int INPUT_IMG_HEIGHT = 2048`
- `static const int COLOURBAR_MAX_X = 1799`
- `static const int COLOURBAR_MAX_Y = 320`

Additional Inherited Members

7.40.1 Detailed Description

Class for creating a Mat object considering a rectangular grid.

Definition at line 14 of file RectangularMatFactory.hpp.

7.40.2 Constructor & Destructor Documentation

7.40.2.1 RectangularMatFactory::RectangularMatFactory ()

Definition at line 9 of file RectangularMatFactory.cpp.

7.40.2.2 RectangularMatFactory::~RectangularMatFactory ()

Definition at line 11 of file RectangularMatFactory.cpp.

7.40.3 Member Function Documentation

7.40.3.1 Mat RectangularMatFactory::createFromViewerImage (const string & *inputFile*) [override], [virtual]

Create a Mat object from the image file obtained from the RectangularGeometryViewer.

Create the Mat instance from the given image file

Parameters

<i>inputFile</i>	The path to the image file
------------------	----------------------------


Implements [multiscale::analysis::MatFactory](#).

Definition at line 13 of file RectangularMatFactory.cpp.


References isValidViewerImage(), ROI_HEIGHT, ROI_START_X, ROI_START_Y, and ROI_WIDTH.

Referenced by main().

Here is the call graph for this function:



Here is the caller graph for this function:



7.40.3.2 `bool RectangularMatFactory::isValidViewerImage (const Mat & image)` [override], [protected], [virtual]

Check if the image generated by the viewer has the required resolution.

Parameters

<i>image</i>	Image generated by the viewer
--------------	-------------------------------


Implements [multiscale::analysis::MatFactory](#).

Definition at line 46 of file RectangularMatFactory.cpp.

References multiscale::analysis::MatFactory::ERR_IMG_RESOLUTION, multiscale::analysis::MatFactory::ERR_INPUT_OPEN, INPUT_IMG_HEIGHT, INPUT_IMG_WIDTH, and MS_throw.

Referenced by createFromViewerImage(), and maxColourBarIntensityFromViewerImage().

Here is the caller graph for this function:

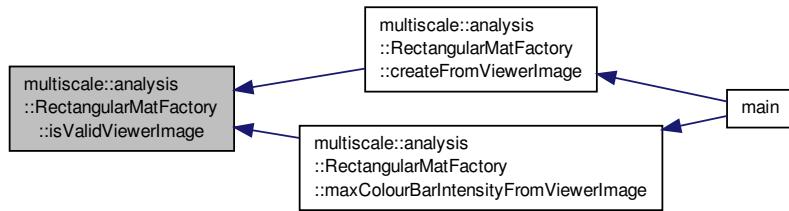

7.40.3.3 double RectangularMatFactory::maxColourBarIntensityFromViewerImage (const string & *inputFile*)
 [override], [virtual]

Get the maximum grayscale intensity of the colour bar in the image.

Parameters

inputFile The path to the image file

Implements [multiscale::analysis::MatFactory](#).

Definition at line 21 of file [RectangularMatFactory.cpp](#).


References [COLOURBAR_MAX_X](#), [COLOURBAR_MAX_Y](#), and [isValidViewerImage\(\)](#).

Referenced by [main\(\)](#).

Here is the call graph for this function:



Here is the caller graph for this function:



7.40.3.4 `unsigned char * RectangularMatFactory::processConcentrations (ifstream & fin) [override], [protected], [virtual]`

Process the concentrations from the input file.

Read the concentrations from the input file and return them as an array which can be used afterwards to create a Mat object from them

REMARK: The constructor of Mat does not copy the data. Therefore, DO NOT deallocate it in this class.

Parameters


<code>fin</code>	Input file stream from which the concentrations are read
------------------	--

Implements [multiscale::analysis::MatFactory](#).

Definition at line 29 of file RectangularMatFactory.cpp.

References `multiscale::analysis::MatFactory::cols`, `multiscale::analysis::MatFactory::convertToIntensity()`, `ERR_C-ONC`, `MS_throw`, and `multiscale::analysis::MatFactory::rows`.

Here is the call graph for this function:



7.40.4 Member Data Documentation

7.40.4.1 `const int RectangularMatFactory::COLOURBAR_MAX_X = 1799 [static], [private]`

Definition at line 68 of file RectangularMatFactory.hpp.

Referenced by `maxColourBarIntensityFromViewerImage()`.

7.40.4.2 `const int RectangularMatFactory::COLOURBAR_MAX_Y = 320 [static], [private]`

Definition at line 69 of file RectangularMatFactory.hpp.

Referenced by `maxColourBarIntensityFromViewerImage()`.

7.40.4.3 `const string RectangularMatFactory::ERR_CONC = "All concentrations have to be between 0 and 1." [static], [private]`

Definition at line 58 of file RectangularMatFactory.hpp.

Referenced by `processConcentrations()`.

7.40.4.4 `const int RectangularMatFactory::INPUT_IMG_HEIGHT = 2048 [static], [private]`

Definition at line 66 of file RectangularMatFactory.hpp.

Referenced by `isValidViewerImage()`.

7.40.4.5 `const int RectangularMatFactory::INPUT_IMG_WIDTH = 2048` [static], [private]

Definition at line 65 of file RectangularMatFactory.hpp.

Referenced by `isValidViewerImage()`.

7.40.4.6 `const int RectangularMatFactory::ROI_HEIGHT = 1358` [static], [private]

Definition at line 63 of file RectangularMatFactory.hpp.

Referenced by `createFromViewerImage()`.

7.40.4.7 `const int RectangularMatFactory::ROI_START_X = 321` [static], [private]

Definition at line 60 of file RectangularMatFactory.hpp.

Referenced by `createFromViewerImage()`.

7.40.4.8 `const int RectangularMatFactory::ROI_START_Y = 318` [static], [private]

Definition at line 61 of file RectangularMatFactory.hpp.

Referenced by `createFromViewerImage()`.

7.40.4.9 `const int RectangularMatFactory::ROI_WIDTH = 1407` [static], [private]

Definition at line 62 of file RectangularMatFactory.hpp.

Referenced by `createFromViewerImage()`.

The documentation for this class was generated from the following files:


- `modules/analysis/spatial/include/multiscale/analysis/spatial/factory/RectangularMatFactory.hpp`
- `modules/analysis/spatial/src/factory/RectangularMatFactory.cpp`

7.41 multiscale::RectangularMatFactoryException Class Reference


Exception class for the RectangularMatFactory instances.

```
#include <RectangularMatFactoryException.hpp>
```

Inheritance diagram for multiscale::RectangularMatFactoryException:

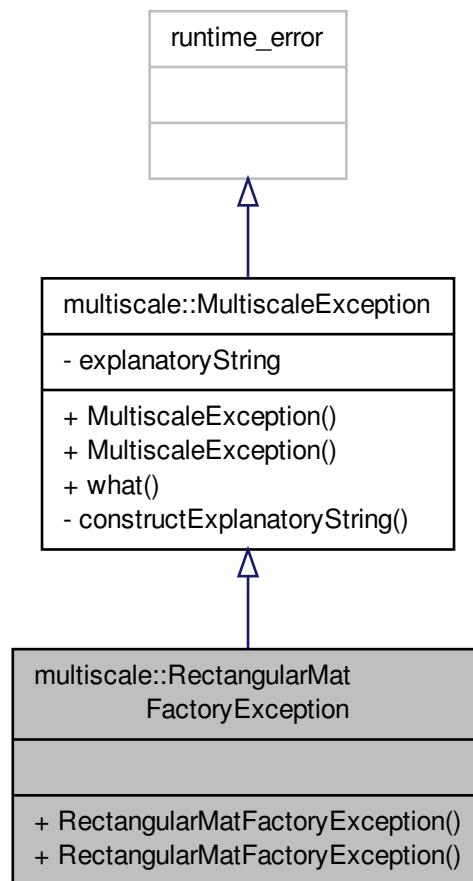

Collaboration diagram for multiscale::RectangularMatFactoryException:

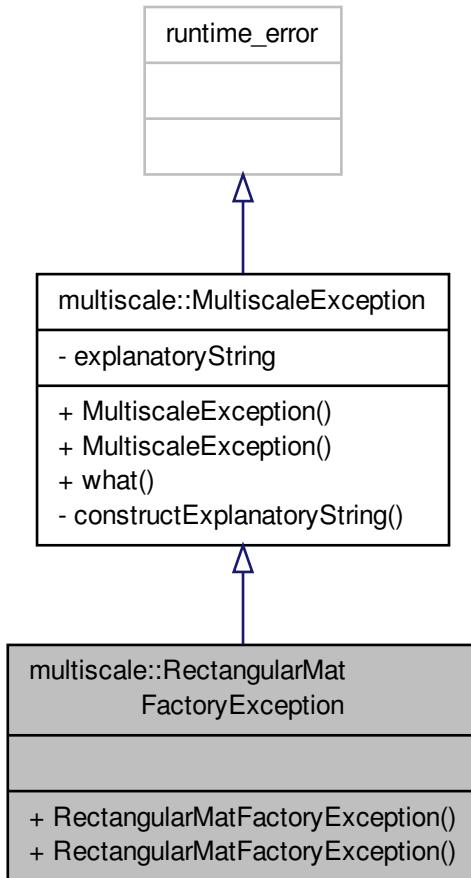

Public Member Functions

- [RectangularMatFactoryException](#) (const string &file, int line, const string &msg)
- [RectangularMatFactoryException](#) (const string &file, int line, const char *msg)

7.41.1 Detailed Description

Exception class for the RectangularMatFactory instances.

Definition at line 14 of file RectangularMatFactoryException.hpp.

7.41.2 Constructor & Destructor Documentation

7.41.2.1 multiscale::RectangularMatFactoryException::RectangularMatFactoryException (const string & file, int line, const string & msg) [inline]

Definition at line 18 of file RectangularMatFactoryException.hpp.

7.41.2.2 `multiscale::RectangularMatFactoryException::RectangularMatFactoryException (const string & file, int line, const char * msg)` [inline]

Definition at line 20 of file `RectangularMatFactoryException.hpp`.

The documentation for this class was generated from the following file:

- [include/multiscale/exception/RectangularMatFactoryException.hpp](#)

7.42 multiscale::analysis::Region Class Reference


Class for representing a region.

```
#include <Region.hpp>
```

Inheritance diagram for multiscale::analysis::Region:



Collaboration diagram for multiscale::analysis::Region:

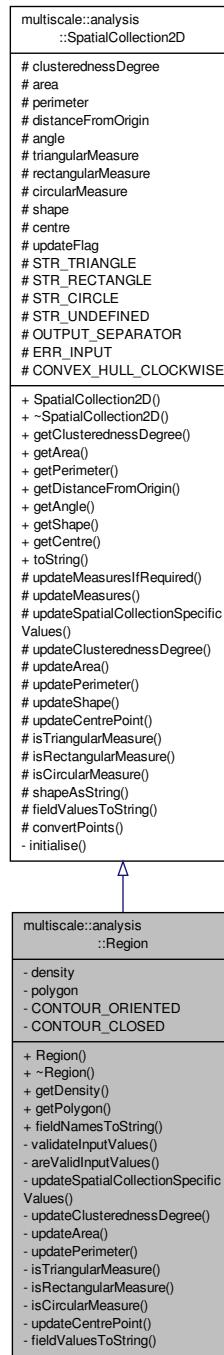

Public Member Functions

- `Region (double clusterednessDegree, double density, double area, double distanceFromOrigin, double angle-WrtOrigin, const vector< Point > &polygon)`
- `~Region ()`
- `double getDensity ()`

Get the density.

- const vector< Point > & `getPolygon ()`
Get the polygon defining the region.

Static Public Member Functions

- static string `fieldNamesToString ()`
Get a string representation of all the field names except polygon.

Private Member Functions

- void `validateInputValues` (double `clusterednessDegree`, double `density`, double `area`, double `distanceFromOrigin`, double `angleWrtOrigin`, const vector< Point > &`polygon`)
Validate the input values.
- bool `isValidInputValues` (double `clusterednessDegree`, double `density`, double `area`, double `distanceFromOrigin`, double `angleWrtOrigin`, const vector< Point > &`polygon`)
Check if the input values are valid or not.
- void `updateSpatialCollectionSpecificValues ()` override
Update the value of all class specific measures.
- void `updateClusterednessDegree ()` override
Update the value of the clusteredness degree.
- void `updateArea ()` override
Update the area.
- void `updatePerimeter ()` override
Update the perimeter.
- double `isTriangularMeasure ()` override
Get the measure that the cluster has a triangular shape.
- double `isRectangularMeasure ()` override
Get the measure that the cluster has a rectangular shape.
- double `isCircularMeasure ()` override
Get the measure that the cluster has a circular shape.
- void `updateCentrePoint ()` override
Update the centre of the region.
- string `fieldValuesToString ()` override
Get a string representation of all the field values except polygon.

Private Attributes

- double `density`
- vector< Point > `polygon`

Static Private Attributes

- static const bool `CONTOUR_ORIENTED` = false
- static const bool `CONTOUR_CLOSED` = true

Additional Inherited Members

7.42.1 Detailed Description

Class for representing a region.

Definition at line 19 of file Region.hpp.

7.42.2 Constructor & Destructor Documentation

7.42.2.1 `Region::Region (double clusterednessDegree, double density, double area, double distanceFromOrigin, double angleWrtOrigin, const vector< Point > & polygon)`

Definition at line 11 of file Region.cpp.

References multiscale::analysis::SpatialCollection2D::angle, multiscale::analysis::SpatialCollection2D::area, multiscale::analysis::SpatialCollection2D::clusterednessDegree, density, multiscale::analysis::SpatialCollection2D::distanceFromOrigin, polygon, and validateInputValues().

Here is the call graph for this function:



7.42.2.2 `Region::~Region ()`

Definition at line 24 of file Region.cpp.

References polygon.

7.42.3 Member Function Documentation

7.42.3.1 `bool Region::areValidInputValues (double clusterednessDegree, double density, double area, double distanceFromOrigin, double angleWrtOrigin, const vector< Point > & polygon) [private]`

Check if the input values are valid or not.

Validation rules: $0 < \text{clusterednessDegree}$ $0 < \text{density}$ $0 < \text{distanceFromOrigin}$ $0 \leq \text{angleWrtOrigin} \leq 360$

For each polygon point p: $0 \leq p.x \leq p.y$

Parameters


<i>clusterednessDegree</i>	The clusteredness degree of the region
<i>density</i>	The density of the region
<i>area</i>	The area of the region considering holes
<i>distanceFromOrigin</i>	The distance from the origin
<i>angleWrtOrigin</i>	The angle computed wrt to the origin
<i>polygon</i>	The polygon

Definition at line 49 of file Region.cpp.


References multiscale::Numeric::lessOrEqual().

Referenced by validateInputValues().

Here is the call graph for this function:



Here is the caller graph for this function:




7.42.3.2 string Region::fieldNamesToString() [static]

Get a string representation of all the field names except polygon.

Definition at line 38 of file Region.cpp.

Referenced by multiscale::analysis::RegionDetector::outputResultsToCsvFile().

Here is the caller graph for this function:



7.42.3.3 string Region::fieldValuesToString() [override], [private], [virtual]


Get a string representation of all the field values except polygon.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 118 of file Region.cpp.

References multiscale::analysis::SpatialCollection2D::angle, multiscale::analysis::SpatialCollection2D::area, multiscale::analysis::SpatialCollection2D::centre, multiscale::analysis::SpatialCollection2D::circularMeasure, multiscale::analysis::SpatialCollection2D::clusterednessDegree, density, multiscale::analysis::SpatialCollection2D::distanceFromOrigin, multiscale::analysis::SpatialCollection2D::OUTPUT_SEPARATOR, multiscale::analysis::SpatialCollection2D::perimeter, multiscale::analysis::SpatialCollection2D::rectangularMeasure, multiscale::analysis::SpatialCollection2D::shapeAsString(), and multiscale::analysis::SpatialCollection2D::triangularMeasure.

Here is the call graph for this function:




7.42.3.4 double Region::getDensity ()

Get the density.

Definition at line 28 of file Region.cpp.

References density, and multiscale::analysis::SpatialCollection2D::updateMeasuresIfRequired().

Here is the call graph for this function:

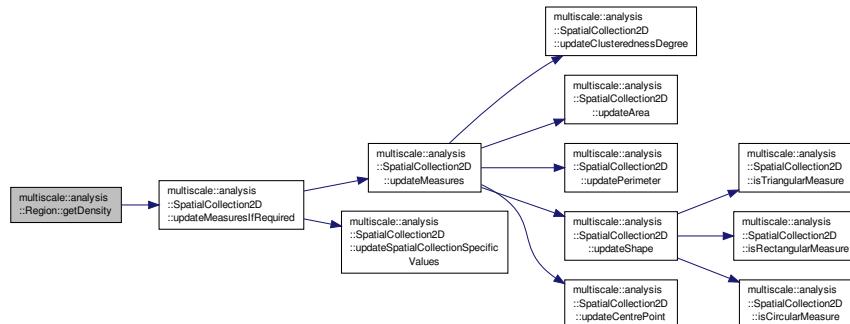

7.42.3.5 const vector< Point > & Region::getPolygon ()

Get the polygon defining the region.

Definition at line 34 of file Region.cpp.

References polygon.

7.42.3.6 double Region::isCircularMeasure () [override], [private], [virtual]


Get the measure that the cluster has a circular shape.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 99 of file Region.cpp.

References [multiscale::Numeric::almostEqual\(\)](#), [multiscale::analysis::SpatialCollection2D::area](#), [multiscale::Geometry2D::PI](#), and [polygon](#).

Here is the call graph for this function:



7.42.3.7 double Region::isRectangularMeasure () [override], [private], [virtual]


Get the measure that the cluster has a rectangular shape.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 89 of file Region.cpp.

References [multiscale::Numeric::almostEqual\(\)](#), [multiscale::analysis::SpatialCollection2D::area](#), and [polygon](#).

Here is the call graph for this function:



7.42.3.8 double Region::isTriangularMeasure () [override], [private], [virtual]


Get the measure that the cluster has a triangular shape.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 77 of file Region.cpp.

References [multiscale::Numeric::almostEqual\(\)](#), [multiscale::analysis::SpatialCollection2D::area](#), [multiscale::analysis::SpatialCollection2D::convertPoints\(\)](#), [multiscale::analysis::SpatialCollection2D::CONVEX_CLOCKWISE](#), [multiscale::MinEnclosingTriangleFinder::find\(\)](#), and [polygon](#).

Here is the call graph for this function:

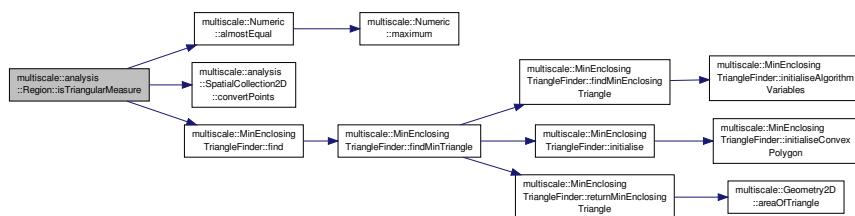

7.42.3.9 void Region::updateArea() [override], [private], [virtual]

Update the area.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 71 of file Region.cpp.

7.42.3.10 void Region::updateCentrePoint() [override], [private], [virtual]

Update the centre of the region.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 112 of file Region.cpp.

References multiscale::analysis::SpatialCollection2D::centre, and polygon.

7.42.3.11 void Region::updateClusterednessDegree() [override], [private], [virtual]

Update the value of the clusteredness degree.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 69 of file Region.cpp.

7.42.3.12 void Region::updatePerimeter() [override], [private], [virtual]

Update the perimeter.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 73 of file Region.cpp.

References CONTOUR_CLOSED, multiscale::analysis::SpatialCollection2D::perimeter, and polygon.

7.42.3.13 void Region::updateSpatialCollectionSpecificValues() [override], [private], [virtual]

Update the value of all class specific measures.

Implements [multiscale::analysis::SpatialCollection2D](#).

Definition at line 67 of file Region.cpp.

7.42.3.14 void Region::validateInputValues(double clusterednessDegree, double density, double area, double distanceFromOrigin, double angleWrtOrigin, const vector< Point > & polygon) [private]

Validate the input values.

Validation rules: $0 < \text{clusterednessDegree}$ $0 < \text{density}$ $0 < \text{area}$ $0 < \text{distanceFromOrigin}$ $0 \leq \text{angleWrtOrigin} \leq 360$

For each polygon point p: $0 \leq p.x \leq p.y$

Parameters

<i>clusterednessDegree</i>	The clusteredness degree of the region
<i>density</i>	The density of the region
<i>area</i>	The area of the region considering holes
<i>distanceFromOrigin</i>	The distance from the origin
<i>angleWrtOrigin</i>	The angle computed wrt to the origin
<i>polygon</i>	The polygon

Definition at line 42 of file Region.cpp.


References areValidInputValues(), multiscale::analysis::SpatialCollection2D::ERR_INPUT, and MS_throw.

Referenced by Region().

Here is the call graph for this function:



Here is the caller graph for this function:



7.42.4 Member Data Documentation

7.42.4.1 const bool Region::CONTOUR_CLOSED = true [static], [private]

Definition at line 120 of file Region.hpp.

Referenced by updatePerimeter().

7.42.4.2 const bool Region::CONTOUR_ORIENTED = false [static], [private]

Definition at line 119 of file Region.hpp.

7.42.4.3 double multiscale::analysis::Region::density [private]

The average intensity of the pixels in the region

normalised to the interval [0, 1]

Definition at line 23 of file Region.hpp.

Referenced by fieldValuesToString(), getDensity(), and Region().

7.42.4.4 vector<Point> multiscale::analysis::Region::polygon [private]

Polygon defining the region

Definition at line 26 of file Region.hpp.

Referenced by getPolygon(), isCircularMeasure(), isRectangularMeasure(), isTriangularMeasure(), Region(), updateCentrePoint(), updatePerimeter(), and ~Region().

The documentation for this class was generated from the following files:


- [modules/analysis/spatial/include/multiscale/analysis/spatial/Region.hpp](#)
 - [modules/analysis/spatial/src/Region.cpp](#)

7.43 multiscale::analysis::RegionDetector Class Reference


Class for detecting regions of high intensity in grayscale images

```
#include <RegionDetector.hpp>
```

Inheritance diagram for multiscale::analysis::RegionDetector:

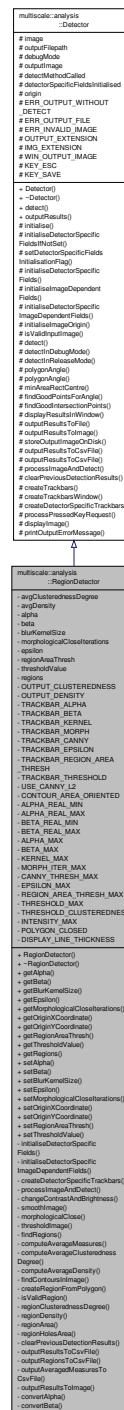

Collaboration diagram for multiscale::analysis::RegionDetector:

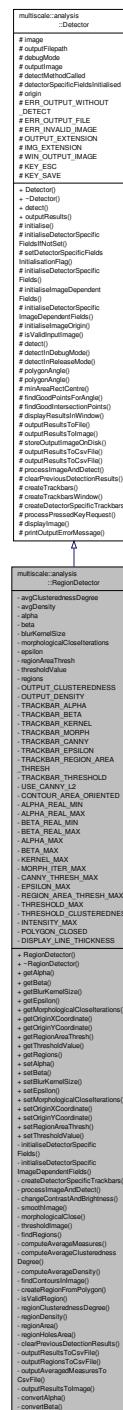

Public Member Functions

- **RegionDetector (bool debugMode=false)**
- **~RegionDetector ()**
- int **getAlpha ()**

Get the value of field alpha.

- int **getBeta ()**

- `Get the value of field beta.`
• int `getBlurKernelSize ()`
 Get the value of field blurKernelSize.
• int `getEpsilon ()`
 Get the value of field epsilon.
• int `getMorphologicalCloselterations ()`
 Get the value of field morphologicalCloselterations.
• int `getOriginXCoordinate ()`
 Get the value of field originXCoordinate.
• int `getOriginYCoordinate ()`
 Get the value of field originYCoordinate.
• int `getRegionAreaThresh ()`
 Get the value of field regionAreaThresh.
• int `getThresholdValue ()`
 Get the value of field thresholdValue.
• vector< `Region` > const & `getRegions ()`
 Get a const reference to the vector of detected regions.
• void `setAlpha (int alpha)`
 Set the value of field alpha.
• void `setBeta (int beta)`
 Set the value of field beta.
• void `setBlurKernelSize (int blurKernelSize)`
 Set the value of field blurKernelSize.
• void `setEpsilon (int epsilon)`
 Set the value of field epsilon.
• void `setMorphologicalCloselterations (int morphologicalCloselterations)`
 Set the value of field morphologicalCloselterations.
• void `setOriginXCoordinate (int originXCoordinate)`
 Set the value of field originXCoordinate.
• void `setOriginYCoordinate (int originYCoordinate)`
 Set the value of field originYCoordinate.
• void `setRegionAreaThresh (int regionAreaThresh)`
 Set the value of field regionAreaThresh.
• void `setThresholdValue (int thresholdValue)`
 Set the value of field thresholdValue.

Private Member Functions

- void `initialiseDetectorSpecificFields ()` override
 Initialise the vision members.
- void `initialiseDetectorSpecificImageDependentFields ()` override
 Initialisation of the detector specific image dependent values.
- void `createDetectorSpecificTrackbars ()` override
 Create the trackbars.
- void `processImageAndDetect ()` override
 Process the given image.
- void `changeContrastAndBrightness (Mat &processedImage)`
 Change the contrast and brightness of the image.
- void `smoothImage (Mat &image)`
 Smooth out differences in the image.

- void **morphologicalClose** (Mat &image)
Apply the morphological close operator on the image.
- void **thresholdImage** (const Mat &image, Mat &thresholdedImage)
Apply the threshold filter on the image.
- void **findRegions** (const Mat &image, vector< Region > ®ions)
Find the regions in the image.
- void **computeAverageMeasures** (vector< Region > ®ions)
Compute the average clusteredness degree and average density.
- void **computeAverageClusterednessDegree** (vector< Region > ®ions)
Compute the average clusteredness degree.
- void **computeAverageDensity** (vector< Region > ®ions)
Compute the average density.
- vector< vector< Point > > **findContoursInImage** (const Mat &image)
Find contours in image.
- Region **createRegionFromPolygon** (const vector< Point > &polygon)
Create a new region from the given polygon.
- bool **isValidRegion** (const vector< Point > &polygon)
Check if the region is valid.
- double **regionClusterednessDegree** (const vector< Point > &polygon)
Compute the clusteredness degree of the region delimited by the given polygon.
- double **regionDensity** (const vector< Point > &polygon)
Compute the density of the area delimited by the given polygon.
- double **regionArea** (const vector< Point > &polygon)
Compute the area of the given polygon considering holes.
- double **regionHolesArea** (const Mat &matrix)
Compute the area of the white holes in the given matrix.
- void **clearPreviousDetectionResults** () override
Clear the element present in the regions vector.
- void **outputResultsToCsvFile** (ofstream &fout) override
Output the regions and averaged measures to a csv file.
- void **outputRegionsToCsvFile** (ofstream &fout)
Output the regions to a csv file.
- void **outputAveragedMeasuresToCsvFile** (ofstream &fout)
Output the averaged measures to a csv file.
- void **outputResultsToImage** () override
Output the results to the outputImage instance.
- double **convertAlpha** (int alpha)
Convert alpha from the range [0, ALPHA_MAX] to [ALPHA_REAL_MIN, ALPHA_REAL_MAX].
- int **convertBeta** (int beta)
Convert beta from the range [0, BETA_MAX] to [BETA_REAL_MIN, BETA_REAL_MAX].

Private Attributes

- double avgClusterednessDegree
- double avgDensity
- int alpha
- int beta
- int blurKernelSize
- int morphologicalCloselterations
- int epsilon
- int regionAreaThresh
- int thresholdValue
- vector< Region > regions

Static Private Attributes

- static const string **OUTPUT_CLUSTEREDNESS** = "Average clusteredness degree: "
- static const string **OUTPUT_DENSITY** = "Average density: "
- static const string **TRACKBAR_ALPHA** = "Alpha"
- static const string **TRACKBAR_BETA** = "Beta"
- static const string **TRACKBAR_KERNEL** = "Gaussian blur kernel size"
- static const string **TRACKBAR_MORPH** = "Morphological open, number of iterations"
- static const string **TRACKBAR_CANNY** = "Canny lower threshold"
- static const string **TRACKBAR_EPSILON** = "Epsilon"
- static const string **TRACKBAR_REGION_AREA_THRESH** = "Region area threshold"
- static const string **TRACKBAR_THRESHOLD** = "Threshold value"
- static const bool **USE_CANNY_L2** = true
- static const bool **CONTOUR_AREA_ORIENTED** = false
- static const double **ALPHA_REAL_MIN** = 1.0
- static const double **ALPHA_REAL_MAX** = 3.0
- static const int **BETA_REAL_MIN** = -100
- static const int **BETA_REAL_MAX** = 100
- static const int **ALPHA_MAX** = 1000
- static const int **BETA_MAX** = 200
- static const int **KERNEL_MAX** = 2000
- static const int **MORPH_ITER_MAX** = 100
- static const int **CANNY_THRESH_MAX** = 100
- static const int **EPSILON_MAX** = 100
- static const int **REGION_AREA_THRESH_MAX** = 200000
- static const int **THRESHOLD_MAX** = 255
- static const int **THRESHOLD_CLUSTEREDNESS** = 0
- static const int **INTENSITY_MAX** = 255
- static const bool **POLYGON_CLOSED** = true
- static const int **DISPLAY_LINE_THICKNESS** = 10

Additional Inherited Members

7.43.1 Detailed Description

Class for detecting regions of high intensity in grayscale images.

Definition at line 21 of file RegionDetector.hpp.

7.43.2 Constructor & Destructor Documentation

7.43.2.1 RegionDetector::RegionDetector (*bool debugMode = false*)

Definition at line 15 of file RegionDetector.cpp.

References alpha, avgClusterednessDegree, avgDensity, beta, blurKernelSize, epsilon, morphologicalCloseIterations, regionAreaThresh, and thresholdValue.

7.43.2.2 RegionDetector::~RegionDetector ()

Definition at line 28 of file RegionDetector.cpp.

7.43.3 Member Function Documentation

7.43.3.1 void RegionDetector::changeContrastAndBrightness (*Mat & processedImage*) [private]

Change the contrast and brightness of the image.

Change the contrast and brightness of the image by the factors alpha and gamma

Parameters


<i>processedImage</i>	The processed image
-----------------------	---------------------

Definition at line 158 of file RegionDetector.cpp.


References alpha, beta, convertAlpha(), convertBeta(), and multiscale::analysis::Detector::image.

Referenced by processImageAndDetect().

Here is the call graph for this function:

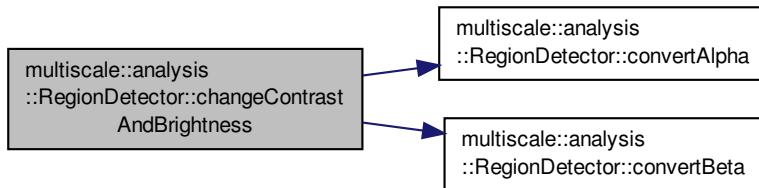

Here is the caller graph for this function:



7.43.3.2 void RegionDetector::clearPreviousDetectionResults () [override], [private], [virtual]

Clear the element present in the regions vector.

Implements [multiscale::analysis::Detector](#).

Definition at line 318 of file RegionDetector.cpp.

References regions.

7.43.3.3 void RegionDetector::computeAverageClusterednessDegree (*vector< Region > & regions*) [private]

Compute the average clusteredness degree.

Parameters


<i>regions</i>	The regions in the image
----------------	--------------------------

Definition at line 203 of file RegionDetector.cpp.


References avgClusterednessDegree, and multiscale::Geometry2D::distanceBtwPoints().

Referenced by computeAverageMeasures().

Here is the call graph for this function:



Here is the caller graph for this function:



7.43.3.4 void RegionDetector::computeAverageDensity (`vector< Region > & regions`) [private]

Compute the average density.

Parameters


<i>regions</i>	The regions in the image
----------------	--------------------------

Definition at line 230 of file RegionDetector.cpp.

References avgDensity.

Referenced by computeAverageMeasures().

Here is the caller graph for this function:



7.43.3.5 void RegionDetector::computeAverageMeasures (`vector< Region > & regions`) [private]

Compute the average clusteredness degree and average density.

Parameters


<code>regions</code>	The regions in the image
----------------------	--------------------------

Definition at line 198 of file RegionDetector.cpp.


References `computeAverageClusterednessDegree()`, and `computeAverageDensity()`.

Referenced by `processImageAndDetect()`.

Here is the call graph for this function:

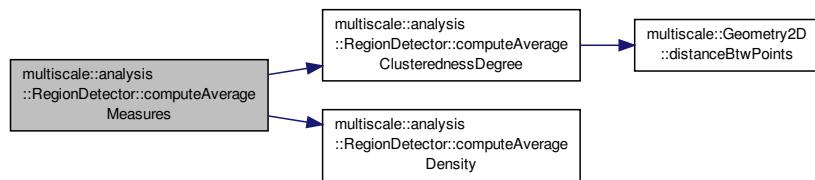

Here is the caller graph for this function:



7.43.3.6 double RegionDetector::convertAlpha (`int alpha`) [private]

Convert alpha from the range [0, ALPHA_MAX] to [ALPHA_REAL_MIN, ALPHA_REAL_MAX].

Parameters


<code>alpha</code>	Alpha
--------------------	-------

Definition at line 365 of file RegionDetector.cpp.

References `alpha`, `ALPHA_MAX`, `ALPHA_REAL_MAX`, and `ALPHA_REAL_MIN`.

Referenced by `changeContrastAndBrightness()`.

Here is the caller graph for this function:



7.43.3.7 int RegionDetector::convertBeta (int *beta*) [private]

Convert beta from the range [0, BETA_MAX] to [BETA_REAL_MIN, BETA_REAL_MAX].

Parameters


<i>beta</i>	Beta
-------------	------

Definition at line 369 of file RegionDetector.cpp.

References beta, BETA_MAX, BETA_REAL_MAX, and BETA_REAL_MIN.

Referenced by changeContrastAndBrightness().

Here is the caller graph for this function:



7.43.3.8 void RegionDetector::createDetectorSpecificTrackbars () [override], [private], [virtual]

Create the trackbars.

Implements [multiscale::analysis::Detector](#).

Definition at line 136 of file RegionDetector.cpp.

References alpha, ALPHA_MAX, beta, BETA_MAX, blurKernelSize, epsilon, EPSILON_MAX, KERNEL_MAX, MORPH_ITER_MAX, morphologicalCloselIterations, REGION_AREA_THRESH_MAX, regionAreaThresh, THRESHOLD_MAX, thresholdValue, TRACKBAR_ALPHA, TRACKBAR_BETA, TRACKBAR_EPSILON, TRACKBAR_KERNEL, TRACKBAR_MORPH, TRACKBAR_REGION_AREA_THRESH, TRACKBAR_THRESHOLD, and multiscale::analysis::Detector::WIN_OUTPUT_IMAGE.

7.43.3.9 Region RegionDetector::createRegionFromPolygon (const vector< Point > & *polygon*) [private]

Create a new region from the given polygon.

Process the polygon in order to get the required information and create a region using this information

Parameters


<i>polygon</i>	Polygon determining the region
----------------	--------------------------------

Definition at line 256 of file RegionDetector.cpp.


References multiscale::Geometry2D::distanceBtwPoints(), multiscale::Geometry2D::minimumDistancePointIndex(), multiscale::analysis::Detector::origin, multiscale::analysis::Detector::polygonAngle(), regionArea(), regionClusterednessDegree(), and regionDensity().

Referenced by findRegions().

Here is the call graph for this function:

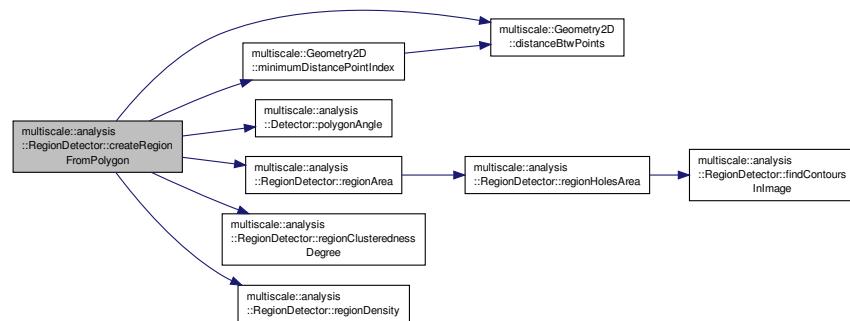

Here is the caller graph for this function:



7.43.3.10 `vector< vector< Point > > RegionDetector::findContoursInImage(const Mat & image)` [private]

Find contours in image.

Parameters

<i>image</i>	The image
--------------	-----------

Definition at line 241 of file RegionDetector.cpp.

Referenced by findRegions(), and regionHolesArea().

Here is the caller graph for this function:



7.43.3.11 `void RegionDetector::findRegions(const Mat & image, vector< Region > & regions)` [private]

Find the regions in the image.

Find the contours, approximate the polygons and extract the required information from them.

Parameters


<i>image</i>	The image
<i>regions</i>	The regions in the image

Definition at line 180 of file RegionDetector.cpp.


References createRegionFromPolygon(), epsilon, findContoursInImage(), and isValidRegion().

Referenced by processImageAndDetect().

Here is the call graph for this function:

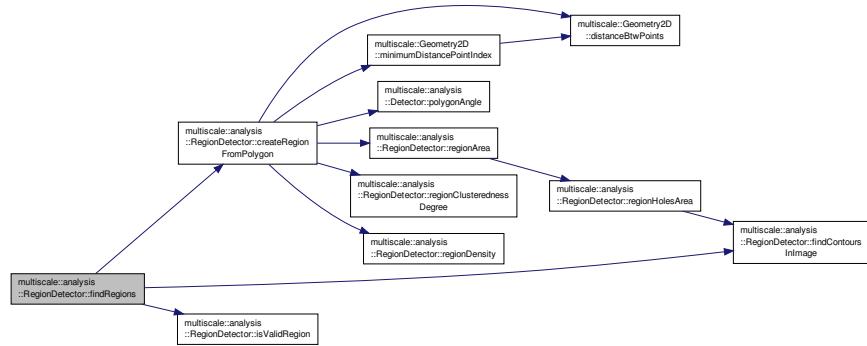

Here is the caller graph for this function:



7.43.3.12 int RegionDetector::getAlpha()


Get the value of field alpha.

Definition at line 30 of file RegionDetector.cpp.

References alpha.

Referenced by saveDetectorParameterValues().

Here is the caller graph for this function:



7.43.3.13 int RegionDetector::getBeta ()


Get the value of field beta.

Definition at line 34 of file RegionDetector.cpp.

References beta.

Referenced by saveDetectorParameterValues().

Here is the caller graph for this function:



7.43.3.14 int RegionDetector::getBlurKernelSize ()


Get the value of field blurKernelSize.

Definition at line 38 of file RegionDetector.cpp.

References blurKernelSize.

Referenced by saveDetectorParameterValues().

Here is the caller graph for this function:



7.43.3.15 int RegionDetector::getEpsilon ()


Get the value of field epsilon.

Definition at line 46 of file RegionDetector.cpp.

References epsilon.

Referenced by saveDetectorParameterValues().

Here is the caller graph for this function:



7.43.3.16 int RegionDetector::getMorphologicalCloselterations ()


Get the value of field morphologicalCloselterations.

Definition at line 42 of file RegionDetector.cpp.

References morphologicalCloselterations.

Referenced by saveDetectorParameterValues().

Here is the caller graph for this function:



7.43.3.17 int RegionDetector::getOriginXCoordinate ()

Get the value of field originXCoordinate.

Definition at line 54 of file RegionDetector.cpp.

References multiscale::analysis::Detector::origin.

7.43.3.18 int RegionDetector::getOriginYCoordinate ()

Get the value of field originYCoordinate.

Definition at line 58 of file RegionDetector.cpp.

References multiscale::analysis::Detector::origin.

7.43.3.19 int RegionDetector::getRegionAreaThresh ()


Get the value of field regionAreaThresh.

Definition at line 50 of file RegionDetector.cpp.

References regionAreaThresh.

Referenced by `saveDetectorParameterValues()`.

Here is the caller graph for this function:



7.43.3.20 `vector< Region > const & RegionDetector::getRegions()`

Get a const reference to the vector of detected regions.

Definition at line 66 of file `RegionDetector.cpp`.

References regions.

7.43.3.21 `int RegionDetector::getThresholdValue()`


Get the value of field `thresholdValue`.

Definition at line 62 of file `RegionDetector.cpp`.

References `thresholdValue`.

Referenced by `saveDetectorParameterValues()`.

Here is the caller graph for this function:



7.43.3.22 `void RegionDetector::initialiseDetectorSpecificFields() [override], [private], [virtual]`

Initialise the vision members.

Implements [multiscale::analysis::Detector](#).

Definition at line 124 of file `RegionDetector.cpp`.

References alpha, beta, blurKernelSize, epsilon, morphologicalCloselterations, regionAreaThresh, and `thresholdValue`.

7.43.3.23 `void RegionDetector::initialiseDetectorSpecificImageDependentFields() [override], [private], [virtual]`

Initialisation of the detector specific image dependent values.

Implements [multiscale::analysis::Detector](#).

Definition at line 134 of file RegionDetector.cpp.

7.43.3.24 bool RegionDetector::isValidRegion (const vector< Point > & *polygon*) [private]

Check if the region is valid.

Check if the area of the region > regionAreaThreshold

Parameters


<i>polygon</i>	The polygon defining the region
----------------	---------------------------------

Definition at line 268 of file RegionDetector.cpp.

References CONTOUR_AREA_ORIENTED, and regionAreaThresh.

Referenced by findRegions().

Here is the caller graph for this function:



7.43.3.25 void RegionDetector::morphologicalClose (Mat & *image*) [private]

Apply the morphological close operator on the image.

Parameters


<i>image</i>	The image
--------------	-----------

Definition at line 170 of file RegionDetector.cpp.

References morphologicalCloseIterations.

Referenced by processImageAndDetect().

Here is the caller graph for this function:



7.43.3.26 void RegionDetector::outputAveragedMeasuresToCsvFile (ofstream & *fout*) [private]

Output the averaged measures to a csv file.

Parameters


<i>fout</i>	Output file stream
-------------	--------------------

Definition at line 342 of file RegionDetector.cpp.

References avgClusterednessDegree, avgDensity, OUTPUT_CLUSTEREDNESS, and OUTPUT_DENSITY.

Referenced by outputResultsToCsvFile().

Here is the caller graph for this function:



7.43.3.27 void RegionDetector::outputRegionsToCsvFile (ostream & *fout*) [private]

Output the regions to a csv file.

Parameters


<i>fout</i>	Output file stream
-------------	--------------------

Definition at line 336 of file RegionDetector.cpp.

References regions.

Referenced by outputResultsToCsvFile().

Here is the caller graph for this function:



7.43.3.28 void RegionDetector::outputResultsToCsvFile (ostream & *fout*) [override], [private], [virtual]

Output the regions and averaged measures to a csv file.

Parameters


<i>fout</i>	Output file stream
-------------	--------------------

Implements [multiscale::analysis::Detector](#).

Definition at line 322 of file RegionDetector.cpp.

References `multiscale::analysis::Region::fieldNamesToString()`, `outputAveragedMeasuresToCsvFile()`, `outputRegionsToCsvFile()`, and `regions`.

Here is the call graph for this function:

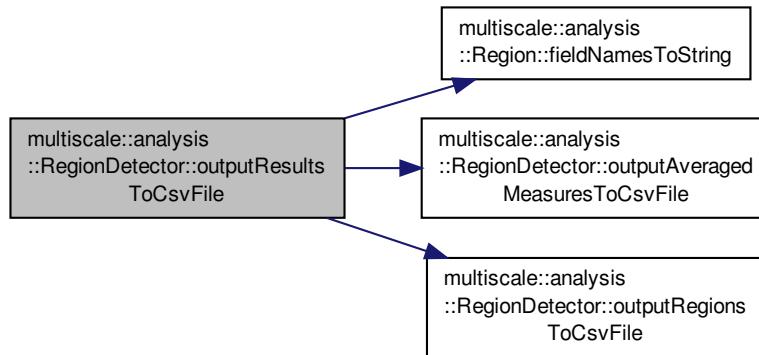

7.43.3.29 void RegionDetector::outputResultsToImage() [override], [private], [virtual]

Output the results to the `outputImage` instance.

Implements [multiscale::analysis::Detector](#).

Definition at line 347 of file RegionDetector.cpp.

References `DISPLAY_LINE_THICKNESS`, `multiscale::analysis::Detector::image`, `INTENSITY_MAX`, `multiscale::analysis::Detector::outputImage`, `POLYGON_CLOSED`, and `regions`.

7.43.3.30 void RegionDetector::processImageAndDetect() [override], [private], [virtual]

Process the given image.


Apply filters to the image, threshold it, find its contours, approximate the polygons from these contours. Afterwards, process the polygons to find their distance from the origin, their area and the angle determined by the points from the contour which are on the edge and the closest point to the origin. Return all the polygons together with the processed information as a vector of regions.

Implements [multiscale::analysis::Detector](#).

Definition at line 146 of file RegionDetector.cpp.

References `changeContrastAndBrightness()`, `computeAverageMeasures()`, `findRegions()`, `morphologicalClose()`, `regions`, `smoothImage()`, and `thresholdImage()`.

Here is the call graph for this function:

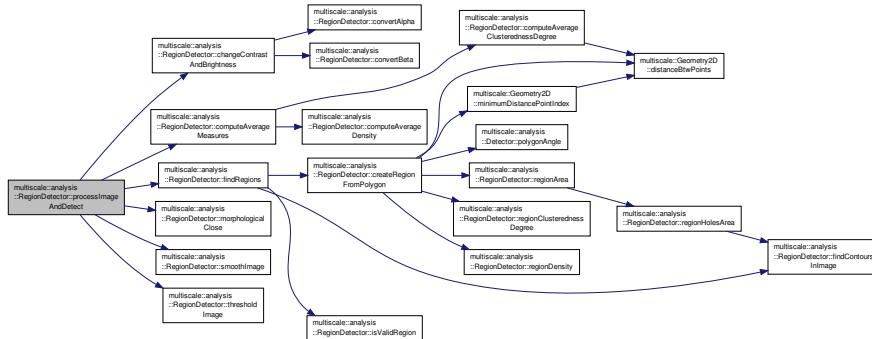

7.43.3.31 double RegionDetector::regionArea (const vector< Point > & polygon) [private]

Compute the area of the given polygon considering holes.

Parameters


<i>polygon</i>	The given polygon
----------------	-------------------

Definition at line 296 of file RegionDetector.cpp.


References CONTOUR_AREA_ORIENTED, multiscale::analysis::Detector::image, INTENSITY_MAX, regionHolesArea(), THRESHOLD_CLUSTEREDNESS, and THRESHOLD_MAX.

Referenced by createRegionFromPolygon().

Here is the call graph for this function:



Here is the caller graph for this function:



7.43.3.32 double RegionDetector::regionClusterednessDegree (const vector< Point > & polygon) [private]

Compute the clusteredness degree of the region delimited by the given polygon.

The density is equal to the average intensity of the pixels in the area delimited by the given polygon divided by INTENSITY_MAX. The intensities are considered from the thresholded image where the threshold value is 1 i.e. only the black patches are discarded.

Parameters

<i>polygon</i>	The given polygon
----------------	-------------------

Definition at line 274 of file RegionDetector.cpp.

References multiscale::analysis::Detector::image, INTENSITY_MAX, THRESHOLD_CLUSTEREDNESS, and THRESHOLD_MAX.

Referenced by createRegionFromPolygon().

Here is the caller graph for this function:



7.43.3.33 double RegionDetector::regionDensity (const vector< Point > & *polygon*) [private]

Compute the density of the area delimited by the given polygon.

The density is equal to the average intensity of the pixels in the area delimited by the given polygon divided by INTENSITY_MAX.

Parameters

<i>polygon</i>	The given polygon
----------------	-------------------

Definition at line 286 of file RegionDetector.cpp.

References multiscale::analysis::Detector::image, and INTENSITY_MAX.

Referenced by createRegionFromPolygon().

Here is the caller graph for this function:



7.43.3.34 double RegionDetector::regionHolesArea (const Mat & *matrix*) [private]

Compute the area of the white holes in the given matrix.

Parameters


<i>matrix</i>	The given matrix
---------------	------------------

Definition at line 307 of file RegionDetector.cpp.


References CONTOUR_AREA_ORIENTED, and findContoursInImage().

Referenced by regionArea().

Here is the call graph for this function:



Here is the caller graph for this function:



7.43.3.35 void RegionDetector::setAlpha (int alpha)

Set the value of field alpha.

Parameters


<i>alpha</i>	Value of alpha
--------------	----------------

Definition at line 70 of file RegionDetector.cpp.


References alpha, and multiscale::analysis::Detector::setDetectorSpecificFieldsInitialisationFlag().

Referenced by loadDetectorParameterValues().

Here is the call graph for this function:



Here is the caller graph for this function:



7.43.3.36 void RegionDetector::setBeta (int *beta*)

Set the value of field *beta*.

Parameters


<i>beta</i>	Value of <i>beta</i>
-------------	----------------------

Definition at line 76 of file RegionDetector.cpp.


References *beta*, and multiscale::analysis::Detector::setDetectorSpecificFieldsInitialisationFlag().

Referenced by loadDetectorParameterValues().

Here is the call graph for this function:



Here is the caller graph for this function:

7.43.3.37 void RegionDetector::setBlurKernelSize (int *blurKernelSize*)

Set the value of field *blurKernelSize*.

Parameters


<i>blurKernelSize</i>	Value of <i>blurKernelSize</i>
-----------------------	--------------------------------

Definition at line 82 of file RegionDetector.cpp.


References *blurKernelSize*, and multiscale::analysis::Detector::setDetectorSpecificFieldsInitialisationFlag().

Referenced by loadDetectorParameterValues().

Here is the call graph for this function:



Here is the caller graph for this function:



7.43.3.38 void RegionDetector::setEpsilon (int *epsilon*)

Set the value of field *epsilon*.

Parameters


<i>epsilon</i>	Value of <i>epsilon</i>
----------------	-------------------------

Definition at line 88 of file RegionDetector.cpp.


References *epsilon*, and multiscale::analysis::Detector::setDetectorSpecificFieldsInitialisationFlag().

Referenced by loadDetectorParameterValues().

Here is the call graph for this function:



Here is the caller graph for this function:



7.43.3.39 void RegionDetector::setMorphologicalCloselterations (int *morphologicalCloselterations*)

Set the value of field *morphologicalCloselterations*.

Parameters


<i>morphological- Closelterations</i>	Value of <i>morphologicalCloselterations</i>
---	--

Definition at line 94 of file RegionDetector.cpp.


References *morphologicalCloselterations*, and *multiscale::analysis::Detector::setDetectorSpecificFieldsInitialisationFlag()*.

Referenced by *loadDetectorParameterValues()*.

Here is the call graph for this function:



Here is the caller graph for this function:



7.43.3.40 void RegionDetector::setOriginXCoordinate (int *originXCoordinate*)

Set the value of field *originXCoordinate*.


Parameters

<i>originX-Coordinate</i>	Value of originXCoordinate
---------------------------	----------------------------

Definition at line 100 of file RegionDetector.cpp.

References multiscale::analysis::Detector::origin, and multiscale::analysis::Detector::setDetectorSpecificFieldsInitialisationFlag().

Here is the call graph for this function:



7.43.3.41 void RegionDetector::setOriginYCoordinate (int *originYCoordinate*)

Set the value of field *originYCoordinate*.


Parameters

<i>originY-Coordinate</i>	Value of originYCoordinate
---------------------------	----------------------------

Definition at line 106 of file RegionDetector.cpp.

References multiscale::analysis::Detector::origin, and multiscale::analysis::Detector::setDetectorSpecificFieldsInitialisationFlag().

Here is the call graph for this function:



7.43.3.42 void RegionDetector::setRegionAreaThresh (int *regionAreaThresh*)

Set the value of field *regionAreaThresh*.

Parameters


<i>regionArea- Thresh</i>	Value of regionAreaThresh
-------------------------------	---------------------------

Definition at line 112 of file RegionDetector.cpp.


References regionAreaThresh, and multiscale::analysis::Detector::setDetectorSpecificFieldsInitialisationFlag().

Referenced by loadDetectorParameterValues().

Here is the call graph for this function:



Here is the caller graph for this function:



7.43.3.43 void RegionDetector::setThresholdValue (int *thresholdValue*)

Set the value of field thresholdValue.

Parameters


<i>thresholdValue</i>	Value of thresholdValue
-----------------------	-------------------------

Definition at line 118 of file RegionDetector.cpp.


References multiscale::analysis::Detector::setDetectorSpecificFieldsInitialisationFlag(), and thresholdValue.

Referenced by loadDetectorParameterValues().

Here is the call graph for this function:



Here is the caller graph for this function:



7.43.3.44 void RegionDetector::smoothImage (Mat & *image*) [private]

Smooth out differences in the image.

Apply a Gaussian blur filter

Parameters


<i>image</i>	The image
--------------	-----------

Definition at line 162 of file RegionDetector.cpp.

References blurKernelSize.

Referenced by processImageAndDetect().

Here is the caller graph for this function:



7.43.3.45 void RegionDetector::thresholdImage (const Mat & *image*, Mat & *thresholdedImage*) [private]

Apply the threshold filter on the image.

Parameters


<i>image</i>	The image
<i>thresholdedImage</i>	The thresholded image

Definition at line 176 of file RegionDetector.cpp.

References THRESHOLD_MAX, and thresholdValue.

Referenced by processImageAndDetect().

Here is the caller graph for this function:



7.43.4 Member Data Documentation

7.43.4.1 `int multiscale::analysis::RegionDetector::alpha [private]`

Alpha for brightness and contrast adjustments

Definition at line 28 of file RegionDetector.hpp.

Referenced by `changeContrastAndBrightness()`, `convertAlpha()`, `createDetectorSpecificTrackbars()`, `getAlpha()`, `initialiseDetectorSpecificFields()`, `RegionDetector()`, and `setAlpha()`.

7.43.4.2 `const int RegionDetector::ALPHA_MAX = 1000 [static], [private]`

Definition at line 316 of file RegionDetector.hpp.

Referenced by `convertAlpha()`, and `createDetectorSpecificTrackbars()`.

7.43.4.3 `const double RegionDetector::ALPHA_REAL_MAX = 3.0 [static], [private]`

Definition at line 311 of file RegionDetector.hpp.

Referenced by `convertAlpha()`.

7.43.4.4 `const double RegionDetector::ALPHA_REAL_MIN = 1.0 [static], [private]`

Definition at line 310 of file RegionDetector.hpp.

Referenced by `convertAlpha()`.

7.43.4.5 `double multiscale::analysis::RegionDetector::avgClusterednessDegree [private]`

Average degree of clusteredness of all regions

Definition at line 25 of file RegionDetector.hpp.

Referenced by `computeAverageClusterednessDegree()`, `outputAveragedMeasuresToCsvFile()`, and `RegionDetector()`.

7.43.4.6 `double multiscale::analysis::RegionDetector::avgDensity [private]`

Average density of all regions

Definition at line 26 of file RegionDetector.hpp.

Referenced by `computeAverageDensity()`, `outputAveragedMeasuresToCsvFile()`, and `RegionDetector()`.

7.43.4.7 `int multiscale::analysis::RegionDetector::beta` [private]

Beta for brightness and contrast adjustments

Definition at line 29 of file RegionDetector.hpp.

Referenced by `changeContrastAndBrightness()`, `convertBeta()`, `createDetectorSpecificTrackbars()`, `getBeta()`, `initialiseDetectorSpecificFields()`, `RegionDetector()`, and `setBeta()`.

7.43.4.8 `const int RegionDetector::BETA_MAX = 200` [static], [private]

Definition at line 317 of file RegionDetector.hpp.

Referenced by `convertBeta()`, and `createDetectorSpecificTrackbars()`.

7.43.4.9 `const int RegionDetector::BETA_REAL_MAX = 100` [static], [private]

Definition at line 314 of file RegionDetector.hpp.

Referenced by `convertBeta()`.

7.43.4.10 `const int RegionDetector::BETA_REAL_MIN = -100` [static], [private]

Definition at line 313 of file RegionDetector.hpp.

Referenced by `convertBeta()`.

7.43.4.11 `int multiscale::analysis::RegionDetector::blurKernelSize` [private]

Kernel size for Gaussian blur

Definition at line 30 of file RegionDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`, `getBlurKernelSize()`, `initialiseDetectorSpecificFields()`, `RegionDetector()`, `setBlurKernelSize()`, and `smoothImage()`.

7.43.4.12 `const int RegionDetector::CANNY_THRESH_MAX = 100` [static], [private]

Definition at line 320 of file RegionDetector.hpp.

7.43.4.13 `const bool RegionDetector::CONTOUR_AREA_ORIENTED = false` [static], [private]

Definition at line 308 of file RegionDetector.hpp.

Referenced by `isValidRegion()`, `regionArea()`, and `regionHolesArea()`.

7.43.4.14 `const int RegionDetector::DISPLAY_LINE_THICKNESS = 10` [static], [private]

Definition at line 329 of file RegionDetector.hpp.

Referenced by `outputResultsToImage()`.

7.43.4.15 `int multiscale::analysis::RegionDetector::epsilon` [private]

Epsilon for polygon approximation

Definition at line 32 of file RegionDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`, `findRegions()`, `getEpsilon()`, `initialiseDetectorSpecificFields()`, `RegionDetector()`, and `setEpsilon()`.

7.43.4.16 const int RegionDetector::EPSILON_MAX = 100 [static], [private]

Definition at line 321 of file `RegionDetector.hpp`.

Referenced by `createDetectorSpecificTrackbars()`.

7.43.4.17 const int RegionDetector::INTENSITY_MAX = 255 [static], [private]

Definition at line 325 of file `RegionDetector.hpp`.

Referenced by `outputResultsToImage()`, `regionArea()`, `regionClusterednessDegree()`, and `regionDensity()`.

7.43.4.18 const int RegionDetector::KERNEL_MAX = 2000 [static], [private]

Definition at line 318 of file `RegionDetector.hpp`.

Referenced by `createDetectorSpecificTrackbars()`.

7.43.4.19 const int RegionDetector::MORPH_ITER_MAX = 100 [static], [private]

Definition at line 319 of file `RegionDetector.hpp`.

Referenced by `createDetectorSpecificTrackbars()`.

7.43.4.20 int multiscale::analysis::RegionDetector::morphologicalCloselterations [private]

Number of iterations for morphological close operator

Definition at line 31 of file `RegionDetector.hpp`.

Referenced by `createDetectorSpecificTrackbars()`, `getMorphologicalCloselterations()`, `initialiseDetectorSpecificFields()`, `morphologicalClose()`, `RegionDetector()`, and `setMorphologicalCloselterations()`.

7.43.4.21 const string RegionDetector::OUTPUT_CLUSTEREDNESS = "Average clusteredness degree: " [static], [private]

Definition at line 295 of file `RegionDetector.hpp`.

Referenced by `outputAveragedMeasuresToCsvFile()`.

7.43.4.22 const string RegionDetector::OUTPUT_DENSITY = "Average density: " [static], [private]

Definition at line 296 of file `RegionDetector.hpp`.

Referenced by `outputAveragedMeasuresToCsvFile()`.

7.43.4.23 const bool RegionDetector::POLYGON_CLOSED = true [static], [private]

Definition at line 327 of file `RegionDetector.hpp`.

Referenced by `outputResultsToImage()`.

7.43.4.24 `const int RegionDetector::REGION_AREA_THRESH_MAX = 200000` [static], [private]

Definition at line 322 of file RegionDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`.

7.43.4.25 `int multiscale::analysis::RegionDetector::regionAreaThresh` [private]

Threshold for considering a region

Definition at line 33 of file RegionDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`, `getRegionAreaThresh()`, `initialiseDetectorSpecificFields()`, `isValidRegion()`, `RegionDetector()`, and `setRegionAreaThresh()`.

7.43.4.26 `vector<Region> multiscale::analysis::RegionDetector::regions` [private]

Regions detected in the image

Definition at line 36 of file RegionDetector.hpp.

Referenced by `clearPreviousDetectionResults()`, `getRegions()`, `outputRegionsToCsvFile()`, `outputResultsToCsvFile()`, `outputResultsToImage()`, and `processImageAndDetect()`.

7.43.4.27 `const int RegionDetector::THRESHOLD_CLUSTEREDNESS = 0` [static], [private]

Definition at line 324 of file RegionDetector.hpp.

Referenced by `regionArea()`, and `regionClusterednessDegree()`.

7.43.4.28 `const int RegionDetector::THRESHOLD_MAX = 255` [static], [private]

Definition at line 323 of file RegionDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`, `regionArea()`, `regionClusterednessDegree()`, and `thresholdImage()`.

7.43.4.29 `int multiscale::analysis::RegionDetector::thresholdValue` [private]

Value of the threshold for the threshold filter

Definition at line 34 of file RegionDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`, `getThresholdValue()`, `initialiseDetectorSpecificFields()`, `RegionDetector()`, `setThresholdValue()`, and `thresholdImage()`.

7.43.4.30 `const string RegionDetector::TRACKBAR_ALPHA = "Alpha"` [static], [private]

Definition at line 298 of file RegionDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`.

7.43.4.31 `const string RegionDetector::TRACKBAR_BETA = "Beta"` [static], [private]

Definition at line 299 of file RegionDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`.

7.43.4.32 `const string RegionDetector::TRACKBAR_CANNY = "Canny lower threshold"` [static], [private]

Definition at line 302 of file RegionDetector.hpp.

7.43.4.33 `const string RegionDetector::TRACKBAR_EPSILON = "Epsilon"` [static], [private]

Definition at line 303 of file RegionDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`.

7.43.4.34 `const string RegionDetector::TRACKBAR_KERNEL = "Gaussian blur kernel size"` [static], [private]

Definition at line 300 of file RegionDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`.

7.43.4.35 `const string RegionDetector::TRACKBAR_MORPH = "Morphological open, number of iterations"` [static], [private]

Definition at line 301 of file RegionDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`.

7.43.4.36 `const string RegionDetector::TRACKBAR_REGION_AREA_THRESH = "Region area threshold"` [static], [private]

Definition at line 304 of file RegionDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`.

7.43.4.37 `const string RegionDetector::TRACKBAR_THRESHOLD = "Threshold value"` [static], [private]

Definition at line 305 of file RegionDetector.hpp.

Referenced by `createDetectorSpecificTrackbars()`.

7.43.4.38 `const bool RegionDetector::USE_CANNY_L2 = true` [static], [private]

Definition at line 307 of file RegionDetector.hpp.

The documentation for this class was generated from the following files:


- `modules/analysis/spatial/include/multiscale/analysis/spatial/RegionDetector.hpp`
- `modules/analysis/spatial/src/RegionDetector.cpp`

7.44 multiscale::RegionException Class Reference


Exception class for the Region instances.

```
#include <RegionException.hpp>
```

Inheritance diagram for multiscale::RegionException:

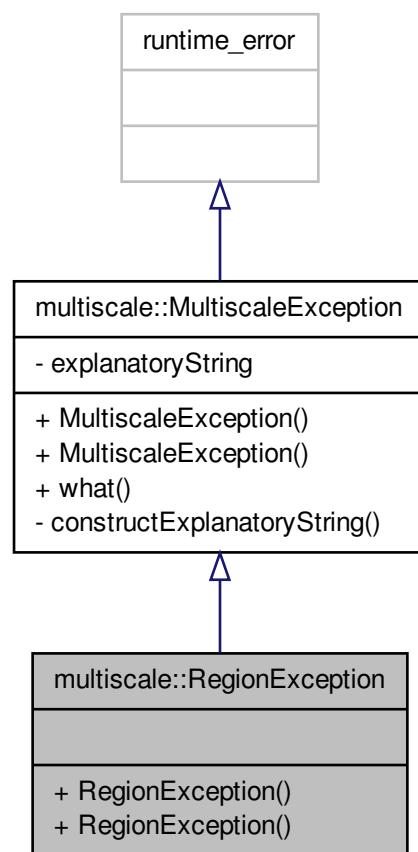

Collaboration diagram for multiscale::RegionException:

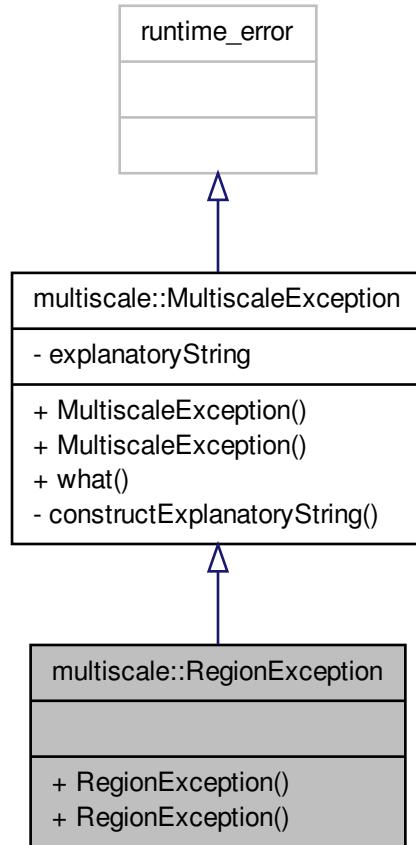

Public Member Functions

- [RegionException \(const string &file, int line, const string &msg\)](#)
- [RegionException \(const string &file, int line, const char *msg\)](#)

7.44.1 Detailed Description

Exception class for the Region instances.

Definition at line 14 of file RegionException.hpp.

7.44.2 Constructor & Destructor Documentation

7.44.2.1 multiscale::RegionException::RegionException (const string & *file*, int *line*, const string & *msg*) [inline]

Definition at line 18 of file RegionException.hpp.

7.44.2.2 `multiscale::RegionException::RegionException (const string & file, int line, const char * msg) [inline]`

Definition at line 20 of file `RegionException.hpp`.

The documentation for this class was generated from the following file:


- [include/multiscale/exception/RegionException.hpp](#)

7.45 multiscale::RGBColourGenerator Class Reference

Generate a RGB colour.

```
#include <RGBColourGenerator.hpp>
```

Collaboration diagram for `multiscale::RGBColourGenerator`:

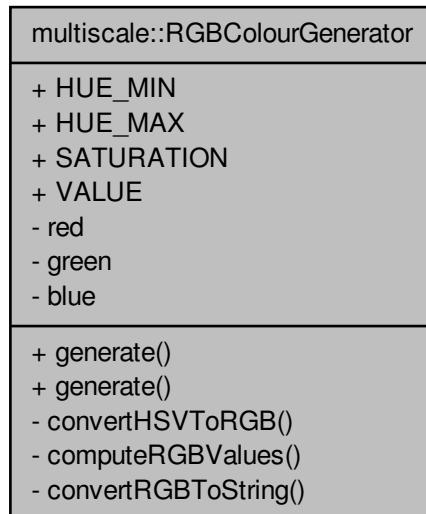

Public Member Functions

- string `generate` (double concentrationMin, double concentrationMax, double concentration)
Generate a RGB colour for the given concentration.
- Scalar `generate` (RNG &randomNumberGenerator)
Generate a random RGB colour.

Static Public Attributes

- static const int `HUE_MIN` = 0
- static const int `HUE_MAX` = 120
- static const int `SATURATION` = 1
- static const int `VALUE` = 1

Private Member Functions

- string `convertHSVToRGB` (double hue, double saturation, double value)
Convert a colour from HSV to RGB colour space.
- void `computeRGBValues` (int huePrime, double X, double chroma, double m)
Compute RGB values from HSV specific values.
- string `convertRGBToString` ()
Convert the RGB colour to a string.

Private Attributes

- double red
- double green
- double blue

7.45.1 Detailed Description

Generate a RGB colour.

Generate a RGB colour given the possible range for concentrations and the value of one of the concentrations

The conversion HSV->RGB is based on the wikipedia page on this topic

Definition at line 20 of file RGBColourGenerator.hpp.

7.45.2 Member Function Documentation

7.45.2.1 void RGBColourGenerator::computeRGBValues (int *huePrime*, double *X*, double *chroma*, double *m*) [private]

Compute RGB values from HSV specific values.

Parameters

<i>huePrime</i>	Hue'
<i>X</i>	X
<i>chroma</i>	Chroma
<i>m</i>	m

Definition at line 42 of file RGBColourGenerator.cpp.

7.45.2.2 string RGBColourGenerator::convertHSVToRGB (double *hue*, double *saturation*, double *value*) [private]

Convert a colour from HSV to RGB colour space.

Parameters

<i>hue</i>	Hue
<i>saturation</i>	Saturation
<i>value</i>	Value

Definition at line 28 of file RGBColourGenerator.cpp.

7.45.2.3 `string RGBColourGenerator::convertRGBToString()` [private]

Convert the RGB colour to a string.

Definition at line 87 of file RGBColourGenerator.cpp.

7.45.2.4 `string RGBColourGenerator::generate(double concentrationMin, double concentrationMax, double concentration)`

Generate a RGB colour for the given concentration.

Generate a RGB colour considering the range of values a concentration can have and the value of the concentration


Parameters

<code>concentration-Min</code>	The minimum of the range of values a concentration can take
<code>concentration-Max</code>	The maximum of the range of values a concentration can take
<code>concentration</code>	The concentration

Definition at line 12 of file RGBColourGenerator.cpp.

Referenced by `main()`, and `multiscale::analysis::SimulationClusterDetector::outputResultsToImage()`.

Here is the caller graph for this function:

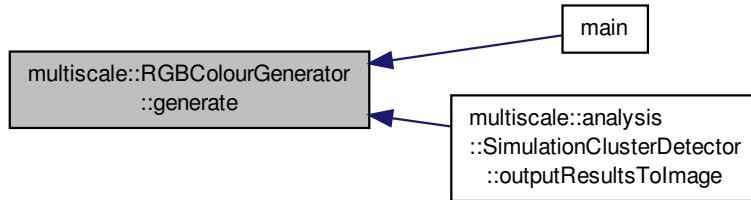

7.45.2.5 `Scalar RGBColourGenerator::generate(RNG & randomNumberGenerator)`

Generate a random RGB colour.

Generate a random RGB colour using the given random number generator

Parameters

<code>randomNumber-Generator</code>	Random number generator
-------------------------------------	-------------------------

Definition at line 22 of file RGBColourGenerator.cpp.

7.45.3 Member Data Documentation

7.45.3.1 `double multiscale::RGBColourGenerator::blue` [private]

The amount of blue

Definition at line 26 of file RGBColourGenerator.hpp.

7.45.3.2 double multiscale::RGBColourGenerator::green [private]

The amount of green

Definition at line 25 of file RGBColourGenerator.hpp.

7.45.3.3 const int RGBColourGenerator::HUE_MAX = 120 [static]

Definition at line 75 of file RGBColourGenerator.hpp.

7.45.3.4 const int RGBColourGenerator::HUE_MIN = 0 [static]

Definition at line 74 of file RGBColourGenerator.hpp.

7.45.3.5 double multiscale::RGBColourGenerator::red [private]

The amount of red

Definition at line 24 of file RGBColourGenerator.hpp.

7.45.3.6 const int RGBColourGenerator::SATURATION = 1 [static]

Definition at line 76 of file RGBColourGenerator.hpp.

7.45.3.7 const int RGBColourGenerator::VALUE = 1 [static]

Definition at line 77 of file RGBColourGenerator.hpp.

The documentation for this class was generated from the following files:


- modules/util/include/multiscale/util/[RGBColourGenerator.hpp](#)
- modules/util/src/[RGBColourGenerator.cpp](#)

7.46 multiscale::analysis::Silhouette Class Reference

Class for computing the "Silhouette" clustering index.

```
#include <Silhouette.hpp>
```

Collaboration diagram for multiscale::analysis::Silhouette:

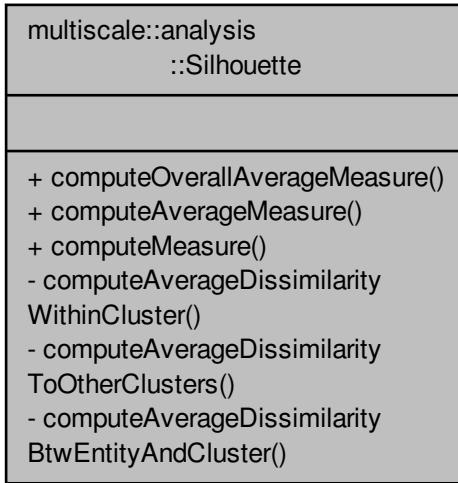

Static Public Member Functions

- static double `computeOverallAverageMeasure` (const vector< `Cluster` > &clusters)
Compute the overall average silhouette measure for the given collection of clusters.
- static double `computeAverageMeasure` (unsigned int `clusterIndex`, const vector< `Cluster` > &clusters)
Compute the average silhouette measure for the given cluster.
- static double `computeMeasure` (unsigned int `entityIndex`, unsigned int `clusterIndex`, const vector< `Cluster` > &clusters)
Compute the silhouette measure for the given entity.

Static Private Member Functions

- static double `computeAverageDissimilarityWithinCluster` (unsigned int `entityIndex`, unsigned int `clusterIndex`, const vector< `Cluster` > &clusters)
Compute the average dissimilarity within cluster to which the entity belongs.
- static double `computeAverageDissimilarityToOtherClusters` (unsigned int `entityIndex`, unsigned int `clusterIndex`, const vector< `Cluster` > &clusters)
Compute the average dissimilarity of the entity to the other clusters (i.e. clusters which are different from the cluster to which the entity belongs)
- static double `computeAverageDissimilarityBtwEntityAndCluster` (unsigned int `entityIndex`, unsigned int `entityClusterIndex`, unsigned int `clusterIndex`, const vector< `Cluster` > &clusters)
Compute the average dissimilarity between entity and cluster.

7.46.1 Detailed Description

Class for computing the "Silhouette" clustering index.

Definition at line 14 of file Silhouette.hpp.

7.46.2 Member Function Documentation

7.46.2.1 `double Silhouette::computeAverageDissimilarityBtwEntityAndCluster (unsigned int entityIndex, unsigned int entityClusterIndex, unsigned int clusterIndex, const vector< Cluster > & clusters) [static], [private]`

Compute the average dissimilarity between entity and cluster.


Parameters

<code>entityIndex</code>	The index of the entity in the cluster for which the distance is computed
<code>entityCluster-Index</code>	The index of the cluster to which the entity belongs
<code>clusterIndex</code>	The index of the cluster to which the average distance is computed
<code>clusters</code>	Collection of all clusters

Definition at line 84 of file Silhouette.cpp.

References multiscale::Geometry2D::distanceBtwPoints().

Here is the call graph for this function:



7.46.2.2 `double Silhouette::computeAverageDissimilarityToOtherClusters (unsigned int entityIndex, unsigned int clusterIndex, const vector< Cluster > & clusters) [static], [private]`

Compute the average dissimilarity of the entity to the other clusters (i.e. clusters which are different from the cluster to which the entity belongs)

Parameters

<code>entityIndex</code>	The index of the entity in the cluster for which the silhouette measure is computed
<code>clusterIndex</code>	The index of the cluster to which the entity belongs
<code>clusters</code>	Collection of all clusters

Definition at line 66 of file Silhouette.cpp.

7.46.2.3 `double Silhouette::computeAverageDissimilarityWithinCluster (unsigned int entityIndex, unsigned int clusterIndex, const vector< Cluster > & clusters) [static], [private]`

Compute the average dissimilarity within cluster to which the entity belongs.


Parameters

<code>entityIndex</code>	The index of the entity in the cluster for which the silhouette measure is computed
<code>clusterIndex</code>	The index of the cluster to which the entity belongs
<code>clusters</code>	Collection of all clusters

Definition at line 52 of file Silhouette.cpp.

References multiscale::Geometry2D::distanceBtwPoints().

Here is the call graph for this function:



7.46.2.4 `double Silhouette::computeAverageMeasure (unsigned int clusterIndex, const vector< Cluster > & clusters) [static]`

Compute the average silhouette measure for the given cluster.

Parameters

<code><i>clusterIndex</i></code>	The index of the cluster for which the average silhouette measure is computed
<code><i>clusters</i></code>	Collection of all clusters

Definition at line 26 of file Silhouette.cpp.

7.46.2.5 `double Silhouette::computeMeasure (unsigned int entityIndex, unsigned int clusterIndex, const vector< Cluster > & clusters) [static]`

Compute the silhouette measure for the given entity.

Parameters

<code><i>entityIndex</i></code>	The index of the entity in the cluster for which the silhouette measure is computed
<code><i>clusterIndex</i></code>	The index of the cluster to which the entity belongs
<code><i>clusters</i></code>	Collection of all clusters

Definition at line 42 of file Silhouette.cpp.

7.46.2.6 `double Silhouette::computeOverallAverageMeasure (const vector< Cluster > & clusters) [static]`

Compute the overall average silhouette measure for the given collection of clusters.


Parameters

<code><i>clusters</i></code>	Collection of all clusters
------------------------------	----------------------------

Definition at line 11 of file Silhouette.cpp.

Referenced by multiscale::analysis::ClusterDetector::computeClusterednessIndex().

Here is the caller graph for this function:



The documentation for this class was generated from the following files:


- modules/analysis/spatial/include/multiscale/analysis/spatial/[Silhouette.hpp](#)
- modules/analysis/spatial/src/[Silhouette.cpp](#)

7.47 multiscale::analysis::SimulationClusterDetector Class Reference


Class for detecting clusters in 2D images obtained from simulations.

```
#include <SimulationClusterDetector.hpp>
```

Inheritance diagram for multiscale::analysis::SimulationClusterDetector:

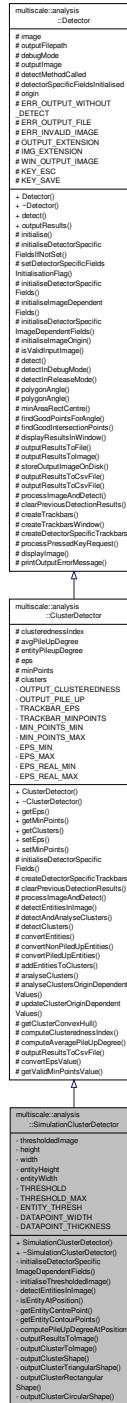

Collaboration diagram for multiscale::analysis::SimulationClusterDetector

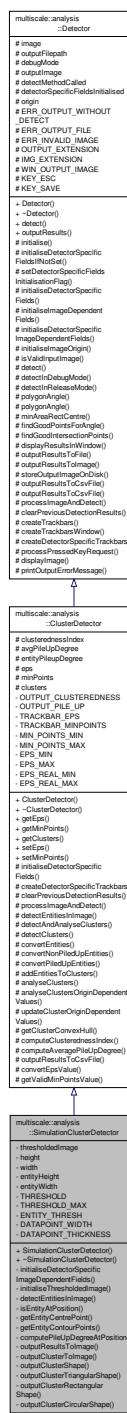

Public Member Functions

- `SimulationClusterDetector` (unsigned int `height`, unsigned int `width`, int `maxPileupNumber`, double `maxPileupIntensity`, bool `debugMode`=false)
 - `~SimulationClusterDetector` ()

Private Member Functions

- void `initialiseDetectorSpecificImageDependentFields ()` override
Initialise the image dependent values.
- void `initialiseThresholdedImage ()`
Initialise the thresholdedImage field.
- void `detectEntitiesInImage (vector< Entity > &entities)` override
Detect the entities in the image.
- bool `isEntityAtPosition (int x, int y)`
Check if there is an entity in the image at the given position.
- `Point2f getEntityCentrePoint (int x, int y)`
Get the point representing the centre of the entity.
- `vector< Point2f > getEntityContourPoints (int x, int y)`
Get the points representing the contour of the entity.
- `unsigned int computePileUpDegreeAtPosition (int x, int y)`
Compute the pile up degree at the given position.
- void `outputResultsToImage ()` override
Display clusters on image.
- void `outputClusterToImage (Cluster &cluster, Scalar colour, Mat &image)`
Display cluster on the image.
- void `outputClusterShape (Cluster &cluster, Scalar colour, Mat &image)`
Draw the best matching shape (triangular, rectangular, circular) of the cluster on the image.
- void `outputClusterTriangularShape (Cluster &cluster, Scalar colour, Mat &image)`
Draw the best matching triangular shape of the cluster on the image.
- void `outputClusterRectangularShape (Cluster &cluster, Scalar colour, Mat &image)`
Draw the best matching rectangular shape of the cluster on the image.
- void `outputClusterCircularShape (Cluster &cluster, Scalar colour, Mat &image)`
Draw the best matching circular shape of the cluster on the image.

Private Attributes

- `Mat thresholdedImage`
- `unsigned int height`
- `unsigned int width`
- `double entityHeight`
- `double entityWidth`

Static Private Attributes

- `static const int THRESHOLD = 1`
- `static const int THRESHOLD_MAX = 255`
- `static const int ENTITY_THRESH = 200`
- `static const int DATAPOINT_WIDTH = 10`
- `static const int DATAPOINT_THICKNESS = -1`

Additional Inherited Members

7.47.1 Detailed Description

Class for detecting clusters in 2D images obtained from simulations.

Definition at line 18 of file `SimulationClusterDetector.hpp`.

7.47.2 Constructor & Destructor Documentation

7.47.2.1 `SimulationClusterDetector::SimulationClusterDetector (unsigned int height, unsigned int width, int maxPileupNumber, double maxPileupIntensity, bool debugMode = false)`

Parameters

<i>height</i>	Height of the grid used in the simulation
<i>width</i>	Width of the grid used in the simulation
<i>debugMode</i>	Flag indicating if detector should run in debug mode or not
<i>maxPileup-Number</i>	The maximum number of entities which can occupy a grid position at the same time
<i>maxPileup-Intensity</i>	The grayscale intensity of a maximally piled up grid position

Definition at line 10 of file `SimulationClusterDetector.cpp`.

References `entityHeight`, `entityWidth`, `height`, and `width`.

7.47.2.2 `SimulationClusterDetector::~SimulationClusterDetector ()`

Definition at line 20 of file `SimulationClusterDetector.cpp`.

7.47.3 Member Function Documentation

7.47.3.1 `unsigned int SimulationClusterDetector::computePileUpDegreeAtPosition (int x, int y) [private]`

Compute the pile up degree at the given position.

Parameters


<i>x</i>	Coordinate for Ox axis
<i>y</i>	Coordinate for Oy axis

Definition at line 76 of file `SimulationClusterDetector.cpp`.

References `entityHeight`, `multiscale::analysis::ClusterDetector::entityPileupDegree`, `entityWidth`, and `multiscale::analysis::Detector::image`.

Referenced by `detectEntitiesInImage()`.

Here is the caller graph for this function:



7.47.3.2 `void SimulationClusterDetector::detectEntitiesInImage (vector< Entity > & entities) [override], [private], [virtual]`

Detect the entities in the image.

Detect the entities in the image, compute their centre point and degree of pile up

Parameters


<code>entities</code>	Entities detected in the image
-----------------------	--------------------------------

Implements [multiscale::analysis::ClusterDetector](#).

Definition at line 33 of file `SimulationClusterDetector.cpp`.

References `computePileUpDegreeAtPosition()`, `entityHeight`, `entityWidth`, `getEntityCentrePoint()`, `getEntityContourPoints()`, `height`, `isEntityAtPosition()`, and `width`.

Here is the call graph for this function:

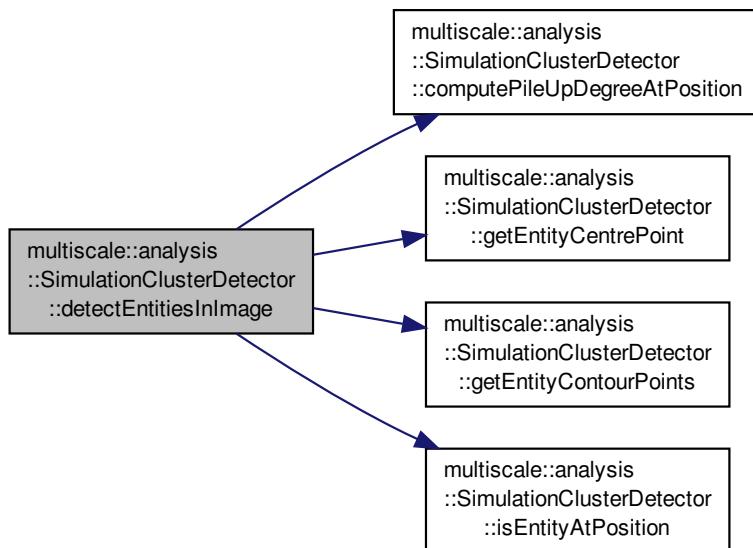

7.47.3.3 Point2f `SimulationClusterDetector::getEntityCentrePoint(int x, int y)` [private]

Get the point representing the centre of the entity.

Parameters


<code>x</code>	Ox coordinate
<code>y</code>	Oy coordinate

Definition at line 57 of file `SimulationClusterDetector.cpp`.

References `entityHeight`, and `entityWidth`.

Referenced by `detectEntitiesInImage()`.

Here is the caller graph for this function:



7.47.3.4 `vector< Point2f > SimulationClusterDetector::getEntityContourPoints (int x, int y) [private]`

Get the points representing the contour of the entity.

Parameters


<code>x</code>	Ox coordinate
<code>y</code>	Oy coordinate

Definition at line 64 of file SimulationClusterDetector.cpp.

References entityHeight, and entityWidth.

Referenced by `detectEntitiesInImage()`.

Here is the caller graph for this function:



7.47.3.5 `void SimulationClusterDetector::initialiseDetectorSpecificImageDependentFields () [override], [private], [virtual]`


Initialise the image dependent values.

Implements [multiscale::analysis::Detector](#).

Definition at line 22 of file SimulationClusterDetector.cpp.

References entityHeight, entityWidth, height, multiscale::analysis::Detector::image, initialiseThresholdedImage(), and width.

Here is the call graph for this function:



7.47.3.6 void SimulationClusterDetector::initialiseThresholdedImage () [private]


Initialise the thresholdedImage field.

Definition at line 29 of file SimulationClusterDetector.cpp.

References multiscale::analysis::Detector::image, THRESHOLD, THRESHOLD_MAX, and thresholdedImage.

Referenced by initialiseDetectorSpecificImageDependentFields().

Here is the caller graph for this function:



7.47.3.7 bool SimulationClusterDetector::isEntityAtPosition (int x, int y) [private]

Check if there is an entity in the image at the given position.

Parameters


x	Coordinate for Ox axis
y	Coordinate for Oy axis

Definition at line 49 of file SimulationClusterDetector.cpp.

References ENTITY_THRESH, entityHeight, entityWidth, and thresholdedImage.

Referenced by detectEntitiesInImage().

Here is the caller graph for this function:



7.47.3.8 void SimulationClusterDetector::outputClusterCircularShape (Cluster & cluster, Scalar colour, Mat & image) [private]

Draw the best matching circular shape of the cluster on the image.

Parameters


<i>cluster</i>	Cluster
<i>colour</i>	Colour associated to all entities in the cluster
<i>image</i>	The image on which to display the cluster related information

Definition at line 153 of file SimulationClusterDetector.cpp.


References DATAPoint_WIDTH, multiscale::analysis::Cluster::getMinAreaEnclosingCircleCentre(), and multiscale::analysis::Cluster::getMinAreaEnclosingCircleRadius().

Referenced by outputClusterShape().

Here is the call graph for this function:

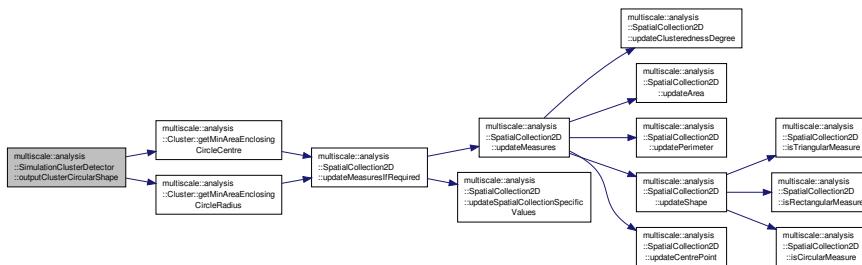

Here is the caller graph for this function:



7.47.3.9 `void SimulationClusterDetector::outputClusterRectangularShape (Cluster & cluster, Scalar colour, Mat & image)`
 [private]

Draw the best matching rectangular shape of the cluster on the image.

Parameters


<code>cluster</code>	Cluster
<code>colour</code>	Colour associated to all entities in the cluster
<code>image</code>	The image on which to display the cluster related information

Definition at line 143 of file `SimulationClusterDetector.cpp`.

References `DATAPOINT_WIDTH`, and `multiscale::analysis::Cluster::getMinAreaEnclosingRect()`.

Referenced by `outputClusterShape()`.

Here is the call graph for this function:

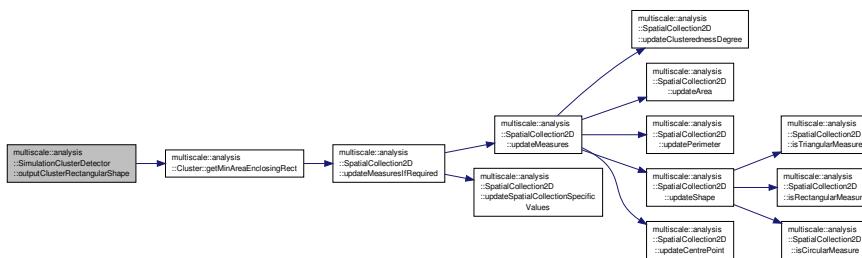

Here is the caller graph for this function:



7.47.3.10 `void SimulationClusterDetector::outputClusterShape (Cluster & cluster, Scalar colour, Mat & image)`
 [private]

Draw the best matching shape (triangular, rectangular, circular) of the cluster on the image.

Parameters


<code>cluster</code>	Cluster
<code>colour</code>	Colour associated to all entities in the cluster
<code>image</code>	The image on which to display the cluster related information

Definition at line 111 of file `SimulationClusterDetector.cpp`.


References `multiscale::analysis::Circle`, `multiscale::analysis::Cluster::ERR_UNDEFINED_SHAPE`, `multiscale::analysis::SpatialCollection2D::getShape()`, `MS_throw`, `outputClusterCircularShape()`, `outputClusterRectangularShape()`, `outputClusterTriangularShape()`, `multiscale::analysis::Rectangle`, and `multiscale::analysis::Triangle`.

Referenced by `outputClusterTolImage()`.

Here is the call graph for this function:

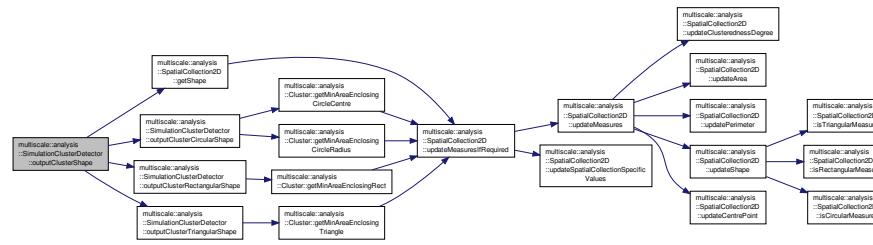

Here is the caller graph for this function:



7.47.3.11 void SimulationClusterDetector::outputClusterTolImage (Cluster & cluster, Scalar colour, Mat & image) [private]

Display cluster on the image.

Parameters


<i>cluster</i>	Cluster
<i>colour</i>	Colour associated to all entities in the cluster
<i>image</i>	The image on which to display the cluster related information

Definition at line 101 of file SimulationClusterDetector.cpp.


References DATAPOINT_THICKNESS, DATAPOINT_WIDTH, multiscale::analysis::Cluster::getEntities(), and outputClusterShape().

Referenced by outputResultsTolImage().

Here is the call graph for this function:

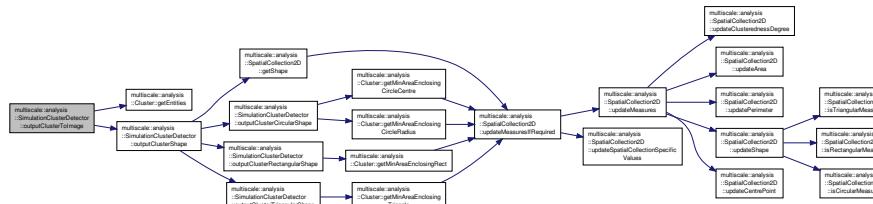

Here is the caller graph for this function:



7.47.3.12 `void SimulationClusterDetector::outputClusterTriangularShape (Cluster & cluster, Scalar colour, Mat & image)` [private]

Draw the best matching triangular shape of the cluster on the image.

Parameters


<code>cluster</code>	<code>Cluster</code>
<code>colour</code>	Colour associated to all entities in the cluster
<code>image</code>	The image on which to display the cluster related information

Definition at line 133 of file `SimulationClusterDetector.cpp`.

References `DATAPPOINT_WIDTH`, and `multiscale::analysis::Cluster::getMinAreaEnclosingTriangle()`.

Referenced by `outputClusterShape()`.

Here is the call graph for this function:

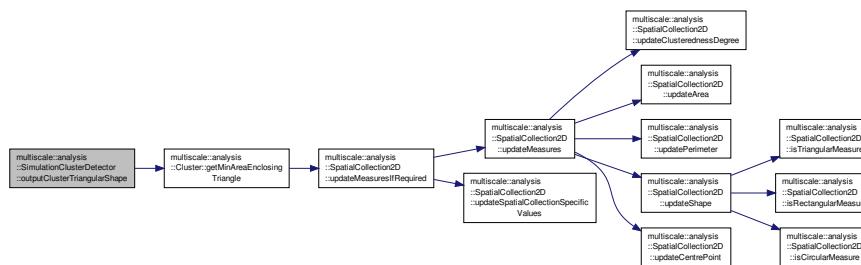

Here is the caller graph for this function:



7.47.3.13 `void SimulationClusterDetector::outputResultsToImage ()` [override], [private], [virtual]


Display clusters on image.

Implements [multiscale::analysis::Detector](#).

Definition at line 85 of file [SimulationClusterDetector.cpp](#).

References [multiscale::analysis::ClusterDetector::clusters](#), [multiscale::RGBColourGenerator::generate\(\)](#), [multiscale::analysis::Detector::image](#), [outputClusterToImage\(\)](#), and [multiscale::analysis::Detector::outputImage](#).

Here is the call graph for this function:

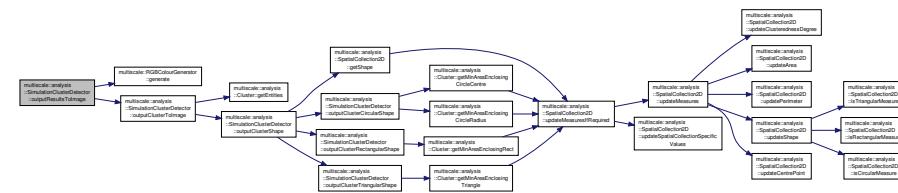

7.47.4 Member Data Documentation

7.47.4.1 const int [SimulationClusterDetector::DATAPoint_Thickness](#) = -1 [static], [private]

Definition at line 142 of file [SimulationClusterDetector.hpp](#).

Referenced by [outputClusterToImage\(\)](#).

7.47.4.2 const int [SimulationClusterDetector::DATAPoint_Width](#) = 10 [static], [private]

Definition at line 141 of file [SimulationClusterDetector.hpp](#).

Referenced by [outputClusterCircularShape\(\)](#), [outputClusterRectangularShape\(\)](#), [outputClusterToImage\(\)](#), and [outputClusterTriangularShape\(\)](#).

7.47.4.3 const int [SimulationClusterDetector::Entity_Threshold](#) = 200 [static], [private]

Definition at line 139 of file [SimulationClusterDetector.hpp](#).

Referenced by [isEntityAtPosition\(\)](#).

7.47.4.4 double [multiscale::analysis::SimulationClusterDetector::entityHeight](#) [private]

Height of an entity

Definition at line 27 of file [SimulationClusterDetector.hpp](#).

Referenced by [computePileUpDegreeAtPosition\(\)](#), [detectEntitiesInImage\(\)](#), [getEntityCentrePoint\(\)](#), [getEntityContourPoints\(\)](#), [initialiseDetectorSpecificImageDependentFields\(\)](#), [isEntityAtPosition\(\)](#), and [SimulationClusterDetector\(\)](#).

7.47.4.5 double [multiscale::analysis::SimulationClusterDetector::entityWidth](#) [private]

Width of an entity

Definition at line 28 of file [SimulationClusterDetector.hpp](#).

Referenced by [computePileUpDegreeAtPosition\(\)](#), [detectEntitiesInImage\(\)](#), [getEntityCentrePoint\(\)](#), [getEntityContourPoints\(\)](#), [initialiseDetectorSpecificImageDependentFields\(\)](#), [isEntityAtPosition\(\)](#), and [SimulationClusterDetector\(\)](#).

7.47.4.6 `unsigned int multiscale::analysis::SimulationClusterDetector::height` [private]

Height of the grid used in the simulation

Definition at line 24 of file `SimulationClusterDetector.hpp`.

Referenced by `detectEntitiesInImage()`, `initialiseDetectorSpecificImageDependentFields()`, and `SimulationClusterDetector()`.

7.47.4.7 `const int SimulationClusterDetector::THRESHOLD = 1` [static], [private]

Definition at line 136 of file `SimulationClusterDetector.hpp`.

Referenced by `initialiseThresholdedImage()`.

7.47.4.8 `const int SimulationClusterDetector::THRESHOLD_MAX = 255` [static], [private]

Definition at line 137 of file `SimulationClusterDetector.hpp`.

Referenced by `initialiseThresholdedImage()`.

7.47.4.9 `Mat multiscale::analysis::SimulationClusterDetector::thresholdedImage` [private]

Thresholded version of the image

Definition at line 22 of file `SimulationClusterDetector.hpp`.

Referenced by `initialiseThresholdedImage()`, and `isEntityAtPosition()`.

7.47.4.10 `unsigned int multiscale::analysis::SimulationClusterDetector::width` [private]

Width of the grid used in the simulation

Definition at line 25 of file `SimulationClusterDetector.hpp`.

Referenced by `detectEntitiesInImage()`, `initialiseDetectorSpecificImageDependentFields()`, and `SimulationClusterDetector()`.

The documentation for this class was generated from the following files:


- `modules/analysis/spatial/include/multiscale/analysis/spatial/cluster/SimulationClusterDetector.hpp`
- `modules/analysis/spatial/src/cluster/SimulationClusterDetector.cpp`

7.48 `multiscale::SimulationClusterDetectorException` Class Reference


Exception class for the `SimulationClusterDetector` instances.

```
#include <SimulationClusterDetectorException.hpp>
```

Inheritance diagram for multiscale::SimulationClusterDetectorException:

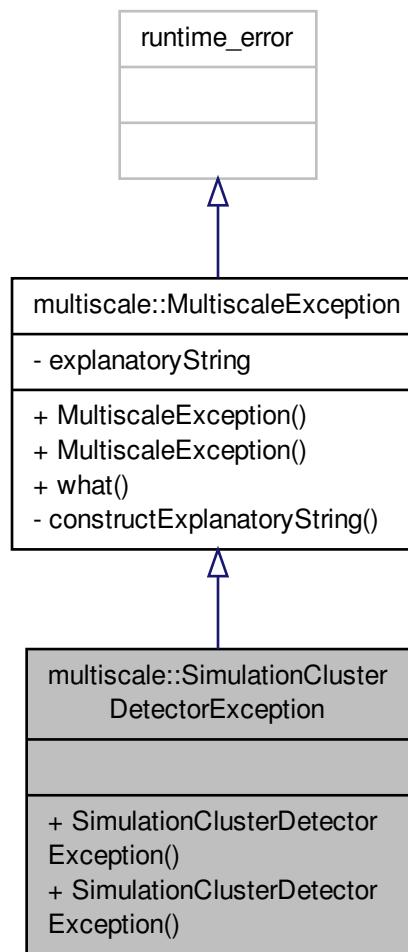

Collaboration diagram for multiscale::SimulationClusterDetectorException:

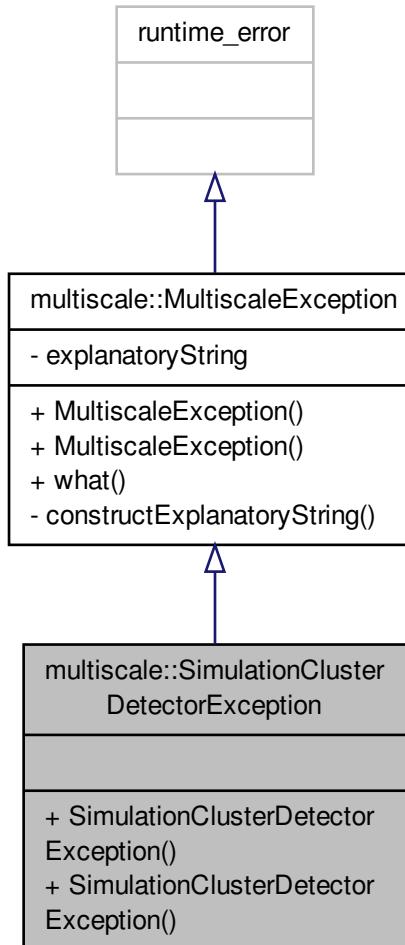

Public Member Functions

- [SimulationClusterDetectorException](#) (const string &file, int line, const string &msg)
- [SimulationClusterDetectorException](#) (const string &file, int line, const char *msg)

7.48.1 Detailed Description

Exception class for the SimulationClusterDetector instances.

Definition at line 14 of file `SimulationClusterDetectorException.hpp`.

7.48.2 Constructor & Destructor Documentation

7.48.2.1 `multiscale::SimulationClusterDetectorException::SimulationClusterDetectorException (const string & file, int line, const string & msg) [inline]`

Definition at line 18 of file `SimulationClusterDetectorException.hpp`.

7.48.2.2 `multiscale::SimulationClusterDetectorException::SimulationClusterDetectorException (const string & file, int line, const char * msg) [inline]`

Definition at line 20 of file `SimulationClusterDetectorException.hpp`.

The documentation for this class was generated from the following file:


- `include/multiscale/exception/SimulationClusterDetectorException.hpp`

7.49 multiscale::analysis::SpatialCollection2D Class Reference

Class for representing a collection of objects in 2D space.

```
#include <SpatialCollection2D.hpp>
```

Inheritance diagram for multiscale::analysis::SpatialCollection2D:

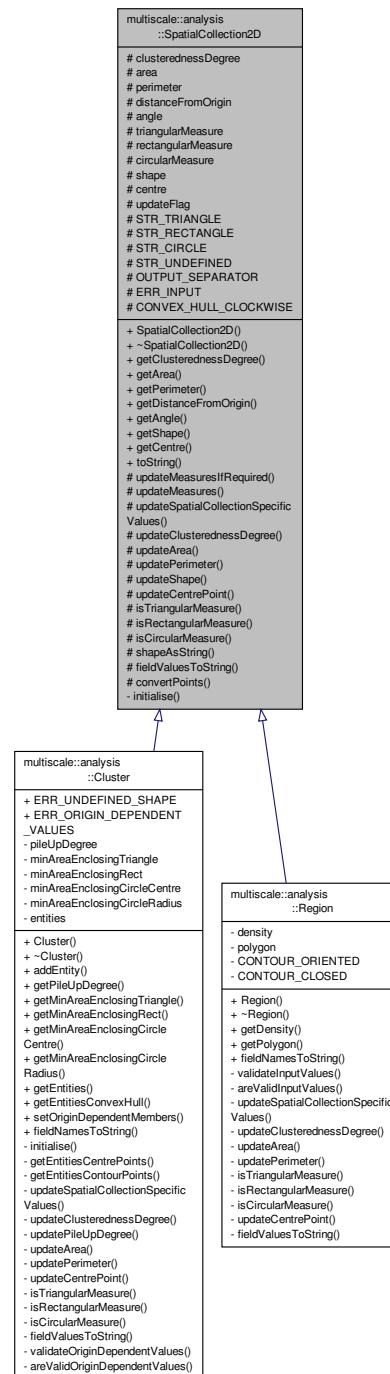

Collaboration diagram for multiscale::analysis::SpatialCollection2D:

<pre>multiscale::analysis ::SpatialCollection2D</pre>
<pre># clusterednessDegree # area # perimeter # distanceFromOrigin # angle # triangularMeasure # rectangularMeasure # circularMeasure # shape # centre # updateFlag # STR_TRIANGLE # STR_RECTANGLE # STR_CIRCLE # STR_UNDEFINED # OUTPUT_SEPARATOR # ERR_INPUT # CONVEX_HULL_CLOCKWISE + SpatialCollection2D() + ~SpatialCollection2D() + getClusterednessDegree() + getArea() + getPerimeter() + getDistanceFromOrigin() + getAngle() + getShape() + getCentre() + toString() # updateMeasuresIfRequired() # updateMeasures() # updateSpatialCollectionSpecific Values() # updateClusterednessDegree() # updateArea() # updatePerimeter() # updateShape() # updateCentrePoint() # isTriangularMeasure() # isRectangularMeasure() # isCircularMeasure() # shapeAsString() # fieldValuesToString() # convertPoints() - initialise()</pre>

Public Member Functions

- [SpatialCollection2D \(\)](#)
- virtual [~SpatialCollection2D \(\)](#)
- [double getClusterednessDegree \(\)](#)

Get the clusteredness degree.

- [double getArea \(\)](#)

- `double getPerimeter ()`

Get the perimeter.
- `double getDistanceFromOrigin ()`

Get the distance from the origin.
- `double getAngle ()`

Get the angle.
- `Shape2D getShape ()`

Get the shape best fitting the spatial collection.
- `Point2f getCentre ()`

Get the point defining the centre of the entity.
- `string toString ()`

Get the string representation of all field values.

Protected Member Functions

- `void updateMeasuresIfRequired ()`

Update the values of all measures if required.
- `void updateMeasures ()`

Update the values of all measures.
- `virtual void updateSpatialCollectionSpecificValues ()=0`

Update the values of all measures specific to the derived classes.
- `virtual void updateClusterednessDegree ()=0`

Update the value of the clusteredness degree.
- `virtual void updateArea ()=0`

Update the value of the area.
- `virtual void updatePerimeter ()=0`

Update the value of the perimeter.
- `void updateShape ()`

Update the shape of the cluster.
- `virtual void updateCentrePoint ()=0`

Update the point defining the centre of the cluster.
- `virtual double isTriangularMeasure ()=0`

Get the measure that the cluster has a triangular shape.
- `virtual double isRectangularMeasure ()=0`

Get the measure that the cluster has a rectangular shape.
- `virtual double isCircularMeasure ()=0`

Get the measure that the cluster has a circular shape.
- `string shapeAsString ()`

Return the shape of the cluster as a string.
- `virtual string fieldValuesToString ()=0`

Return the values of the fields as a string.
- `vector< Point2f > convertPoints (const vector< Point > &points)`

Convert the collection of points from type Point to type Point2f.

Protected Attributes

- double clusterednessDegree
- double area
- double perimeter
- double distanceFromOrigin
- double angle
- double triangularMeasure
- double rectangularMeasure
- double circularMeasure
- [Shape2D](#) shape
- [Point2f](#) centre
- bool updateFlag

Static Protected Attributes

- static const string [STR_TRIANGLE](#) = "triangle"
- static const string [STR_RECTANGLE](#) = "rectangle"
- static const string [STR_CIRCLE](#) = "circle"
- static const string [STR_UNDEFINED](#) = "undefined"
- static const string [OUTPUT_SEPARATOR](#) = ","
- static const string [ERR_INPUT](#) = "Invalid input parameters were provided to the constructor."
- static const bool [CONVEX_HULL_CLOCKWISE](#) = true

Private Member Functions

- void [initialise](#) ()

Initialisation function for the class.

7.49.1 Detailed Description

Class for representing a collection of objects in 2D space.

Definition at line 17 of file [SpatialCollection2D.hpp](#).


7.49.2 Constructor & Destructor Documentation

7.49.2.1 [SpatialCollection2D::SpatialCollection2D\(\)](#)

Definition at line 6 of file [SpatialCollection2D.cpp](#).

References [initialise\(\)](#).

Here is the call graph for this function:



7.49.2.2 `SpatialCollection2D::~SpatialCollection2D()` [virtual]

Definition at line 10 of file `SpatialCollection2D.cpp`.

7.49.3 Member Function Documentation

7.49.3.1 `vector< Point2f > SpatialCollection2D::convertPoints (const vector< Point > & points)` [protected]

Convert the collection of points from type `Point` to type `Point2f`.


Parameters

<code>points</code>	Collection of points
---------------------	----------------------

Definition at line 119 of file `SpatialCollection2D.cpp`.

Referenced by `multiscale::analysis::Region::isTriangularMeasure()`.

Here is the caller graph for this function:




7.49.3.2 `virtual string multiscale::analysis::SpatialCollection2D::fieldValuesToString ()` [protected], [pure virtual]

Return the values of the fields as a string.

Implemented in [multiscale::analysis::Cluster](#), and [multiscale::analysis::Region](#).

Referenced by `toString()`.

Here is the caller graph for this function:




7.49.3.3 double SpatialCollection2D::getAngle ()

Get the angle.

Definition at line 36 of file SpatialCollection2D.cpp.

References angle, and updateMeasuresIfRequired().

Here is the call graph for this function:

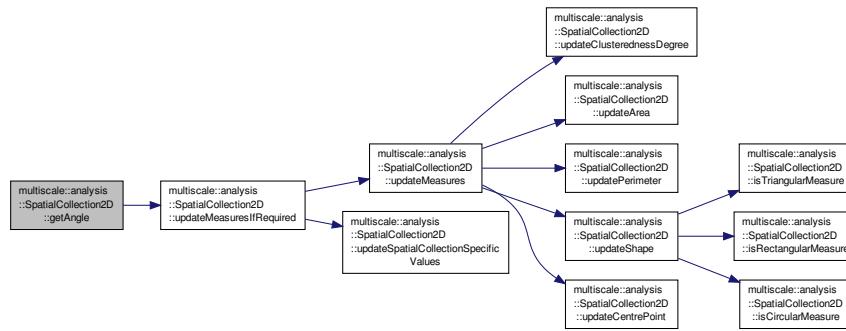


7.49.3.4 double SpatialCollection2D::getArea ()

Get the area.

Definition at line 18 of file SpatialCollection2D.cpp.

References area, and updateMeasuresIfRequired().

Here is the call graph for this function:

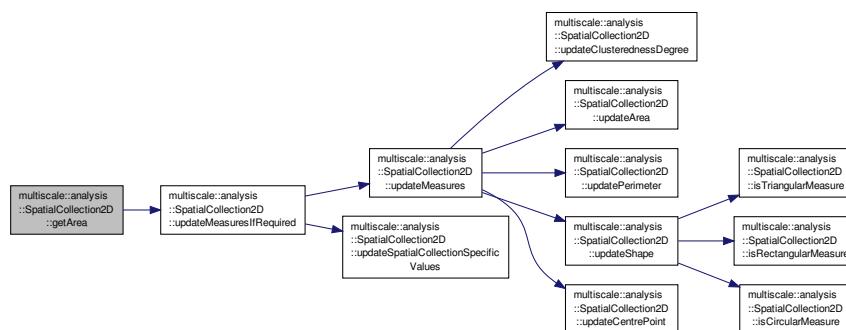


7.49.3.5 Point2f SpatialCollection2D::getCentre ()

Get the point defining the centre of the entity.

Definition at line 48 of file SpatialCollection2D.cpp.

References centre, and updateMeasuresIfRequired().

Here is the call graph for this function:

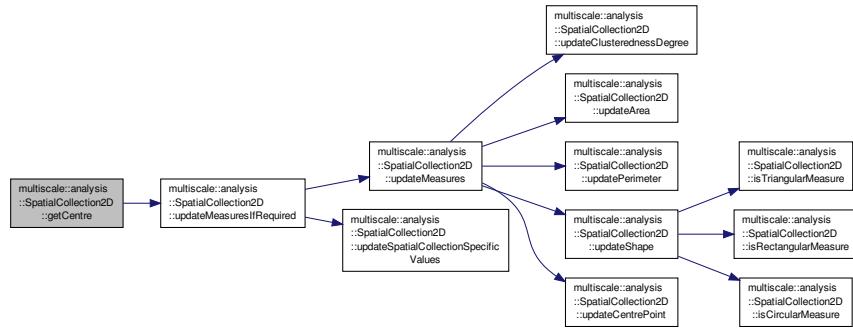


7.49.3.6 double SpatialCollection2D::getClusterednessDegree ()

Get the clusteredness degree.

Definition at line 12 of file SpatialCollection2D.cpp.

References clusterednessDegree, and updateMeasuresIfRequired().

Here is the call graph for this function:

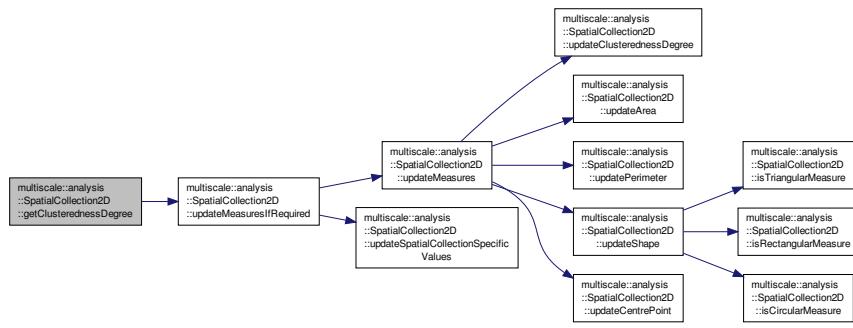


7.49.3.7 double SpatialCollection2D::getDistanceFromOrigin ()

Get the distance from the origin.

Definition at line 30 of file SpatialCollection2D.cpp.

References distanceFromOrigin, and updateMeasuresIfRequired().

Here is the call graph for this function:

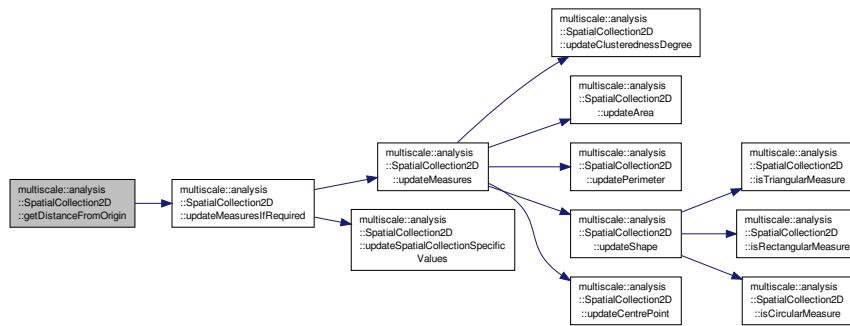


7.49.3.8 double SpatialCollection2D::getPerimeter ()

Get the perimeter.

Definition at line 24 of file SpatialCollection2D.cpp.

References perimeter, and updateMeasuresIfRequired().

Here is the call graph for this function:

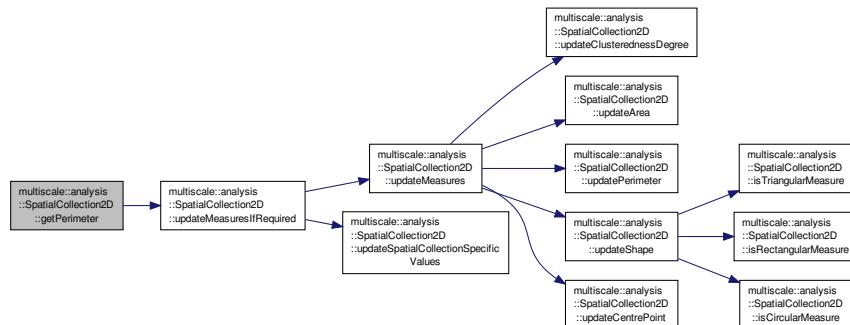

7.49.3.9 Shape2D SpatialCollection2D::getShape ()


Get the shape best fitting the spatial collection.

Definition at line 42 of file SpatialCollection2D.cpp.


References shape, and updateMeasuresIfRequired().

Referenced by multiscale::analysis::SimulationClusterDetector::outputClusterShape().

Here is the call graph for this function:

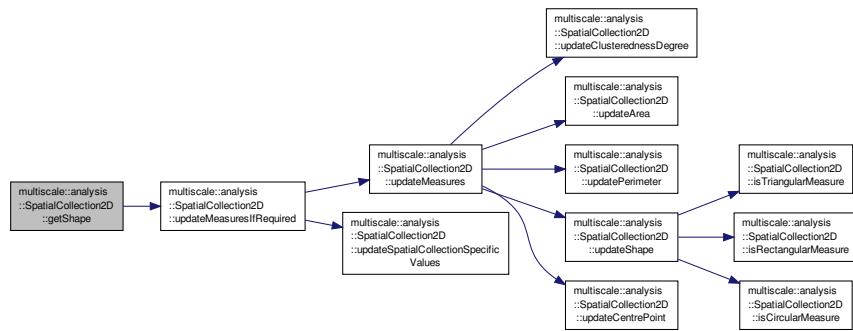

Here is the caller graph for this function:



7.49.3.10 void SpatialCollection2D::initialise() [private]


Initialisation function for the class.

Definition at line 129 of file SpatialCollection2D.cpp.

References area, circularMeasure, perimeter, rectangularMeasure, shape, triangularMeasure, multiscale::analysis::Undefined, and updateFlag.

Referenced by SpatialCollection2D().

Here is the caller graph for this function:




7.49.3.11 virtual double multiscale::analysis::SpatialCollection2D::isCircularMeasure() [protected], [pure virtual]

Get the measure that the cluster has a circular shape.

Implemented in `multiscale::analysis::Cluster`, and `multiscale::analysis::Region`.

Referenced by `updateShape()`.

Here is the caller graph for this function:

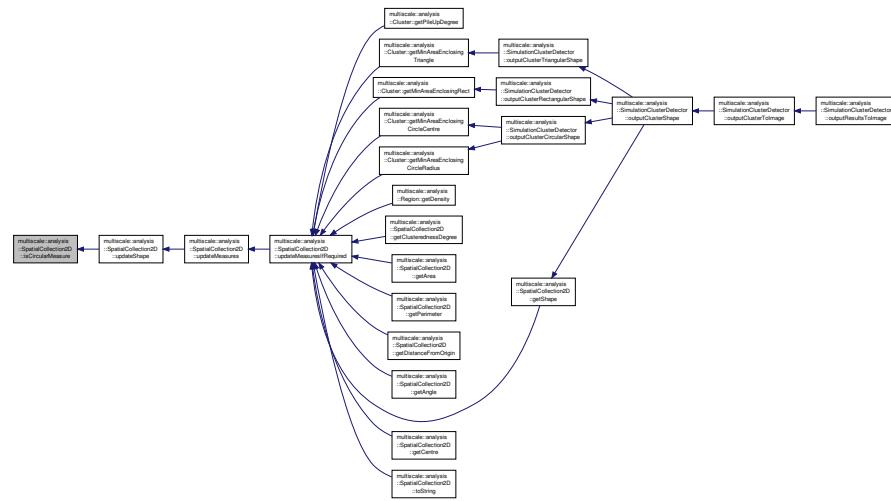


7.49.3.12 **virtual double multiscale::analysis::SpatialCollection2D::isRectangularMeasure ()** [protected], [pure virtual]

Get the measure that the cluster has a rectangular shape.

Implemented in `multiscale::analysis::Cluster`, and `multiscale::analysis::Region`.

Referenced by `updateShape()`.

Here is the caller graph for this function:

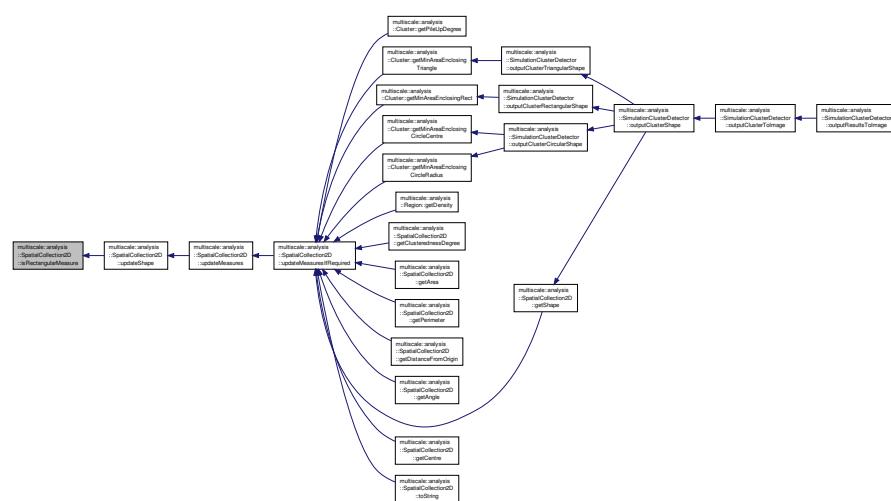


7.49.3.13 `virtual double multiscale::analysis::SpatialCollection2D::isTriangularMeasure ()` [protected], [pure virtual]

Get the measure that the cluster has a triangular shape.

Implemented in `multiscale::analysis::Cluster`, and `multiscale::analysis::Region`.

Referenced by updateShape().

Here is the caller graph for this function:

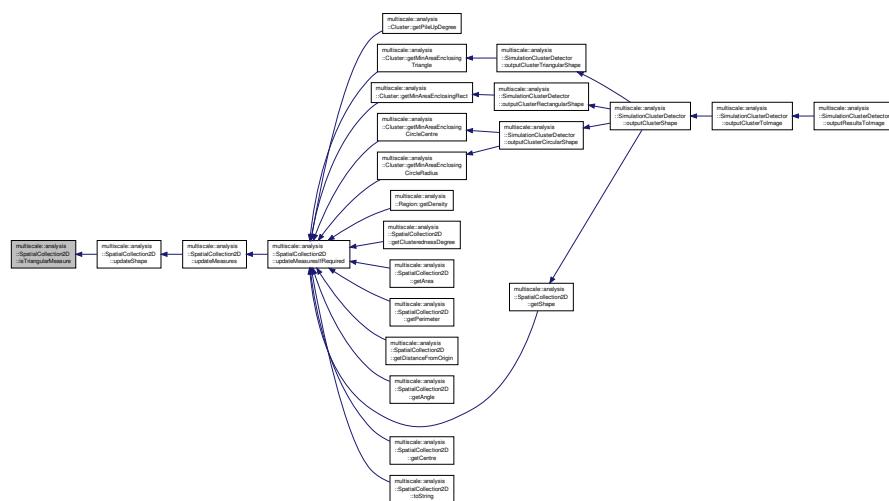

7.49.3.14 string SpatialCollection2D::shapeAsString() [protected]


Return the shape of the cluster as a string.

Definition at line 97 of file SpatialCollection2D.cpp.

References multiscale::analysis::Circle, multiscale::analysis::Rectangle, shape, STR_CIRCLE, STR_RECTANGLE, STR_TRIANGLE, STR_UNDEFINED, multiscale::analysis::Triangle, and multiscale::analysis::Undefined.

Referenced by multiscale::analysis::Region::fieldValuesToString(), and multiscale::analysis::Cluster::fieldValuesToString().

Here is the caller graph for this function:

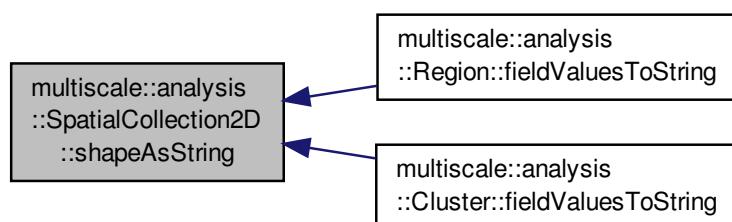


7.49.3.15 `string SpatialCollection2D::toString ()`

Get the string representation of all field values.

Definition at line 54 of file `SpatialCollection2D.cpp`.

References `fieldValuesToString()`, and `updateMeasuresIfRequired()`.

Here is the call graph for this function:

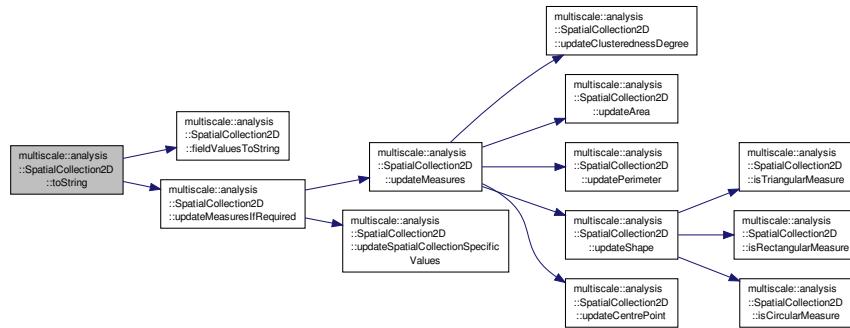
7.49.3.16 `virtual void multiscale::analysis::SpatialCollection2D::updateArea () [protected], [pure virtual]`

Update the value of the area.

Implemented in [multiscale::analysis::Cluster](#), and [multiscale::analysis::Region](#).

Referenced by `updateMeasures()`.

Here is the caller graph for this function:

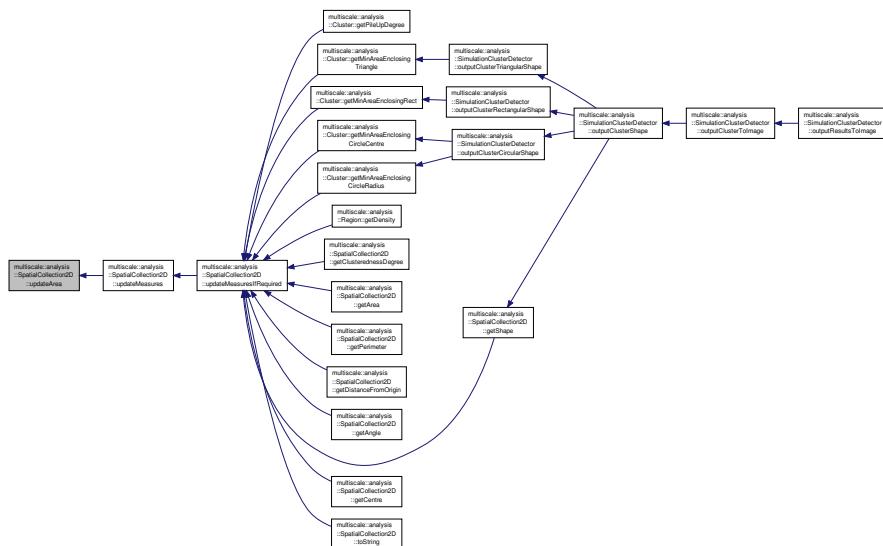


7.49.3.17 `virtual void multiscale::analysis::SpatialCollection2D::updateCentrePoint () [protected], [pure virtual]`

Update the point defining the centre of the cluster.

Implemented in `multiscale::analysis::Region`, and `multiscale::analysis::Cluster`.

Referenced by `updateMeasures()`.

Here is the caller graph for this function:

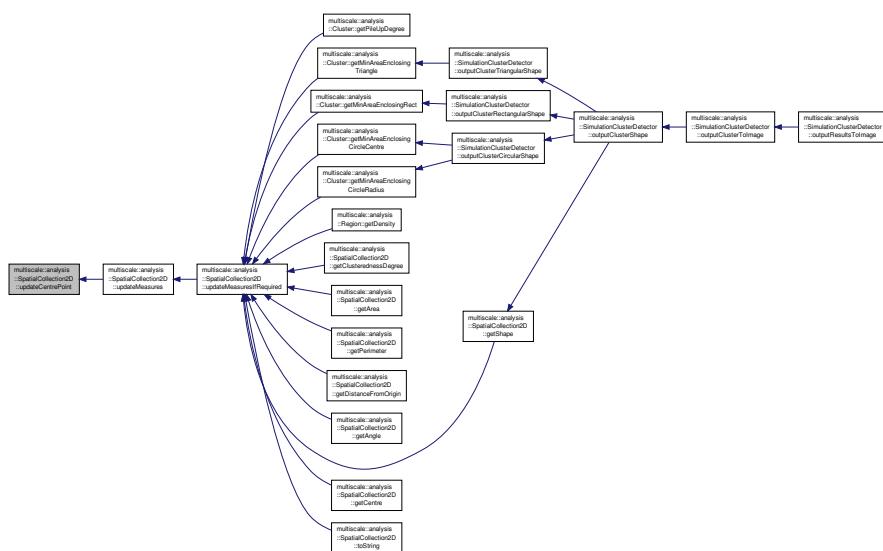


7.49.3.18 `virtual void multiscale::analysis::SpatialCollection2D::updateClusterednessDegree () [protected], [pure virtual]`

Update the value of the clusteredness degree.

Implemented in `multiscale::analysis::Region`, and `multiscale::analysis::Cluster`.

Referenced by `updateMeasures()`.

Here is the caller graph for this function:

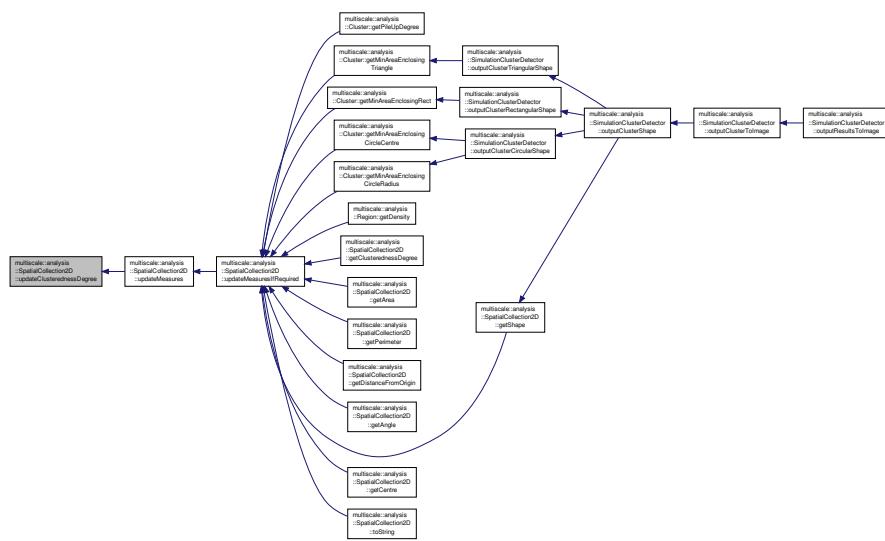

7.49.3.19 void SpatialCollection2D::updateMeasures() [protected]


Update the values of all measures.

Definition at line 69 of file `SpatialCollection2D.cpp`.


References `updateArea()`, `updateCentrePoint()`, `updateClusterednessDegree()`, `updatePerimeter()`, and `updateShape()`.

Referenced by `updateMeasuresIfRequired()`.

Here is the call graph for this function:

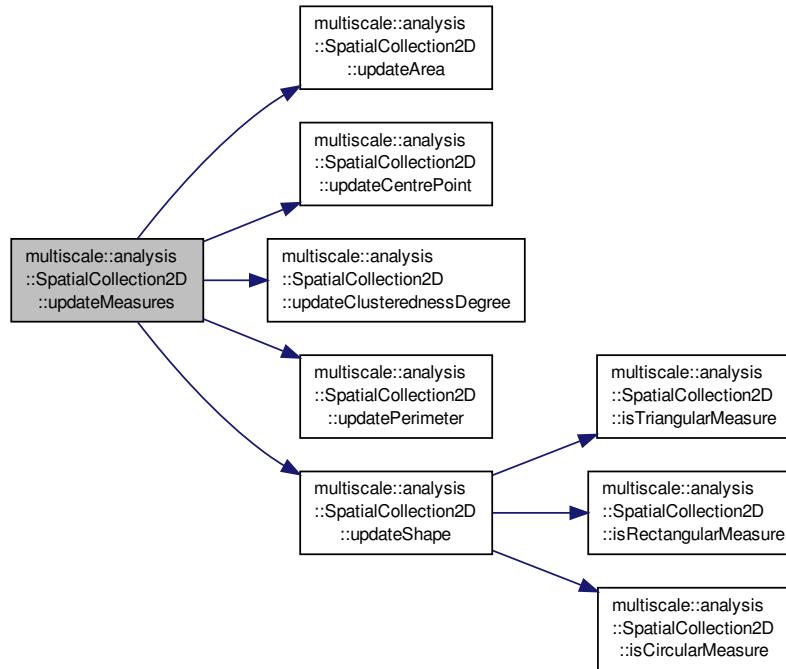

Here is the caller graph for this function:

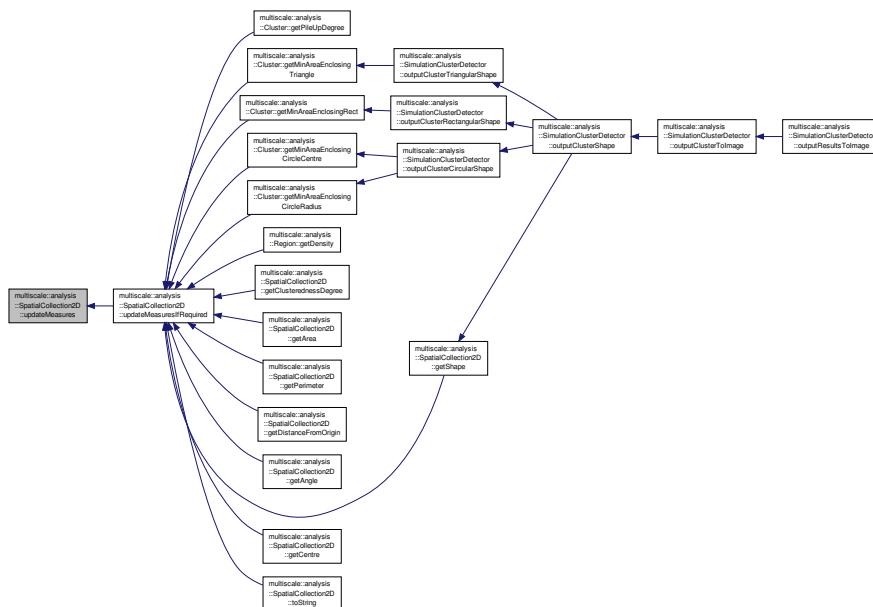

7.49.3.20 void SpatialCollection2D::updateMeasuresIfRequired() [protected]


Update the values of all measures if required.

Definition at line 60 of file SpatialCollection2D.cpp.


References updateFlag, updateMeasures(), and updateSpatialCollectionSpecificValues().

Referenced by getAngle(), getArea(), getCentre(), getClusterednessDegree(), multiscale::analysis::Region::getDensity(), getDistanceFromOrigin(), multiscale::analysis::Cluster::getMinAreaEnclosingCircleCentre(), multiscale::analysis::Cluster::getMinAreaEnclosingCircleRadius(), multiscale::analysis::Cluster::getMinAreaEnclosingRect(), multiscale::analysis::Cluster::getMinAreaEnclosingTriangle(), getPerimeter(), multiscale::analysis::Cluster::getPileUpDegree(), getShape(), and toString().

Here is the call graph for this function:

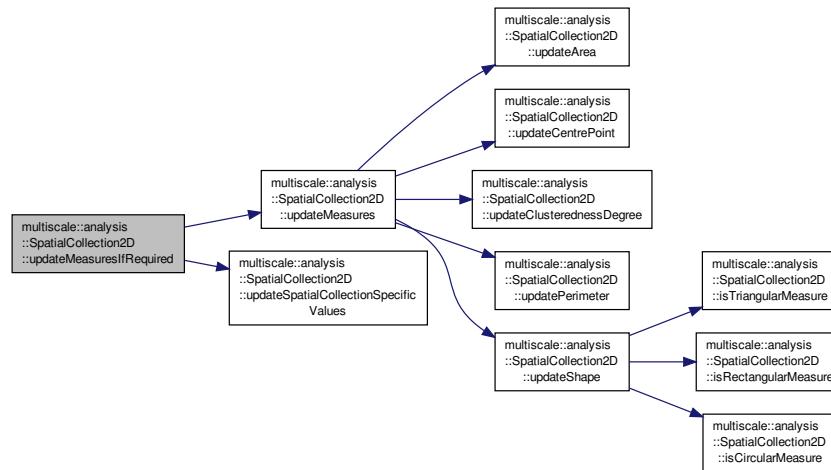

Here is the caller graph for this function:

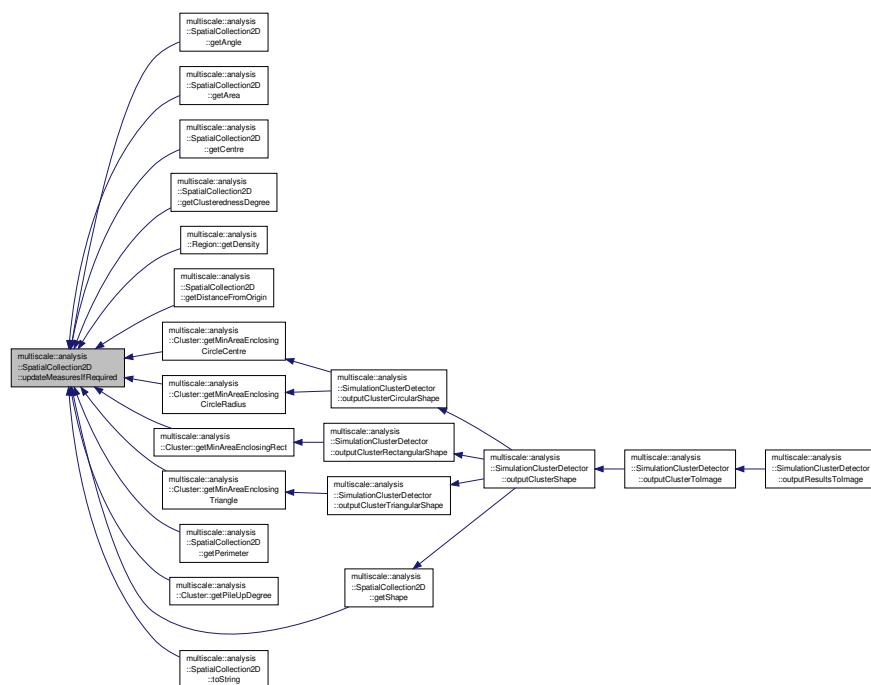


7.49.3.21 `virtual void multiscale::analysis::SpatialCollection2D::updatePerimeter() [protected], [pure virtual]`

Update the value of the perimeter.

Implemented in [multiscale::analysis::Cluster](#), and [multiscale::analysis::Region](#).

Referenced by `updateMeasures()`.

Here is the caller graph for this function:

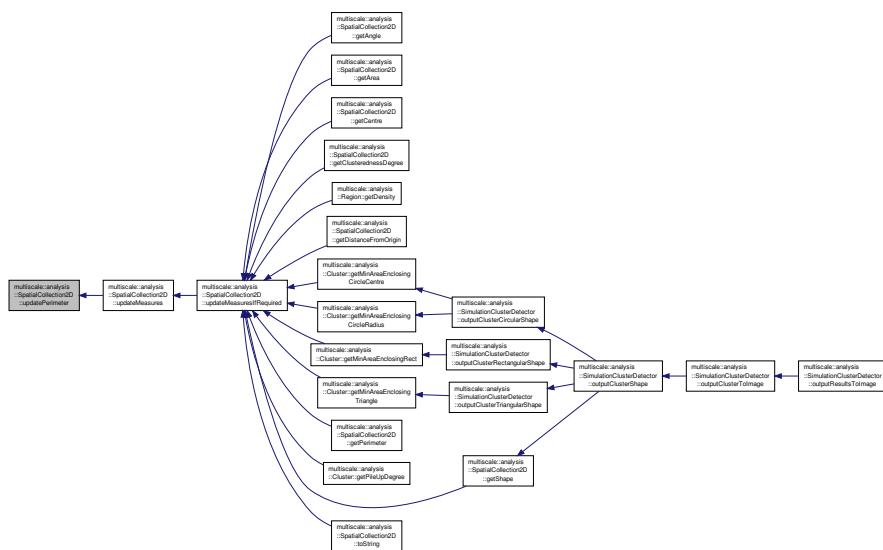

7.49.3.22 `void SpatialCollection2D::updateShape() [protected]`


Update the shape of the cluster.

Definition at line 77 of file `SpatialCollection2D.cpp`.


References `multiscale::analysis::Circle`, `circularMeasure`, `isCircularMeasure()`, `isRectangularMeasure()`, `isTriangularMeasure()`, `multiscale::analysis::Rectangle`, `rectangularMeasure`, `shape`, `multiscale::analysis::Triangle`, and `triangularMeasure`.

Referenced by `updateMeasures()`.

Here is the call graph for this function:

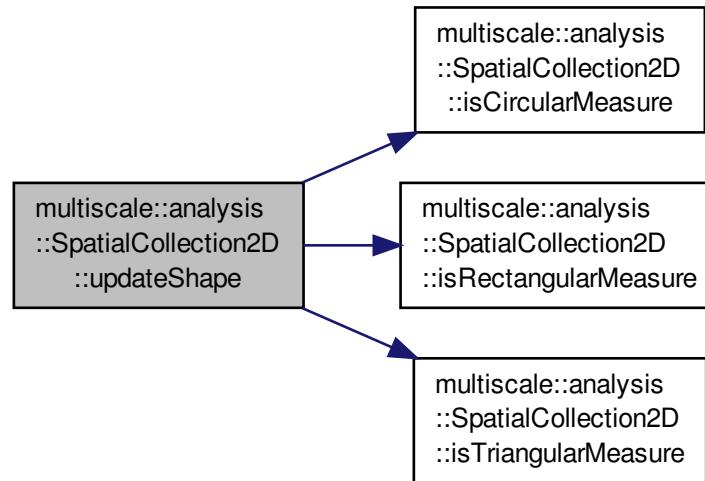

Here is the caller graph for this function:

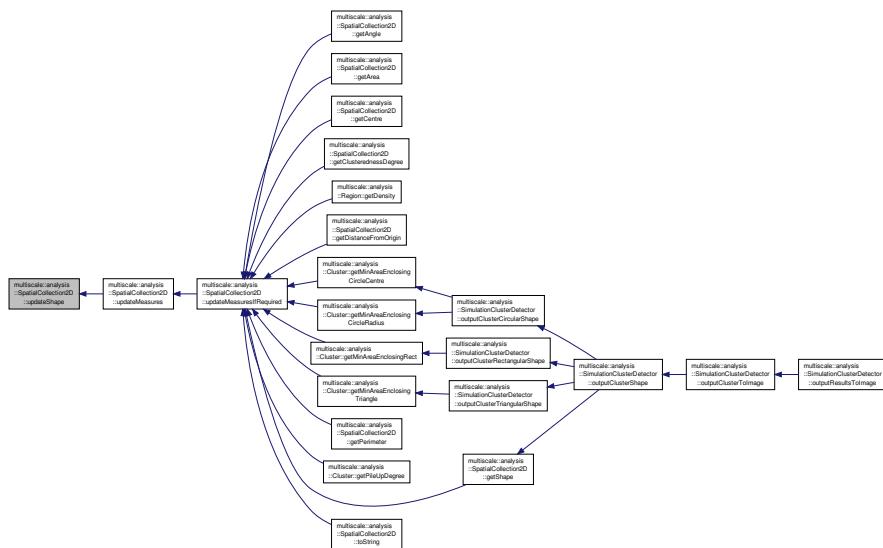


7.49.3.23 `virtual void multiscale::analysis::SpatialCollection2D::updateSpatialCollectionSpecificValues ()` [protected], [pure virtual]

Update the values of all measures specific to the derived classes.

Implemented in [multiscale::analysis::Region](#), and [multiscale::analysis::Cluster](#).

Referenced by `updateMeasuresIfRequired()`.

Here is the caller graph for this function:

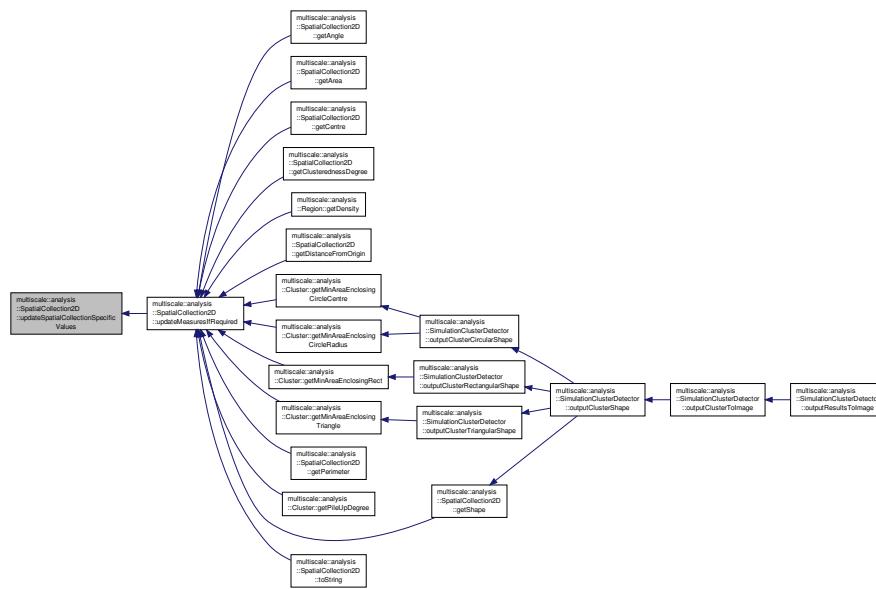

7.49.4 Member Data Documentation

7.49.4.1 double multiscale::analysis::SpatialCollection2D::angle [protected]

Angle of the region wrt the origin

Definition at line 27 of file SpatialCollection2D.hpp.

Referenced by multiscale::analysis::Region::fieldValuesToString(), multiscale::analysis::Cluster::fieldValuesToString(), getAngle(), multiscale::analysis::Cluster::initialise(), multiscale::analysis::Region::Region(), and multiscale::analysis::Cluster::setOriginDependentMembers().

7.49.4.2 double multiscale::analysis::SpatialCollection2D::area [protected]

Area of the spatial collection

Definition at line 23 of file SpatialCollection2D.hpp.

Referenced by multiscale::analysis::Region::fieldValuesToString(), multiscale::analysis::Cluster::fieldValuesToString(), getArea(), initialise(), multiscale::analysis::Region::isCircularMeasure(), multiscale::analysis::Cluster::isCircularMeasure(), multiscale::analysis::Region::isRectangularMeasure(), multiscale::analysis::Cluster::isRectangularMeasure(), multiscale::analysis::Region::isTriangularMeasure(), multiscale::analysis::Cluster::isTriangularMeasure(), multiscale::analysis::Region::Region(), and multiscale::analysis::Cluster::updateArea().

7.49.4.3 Point2f multiscale::analysis::SpatialCollection2D::centre [protected]

Point defining the centre of the spatial collection

Definition at line 34 of file SpatialCollection2D.hpp.

Referenced by multiscale::analysis::Region::fieldValuesToString(), multiscale::analysis::Cluster::fieldValuesToString(), getCentre(), multiscale::analysis::Cluster::updateCentrePoint(), and multiscale::analysis::Region::updateCentrePoint().

7.49.4.4 double multiscale::analysis::SpatialCollection2D::circularMeasure [protected]

Measure ([0, 1]) indicating that the shape of the spatial collection is circular

Definition at line 31 of file SpatialCollection2D.hpp.

Referenced by multiscale::analysis::Region::fieldValuesToString(), multiscale::analysis::Cluster::fieldValuesToString(), initialise(), and updateShape().

7.49.4.5 double multiscale::analysis::SpatialCollection2D::clusterednessDegree [protected]

Degree of clusteredness

Definition at line 21 of file SpatialCollection2D.hpp.

Referenced by multiscale::analysis::Region::fieldValuesToString(), multiscale::analysis::Cluster::fieldValuesToString(), getClusterednessDegree(), multiscale::analysis::Cluster::initialise(), multiscale::analysis::Region::Region(), and multiscale::analysis::Cluster::updateClusterednessDegree().

7.49.4.6 const bool SpatialCollection2D::CONVEX_HULL_CLOCKWISE = true [static], [protected]

Definition at line 134 of file SpatialCollection2D.hpp.

Referenced by multiscale::analysis::Cluster::getEntitiesConvexHull(), and multiscale::analysis::Region::isTriangularMeasure().

7.49.4.7 double multiscale::analysis::SpatialCollection2D::distanceFromOrigin [protected]

Distance from the origin

Definition at line 26 of file SpatialCollection2D.hpp.

Referenced by multiscale::analysis::Region::fieldValuesToString(), multiscale::analysis::Cluster::fieldValuesToString(), getDistanceFromOrigin(), multiscale::analysis::Cluster::initialise(), multiscale::analysis::Region::Region(), and multiscale::analysis::Cluster::setOriginDependentMembers().

7.49.4.8 const string SpatialCollection2D::ERR_INPUT = "Invalid input parameters were provided to the constructor" [static], [protected]

Definition at line 132 of file SpatialCollection2D.hpp.

Referenced by multiscale::analysis::Region::validateInputValues().

7.49.4.9 const string SpatialCollection2D::OUTPUT_SEPARATOR = ";" [static], [protected]

Definition at line 130 of file SpatialCollection2D.hpp.

Referenced by multiscale::analysis::Region::fieldValuesToString(), and multiscale::analysis::Cluster::fieldValuesToString().

7.49.4.10 double multiscale::analysis::SpatialCollection2D::perimeter [protected]

Perimeter of the spatial collection

Definition at line 24 of file SpatialCollection2D.hpp.

Referenced by multiscale::analysis::Region::fieldValuesToString(), multiscale::analysis::Cluster::fieldValuesToString(), getPerimeter(), initialise(), multiscale::analysis::Region::updatePerimeter(), and multiscale::analysis::Cluster::updatePerimeter().

7.49.4.11 double multiscale::analysis::SpatialCollection2D::rectangularMeasure [protected]

Measure ([0, 1]) indicating that the shape of the spatial collection is rectangular

Definition at line 30 of file SpatialCollection2D.hpp.

Referenced by multiscale::analysis::Region::fieldValuesToString(), multiscale::analysis::Cluster::fieldValuesToString(), initialise(), and updateShape().

7.49.4.12 Shape2D multiscale::analysis::SpatialCollection2D::shape [protected]

Shape of the spatial collection

Definition at line 33 of file SpatialCollection2D.hpp.

Referenced by getShape(), initialise(), shapeAsString(), and updateShape().

7.49.4.13 const string SpatialCollection2D::STR_CIRCLE = "circle" [static], [protected]

Definition at line 127 of file SpatialCollection2D.hpp.

Referenced by shapeAsString().

7.49.4.14 const string SpatialCollection2D::STR_RECTANGLE = "rectangle" [static], [protected]

Definition at line 126 of file SpatialCollection2D.hpp.

Referenced by shapeAsString().

7.49.4.15 const string SpatialCollection2D::STR_TRIANGLE = "triangle" [static], [protected]

Definition at line 125 of file SpatialCollection2D.hpp.

Referenced by shapeAsString().

7.49.4.16 const string SpatialCollection2D::STR_UNDEFINED = "undefined" [static], [protected]

Definition at line 128 of file SpatialCollection2D.hpp.

Referenced by shapeAsString().

7.49.4.17 double multiscale::analysis::SpatialCollection2D::triangularMeasure [protected]

Measure ([0, 1]) indicating that the shape of the spatial collection is triangular

Definition at line 29 of file SpatialCollection2D.hpp.

Referenced by multiscale::analysis::Region::fieldValuesToString(), multiscale::analysis::Cluster::fieldValuesToString(), initialise(), and updateShape().

7.49.4.18 bool multiscale::analysis::SpatialCollection2D::updateFlag [protected]

Flag indicating if the field values dependent on the

collection of entities need to be updated. This flag is used for lazy evaluation purposes, such that new field values are computed only when required

Definition at line 36 of file SpatialCollection2D.hpp.

Referenced by multiscale::analysis::Cluster::addEntity(), multiscale::analysis::Cluster::initialise(), initialise(), and updateMeasuresIfRequired().

The documentation for this class was generated from the following files:


- modules/analysis/spatial/include/multiscale/analysis/spatial/[SpatialCollection2D.hpp](#)
- modules/analysis/spatial/src/[SpatialCollection2D.cpp](#)

7.50 multiscale::StandardNumberIterator Class Reference


Iterator class starting at 1 and iterating over all natural numbers until the provided upper bound is reached.

```
#include <StandardNumberIterator.hpp>
```

Inheritance diagram for multiscale::StandardNumberIterator:

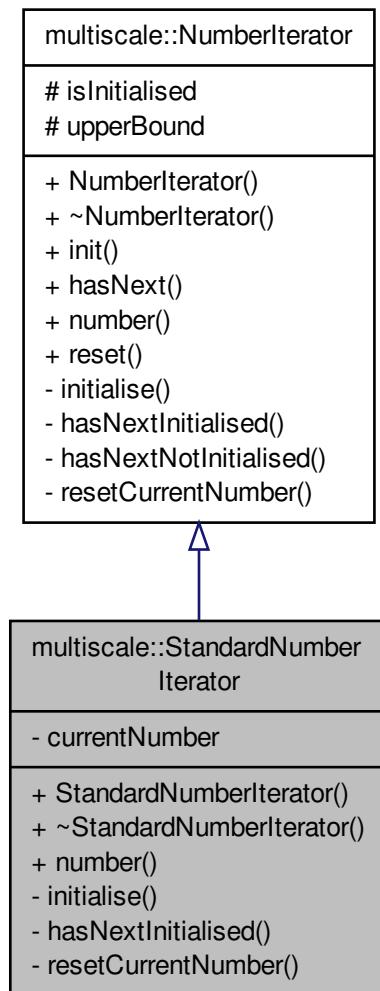

Collaboration diagram for multiscale::StandardNumberIterator:

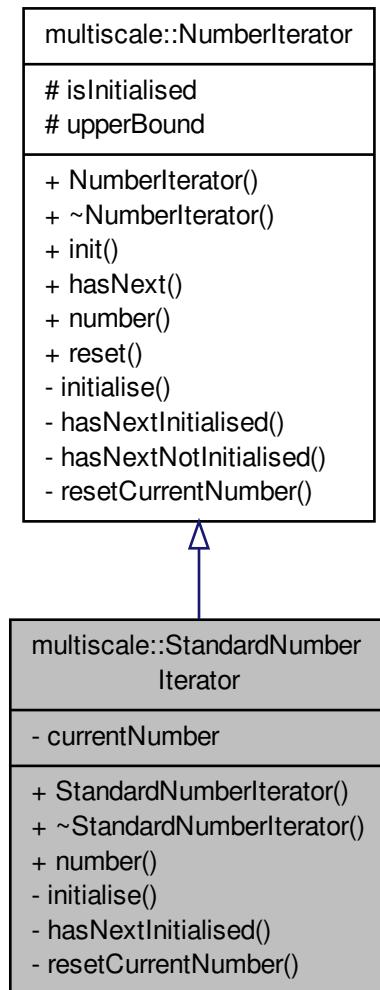

Public Member Functions

- `StandardNumberIterator (unsigned int upperBound)`
- `~StandardNumberIterator ()`
- `unsigned int number ()`

Get the number pointed by the iterator.

Private Member Functions

- `void initialise ()`
Initialise the value of the current number.
- `bool hasNextInitialised ()`
Check if there is a next number when in initialised state.
- `void resetCurrentNumber ()`
Reset the current number to the initial value.

Private Attributes

- `unsigned int currentNumber`

Additional Inherited Members

7.50.1 Detailed Description

Iterator class starting at 1 and iterating over all natural numbers until the provided upper bound is reached.

Definition at line 10 of file `StandardNumberIterator.hpp`.


7.50.2 Constructor & Destructor Documentation

7.50.2.1 StandardNumberIterator::StandardNumberIterator (`unsigned int upperBound`)

Definition at line 6 of file `StandardNumberIterator.cpp`.

References `initialise()`, and `multiscale::NumberIterator::reset()`.

Here is the call graph for this function:



7.50.2.2 StandardNumberIterator::~StandardNumberIterator ()

Definition at line 11 of file `StandardNumberIterator.cpp`.

7.50.3 Member Function Documentation

7.50.3.1 bool StandardNumberIterator::hasNextInitialised () [private], [virtual]

Check if there is a next number when in initialised state.

Implements `multiscale::NumberIterator`.

Definition at line 19 of file `StandardNumberIterator.cpp`.

References `currentNumber`, and `multiscale::NumberIterator::upperBound`.

7.50.3.2 void StandardNumberIterator::initialise () [private], [virtual]


Initialise the value of the current number.

Implements `multiscale::NumberIterator`.

Definition at line 17 of file `StandardNumberIterator.cpp`.

Referenced by `StandardNumberIterator()`.

Here is the caller graph for this function:



7.50.3.3 `unsigned int StandardNumberIterator::number() [virtual]`

Get the number pointed by the iterator.

Implements [multiscale::NumberIterator](#).

Definition at line 13 of file `StandardNumberIterator.cpp`.

References `currentNumber`.

7.50.3.4 `void StandardNumberIterator::resetCurrentNumber() [private], [virtual]`

Reset the current number to the initial value.

Implements [multiscale::NumberIterator](#).

Definition at line 29 of file `StandardNumberIterator.cpp`.

References `currentNumber`.

7.50.4 Member Data Documentation

7.50.4.1 `unsigned int multiscale::StandardNumberIterator::currentNumber [private]`

The current number

Definition at line 14 of file `StandardNumberIterator.hpp`.

Referenced by `hasNextInitialised()`, `number()`, and `resetCurrentNumber()`.

The documentation for this class was generated from the following files:


- `modules/util/include/multiscale/util/iterator/StandardNumberIterator.hpp`
- `modules/util/src/iterator/StandardNumberIterator.cpp`

7.51 `multiscale::StringManipulator` Class Reference

Class for manipulating strings.

```
#include <StringManipulator.hpp>
```

Collaboration diagram for multiscale::StringManipulator:

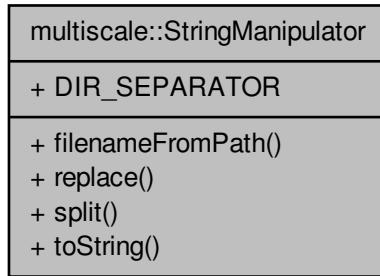

Static Public Member Functions

- static string [filenameFromPath](#) (const string &filepath)
Obtain the file name from the given file path.
- static string [replace](#) (const string &initialString, const string &replaceWhat, const string &replaceTo)
Replace a substring of the given string with another string.
- static vector< string > [split](#) (const string &initialString, const string &delimiter)
Split the given string into a vector of strings considering the given delimiter.
- template<class T >
 static string [toString](#) (T variable)
Convert the variable to a string.

Static Public Attributes

- static const char [DIR_SEPARATOR](#) = '/'

7.51.1 Detailed Description

Class for manipulating strings.

Definition at line 14 of file StringManipulator.hpp.

7.51.2 Member Function Documentation

7.51.2.1 string StringManipulator::filenameFromPath (const string & *filepath*) [static]

Obtain the file name from the given file path.

Parameters


<i>filepath</i>	File path
-----------------	-----------

Definition at line 9 of file StringManipulator.cpp.

References DIR_SEPARATOR.

Referenced by multiscale::video::PolarGnuplotScriptGenerator::generateHeader(), and multiscale::video::RectangularGnuplotScriptGenerator::generateHeader().

Here is the caller graph for this function:

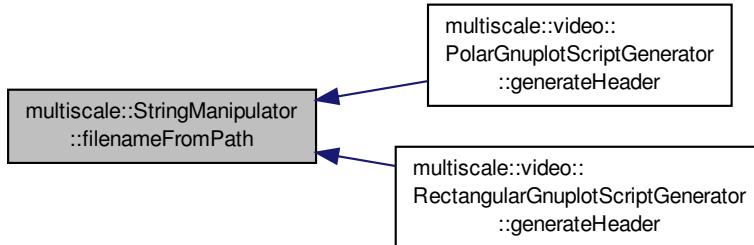

7.51.2.2 `string StringManipulator::replace (const string & initialString, const string & replaceWhat, const string & replaceTo) [static]`

Replace a substring of the given string with another string.


Parameters

<i>initialString</i>	Initial string
<i>replaceWhat</i>	Substring which will be replaced
<i>replaceTo</i>	String which will be inserted instead of the replaceWhat string

Definition at line 19 of file StringManipulator.cpp.

Referenced by multiscale::video::PolarGnuplotScriptGenerator::outputContent(), multiscale::video::PolarGnuplotScriptGenerator::outputHeader(), and multiscale::video::RectangularGnuplotScriptGenerator::outputHeader().

Here is the caller graph for this function:

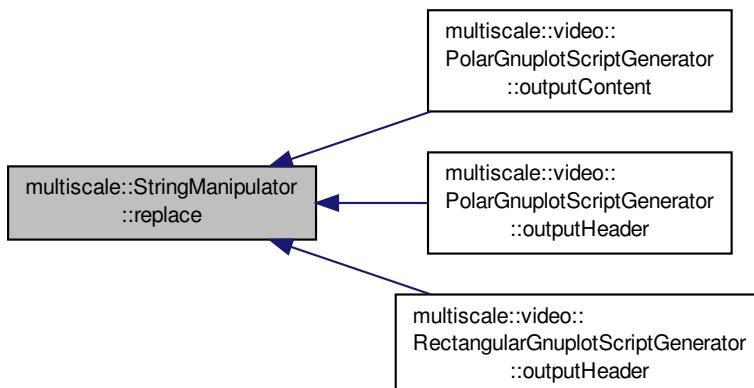

7.51.2.3 `vector< string > StringManipulator::split (const string & initialString, const string & delimiter) [static]`

Split the given string into a vector of strings considering the given delimiter.


Parameters

<code>initialString</code>	Initial string
<code>delimiter</code>	Delimiter

Definition at line 32 of file StringManipulator.cpp.

Referenced by `multiscale::video::PolarCsvToInputFilesConverter::splitLineInConcentrations()`, `multiscale::video::RectangularCsvToInputFilesConverter::splitLineInConcentrations()`, `multiscale::video::RectangularEntityCsvToInputFilesConverter::splitLineInCoordinates()`, `multiscale::video::RectangularEntityCsvToInputFilesConverter::validateInputLine()`, `multiscale::video::PolarCsvToInputFilesConverter::validateInputLine()`, and `multiscale::video::RectangularCsvToInputFilesConverter::validateInputLine()`.

Here is the caller graph for this function:

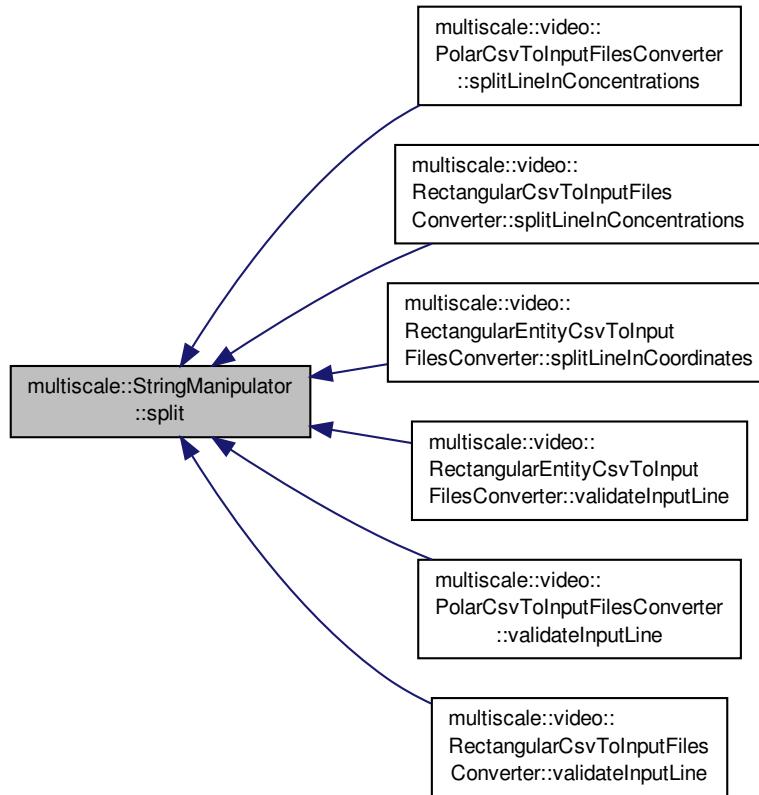7.51.2.4 `template<class T > static string multiscale::StringManipulator::toString (T variable) [inline], [static]`

Convert the variable to a string.


Parameters

<code>variable</code>	Variable
-----------------------	----------

Definition at line 46 of file StringManipulator.hpp.

Referenced by multiscale::video::RectangularEntityCsvToInputFilesConverter::initOutputFile(), multiscale::video::PolarCsvToInputFilesConverter::initOutputFile(), and multiscale::video::RectangularCsvToInputFilesConverter::initOutputFile().

Here is the caller graph for this function:

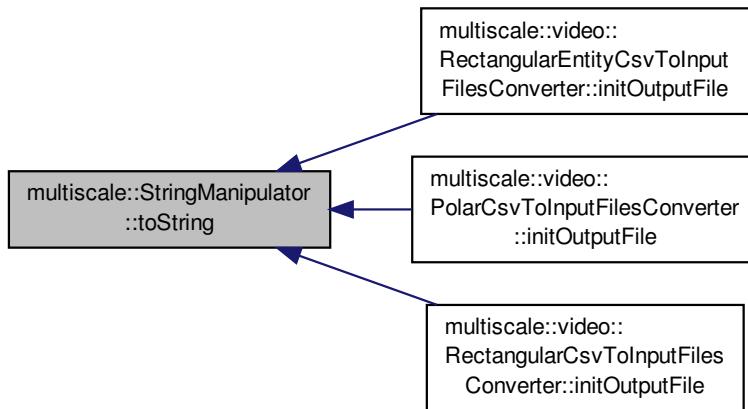

7.51.3 Member Data Documentation

7.51.3.1 const char StringManipulator::DIR_SEPARATOR = '/' [static]

Definition at line 57 of file StringManipulator.hpp.

Referenced by filenameFromPath().

The documentation for this class was generated from the following files:

- modules/util/include/multiscale/util/StringManipulator.hpp
- modules/util/src/StringManipulator.cpp


Chapter 8

File Documentation


8.1 doc/mainpage.dox File Reference

8.2 include/multiscale/core/Multiscale.hpp File Reference

```
#include <string>
Include dependency graph for Multiscale.hpp:
```



This graph shows which files directly or indirectly include this file:



Namespaces

- namespace `multiscale`


Variables

- const int `multiscale::ERR_CODE` = 1


- const std::string [multiscale::ERR_MSG](#) = "An error occurred: "

8.3 include/multiscale/core/MultiscaleTest.hpp File Reference

```
#include "gtest/gtest.h"  
Include dependency graph for MultiscaleTest.hpp:
```



This graph shows which files directly or indirectly include this file:

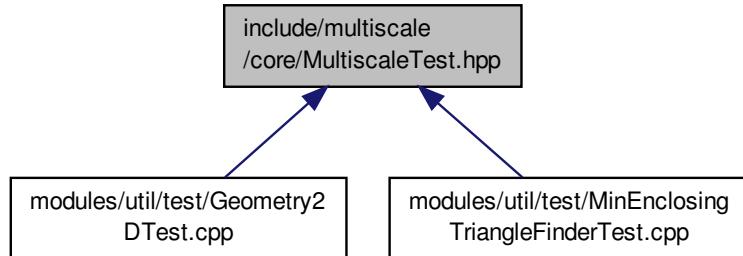

Classes


- class [multiscaletest::MultiscaleTest](#)

Namespaces


- namespace [multiscaletest](#)

8.4 include/multiscale/exception/CartesianToConcentrationsConverterException.hpp File Reference

```
#include "multiscale/exception/MultiscaleException.hpp"
#include <string>
Include dependency graph for CartesianToConcentrationsConverterException.hpp:
```

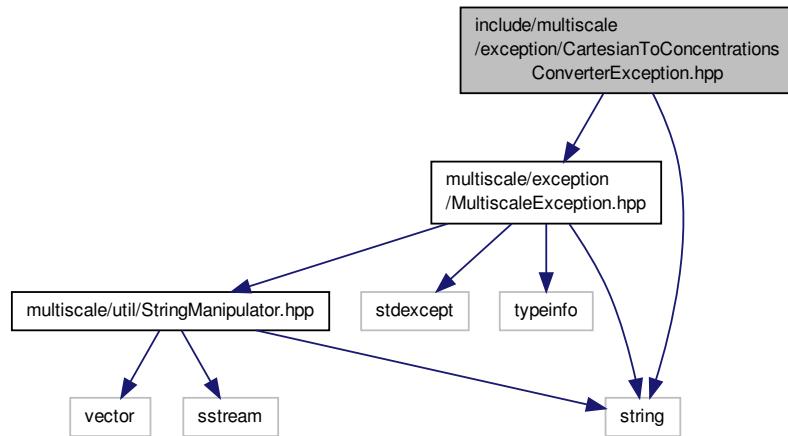

This graph shows which files directly or indirectly include this file:

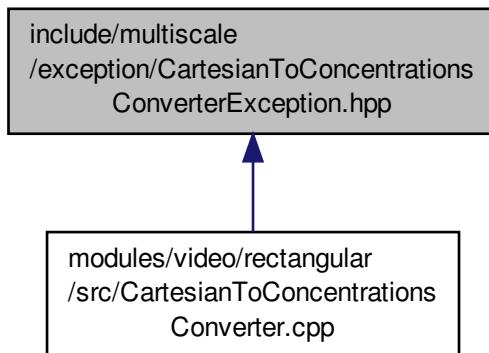

Classes

- class [multiscale::CartesianToConcentrationsConverterException](#)

Exception class for the CartesianToConcentrationsConverter class.


Namespaces

- namespace [multiscale](#)


8.5 include/multiscale/exception/CartesianToPolarConverterException.hpp File Reference

```
#include "multiscale/exception/MultiscaleException.hpp"
#include <string>
```

Include dependency graph for `CartesianToPolarConverterException.hpp`:

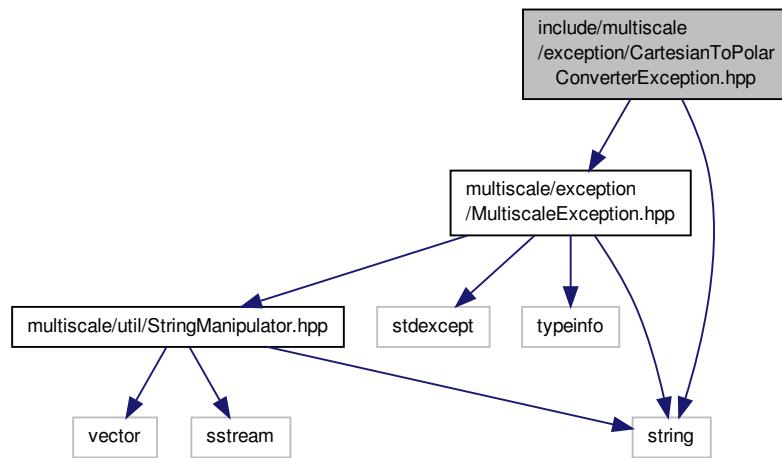

This graph shows which files directly or indirectly include this file:

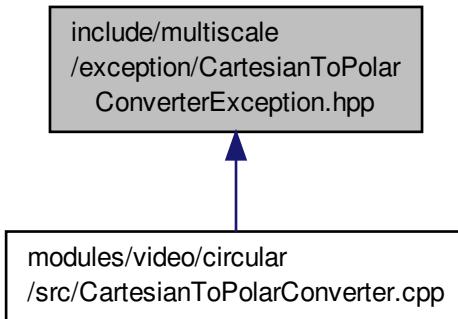

Classes

- class [multiscale::CartesianToPolarConverterException](#)

Exception class for the CartesianToPolarConverter class.


Namespaces

- namespace [multiscale](#)


8.6 include/multiscale/exception/CircularMatFactoryException.hpp File Reference

```
#include "multiscale/exception/MultiscaleException.hpp"
#include <string>
```

Include dependency graph for CircularMatFactoryException.hpp:

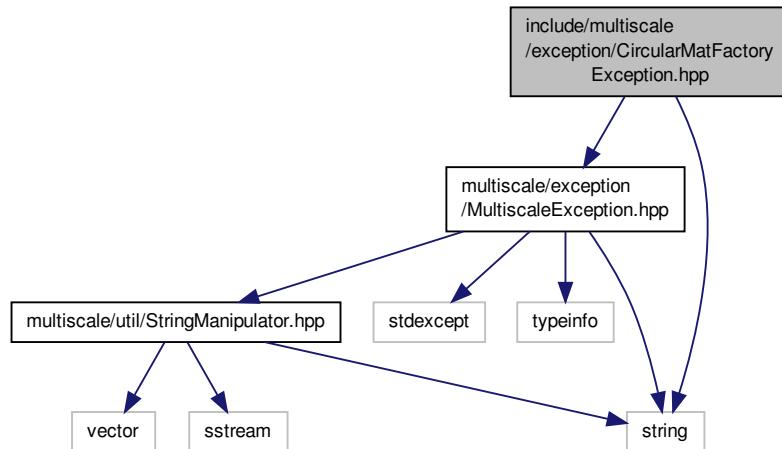

This graph shows which files directly or indirectly include this file:

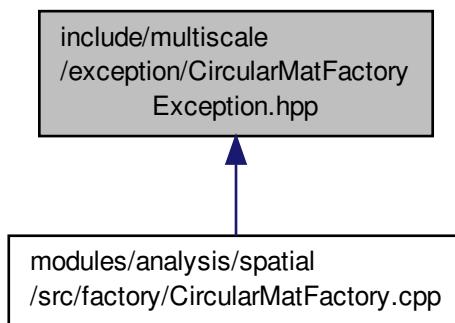

Classes

- class [multiscale::CircularMatFactoryException](#)


Exception class for the CircularMatFactory instances.

Namespaces


- namespace [multiscale](#)

8.7 include/multiscale/exception/ClusterException.hpp File Reference

```
#include "multiscale/exception/MultiscaleException.hpp"
#include <string>
Include dependency graph for ClusterException.hpp:
```

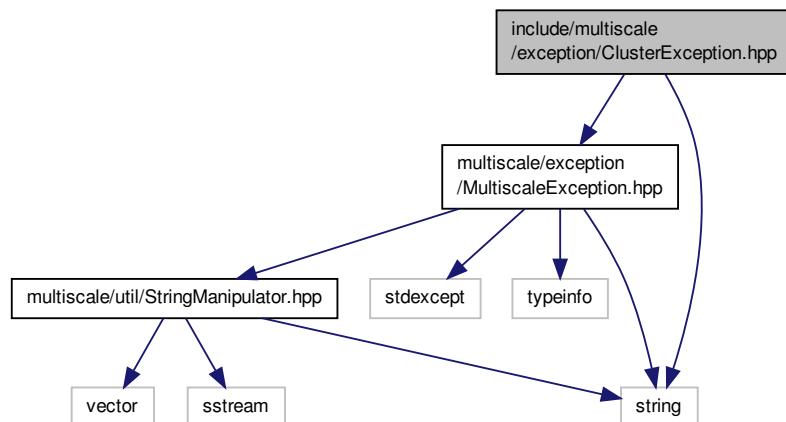

This graph shows which files directly or indirectly include this file:

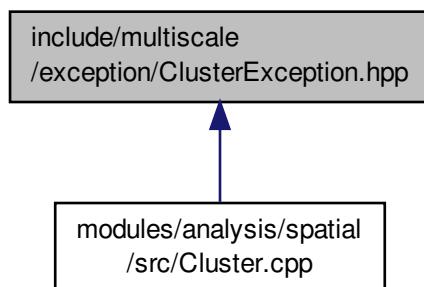

Classes

- class [multiscale::ClusterException](#)


Exception class for the Cluster instances.

Namespaces


- namespace [multiscale](#)

8.8 include/multiscale/exception/DetectorException.hpp File Reference

```
#include "multiscale/exception/MultiscaleException.hpp"
#include <string>
Include dependency graph for DetectorException.hpp:
```

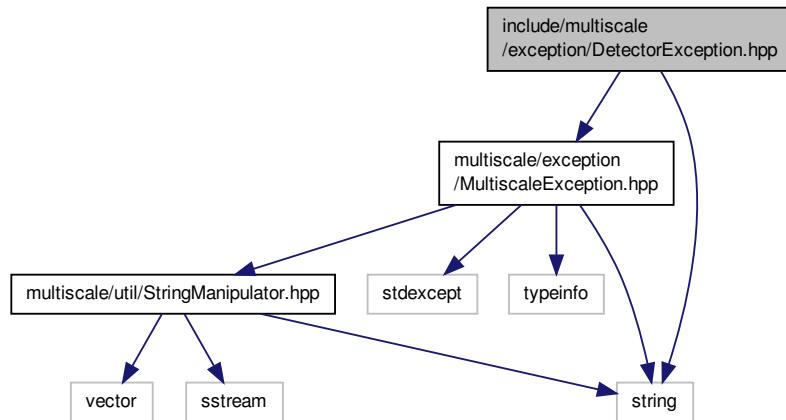

This graph shows which files directly or indirectly include this file:

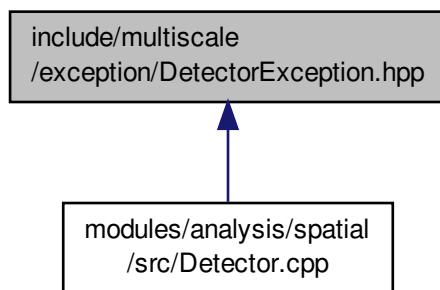

Classes


- class [multiscale::DetectorException](#)
Exception class for the Detector class.

Namespaces


- namespace [multiscale](#)

8.9 include/multiscale/exception/EntityException.hpp File Reference

```
#include "multiscale/exception/MultiscaleException.hpp"
#include <string>
Include dependency graph for EntityException.hpp:
```

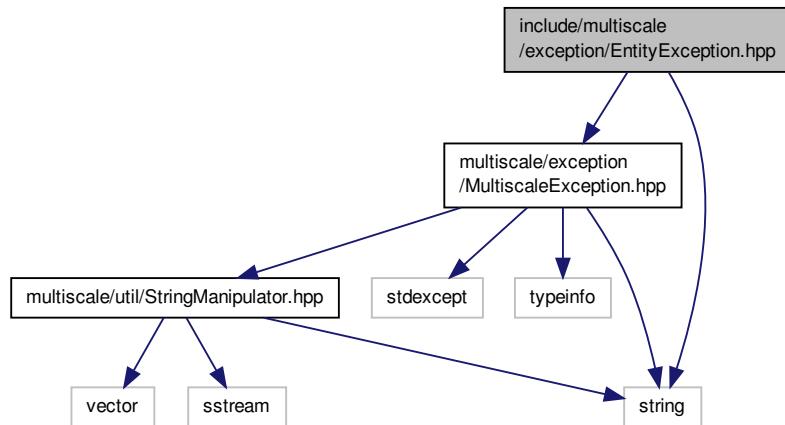

This graph shows which files directly or indirectly include this file:

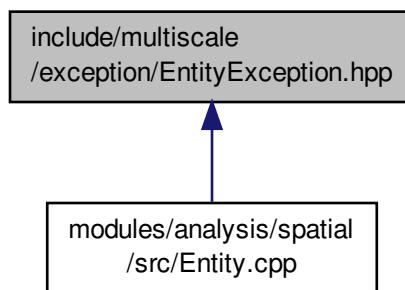

Classes


- class [multiscale::EntityException](#)
Exception class for the Entity instances.

Namespaces


- namespace [multiscale](#)

8.10 include/multiscale/exception/ExceptionHandler.hpp File Reference

```
#include "multiscale/core/Multiscale.hpp"
#include <iostream>
#include <string>
Include dependency graph for ExceptionHandler.hpp:
```

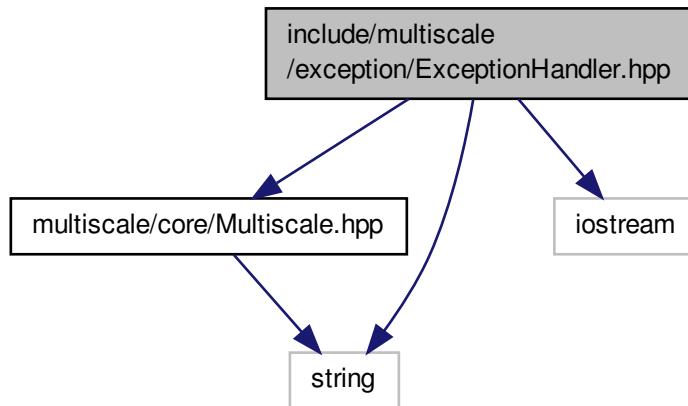

This graph shows which files directly or indirectly include this file:



Classes


- class [multiscale::ExceptionHandler](#)
Exception handler class.

Namespaces


- namespace [multiscale](#)

8.11 include/multiscale/exception/MatFactoryException.hpp File Reference

```
#include "multiscale/exception/MultiscaleException.hpp"
#include <string>
Include dependency graph for MatFactoryException.hpp:
```

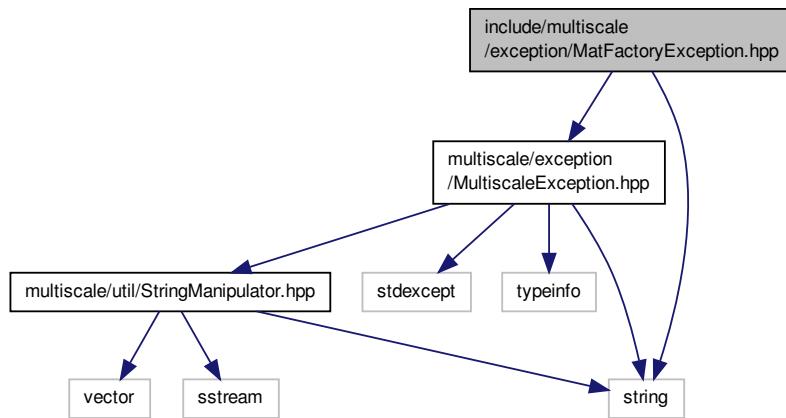

This graph shows which files directly or indirectly include this file:

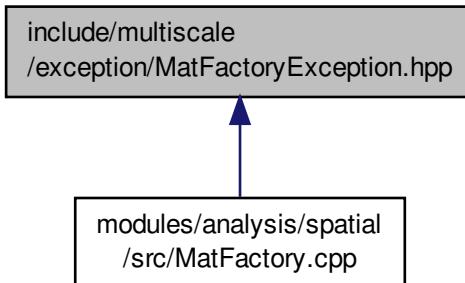

Classes

- class [multiscale::MatFactoryException](#)


Exception class for the MatFactory class.

Namespaces


- namespace [multiscale](#)

8.12 include/multiscale/exception/MinEnclosingTriangleFinderException.hpp File Reference

```
#include "multiscale/exception/MultiscaleException.hpp"
#include <string>
Include dependency graph for MinEnclosingTriangleFinderException.hpp:
```

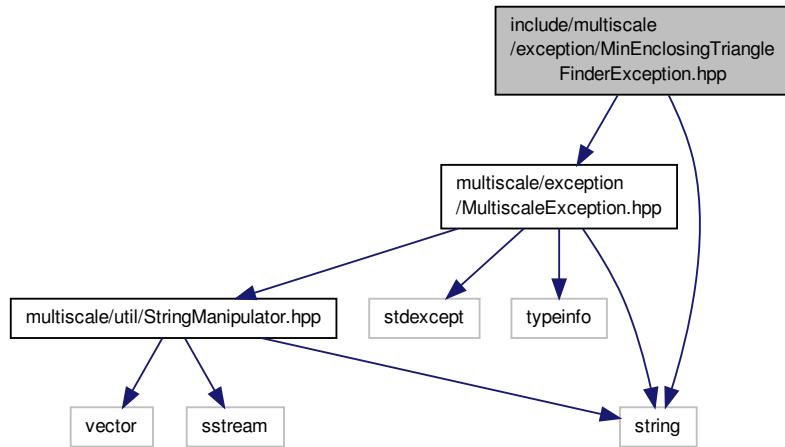

This graph shows which files directly or indirectly include this file:

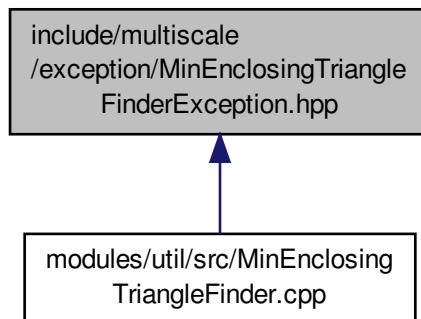

Classes

- class [multiscale::MinEnclosingTriangleFinderException](#)


Exception class for the minimum area enclosing triangle module.

Namespaces

- namespace [multiscale](#)

8.13 include/multiscale/exception/MultiscaleException.hpp File Reference

```
#include "multiscale/util/StringManipulator.hpp"
#include <stdexcept>
#include <string>
#include <typeinfo>
Include dependency graph for MultiscaleException.hpp:
```

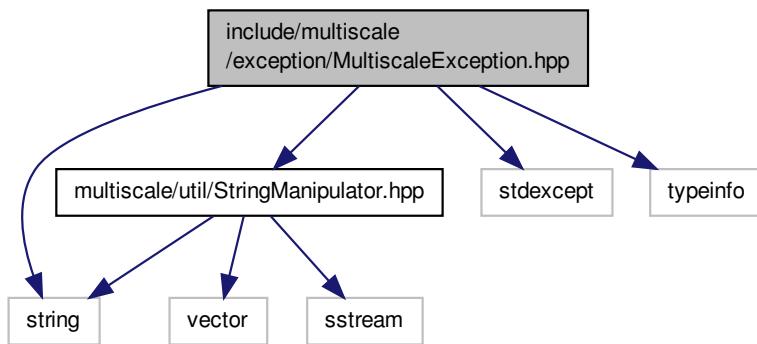

This graph shows which files directly or indirectly include this file:



Classes

- class [multiscale::MultiscaleException](#)

Parent exception class for the project.

Namespaces

- namespace [multiscale](#)

Macros

- `#define MS_throw(ex, msg) (throw ex(__FILE__, __LINE__, msg))`

8.13.1 Macro Definition Documentation

8.13.1.1 `#define MS_THROW(ex, msg) (throw ex(FILE, LINE, msg))`


Definition at line 12 of file MultiscaleException.hpp.

Referenced by multiscale::video::RectangularEntityCsvToInputFilesConverter::computeCoordinate(), multiscale::video::RectangularEntityCsvToInputFilesConverter::computeSimulationTime(), multiscale::video::RectangularCsvToInputFilesConverter::computeSimulationTime(), multiscale::video::PolarCsvToInputFilesConverter::computeSimulationTime(), multiscale::analysis::MatFactory::create(), multiscale::analysis::Detector::detect(), multiscale::MinEnclosingTriangleFinder::find(), multiscale::MinEnclosingTriangleFinder::findVertexCOnSideB(), multiscale::video::RectangularEntityCsvToInputFilesConverter::initInputFile(), multiscale::analysis::MatFactory::initInputFile(), multiscale::video::PolarCsvToInputFilesConverter::initInputFile(), multiscale::video::RectangularCsvToInputFilesConverter::initInputFile(), multiscale::video::PolarCsvToInputFilesConverter::initMaximumConcentration(), multiscale::video::RectangularCsvToInputFilesConverter::initMaximumConcentration(), multiscale::analysis::CircularMatFactory::isValidViewerImage(), multiscale::analysis::RectangularMatFactory::isValidViewerImage(), multiscale::analysis::SimulationClusterDetector::outputClusterShape(), multiscale::analysis::Detector::outputResultsToCsvFile(), multiscale::analysis::CircularMatFactory::processConcentrations(), multiscale::analysis::RectangularMatFactory::processConcentrations(), multiscale::video::CartesianToConcentrationsConverter::readConcentrations(), multiscale::video::CartesianToPolarConverter::readConcentrations(), multiscale::video::CartesianToConcentrationsConverter::readHeaderLine(), multiscale::video::CartesianToPolarConverter::readHeaderLine(), multiscale::video::CartesianToConcentrationsConverter::readInputData(), multiscale::video::CartesianToPolarConverter::readInputData(), multiscale::MinEnclosingTriangleFinder::updateSideB(), multiscale::video::RectangularEntityCsvToInputFilesConverter::validateCoordinate(), multiscale::video::RectangularEntityCsvToInputFilesConverter::validateEntitiesGrid(), multiscale::video::RectangularEntityCsvToInputFilesConverter::validateInput(), multiscale::video::PolarCsvToInputFilesConverter::validateInput(), multiscale::video::RectangularCsvToInputFilesConverter::validateInput(), multiscale::video::RectangularEntityCsvToInputFilesConverter::validateInputLine(), multiscale::video::PolarCsvToInputFilesConverter::validateInputLine(), multiscale::video::RectangularCsvToInputFilesConverter::validateInputLine(), multiscale::analysis::Region::validateInputValues(), multiscale::analysis::Entity::validateInputValues(), multiscale::video::RectangularEntityCsvToInputFilesConverter::validateMaxNrOfEntitiesPerPosition(), multiscale::analysis::Cluster::validateOriginDependentValues(), multiscale::video::PolarCsvToInputFilesConverter::validateSelectedConcentrationIndex(), multiscale::video::RectangularCsvToInputFilesConverter::validateSelectedConcentrationIndex(), and multiscale::video::RectangularEntityCsvToInputFilesConverter::validateSimulationTime().


8.14 include/multiscale/exception/PolarCsvToInputFilesConverterException.hpp File Reference

```
#include "multiscale/exception/MultiscaleException.hpp"
#include <string>
```

Include dependency graph for `PolarCsvToInputFilesConverterException.hpp`:

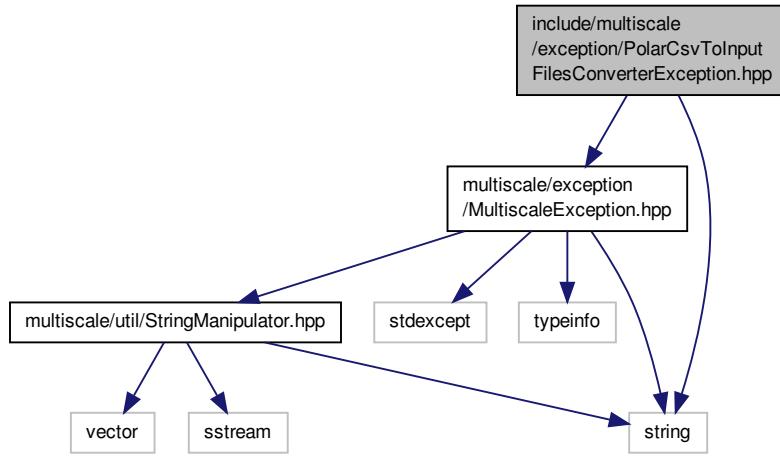

This graph shows which files directly or indirectly include this file:

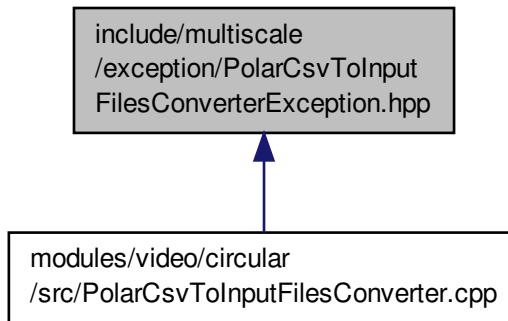

Classes


- class [multiscale::PolarCsvToInputFilesConverterException](#)
Exception class for the `PolarCsvToInputFilesConverter` class.

Namespaces


- namespace [multiscale](#)

8.15 include/multiscale/exception/RectangularCsvToInputFilesConverterException.hpp File Reference

```
#include "multiscale/exception/MultiscaleException.hpp"
#include <string>
Include dependency graph for RectangularCsvToInputFilesConverterException.hpp:
```

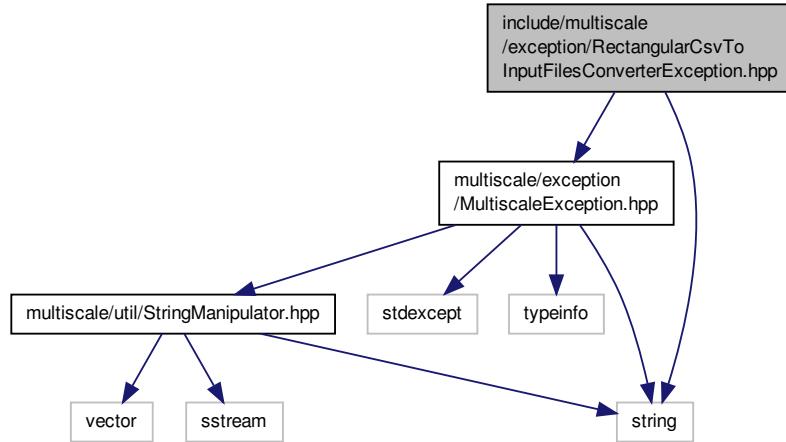

This graph shows which files directly or indirectly include this file:

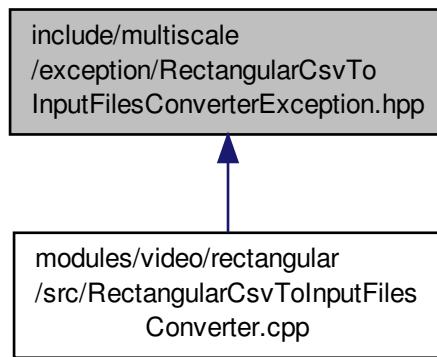

Classes

- class [multiscale::RectangularCsvToInputFilesConverterException](#)

Exception class for the RectangularCsvToInputFilesConverter class.

Namespaces


- namespace [multiscale](#)

8.16 include/multiscale/exception/RectangularEntityCsvToInputFilesConverterException.hpp File Reference


```
#include "multiscale/exception/MultiscaleException.hpp"
```

```
#include <string>
```

```
Include dependency graph for RectangularEntityCsvToInputFilesConverterException.hpp:
```

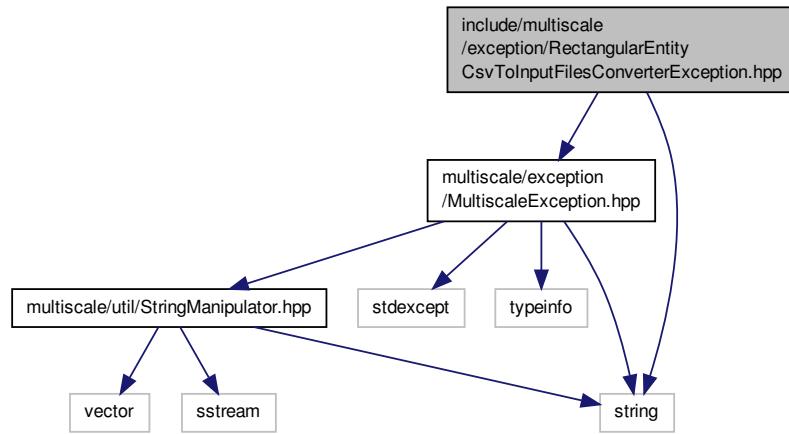

This graph shows which files directly or indirectly include this file:

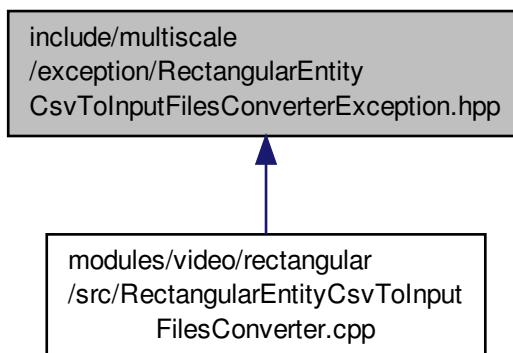

Classes

- class [multiscale::RectangularEntityCsvToInputFilesConverterException](#)

Exception class for the RectangularEntityCsvToInputFilesConverter class.


Namespaces

- namespace [multiscale](#)


8.17 include/multiscale/exception/RectangularMatFactoryException.hpp File Reference

```
#include "multiscale/exception/MultiscaleException.hpp"
#include <string>
```

Include dependency graph for RectangularMatFactoryException.hpp:

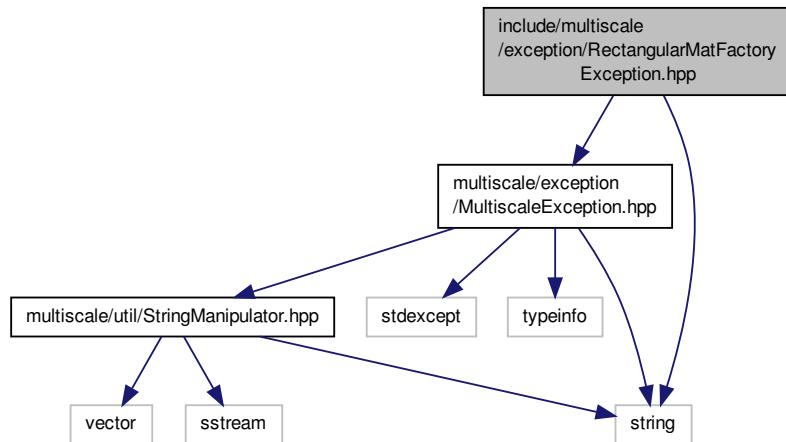

This graph shows which files directly or indirectly include this file:

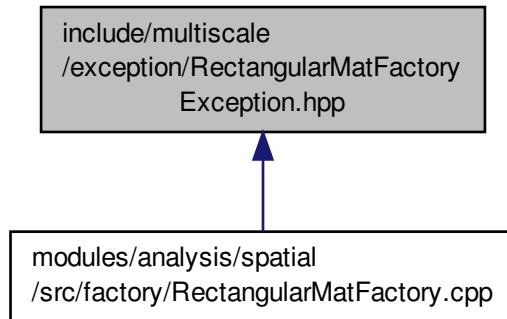

Classes


- class [multiscale::RectangularMatFactoryException](#)
Exception class for the RectangularMatFactory instances.

Namespaces


- namespace [multiscale](#)

8.18 include/multiscale/exception/RegionException.hpp File Reference

```
#include "multiscale/exception/MultiscaleException.hpp"
#include <string>
Include dependency graph for RegionException.hpp:
```

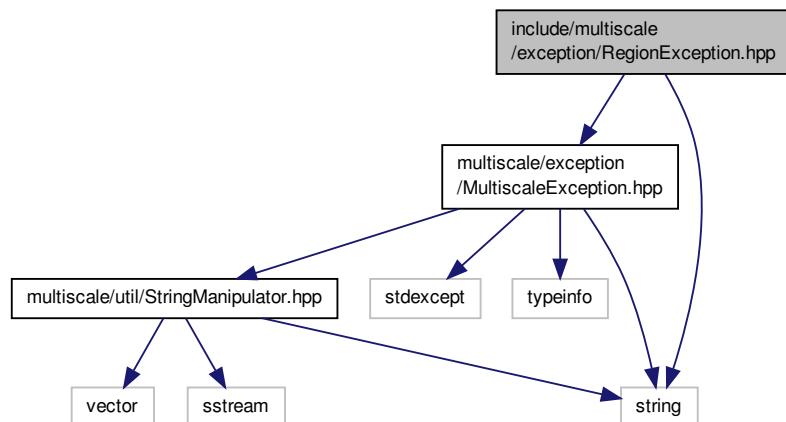

This graph shows which files directly or indirectly include this file:

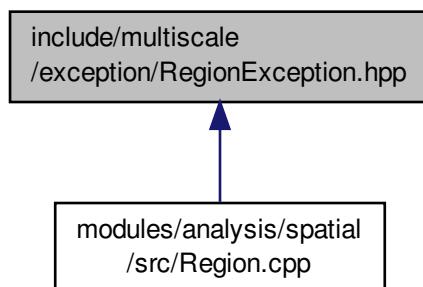

Classes

- class [multiscale::RegionException](#)

Exception class for the Region instances.


Namespaces

- namespace [multiscale](#)


8.19 include/multiscale/exception/SimulationClusterDetectorException.hpp File Reference

```
#include "multiscale/exception/MultiscaleException.hpp"
#include <string>
```

Include dependency graph for SimulationClusterDetectorException.hpp:

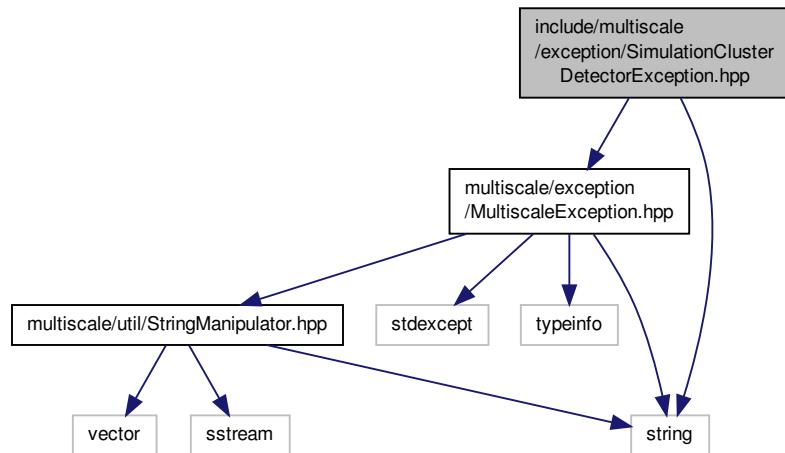

This graph shows which files directly or indirectly include this file:

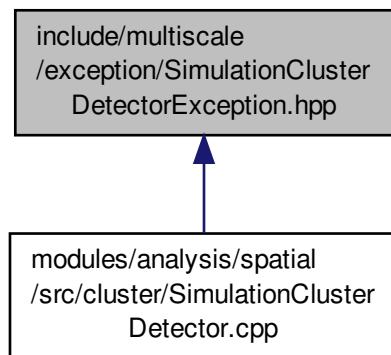

Classes

- class [multiscale::SimulationClusterDetectorException](#)
Exception class for the SimulationClusterDetector instances.

Namespaces

- namespace [multiscale](#)


8.20 modules/analysis/spatial/include/multiscale/analysis/spatial/CircularityMeasure.hpp

File Reference


```

#include "opencv2/imgproc/imgproc.hpp"
#include "opencv2/highgui/highgui.hpp"
#include <vector>
  
```

Include dependency graph for CircularityMeasure.hpp:

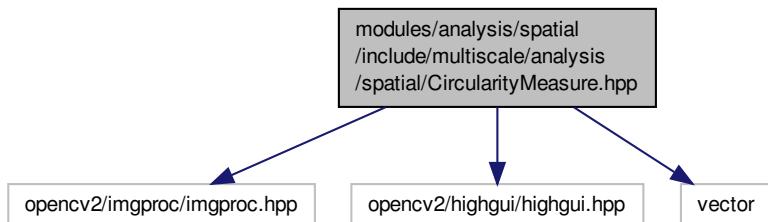

This graph shows which files directly or indirectly include this file:

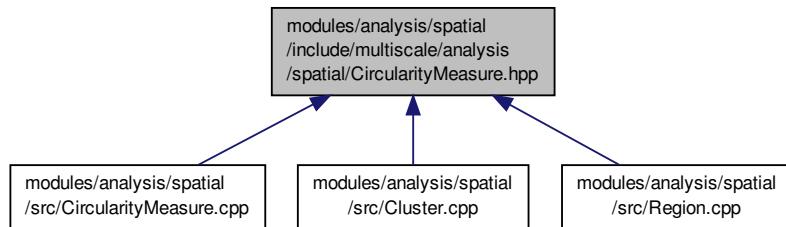

Classes

- class [multiscale::analysis::CircularityMeasure](#)

Class for computing the circularity measure for the given collection of points.

Namespaces


- namespace [multiscale](#)
- namespace [multiscale::analysis](#)

8.21 modules/analysis/spatial/include/multiscale/analysis/spatial/Cluster.hpp File Reference


```

#include "opencv2/imgproc/imgproc.hpp"
#include "multiscale/analysis/spatial/Entity.hpp"
#include "multiscale/analysis/spatial/Shape2D.hpp"
#include "multiscale/analysis/spatial/SpatialCollection2D.hpp"
#include "multiscale/util/Geometry2D.hpp"
#include <vector>
  
```

Include dependency graph for Cluster.hpp:

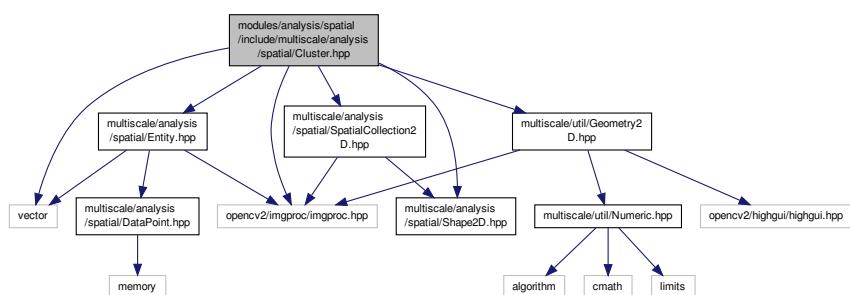

This graph shows which files directly or indirectly include this file:

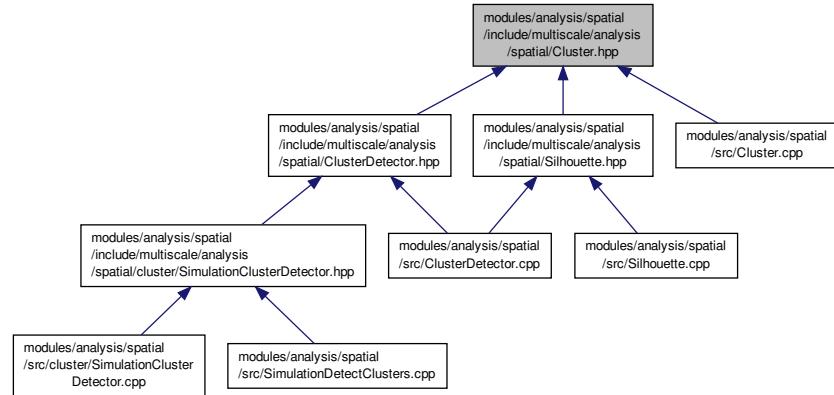

Classes


- class [multiscale::analysis::Cluster](#)
Class for representing a cluster of entities in an image.

Namespaces


- namespace multiscale
 - namespace multiscale::analysis

8.22 [modules/analysis/spatial/include/multiscale/analysis/spatial/cluster/Simulation-ClusterDetector.hpp](#) File Reference

```
#include "multiscale/analysis/spatial/ClusterDetector.hpp"
#include "opencv2/imgproc/imgproc.hpp"
#include "opencv2/highgui/highgui.hpp"
Include dependency graph for SimulationClusterDetector.hpp:
```

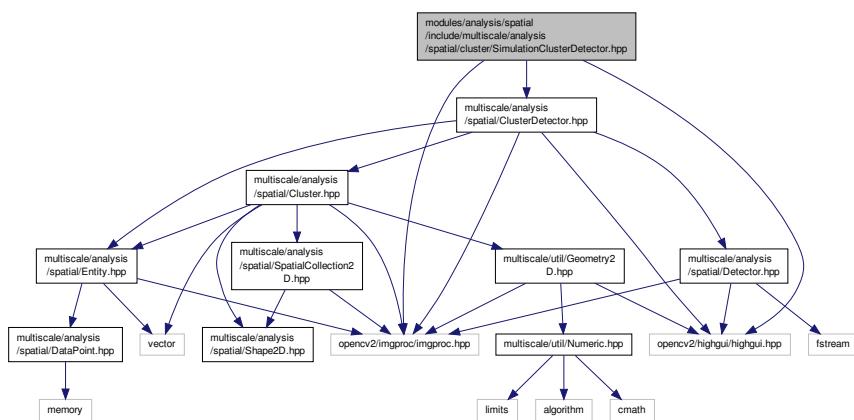

This graph shows which files directly or indirectly include this file:

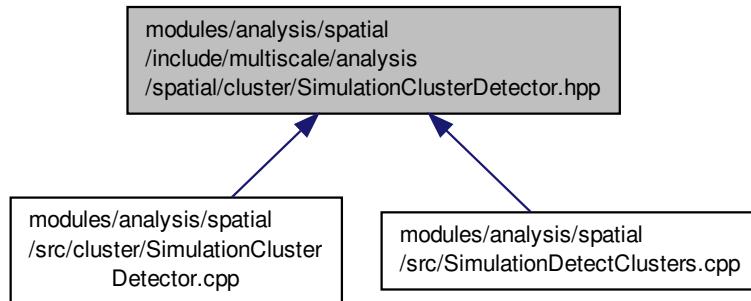

Classes

- class [multiscale::analysis::SimulationClusterDetector](#)
Class for detecting clusters in 2D images obtained from simulations.

Namespaces


- namespace [multiscale](#)
- namespace [multiscale::analysis](#)

8.23 modules/analysis/spatial/include/multiscale/analysis/spatial/ClusterDetector.hpp File Reference


```

#include "multiscale/analysis/spatial/Cluster.hpp"
#include "multiscale/analysis/spatial/Detector.hpp"
#include "multiscale/analysis/spatial/Entity.hpp"
#include "opencv2/imgproc/imgproc.hpp"
#include "opencv2/highgui/highgui.hpp"
  
```

Include dependency graph for `ClusterDetector.hpp`:

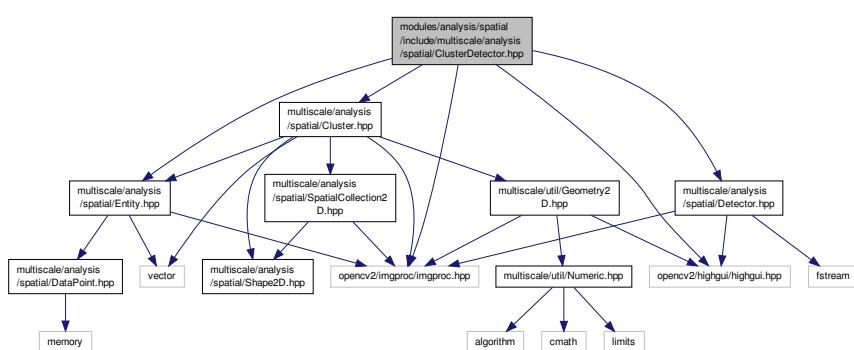

This graph shows which files directly or indirectly include this file:

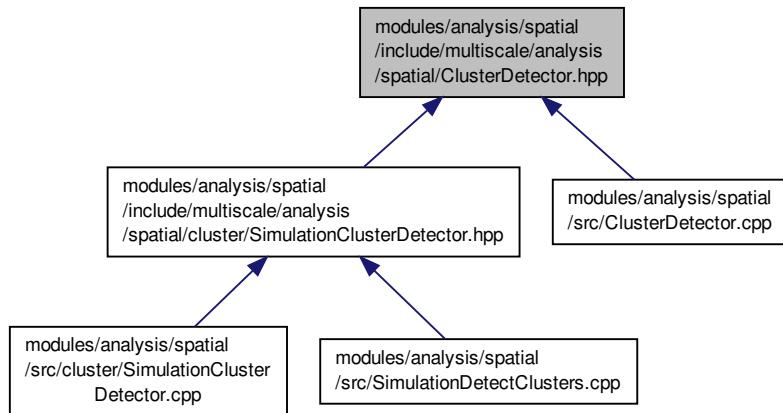

Classes


- class [multiscale::analysis::ClusterDetector](#)
Class for detecting clusters in 2D images.

Namespaces


- namespace [multiscale](#)
- namespace [multiscale::analysis](#)

8.24 modules/analysis/spatial/include/multiscale/analysis/spatial/DataPoint.hpp File Reference

```
#include <memory>
Include dependency graph for DataPoint.hpp:
```

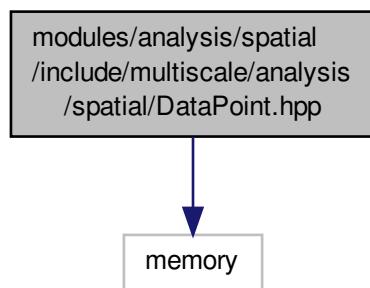

This graph shows which files directly or indirectly include this file:

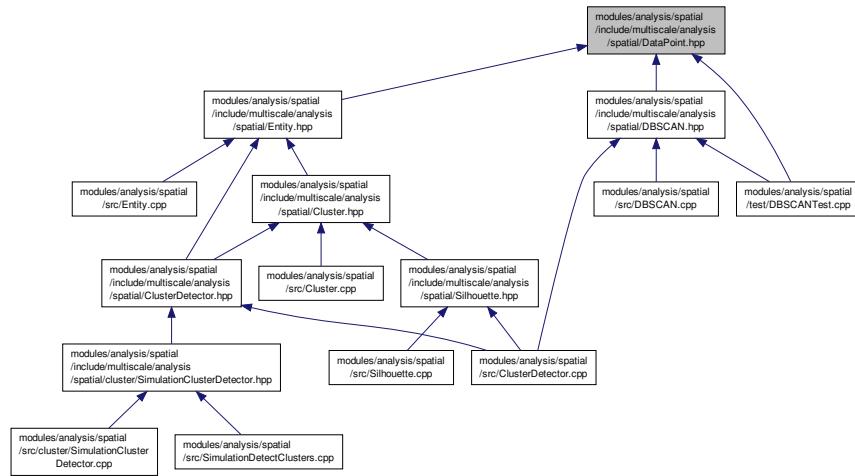

Classes

- class [multiscale::analysis::DataPoint](#)

Class for representing a data point.


Namespaces

- namespace [multiscale](#)
- namespace [multiscale::analysis](#)


8.25 modules/analysis/spatial/include/multiscale/analysis/spatial/DBSCAN.hpp File Reference

```
#include "multiscale/analysis/spatial/DataPoint.hpp"
#include <memory>
#include <vector>
```

Include dependency graph for DBSCAN.hpp:

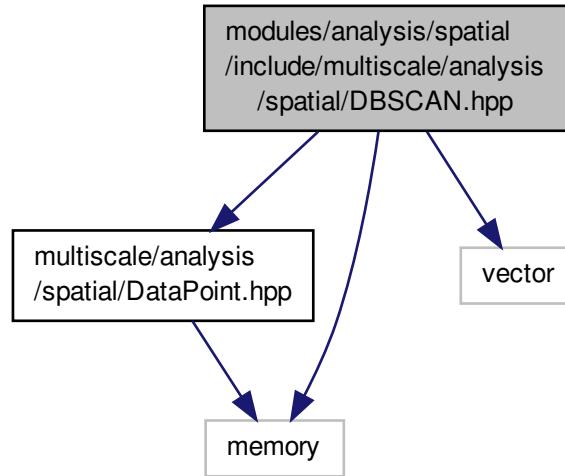

This graph shows which files directly or indirectly include this file:

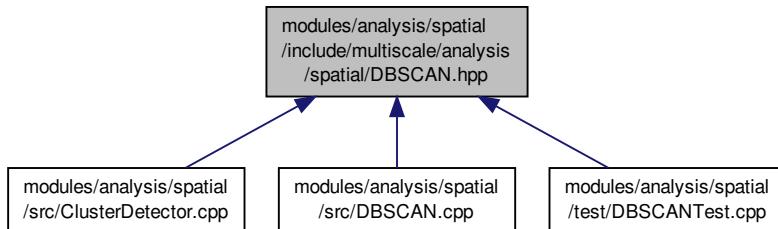

Classes

- class [multiscale::analysis::DBSCAN](#)


Class which implements an improved version of the [DBSCAN](#) algorithm.

Namespaces


- namespace [multiscale](#)
- namespace [multiscale::analysis](#)

8.26 modules/analysis/spatial/include/multiscale/analysis/spatial/Detector.hpp File Reference

```
#include "opencv2/imgproc/imgproc.hpp"
#include "opencv2/highgui/highgui.hpp"
#include <fstream>
Include dependency graph for Detector.hpp:
```

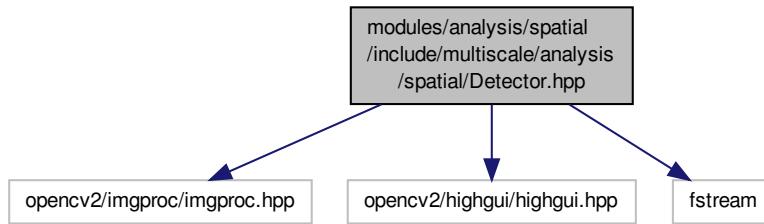

This graph shows which files directly or indirectly include this file:

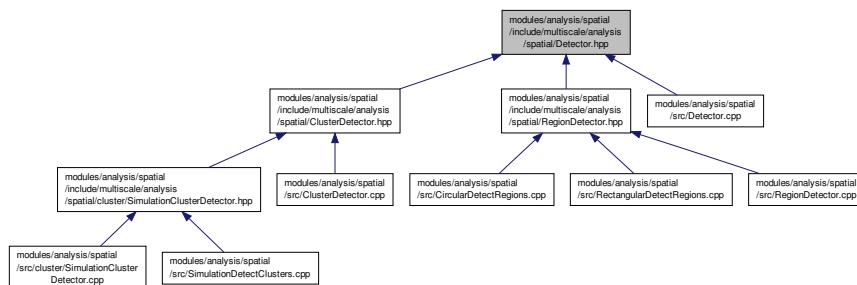

Classes

- class [multiscale::analysis::Detector](#)
Abstract class for detecting entities of interest in images.


Namespaces

- namespace [multiscale](#)
- namespace [multiscale::analysis](#)


8.27 modules/analysis/spatial/include/multiscale/analysis/spatial/Entity.hpp File Reference

```
#include "multiscale/analysis/spatial/DataPoint.hpp"
#include "opencv2/imgproc/imgproc.hpp"
#include <vector>
```

Include dependency graph for Entity.hpp:

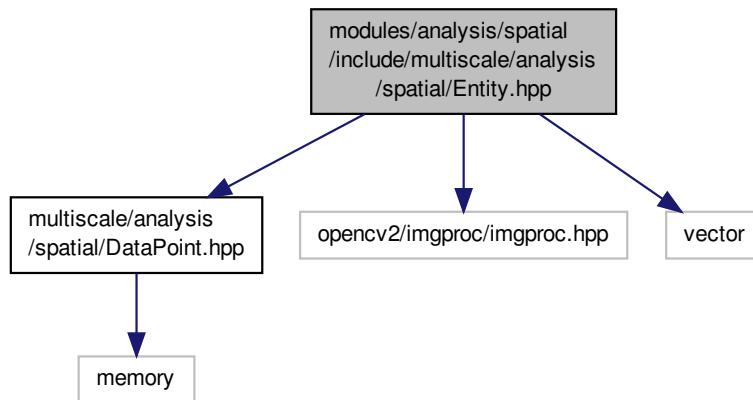

This graph shows which files directly or indirectly include this file:

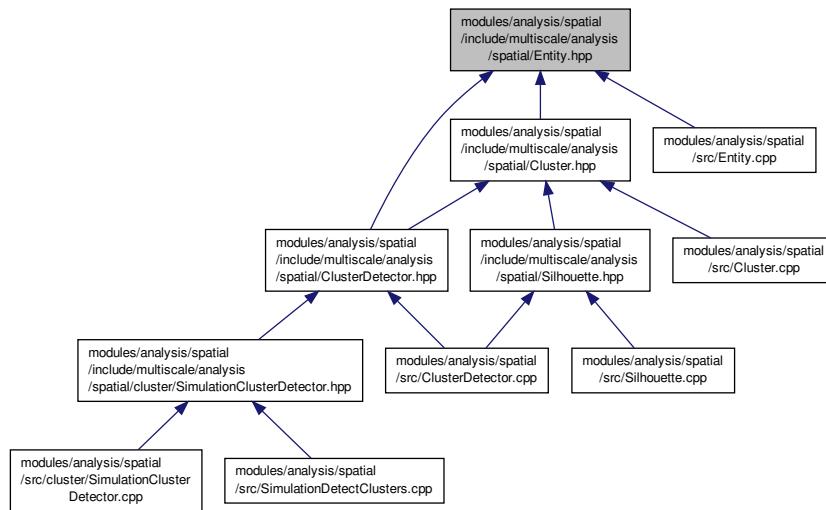

Classes

- class [multiscale::analysis::Entity](#)


Class for representing an entity in an image (e.g. cell, organism etc.)

Namespaces


- namespace [multiscale](#)
- namespace [multiscale::analysis](#)

8.28 modules/analysis/spatial/include/multiscale/analysis/spatial/factory/CircularMatFactory.hpp File Reference

```
#include "multiscale/analysis/spatial/MatFactory.hpp"  
Include dependency graph for CircularMatFactory.hpp:
```

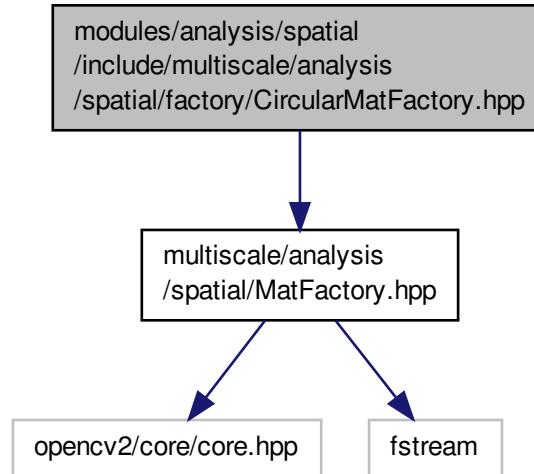

This graph shows which files directly or indirectly include this file:

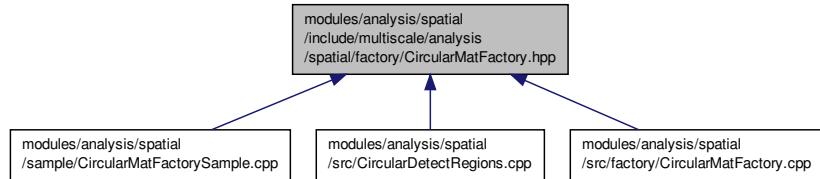

Classes


- class [multiscale::analysis::CircularMatFactory](#)
Class for creating a Mat object considering a circular grid.

Namespaces


- namespace [multiscale](#)
- namespace [multiscale::analysis](#)

8.29 modules/analysis/spatial/include/multiscale/analysis/spatial/factory/RectangularMatFactory.hpp File Reference

```
#include "multiscale/analysis/spatial/MatFactory.hpp"
Include dependency graph for RectangularMatFactory.hpp:
```

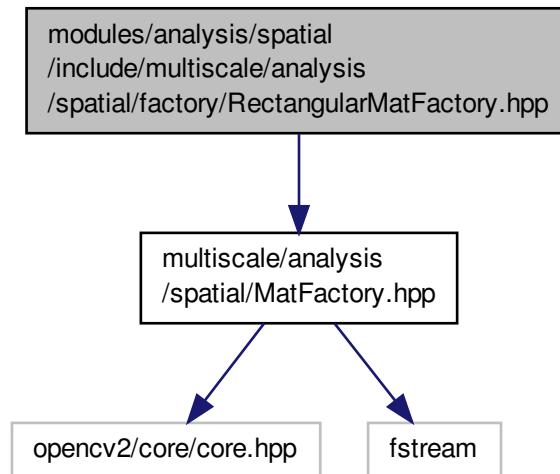

This graph shows which files directly or indirectly include this file:



Classes

- class [multiscale::analysis::RectangularMatFactory](#)
Class for creating a Mat object considering a rectangular grid.


Namespaces

- namespace [multiscale](#)
- namespace [multiscale::analysis](#)


8.30 modules/analysis/spatial/include/multiscale/analysis/spatial/MatFactory.hpp File Reference

```
#include "opencv2/core/core.hpp"
```

```
#include <fstream>
Include dependency graph for MatFactory.hpp:
```

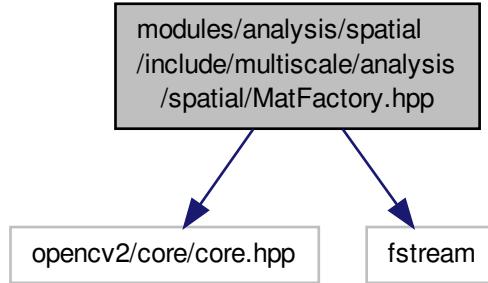

This graph shows which files directly or indirectly include this file:



Classes

- class [multiscale::analysis::MatFactory](#)

Class for creating a Mat object.


Namespaces

- namespace [multiscale](#)
- namespace [multiscale::analysis](#)


8.31 modules/analysis/spatial/include/multiscale/analysis/spatial/Region.hpp File Reference

```
#include "multiscale/analysis/spatial/SpatialCollection2D.hpp"
#include "opencv2/imgproc/imgproc.hpp"
#include <vector>
```

Include dependency graph for Region.hpp:

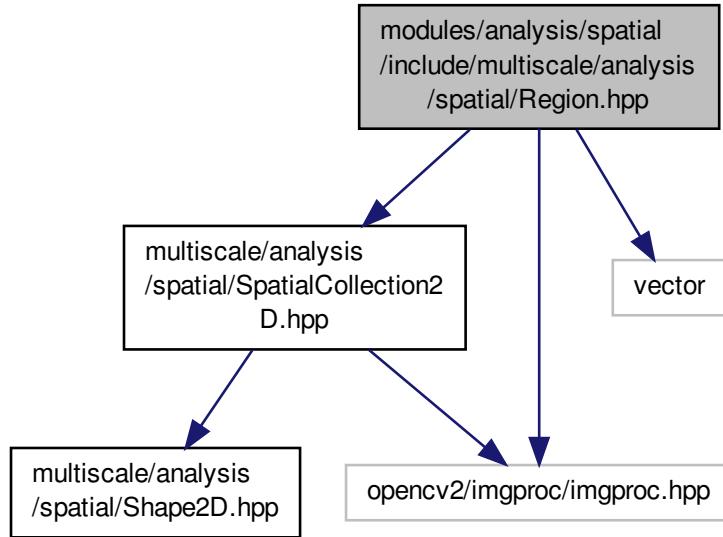

This graph shows which files directly or indirectly include this file:

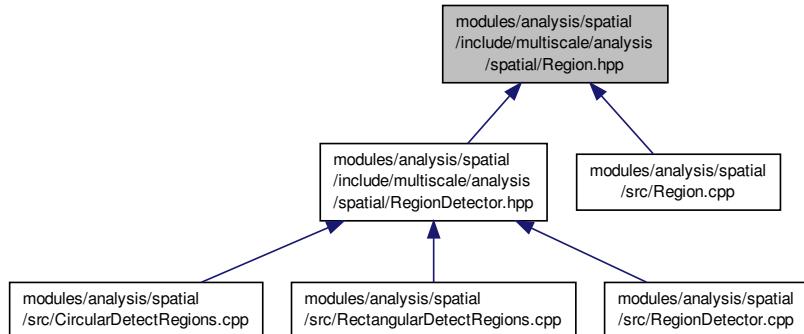

Classes

- class [multiscale::analysis::Region](#)


Class for representing a region.

Namespaces


- namespace [multiscale](#)
- namespace [multiscale::analysis](#)

8.32 modules/analysis/spatial/include/multiscale/analysis/spatial/RegionDetector.hpp File Reference

```
#include "multiscale/analysis/spatial/Detector.hpp"
#include "multiscale/analysis/spatial/Region.hpp"
#include "opencv2/imgproc/imgproc.hpp"
#include "opencv2/highgui/highgui.hpp"
Include dependency graph for RegionDetector.hpp:
```

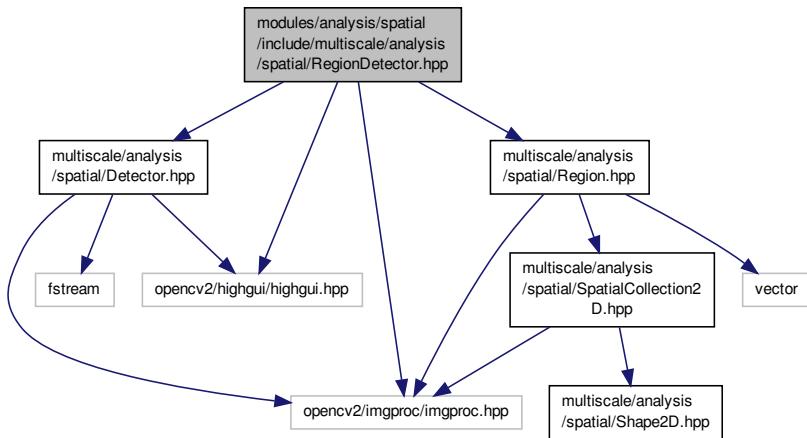

This graph shows which files directly or indirectly include this file:

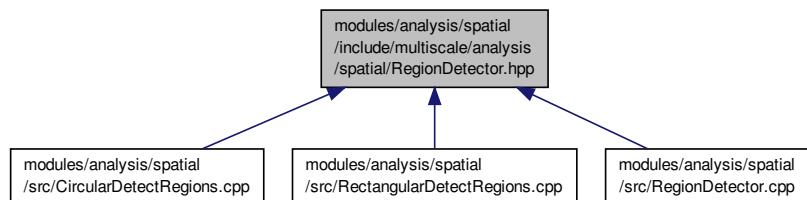

Classes

- class [multiscale::analysis::RegionDetector](#)
Class for detecting regions of high intensity in grayscale images.

Namespaces

- namespace [multiscale](#)
- namespace [multiscale::analysis](#)

Variables

- const int **ENCLOSING_RECT_VERTICES** = 4

8.32.1 Variable Documentation


8.32.1.1 const int ENCLOSING_RECT_VERTICES = 4

Definition at line 13 of file RegionDetector.hpp.

Referenced by convertVertices().

8.33 modules/analysis/spatial/include/multiscale/analysis/spatial/Shape2D.hpp File Reference

This graph shows which files directly or indirectly include this file:

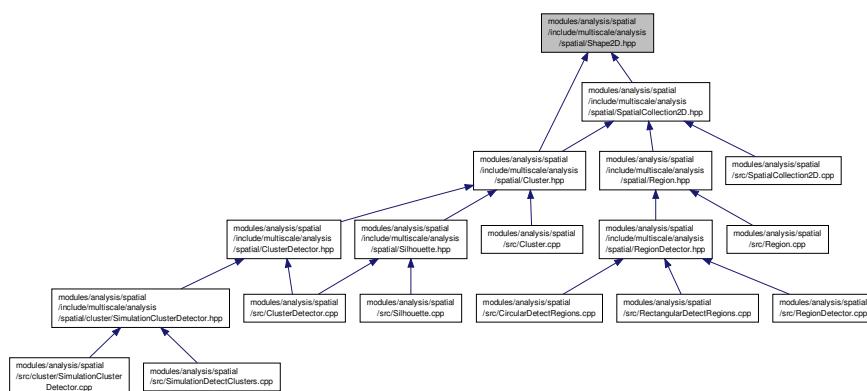

Namespaces

- namespace **multiscale**
- namespace **multiscale::analysis**


Enumerations

- enum **multiscale::analysis::Shape2D** { **multiscale::analysis::Triangle** = 1, **multiscale::analysis::Rectangle** = 2, **multiscale::analysis::Circle** = 3, **multiscale::analysis::Undefined** = 4 }


Enumeration for determining the type of a 2D shape.

8.34 modules/analysis/spatial/include/multiscale/analysis/spatial/Silhouette.hpp File Reference

```
#include "multiscale/analysis/spatial/Cluster.hpp"
Include dependency graph for Silhouette.hpp:
```

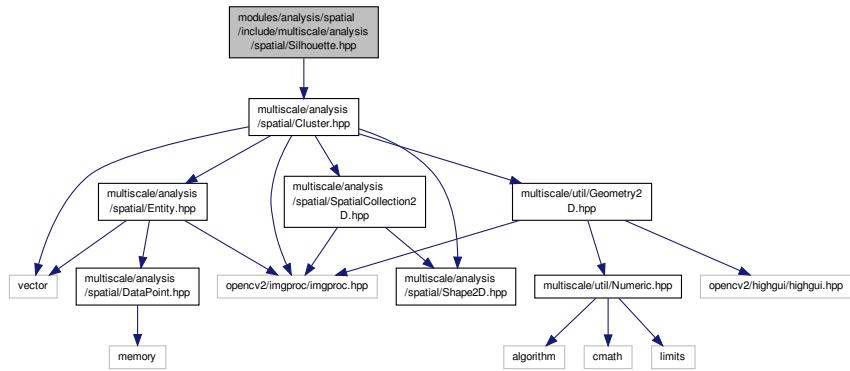

This graph shows which files directly or indirectly include this file:

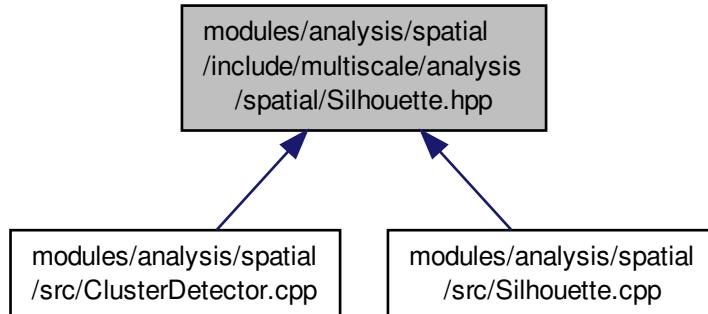

Classes


- class [multiscale::analysis::Silhouette](#)
Class for computing the "Silhouette" clustering index.

Namespaces


- namespace [multiscale](#)
- namespace [multiscale::analysis](#)

8.35 modules/analysis/spatial/include/multiscale/analysis/spatial/SpatialCollection2D.hpp File Reference

```
#include "multiscale/analysis/spatial/Shape2D.hpp"
#include "opencv2/imgproc/imgproc.hpp"
Include dependency graph for SpatialCollection2D.hpp:
```

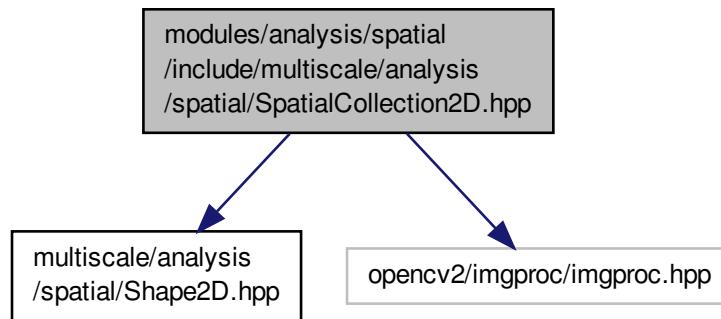

This graph shows which files directly or indirectly include this file:

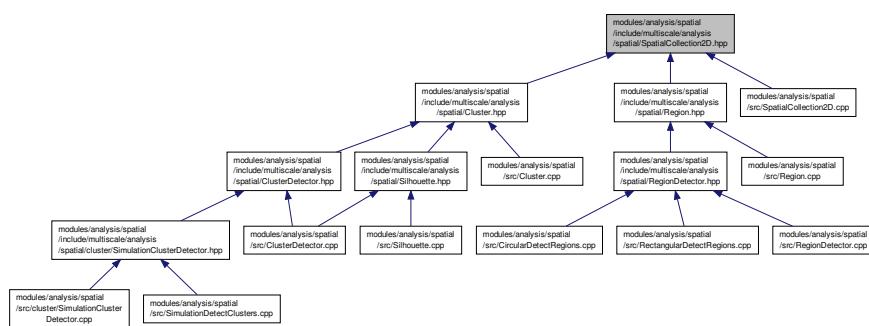

Classes

- class [multiscale::analysis::SpatialCollection2D](#)


Class for representing a collection of objects in 2D space.

Namespaces

- namespace [multiscale](#)
- namespace [multiscale::analysis](#)

8.36 modules/analysis/spatial/sample/CircularMatFactorySample.cpp File Reference

```
#include "multiscale/analysis/spatial/factory/CircularMatFactory.hpp"
#include <iostream>
#include <opencv2/core/core.hpp>
#include <opencv2/highgui/highgui.hpp>
Include dependency graph for CircularMatFactorySample.cpp:
```

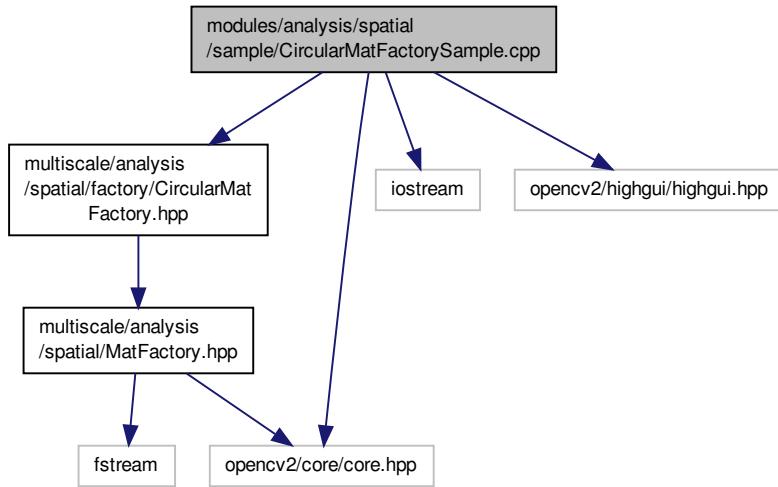

Functions

- `int main ()`


8.36.1 Function Documentation

8.36.1.1 `int main ()`

Definition at line 13 of file `CircularMatFactorySample.cpp`.


References `multiscale::analysis::CircularMatFactory::createFromViewerImage()`, and `multiscale::analysis::CircularMatFactory::maxColourBarIntensityFromViewerImage()`.

Here is the call graph for this function:

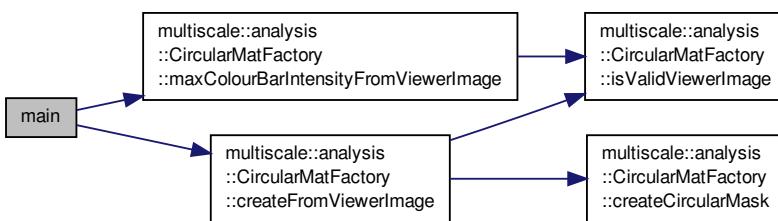

8.37 modules/analysis/spatial/sample/LexicographicIteratorSample.cpp File Reference

```
#include "multiscale/util/iterator/LexicographicNumberIterator.hpp"
#include <iostream>
Include dependency graph for LexicographicIteratorSample.cpp:
```

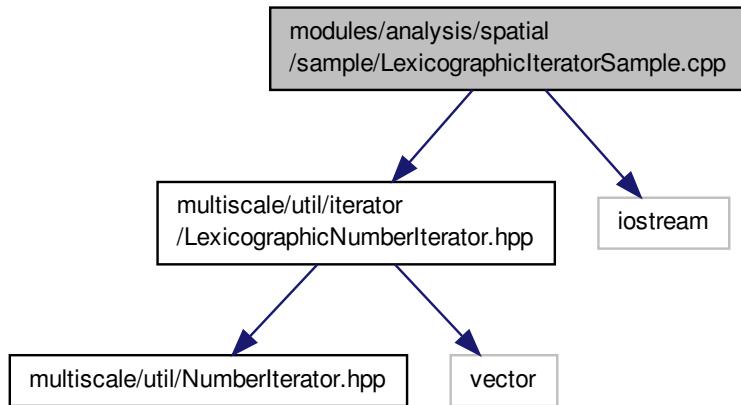

Functions

- `int main ()`


8.37.1 Function Documentation

8.37.1.1 `int main ()`

Definition at line 8 of file `LexicographicIteratorSample.cpp`.


References `multiscale::NumberIterator::hasNext()`, and `multiscale::LexicographicNumberIterator::number()`.

Here is the call graph for this function:

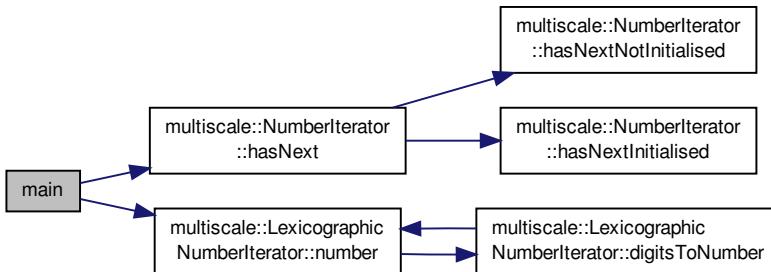

8.38 modules/analysis/spatial/sample/RectangularMatFactorySample.cpp File Reference

```
#include "multiscale/analysis/spatial/factory/RectangularMatFactory.hpp"
#include <iostream>
#include <opencv2/core/core.hpp>
#include <opencv2/highgui/highgui.hpp>
Include dependency graph for RectangularMatFactorySample.cpp:
```

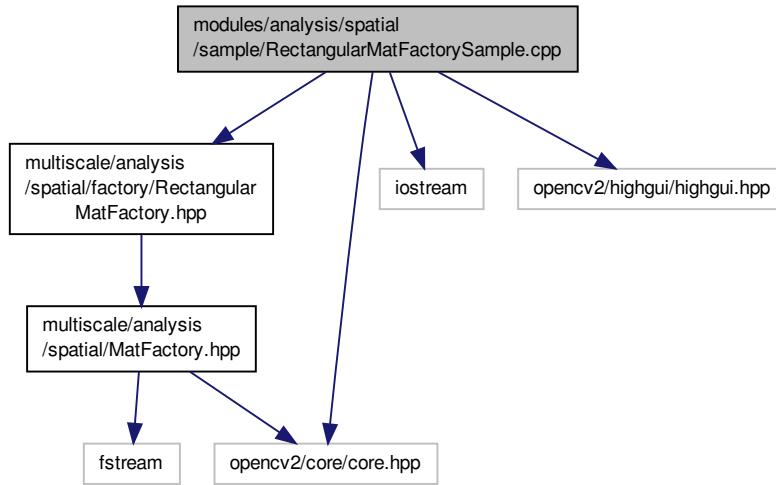

Functions

- `int main ()`


8.38.1 Function Documentation

8.38.1.1 `int main ()`

Definition at line 13 of file `RectangularMatFactorySample.cpp`.


References `multiscale::analysis::RectangularMatFactory::createFromViewerImage()`, and `multiscale::analysis::RectangularMatFactory::maxColourBarIntensityFromViewerImage()`.

Here is the call graph for this function:

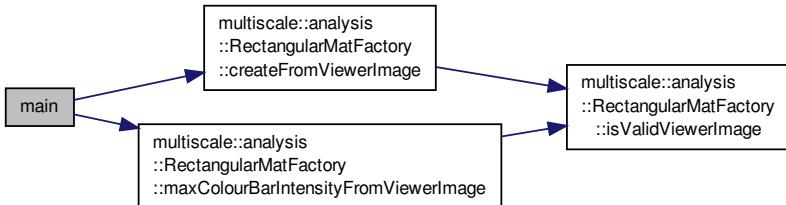

8.39 modules/analysis/spatial/src/CircularDetectRegions.cpp File Reference

```
#include "multiscale/core/Multiscale.hpp"
#include "multiscale/analysis/spatial/RegionDetector.hpp"
#include "multiscale/analysis/spatial/factory/CircularMatFactory.hpp"
#include "multiscale/exception/ExceptionHandler.hpp"
#include <boost/property_tree/ptree.hpp>
#include <boost/property_tree/xml_parser.hpp>
#include <boost/program_options.hpp>
#include <iostream>
Include dependency graph for CircularDetectRegions.cpp:
```

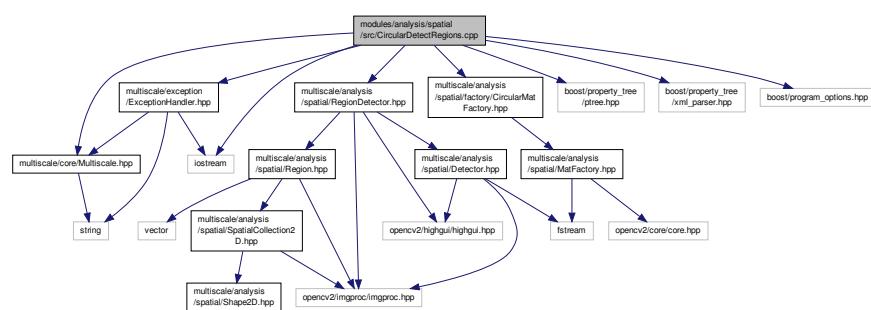

Functions

- `po::variables_map initArgumentsConfig (po::options_description &usageDescription, int argc, char **argv)`
- `void printHelpInformation (const po::variables_map &vm, const po::options_description &usageDescription)`
- `void printWrongParameters ()`
- `bool areValidParameters (string &inputFilepath, string &outputFilename, bool &debugFlag, int argc, char **argv)`
- `void loadDetectorParameterValues (RegionDetector &detector)`
- `void saveDetectorParameterValues (RegionDetector &detector)`
- `void loadDetectorParameterValues (RegionDetector &detector, bool debugMode)`
- `void saveDetectorParameterValues (RegionDetector &detector, bool debugMode)`
- `int main (int argc, char **argv)`

Variables

- `const string CONFIG_FILE = "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/analysis/spatial/circular_region_detector.xml"`
- `const string LABEL_ROOT_COMMENT = "<xmlcomment>"`
- `const string LABEL_ALPHA = "detector.alpha"`
- `const string LABEL_BETA = "detector.beta"`
- `const string LABEL_BLUR_KERNEL_SIZE = "detector.blurKernelSize"`
- `const string LABEL_MORPHOLOGICAL_CLOSE_ITERATIONS = "detector.morphologicalCloselterations"`
- `const string LABEL_EPSILON = "detector.epsilon"`
- `const string LABEL_REGION_AREA_THRESH = "detector.regionAreaThresh"`
- `const string LABEL_THRESHOLD_VALUE = "detector.thresholdValue"`
- `const string ROOT_COMMENT = "Warning! This xml file was automatically generated by a C++ program using the Boost PropertyTree library."`

8.39.1 Function Documentation


8.39.1.1 `bool areValidParameters (string & inputFilepath, string & outputFilename, bool & debugFlag, int argc, char ** argv)`

Definition at line 72 of file CircularDetectRegions.cpp.

References `initArgumentsConfig()`, and `printHelpInformation()`.

Referenced by `main()`.

Here is the call graph for this function:

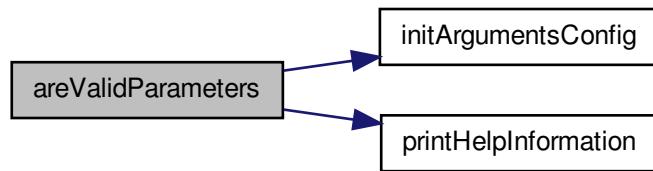

Here is the caller graph for this function:




8.39.1.2 `po::variables_map initArgumentsConfig (po::options_description & usageDescription, int argc, char ** argv)`

Definition at line 48 of file CircularDetectRegions.cpp.

Referenced by `areValidParameters()`.

Here is the caller graph for this function:




8.39.1.3 void loadDetectorParameterValues (**RegionDetector** & *detector*)

Definition at line 100 of file CircularDetectRegions.cpp.


References CONFIG_FILE, LABEL_ALPHA, LABEL_BETA, LABEL_BLUR_KERNEL_SIZE, LABEL_EPSILON, LABEL_MORPHOLOGICAL_CLOSE_ITERATIONS, LABEL_REGION_AREA_THRESH, LABEL_THRESHOLD_VALUE, multiscale::analysis::RegionDetector::setAlpha(), multiscale::analysis::RegionDetector::setBeta(), multiscale::analysis::RegionDetector::setBlurKernelSize(), multiscale::analysis::RegionDetector::setEpsilon(), multiscale::analysis::RegionDetector::setMorphologicalCloselterations(), multiscale::analysis::RegionDetector::setRegionAreaThresh(), and multiscale::analysis::RegionDetector::setThresholdValue().

Referenced by loadDetectorParameterValues(), and main().

Here is the call graph for this function:

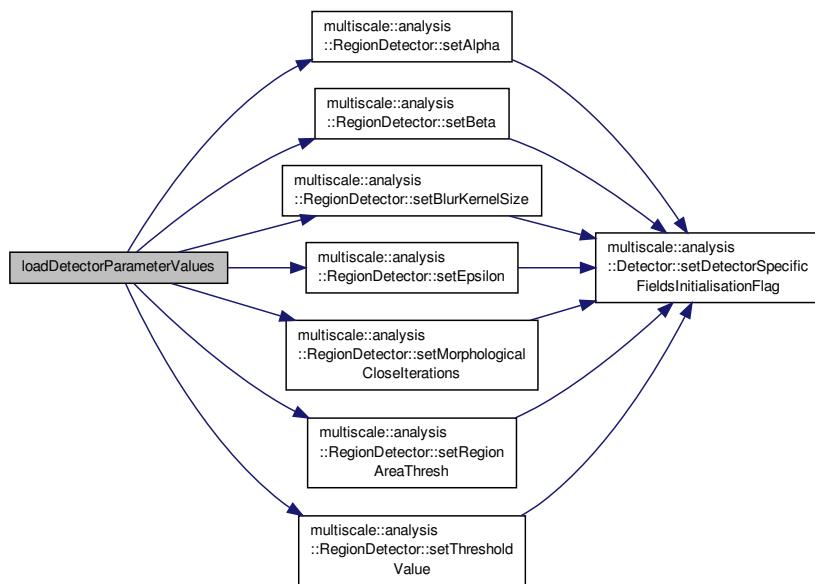

Here is the caller graph for this function:




8.39.1.4 void loadDetectorParameterValues (**RegionDetector** & *detector*, **bool** *debugMode*)

Definition at line 134 of file CircularDetectRegions.cpp.

References loadDetectorParameterValues().

Here is the call graph for this function:

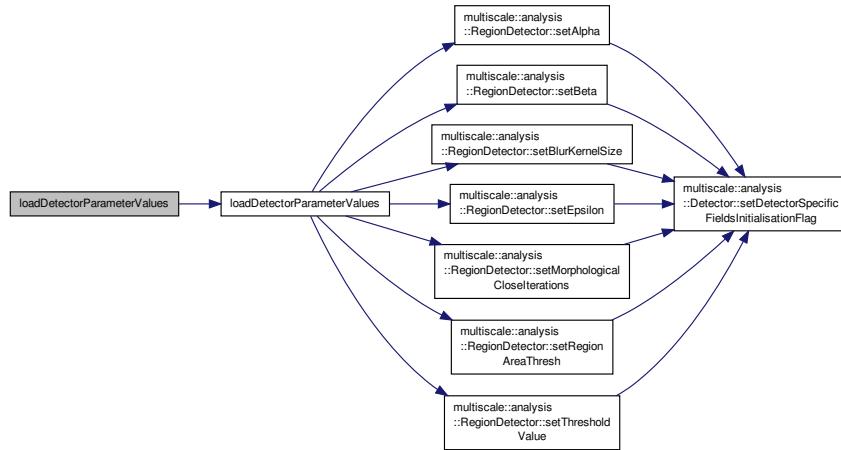


8.39.1.5 int main (int argc, char ** argv)

Definition at line 146 of file CircularDetectRegions.cpp.

References areValidParameters(), multiscale::analysis::CircularMatFactory::createFromViewerImage(), multiscale::analysis::Detector::detect(), multiscale::ERR_CODE, loadDetectorParameterValues(), multiscale::analysis::Detector::outputResults(), printWrongParameters(), and saveDetectorParameterValues().

Here is the call graph for this function:

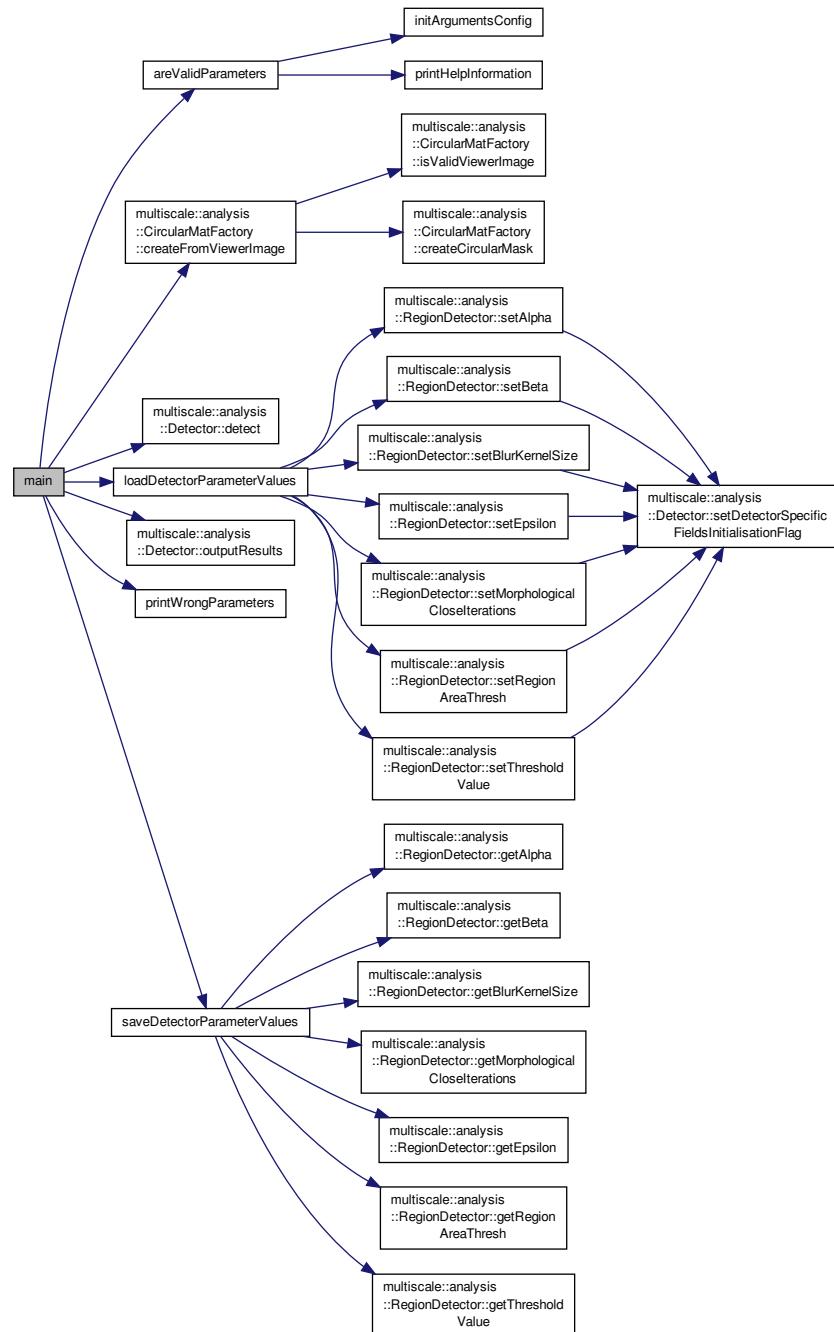


8.39.1.6 void printHelpInformation (const po::variables_map & vm, const po::options_description & usageDescription)

Definition at line 61 of file CircularDetectRegions.cpp.

Referenced by areValidParameters().

Here is the caller graph for this function:




8.39.1.7 void printWrongParameters ()

Definition at line 66 of file CircularDetectRegions.cpp.

References multiscale::ERR_MSG.

Referenced by main().

Here is the caller graph for this function:




8.39.1.8 void saveDetectorParameterValues (RegionDetector & detector)

Definition at line 115 of file CircularDetectRegions.cpp.


References CONFIG_FILE, multiscale::analysis::RegionDetector::getAlpha(), multiscale::analysis::RegionDetector::getBeta(), multiscale::analysis::RegionDetector::getBlurKernelSize(), multiscale::analysis::RegionDetector::getEpsilon(), multiscale::analysis::RegionDetector::getMorphologicalCloseIterations(), multiscale::analysis::RegionDetector::getRegionAreaThresh(), multiscale::analysis::RegionDetector::getThresholdValue(), LABEL_ALPHA, LABEL_BETA, LABEL_BLUR_KERNEL_SIZE, LABEL_EPSILON, LABEL_MORPHOLOGICAL_CLOSE_ITERATIONS, LABEL_REGION_AREA_THRESH, LABEL_ROOT_COMMENT, LABEL_THRESHOLD_VALUE, and ROOT_COMMENT.

Referenced by main(), and saveDetectorParameterValues().

Here is the call graph for this function:

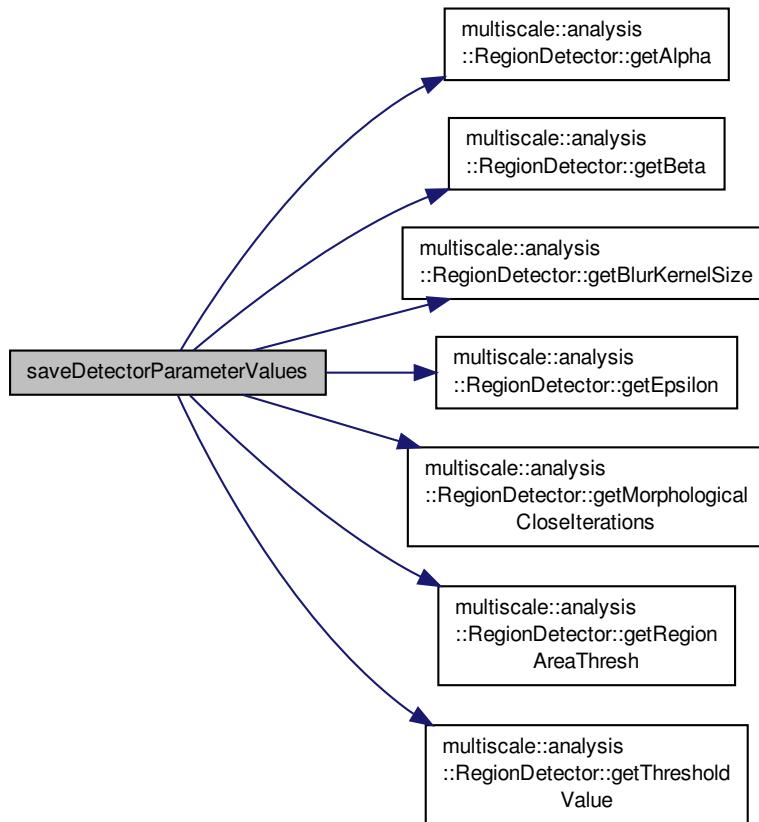

Here is the caller graph for this function:




8.39.1.9 void saveDetectorParameterValues (RegionDetector & detector, bool debugMode)

Definition at line 139 of file CircularDetectRegions.cpp.

References saveDetectorParameterValues().

Here is the call graph for this function:

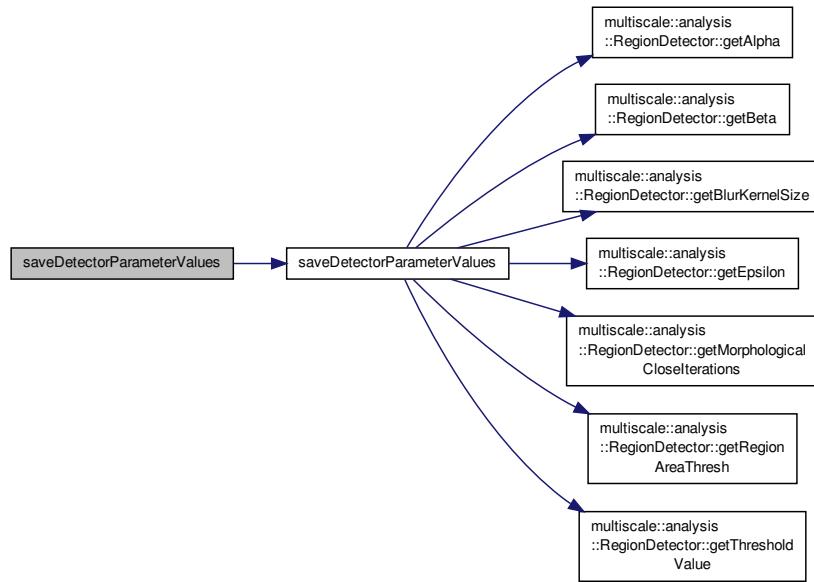

8.39.2 Variable Documentation

8.39.2.1 `const string CONFIG_FILE = "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/analysis/spatial/circular-region_detector.xml"`

Definition at line 33 of file CircularDetectRegions.cpp.

Referenced by `loadDetectorParameterValues()`, and `saveDetectorParameterValues()`.

8.39.2.2 `const string LABEL_ALPHA = "detector.alpha"`

Definition at line 36 of file CircularDetectRegions.cpp.

Referenced by `loadDetectorParameterValues()`, and `saveDetectorParameterValues()`.

8.39.2.3 `const string LABEL_BETA = "detector.beta"`

Definition at line 37 of file CircularDetectRegions.cpp.

Referenced by `loadDetectorParameterValues()`, and `saveDetectorParameterValues()`.

8.39.2.4 `const string LABEL_BLUR_KERNEL_SIZE = "detector.blurKernelSize"`

Definition at line 38 of file CircularDetectRegions.cpp.

Referenced by `loadDetectorParameterValues()`, and `saveDetectorParameterValues()`.

8.39.2.5 `const string LABEL_EPSILON = "detector.epsilon"`

Definition at line 40 of file CircularDetectRegions.cpp.

Referenced by `loadDetectorParameterValues()`, and `saveDetectorParameterValues()`.

8.39.2.6 const string LABEL_MORPHOLOGICAL_CLOSE_ITERATIONS = "detector.morphologicalCloseIterations"

Definition at line 39 of file `CircularDetectRegions.cpp`.

Referenced by `loadDetectorParameterValues()`, and `saveDetectorParameterValues()`.

8.39.2.7 const string LABEL_REGION_AREA_THRESH = "detector.regionAreaThresh"

Definition at line 41 of file `CircularDetectRegions.cpp`.

Referenced by `loadDetectorParameterValues()`, and `saveDetectorParameterValues()`.

8.39.2.8 const string LABEL_ROOT_COMMENT = "<xmlcomment>"

Definition at line 35 of file `CircularDetectRegions.cpp`.

Referenced by `saveDetectorParameterValues()`.

8.39.2.9 const string LABEL_THRESHOLD_VALUE = "detector.thresholdValue"

Definition at line 42 of file `CircularDetectRegions.cpp`.

Referenced by `loadDetectorParameterValues()`, and `saveDetectorParameterValues()`.


8.39.2.10 const string ROOT_COMMENT = "Warning! This xml file was automatically generated by a C++ program using the Boost PropertyTree library."

Definition at line 44 of file `CircularDetectRegions.cpp`.

Referenced by `saveDetectorParameterValues()`.

8.40 modules/analysis/spatial/src/CircularityMeasure.cpp File Reference


```
#include "multiscale/analysis/spatial/CircularityMeasure.hpp"
#include "multiscale/util/Geometry2D.hpp"
Include dependency graph for CircularityMeasure.cpp:
```

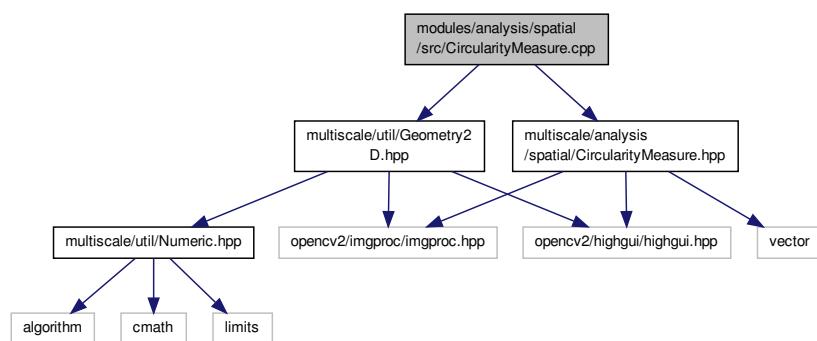

8.41 modules/analysis/spatial/src/Cluster.cpp File Reference

```
#include "multiscale/analysis/spatial/CircularityMeasure.hpp"
#include "multiscale/analysis/spatial/Cluster.hpp"
#include "multiscale/exception/ClusterException.hpp"
#include "multiscale/util/Geometry2D.hpp"
#include "multiscale/util/MinEnclosingTriangleFinder.hpp"
#include "multiscale/util/StringManipulator.hpp"
Include dependency graph for Cluster.cpp:
```


Include dependency graph for Cluster.cpp:

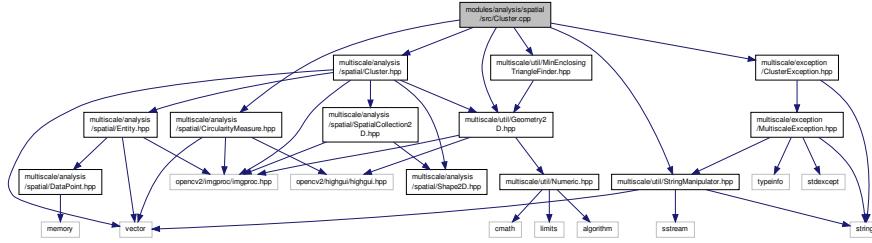

8.42 modules/analysis/spatial/src/cluster/SimulationClusterDetector.cpp File Reference

```
#include "multiscale/analysis/spatial/cluster/SimulationClusterDetector.hpp"
#include "multiscale/exception/SimulationClusterDetectorException.hpp"
#include "multiscale/util/RGBColourGenerator.hpp"
#include <iostream>
```


Include dependency graph for SimulationClusterDetector.cpp:

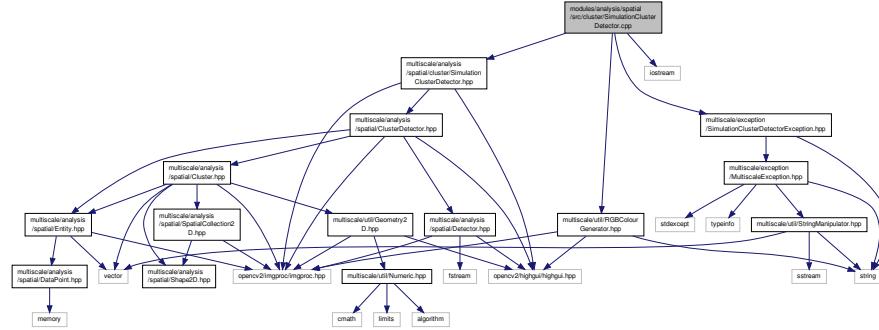

8.43 modules/analysis/spatial/src/ClusterDetector.cpp File Reference

```
#include "multiscale/analysis/spatial/ClusterDetector.hpp"
#include "multiscale/analysis/spatial/DBSCAN.hpp"
#include "multiscale/analysis/spatial/Silhouette.hpp"
#include "multiscale/util/NumericRangeManipulator.hpp"
#include "multiscale/util/RGBColourGenerator.hpp"
#include <iostream>
#include <fstream>
#include <string>
```


Include dependency graph for ClusterDetector.cpp:

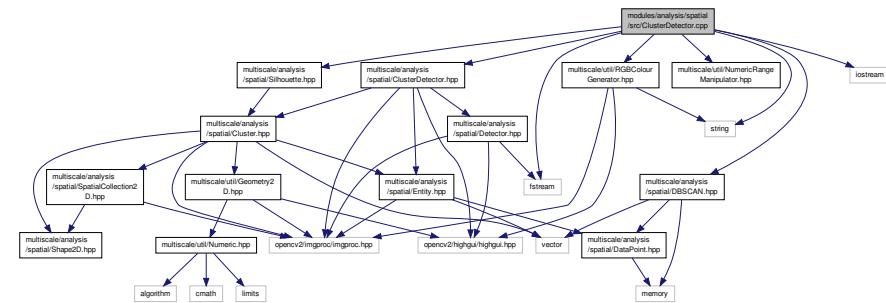

8.44 modules/analysis/spatial/src/DBSCAN.cpp File Reference

```
#include "multiscale/analysis/spatial/DBSCAN.hpp"
#include <limits>
#include <cassert>
Include dependency graph for DBSCAN.cpp:
```


Include dependency graph for DBSCAN.cpp:

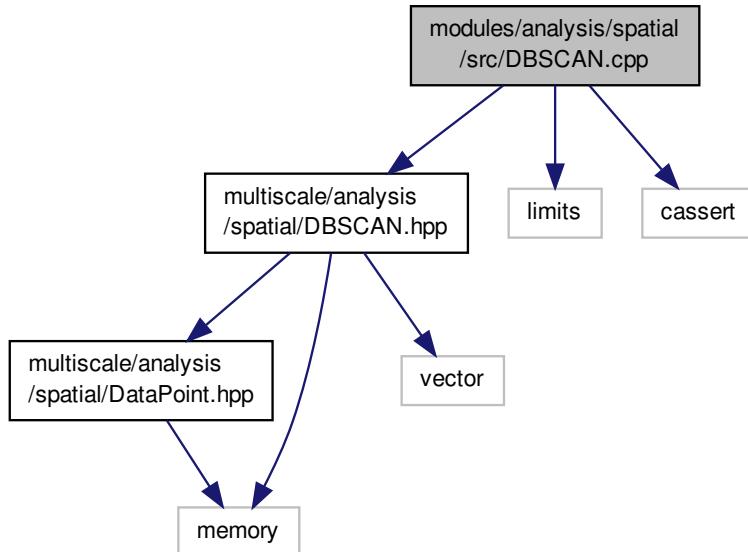

8.45 modules/analysis/spatial/src/Detector.cpp File Reference

```
#include "multiscale/analysis/spatial/Detector.hpp"
#include "multiscale/exception/DetectorException.hpp"
#include "multiscale/util/Geometry2D.hpp"
#include <iostream>
```

Include dependency graph for Detector.cpp:

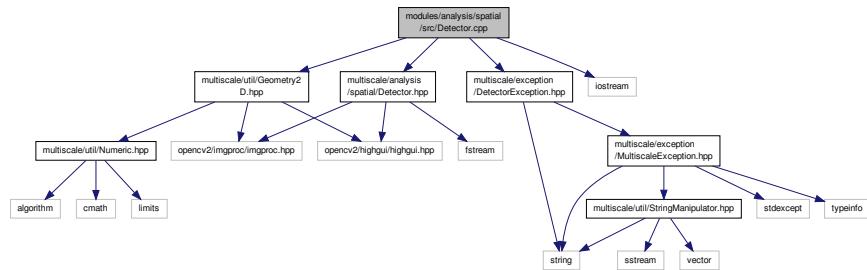


8.46 modules/analysis/spatial/src/Entity.cpp File Reference

```

#include "multiscale/analysis/spatial/Entity.hpp"
#include "multiscale/exception/EntityException.hpp"
#include "multiscale/util/StringManipulator.hpp"
#include "multiscale/util/Geometry2D.hpp"

```

Include dependency graph for Entity.cpp:

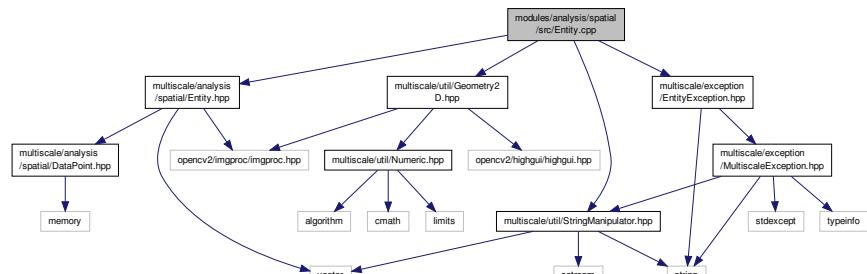


8.47 modules/analysis/spatial/src/factory/CircularMatFactory.cpp File Reference

```

#include "multiscale/analysis/spatial/factory/CircularMatFactory.hpp"
#include "multiscale/exception/CircularMatFactoryException.hpp"
#include "opencv2/highgui/highgui.hpp"

```

Include dependency graph for CircularMatFactory.cpp:

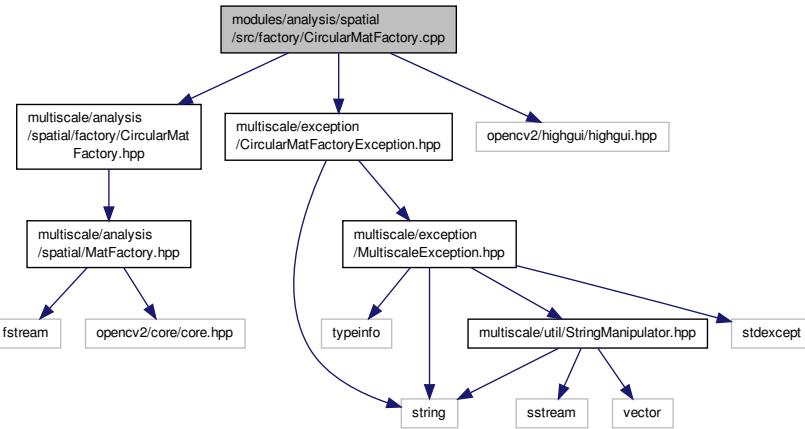


8.48 modules/analysis/spatial/src/factory/RectangularMatFactory.cpp File Reference

```

#include "multiscale/analysis/spatial/factory/RectangularMatFactory.hpp"
#include "multiscale/exception/RectangularMatFactoryException.hpp"
#include "opencv2/highgui/highgui.hpp"

```

Include dependency graph for RectangularMatFactory.cpp:

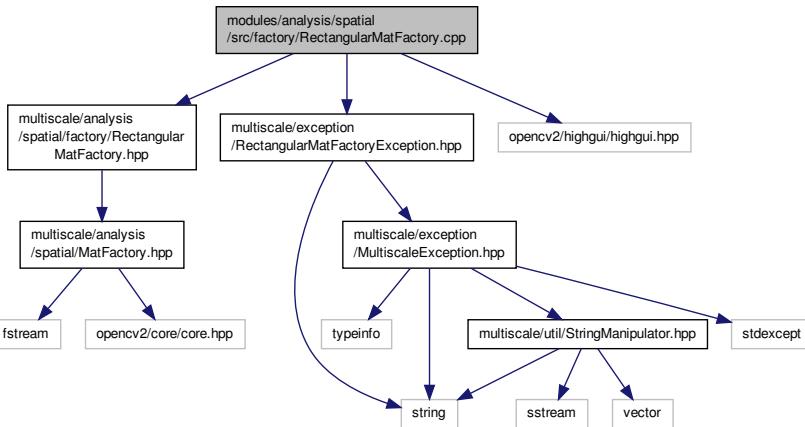


8.49 modules/analysis/spatial/src/MatFactory.cpp File Reference

```

#include "multiscale/analysis/spatial/MatFactory.hpp"
#include "multiscale/exception/MatFactoryException.hpp"
#include "multiscale/util/NumericRangeManipulator.hpp"

```

Include dependency graph for MatFactory.cpp:

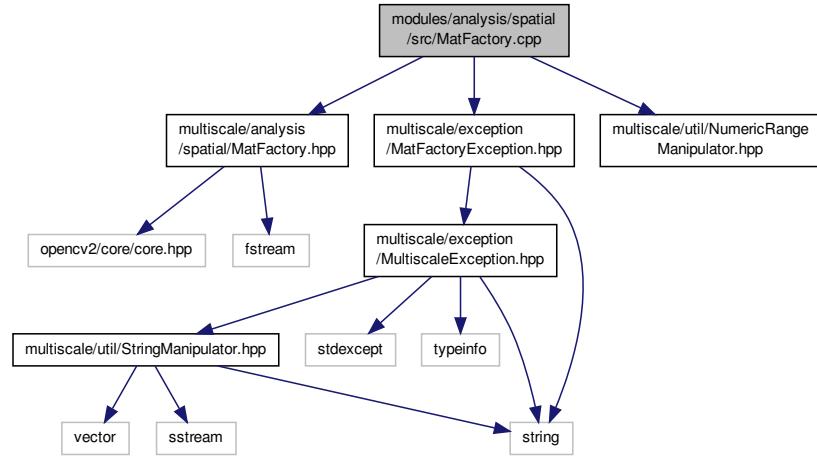


8.50 modules/analysis/spatial/src/RectangularDetectRegions.cpp File Reference

```

#include "multiscale/core/Multiscale.hpp"
#include "multiscale/analysis/spatial/RegionDetector.hpp"
#include "multiscale/analysis/spatial/factory/RectangularMatFactory.hpp"
#include "multiscale/exception/ExceptionHandler.hpp"
#include <boost/property_tree/ptree.hpp>
#include <boost/property_tree/xml_parser.hpp>
#include <boost/program_options.hpp>
#include <iostream>
  
```

Include dependency graph for RectangularDetectRegions.cpp:

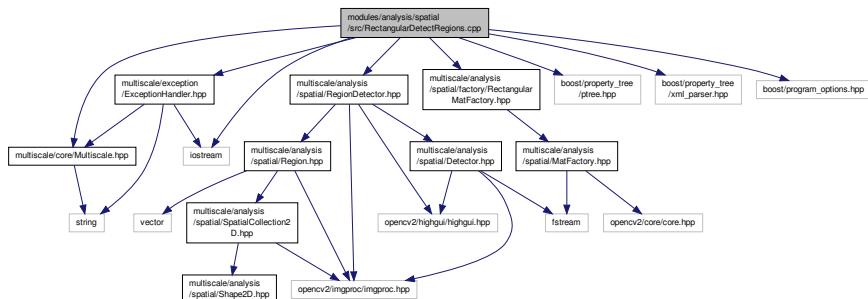

Functions

- `po::variables_map initArgumentsConfig (po::options_description &usageDescription, int argc, char **argv)`
- `void printHelpInformation (const po::variables_map &vm, const po::options_description &usageDescription)`
- `void printWrongParameters ()`
- `bool areValidParameters (string &inputFilepath, string &outputFilename, bool &debugFlag, int argc, char **argv)`
- `void loadDetectorParameterValues (RegionDetector &detector)`

- void `saveDetectorParameterValues` (`RegionDetector &detector`)
- void `loadDetectorParameterValues` (`RegionDetector &detector, bool debugMode`)
- void `saveDetectorParameterValues` (`RegionDetector &detector, bool debugMode`)
- int `main` (`int argc, char **argv`)

Variables

- const string `CONFIG_FILE` = "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/analysis/spatial/rectangular_region_detector.xml"
- const string `LABEL_ROOT_COMMENT` = "<xmlcomment>"
- const string `LABEL_ALPHA` = "detector.alpha"
- const string `LABEL_BETA` = "detector.beta"
- const string `LABEL_BLUR_KERNEL_SIZE` = "detector.blurKernelSize"
- const string `LABEL_MORPHOLOGICAL_CLOSE_ITERATIONS` = "detector.morphologicalCloselterations"
- const string `LABEL_EPSILON` = "detector.epsilon"
- const string `LABEL_REGION_AREA_THRESH` = "detector.regionAreaThresh"
- const string `LABEL_THRESHOLD_VALUE` = "detector.thresholdValue"
- const string `ROOT_COMMENT` = "Warning! This xml file was automatically generated by a C++ program using the Boost PropertyTree library."


8.50.1 Function Documentation

8.50.1.1 bool `isValidParameters` (`string & inputfilepath, string & outputfilename, bool & debugFlag, int argc, char ** argv`)

Definition at line 72 of file `RectangularDetectRegions.cpp`.

References `initArgumentsConfig()`, and `printHelpInformation()`.

Here is the call graph for this function:

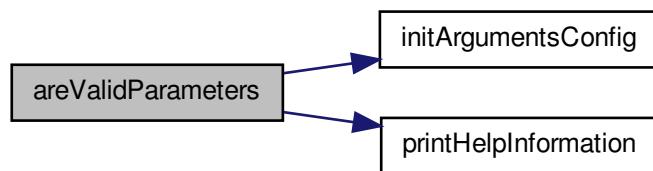

8.50.1.2 `po::variables_map initArgumentsConfig` (`po::options_description & usageDescription, int argc, char ** argv`)

Definition at line 48 of file `RectangularDetectRegions.cpp`.


8.50.1.3 void `loadDetectorParameterValues` (`RegionDetector & detector`)

Definition at line 100 of file `RectangularDetectRegions.cpp`.

References `CONFIG_FILE`, `LABEL_ALPHA`, `LABEL_BETA`, `LABEL_BLUR_KERNEL_SIZE`, `LABEL_EPSILON`, `LABEL_MORPHOLOGICAL_CLOSE_ITERATIONS`, `LABEL_REGION_AREA_THRESH`, `LABEL_THRESHOLD_VALUE`, `multiscale::analysis::RegionDetector::setAlpha()`, `multiscale::analysis::RegionDetector::setBeta()`,

`multiscale::analysis::RegionDetector::setBlurKernelSize()`, `multiscale::analysis::RegionDetector::setEpsilon()`, `multiscale::analysis::RegionDetector::setMorphologicalCloseIterations()`, `multiscale::analysis::RegionDetector::setRegionAreaThresh()`, and `multiscale::analysis::RegionDetector::setThresholdValue()`.

Here is the call graph for this function:

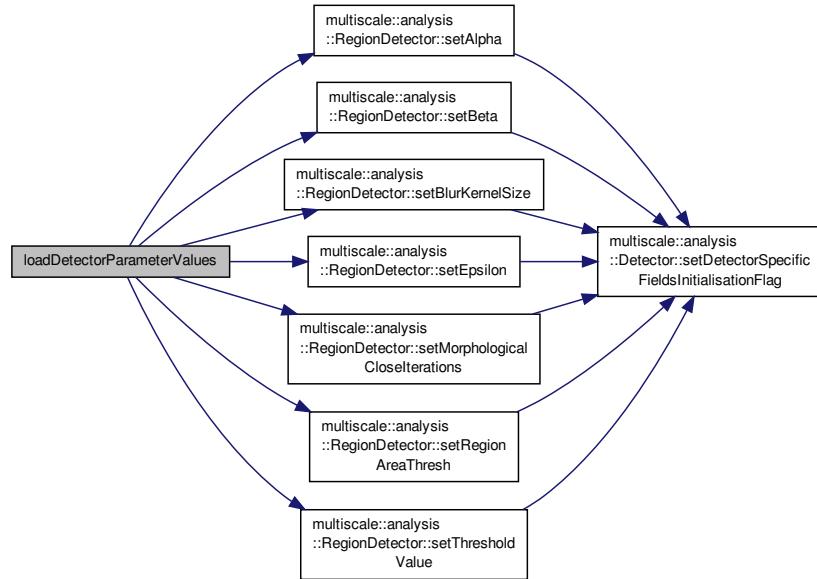


8.50.1.4 void loadDetectorParameterValues (`RegionDetector & detector, bool debugMode`)

Definition at line 134 of file `RectangularDetectRegions.cpp`.

References `loadDetectorParameterValues()`.

Here is the call graph for this function:

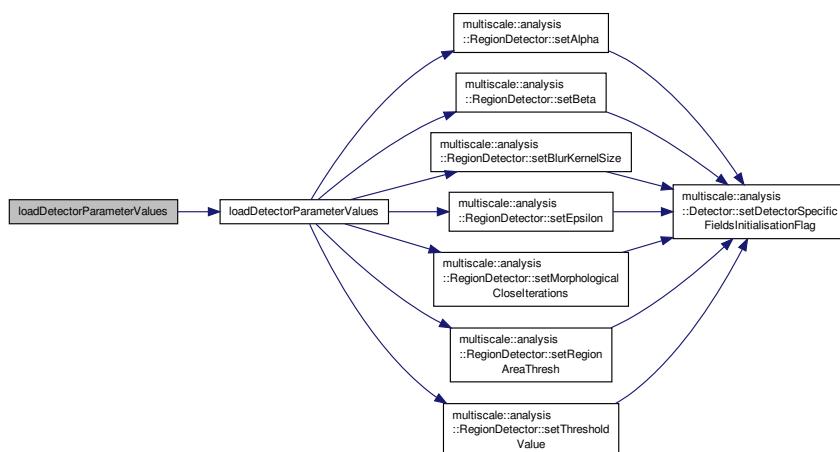


8.50.1.5 int main (int argc, char ** argv)

Definition at line 146 of file RectangularDetectRegions.cpp.

References `isValidParameters()`, `multiscale::analysis::RectangularMatFactory::createFromViewerImage()`, `multiscale::analysis::Detector::detect()`, `multiscale::ERR_CODE`, `loadDetectorParameterValues()`, `multiscale::analysis::Detector::outputResults()`, `printWrongParameters()`, and `saveDetectorParameterValues()`.

Here is the call graph for this function:

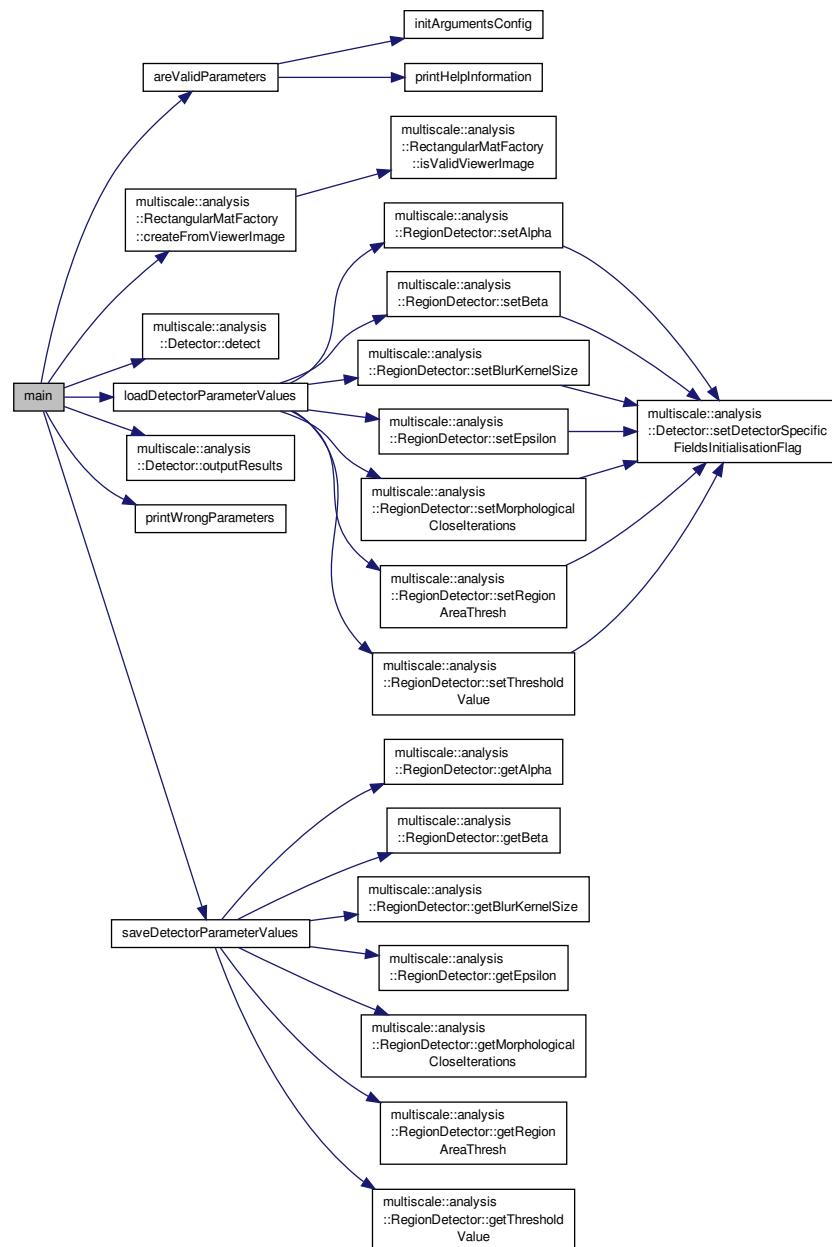

8.50.1.6 void printHelpInformation (const po::variables_map & vm, const po::options_description & usageDescription)

Definition at line 61 of file RectangularDetectRegions.cpp.

8.50.1.7 void printWrongParameters ()

Definition at line 66 of file RectangularDetectRegions.cpp.


References multiscale::ERR_MSG.

8.50.1.8 void saveDetectorParameterValues (RegionDetector & detector)

Definition at line 115 of file RectangularDetectRegions.cpp.

References CONFIG_FILE, multiscale::analysis::RegionDetector::getAlpha(), multiscale::analysis::RegionDetector::getBeta(), multiscale::analysis::RegionDetector::getBlurKernelSize(), multiscale::analysis::RegionDetector::getEpsilon(), multiscale::analysis::RegionDetector::getMorphologicalCloselterations(), multiscale::analysis::RegionDetector::getRegionAreaThresh(), multiscale::analysis::RegionDetector::getThresholdValue(), LABEL_ALPHA, LABEL_BETA, LABEL_BLUR_KERNEL_SIZE, LABEL_EPSILON, LABEL_MORPHOLOGICAL_CLOSE_ITERATIONS, LABEL_REGION_AREA_THRESH, LABEL_ROOT_COMMENT, LABEL_THRESHOLD_VALUE, and ROOT_COMMENT.

Here is the call graph for this function:

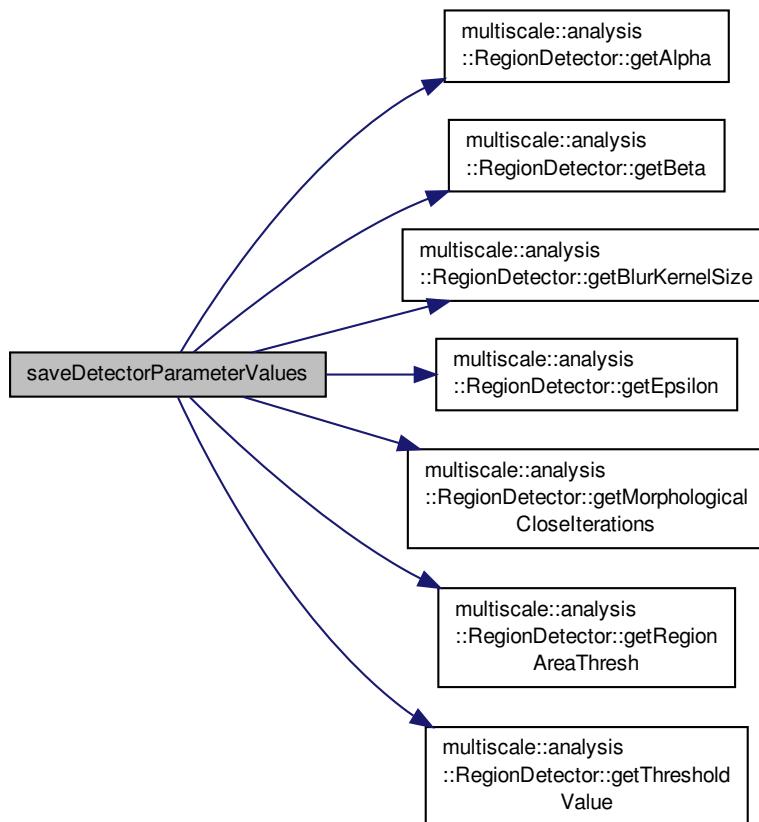


8.50.1.9 void saveDetectorParameterValues (RegionDetector & detector, bool debugMode)

Definition at line 139 of file RectangularDetectRegions.cpp.

References saveDetectorParameterValues().

Here is the call graph for this function:

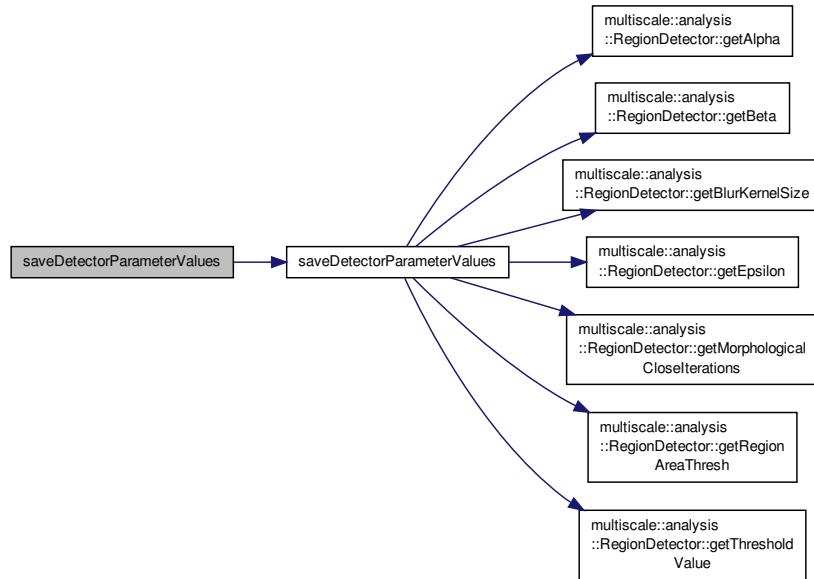

8.50.2 Variable Documentation

8.50.2.1 const string CONFIG_FILE = "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/analysis/spatial/rectangular_region_detector.xml"

Definition at line 33 of file RectangularDetectRegions.cpp.

8.50.2.2 const string LABEL_ALPHA = "detector.alpha"

Definition at line 36 of file RectangularDetectRegions.cpp.

8.50.2.3 const string LABEL_BETA = "detector.beta"

Definition at line 37 of file RectangularDetectRegions.cpp.

8.50.2.4 const string LABEL_BLUR_KERNEL_SIZE = "detector.blurKernelSize"

Definition at line 38 of file RectangularDetectRegions.cpp.

8.50.2.5 const string LABEL_EPSILON = "detector.epsilon"

Definition at line 40 of file RectangularDetectRegions.cpp.

8.50.2.6 const string LABEL_MORPHOLOGICAL_CLOSE_ITERATIONS = "detector.morphologicalCloseIterations"

Definition at line 39 of file RectangularDetectRegions.cpp.

8.50.2.7 `const string LABEL_REGION_AREA_THRESH = "detector.regionAreaThresh"`

Definition at line 41 of file RectangularDetectRegions.cpp.

8.50.2.8 `const string LABEL_ROOT_COMMENT = "<xmlcomment>"`

Definition at line 35 of file RectangularDetectRegions.cpp.

8.50.2.9 `const string LABEL_THRESHOLD_VALUE = "detector.thresholdValue"`


Definition at line 42 of file RectangularDetectRegions.cpp.

8.50.2.10 `const string ROOT_COMMENT = "Warning! This xml file was automatically generated by a C++ program using the Boost PropertyTree library."`

Definition at line 44 of file RectangularDetectRegions.cpp.

8.51 modules/analysis/spatial/src/Region.cpp File Reference


```
#include "multiscale/analysis/spatial/CircularityMeasure.hpp"
#include "multiscale/analysis/spatial/Region.hpp"
#include "multiscale/exception/RegionException.hpp"
#include "multiscale/util/MinEnclosingTriangleFinder.hpp"
#include "multiscale/util/Numeric.hpp"
#include "multiscale/util/StringManipulator.hpp"
Include dependency graph for Region.hpp:
```

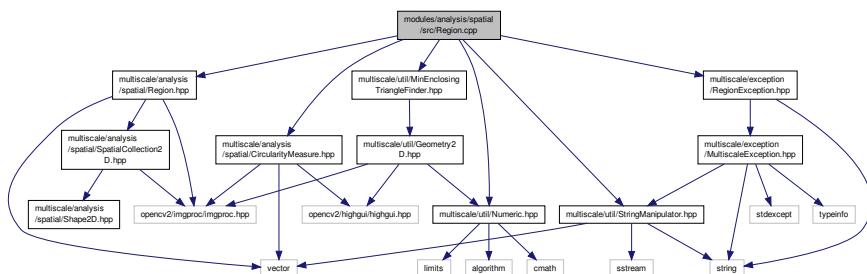

8.52 modules/analysis/spatial/src/RegionDetector.cpp File Reference

```
#include "multiscale/analysis/spatial/MatFactory.hpp"
#include "multiscale/analysis/spatial/factory/RectangularMatFactory.hpp"
#include "multiscale/analysis/spatial/RegionDetector.hpp"
#include "multiscale/util/NumericRangeManipulator.hpp"
#include "multiscale/util/Geometry2D.hpp"
#include <iostream>
#include <fstream>
#include <string>
```

Include dependency graph for RegionDetector.cpp:

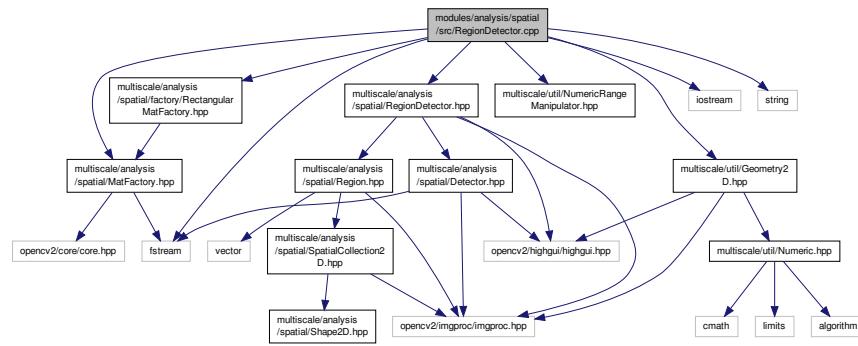

Functions

- void [convertVertices](#) (const Point *src, vector< Point > &dst)

8.52.1 Function Documentation

8.52.1.1 void convertVertices (const Point * src, vector< Point > & dst)

Definition at line 373 of file RegionDetector.cpp.


References ENCLOSING_RECT_VERTICES.

8.53 modules/analysis/spatial/src/Silhouette.cpp File Reference

```


#include "multiscale/analysis/spatial/Silhouette.hpp"
#include "multiscale/util/Geometry2D.hpp"
#include <algorithm>
#include <limits>
  
```

Include dependency graph for Silhouette.cpp:

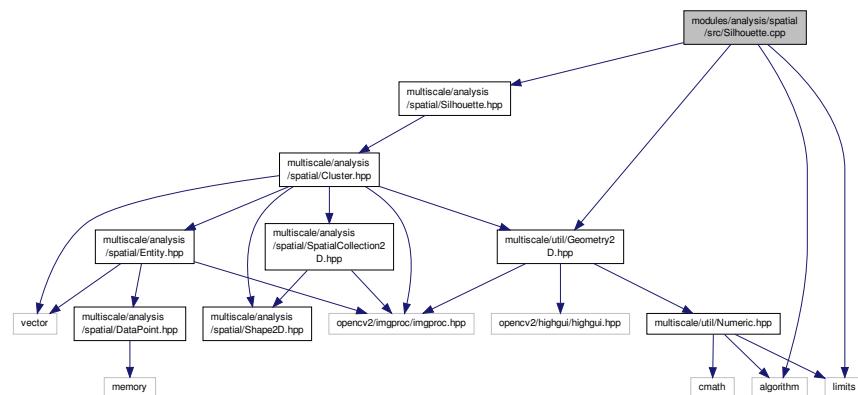

8.54 modules/analysis/spatial/src/SimulationDetectClusters.cpp File Reference

```
#include "multiscale/core/Multiscale.hpp"
#include "multiscale/analysis/spatial/cluster/SimulationClusterDetector.hpp"
#include "multiscale/analysis/spatial/factory/RectangularMatFactory.hpp"
#include "multiscale/exception/ExceptionHandler.hpp"
#include <boost/property_tree/ptree.hpp>
#include <boost/property_tree/xml_parser.hpp>
#include <boost/program_options.hpp>
#include <iostream>
#include <typeinfo>
Include dependency graph for SimulationDetectClusters.cpp:
```

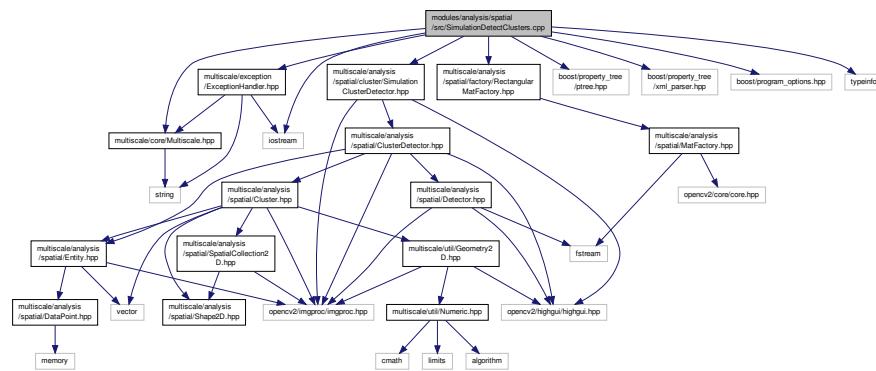

Functions

- `po::variables_map initArgumentsConfig (po::options_description &usageDescription, int argc, char **argv)`
 - `void printHelpInformation (const po::variables_map &vm, const po::options_description &usageDescription)`
 - `void printWrongParameters ()`
 - `bool areValidParameters (string &inputFilepath, string &outputFilename, bool &debugFlag, unsigned int &height, unsigned int &width, unsigned int &maxPileup, int argc, char **argv)`
 - `void loadDetectorParameterValues (SimulationClusterDetector &detector)`
 - `void saveDetectorParameterValues (SimulationClusterDetector &detector)`
 - `void loadDetectorParameterValues (SimulationClusterDetector &detector, bool debugMode)`
 - `void saveDetectorParameterValues (SimulationClusterDetector &detector, bool debugMode)`
 - `int main (int argc, char **argv)`

Variables

- const string **CONFIG_FILE** = "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/analysis/spatial/simulation-cluster_detector.xml"
 - const string **LABEL_ROOT_COMMENT** = "<xmlcomment>"
 - const string **LABEL_EPS** = "detector.eps"
 - const string **LABEL_MINPOINTS** = "detector.minPoints"
 - const string **ROOT_COMMENT** = "Warning! This xml file was automatically generated by a C++ program using the Boost PropertyTree library."


8.54.1 Function Documentation

8.54.1.1 `bool areValidParameters (string & inputFilepath, string & outputFilename, bool & debugFlag, unsigned int & height, unsigned int & width, unsigned int & maxPileup, int argc, char ** argv)`

Definition at line 71 of file SimulationDetectClusters.cpp.

References `initArgumentsConfig()`, and `printHelpInformation()`.

Here is the call graph for this function:

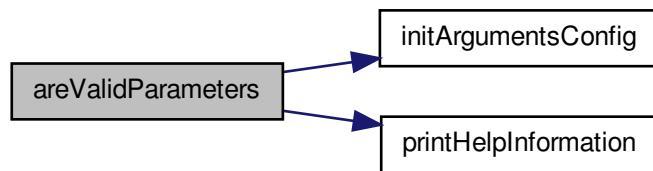

8.54.1.2 `po::variables_map initArgumentsConfig (po::options_description & usageDescription, int argc, char ** argv)`


Definition at line 44 of file SimulationDetectClusters.cpp.

8.54.1.3 `void loadDetectorParameterValues (SimulationClusterDetector & detector)`

Definition at line 105 of file SimulationDetectClusters.cpp.

References `CONFIG_FILE`, `LABEL_EPS`, `LABEL_MINPOINTS`, `multiscale::analysis::ClusterDetector::setEps()`, and `multiscale::analysis::ClusterDetector::setMinPoints()`.

Here is the call graph for this function:




8.54.1.4 `void loadDetectorParameterValues (SimulationClusterDetector & detector, bool debugMode)`

Definition at line 129 of file SimulationDetectClusters.cpp.

References `loadDetectorParameterValues()`.

Here is the call graph for this function:

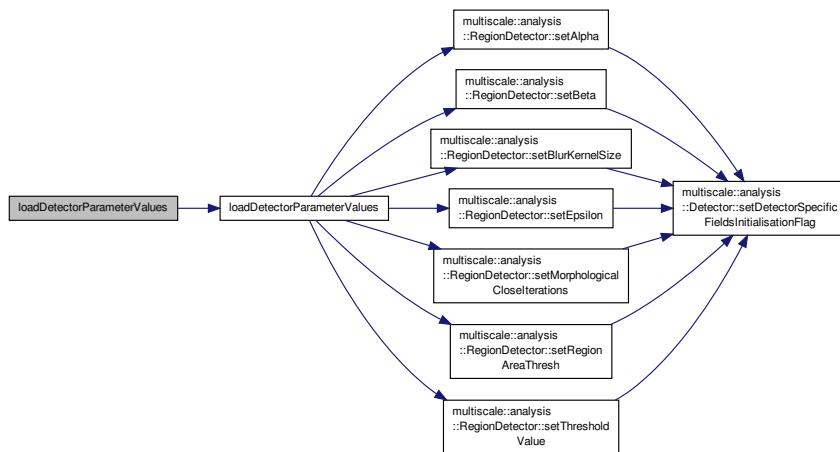


8.54.1.5 int main (int argc, char ** argv)

Definition at line 141 of file SimulationDetectClusters.cpp.

References areValidParameters(), multiscale::analysis::RectangularMatFactory::createFromViewerImage(), multiscale::analysis::Detector::detect(), multiscale::ERR_CODE, loadDetectorParameterValues(), multiscale::analysis::RectangularMatFactory::maxColourBarIntensityFromViewerImage(), multiscale::analysis::Detector::outputResults(), printWrongParameters(), and saveDetectorParameterValues().

Here is the call graph for this function:

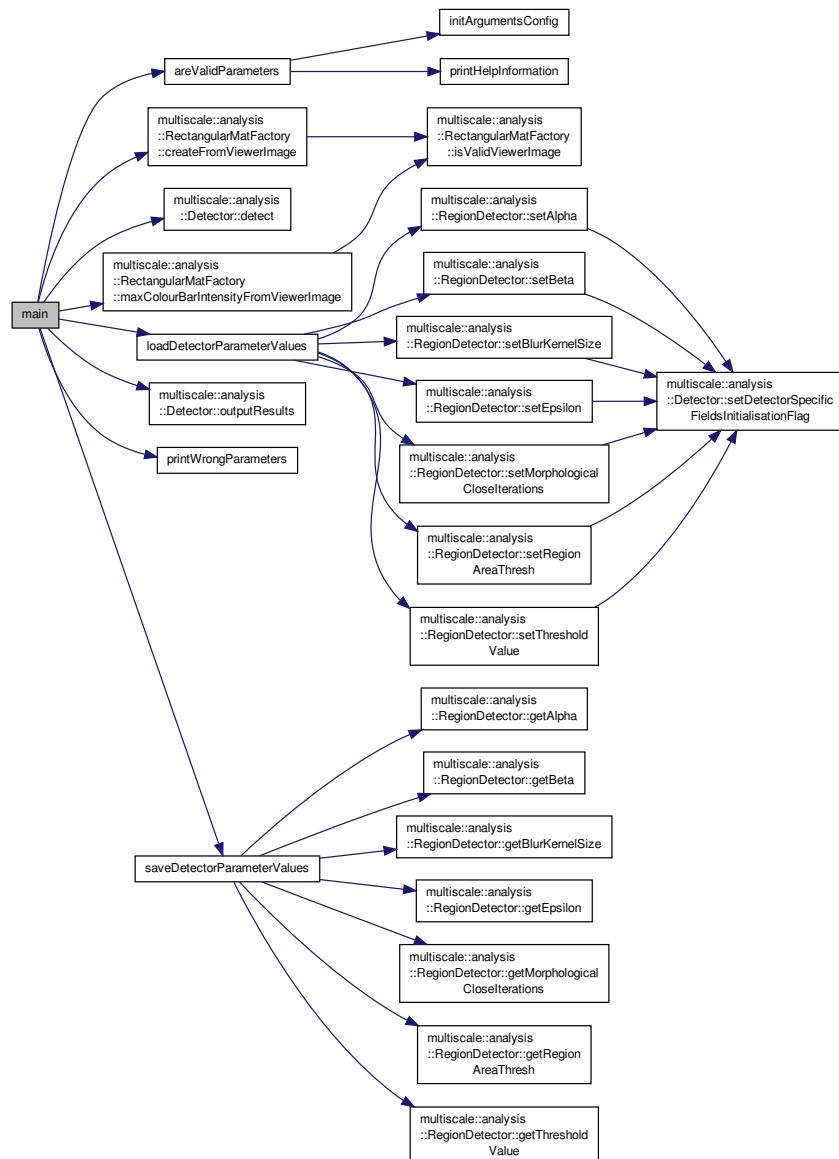

8.54.1.6 void printHelpInformation (const po::variables_map & vm, const po::options_description & usageDescription)

Definition at line 60 of file `SimulationDetectClusters.cpp`.

8.54.1.7 void printWrongParameters ()

Definition at line 65 of file `SimulationDetectClusters.cpp`.


References `multiscale::ERR_MSG`.

8.54.1.8 void saveDetectorParameterValues (*SimulationClusterDetector & detector*)

Definition at line 115 of file SimulationDetectClusters.cpp.

References CONFIG_FILE, multiscale::analysis::ClusterDetector::getEps(), multiscale::analysis::ClusterDetector::getMinPoints(), LABEL_EPS, LABEL_MINPOINTS, LABEL_ROOT_COMMENT, and ROOT_COMMENT.


Here is the call graph for this function:

8.54.1.9 void saveDetectorParameterValues (*SimulationClusterDetector & detector, bool debugMode*)

Definition at line 134 of file SimulationDetectClusters.cpp.

References saveDetectorParameterValues().

Here is the call graph for this function:

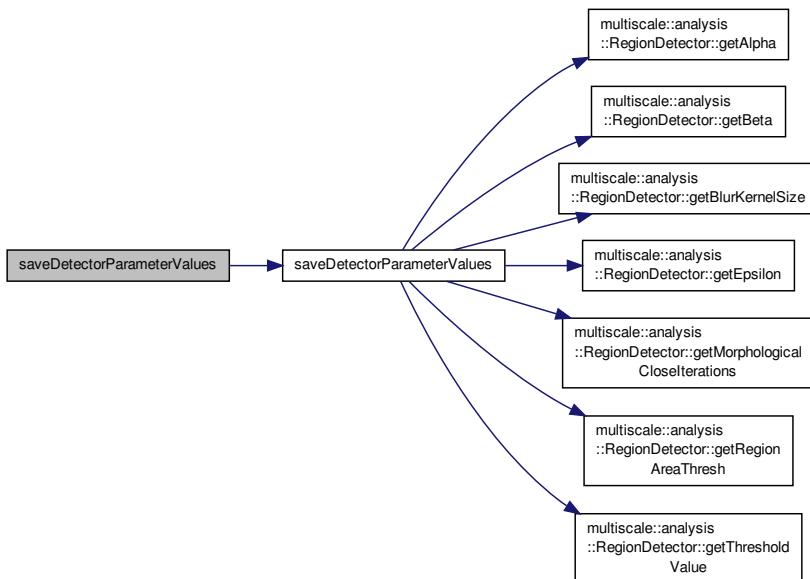

8.54.2 Variable Documentation

8.54.2.1 const string CONFIG_FILE = "/home/ovidiu/Repositories/git/multiscale/Multiscale/config/analysis/spatial/simulation_cluster_detector.xml"

Definition at line 34 of file SimulationDetectClusters.cpp.

8.54.2.2 `const string LABEL_EPS = "detector.eps"`

Definition at line 37 of file `SimulationDetectClusters.cpp`.

Referenced by `loadDetectorParameterValues()`, and `saveDetectorParameterValues()`.

8.54.2.3 `const string LABEL_MINPOINTS = "detector.minPoints"`

Definition at line 38 of file `SimulationDetectClusters.cpp`.

Referenced by `loadDetectorParameterValues()`, and `saveDetectorParameterValues()`.

8.54.2.4 `const string LABEL_ROOT_COMMENT = "<xmlcomment>"`


Definition at line 36 of file `SimulationDetectClusters.cpp`.

8.54.2.5 `const string ROOT_COMMENT = "Warning! This xml file was automatically generated by a C++ program using the Boost PropertyTree library."`

Definition at line 40 of file `SimulationDetectClusters.cpp`.


8.55 modules/analysis/spatial/src/SpatialCollection2D.cpp File Reference

```
#include "multiscale/analysis/spatial/SpatialCollection2D.hpp"
Include dependency graph for SpatialCollection2D.cpp:
```

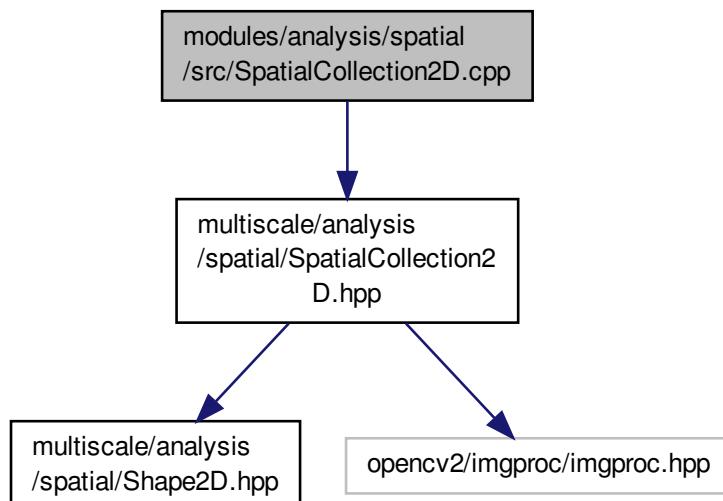

8.56 modules/analysis/spatial/test/DBSCANTest.cpp File Reference

```
#include "multiscale/analysis/spatial/DataPoint.hpp"
#include "multiscale/analysis/spatial/DBSCAN.hpp"
#include "multiscale/util/Geometry2D.hpp"
#include <iostream>
#include <opencv2/core/core.hpp>
#include <opencv2/highgui/highgui.hpp>
Include dependency graph for DBSCANTest.cpp:
```

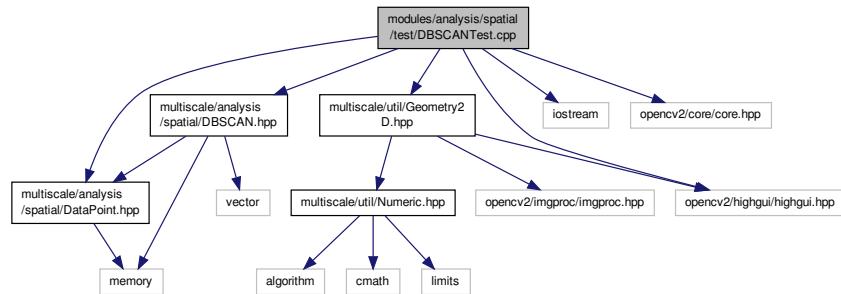

Classes

- class [EuclideanDataPoint](#)

Functions

- `vector< shared_ptr< DataPoint > > convertPoints (vector< EuclideanDataPoint > &points)`
- `void printResults (const vector< int > &clusterIndexes)`
- `void runTest (vector< EuclideanDataPoint > &points, double eps, int minPoints)`
- `void runTest1 ()`
- `void runTest2 ()`
- `void runTest3 ()`
- `void runTest4 ()`
- `void runTest5 ()`
- `void runTests ()`
- `int main ()`


8.56.1 Function Documentation

8.56.1.1 `vector<shared_ptr<DataPoint> > convertPoints (vector< EuclideanDataPoint > & points)`

Definition at line 37 of file DBSCANTest.cpp.

Referenced by `runTest()`.

Here is the caller graph for this function:

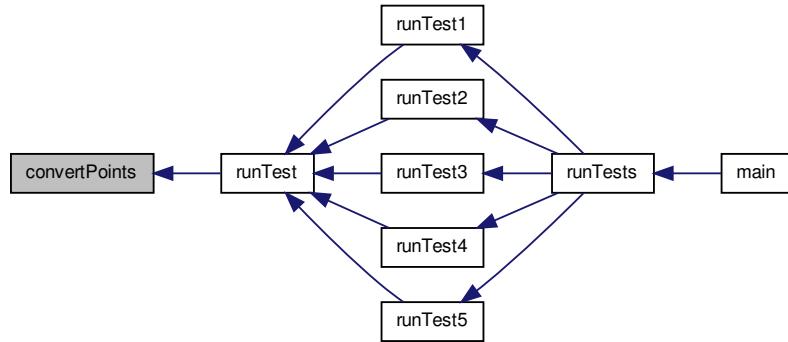


8.56.1.2 int main ()

Definition at line 133 of file DBSCANTest.cpp.

References runTests().

Here is the call graph for this function:

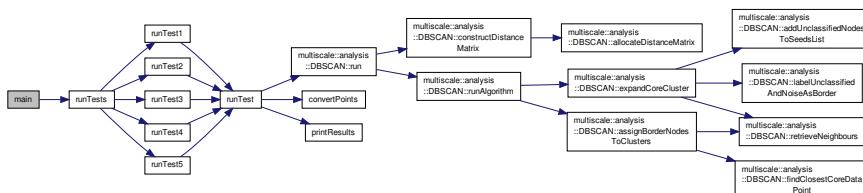


8.56.1.3 void printResults (const vector< int > & clusterIndexes)

Definition at line 48 of file DBSCANTest.cpp.

Referenced by runTest().

Here is the caller graph for this function:

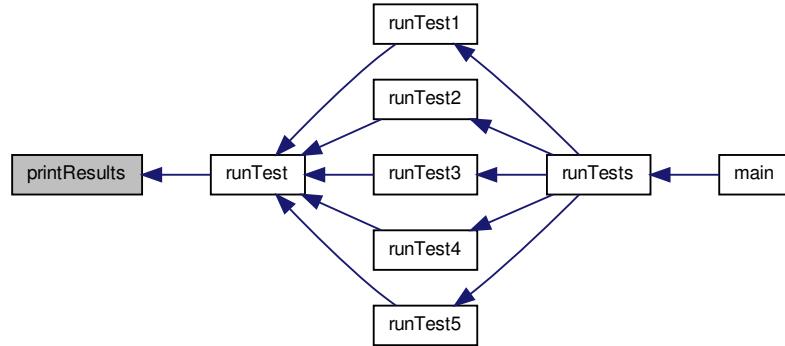


8.56.1.4 void runTest (`vector< EuclideanDataPoint > & points, double eps, int minPoints`)

Definition at line 57 of file DBSCANTest.cpp.


References convertPoints(), printResults(), and multiscale::analysis::DBSCAN::run().

Referenced by runTest1(), runTest2(), runTest3(), runTest4(), and runTest5().

Here is the call graph for this function:

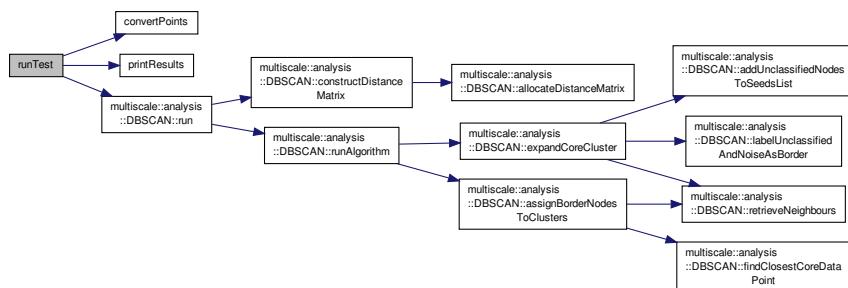

Here is the caller graph for this function:

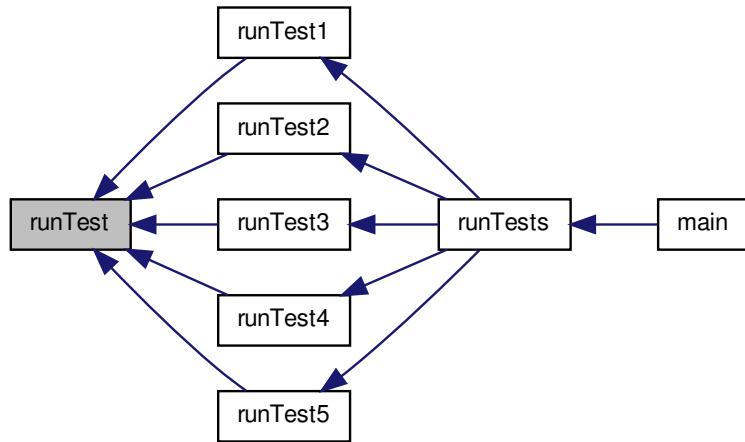


8.56.1.5 void runTest1()

Definition at line 67 of file DBSCANTest.cpp.


References runTest().

Referenced by runTests().

Here is the call graph for this function:

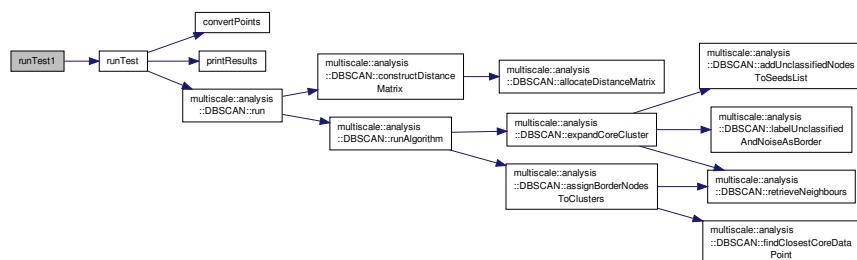

Here is the caller graph for this function:




8.56.1.6 void runTest2()

Definition at line 78 of file DBSCANTest.cpp.


References runTest().

Referenced by runTests().

Here is the call graph for this function:

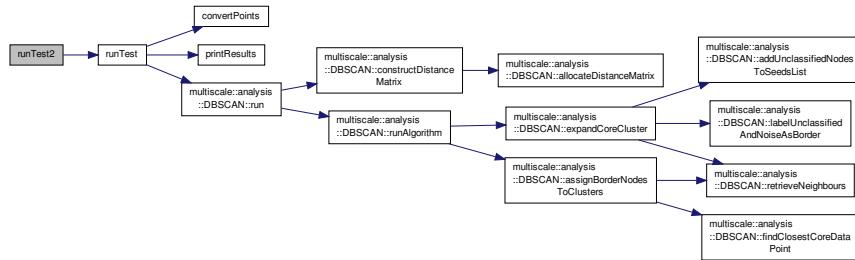

Here is the caller graph for this function:




8.56.1.7 void runTest3()

Definition at line 95 of file DBSCANTest.cpp.

References runTest().

Referenced by runTests().

Here is the call graph for this function:

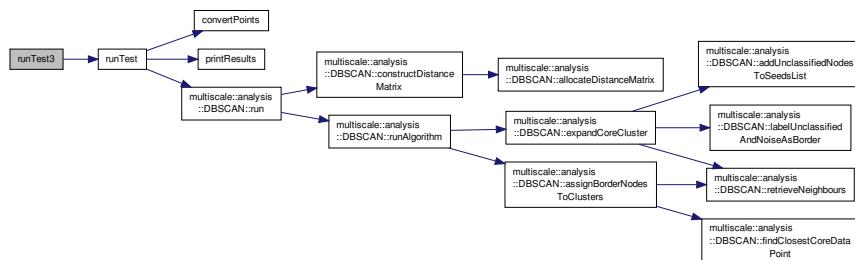

Here is the caller graph for this function:




8.56.1.8 void runTest4()

Definition at line 106 of file DBSCANTest.cpp.


References runTest().

Referenced by runTests().

Here is the call graph for this function:

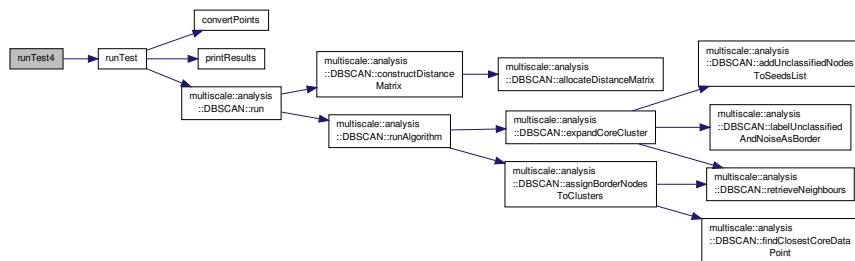

Here is the caller graph for this function:




8.56.1.9 void runTest5()

Definition at line 113 of file DBSCANTest.cpp.


References runTest().

Referenced by runTests().

Here is the call graph for this function:

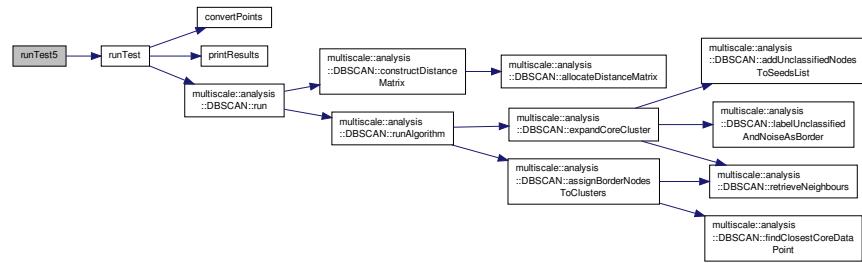

Here is the caller graph for this function:




8.56.1.10 void runTests()

Definition at line 124 of file DBSCANTest.cpp.


References runTest1(), runTest2(), runTest3(), runTest4(), and runTest5().

Referenced by main().

Here is the call graph for this function:

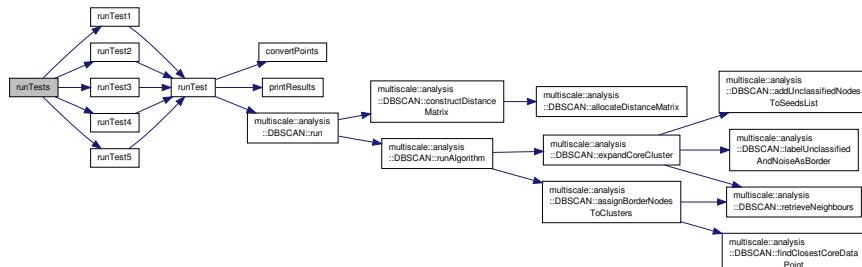


Here is the caller graph for this function:




8.57 modules/util/include/multiscale/util/Geometry2D.hpp File Reference

```
#include "multiscale/util/Numeric.hpp"
#include "opencv2/imgproc/imgproc.hpp"
#include "opencv2/highgui/highgui.hpp"
Include dependency graph for Geometry2D.hpp:
```

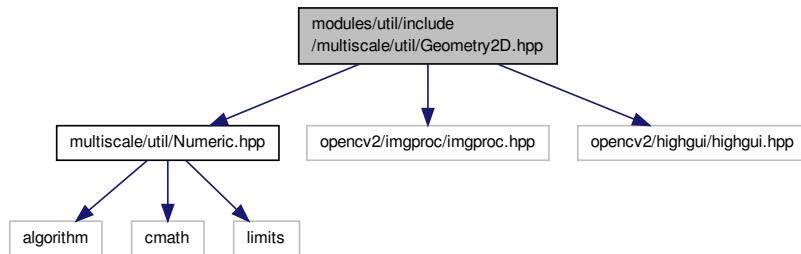

This graph shows which files directly or indirectly include this file:

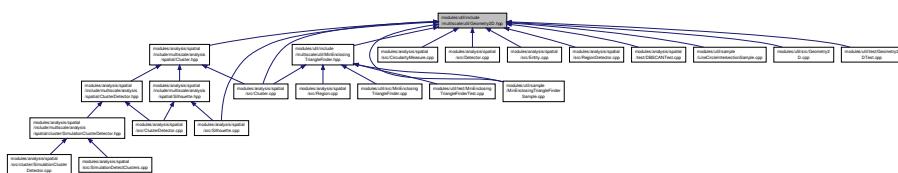

Classes

- class [multiscale::Geometry2D](#)


Two-dimensional geometric operations.

Namespaces


- namespace [multiscale](#)

8.58 modules/util/include/multiscale/util/iterator/LexicographicNumberIterator.hpp File Reference

```
#include "multiscale/util/NumberIterator.hpp"
#include <vector>
Include dependency graph for LexicographicNumberIterator.hpp:
```

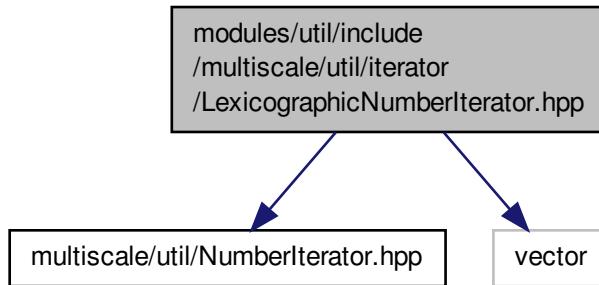

This graph shows which files directly or indirectly include this file:



Classes

- class [multiscale::LexicographicNumberIterator](#)


Iterator class starting at 1 and ending at the provided upper bound considering that each number is followed by an "—" .

Namespaces

- namespace [multiscale](#)

8.59 modules/util/include/multiscale/util/iterator/NumberIteratorType.hpp File Reference

This graph shows which files directly or indirectly include this file:

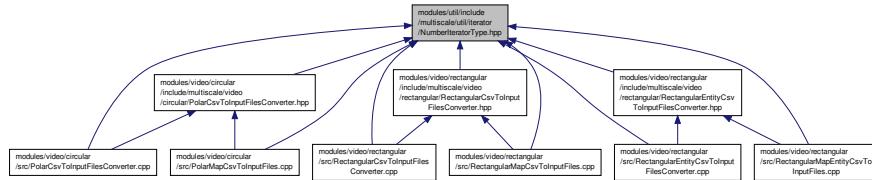

Namespaces

- namespace `multiscale`

Enumerations


- enum `multiscale::NumberIteratorType` { `multiscale::STANDARD` = 1, `multiscale::LEXICOGRAPHIC` = 2 }

The type of the number iterator.


8.60 modules/util/include/multiscale/util/iterator/StandardNumberIterator.hpp File Reference

```
#include "multiscale/util/NumberIterator.hpp"
```

Include dependency graph for `StandardNumberIterator.hpp`:

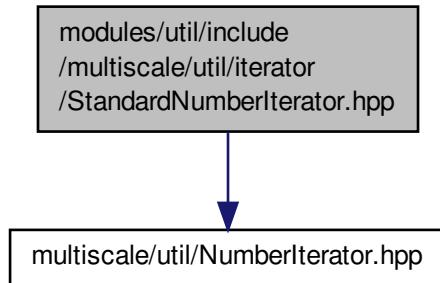

This graph shows which files directly or indirectly include this file:

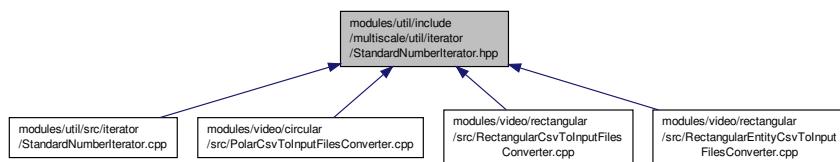

Classes

- class [multiscale::StandardNumberIterator](#)


Iterator class starting at 1 and iterating over all natural numbers until the provided upper bound is reached.

Namespaces


- namespace [multiscale](#)

8.61 modules/util/include/multiscale/util/MinEnclosingTriangleFinder.hpp File Reference

#include "multiscale/util/Geometry2D.hpp"
 Include dependency graph for MinEnclosingTriangleFinder.hpp:

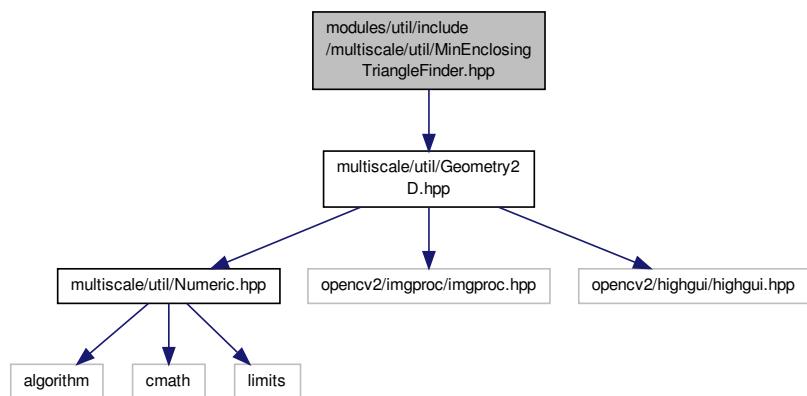

This graph shows which files directly or indirectly include this file:

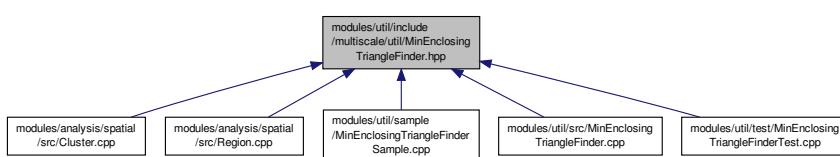

Classes


- class [multiscale::MinEnclosingTriangleFinder](#)
Class for computing the minimum area enclosing triangle for a given polygon.

Namespaces

- namespace `multiscale`

8.62 modules/util/include/multiscale/util/NumberIterator.hpp File Reference

This graph shows which files directly or indirectly include this file:



Classes


- class `multiscale::NumberIterator`

Namespaces


- namespace `multiscale`

8.63 modules/util/include/multiscale/util/Numeric.hpp File Reference

```
#include <algorithm>
#include <cmath>
#include <limits>
Include dependency graph for Numeric.hpp
```

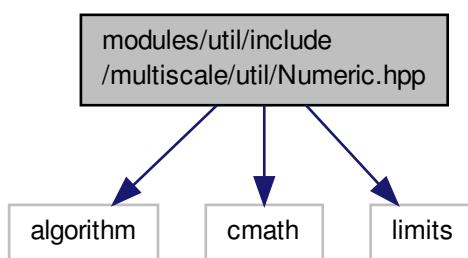

This graph shows which files directly or indirectly include this file:

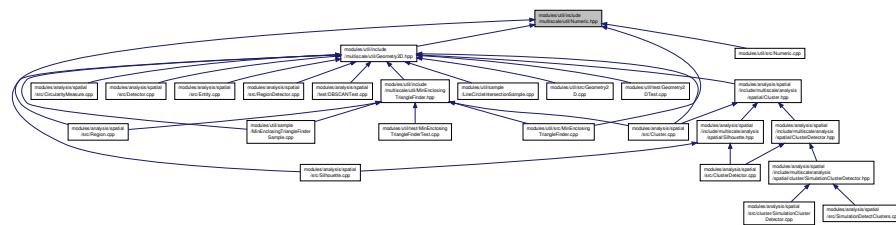

Classes

- class multiscale::Numeric


Class for manipulating numbers (shorts, ints, floats, doubles etc.)

Namespaces

- namespace `multiscale`

8.64 modules/util/include/multiscale/util/NumericRangeManipulator.hpp File Reference

This graph shows which files directly or indirectly include this file:

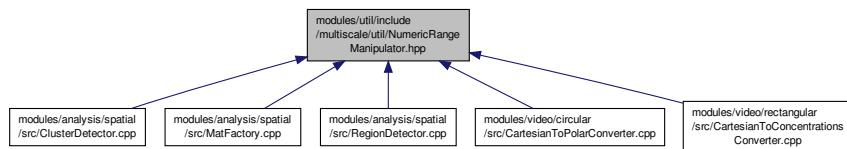

Classes

- class `multiscale::NumericRangeManipulator`

Operations for ranges of numeric values.


Namespaces

- namespace `multiscale`


8.65 modules/util/include/multiscale/util/RGBColourGenerator.hpp File Reference

```
#include <string>
#include "opencv2/imgproc/imgproc.hpp"
#include "opencv2/highgui/highgui.hpp"
```

Include dependency graph for RGBColourGenerator.hpp:

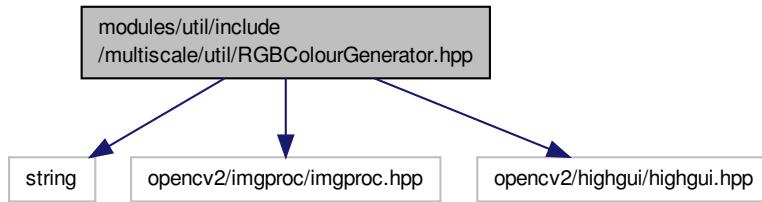

This graph shows which files directly or indirectly include this file:

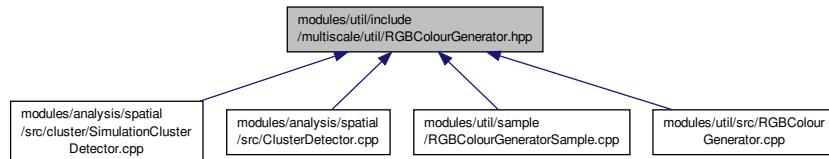

Classes

- class [multiscale::RGBColourGenerator](#)

Generate a RGB colour.


Namespaces

- namespace [multiscale](#)


8.66 modules/util/include/multiscale/util/StringManipulator.hpp File Reference

```
#include <string>
#include <vector>
#include <sstream>
```

Include dependency graph for StringManipulator.hpp:

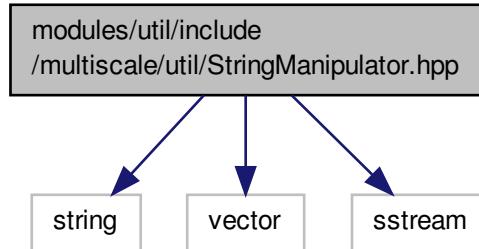

This graph shows which files directly or indirectly include this file:



Classes

- class [multiscale::StringManipulator](#)

Class for manipulating strings.


Namespaces

- namespace [multiscale](#)

8.67 modules/util/sample/LineCircleIntersectionSample.cpp File Reference

```
#include "multiscale/util/Geometry2D.hpp"
#include <iostream>
```

Include dependency graph for LineCircleIntersectionSample.cpp:

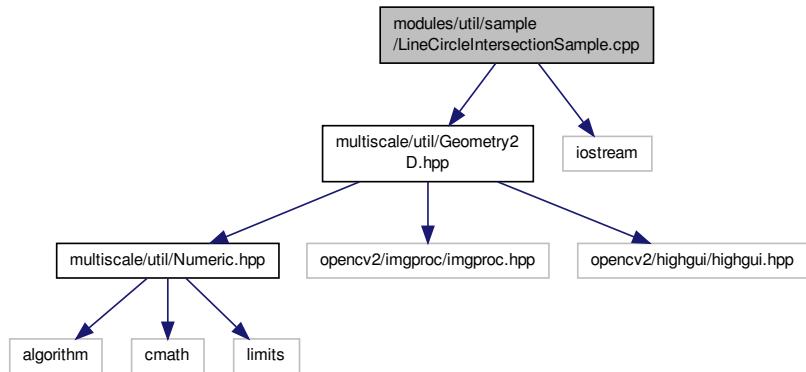

Functions

- void [printPoints](#) (const vector< Point2f > &points)
- int [main](#) ()


8.67.1 Function Documentation

8.67.1.1 int main ()

Definition at line 22 of file LineCircleIntersectionSample.cpp.

References [printPoints\(\)](#).

Here is the call graph for this function:




8.67.1.2 void printPoints (const vector< Point2f > & points)

Definition at line 12 of file LineCircleIntersectionSample.cpp.

Referenced by [main\(\)](#).

Here is the caller graph for this function:




8.68 modules/util/sample/MinEnclosingTriangleFinderSample.cpp File Reference

```

#include "multiscale/exception/ExceptionHandler.hpp"
#include "multiscale/util/Geometry2D.hpp"
#include "multiscale/util/MinEnclosingTriangleFinder.hpp"
#include <iostream>
  
```

Include dependency graph for MinEnclosingTriangleFinderSample.cpp:

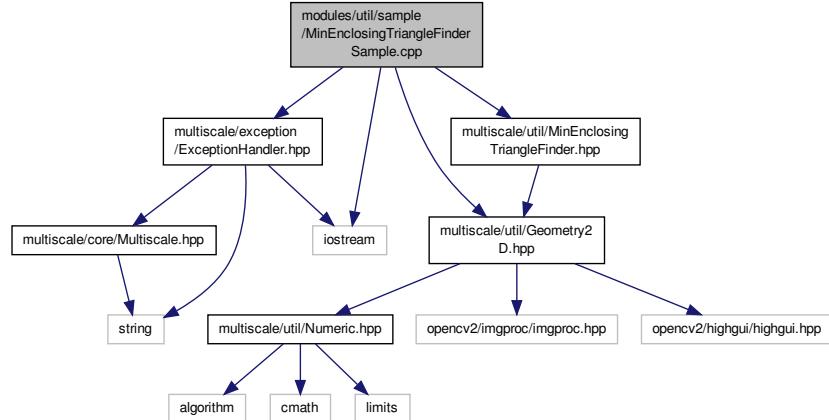

Functions

- `vector< Point2f > generateRandomSetOf2DPoints (int nrOfPoints)`
- `void printPolygon (const vector< Point2f > &points)`
- `void outputMinEnclosingTriangleFinderResults (const vector< Point2f > &minEnclosingTriangle, const vector< Point2f > &points)`
- `bool arePointsEnclosed (const vector< Point2f > &points, const vector< Point2f > &triangle)`
- `bool isTriangleTouchingPolygon (const vector< Point2f > &convexPolygon, const vector< Point2f > &triangle)`
- `bool isOneEdgeFlush (const vector< Point2f > &convexPolygon, const vector< Point2f > &triangle)`
- `bool isValidTriangle (const vector< Point2f > &points, const vector< Point2f > &triangle)`
- `void runMinEnclosingTriangleFinder (const vector< Point2f > &points)`
- `void runMinEnclosingTriangleFinderUsingRandomPolygons ()`
- `void runMinEnclosingTriangleFinder ()`
- `int main (int argc, char **argv)`

Variables

- const string `WIN_MIN_AREA_TRIANGLE` = "Minimum area enclosing triangle"
- const int `KEY_ESC` = 27
- const int `RADIUS` = 1
- const int `LINE_THICKNESS` = 50
- const int `NR RAND POLYGONS` = 50
- const int `MAX_POLYGON_POINTS` = 100
- const int `POLYGON_POINT_X_MAX` = 500
- const int `POLYGON_POINT_Y_MAX` = 500
- const double `POINT_IN_TRIANGLE_THRESH` = 1E-4

8.68.1 Function Documentation


8.68.1.1 bool arePointsEnclosed (const vector< Point2f > & points, const vector< Point2f > & triangle)

Definition at line 78 of file MinEnclosingTriangleFinderSample.cpp.

References `POINT_IN_TRIANGLE_THRESH`.

Referenced by `isValidTriangle()`.

Here is the caller graph for this function:




8.68.1.2 vector<Point2f> generateRandomSetOf2DPoints (int nrOfPoints)

Definition at line 26 of file MinEnclosingTriangleFinderSample.cpp.

References `POLYGON_POINT_X_MAX`, and `POLYGON_POINT_Y_MAX`.

Referenced by `runMinEnclosingTriangleFinderUsingRandomPolygons()`.

Here is the caller graph for this function:




8.68.1.3 bool isOneEdgeFlush (const vector< Point2f > & convexPolygon, const vector< Point2f > & triangle)

Definition at line 116 of file MinEnclosingTriangleFinderSample.cpp.

Referenced by `isValidTriangle()`.

Here is the caller graph for this function:




8.68.1.4 bool isTriangleTouchingPolygon (const vector< Point2f > & convexPolygon, const vector< Point2f > & triangle)

Definition at line 93 of file MinEnclosingTriangleFinderSample.cpp.

Referenced by isValidTriangle().

Here is the caller graph for this function:




8.68.1.5 bool isValidTriangle (const vector< Point2f > & points, const vector< Point2f > & triangle)

Definition at line 134 of file MinEnclosingTriangleFinderSample.cpp.


References arePointsEnclosed(), isOneEdgeFlush(), and isTriangleTouchingPolygon().

Referenced by runMinEnclosingTriangleFinder().

Here is the call graph for this function:

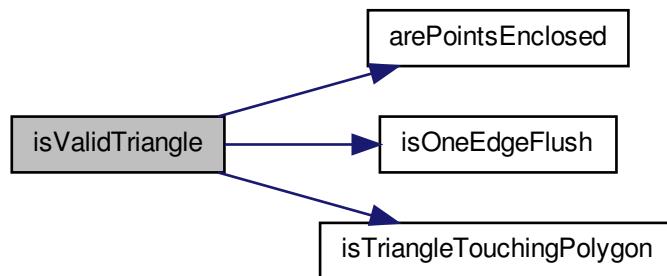

Here is the caller graph for this function:




8.68.1.6 int main (int argc, char ** argv)

Definition at line 189 of file MinEnclosingTriangleFinderSample.cpp.

References runMinEnclosingTriangleFinder().

Here is the call graph for this function:

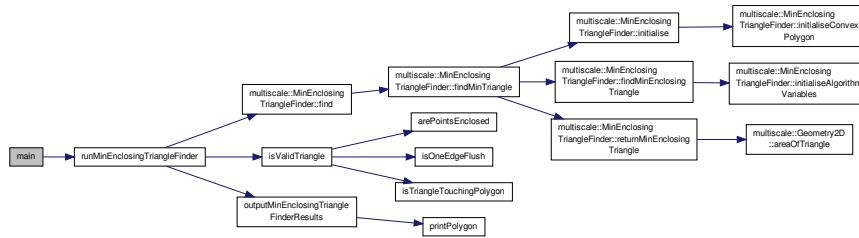


8.68.1.7 void outputMinEnclosingTriangleFinderResults (const vector< Point2f > & minEnclosingTriangle, const vector< Point2f > & points)

Definition at line 54 of file MinEnclosingTriangleFinderSample.cpp.


References LINE_THICKNESS, POLYGON_POINT_X_MAX, POLYGON_POINT_Y_MAX, printPolygon(), RADIUS, and WIN_MIN_AREA_TRIANGLE.

Referenced by runMinEnclosingTriangleFinder().

Here is the call graph for this function:



Here is the caller graph for this function:




8.68.1.8 void printPolygon (const vector< Point2f > & points)

Definition at line 38 of file MinEnclosingTriangleFinderSample.cpp.

Referenced by outputMinEnclosingTriangleFinderResults().

Here is the caller graph for this function:




8.68.1.9 void runMinEnclosingTriangleFinder (const vector< Point2f > & points)

Definition at line 147 of file MinEnclosingTriangleFinderSample.cpp.


References multiscale::MinEnclosingTriangleFinder::find(), isValidTriangle(), and outputMinEnclosingTriangleFinderResults().

Referenced by main(), and runMinEnclosingTriangleFinderUsingRandomPolygons().

Here is the call graph for this function:

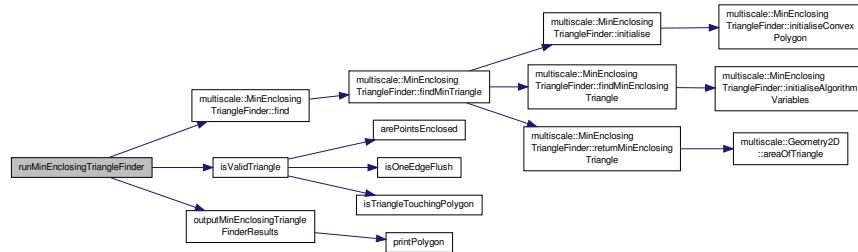

Here is the caller graph for this function:




8.68.1.10 void runMinEnclosingTriangleFinder()

Definition at line 184 of file MinEnclosingTriangleFinderSample.cpp.

References runMinEnclosingTriangleFinderUsingRandomPolygons().

Here is the call graph for this function:

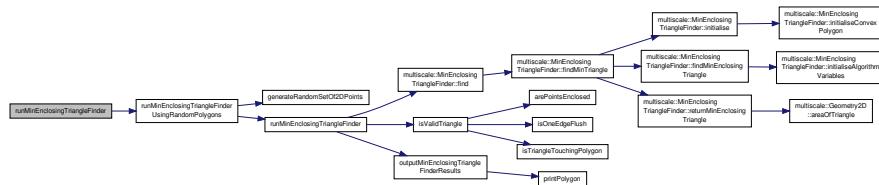


8.68.1.11 void runMinEnclosingTriangleFinderUsingRandomPolygons()

Definition at line 163 of file MinEnclosingTriangleFinderSample.cpp.


References generateRandomSetOf2DPoints(), KEY_ESC, MAX_POLYGON_POINTS, and runMinEnclosingTriangleFinder().

Referenced by runMinEnclosingTriangleFinder().

Here is the call graph for this function:

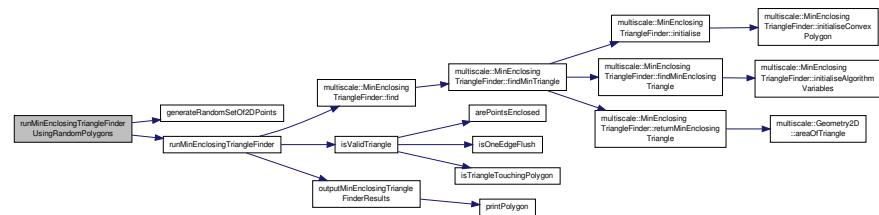

Here is the caller graph for this function:



8.68.2 Variable Documentation

8.68.2.1 `const int KEY_ESC = 27`

Definition at line 13 of file MinEnclosingTriangleFinderSample.cpp.

Referenced by `multiscale::analysis::Detector::detectInDebugMode()`, and `runMinEnclosingTriangleFinderUsingRandomPolygons()`.

8.68.2.2 `const int LINE_THICKNESS = 50`

Definition at line 16 of file MinEnclosingTriangleFinderSample.cpp.

Referenced by `outputMinEnclosingTriangleFinderResults()`.

8.68.2.3 `const int MAX_POLYGON_POINTS = 100`

Definition at line 18 of file MinEnclosingTriangleFinderSample.cpp.

Referenced by `runMinEnclosingTriangleFinderUsingRandomPolygons()`.

8.68.2.4 `const int NR RAND POLYGONS = 50`

Definition at line 17 of file MinEnclosingTriangleFinderSample.cpp.

8.68.2.5 `const double POINT_IN_TRIANGLE_THRESH = 1E-4`

Definition at line 22 of file MinEnclosingTriangleFinderSample.cpp.

Referenced by `arePointsEnclosed()`, and `multiscaletest::MinEnclosingTriangleFinderTest::ArePointsEnclosed()`.

8.68.2.6 `const int POLYGON_POINT_X_MAX = 500`

Definition at line 19 of file MinEnclosingTriangleFinderSample.cpp.

Referenced by `generateRandomSetOf2DPoints()`, and `outputMinEnclosingTriangleFinderResults()`.

8.68.2.7 `const int POLYGON_POINT_Y_MAX = 500`

Definition at line 20 of file MinEnclosingTriangleFinderSample.cpp.

Referenced by `generateRandomSetOf2DPoints()`, and `outputMinEnclosingTriangleFinderResults()`.

8.68.2.8 const int RADIUS = 1

Definition at line 15 of file MinEnclosingTriangleFinderSample.cpp.

Referenced by outputMinEnclosingTriangleFinderResults().

8.68.2.9 const string WIN_MIN_AREA_TRIANGLE = "Minimum area enclosing triangle"


Definition at line 11 of file MinEnclosingTriangleFinderSample.cpp.

Referenced by outputMinEnclosingTriangleFinderResults().

8.69 modules/util/sample/RGBColourGeneratorSample.cpp File Reference

```
#include "multiscale/util/RGBColourGenerator.hpp"
#include <iostream>
```

Include dependency graph for RGBColourGeneratorSample.cpp:

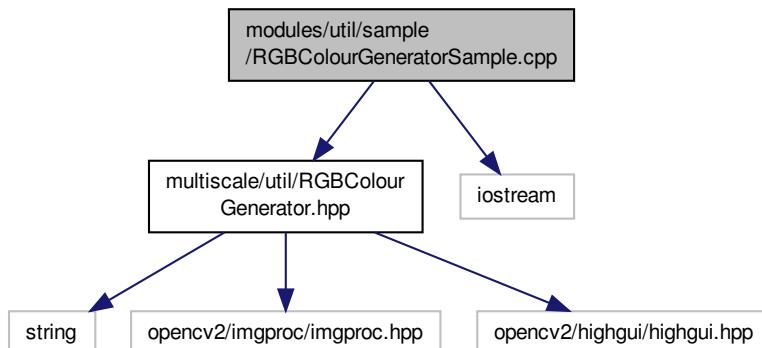

Functions

- int [main \(\)](#)


8.69.1 Function Documentation

8.69.1.1 int main ()

Definition at line 8 of file RGBColourGeneratorSample.cpp.


References multiscale::RGBColourGenerator::generate().

Here is the call graph for this function:



8.70 modules/util/src/Geometry2D.cpp File Reference


```
#include "multiscale/util/Geometry2D.hpp"
#include <algorithm>
#include <cmath>
Include dependency graph for Geometry2D.cpp:
```

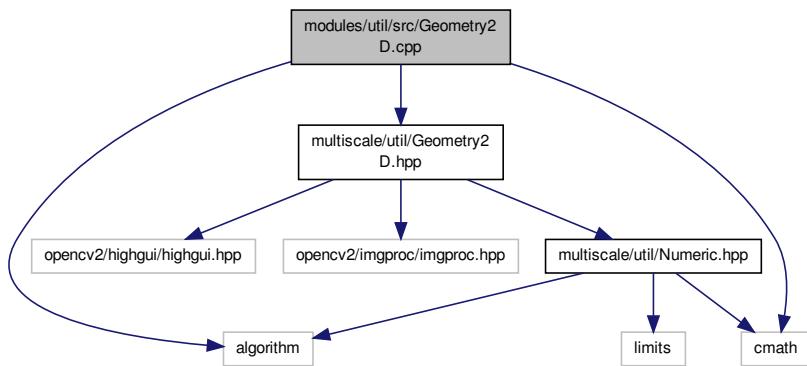

8.71 modules/util/src/iterator/LexicographicNumberIterator.cpp File Reference

```
#include "multiscale/util/iterator/LexicographicNumberIterator.hpp"
```


Include dependency graph for LexicographicNumberIterator.cpp:

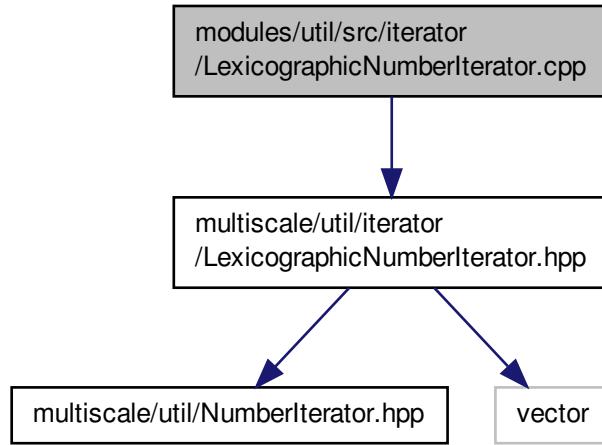

8.72 modules/util/src/iterator/StandardNumberIterator.cpp File Reference

```
#include "multiscale/util/iterator/StandardNumberIterator.hpp"
```


Include dependency graph for StandardNumberIterator.cpp:

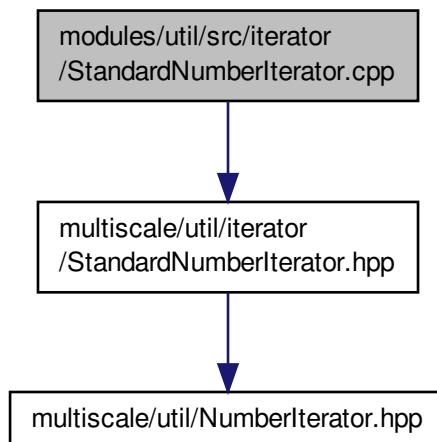

8.73 modules/util/src/MinEnclosingTriangleFinder.cpp File Reference


```
#include "multiscale/exception/MinEnclosingTriangleFinderException.hpp"
```

```
#include "multiscale/util/MinEnclosingTriangleFinder.hpp"
#include "multiscale/util/Numeric.hpp"
#include <cassert>
#include <iostream>
#include <limits>
Include dependency graph for MinEnclosingTriangleFinder.cpp:
```

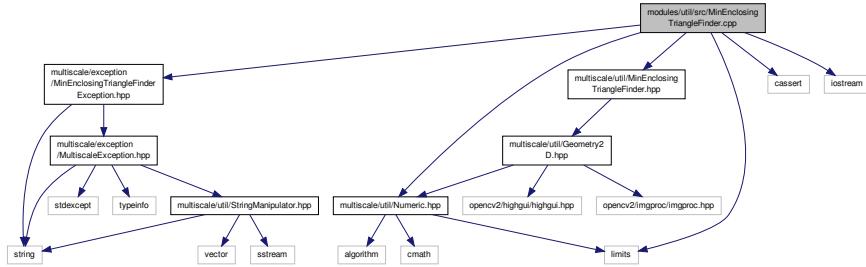

8.74 modules/util/src/NumberIterator.cpp File Reference


```
#include "multiscale/util/NumberIterator.hpp"
Include dependency graph for NumberIterator.cpp:
```

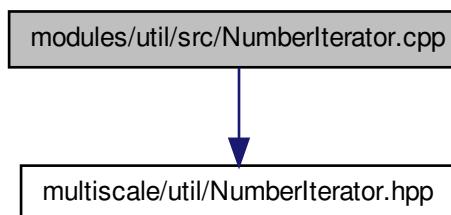

8.75 modules/util/src/Numeric.cpp File Reference

```
#include "multiscale/util/Numeric.hpp"
```

Include dependency graph for Numeric.cpp:

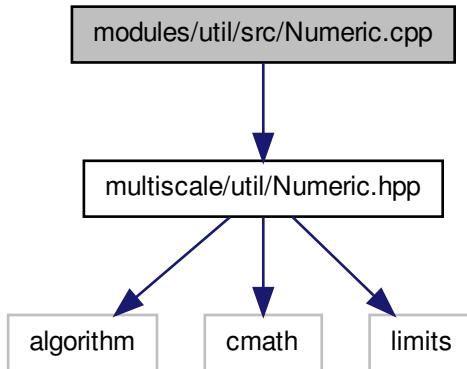


8.76 modules/util/src/RGBColourGenerator.cpp File Reference

```

#include "multiscale/util/RGBColourGenerator.hpp"
#include <cmath>
#include <iomanip>
#include <cassert>
#include <sstream>
  
```

Include dependency graph for RGBColourGenerator.cpp:

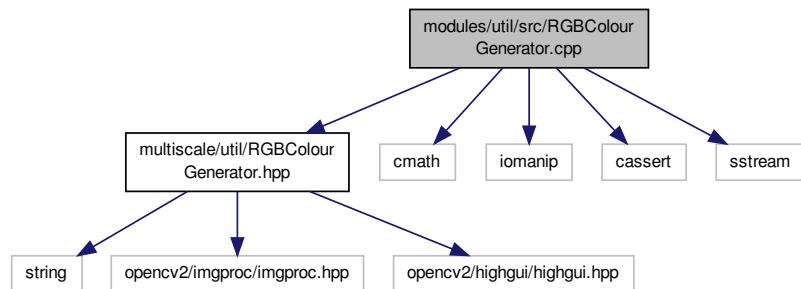


8.77 modules/util/src/StringManipulator.cpp File Reference

```

#include "multiscale/util/StringManipulator.hpp"
#include <boost/algorithm/string/split.hpp>
#include <boost/algorithm/string.hpp>
  
```

Include dependency graph for StringManipulator.cpp:

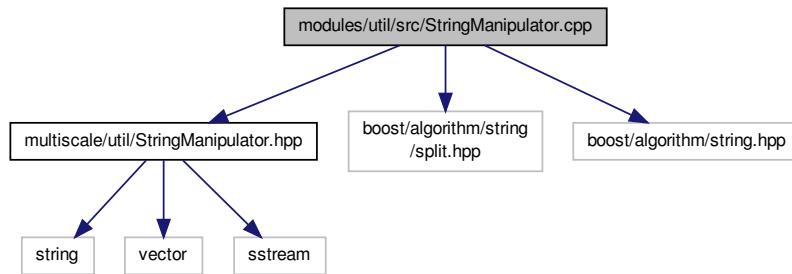


8.78 modules/util/test/Geometry2DTest.cpp File Reference

```

#include "multiscale/core/MultiscaleTest.hpp"
#include "multiscale/util/Geometry2D.hpp"
#include <limits>
#include <vector>
  
```

Include dependency graph for Geometry2DTest.cpp:

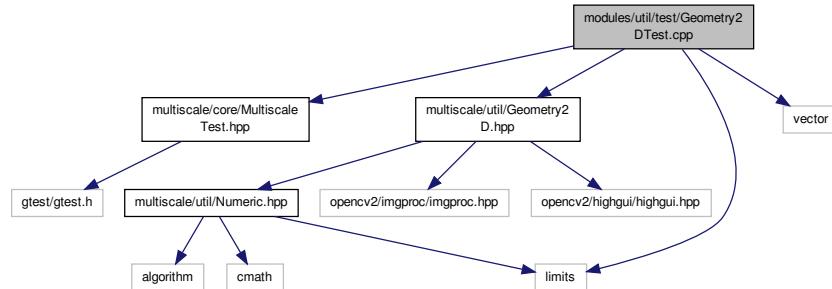

Functions

- [TEST \(Geometry2D, TriangleArea\)](#)
- [TEST \(Geometry2D, PointOnLineSegment\)](#)
- int [main \(int argc, char **argv\)](#)

Variables

- const double [DOUBLE_COMP_ERROR](#) = 1E-6

8.78.1 Function Documentation

8.78.1.1 int main (int argc, char ** argv)

Definition at line 32 of file Geometry2DTest.cpp.

8.78.1.2 TEST (Geometry2D , TriangleArea)

Definition at line 15 of file Geometry2DTest.cpp.

References DOUBLE_COMP_ERROR.

8.78.1.3 TEST (Geometry2D , PointOnLineSegment)

Definition at line 22 of file Geometry2DTest.cpp.

8.78.2 Variable Documentation


8.78.2.1 const double DOUBLE_COMP_ERROR = 1E-6

Definition at line 12 of file Geometry2DTest.cpp.

Referenced by TEST().

8.79 modules/util/test/MinEnclosingTriangleFinderTest.cpp File Reference

```
#include "multiscale/core/MultiscaleTest.hpp"
#include "multiscale/util/MinEnclosingTriangleFinder.hpp"
#include <limits>
#include <vector>
Include dependency graph for MinEnclosingTriangleFinderTest.cpp:
```

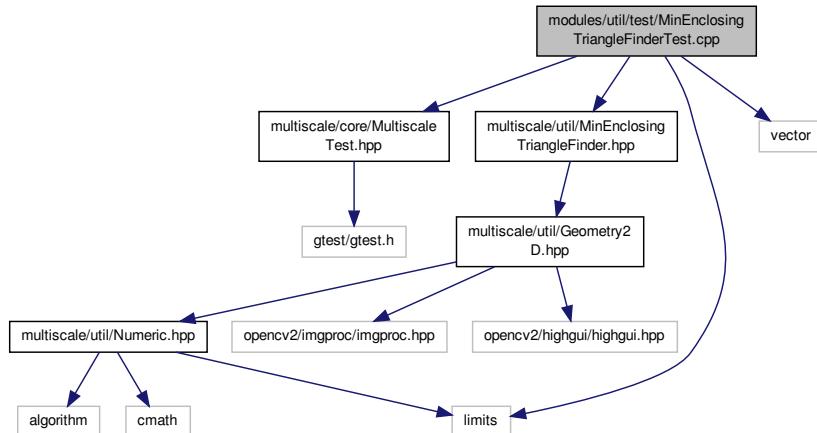

Classes

- class [multiscaletest::MinEnclosingTriangleFinderTest](#)
Class for testing the minimum enclosing triangle algorithm.

Namespaces

- namespace [multiscaletest](#)

Functions

- `TEST_F (MinEnclosingTriangleFinderTest, TestNoPoints)`
- `TEST_F (MinEnclosingTriangleFinderTest, TestNegativeCoordinates)`
- `TEST_F (MinEnclosingTriangleFinderTest, TestVaryingNumberOfPoints)`
- `TEST_F (MinEnclosingTriangleFinderTest, TestRandomPoints)`
- `int main (int argc, char **argv)`

8.79.1 Function Documentation

8.79.1.1 `int main (int argc, char ** argv)`

Definition at line 328 of file `MinEnclosingTriangleFinderTest.cpp`.

8.79.1.2 `TEST_F (MinEnclosingTriangleFinderTest , TestNoPoints)`

Definition at line 304 of file `MinEnclosingTriangleFinderTest.cpp`.

8.79.1.3 `TEST_F (MinEnclosingTriangleFinderTest , TestNegativeCoordinates)`

Definition at line 308 of file `MinEnclosingTriangleFinderTest.cpp`.

8.79.1.4 `TEST_F (MinEnclosingTriangleFinderTest , TestVaryingNumberOfPoints)`


Definition at line 314 of file `MinEnclosingTriangleFinderTest.cpp`.

8.79.1.5 `TEST_F (MinEnclosingTriangleFinderTest , TestRandomPoints)`


Definition at line 322 of file `MinEnclosingTriangleFinderTest.cpp`.

8.80 modules/video/circular/include/multiscale/video/circular/AnnularSector.hpp File Reference

```
#include <string>
Include dependency graph for AnnularSector.hpp:
```

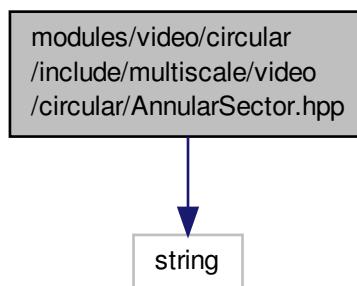

This graph shows which files directly or indirectly include this file:

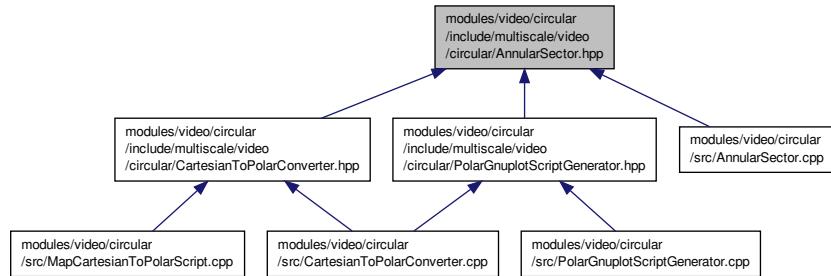

Classes

- class [multiscale::video::AnnularSector](#)

An annular sector is the basic element in the considered circular geometry.


Namespaces

- namespace [multiscale](#)
- namespace [multiscale::video](#)


8.81 modules/video/circular/include/multiscale/video/circular/CartesianToPolarConverter.hpp File Reference

```
#include "multiscale/video/circular/AnnularSector.hpp"
#include <string>
#include <vector>
```

Include dependency graph for `CartesianToPolarConverter.hpp`:

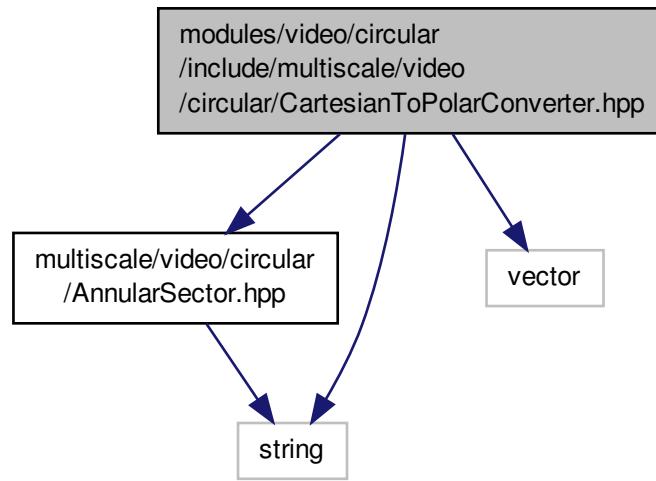

This graph shows which files directly or indirectly include this file:

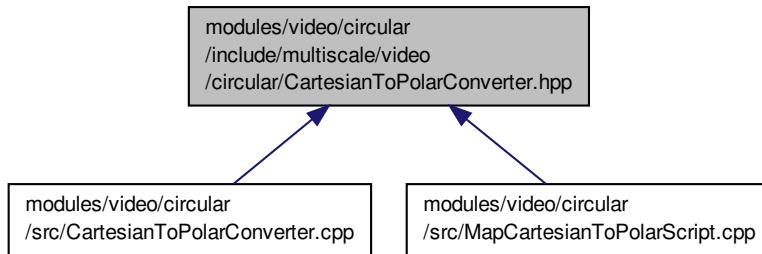

Classes

- class [multiscale::video::CartesianToPolarConverter](#)


Converter from the rectangular geometry grid cells to annular sectors.

Namespaces


- namespace [multiscale](#)
- namespace [multiscale::video](#)

8.82 modules/video/circular/include/multiscale/video/circular/PolarCsvToInputFiles-Converter.hpp File Reference

```
#include "multiscale/util/NumberIterator.hpp"
#include "multiscale/util/iterator/NumberIteratorType.hpp"
#include <string>
#include <vector>
Include dependency graph for PolarCsvToInputFilesConverter.hpp:
```

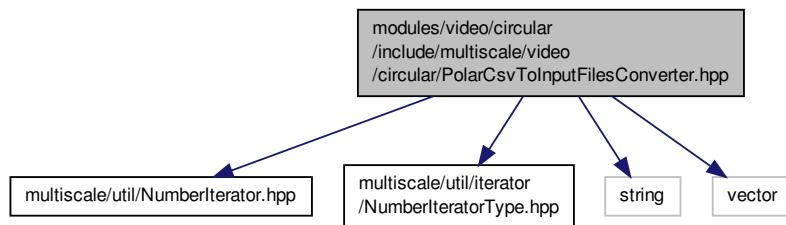

This graph shows which files directly or indirectly include this file:

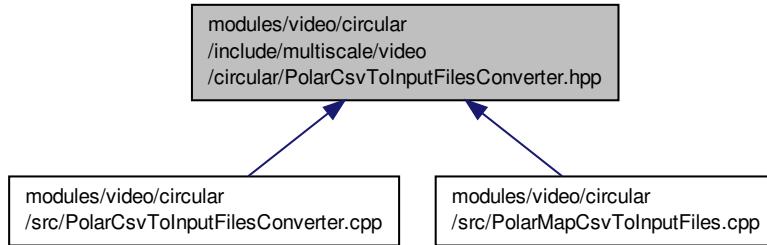

Classes

- class [multiscale::video::PolarCsvToInputFilesConverter](#)
Csv file to input file converter considering polar coordinates.


Namespaces

- namespace [multiscale](#)
- namespace [multiscale::video](#)


8.83 modules/video/circular/include/multiscale/video/circular/PolarGnuplotScriptGenerator.hpp File Reference

```
#include "multiscale/video/circular/AnnularSector.hpp"
```

```
#include <vector>
Include dependency graph for PolarGnuplotScriptGenerator.hpp:
```

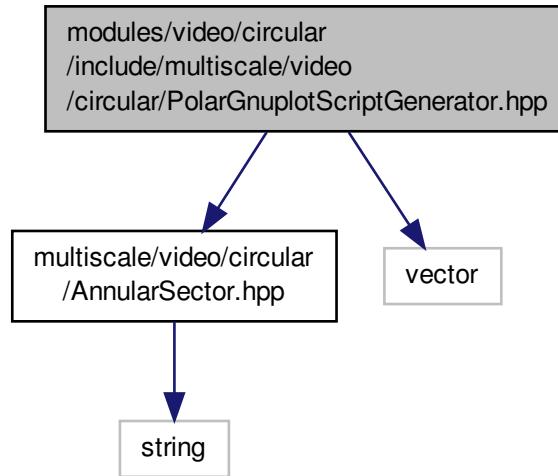

This graph shows which files directly or indirectly include this file:

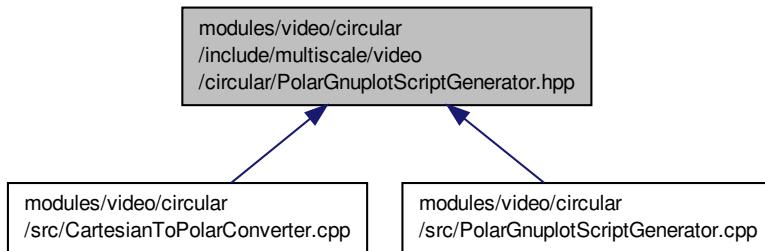

Classes


- class [multiscale::video::PolarGnuplotScriptGenerator](#)
Gnuplot script generator from the provided annular sectors.

Namespaces

- namespace [multiscale](#)
- namespace [multiscale::video](#)

8.84 modules/video/circular/src/AnnularSector.cpp File Reference

```
#include "multiscale/video/circular/AnnularSector.hpp"
#include "multiscale/util/StringManipulator.hpp"
#include <sstream>
Include dependency graph for AnnularSector.cpp:
```

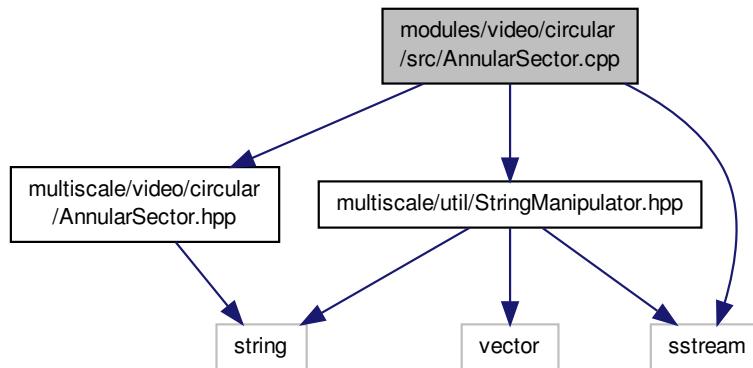

Variables

- `const string SEPARATOR = " "`

8.84.1 Variable Documentation

8.84.1.1 `const string SEPARATOR = " "`


Definition at line 6 of file `AnnularSector.cpp`.

Referenced by `multiscale::video::AnnularSector::toString()`.

8.85 modules/video/circular/src/CartesianToPolarConverter.cpp File Reference

```
#include "multiscale/exception/CartesianToPolarConverterException.hpp"
#include "multiscale/video/circular/CartesianToPolarConverter.hpp"
#include "multiscale/video/circular/PolarGnuplotScriptGenerator.hpp"
#include "multiscale/util/NumericRangeManipulator.hpp"
#include <iostream>
#include <fstream>
#include <exception>
#include <cassert>
#include <vector>
```

Include dependency graph for `CartesianToPolarConverter.cpp`:

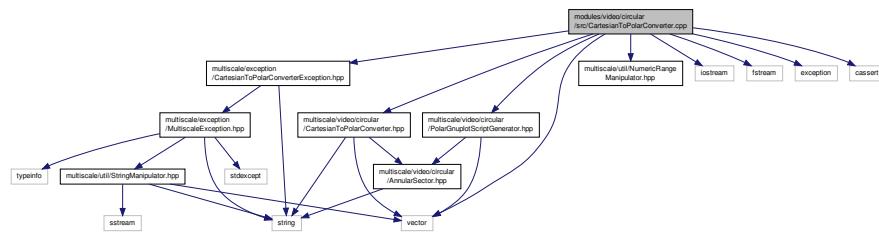


8.86 modules/video/circular/src/MapCartesianToPolarScript.cpp File Reference

```

#include "multiscale/core/Multiscale.hpp"
#include "multiscale/video/circular/CartesianToPolarConverter.hpp"
#include "multiscale/exception/ExceptionHandler.hpp"
#include <boost/program_options.hpp>
#include <iostream>
  
```

Include dependency graph for `MapCartesianToPolarScript.cpp`:

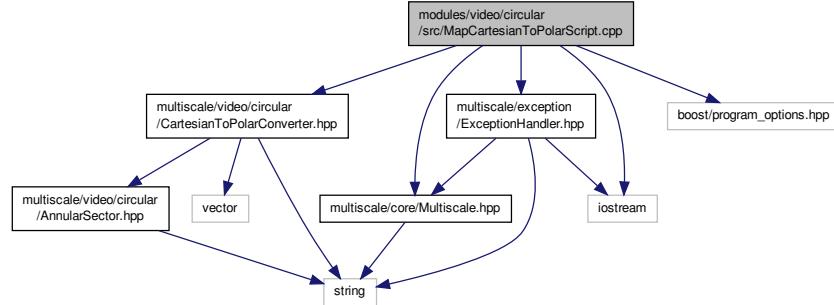

Functions

- `po::variables_map initArgumentsConfig (po::options_description &usageDescription, int argc, char **argv)`
- `void printHelpInformation (const po::variables_map &vm, const po::options_description &usageDescription)`
- `void printWrongParameters ()`
- `bool isValidOutputType (const po::variables_map &vm, bool &isScript)`
- `bool areValidParameters (string &inputFilepath, string &outputFilename, bool &isScript, int argc, char **argv)`
- `int main (int argc, char **argv)`


8.86.1 Function Documentation

8.86.1.1 `bool areValidParameters (string & inputFilepath, string & outputFilename, bool & isScript, int argc, char ** argv)`

Definition at line 100 of file `MapCartesianToPolarScript.cpp`.

References `initArgumentsConfig()`, `isValidOutputType()`, and `printHelpInformation()`.

Here is the call graph for this function:

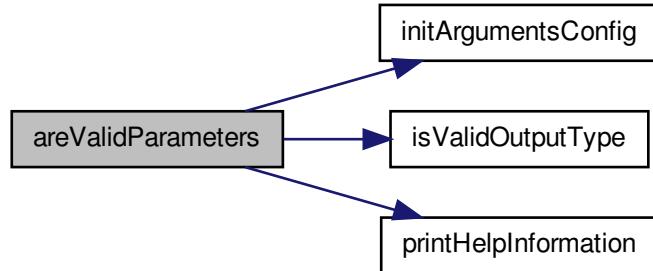

8.86.1.2 `po::variables_map initArgumentsConfig (po::options_description & usageDescription, int argc, char ** argv)`

Definition at line 52 of file MapCartesianToPolarScript.cpp.

8.86.1.3 `bool isValidOutputType (const po::variables_map & vm, bool & isScript)`

Definition at line 79 of file MapCartesianToPolarScript.cpp.

References multiscale::ERR_MSG.

Referenced by areValidParameters().

Here is the caller graph for this function:




8.86.1.4 `int main (int argc, char ** argv)`

Definition at line 126 of file MapCartesianToPolarScript.cpp.

References areValidParameters(), multiscale::video::CartesianToPolarConverter::convert(), multiscale::ERR_CODE, and printWrongParameters().

Here is the call graph for this function:

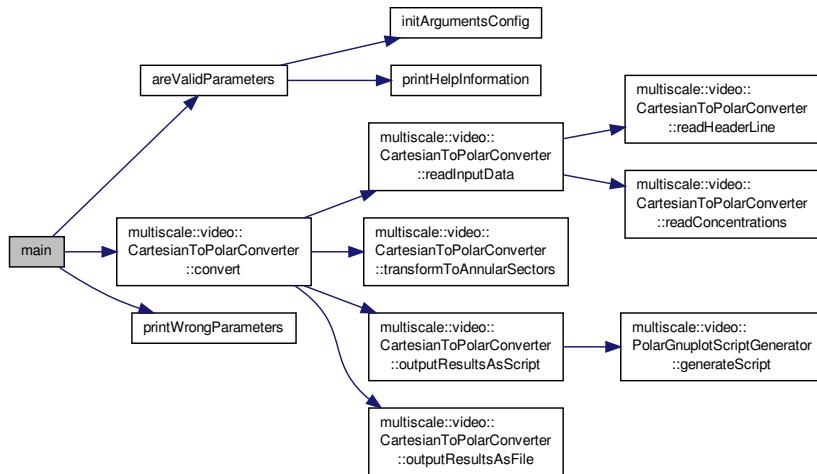

8.86.1.5 void printHelpInformation (const po::variables_map & vm, const po::options_description & usageDescription)

Definition at line 68 of file MapCartesianToPolarScript.cpp.

8.86.1.6 void printWrongParameters ()

Definition at line 73 of file MapCartesianToPolarScript.cpp.

References multiscale::ERR_MSG.


8.87 modules/video/circular/src/PolarCsvToInputFilesConverter.cpp File Reference

```

#include "multiscale/exception/PolarCsvToInputFilesConverterException.hpp"
#include "multiscale/video/circular/PolarCsvToInputFilesConverter.hpp"
#include "multiscale/util/iterator/NumberIteratorType.hpp"
#include "multiscale/util/iterator/LexicographicNumberIterator.hpp"
#include "multiscale/util/iterator/StandardNumberIterator.hpp"
#include "multiscale/util/StringManipulator.hpp"
#include <cmath>
#include <cassert>
#include <cstdlib>
#include <fstream>
#include <limits>
#include <string>

```

Include dependency graph for PolarCsvToInputFilesConverter.cpp:

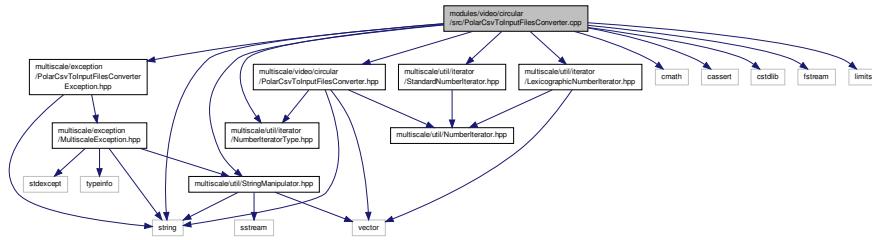


8.88 modules/video/circular/src/PolarGnuplotScriptGenerator.cpp File Reference

```

#include "multiscale/video/circular/PolarGnuplotScriptGenerator.hpp"
#include "multiscale/util/StringManipulator.hpp"
#include <cassert>
#include <iostream>
#include <vector>
#include <sstream>
#include <fstream>
  
```

Include dependency graph for PolarGnuplotScriptGenerator.cpp:

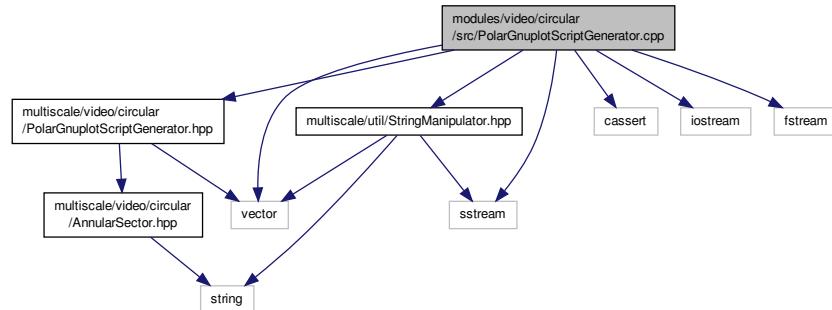


8.89 modules/video/circular/src/PolarMapCsvToInputFiles.cpp File Reference

```

#include "multiscale/core/Multiscale.hpp"
#include "multiscale/video/circular/PolarCsvToInputFilesConverter.hpp"
#include "multiscale/util/iterator/NumberIteratorType.hpp"
#include "multiscale/exception/ExceptionHandler.hpp"
#include <boost/program_options.hpp>
#include <iostream>
  
```

Include dependency graph for PolarMapCsvToInputFiles.cpp:

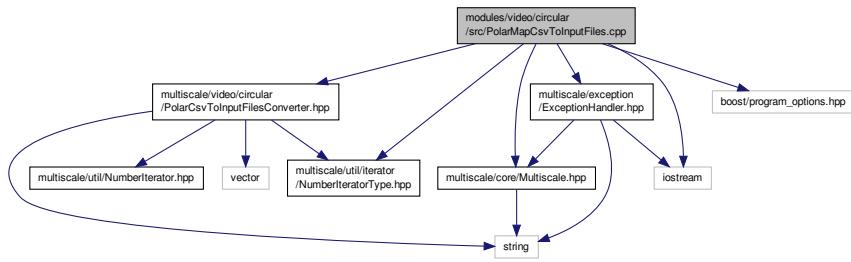

Functions

- `po::variables_map initArgumentsConfig (po::options_description &usageDescription, int argc, char **argv)`
- `void printHelpInformation (const po::variables_map &vm, const po::options_description &usageDescription)`
- `void printWrongParameters ()`
- `void setNumberIteratorType (const po::variables_map &vm, NumberIteratorType &numberIteratorType)`
- `void setSelectedConcentrationIndex (const po::variables_map &vm, unsigned int &selectedConcentrationIndex)`
- `void setLogScaling (const po::variables_map &vm, bool &useLogScaling)`
- `bool isValidNrOfConcentrationsForPosition (const po::variables_map &vm, unsigned int &nrOfConcentrationsForPosition)`
- `bool areValidParameters (string &inputFilepath, string &outputFilename, unsigned int &nrOfConcentricCircles, unsigned int &nrOfSectors, unsigned int &nrOfConcentrationsForPosition, unsigned int &selectedConcentrationIndex, bool &useLogScaling, NumberIteratorType &numberIteratorType, int argc, char **argv)`
- `int main (int argc, char **argv)`


8.89.1 Function Documentation

8.89.1.1 `bool areValidParameters (string & inputFilepath, string & outputFilename, unsigned int & nrOfConcentricCircles, unsigned int & nrOfSectors, unsigned int & nrOfConcentrationsForPosition, unsigned int & selectedConcentrationIndex, bool & useLogScaling, NumberIteratorType & numberIteratorType, int argc, char ** argv)`

Definition at line 91 of file PolarMapCsvToInputFiles.cpp.

References `initArgumentsConfig()`, `isValidNrOfConcentrationsForPosition()`, `printHelpInformation()`, `setLogScaling()`, `setNumberIteratorType()`, and `setSelectedConcentrationIndex()`.

Here is the call graph for this function:

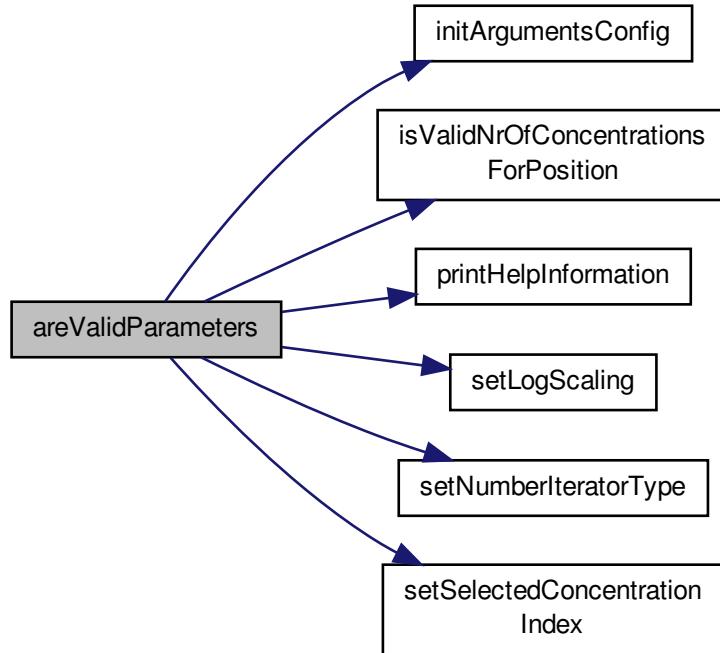

8.89.1.2 `po::variables_map initArgumentsConfig (po::options_description & usageDescription, int argc, char ** argv)`

Definition at line 32 of file PolarMapCsvToInputFiles.cpp.


8.89.1.3 `bool isValidNrOfConcentrationsForPosition (const po::variables_map & vm, unsigned int & nrOfConcentrationsForPosition)`

Definition at line 76 of file PolarMapCsvToInputFiles.cpp.

References multiscale::ERR_MSG.

Referenced by areValidParameters().

Here is the caller graph for this function:




8.89.1.4 int main (int argc, char ** argv)

Definition at line 138 of file PolarMapCsvToInputFiles.cpp.

References areValidParameters(), multiscale::video::PolarCsvToInputFilesConverter::convert(), multiscale::ERR_CODE, printWrongParameters(), and multiscale::STANDARD.

Here is the call graph for this function:

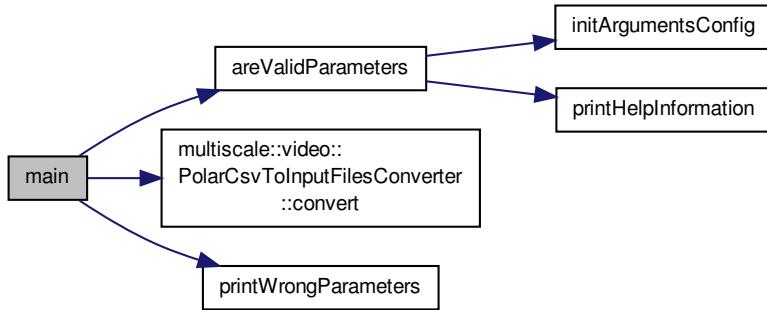

8.89.1.5 void printHelpInformation (const po::variables_map & vm, const po::options_description & usageDescription)

Definition at line 50 of file PolarMapCsvToInputFiles.cpp.

8.89.1.6 void printWrongParameters ()

Definition at line 55 of file PolarMapCsvToInputFiles.cpp.

References multiscale::ERR_MSG.

8.89.1.7 void setLogScaling (const po::variables_map & vm, bool & useLogScaling)

Definition at line 71 of file PolarMapCsvToInputFiles.cpp.

Referenced by areValidParameters().

Here is the caller graph for this function:




8.89.1.8 void setNumberIteratorType (const po::variables_map & vm, NumberIteratorType & numberIteratorType)

Definition at line 61 of file PolarMapCsvToInputFiles.cpp.

References multiscale::LEXICOGRAPHIC.

Referenced by areValidParameters().


Here is the caller graph for this function:

**8.89.1.9 void setSelectedConcentrationIndex (const po::variables_map & vm, unsigned int & selectedConcentrationIndex)**

Definition at line 66 of file PolarMapCsvToInputFiles.cpp.


Referenced by areValidParameters().

Here is the caller graph for this function:


**8.90 modules/video/rectangular/include/multiscale/video/rectangular/CartesianToConcentrations-Converter.hpp File Reference**

```
#include <string>
#include <vector>
```

Include dependency graph for `CartesianToConcentrationsConverter.hpp`:

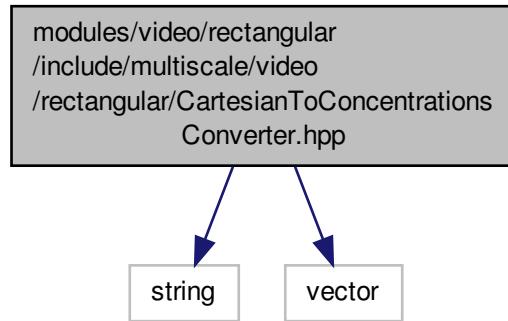

This graph shows which files directly or indirectly include this file:

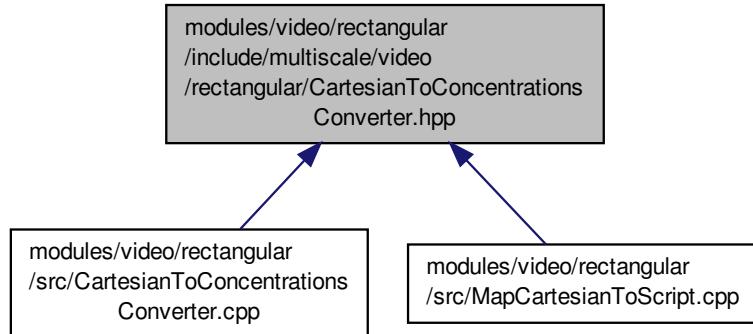

Classes

- class [multiscale::video::CartesianToConcentrationsConverter](#)


Scale the values of the rectangular geometry grid cells.

Namespaces


- namespace [multiscale](#)
- namespace [multiscale::video](#)

8.91 modules/video/rectangular/include/multiscale/video/rectangular/RectangularCsvToInputFilesConverter.hpp File Reference

```
#include "multiscale/util/NumberIterator.hpp"
#include "multiscale/util/iterator/NumberIteratorType.hpp"
#include <string>
#include <vector>
Include dependency graph for RectangularCsvToInputFilesConverter.hpp:
```

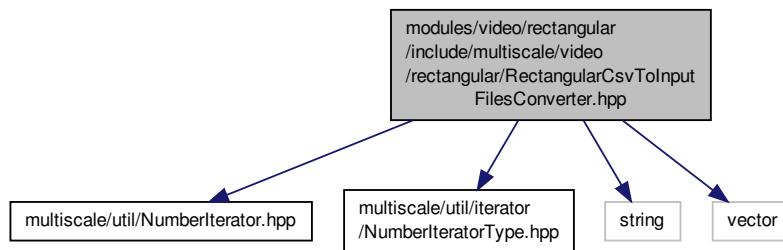

This graph shows which files directly or indirectly include this file:

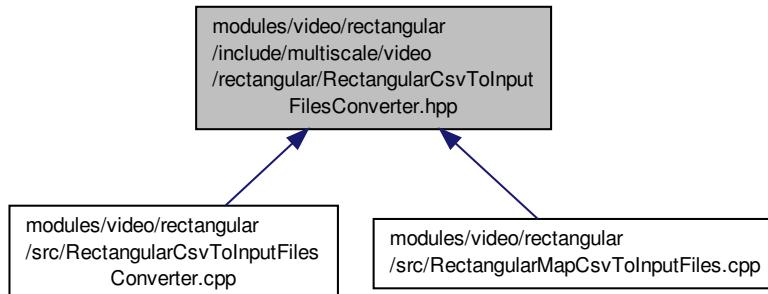

Classes


- class [multiscale::video::RectangularCsvToInputFilesConverter](#)

Csv file to input file converter considering cartesian coordinates.


Namespaces

- namespace [multiscale](#)
- namespace [multiscale::video](#)

```
#include "multiscale/util/NumberIterator.hpp"
#include "multiscale/util/iterator/NumberIteratorType.hpp"
#include <string>
#include <vector>
Include dependency graph for RectangularEntityCsvToInputFilesConverter.hpp:
```

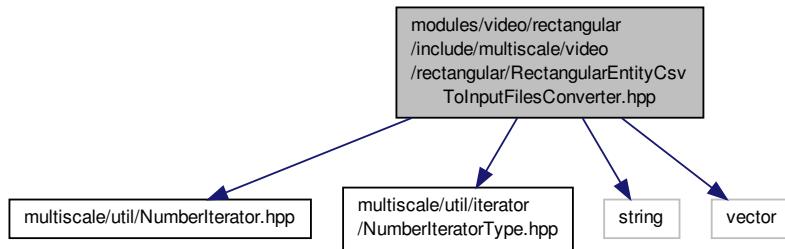

This graph shows which files directly or indirectly include this file:

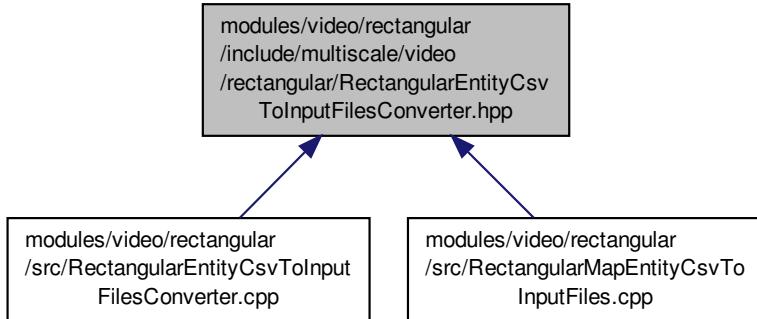

Classes


- class [multiscale::video::RectangularEntityCsvToInputFilesConverter](#)
Csv entity file to input file converter considering cartesian coordinates.

Namespaces


- namespace [multiscale](#)
- namespace [multiscale::video](#)

8.93 modules/video/rectangular/include/multiscale/video/rectangular/RectangularGnuplot-ScriptGenerator.hpp File Reference

```
#include <vector>
#include <string>
Include dependency graph for RectangularGnuplotScriptGenerator.hpp:
```

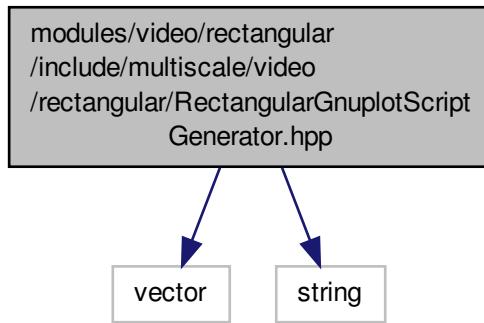

This graph shows which files directly or indirectly include this file:

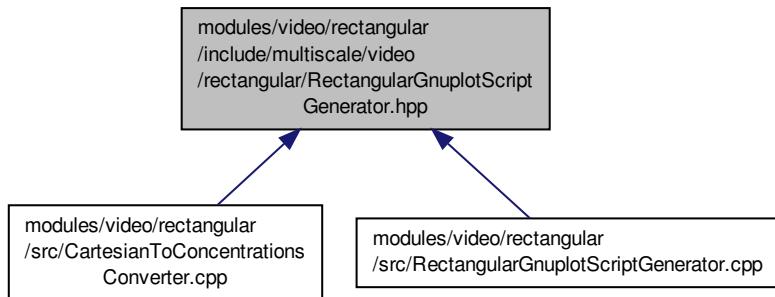

Classes

- class [multiscale::video::RectangularGnuplotScriptGenerator](#)


Gnuplot script generator from the provided concentrations considering a rectangular geometry.

Namespaces

- namespace [multiscale](#)
- namespace [multiscale::video](#)


8.94 modules/video/rectangular/src/CartesianToConcentrationsConverter.cpp File Reference

```
#include "multiscale/exception/CartesianToConcentrationsConverterException.-  
hpp"  
#include "multiscale/video/rectangular/CartesianToConcentrationsConverter.-  
hpp"  
#include "multiscale/video/rectangular/RectangularGnuplotScriptGenerator.-  
hpp"  
#include "multiscale/util/NumericRangeManipulator.hpp"  
#include <iostream>  
#include <fstream>  
#include <exception>  
#include <cassert>  
#include <vector>  
Include dependency graph for CartesianToConcentrationsConverter.cpp:
```

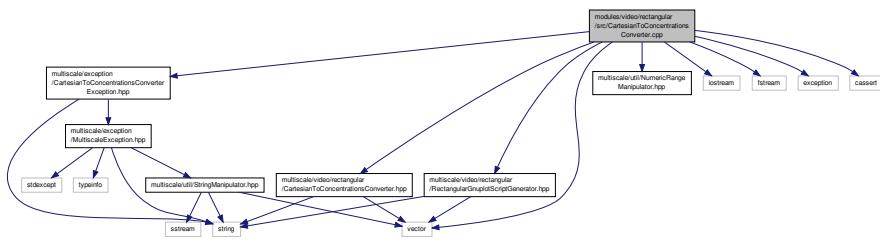

8.95 modules/video/rectangular/src/MapCartesianToScript.cpp File Reference

```
#include "multiscale/core/Multiscale.hpp"  
#include "multiscale/video/rectangular/CartesianToConcentrationsConverter.-  
hpp"  
#include "multiscale/exception/ExceptionHandler.hpp"  
#include <boost/program_options.hpp>  
#include <iostream>  
Include dependency graph for MapCartesianToScript.cpp:
```

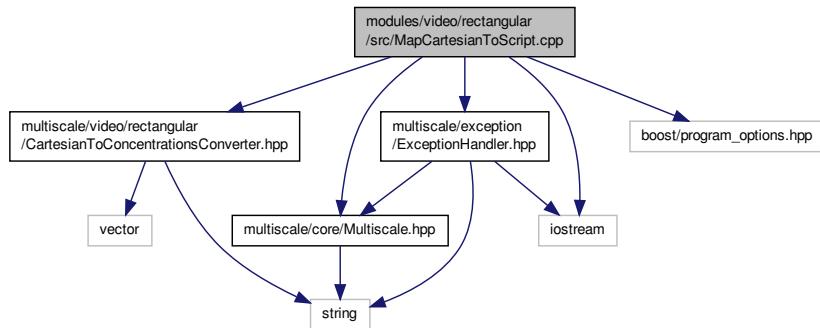

Functions

- `po::variables_map initArgumentsConfig (po::options_description &usageDescription, int argc, char **argv)`
- `void printHelpInformation (const po::variables_map &vm, const po::options_description &usageDescription)`
- `void printWrongParameters ()`
- `bool areValidParameters (string &inputFilepath, string &outputFilename, int argc, char **argv)`
- `int main (int argc, char **argv)`


8.95.1 Function Documentation

8.95.1.1 `bool areValidParameters (string & inputFilepath, string & outputFilename, int argc, char ** argv)`

Definition at line 60 of file MapCartesianToScript.cpp.

References `initArgumentsConfig()`, and `printHelpInformation()`.

Here is the call graph for this function:

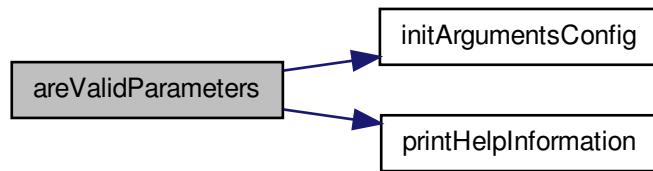

8.95.1.2 `po::variables_map initArgumentsConfig (po::options_description & usageDescription, int argc, char ** argv)`


Definition at line 37 of file MapCartesianToScript.cpp.

8.95.1.3 `int main (int argc, char ** argv)`

Definition at line 84 of file MapCartesianToScript.cpp.

References `areValidParameters()`, `multiscale::video::CartesianToConcentrationsConverter::convert()`, `multiscale::ERR_CODE`, and `printWrongParameters()`.

Here is the call graph for this function:

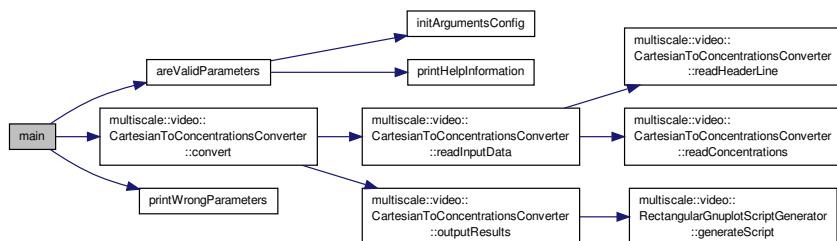

8.95.1.4 `void printHelpInformation (const po::variables_map & vm, const po::options_description & usageDescription)`

Definition at line 49 of file MapCartesianToScript.cpp.


8.95.1.5 `void printWrongParameters ()`

Definition at line 54 of file MapCartesianToScript.cpp.

References multiscale::ERR_MSG.

8.96 modules/video/rectangular/src/RectangularCsvToInputFilesConverter.cpp File Reference

```
#include "multiscale/exception/RectangularCsvToInputFilesConverterException.-  
hpp"  
#include "multiscale/video/rectangular/RectangularCsvToInputFilesConverter.-  
hpp"  
#include "multiscale/util/iterator/NumberIteratorType.hpp"  
#include "multiscale/util/iterator/LexicographicNumberIterator.hpp"  
#include "multiscale/util/iterator/StandardNumberIterator.hpp"  
#include "multiscale/util/StringManipulator.hpp"  
#include <cmath>  
#include <cassert>  
#include <cstdlib>  
#include <fstream>  
#include <limits>  
Include dependency graph for RectangularCsvToInputFilesConverter.cpp:
```

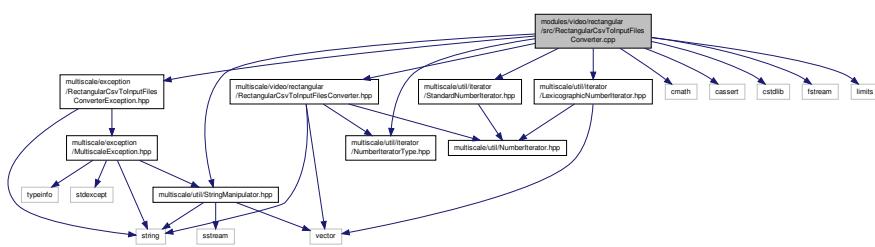


8.97 modules/video/rectangular/src/RectangularEntityCsvToInputFilesConverter.cpp File Reference

```
#include "multiscale/exception/RectangularEntityCsvToInputFilesConverter-  
Exception.hpp"  
#include "multiscale/video/rectangular/RectangularEntityCsvToInputFiles-
```

```

Converter.hpp"
#include "multiscale/util/iterator/NumberIteratorType.hpp"
#include "multiscale/util/iterator/LexicographicNumberIterator.hpp"
#include "multiscale/util/iterator/StandardNumberIterator.hpp"
#include "multiscale/util/StringManipulator.hpp"
#include <cmath>
#include <cassert>
#include <cstdlib>
#include <fstream>
#include <limits>
Include dependency graph for RectangularEntityCsvToInputFilesConverter.cpp:

```

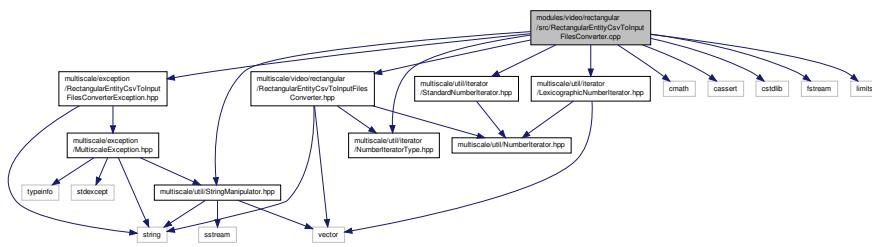


8.98 modules/video/rectangular/src/RectangularGnuplotScriptGenerator.cpp File Reference

```

#include "multiscale/video/rectangular/RectangularGnuplotScriptGenerator.hpp"
#include "multiscale/util/StringManipulator.hpp"
#include <cassert>
#include <iostream>
#include <vector>
#include <sstream>
#include <fstream>
Include dependency graph for RectangularGnuplotScriptGenerator.cpp:

```

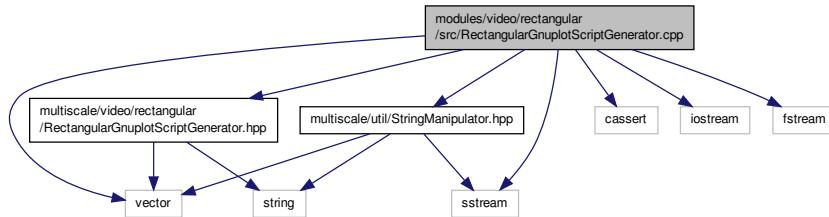


8.99 modules/video/rectangular/src/RectangularMapCsvToInputFiles.cpp File Reference

```

#include "multiscale/core/Multiscale.hpp"
#include "multiscale/video/rectangular/RectangularCsvToInputFilesConverter.-
```

```
hpp"
#include "multiscale/util/iterator/NumberIteratorType.hpp"
#include "multiscale/exception/ExceptionHandler.hpp"
#include <boost/program_options.hpp>
#include <iostream>
Include dependency graph for RectangularMapCsvToInputFiles.cpp:
```

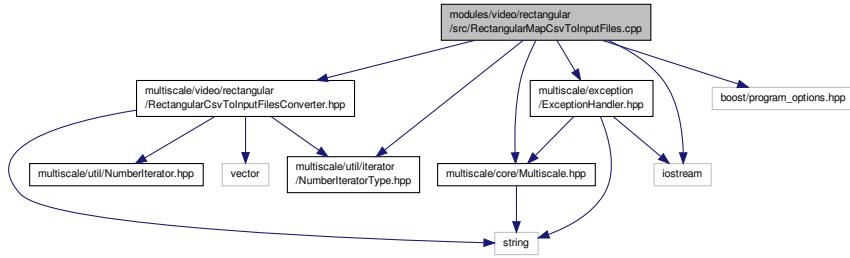

Functions

- `po::variables_map initArgumentsConfig (po::options_description &usageDescription, int argc, char **argv)`
- `void printHelpInformation (const po::variables_map &vm, const po::options_description &usageDescription)`
- `void printWrongParameters ()`
- `void setNumberIteratorType (const po::variables_map &vm, NumberIteratorType &numberIteratorType)`
- `void setSelectedConcentrationIndex (const po::variables_map &vm, unsigned int &selectedConcentrationIndex)`
- `void setLogScaling (const po::variables_map &vm, bool &useLogScaling)`
- `bool isValidNrOfConcentrationsForPosition (const po::variables_map &vm, unsigned int &nrOfConcentrationsForPosition)`
- `bool areValidParameters (string &inputFilepath, string &outputFilename, unsigned int &height, unsigned int &width, unsigned int &nrOfConcentrationsForPosition, unsigned int &selectedConcentrationIndex, bool &useLogScaling, NumberIteratorType &numberIteratorType, int argc, char **argv)`
- `int main (int argc, char **argv)`


8.99.1 Function Documentation

8.99.1.1 `bool areValidParameters (string & inputFilepath, string & outputFilename, unsigned int & height, unsigned int & width, unsigned int & nrOfConcentrationsForPosition, unsigned int & selectedConcentrationIndex, bool & useLogScaling, NumberIteratorType & numberIteratorType, int argc, char ** argv)`

Definition at line 91 of file RectangularMapCsvToInputFiles.cpp.

References `initArgumentsConfig()`, `isValidNrOfConcentrationsForPosition()`, `printHelpInformation()`, `setLogScaling()`, `setNumberIteratorType()`, and `setSelectedConcentrationIndex()`.

Here is the call graph for this function:

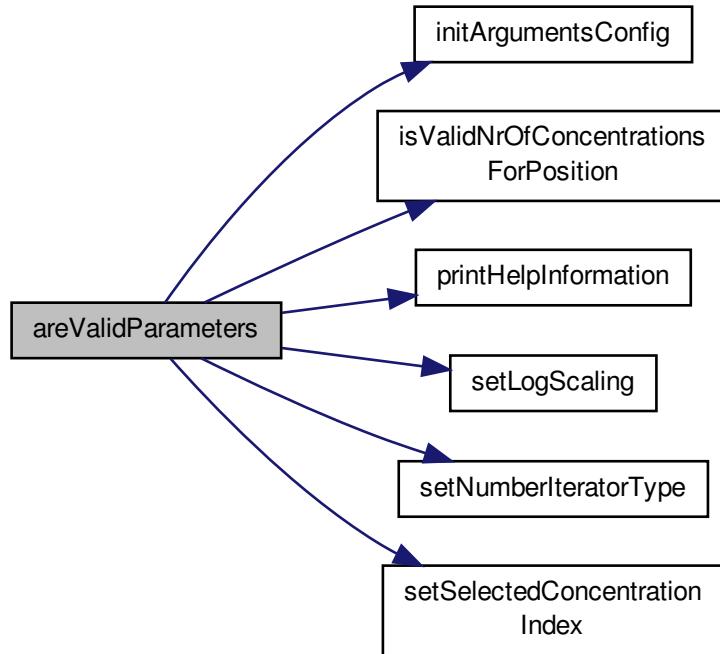

8.99.1.2 `po::variables_map initArgumentsConfig (po::options_description & usageDescription, int argc, char ** argv)`

Definition at line 32 of file `RectangularMapCsvToInputFiles.cpp`.

8.99.1.3 `bool isValidNrOfConcentrationsForPosition (const po::variables_map & vm, unsigned int & nrOfConcentrationsForPosition)`

Definition at line 76 of file `RectangularMapCsvToInputFiles.cpp`.


References `multiscale::ERR_MSG`.

8.99.1.4 `int main (int argc, char ** argv)`

Definition at line 138 of file `RectangularMapCsvToInputFiles.cpp`.

References `isValidParameters()`, `multiscale::video::RectangularCsvToInputFilesConverter::convert()`, `multiscale::ERR_CODE`, `printWrongParameters()`, and `multiscale::STANDARD`.

Here is the call graph for this function:

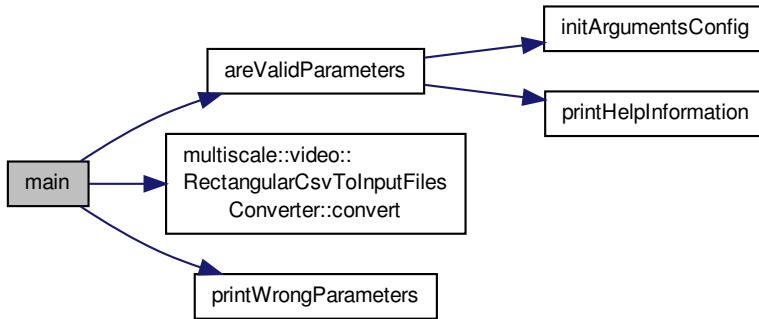

8.99.1.5 void printHelpInformation (const po::variables_map & vm, const po::options_description & usageDescription)

Definition at line 50 of file RectangularMapCsvToInputFiles.cpp.

8.99.1.6 void printWrongParameters ()

Definition at line 55 of file RectangularMapCsvToInputFiles.cpp.

References multiscale::ERR_MSG.

8.99.1.7 void setLogScaling (const po::variables_map & vm, bool & useLogScaling)

Definition at line 71 of file RectangularMapCsvToInputFiles.cpp.

8.99.1.8 void setNumberIteratorType (const po::variables_map & vm, NumberIteratorType & numberIteratorType)

Definition at line 61 of file RectangularMapCsvToInputFiles.cpp.

References multiscale::LEXICOGRAPHIC.

8.99.1.9 void setSelectedConcentrationIndex (const po::variables_map & vm, unsigned int & selectedConcentrationIndex)


Definition at line 66 of file RectangularMapCsvToInputFiles.cpp.

8.100 modules/video/rectangular/src/RectangularMapEntityCsvToInputFiles.cpp File Reference

```

#include "multiscale/core/Multiscale.hpp"
#include "multiscale/video/rectangular/RectangularEntityCsvToInputFiles-
Converter.hpp"
#include "multiscale/util/iterator/NumberIteratorType.hpp"
#include "multiscale/exception/ExceptionHandler.hpp"
#include <boost/program_options.hpp>
#include <iostream>
  
```

Include dependency graph for `RectangularMapEntityCsvToInputFiles.cpp`:

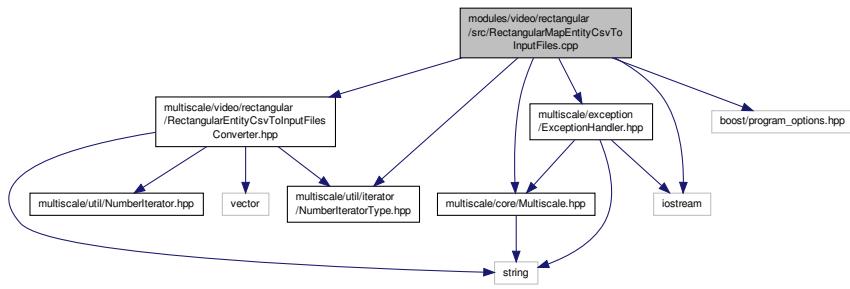

Functions

- `po::variables_map initArgumentsConfig (po::options_description &usageDescription, int argc, char **argv)`
- `void printHelpInformation (const po::variables_map &vm, const po::options_description &usageDescription)`
- `void printWrongParameters ()`
- `void setNumberIteratorType (const po::variables_map &vm, NumberIteratorType &numberIteratorType)`
- `bool areValidParameters (string &inputFilepath, string &outputFilename, unsigned int &height, unsigned int &width, unsigned int &nrOfEntities, unsigned int &maxPileup, NumberIteratorType &numberIteratorType, int argc, char **argv)`
- `int main (int argc, char **argv)`


8.100.1 Function Documentation

8.100.1.1 `bool areValidParameters (string & inputFilepath, string & outputFilename, unsigned int & height, unsigned int & width, unsigned int & nrOfEntities, unsigned int & maxPileup, NumberIteratorType & numberIteratorType, int argc, char ** argv)`

Definition at line 65 of file `RectangularMapEntityCsvToInputFiles.cpp`.

References `initArgumentsConfig()`, `printHelpInformation()`, and `setNumberIteratorType()`.

Here is the call graph for this function:

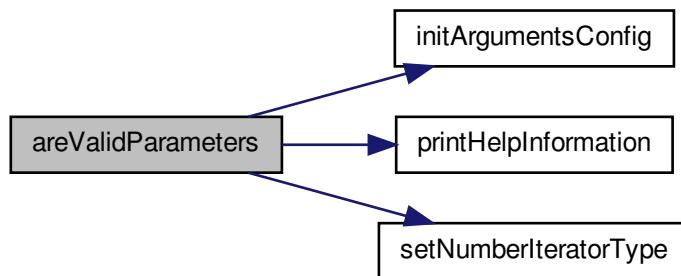

8.100.1.2 `po::variables_map initArgumentsConfig (po::options_description & usageDescription, int argc, char ** argv)`


Definition at line 32 of file RectangularMapEntityCsvToInputFiles.cpp.

8.100.1.3 `int main (int argc, char ** argv)`

Definition at line 103 of file RectangularMapEntityCsvToInputFiles.cpp.

References `isValidParameters()`, `multiscale::video::RectangularEntityCsvToInputFilesConverter::convert()`, `multiscale::ERR_CODE`, `printWrongParameters()`, and `multiscale::STANDARD`.

Here is the call graph for this function:

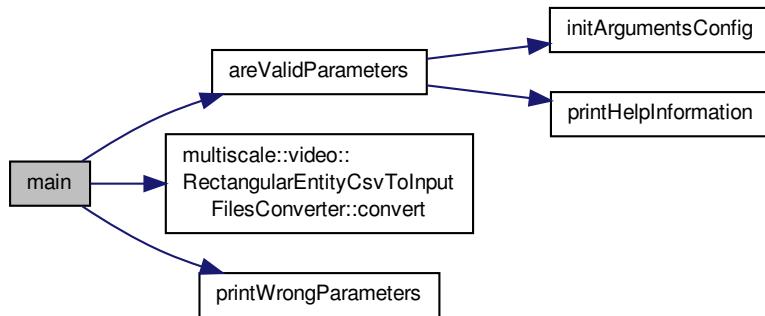8.100.1.4 `void printHelpInformation (const po::variables_map & vm, const po::options_description & usageDescription)`

Definition at line 49 of file RectangularMapEntityCsvToInputFiles.cpp.

8.100.1.5 `void printWrongParameters ()`

Definition at line 54 of file RectangularMapEntityCsvToInputFiles.cpp.

References `multiscale::ERR_MSG`.

8.100.1.6 `void setNumberIteratorType (const po::variables_map & vm, NumberIteratorType & numberIteratorType)`

Definition at line 60 of file RectangularMapEntityCsvToInputFiles.cpp.

References `multiscale::LEXICOGRAPHIC`.