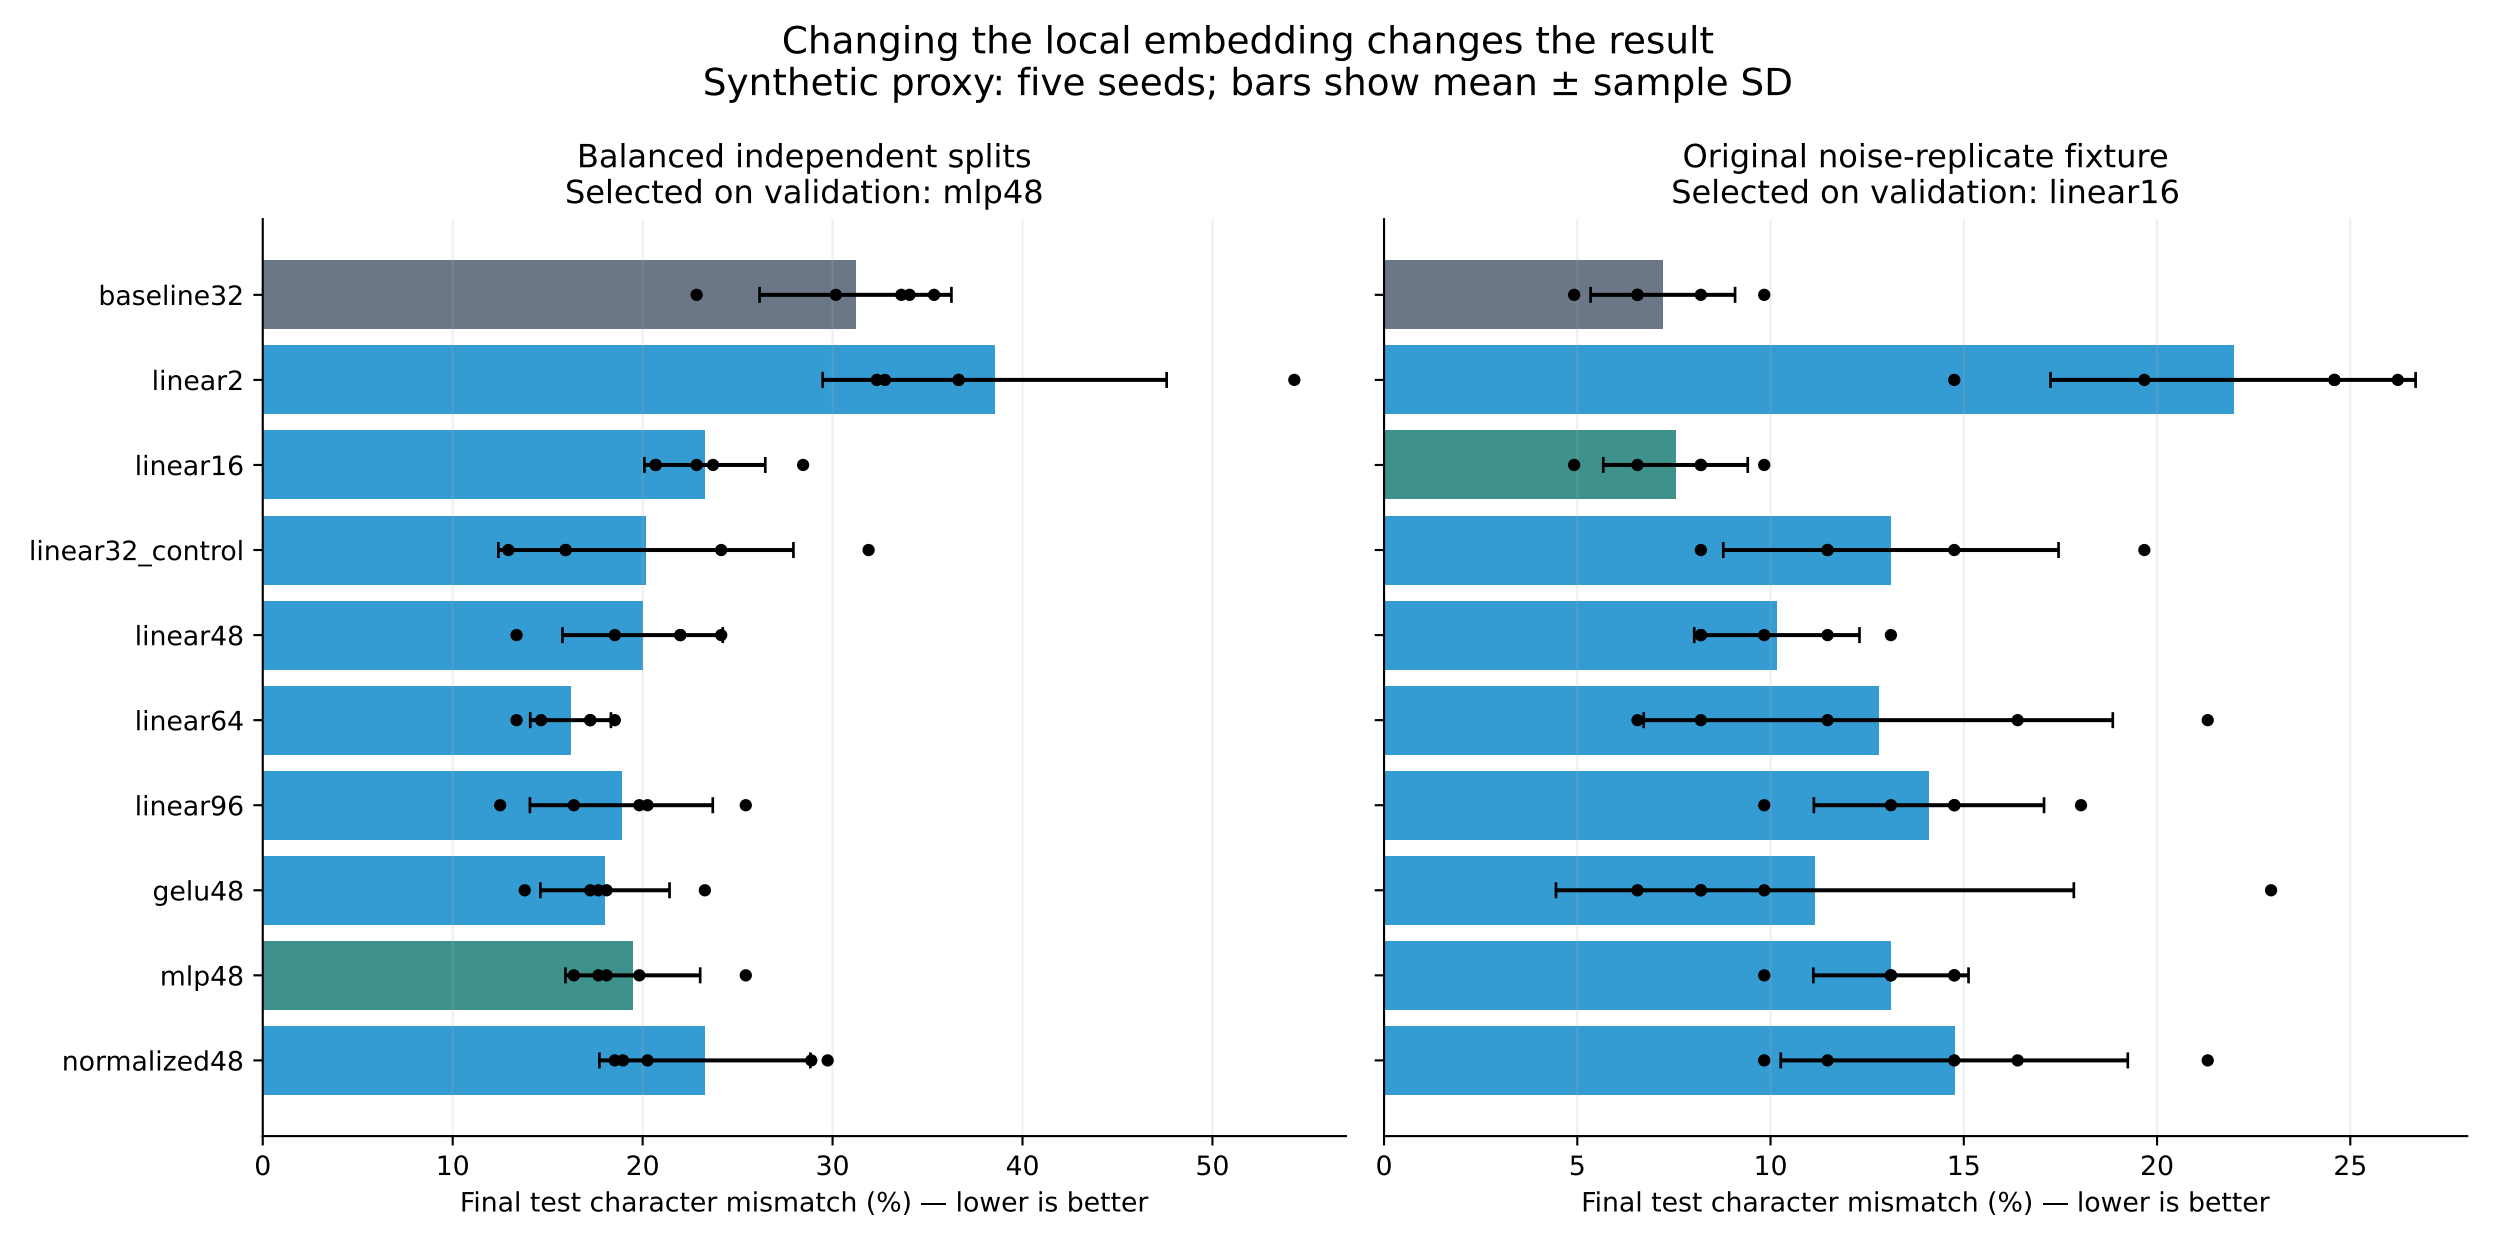
Changing the local embedding changes the result
Synthetic proxy: five seeds; bars show mean ± sample SD
Balanced independent splits
Selected on validation: mlp48
Original noise-replicate fixture
Selected on validation: linear16
baseline32
linear2
linear16
linear32_control
linear48
linear64
linear96
gelu48
mlp48
normalized48
0
10
20
30
40
50
0
5
10
15
20
25
Final test character mismatch (%) — lower is better
Final test character mismatch (%) — lower is better