

COURSE CODE/TITLE:	CPE 212	SECTION:	CPE31S2
DATE PERFORMED:	Jul 16, 2026	DATE SUBMITTED:	Jul 16, 2026
NAME:	Mark David M. Loterte	INSTRUCTOR:	Engr. Jimlord Quejado

ACTIVITY NO. 1.1 Creating Virtual Machines

1. PROCEDURE OUTPUT

Task 1: Changing Hostname

Do the following on Server 1, Server 2, and Local Machine. In editing the file using nano command, press Control + O to write out (save the file). Press Enter when asked for the name of the file. Press Control + X to end.

1. Change the hostname using the command `sudo nano /etc/hostname`.

1.1 Use server1 for Server 1



```
mdmlot@mdmlot-VirtualBox: ~  
GNU nano 6.2 /etc/hostname *  
server1  
  
[ Wrote 1 line ]  
^G Help      ^O Write Out  ^W Where Is   ^K Cut        ^T Execute    ^C Location  
^X Exit      ^R Read File  ^\ Replace    ^U Paste      ^J Justify    ^_ Go To Line
```

1.2 Use server2 for Server 2



```
mdmlot@mdmlot-VirtualBox: ~  
GNU nano 6.2 /etc/hostname  
server2  
  
[ Wrote 1 line ]  
^G Help      ^O Write Out  ^W Where Is   ^K Cut        ^T Execute    ^C Location  
^X Exit      ^R Read File  ^\ Replace    ^U Paste      ^J Justify    ^_ Go To Line
```

1.3 Use workstation for the Local Machine

```
mdmlot@mdmlot-VirtualBox: ~  
GNU nano 6.2 /etc/hostname *  
workstation  
  
^G Help      ^O Write Out ^W Where Is  ^K Cut       ^T Execute   ^C Location  
^X Exit      ^R Read File ^\ Replace   ^U Paste      ^J Justify   ^_ Go To Line
```

2. Edit the hosts using the command `sudo nano /etc/hosts`. Edit the second line.

2.1 Type 127.0.0.1 server 1 for Server 1

```
mdmlot@mdmlot-VirtualBox: ~  
GNU nano 6.2 /etc/hosts  
127.0.0.1 localhost  
127.0.0.1 server1  
  
# The following lines are desirable for IPv6 capable hosts  
::1 ip6-localhost ip6-loopback  
fe00::0 ip6-localnet  
ff00::0 ip6-mcastprefix  
ff02::1 ip6-allnodes  
ff02::2 ip6-allrouters  
  
[ Wrote 9 lines ]  
  
^G Help      ^O Write Out ^W Where Is  ^K Cut       ^T Execute   ^C Location  
^X Exit      ^R Read File ^\ Replace   ^U Paste      ^J Justify   ^_ Go To Line
```

2.2 Type 127.0.0.1 server 2 for Server 2

```
GNU nano 6.2 /etc/hosts  
127.0.0.1 localhost  
127.0.0.1 server2  
  
# The following lines are desirable for IPv6 capable hosts  
::1 ip6-localhost ip6-loopback  
fe00::0 ip6-localnet  
ff00::0 ip6-mcastprefix  
ff02::1 ip6-allnodes  
ff02::2 ip6-allrouters  
  
[ Wrote 9 lines ]  
  
^G Help      ^O Write Out ^W Where Is  ^K Cut       ^T Execute   ^C Location  
^X Exit      ^R Read File ^\ Replace   ^U Paste      ^J Justify   ^_ Go To Line
```

2.3 Type 127.0.0.1 workstation for the Local Machine

```


mdmlot@mdmlot-VirtualBox: ~
GNU nano 6.2 /etc/hosts *
127.0.0.1 localhost
127.0.0.1 workstation

# The following lines are desirable for IPv6 capable hosts
::1 ip6-localhost ip6-loopback
fe00::0 ip6-localnet
ff00::0 ip6-mcastprefix
ff02::1 ip6-allnodes
ff02::2 ip6-allrouters
  
```


Task 2: Configure SSH

Configure SSH on Server 1, Server 2, and Local Machine. Do the following:

1. Upgrade the packages by issuing the commands `sudo apt update` and `sudo apt upgrade`, respectively.

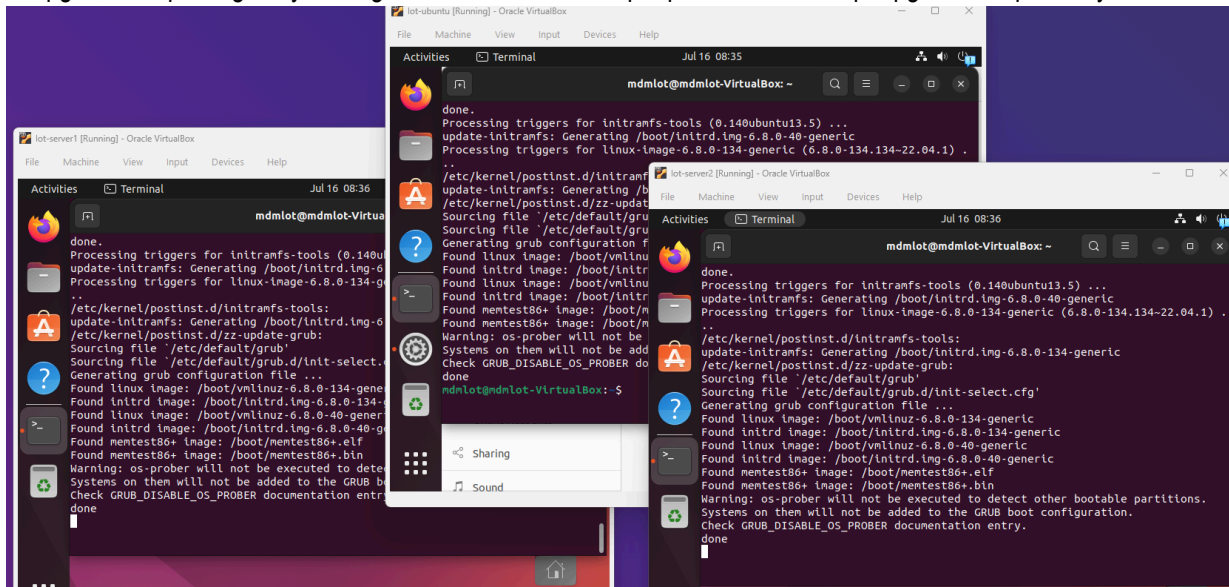

2. Install the SSH server using the command `sudo apt install openssh-server`.

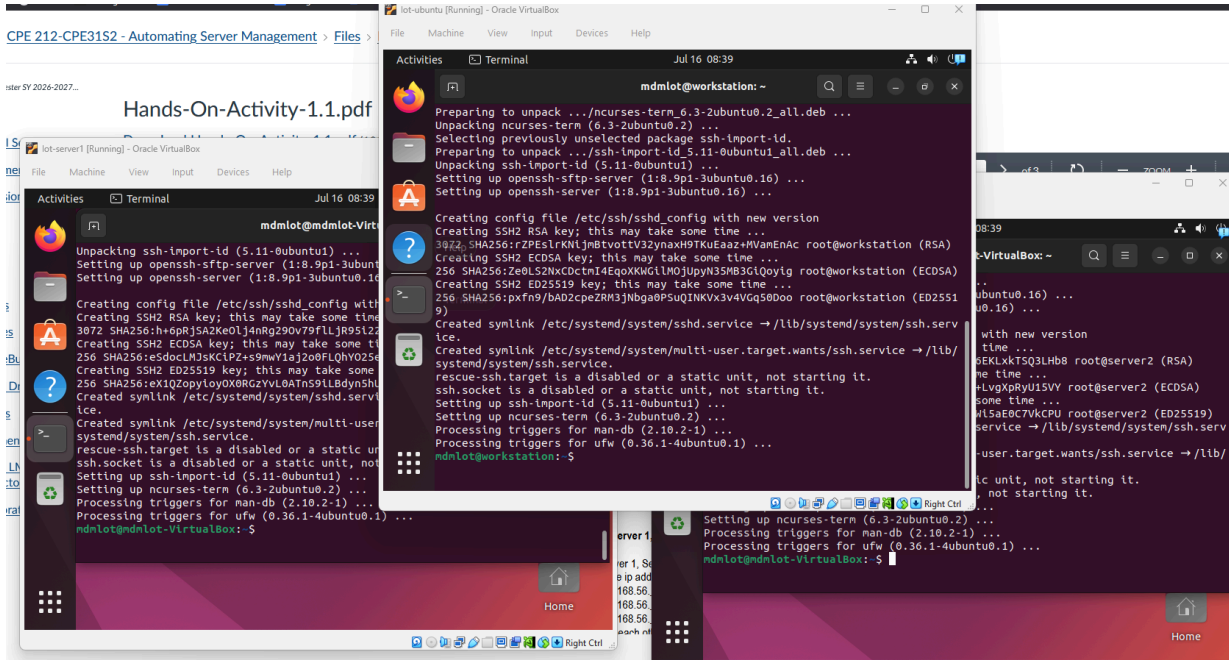

```

Preparing to unpack .../ncurses-term_6.3-2ubuntu0.2_all.deb ...
Unpacking ncurses-term (6.3-2ubuntu0.2) ...
Selecting previously unselected package ssh-import-id.
Preparing to unpack .../ssh-import-id_5.11-0ubuntu1_all.deb ...
Unpacking ssh-import-id (5.11-0ubuntu1) ...
Setting up openssh-sftp-server (1:8.9p1-3ubuntu0.16) ...
Setting up openssh-server (1:8.9p1-3ubuntu0.16) ...

Creating config file /etc/ssh/sshd_config with new version
Creating SSH2 RSA key; this may take some time ...
3072 SHA256:h+6pRjSAZke0l34nRg290v79fLjR9S12Z
Creating SSH2 ECDSA key; this may take some time ...
256 SHA256:e5docLM3SKCpZ+s9mwY1aj2o8FLqHY025e
Creating SSH2 ED25519 key; this may take some time ...
256 SHA256:ex1QzopytoYOXORgzYVL6ATnS9tLBdYnShu
Created symlink /etc/systemd/system/ssh.service → /usr/lib/systemd/system/ssh.service.
Created symlink /etc/systemd/system/multi-user.target.wants/ssh.service → /usr/lib/systemd/system/ssh.service.
rescue-ssh.target is a disabled or a static unit, not starting it.
ssh.socket is a disabled or a static unit, not starting it.
Setting up ssh-import-id (5.11-0ubuntu1) ...
Setting up ncurses-term (6.3-2ubuntu0.2) ...
Processing triggers for man-db (2.10.2-1) ...
Processing triggers for ufw (0.36.1-4ubuntu0.1) ...


mdm1ot@workstation: ~

```

3. Verify if the SSH service has started by issuing the following commands:

3.1 `sudo service ssh start`

3.2 `sudo systemctl status ssh`

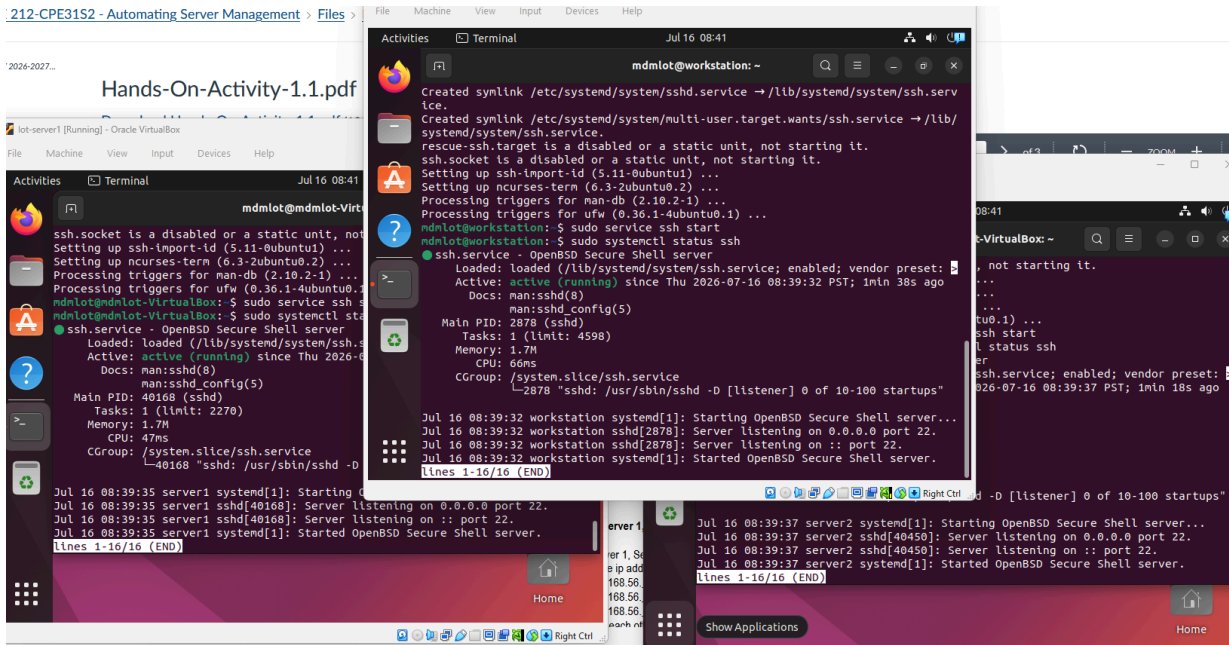

```

mdm1ot@workstation: ~
Created symlink /etc/systemd/system/ssh.service → /usr/lib/systemd/system/ssh.service.
Created symlink /etc/systemd/system/multi-user.target.wants/ssh.service → /usr/lib/systemd/system/ssh.service.
rescue-ssh.target is a disabled or a static unit, not starting it.
ssh.socket is a disabled or a static unit, not starting it.
Setting up ssh-import-id (5.11-0ubuntu1) ...
Setting up ncurses-term (6.3-2ubuntu0.2) ...
Processing triggers for man-db (2.10.2-1) ...
Processing triggers for ufw (0.36.1-4ubuntu0.1) ...

mdm1ot@workstation: ~$ sudo service ssh start
mdm1ot@workstation: ~$ sudo systemctl status ssh
● ssh.service - OpenSSH Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; vendor preset: enabled)
   Active: active (running) since Thu 2026-07-16 08:39:32 PST; 1min 38s ago
     Docs: man:sshd(8)
           man:sshd_config(5)
   Main PID: 2878 (sshd)
    Tasks: 1 (limit: 4598)
   Memory: 1.7M
      CPU: 66ms
   CGroup: /system.slice/ssh.service
           └─2878 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Jul 16 08:39:32 workstation systemd[1]: Starting OpenSSH Secure Shell server...
Jul 16 08:39:32 workstation sshd[2878]: Server listening on 0.0.0.0 port 22.
Jul 16 08:39:32 workstation systemd[1]: Started OpenSSH Secure Shell server.
lines 1-16/16 (END)

mdm1ot@workstation: ~$ sudo service ssh start
mdm1ot@workstation: ~$ sudo systemctl status ssh
● ssh.service - OpenSSH Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; vendor preset: enabled)
   Active: active (running) since Thu 2026-07-16 08:39:32 PST; 1min 18s ago
     Docs: man:sshd(8)
           man:sshd_config(5)
   Main PID: 40168 (sshd)
    Tasks: 1 (limit: 2276)
   Memory: 1.7M
      CPU: 47ms
   CGroup: /system.slice/ssh.service
           └─40168 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Jul 16 08:39:35 server1 systemd[1]: Starting OpenSSH Secure Shell server...
Jul 16 08:39:35 server1 sshd[40168]: Server listening on 0.0.0.0 port 22.
Jul 16 08:39:35 server1 systemd[1]: Started OpenSSH Secure Shell server.
lines 1-16/16 (END)

mdm1ot@workstation: ~$ sudo service ssh start
mdm1ot@workstation: ~$ sudo systemctl status ssh
● ssh.service - OpenSSH Secure Shell server
   Loaded: loaded (/usr/lib/systemd/system/ssh.service; enabled; vendor preset: enabled)
   Active: active (running) since Thu 2026-07-16 08:39:32 PST; 1min 18s ago
     Docs: man:sshd(8)
           man:sshd_config(5)
   Main PID: 40450 (sshd)
    Tasks: 1 (limit: 2276)
   Memory: 1.7M
      CPU: 47ms
   CGroup: /system.slice/ssh.service
           └─40450 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Jul 16 08:39:37 server2 systemd[1]: Starting OpenSSH Secure Shell server...
Jul 16 08:39:37 server2 sshd[40450]: Server listening on 0.0.0.0 port 22.
Jul 16 08:39:37 server2 systemd[1]: Started OpenSSH Secure Shell server.
lines 1-16/16 (END)

```

4. Configure the firewall to all port 22 by issuing the following commands:
 - 4.1 `sudo ufw allow ssh`
 - 4.2 `sudo ufw enable`
 - 4.3 `sudo ufw status`

PE 212-CPE31S2 - Automating Server Management > File

Hands-On-Activity-1.1.p

lot-server1 (Running) - Oracle VirtualBox

File Machine View Input Devices Help

Activities

Terminal

```
mdm1ot@mdm1ot: ~
CGroup: /system.slice/ssh.service
-40168 "sshd: /usr/sbin/sshd"

Jul 16 08:39:35 server1 systemd[1]: Start
Jul 16 08:39:35 server1 sshd[40168]: Serv
Jul 16 08:39:35 server1 sshd[40168]: Serv
Jul 16 08:39:35 server1 systemd[1]: Start

mdm1ot@mdm1ot-VirtualBox: ~$ sudo ufw allow
sudo: ufc: command not found
mdm1ot@mdm1ot-VirtualBox: ~$ sudo ufw allow
Rules updated
Rules updated (v6)
mdm1ot@mdm1ot-VirtualBox: ~$ sudo ufw enab
suFirewall is active and enabled on syste
mdm1ot@mdm1ot-VirtualBox: ~$ sudo ufw stat
Status: active

To Action From
--
22/tcp ALLOW Anywhere
22/tcp (v6) ALLOW Anywhere (v6)

mdm1ot@mdm1ot-VirtualBox: ~$
```

File Machine View Input Devices Help

Activities

Terminal

```
mdm1ot@workstation: ~
Active: active (running) since Thu 2026-07-16 08:39:32 PST; 1min 38s ago
Docs: man:sshd(8)
man:sshd_config(5)
Main PID: 2878 (sshd)
Tasks: 1 (limit: 4598)
Memory: 1.7M
CPU: 66ms
CGroup: /system.slice/ssh.service
-2878 "sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups"

Jul 16 08:39:32 workstation systemd[1]: Starting OpenBSD Secure Shell server...
Jul 16 08:39:32 workstation sshd[2878]: Server listening on 0.0.0.0 port 22.
Jul 16 08:39:32 workstation sshd[2878]: Server listening on :: port 22.
Jul 16 08:39:32 workstation systemd[1]: Started OpenBSD Secure Shell server.

mdm1ot@workstation: ~$ sudo ufw allow ssh
Rules updated
Rules updated (v6)
mdm1ot@workstation: ~$ sudo ufw enable
sFirewall is active and enabled on system startup
mdm1ot@workstation: ~$ sudo ufw status
Status: active

To Action From
--
22/tcp ALLOW Anywhere
22/tcp (v6) ALLOW Anywhere (v6)

mdm1ot@workstation: ~$
```

Task 3: Verify network settings on Server 1, Server 2, and Local Machine.

1. Record the ip address of Server 1, Server 2, and Local Machine. Issue the command `ifconfig` and check network settings. Note that the ip addresses of all the machines are in this network 192.168.56.XX..

mdm1ot@workstation: ~

```

global> ifconfig
global> ifconfig
ether 08:00:27:a9:2f:11 txqueuelen 1000 (Ethernet)
RX packets 468 bytes 289571 (289.5 KB)
RX errors 0 dropped 0 overruns 0 frame 0
TX packets 530 bytes 82842 (82.8 KB)
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

enp0s8: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
inet 192.168.56.112 netmask 255.255.255.0 broadcast 192.168.56.255

```

mdm1ot@server1: ~

```

global> ifconfig
global> ifconfig
ether 08:00:27:a9:2f:11 txqueuelen 1000 (Ethernet)
RX packets 607 bytes 442429 (442.4 KB)
RX errors 0 dropped 0 overruns 0 frame 0
TX packets 585 bytes 93501 (93.5 KB)
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

enp0s8: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
inet 192.168.56.110 netmask 255.255.255.0 broadcast 192.168.56.255

```

```
mdmlot@server2: ~
l0bal>
l0bal>
inet6 fd17:625c:f037:2:6ad4:5526:3f37:e0f1 prefixlen 64 scopeid 0x0<g
inet6 fe80::f5c1:6493:8fb9:df4a prefixlen 64 scopeid 0x20<link>
ether 08:00:27:a9:2f:11 txqueuelen 1000 (Ethernet)
RX packets 432 bytes 264267 (264.2 KB)
RX errors 0 dropped 0 overruns 0 frame 0
TX packets 486 bytes 80920 (80.9 KB)
TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0

enp0s8: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1500
inet 192.168.56.113 netmask 255.255.255.0 broadcast 192.168.56.255
```

Local Machine IP address: 192.168.56.112

Server 1 IP address: 192.168.56.110

Server 2 IP address: 192.168.56.111

```
mdmlot@workstation:~$ ping 192.168.56.110
PING 192.168.56.110 (192.168.56.110) 56(84) bytes of data.
64 bytes from 192.168.56.110: icmp_seq=1 ttl=64 time=1.09 ms
64 bytes from 192.168.56.110: icmp_seq=2 ttl=64 time=0.396 ms
64 bytes from 192.168.56.110: icmp_seq=3 ttl=64 time=0.407 ms
64 bytes from 192.168.56.110: icmp_seq=4 ttl=64 time=0.461 ms
^C
--- 192.168.56.110 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3166ms
rtt min/avg/max/mdev = 0.396/0.589/1.092/0.291 ms
mdmlot@workstation:~$ ping 192.168.56.113
PING 192.168.56.113 (192.168.56.113) 56(84) bytes of data.
64 bytes from 192.168.56.113: icmp_seq=1 ttl=64 time=2.51 ms
64 bytes from 192.168.56.113: icmp_seq=2 ttl=64 time=0.696 ms
64 bytes from 192.168.56.113: icmp_seq=3 ttl=64 time=0.434 ms
64 bytes from 192.168.56.113: icmp_seq=4 ttl=64 time=0.634 ms
^C
--- 192.168.56.113 ping statistics ---
4 packets transmitted, 4 received, 0% packet loss, time 3085ms
rtt min/avg/max/mdev = 0.434/1.068/2.508/0.837 ms
```

```
mdmlot@server1:~$ ping 192.168.56.113
PING 192.168.56.113 (192.168.56.113) 56(84) bytes of data.
64 bytes from 192.168.56.113: icmp_seq=1 ttl=64 time=1.02 ms
64 bytes from 192.168.56.113: icmp_seq=2 ttl=64 time=0.754 ms
64 bytes from 192.168.56.113: icmp_seq=3 ttl=64 time=0.390 ms
64 bytes from 192.168.56.113: icmp_seq=4 ttl=64 time=0.559 ms
64 bytes from 192.168.56.113: icmp_seq=5 ttl=64 time=0.545 ms
64 bytes from 192.168.56.113: icmp_seq=6 ttl=64 time=0.368 ms
64 bytes from 192.168.56.113: icmp_seq=7 ttl=64 time=0.483 ms
^C
--- 192.168.56.113 ping statistics ---
7 packets transmitted, 7 received, 0% packet loss, time 6147ms
rtt min/avg/max/mdev = 0.368/0.588/1.023/0.213 ms
```

- 2.1 Connectivity test for Local Machine 1 to Server 1: ☒ Successful ☐ Not Successful
2.2 Connectivity test for Local Machine 1 to Server 2: ☒ Successful ☐ Not Successful
2.3 Connectivity test for Server 1 to Server 2: ☒ Successful ☐ Not Successful

Task 4: Verify SSH connectivity on Server 1, Server 2, and Local Machine.

1. On the Local Machine, issue the following commands:
1.1 ssh username@ip_address_server1 for example, ssh jvtaylor@192.168.56.120
1.2 Enter the password for server 1 when prompted
1.3 Verify that you are in server 1. The user should be in this format user@server1.
For example, jvtaylor@server1

```
mdmlot@workstation:~$ ssh mdmlot@192.168.56.110
mdmlot@192.168.56.110's password:
Welcome to Ubuntu 22.04.5 LTS (GNU/Linux 6.8.0-134-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

Expanded Security Maintenance for Applications is not enabled.

0 updates can be applied immediately.

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.

mdmlot@server1:~$
```

2. Logout of Server 1 by issuing the command control + D.

```
mdmlot@server1:~$
logout
Connection to 192.168.56.110 closed.
mdmlot@workstation:~$
```

3. Do the same for Server 2.

```
mdmlot@workstation:~$ ssh mdmlot@192.168.56.113
mdmlot@192.168.56.113's password:
Welcome to Ubuntu 22.04.5 LTS (GNU/Linux 6.8.0-134-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

Expanded Security Maintenance for Applications is not enabled.

0 updates can be applied immediately.

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.


mdmlot@server2:~$
logout
Connection to 192.168.56.113 closed.
mdmlot@workstation:~$
```

4. Edit the hosts of the Local Machine by issuing the command `sudo nano/etc/hosts`. Below all texts type the following:

4.1 IP_address server 1 (provide the ip address of server 1 followed by the hostname)

4.2 IP_address server 2 (provide the ip address of server 2 followed by the hostname)

4.3 Save the file and exit.

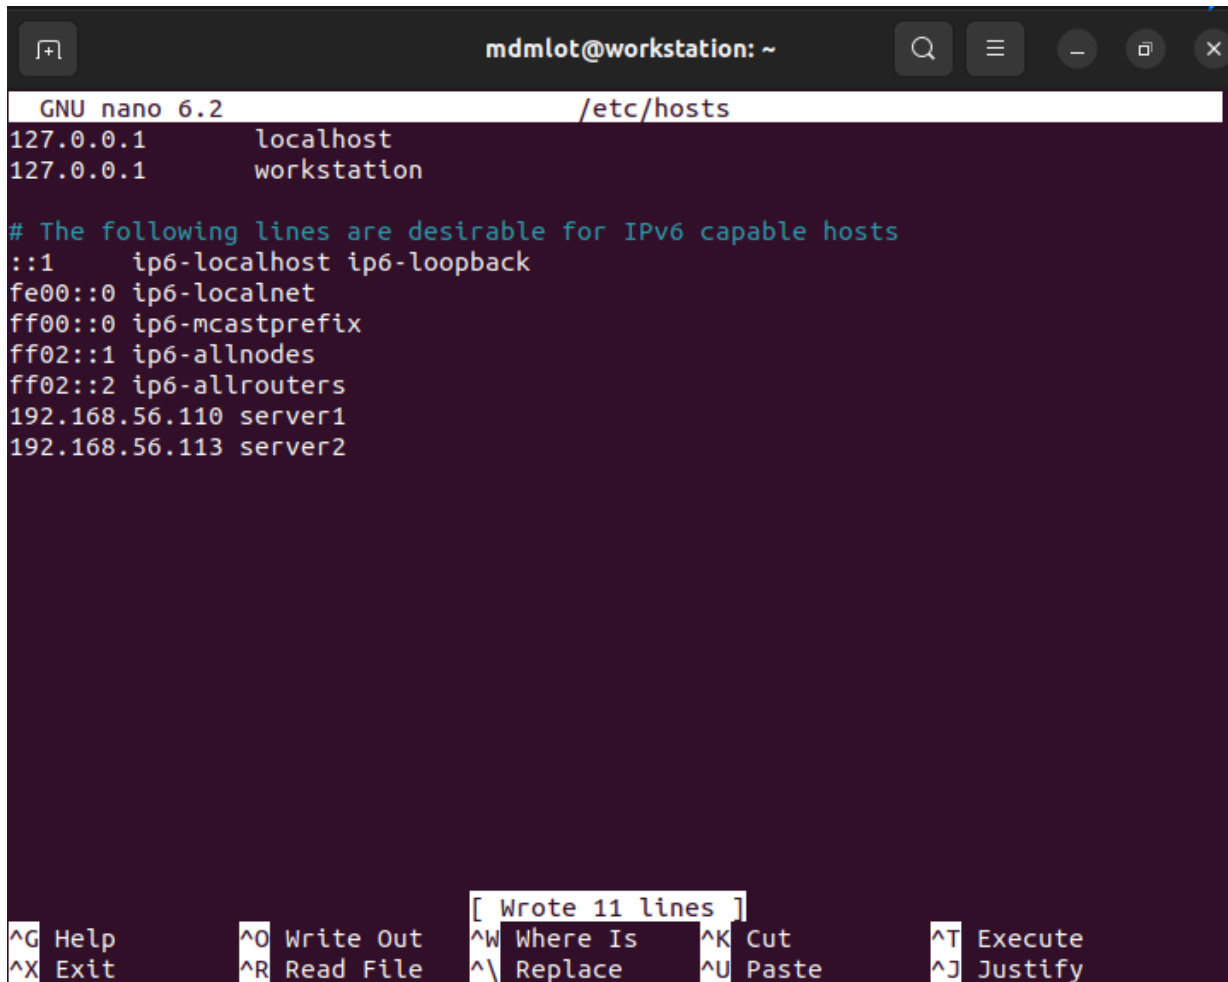

```

mdmlot@workstation: ~
GNU nano 6.2 /etc/hosts
127.0.0.1    localhost
127.0.0.1    workstation

# The following lines are desirable for IPv6 capable hosts
::1        ip6-localhost ip6-loopback
fe00::0    ip6-localnet
ff00::0    ip6-mcastprefix
ff02::1    ip6-allnodes
ff02::2    ip6-allrouters
192.168.56.110 server1
192.168.56.113 server2

[ Wrote 11 lines ]
^G Help      ^O Write Out ^W Where Is  ^K Cut       ^T Execute
^X Exit      ^R Read File ^\ Replace   ^U Paste     ^J Justify
  
```

5. On the local machine, verify that you can do the SSH command but this time, use the hostname instead of typing the IP address of the servers. For example, try to do `ssh jvtaylor@server1`. Enter the password when prompted. Verify that you have entered Server 1. Do the same for Server 2

```
mdm1ot@workstation:~$ sudo nano /etc/hosts
[sudo] password for mdm1ot:
mdm1ot@workstation:~$ ssh mdm1ot@server1
The authenticity of host 'server1 (192.168.56.110)' can't be established.
ED25519 key fingerprint is SHA256:eX1QZopyioy0X0RGzYvL0ATnS9iLBdyn5hUeWBTC5rU.
This host key is known by the following other names/addresses:
  ~/.ssh/known_hosts:1: [hashed name]
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'server1' (ED25519) to the list of known hosts.
mdm1ot@server1's password:
Welcome to Ubuntu 22.04.5 LTS (GNU/Linux 6.8.0-134-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

Expanded Security Maintenance for Applications is not enabled.

0 updates can be applied immediately.

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

New release '24.04.4 LTS' available.
Run 'do-release-upgrade' to upgrade to it.

Last login: Thu Jul 16 09:17:59 2026 from 192.168.56.112
mdm1ot@server1:~$

mdm1ot@workstation:~$ ssh mdm1ot@server2
The authenticity of host 'server2 (192.168.56.113)' can't be established.
ED25519 key fingerprint is SHA256:eODWBuZFNkTy49DuuEO6VBOfFqPxu1Wi5aE0C7VkCPU.
This host key is known by the following other names/addresses:
  ~/.ssh/known_hosts:4: [hashed name]
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added 'server2' (ED25519) to the list of known hosts.
mdm1ot@server2's password:
Welcome to Ubuntu 22.04.5 LTS (GNU/Linux 6.8.0-134-generic x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

Expanded Security Maintenance for Applications is not enabled.

0 updates can be applied immediately.

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

New release '24.04.4 LTS' available.
Run 'do-release-upgrade' to upgrade to it.

Last login: Thu Jul 16 09:13:03 2026 from 192.168.56.112
mdm1ot@server2:~$
```

2. ANSWERS TO SUPPLEMENTAL ACTIVITY

1. How are we able to use the hostname instead of IP address in SSH commands?

By saving the hostname with the IP address in `/etc/hosts`, they are essentially being associated together like a command's alias.

2. How secured is SSH?

Due to its encryption and certificate based authentication, SSH is generally more secure than standard password authentication. However, it may still be susceptible to attacks such as brute force, especially if the encryption

method used is outdated or if there are a lot of unused keys that can be exploited.

3. ARTIFICIAL INTELLIGENCE (AI) USE DISCLOSURE STATEMENT

I hereby declare that artificial intelligence (AI) tools were used, if applicable, in the preparation of this academic work. The following indicates the nature and extent of AI assistance:

Tools Used: _____

Examples: ChatGPT, Microsoft Copilot, Grammarly, QuillBot, etc.

Purpose of Use: _____

Examples: grammar correction, idea generation, formatting, summarization, code assistance, explanation of concepts, etc.

Extent of Use: _____

Explain how AI was used and confirm that it did not replace original thinking, analysis, authorship, or completion of the required work.

By submitting this activity, I affirm that my use of AI complies with T.I.P.'s AI usage policy and does not exceed the permitted limits for similarity, automated content generation, or academic assistance.

I understand that any false, incomplete, or misleading disclosure may be subject to investigation in accordance with due process and may result in sanctions for violation of existing T.I.P. policies.

Lab activities, templates, and related instructional materials shall not be reuploaded, reproduced, distributed, or shared with external organizations or third parties without the prior express written permission of the Technological Institute of the Philippines.