
CJA

02 September 2026 10:27

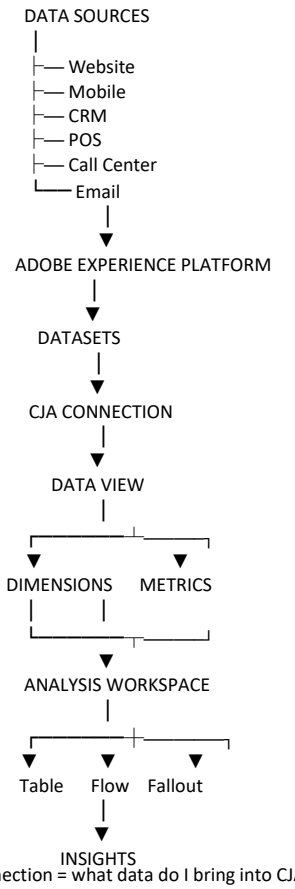

Connection = what data do I bring into CJA?

Data view = how do I want CJA to interpret/present that data for analysis?

Workspace = how do I analyze it

Part 1:

What is CJA: customer journey analytics

CJA is an adobe application that enables organizations to analyze customer journey data from multiple channels and sources in a unified ,cross channel view.

Why we need CJA:

- Customer might interact with the company through (website ,mobile app ,email etc)
- If you analyze each system separately you don't get the complete story
- CJA helps bring these interactions together for analysis.

What does journey mean?


A customer journey is the sequence of interactions a customer has with a business.
Understand:

- What did the customer do?
- When did they do it?
- Which channel did they use?
- What happened before purchase?
- What caused conversion?
- Where did they drop off?

What does "Analytics" mean?

Using data to understand what happened and make decisions.

CJA Architecture work flow

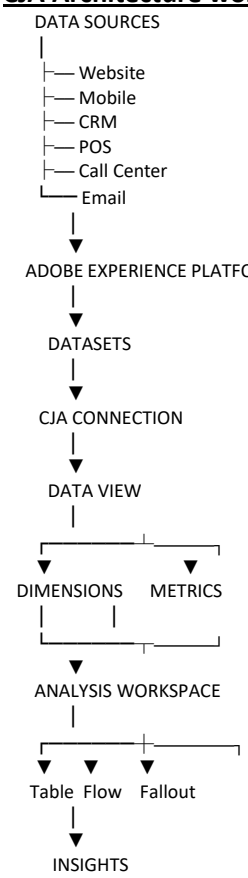

Important terms and Definitions:

Customer
The individual whose interactions we're analyzing.

Journey
The **sequence of interactions** a customer has with a business.

Event
An individual interaction/action.
Examples:

- Page View
- Product View
- Add to Cart
- Purchase
- Login
- Email Click

Channel
The **medium** through which interaction occurs.
Examples:

- Website
- Mobile App
- Email
- Store
- Call Center

Dataset
A collection of data **records** in **Adobe Experience Platform.**

Connection
Defines the **Platform** datasets/**data available** to CJA for analysis.

Data View
Defines how the **data** in a CJA Connection is **interpreted** , **exposed and presented as dimensions, metrics and other component for analysis in workspace**.

Workspace
The place where you actually build your **analysis** ,**visualizations** using dimensions , metrics , segments and other components.

- Tables
- Charts
- Funnels
- Customer flows
- Cohorts
- reports

Person ID
Is the identifier CJA uses to associate events with a person across datasets.

Identity
Is an identifier that represents a person ,device or entity involving in an interaction
Eg: customerID , ECID, email , loyaltyID , accountID

Identity != personID

An identity can be one of several identifiers while personID is the identifier configured for person level analysis in a CJA connection.

Note : one connection can have multiple data views

Part 2:

EXAMPLE : Build a purchase analysis

Dimensions:

- Product
- Country
- Marketing channel
- Device

Metrics

- Orders
- Revenue
- People
- Events

In workspace we can build:

Product	Order	revenue
Phone	12000	1.2CR
Laptop	800	1.5CR
Watch	500	30L

Dimension: is a descriptive attribute used to categorize , breakdown or filter data during analysis.
Eg: product , country , device, page , campaign , marketing channel

Metric: is a quantitative measurement used to measure activity , performance or outcomes.
Eg: Revenue , orders , people , sessions , events , product views

Components: is an individual configurable object used within a CJA analysis , such as a dimension , metric , segment , data range or other analysis element.
It is the building block you use in CJA.

Segment: is a defined subset of data or people that meets specific criteria.

Session : is a sequence of events grouped together based on defined sessionization rules within a specific time period.

Connection : is a configuration that makes selected AEP datasets available for analysis in CJA and establishes the identity relationship used to associate data.

Data view : is a con	figuration layer that determines how data from a CJA connection is interpreted and exposed as component for analysis.

Panel: is a section/container in a workspace project where you build a particular analysis.

Conversion : is a desired customer action or business outcome.
Eg: purchase , signup , subscribe, application submission , booking

For an e-commerce company purchase can be considered the conversion.

Lookup dataset: contains additional information that can be associated with another dataset using a matching key.

Part 3:

Types of Dataset:
1.Event dataset : contains time-stamped records representing customer or business interactions.
(what happened when it happened)
Eg:

Timestamp	Person ID	Event
10.01	C001	Product view
10.05	C001	Add to cart
10.15	C001	Purchase
11.30	C002	Product view

2.Profile Dataset: contains attributes about a person/customer rather than a stream of individual interactions.
(Information about the customer)

Eg: customer id -> C001
Name -> Mani
customer type -> premium
country -> India
loyalty tier -> gold

3.Lookup dataset: provides additional descriptive information that can be matched to another dataset through a key.
Eg:
Event dataset
Product id = P001

But your event doesn't contain all product details

Lookup dataset:

Product ID	Product name	Category	Brand
P001	iPhone	Mobile	Apple
P002	Galaxy	Mobile	Samsung

4. Summary dataset
Summary data is aggregated data


Instead of individual events:
10.01 - > $500
10.02 -> $700
10.03 -> $300
…


YOU MIGHT HAVE

Date	Revenue
Sept 1	$1500000

Sept 2	$1700000
Sept 3	$1400000

Part 4 : CJA connections - Deep dive

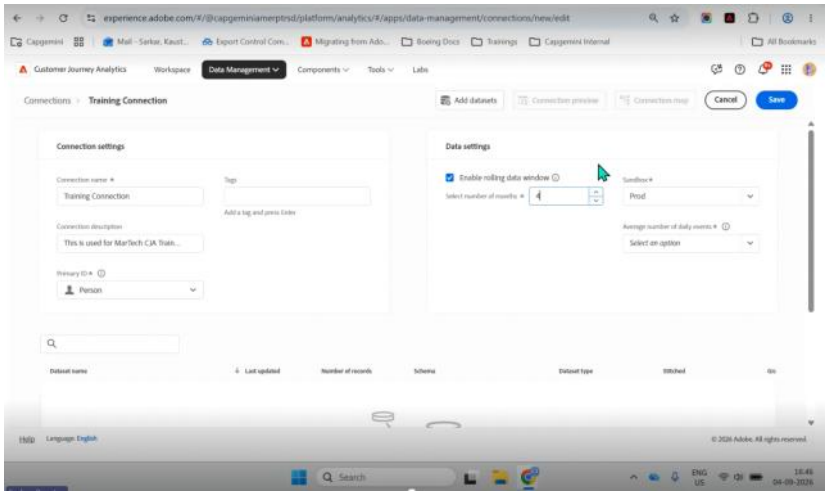

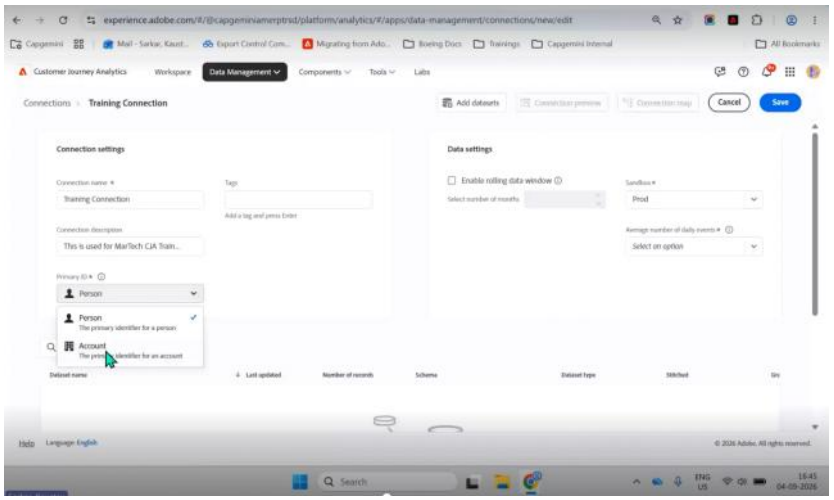

Person ID: Is the identifier CJA uses to associate events with a person across datasets.

Eg: website dataset personID = C001
mobile dataset personID = C001
store dataset personID = C001

Website ---------C001----|
Mobile ----------C001----|------person C001
Store ------------C001----|

Why is Person ID so important? ★ ★ ★
Imagine this data:
Website:
C001 → Product View

App:
C001 → Add to Cart

Store:


C001 → Purchase
If CJA knows that C001 represents the same person across these datasets:
View
↓
Add to Cart
↓
Purchase


Now you can analyze the journey.
Without a usable common identifier, it becomes much harder to associate those records as belonging to the same person.

Does Person ID have to be the same field name? ⭐

No.
This is an important practical point.
Suppose:
Website → customer_id
CRM → customerID
Store → loyalty_id
The field names are different.
What matters is whether you've configured appropriate identity fields so CJA can associate records correctly.

So don't think:
"The column names must literally be identical."
Think:
"The identifiers need to represent the same person and be configured appropriately.".

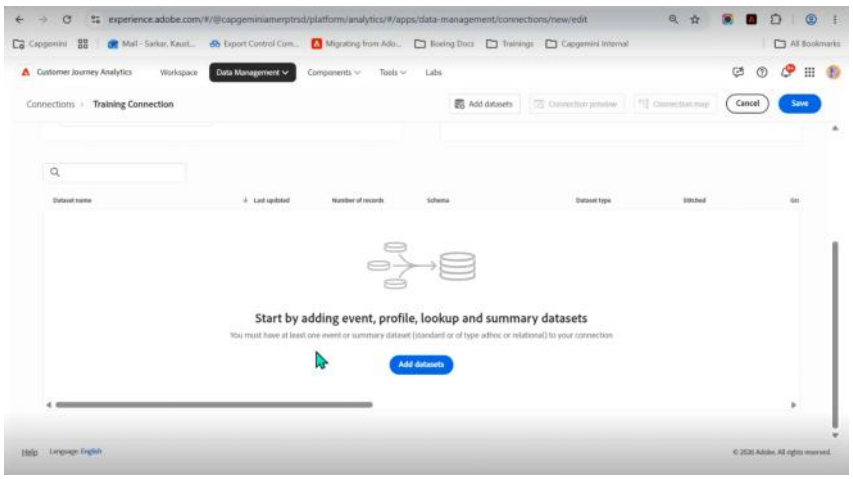

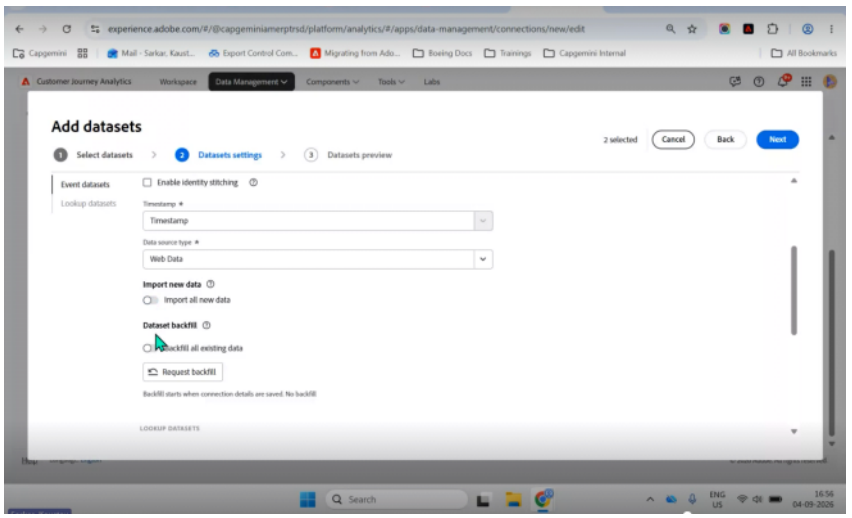

Data backfill ★★★

Here's another Connection concept you should know.
Imagine you create a Connection today.
Your dataset already has 2 years of historical data.
Do you want CJA to analyze that old data?
That's where backfill comes in.
Simple meaning:
Backfill is the process of making historical data available for analysis when setting up a CJA Connection.

Import new Data:
It will also import the new data that comes into the dataset after creating the connection.

Note: about the two settings (backfill and new data) ★★★


Now these are two settings.
Import new data. So what happens is say you have batch injection in your data or whatever could be streaming as well. So your data gets updated, right?
New data comes. So you want those updates to flow into CJ automatically, you need to turn on this toggle.

And backfill is the historical data that. your data set already has. If you like enable it, it is going to backfill old data, previous data also,

but if you keep it off and keep this open, so what will happen is any data that is coming in the future,
only those will flow into CJ, not the older ones. And vice versa.

People , Sessions and Events -> customer , visit ,add to cart

Part : Identity stitching

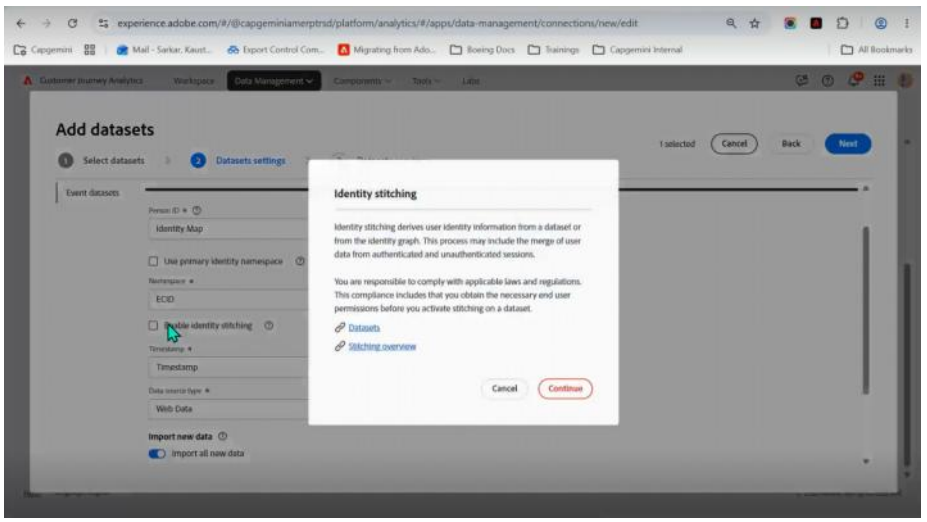

Part 6 : Identity and personID in CJA


ECID: is an

Phase 2: CJA Connection

Phase 3: CJA Data View

Phase 4: Workspace

workspace
1.metric vs dimension (channel vs ppl ,session ,events , revenue ,quantity)

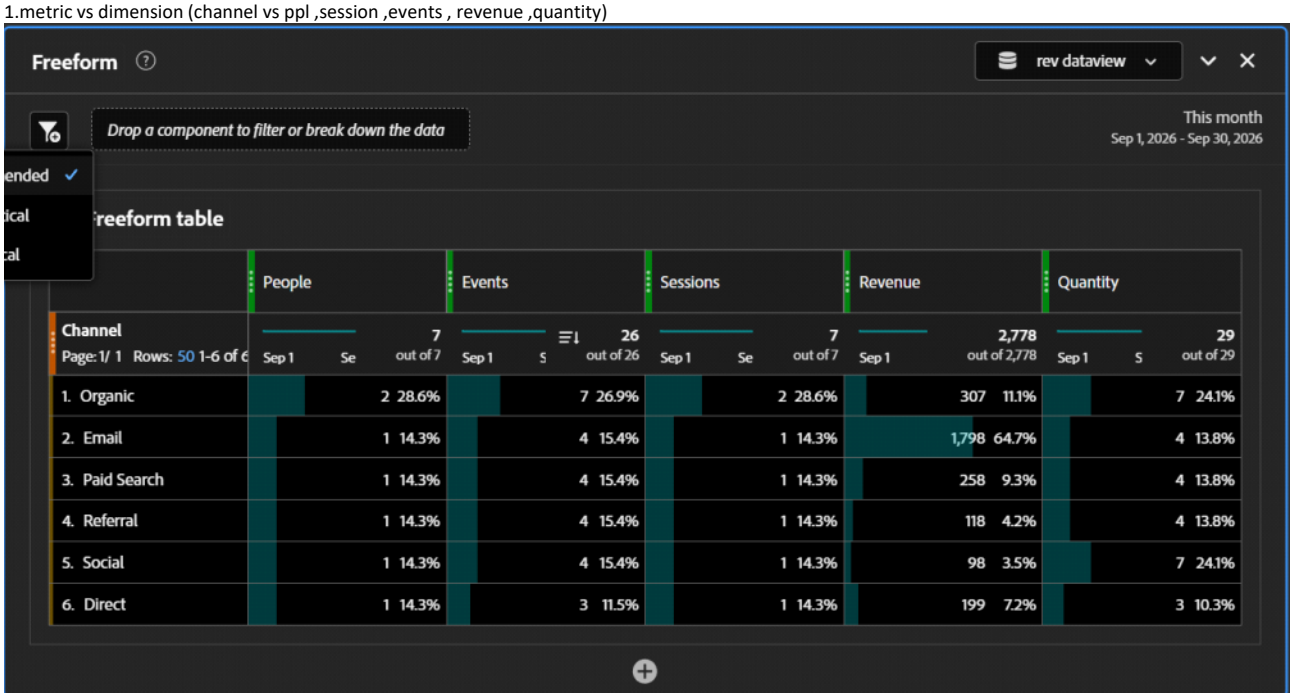


How we read :
one person ,in one session generated four events and 1789 revenue across four units.
organic bought more people and events than email but email generated far more revenue.

2.dimension breakdown (event breakdown product Name)



Right click on email -> breakdown -> dimension -> product name
Within each channel what product are responsible for the results?

3.sorting and filtering
Sorting : which channel generated the most revenue?
Revenue column header -> sort icon -> descending or ascending





Filter: shows only the necessary attributes



4.Data Range


5.Segments
Help us analyze only customers associated with mobile

Segment scope:

People container- identify ppl who meet condition
Event container- identify individual events that meet a condition
Session container- identify session that meet a condition

Eg: People who purchased , session containing a purchase , purchase events


1. People who made a purchase
   Components -> segemets -> create segment

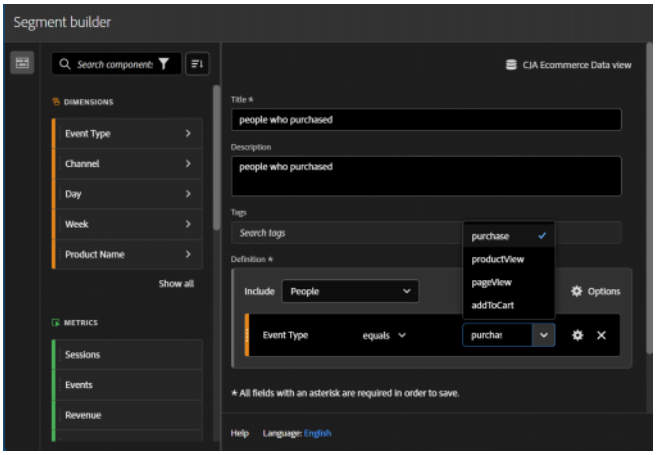


6.Segment Builder (AND/OR Logic)

Find people who used Email AND purchased

Component-> segment->create

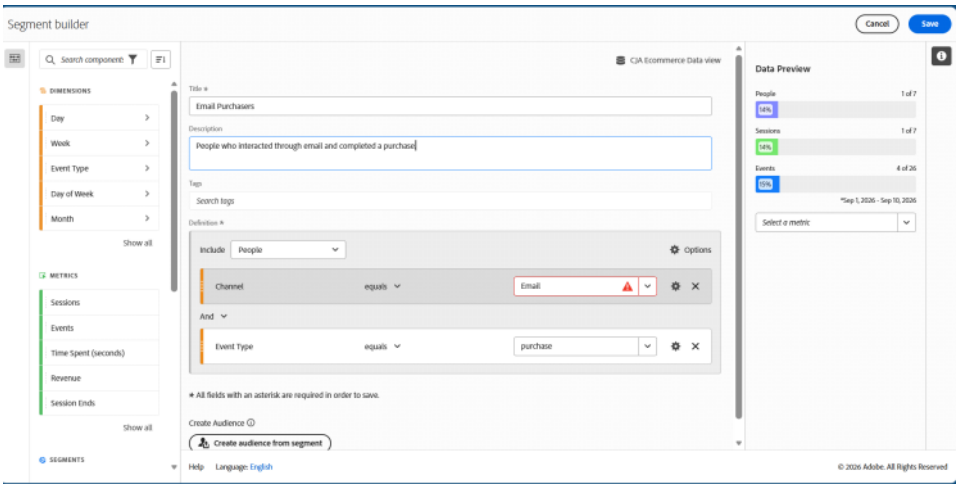


-

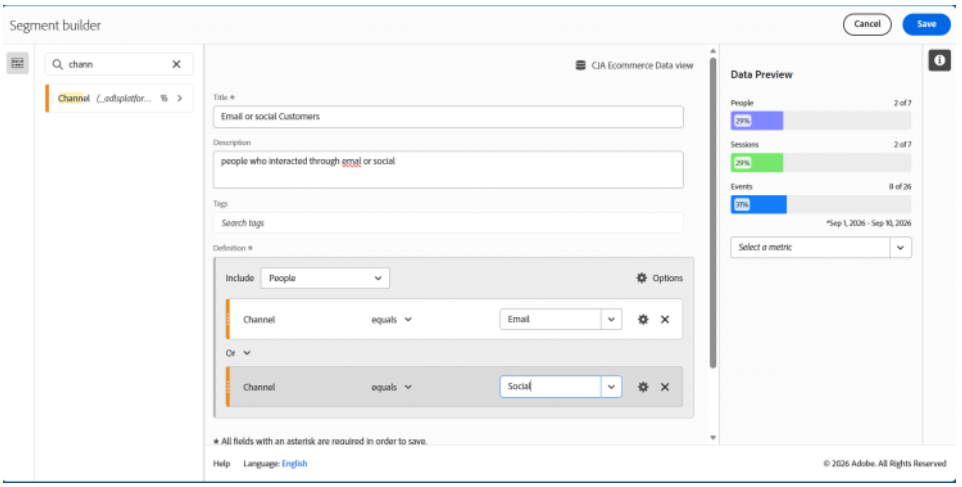


7.Then -sequential segments:


people who viewed a product and then completed a purchase

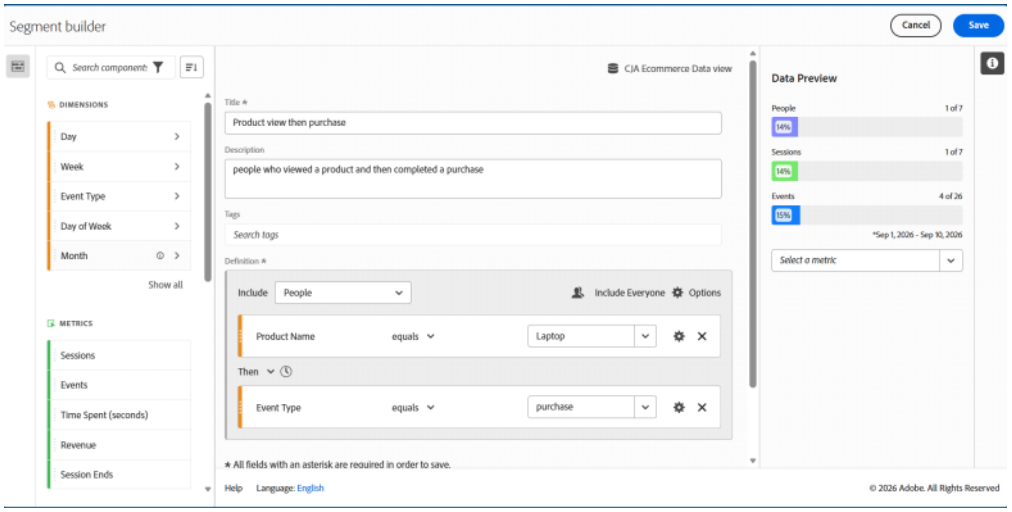

8.Within and After constraints

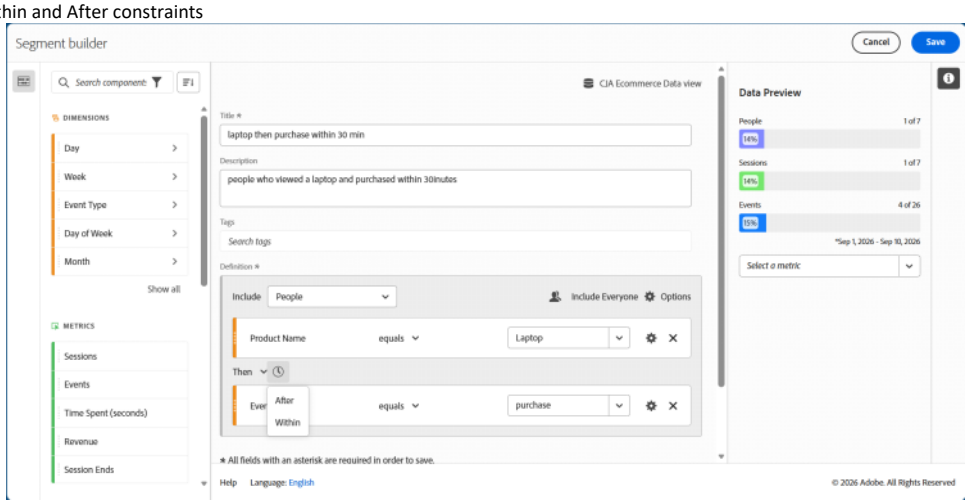


->>Within : people who viewed a laptop and purchased within 30inutes

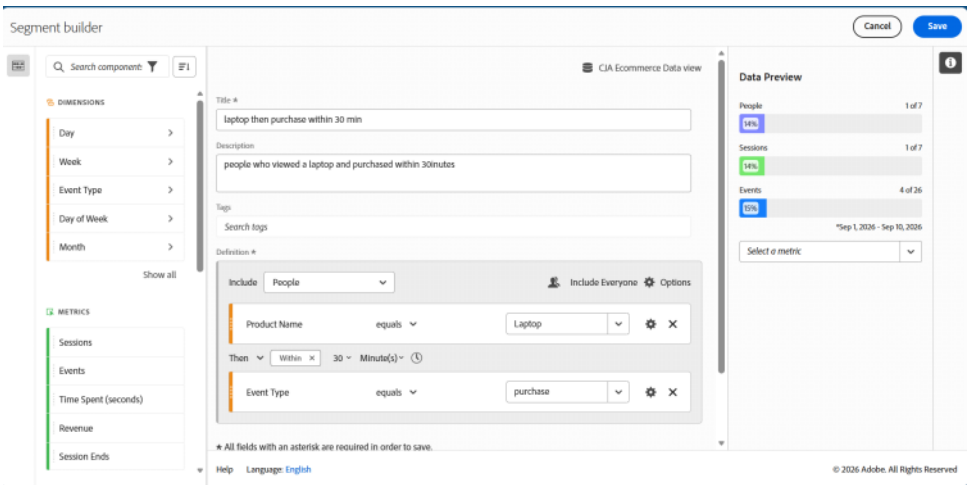

1. Nested Containers
   It is a advanced segment builder concepts.
   Where an outer container can narrow the data before the nested container is evaluated.

-> people who came through email and within those people ,had a session containing a purchase.

1.create a outer container
Include- people --> channel = email
2.add a nested session container
Click the gear/option for the person container - add container
Include -session event type = purchase

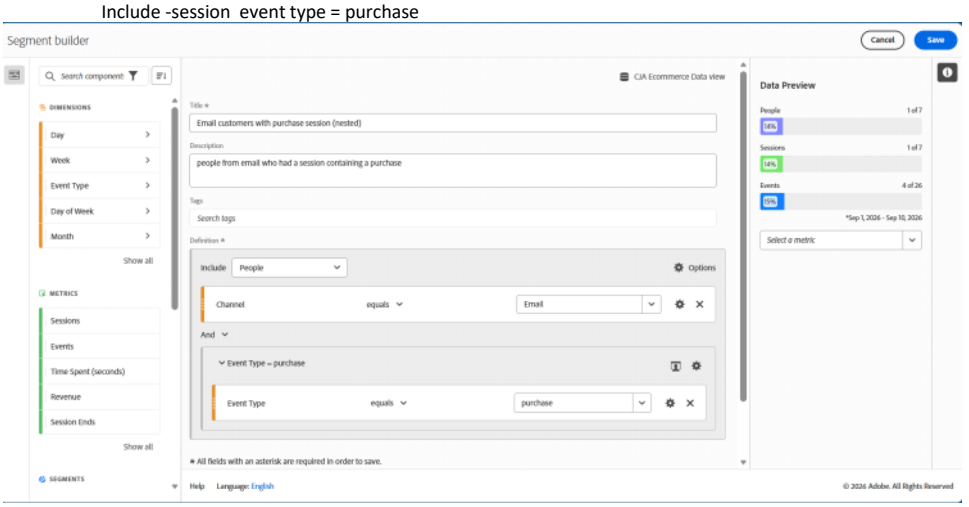


10.Exclude containers
People who did not complete a purchase


Change option from include to exclude



|
v

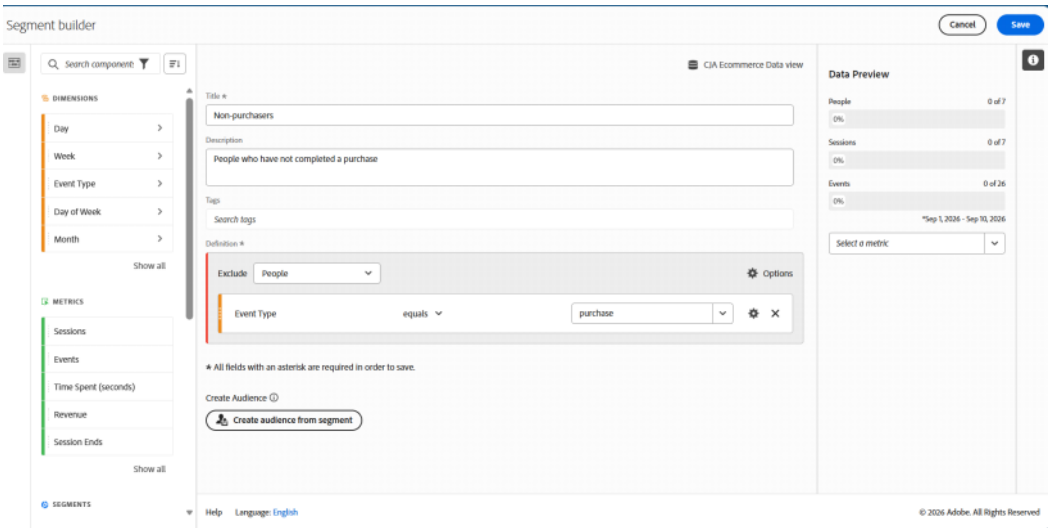


11. People who purchased ,but not a laptop
note:in nested container change the include to exclude and container to include people

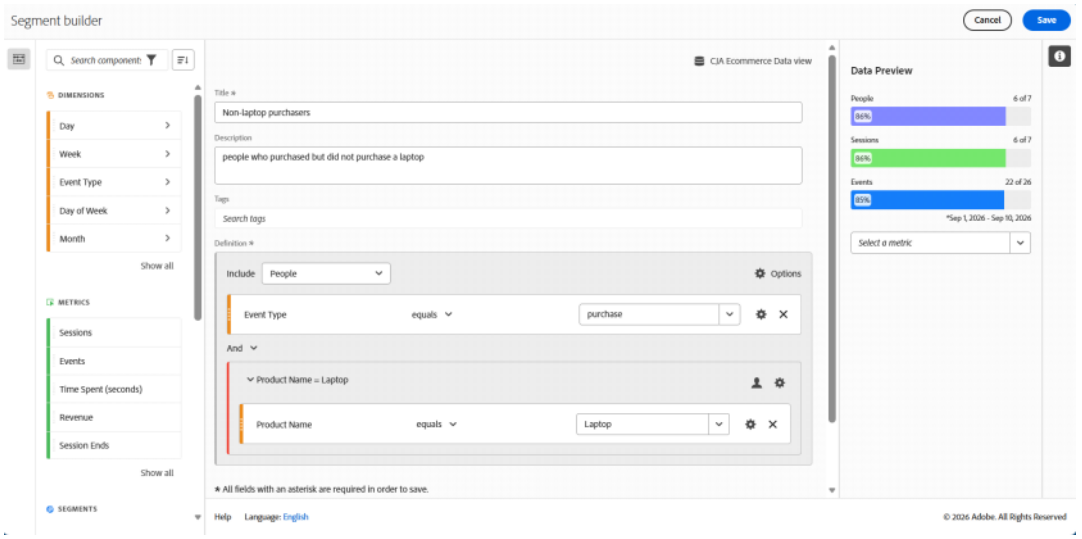

12.Calculated Metric :is a custom metric created by combining existing metric using mathematical operators /function.
Eg: Revenue / events ->>>> could give us average revenue per event

Revenue / Person

Components -> calculated metric

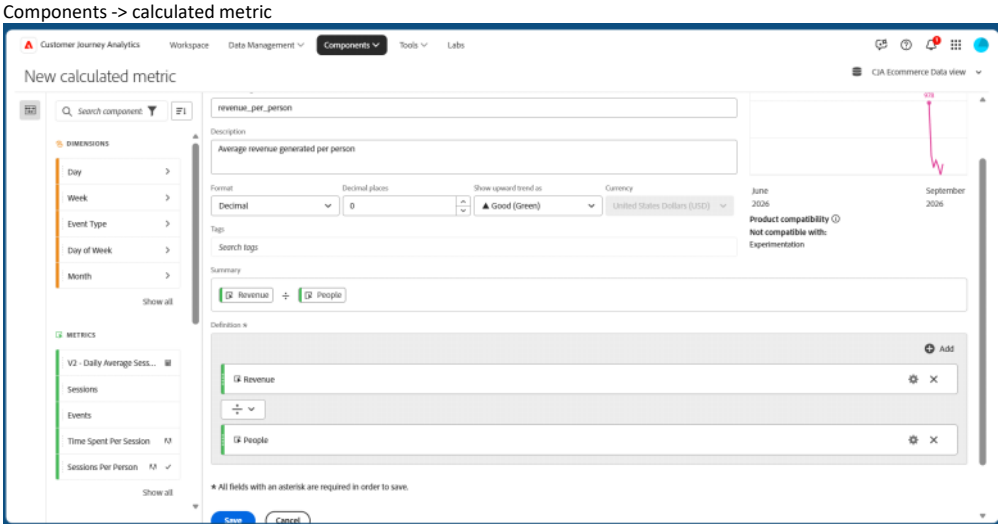


Conversion Rate: Purchase events / events X 100



Static number to add a value 100

Also change the format to percentage and decimal point 2.

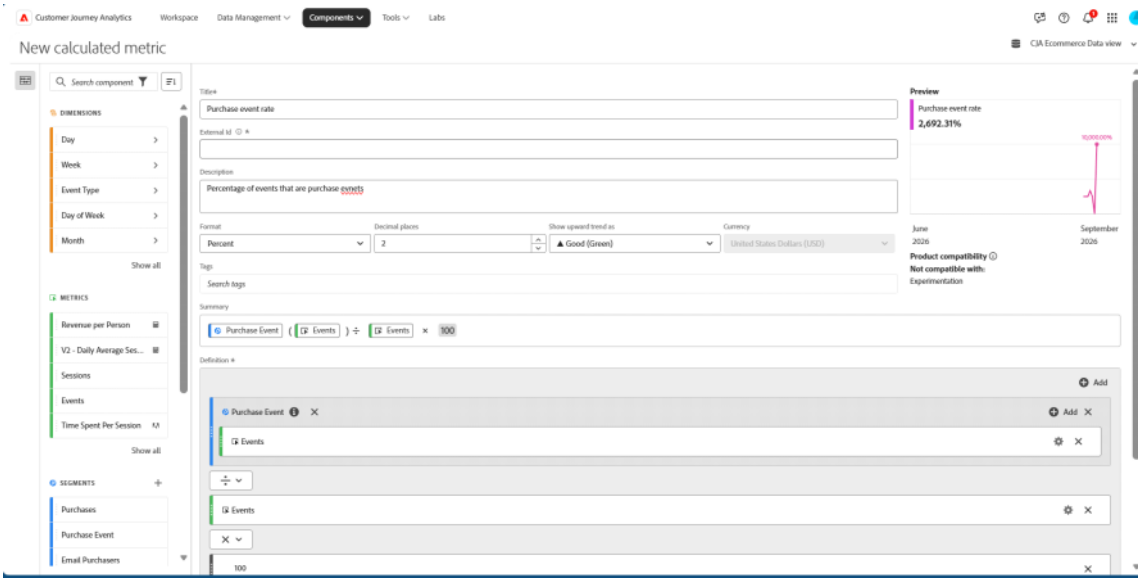

13.Attribution

- Customer journey: paid search -> product page -> Email -> Purchase
- Customer finally purchases for 899
- The question is
- Which channel should get credit for that 899 revenue??

Model	Simple meaning
Last touch	Give 100% credit to last interaction
First touch	Give 100% credit to first interaction
Linear	Split credit equally
Participation	Give credit to every unique touchpoint
Same touch	Credit only the interaction where conversion happened
U-shaped	More credit to first and last
Time decay	More recent interactions get more credit
Custom	You define the weights

Persistency != attribution


Persistency = how a dimension value continues to relate to later events.
Attribution = how credit for a metric conversion is distributed among dimension values

Note: persistence is configured on dimensions , while attribution can be applied to metric/reporting


Hands-on:

Last touch:


Click settings in revenue header column




Select use no -default attribution model

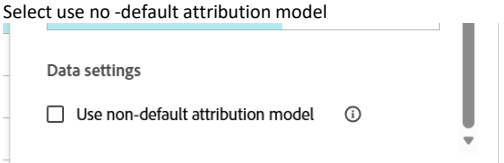

Select last touch point __|

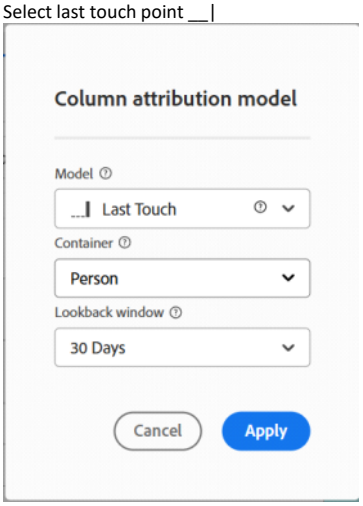


Here container tells CJA how far across the custome's journey it is allowed to look for touchpoint
-> look across this person's journey , rather than limiting attribution to just one session

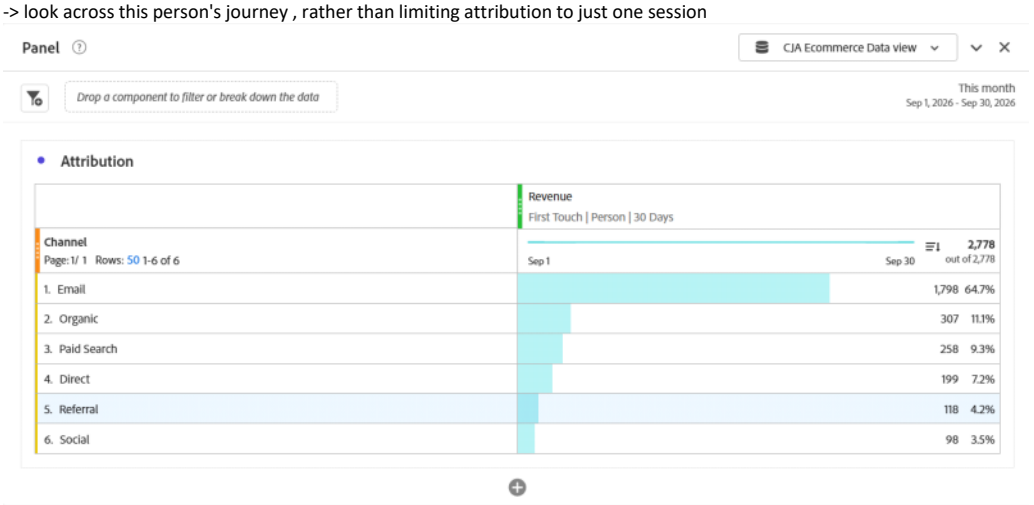



Multiple attribution
First+last+linear

Select attribution panel

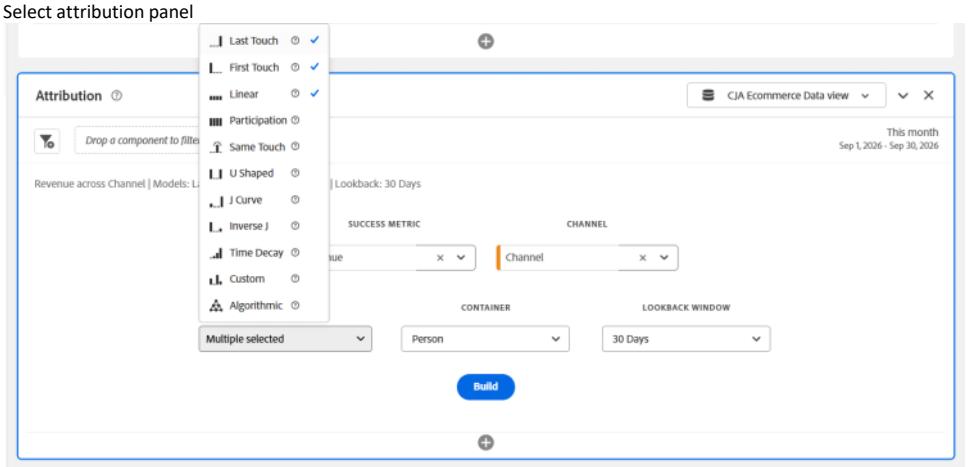




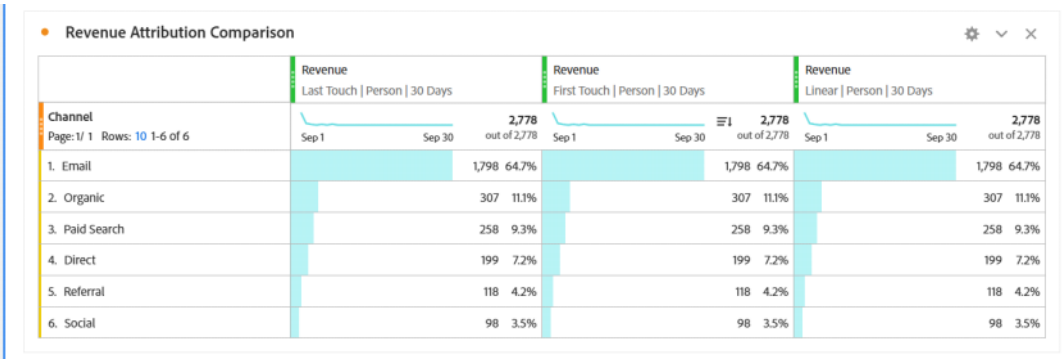

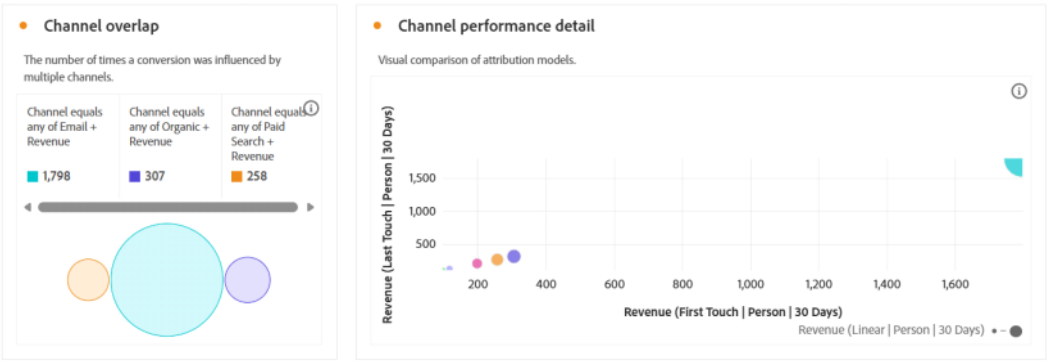

Channel overlap tells how often was a conversation associated with multiple channels

Performance detail: x axis-> first touch
y axis -> last touch

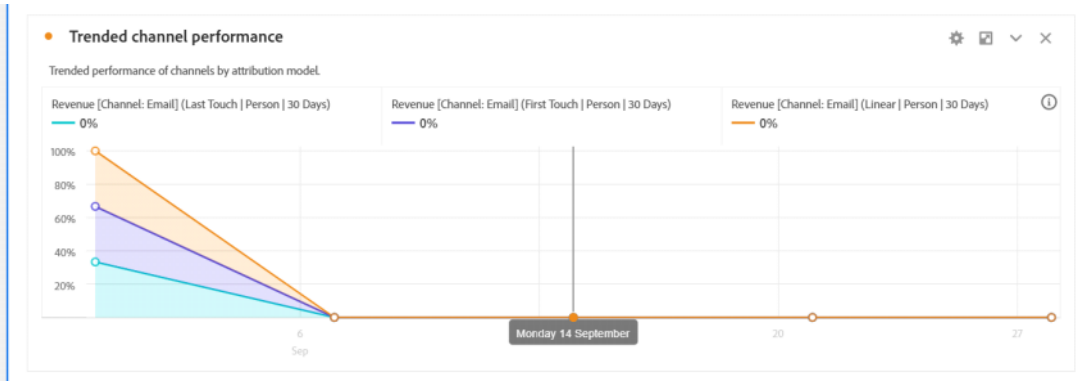

It shows the most trending channel



The path people take across channels and the order in which they interact with them

13.Persistence:how a dimension value continues to relate to later events.

Problem
Normally, a dimension belongs to the event where it exists
Eg:

Event	Channel	Revenue
1	Email	---------
2	--------	$899

Without persistence, the email value exists only on event 1 , so it isnt automatically associated with the 899 on event 2
Persistence allows a dimension value to continue relating to later events/metrics.

Two main parts:


1. Allocation: "which value should survive?"
   a. Event 1->email
   b. Event 2->organic
   c. Event 3-> purchase 899
      You need to decide which channel gets associated with the purchase

      Common allocation option include

Most recent	Keep the last value
Original	Keep the first value
All	Keep all value
First known	Take the first non-empty value observed within the persistence scope and apply it to all events in that scope
Last known	Take the last non empty value -----


2. Expiration: "how long should it survive?"
   We can make persistence expire based on things such as
   - Session
   - Person
   - Custom time
   - Metric

Hands-on
Data management -> data view -> select channel dimention -> left side setting pannel -> go down ->

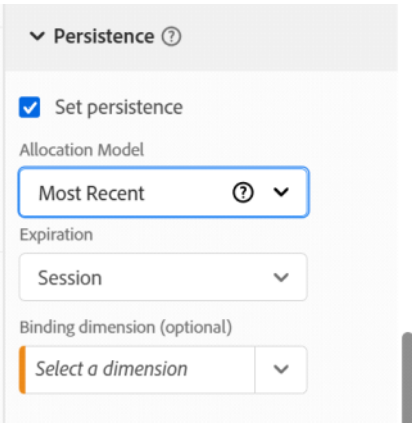


14.Derived fields: lets transform/classify data inside CJA at query time without changing your original AEP dataset


Data management -> data view-> cja ecommerce dataview -> components





Select multi channel

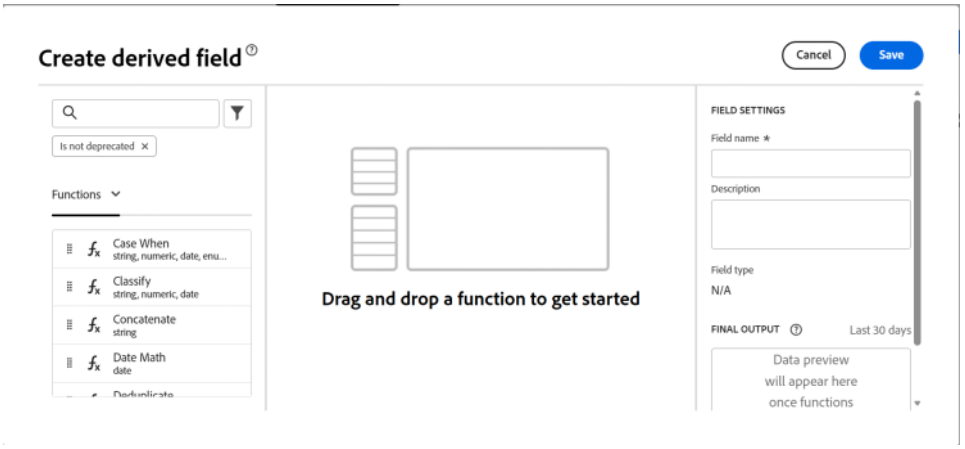

Drag and drop -> case when

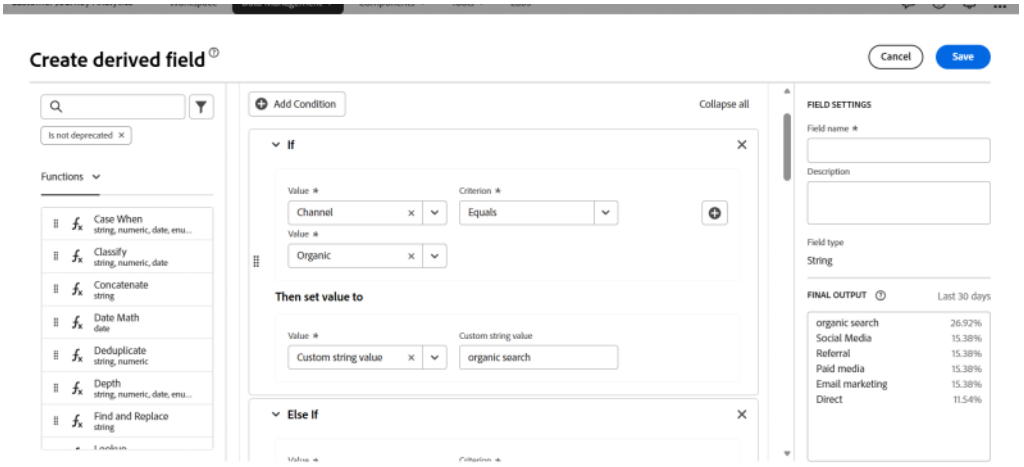
Create derived field
Cancel
Save
Add Condition
Collapse all
Is not deprecated
Functions
Case When
Classify
Concatenate
Date Math
Deduplicate
Depth
Find and Replace
If
Value *
Channel
Criterion *
Equals
Value *
Organic
Then set value to
Value *
Custom string value
Custom string value
organic search
Else If
FIELD SETTINGS
Field name *
Description
Field type
String
FINAL OUTPUT
Last 30 days
organic search 26.92%
Social Media 15.38%
Referral 15.38%
Paid media 15.38%
Email marketing 15.38%
Direct 11.54%

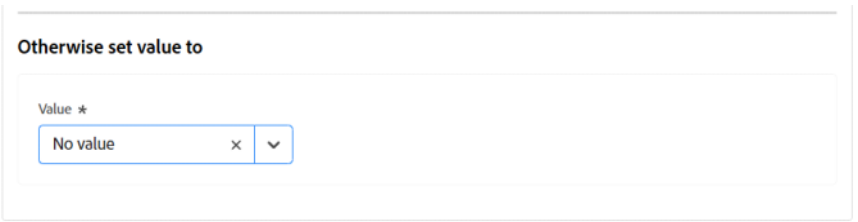
Otherwise set value to
Value *
No value

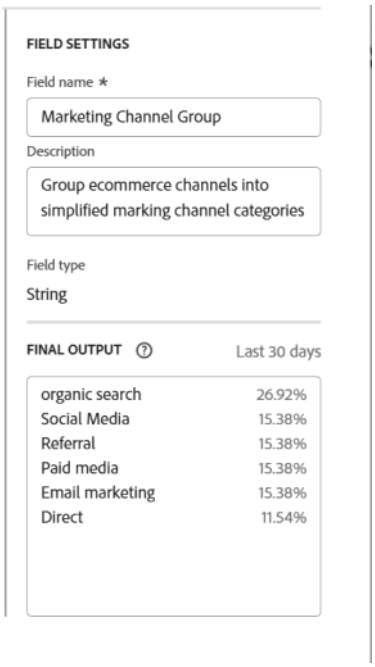
FIELD SETTINGS
Field name *
Marketing Channel Group
Description
Group ecommerce channels into simplified marking channel categories
Field type
String
FINAL OUTPUT
Last 30 days
organic search 26.92%
Social Media 15.38%
Referral 15.38%
Paid media 15.38%
Email marketing 15.38%
Direct 11.54%