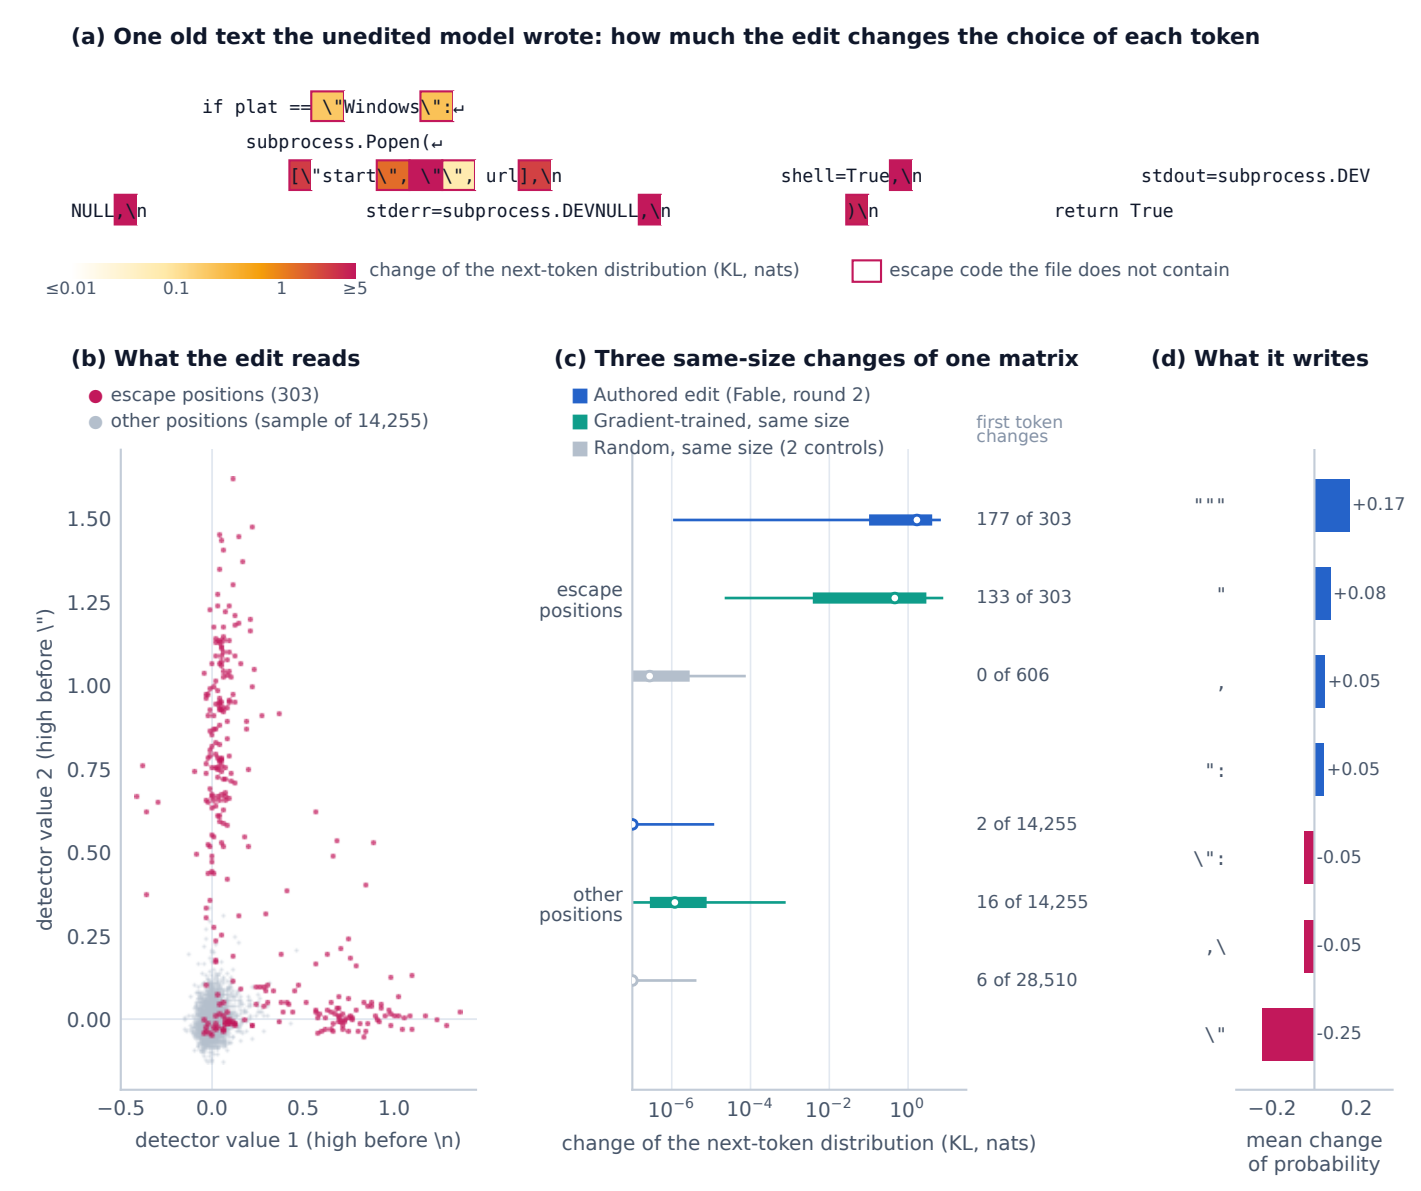
(a) One old text the unedited model wrote: how much the edit changes the choice of each token
if plat == \"Windows\":↵
subprocess.Popen(↵
[\"start\", \"\", url],\n
shell=True,\n
stdout=subprocess.DEV
NULL,\n
stderr=subprocess.DEVNULL,\n
)\n
return True
≤0.01
0.1
1
≥5
change of the next-token distribution (KL, nats)
escape code the file does not contain
(b) What the edit reads
escape positions (303)
other positions (sample of 14,255)
detector value 2 (high before \")
detector value 1 (high before \n)
(c) Three same-size changes of one matrix
Authored edit (Fable, round 2)
Gradient-trained, same size
Random, same size (2 controls)
first token changes
escape positions
other positions
177 of 303
133 of 303
0 of 606
2 of 14,255
16 of 14,255
6 of 28,510
change of the next-token distribution (KL, nats)
(d) What it writes
"""
"
,
":
\":
,\
\"
+0.17
+0.08
+0.05
+0.05
-0.05
-0.05
-0.25
mean change of probability