
harnessrouter

The decision layer for agent execution

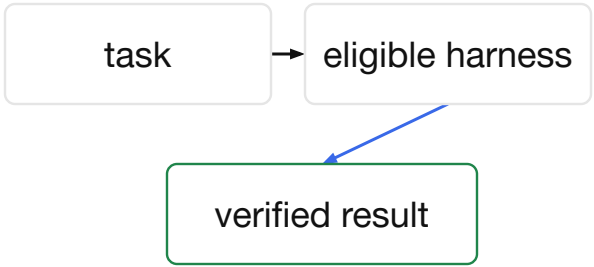

Özgür eryılmaz

the missing layer: execution decisions

task requirements, harness selection, and verification are often handled separately

capability

what is required?

browser · code · creative

routing

where should it run?

policy · cost · reliability


verification

did it pass?

evidence · acceptance checks


who decides which environment should execute each task?

The workflow

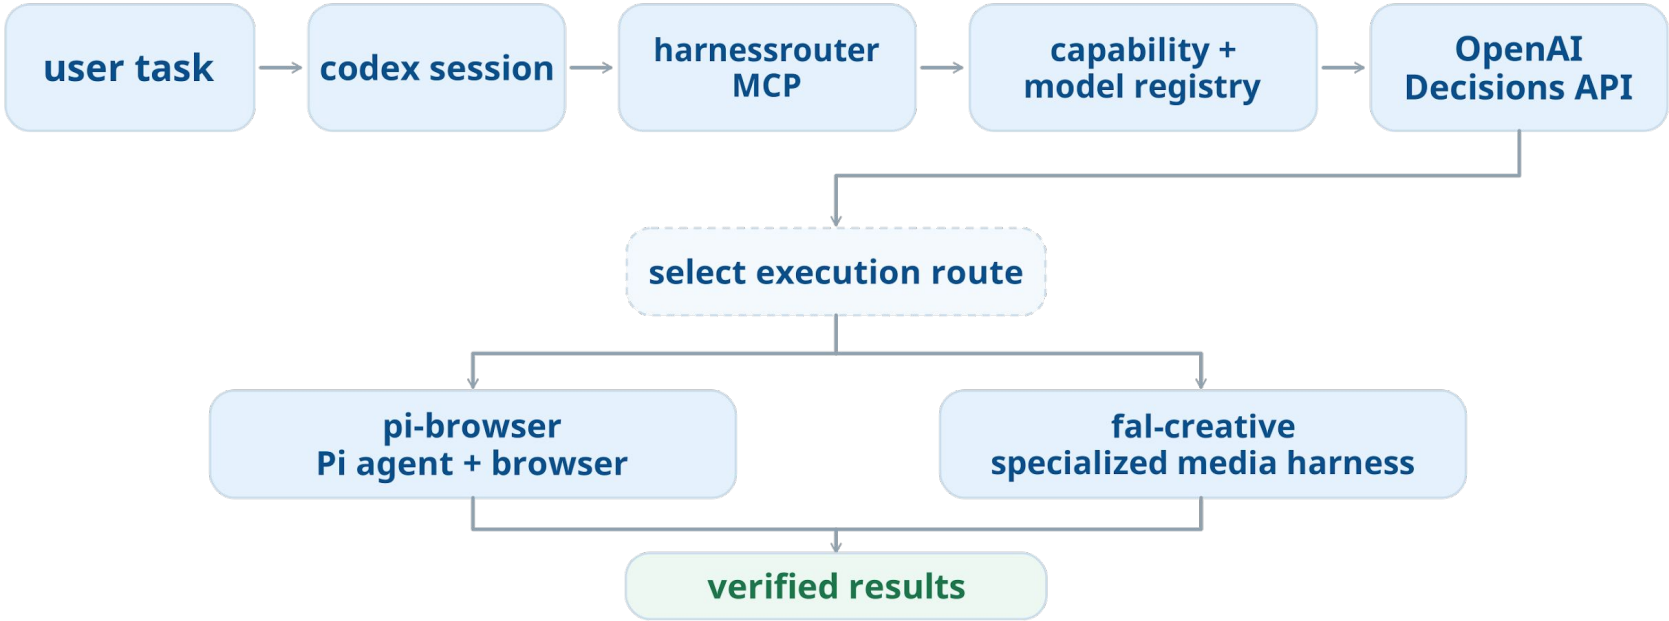

one codex session. two and more harnesses.

Codex orchestrates; MCP routes tasks to independent runtimes

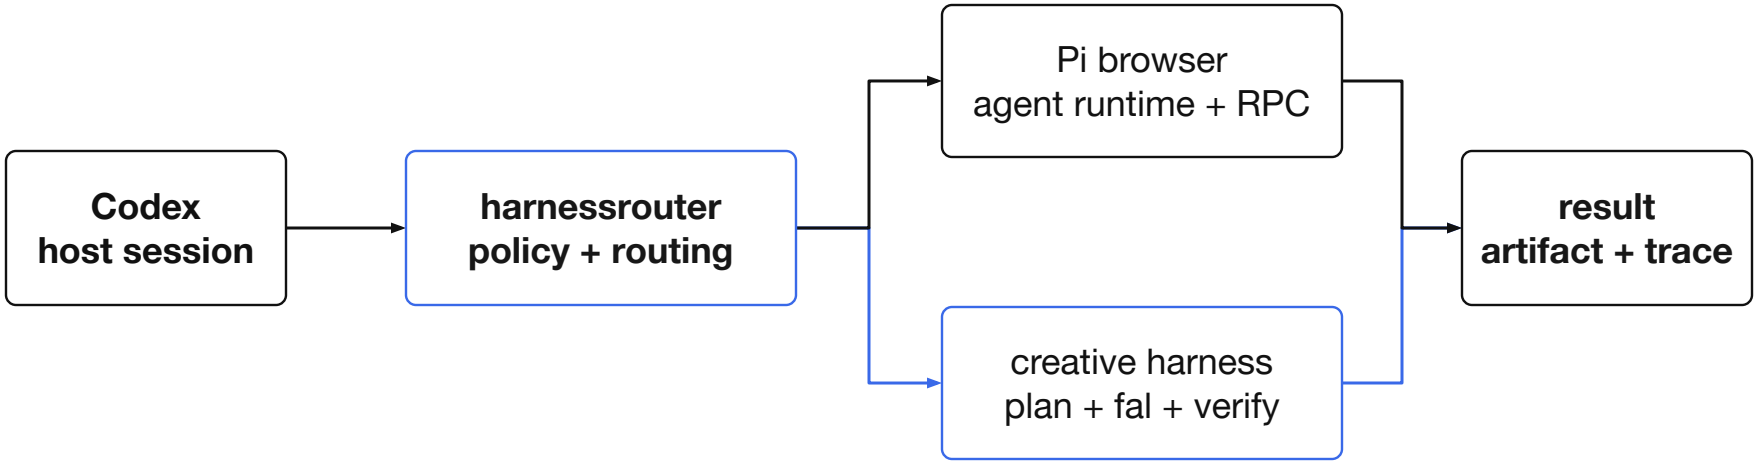


Two independent harnesses share context in one Codex session.

proof: two harnesses, one session

Browser observations reach the image planner; fingerprints verify the handoff

Pi browser

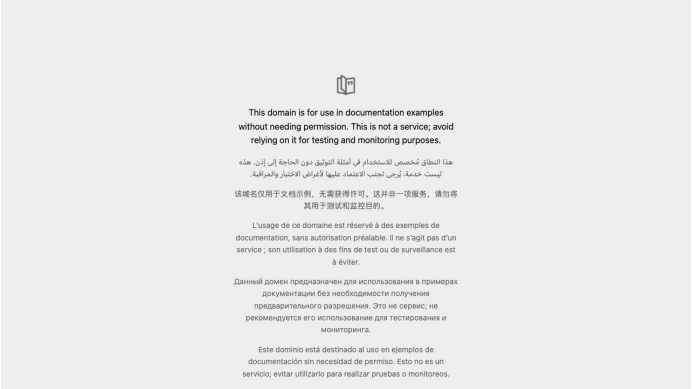

creative harness




context verified

observed style → **decoded image**

comparison

same FLUX.2 endpoint, one sequential trial : direct generation and harnessrouter

total elapsed time (seconds)

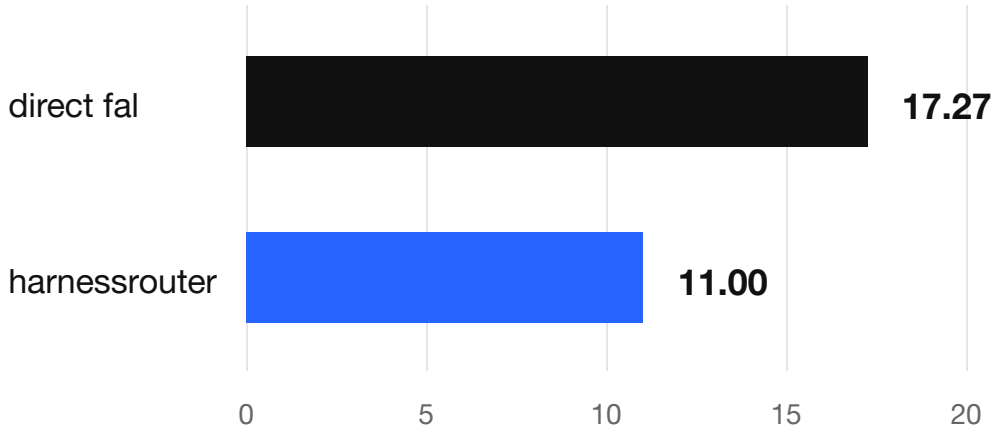

estimated cost (USD)

$0.012000


direct fal api call with codex

$0.012034

harnessrouter + Decisions model

preview the flow

Try the simulation. Next: measure task completion, quality, and manual effort.

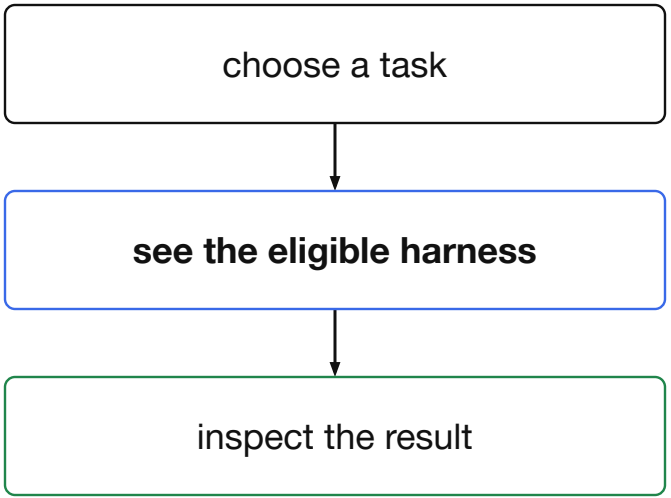

https://ozgureyilmaz.github.io/harnessrouter