

Vulnerability assessment

OpenVAS/Greenbone

Fagnani Marco, Radice Lorenzo

May 19, 2026

Contents

1	Initial configuration	1
1.1	Greenbone	1
1.2	Debian	1
1.2.1	Apache	2
1.2.2	Cups	3
1.2.3	Docker Vulnet	4
1.2.4	FTP	12
1.2.5	Samba	12
1.2.6	SSH	13
1.2.7	Syslog	13
1.3	Windows XP	14
1.4	Network configuration	14
2	System Discovery	17
2.1	OpenVAS Scan	17
2.1.1	Configuration → Ports	18
2.1.2	Target configuration	20
2.1.3	Starting the scan	24

Abstract

The experience will be focused on the vulnerability assessment of an IT system, using the OpenVAS/Greenbone tool. The main goal is to identify and evaluate potential security weaknesses in a target system.. This process involves scanning the system for known vulnerabilities, analyzing the results, and providing recommendations for remediation. The experience will also cover the configuration and usage of OpenVAS/Greenbone, as well as best practices for conducting vulnerability assessments effectively.

Chapter 1


Initial configuration

1.1 Greenbone

Greenbone/OpenVAS is an open-source vulnerability scanning tool that provides comprehensive security assessments for IT systems. To set up Greenbone/OpenVAS, firstly download the official Greenbone/OpenVAS OVA file from the Greenbone website.

<https://www.greenbone.net/en/openvas-free/>

Then, import the OVA file into VirtualBox 6.1 or higher. Assign at least 5GB of RAM and 2 CPU cores to the virtual machine. It's better to use about 12GB of RAM. For the first configuration, use the bridge network adapter, which allows the virtual machine to be on the same network as the host machine. Start the Greenbone/OpenVAS virtual machine and follow the on-screen instructions to complete the initial setup. Assign a user for the web interface. Once the setup is complete, access the Greenbone/OpenVAS update the feed by going to **Maintenance>Feed>Update** and wait it to synchronize (usually hours).

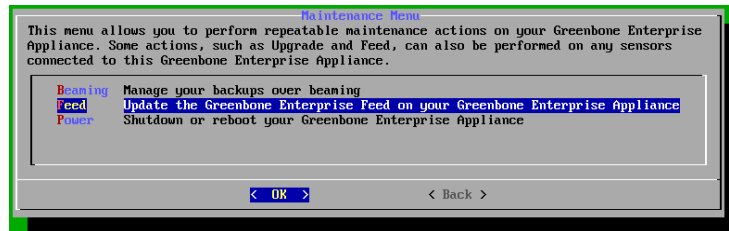

1.2 Debian

Debian is an open-source operating system based on GNU/Linux. It will be used as a base to create a vulnerable machine. We used the latest stable version of Debian, which is Debian 13 Trixie.

1.2.1 Apache

Install Apache web server and create weak certificates for it. configure Apache to allow the use of weak protocols and ciphers, such as SSLv3, TLS1.1, DES, RC4 and MD5.

```
1  #!/bin/bash
2
3  apt-get update
4  apt-get install -y apache2 php libapache2-mod-php
5  rm -rf /var/lib/apt/lists/* /var/cache/apt/archives/*
6
7  a2enmod ssl
8  a2enmod rewrite
9  a2enmod headers
10 a2enmod proxy
11 a2enmod proxy_http
12 a2dissite 000-default.conf
13 echo "ServerName 127.0.0.1" | tee /etc/apache2/conf-available/servername.conf
14 a2enconf servername
15
16 output_dir=certs
17 mkdir -p $output_dir
18 cd $output_dir
19 openssl genrsa -out weak.key 1024
20 openssl req -new -key weak.key -out weak.csr -subj
21 ↪ "C=XX/ST=Lab/L=Vulnbox/O=Insecure/OU=Testing/CN=localhost"
22 openssl x509 -req -days 1 -in weak.csr -signkey weak.key -out weak.crt -sha1
23 ↪ #openssl x509 -req -days 3650 -in weak.csr -signkey weak.key -out weak_md5.crt
24 ↪ -md5
25
26
27 mkdir -p /etc/apache2/ssl
28 cp weak.* /etc/apache2/ssl/
29
30
31 tee /etc/apache2/sites-available/vulnbox.conf << EOF
32 <VirtualHost *:80>
33     ServerName localhost
34
35     ProxyPreserveHost On
36     ProxyPass / http://127.0.0.1:8000/
37     ProxyPassReverse / http://127.0.0.1:8000/
38
39     # No security headers
40 </VirtualHost>
41
42 <VirtualHost *:443>
43     ServerName localhost
44
45     SSLEngine on
46     SSLCertificateFile /etc/apache2/ssl/weak.crt
47     SSLCertificateKeyFile /etc/apache2/ssl/weak.key
48
49     # Allow TLS 1.0 only if OpenSSL supports it
50     SSLProtocol all -SSLv3 -TLSv1.3 -TLSv1.2 -TLSv1.1
51     #SSLProtocol all -SSLv3
52
53     SSLCipherSuite ALL:NULL:EXPORT:LOW:MEDIUM:DES:RC4:MD5:@SECLEVEL=0
```

```

50     #SSLCipherSuite aNULL:EXPORT:LOW:ALL:@SECLEVEL=0
51     #SSLCipherSuite HIGH:!aNULL:@SECLEVEL=0
52     #SSLCipherSuite ALL:NULL:EXPORT:LOW:@SECLEVEL=0
53
54     SSLHonorCipherOrder off
55
56     #SSLCompression on
57     SSLSessionTickets On
58
59     SSLOpenSSLConfCmd MinProtocol SSLv3
60     SSLOpenSSLConfCmd CipherString DEFAULT:@SECLEVEL=0
61
62     ProxyPreserveHost On
63     ProxyPass / http://127.0.0.1:8000/
64     ProxyPassReverse / http://127.0.0.1:8000/
65
66     Header always unset Strict-Transport-Security
67     Header always unset X-Frame-Options
68     Header always unset X-Content-Type-Options
69 </VirtualHost>
70 EOF
71
72 a2ensite vulnbox.conf
73
74 tee /etc/php/7.4/apache2/php.ini << EOF
75 display_errors = On
76 display_startup_errors = On
77 allow_url_fopen = On
78 allow_url_include = On
79 disable_functions =
80 open_basedir =
81 expose_php = On
82 EOF
83
84 systemctl restart apache2

```

Any website can be used as exposed service. In our case we used an old project of ours, properly modified to be vulnerable.
`git clone -b vulnerable https://github.com/ozneroL541/artigianato-online.git`
 To run it execute the following commands in the terminal:

```

1  cd artigianato-online/src
2  docker compose up --remove-orphans -d

```

1.2.2 Cups

Install the CUPS printing system and configure it to allow remote administration without authentication.

```

1  #!/bin/bash
2
3  apt-get update
4  apt-get install -y cups
5  rm -rf /var/lib/apt/lists/* /var/cache/apt/archives/*
6
7  tee /etc/cups/cupsd.conf << EOF

```

```

8 Listen 0.0.0.0:631
9
10 <Location />
11     Order allow,deny
12     Allow all
13 </Location>
14
15 <Location /admin>
16     Order allow,deny
17     Allow all
18 </Location>
19
20 WebInterface Yes
21 DefaultAuthType Basic
22 EOF
23
24 systemctl enable --now cups

```

1.2.3 Docker Vulnet

To simulate a complex network environment, we are using a docker container with multiple vulnerable services. The scope of this network is to show the capabilities of Greenbone/OpenVAS in scanning a complex system. To set up the network we used the following docker compose file:

```

1 #####
2 # Vulnerability Assessment Lab
3 #
4 # Network: 172.30.0.0/22
5 #   host      - 172.30.0.1/24
6 #   vulnbox1 - 172.30.0.2/24 172.30.1.1/24
7 #   vulnbox2 - 172.30.1.2/24 172.30.2.1/24
8 #   vulnbox3 - 172.30.2.2/24
9 #   vulnbox4 - 172.30.2.3/24
10 #   vulnbox5 - 172.30.2.4/24 172.30.3.1/24
11 #   vulnbox6 - 172.30.3.2/24
12 #####
13
14 networks:
15   # Bridge { directly reachable from host
16   net0:
17     driver: bridge
18     driver_opts:
19       com.docker.network.bridge.name: "vulnlab0"
20     ipam:
21       config:
22         - subnet: 172.30.0.0/24
23           gateway: 172.30.0.1
24
25   # Internal macvlan segments { isolated from host, routed only through vulnbox1
26   net1:
27     driver: bridge
28     driver_opts:
29       com.docker.network.bridge.name: "vulnlab1"
30     internal: true           # blocks direct host - net1 traffic
31     ipam:

```

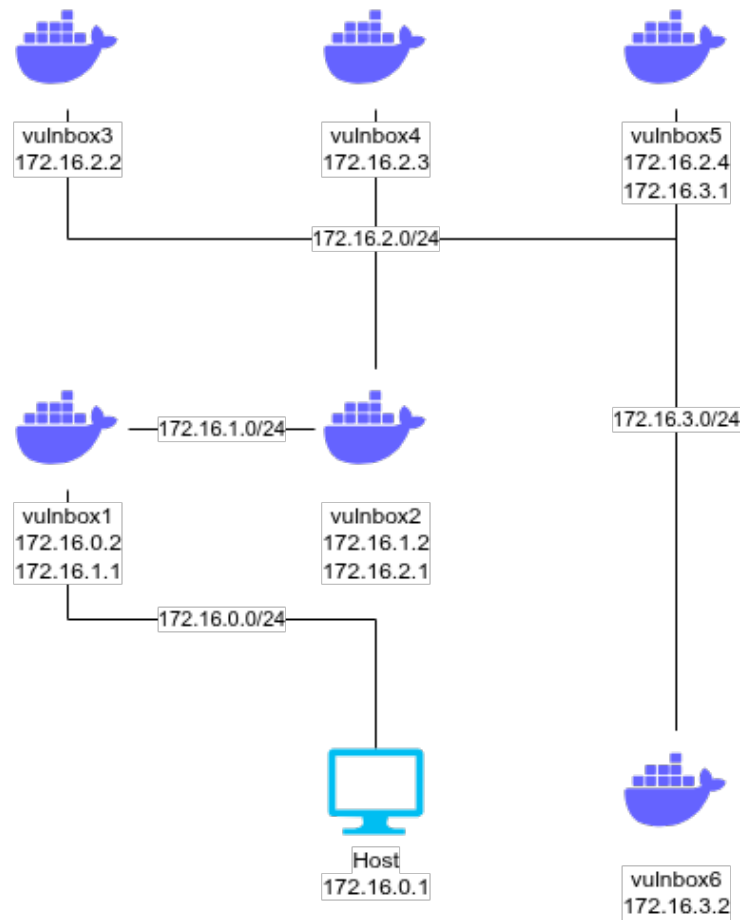


Figure 1.1: Docker network configuration

```

32     config:
33         - subnet: 172.30.1.0/24
34           gateway: 172.30.1.254
35
36 net2:
37     driver: bridge
38     driver_opts:
39         com.docker.network.bridge.name: "vulnlab2"
40     internal: true           # blocks direct host - net2 traffic
41     ipam:
42         config:
43         - subnet: 172.30.2.0/24
44           gateway: 172.30.2.254
45
46 net3:
47     driver: bridge

```

```

48     driver_opts:
49         com.docker.network.bridge.name: "vulnlab3"
50     internal: true
51     ipam:
52         config:
53             - subnet: 172.30.3.0/24
54               gateway: 172.30.3.254
55
56
57 services:
58     # --- VULNBOX 1 { Entering node -----
59     vulnbox1:
60         build:
61             context: ./network/vulnbox-1
62             dockerfile: Dockerfile
63         image: vulnbox1:latest
64         container_name: vulnbox1
65         hostname: vulnbox1
66         networks:
67             net0:
68                 ipv4_address: 172.30.0.2
69             net1:
70                 ipv4_address: 172.30.1.1
71         cap_add:
72             - NET_ADMIN
73         privileged: true
74         restart: unless-stopped
75
76     # --- VULNBOX 2 { Apache Struts 2.3.31 (CVE-2017-5638) ----
77     vulnbox2:
78         build:
79             context: ./network/vulnbox-2
80             dockerfile: Dockerfile
81         image: vulnbox2:latest
82         container_name: vulnbox2
83         hostname: vulnbox2
84         networks:
85             net1:
86                 ipv4_address: 172.30.1.2
87             net2:
88                 ipv4_address: 172.30.2.1
89         cap_add:
90             - NET_ADMIN
91         privileged: true
92         restart: unless-stopped
93
94     # --- VULNBOX 3 { DVWA -----
95     vulnbox3:
96         build:
97             context: ./network/vulnbox-3
98             dockerfile: Dockerfile
99         image: vulnbox3:latest
100        container_name: vulnbox3
101        hostname: vulnbox3
102        networks:
103            net2:
104                ipv4_address: 172.30.2.2

```

```

105     cap_add:
106         - NET_ADMIN
107     privileged: true
108     restart: unless-stopped
109
110     # --- VULNBOX 4 { SSH weak credentials -----
111     vulnbox4:
112         build:
113             context: ./network/vulnbox-4
114             dockerfile: Dockerfile
115         image: vulnbox4:latest
116         container_name: vulnbox4
117         hostname: vulnbox4
118         networks:
119             net2:
120                 ipv4_address: 172.30.2.3
121         cap_add:
122             - NET_ADMIN
123         privileged: true
124         restart: unless-stopped
125
126     # --- VULNBOX 5 { Samba -----
127     vulnbox5:
128         build:
129             context: ./network/vulnbox-5
130             dockerfile: Dockerfile
131         image: vulnbox5:latest
132         container_name: vulnbox5
133         hostname: vulnbox5
134         networks:
135             net2:
136                 ipv4_address: 172.30.2.4
137             net3:
138                 ipv4_address: 172.30.3.1
139         cap_add:
140             - NET_ADMIN
141         privileged: true
142         restart: unless-stopped
143
144     # --- VULNBOX 6 { MySQL no root password -----
145     vulnbox6:
146         build:
147             context: ./network/vulnbox-6
148             dockerfile: Dockerfile
149         image: vulnbox6:latest
150         container_name: vulnbox6
151         hostname: vulnbox6
152         networks:
153             net3:
154                 ipv4_address: 172.30.3.2
155         cap_add:
156             - NET_ADMIN
157         privileged: true
158         restart: unless-stopped

```

To ensure proper network setup it was crucial to set the correct routes through all the containers, so that they could communicate with each other in the way

we wanted. To do so we wrote the following script:

```
1  #!/bin/bash
2  # Stop and remove any existing containers
3  docker compose down --remove-orphans
4  # Start the vulnbox network
5  docker compose up --remove-orphans -d
6  # Allow forwarding between containers
7  iptables -I FORWARD 1 -s 172.30.0.0/22 -d 172.30.0.0/22 -j ACCEPT
8  # Remove the default IP addresses from the bridge interfaces
9  ip addr del 172.30.1.254/24 dev vulnlab1
10 ip addr del 172.30.2.254/24 dev vulnlab2
11 ip addr del 172.30.3.254/24 dev vulnlab3
12 # Host
13 # Tell your physical machine to send lab traffic to vulnbox1
14 ip route replace 172.30.1.0/24 via 172.30.0.2
15 ip route replace 172.30.2.0/24 via 172.30.0.2
16 ip route replace 172.30.3.0/24 via 172.30.0.2
17 # vulnbox1
18 docker exec -u 0 vulnbox1 sysctl -w net.ipv4.ip_forward=1
19 docker exec -u 0 vulnbox1 ip route replace 172.30.2.0/24 via 172.30.1.2
20 docker exec -u 0 vulnbox1 ip route replace 172.30.3.0/24 via 172.30.1.2
21 docker exec -u 0 vulnbox1 ip route add default via 172.30.0.1
22 # vulnbox2
23 docker exec -u 0 vulnbox2 sysctl -w net.ipv4.ip_forward=1
24 docker exec -u 0 vulnbox2 ip route replace 172.30.3.0/24 via 172.30.2.4
25 docker exec -u 0 vulnbox2 ip route add default via 172.30.1.1
26 # vulnbox3
27 docker exec -u 0 vulnbox3 ip route add 172.30.3.0/24 via 172.30.2.4
28 docker exec -u 0 vulnbox3 ip route add default via 172.30.2.1
29 # vulnbox4
30 docker exec -u 0 vulnbox4 ip route replace 172.30.3.0/24 via 172.30.2.4
31 docker exec -u 0 vulnbox4 ip route add default via 172.30.2.1
32 # vulnbox5
33 docker exec -u 0 vulnbox5 sysctl -w net.ipv4.ip_forward=1
34 docker exec -u 0 vulnbox5 ip route add default via 172.30.2.1
35 # vulnbox6
36 docker exec -u 0 vulnbox6 ip route add default via 172.30.3.1
```

To let Greenbone/OpenVAS scan the containers, we had to create further rules. Since the VM is intended as a vulnerable machine, we had no intention to let the firewall block any traffic, therefore, firstly, we flushed all its rules and then we build up our own ruleset, which allows all the traffic from the Greenbone/OpenVAS to the container's network.

```
1  #!/bin/bash
2
3  # DO NOT RUN THIS ON YOUR HOST MACHINE
4  # VM ONLY
5
6  docker_interface="vulnlab0"
7  docker_subnet="172.30.0.0/22"
8  interface=$(ip -o -f inet addr show | awk '/scope global/ {print $2}' | head -n
   ↪ 1)
9
10 ./setup.sh
11 # Flush everything and start clean
```

```

12 iptables -F FORWARD
13 iptables -t nat -F POSTROUTING
14 nft flush chain ip raw PREROUTING
15
16 # Allow forwarding between containers
17 iptables -I FORWARD 1 -s $docker_subnet -d $docker_subnet -j ACCEPT
18
19 # Re-add Docker's default NAT rules
20 iptables -t nat -A POSTROUTING -s $docker_subnet ! -o $docker_interface -j
↪ MASQUERADE
21 iptables -t nat -A POSTROUTING -s 172.17.0.0/16 ! -o docker0 -j MASQUERADE
22
23 # Allow forwarding between eth and bridge
24 iptables -I FORWARD 1 -i $interface -o $docker_interface -j ACCEPT
25 iptables -I FORWARD 1 -i $docker_interface -o $interface -j ACCEPT
26
27 # Allow Docker chain
28 iptables -I DOCKER 1 -i $interface -d $docker_subnet -j ACCEPT

```

vulnbox1

The first vulnbox was intended to be vulnerable to log4Shell (CVE-2021-44228), a critical vulnerability in the Apache Log4j library. However, since the container was handmade, Greenbone/OpenVAS was not able to detect it.

```

1 # Vulnbox 1 - Log4Shell
2 # Pivot node for networking
3 FROM maven:3.9.9-eclipse-temurin-8 AS build
4
5 WORKDIR /build
6 COPY pom.xml .
7 RUN mvn -q -e -DskipTests
↪ org.apache.maven.plugins:maven-dependency-plugin:3.3.0:go-offline
8
9 COPY src ./src
10 RUN mvn -q -DskipTests package
11
12 # ---- runtime ----
13 FROM eclipse-temurin:8-jre-jammy
14
15 # install tools for your lab
16 RUN apt-get update -o Acquire::AllowInsecureRepositories=true \
17     -o Acquire::AllowDowngradeToInsecureRepositories=true && \
18     apt-get install -y --allow-unauthenticated iproute2 curl && \
19     apt-get clean && \
20     rm -rf /var/lib/apt/lists/* /var/cache/apt/archives/*
21
22 WORKDIR /app
23 COPY --from=build /build/target/vulnapp-1.0-jar-with-dependencies.jar .
24
25 EXPOSE 8080
26
27 CMD ["java", "-jar", "vulnapp-1.0-jar-with-dependencies.jar"]

```

Even if the vulnerability was not detected, the main role of the first vulnbox was to route all the traffic to the docker network and vice versa and, in that sense, it was successful.

vulnbox2

The second vulnbox present a vulnerable version of the Apache Struts framework, which is affected by the CVE-2017-5638 vulnerability.

```
1  # Apache Struts 2.3.31 { CVE-2017-5638
2  # The Content-Type header is parsed by the Jakarta Multipart parser.
3  # A malformed value triggers OGNL expression evaluation + unauthenticated RCE.
4  # This is the exact vulnerability used in the 2017 Equifax breach.
5
6  FROM ubuntu:20.04
7
8  ENV DEBIAN_FRONTEND=noninteractive
9
10 # Install Java 8 + Tomcat 8 + wget
11 RUN apt-get update -qq && \
12     apt-get install -y -qq \
13         openjdk-8-jdk-headless \
14         wget \
15         curl \
16         unzip \
17         iproute2 && \
18     rm -rf /var/lib/apt/lists/*
19
20 ENV JAVA_HOME=/usr/lib/jvm/java-8-openjdk-amd64
21 ENV PATH="$JAVA_HOME/bin:$PATH"
22
23 # -- Tomcat 8.5 -----
24 ENV TOMCAT_VERSION=8.5.87
25 ENV CATALINA_HOME=/opt/tomcat
26
27 RUN wget -q
28 ↪ "https://archive.apache.org/dist/tomcat/tomcat-8/v${TOMCAT_VERSION}/bin/apache-tomcat-${TOMCAT_VERSION}.tar.gz"
29 ↪ \
30     -O /tmp/tomcat.tar.gz && \
31     mkdir -p "$CATALINA_HOME" && \
32     tar xzf /tmp/tomcat.tar.gz -C "$CATALINA_HOME" --strip-components=1 && \
33     rm /tmp/tomcat.tar.gz
34
35 # -- Struts 2.3.31 showcase WAR (contains the vulnerable REST plugin) --
36 ENV STRUTS_VERSION=2.3.31
37
38 RUN wget -q
39 ↪ "https://archive.apache.org/dist/struts/${STRUTS_VERSION}/struts-${STRUTS_VERSION}-apps.zip"
40 ↪ \
41     -O /tmp/struts-apps.zip && \
42     unzip -q /tmp/struts-apps.zip
43     ↪ "struts-${STRUTS_VERSION}/apps/struts2-showcase.war" \
44     -d /tmp/struts-extract/ && \
45     cp "/tmp/struts-extract/struts-${STRUTS_VERSION}/apps/struts2-showcase.war" \
46     "${CATALINA_HOME}/webapps/struts2-showcase.war" && \
47     rm -rf /tmp/struts-apps.zip /tmp/struts-extract
48
49 # Remove default Tomcat apps to keep the attack surface clean/focused
50 RUN rm -rf \
51     "$CATALINA_HOME/webapps/ROOT" \
52     "$CATALINA_HOME/webapps/docs" \
53     "$CATALINA_HOME/webapps/examples" \
```

```

49     "$CATALINA_HOME/webapps/host-manager" \
50     "$CATALINA_HOME/webapps/manager"
51
52 # Tomcat manager creds (useful for post-exploit exploration)
53 COPY tomcat-users.xml "$CATALINA_HOME/conf/tomcat-users.xml"
54
55 EXPOSE 8080
56
57
58 CMD ["sh", "-c", "$CATALINA_HOME/bin/catalina.sh run"]

```

vulnbox3

The third vulnbox is based on DVWA (Damn Vulnerable Web Application), a web application that is intentionally vulnerable to various types of attacks. We had no clue if Greenbone/OpenVAS would have been able to detect any vulnerabilities here, but since it's in fact the scope of such experiment, we decided to include it.

```

1  # Vulnbox 3 { DVWA
2  # Damn Vulnerable Web Application (DVWA) is a PHP/MySQL web app designed for
   ↳ security training.
3  # It contains multiple vulnerabilities of varying difficulty, making it ideal for
   ↳ practice.
4
5  FROM vulnerables/web-dvwa
6
7  ENV MYSQL_PASS=p@ssw0rd
8  ENV HOSTNAME=vulnbox3
9
10
11 EXPOSE 80 443

```

vulnbox4

The fourth vulnbox is a simple Ubuntu 22.04 image with weak SSH credentials.

```

1  # Vulnbox 4 - SSH Service with Weak Credentials
2  # This container runs an SSH server with weak credentials for testing purposes.
3  FROM ubuntu:22.04
4
5  RUN apt-get update -qq && \
6      apt-get install -y -qq openssh-server iproute2 && \
7      rm -rf /var/lib/apt/lists/* && \
8      useradd -m -s /bin/bash admin; \
9      echo 'admin:admin123' | chpasswd; \
10     useradd -m -s /bin/bash user; \
11     echo 'user:password' | chpasswd; \
12     mkdir -p /run/sshd && \
13     sed -i 's/#PermitRootLogin.*/PermitRootLogin yes/' /etc/ssh/sshd_config && \
14     sed -i 's/#PasswordAuthentication.*/PasswordAuthentication yes/'
   ↳ /etc/ssh/sshd_config && \
15     echo 'root:toor' | chpasswd
16
17 EXPOSE 22
18

```

```

19
20 CMD ["/usr/sbin/sshd", "-D"]

```

vulnbox5

The fifth vulnbox is a weak Samba server.

```

1  # Vulnbox 5 - Samba (EternalBlue-era misconfiguration)
2  # This container runs a Samba server with a misconfiguration that allows for
   ↪ potential exploitation.
3
4  FROM dperson/samba
5
6  RUN mkdir -p /public /private && \
7      chmod 777 /public && \
8      chmod 700 /private
9
10 ENV USERID=1000 \
11     GROUPID=1000
12
13
14 CMD ["-u", "guest;guest", \
15     "-s", "public;/public;yes;no;yes;all;none", \
16     "-s", "private;/private;no;no;no;all;none"]

```

vulnbox6

The sixth vulnbox is a MySQL server with no password.

```

1  FROM mysql:5.7
2
3  ENV MYSQL_ALLOW_EMPTY_PASSWORD=yes
4
5  RUN yum clean all && \
6      yum install -y iproute && \
7      yum clean all && \
8      rm -rf /var/cache/yum

```

1.2.4 FTP

The FTP server is a simple instance of `vsftpd` with multiple weak configurations, such as:

```

1  local_enable=YES
2  write_enable=YES
3  pam_service_name=vsftpd

```

1.2.5 Samba

The Samba server is configured to allow insecure access to a shared folder.

```

1  #!/bin/bash
2
3  apt-get install -y samba
4

```

```

5 tee /etc/samba/smb.conf << EOF
6 [global]
7     workgroup = WORKGROUP
8     server string = Vuln Samba
9     map to guest = Bad User
10    guest account = nobody
11
12    # Weak / legacy protocol support
13    server min protocol = NT1
14    ntlm auth = yes
15    lanman auth = yes
16
17    # Disable signing
18    server signing = disabled
19
20 [vulnshare]
21     path = /srv/samba/vuln
22     browsable = yes
23     writable = yes
24     guest ok = yes
25     read only = no
26     force user = nobody
27 EOF
28
29 mkdir -p /srv/samba/vuln
30 chmod 777 /srv/samba/vuln
31 systemctl enable --now smbd

```

1.2.6 SSH

The SSH server is configured with weak configurations, such as:

```

1 PermitRootLogin yes
2 PasswordAuthentication no

```

1.2.7 Syslog

The Syslog server is configured to allow remote logging without authentication on port 514.

```

1 #!/bin/bash
2
3 #apt-get update
4 #apt-get install -y rsyslog
5 #apt-get clean
6 #rm -rf /var/lib/apt/lists/*
7
8 # Enable UDP + TCP syslog reception
9 cat << EOF > /etc/rsyslog.d/10-remote.conf
10 # Load modules
11 module(load="imudp")
12 input(type="imudp" port="514")
13
14 module(load="imtcp")
15 input(type="imtcp" port="514")
16

```

```
17 # Log EVERYTHING from remote hosts
18 *.* /var/log/remote.log
19
20 # No rate limiting (intentionally bad)
21 \SystemLogRateLimitInterval 0
22 EOF
23
24 # Ensure rsyslog is enabled
25 systemctl enable rsyslog
26 systemctl restart rsyslog
27
28 mkdir -p /var/log/
29 chmod 777 -R /var/log/
```

1.3 Windows XP

Windows XP is an old operating system that is no longer supported by Microsoft, which makes it vulnerable to various types of attacks. Just its mere presence in the network is a vulnerability, since it can be easily exploited by attackers. To set up Windows XP, we just installed its virtual machine on VirtualBox and connected it to the same network of the other machines.

1.4 Network configuration

The whole network configuration is an Host-only virtual network created with VirtualBox, which allows all the machines to communicate with each other and have no access to other networks, such as the Internet.

In order to create the virtual network and connect all the machines to it, we followed the following procedure:

1. Create a Host-only network in VirtualBox



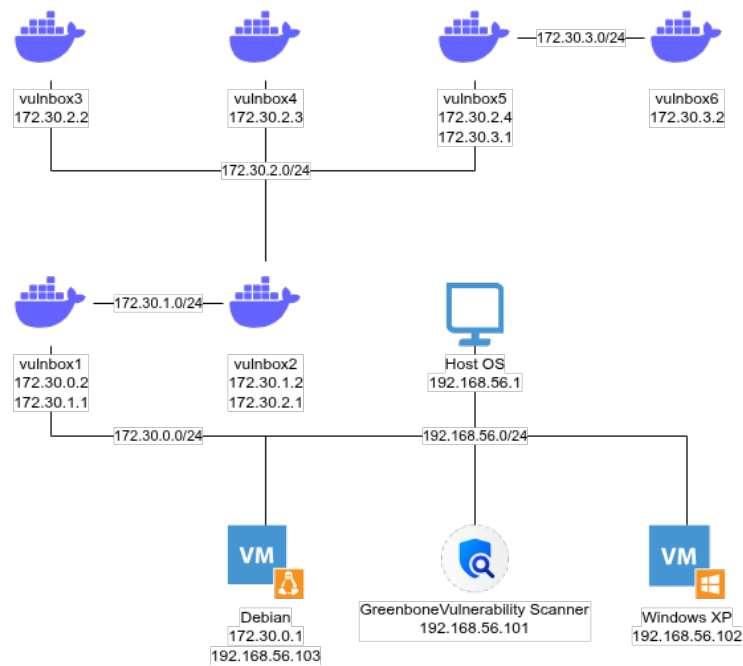



Figure 1.2: Full laboratory's network

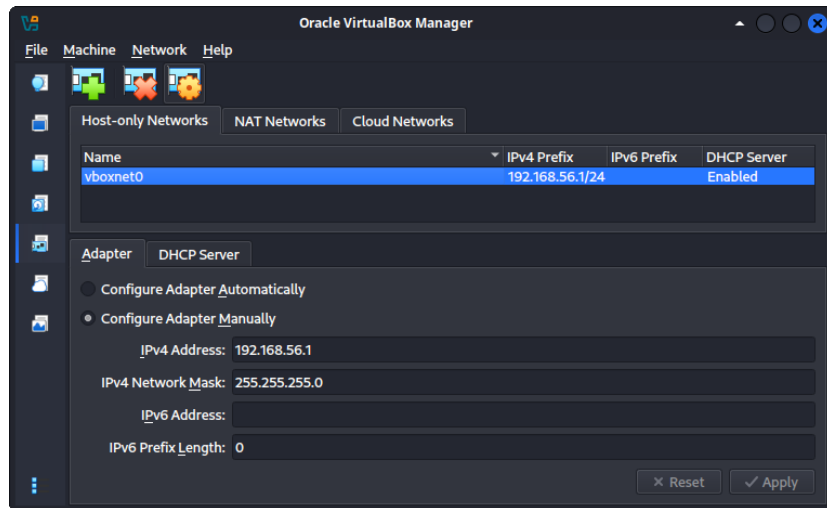

2. Enable the DHCP server for the Host-only network enough to assign IP addresses to all the 3 machines

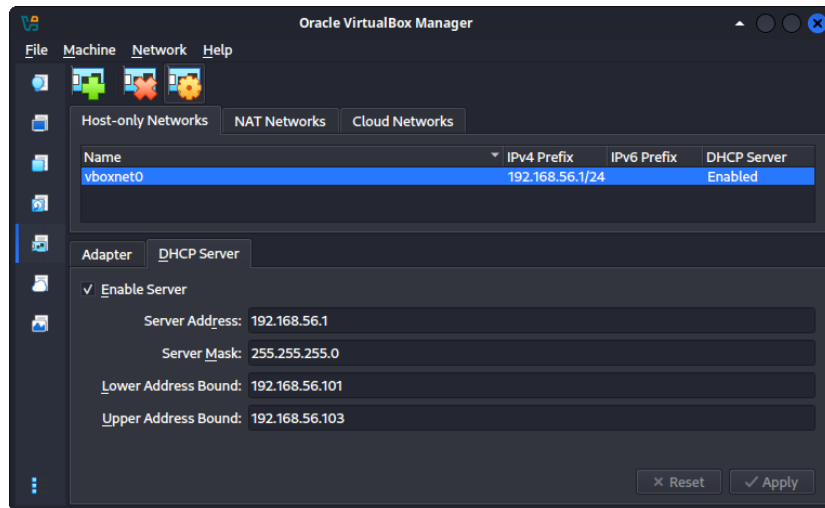

3. Go to settings of each machine and connect it to the Host-only network

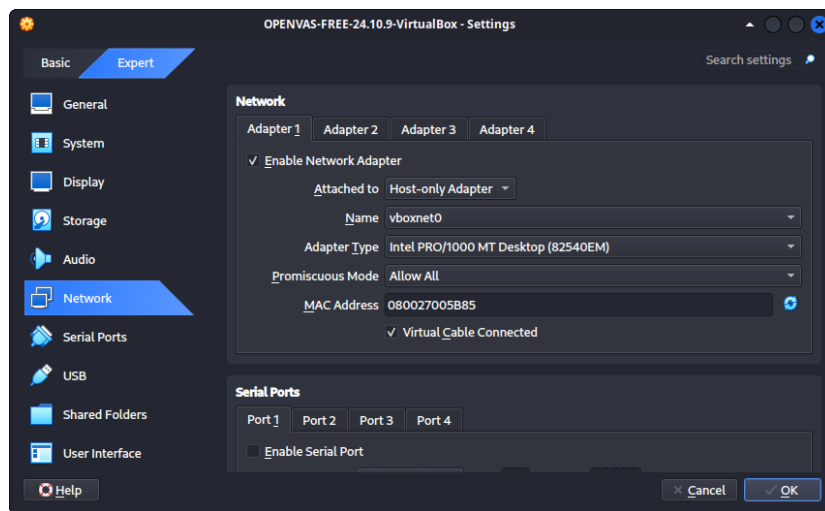

Chapter 2

System Discovery

2.1 OpenVAS Scan

In this section it will be explained how to start a scan (that could be just for an host, or a group of hosts). We will create a target, which means declaring which host (or group of hosts) to be scanned, which port range and protocol.


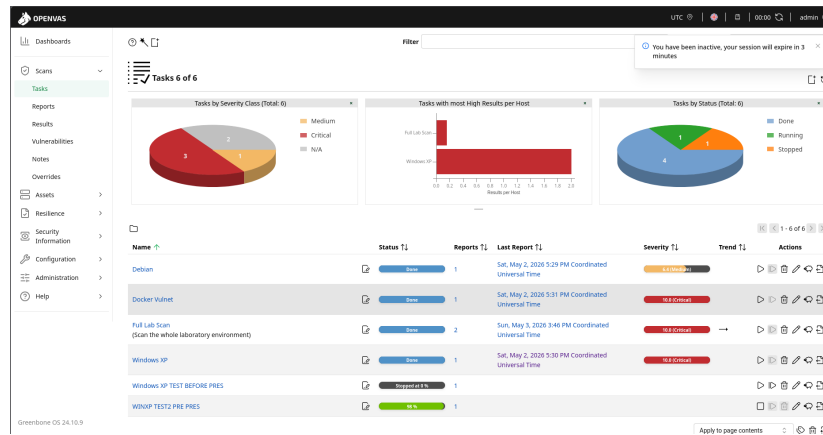


Figure 2.1: Scan windows

This is the scan windows, where you will create the tasks which are configurations for the targets and ports that are going to be scanned, how many NVTs (Network Vulnerability Test) are going to be used for the scan, how many concurrent hosts are being scanned at a given moment etc. We will get to all of the configuration in time.

2.1.1 Configuration → Ports

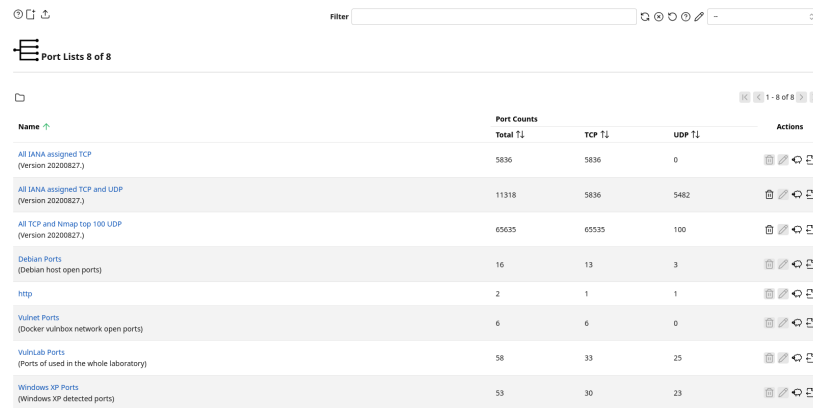

Port Lists 8 of 8

Name	Port Counts			Actions
	Total T1	TCP T1	UDP T1	
All IANA assigned TCP (Version 20200827)	5836	5836	0	[Add] [Edit] [Delete]
All IANA assigned TCP and UDP (Version 20200827)	11318	5836	5482	[Add] [Edit] [Delete]
All TCP and Nmap top 100 UDP (Version 20200827)	65635	65635	100	[Add] [Edit] [Delete]
Debian Ports (Debian host open ports)	16	13	3	[Add] [Edit] [Delete]
http	2	1	1	[Add] [Edit] [Delete]
Vulnet Ports (Docker vulnbox network open ports)	6	6	0	[Add] [Edit] [Delete]
VulnLab Ports (Ports of used in the whole laboratory)	58	33	25	[Add] [Edit] [Delete]
Windows XP Ports (Windows XP detected ports)	53	30	23	[Add] [Edit] [Delete]

Figure 2.2: Port creation interface

This is the ports creation interface, you can create custom ports ranges looking for services that use TCP/UDP. For the most part OpenVAS works by giving us templates, in this case are for a complete scans of all IANA (Internet Assigned Numbers Authority) ports, which means it will scan for all 65536 ports only TCP, UDP, both etc. It really just depends on which preset is chosen.

OpenVAS encodes ports in a format like T:1 – 1023, 4500,U:2 – 100, 3246 which means that it will scan for TCP ports between 1 and 1023 and 4500 alone, and for UDP ports from 2 to 100 and 3246 alone. In this way you can define ports range and choose to do only TCP or UDP scans.

Under the hood OpenVAS uses Nmap to scan the ports, and just like it to scan UDP ports it will take considerably longer than TCP. This is because when a TCP request is made, the server either accept the connection or it rejects it, while for UDP being a connection-less protocol will wait until timeout. So beware about this aspect if you don't want the scan to take hours.

For our experiments we will create two presets: one for ftp service (port 21) and one for an http server (port 80). Go on the add port icon on the top of the interface (the little square with a plus), and you should get this popup.

New Port List

×

Name

WIN XP ONLY FTP

Comment

Port Ranges

☒ Manual

T:21

☐ From file

Cancel

Save

New Port List

×

Name

WIN XP FTP&HTTP

Comment

Port Ranges

☒ Manual

T:21,80

☐ From file

Cancel

Save

(a) Port configuration limited to TCP 21 (FTP). (b) Port configuration limited to TCP 21 and 80 (FTP).

Figure 2.3: Ports configuration

Those configurations are going to be used later to scan a Windows XP target with FTP and HTTP servers.

Credentials for target access

The screenshot shows the OpenVAS web interface with the 'Credentials' window open. The window displays a table of 10 credentials. The table has columns for Name, Type, Allow insecure use, Login, and Actions. The credentials listed are: Admin, Admin/vulnbox, Debian, Guest, Manager, MySQL/vulnbox, PostgreSQL, Root, Tomcat, and User. Each credential has a 'Type' of 'Username + Password' and 'Allow insecure use' set to 'Yes'. The 'Login' column shows the username for each credential. The 'Actions' column contains icons for editing, deleting, and other operations.

Name	Type	Allow insecure use	Login	Actions
Admin	Username + Password	Yes	admin	
Admin/vulnbox	Username + Password	Yes	admin	
Debian	Username + Password	Yes	debian	
Guest	Username + Password	Yes	guest	
Manager	Username + Password	Yes	manager	
MySQL/vulnbox	Username + Password	Yes	vulnbox	
PostgreSQL	Username + Password	Yes	postgres	
Root	Username + Password	Yes	root	
Tomcat	Username + Password	Yes	tomcat	
User	Username + Password	Yes	user	

Figure 2.4: Credentials window

Credentials are used for deeper scans, you give the credentials to OpenVAS and it will try to login to the machine, scanning the host from within, looking at configuration files, installed packages etc. This is done to improve scan performance since it flags problems that are not visible from the outside, but may lead to exploitable vulnerabilities. This function can also be used to check for default credentials if they are in use or no.

New Credential

×

Name

Test

Comment

Type

Username + Password

Allow insecure use

☐ Yes
☒ No

Auto-generate

☐ Yes
☒ No

Username

Password

Cancel

Save

New Credential

×

Name

Test

Comment

Type

Username + Password

Username + SSH Key

SNMP

S/MIME Certificate

PGP Encryption Key

Password only

Client Certificate

Cancel

Save

(a) FTP Target Step 1

(b) FTP Target Step 2

Figure 2.5: Configuration for the FTP only target

As you can see many possibilities are available, setting both username and password, ssh access, certificates etc. But for our example this feature will not be used.

2.1.2 Target configuration

Dashboards

Scans

Assets

Resilience

Security Information

Configuration

Targets

Port Lists

Credentials

Scan Configs

Report Formats

Scanners

Filters

Tags

Administration

Help

Targets 13 of 13

Name	Hosts T1	IPs T1	Port List T1	Credentials	Actions
Debian Target (Debian VM vulnbox)	192.168.56.103	1	Debian Ports	SSH:Debian SSH:Elevate-Root SMB:NTLM:Debian	
VM Targets (VMs in the laboratory environment)	192.168.56.101-192.168.56.104	4	VulnLab Ports	SSH:Debian SSH:Elevate-Root SMB:NTLM:Debian	
vulnbox1 (Log4Shell)	172.30.0.2	1	VulnLab Ports	SSH:Admin SSH:Elevate-Root	
vulnbox2 (Apache Struts)	172.30.1.2	1	VulnLab Ports	SSH:Tomcat SSH:Elevate-Root	
vulnbox3 (CVE-2019-1146)	172.30.2.2	1	VulnLab Ports	SSH:MySQL: vulnbox3 SSH:Elevate-Root	
vulnbox4 (SSRF)	172.30.2.3	1	VulnLab Ports	SSH:User SSH:Elevate-Admin	
vulnbox5 (Samba)	172.30.2.4	1	VulnLab Ports	SSH:Guest SSH:Elevate-Root SMB:NTLM:Guest	

Figure 2.6: Target configuration interface

This is the target creation interface, which is used to create all targets that are going to be scanned expressed in single IP or a range of IPs (e.g. 192.168.56.101-192.168.56.105).

Before scanning the Windows XP server you would want to go to the terminal of the machine and type **ipconfig /all**, copy the IP (which should be along the lines of 192.168.56.10X).

```

C:\Documents and Settings\windows>ipconfig /all

Windows IP Configuration

Host Name . . . . . : windows-xp
Primary Dns Suffix . . . . . :
Node Type . . . . . : Unknown
IP Routing Enabled. . . . . : No
WINS Proxy Enabled. . . . . : No

Ethernet adapter Local Area Connection:

Connection-specific DNS Suffix . . :
Description . . . . . : Intel(R) PRO/1000 T Server Adapter
Physical Address. . . . . : 08-00-27-BB-85-A1
Dhcp Enabled. . . . . : Yes
Autoconfiguration Enabled . . . . : Yes
IP Address. . . . . : 192.168.56.104
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . :
DHCP Server . . . . . : 192.168.56.100
Lease Obtained. . . . . : Tuesday, May 12, 2026 2:35:15 PM
Lease Expires . . . . . : Tuesday, May 12, 2026 2:45:15 PM

C:\Documents and Settings\windows>

```

Figure 2.7: Terminal output of ipconfig command

After the IP was discovered, its time to configure the target like so:

New Target

Name: Windows XP FTP TARGET

Comment:

Hosts: ☒ Manual 192.168.56.104

Exclude Hosts: ☒ Manual

Port List: WIN XP ONLY FTP

Alive Test: ☒ Use Scan Config Default

Cancel Save

New Target

Port List: WIN XP ONLY FTP

Alive Test: ☒ Use Scan Config Default

Credentials for authenticated checks:

SSH: Select a Credential on port 22

SMB (Kerberos): Select a Credential

SMB (NTLM): Select a Credential

ESXI: Select a Credential

SNMP: Select a Credential

Reverse Lookup Only: ☒ No

Reverse Lookup Unify: ☒ No

Cancel Save

(a) FTP Target Step 1

(b) FTP Target Step 2

Figure 2.8: Configuration for the FTP only target

In this popup you will set target name, the IP (or range of IPs), the excluded hosts in case you have a range of IPs and some host are not to be scanned, the port list preset made before and the credentials presets that are set in the credentials window (not used in this example).

Now configure the targets also for the FTP and HTTP target like so:

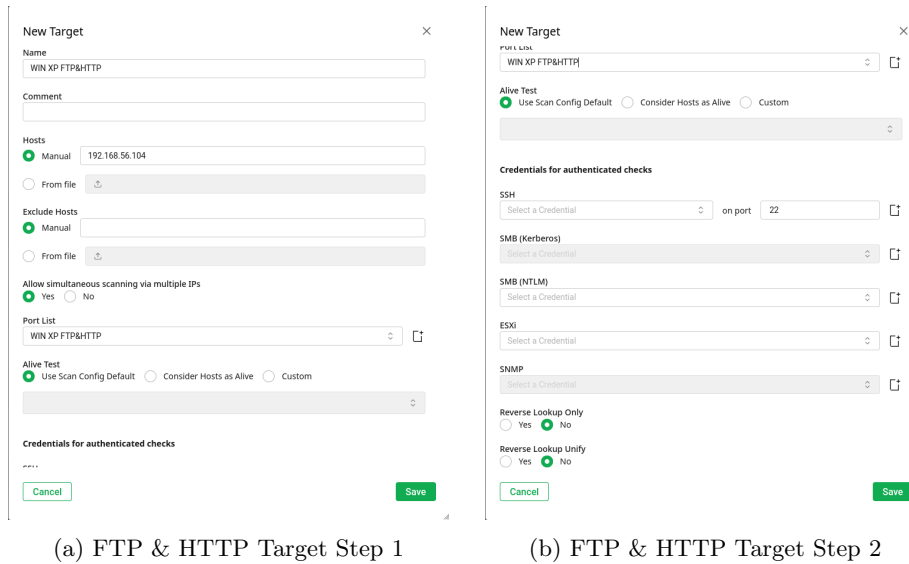


Figure 2.9: Configuration for the FTP & HTTP target

Scan configs

Name	Family	Total T1	Trend T1	NVTs	Trend T1	Actions
Base (Basic configuration template with a minimum set of NVTs required for a scan. Version 20200827)	2	→	3	→		
Discovery (Network Discovery scan configuration. Version 20201215)	11	→	320	→		
Empty (Empty and static configuration template. Version 20201215)	0	→	0	→		
Full and Fast (Most NVTs, optimized by using previously collected information. Version 20201215)	60	→	176180	→		
Full and Fast Clone 1 (Most NVTs, optimized by using previously collected information. Version 20201215)	42	→	15650	→		
Full and Fast Clone 2 (Most NVTs, optimized by using previously collected information. Version 20201215)	42	→	15650	→		
Host Discovery (Network Host Discovery scan configuration. Version 20201215)	2	→	2	→		
Host Discovery Clone 1 (Network Host Discovery scan configuration. Version 20201215)	2	→	2	→		
Log2Mail (Configuration with checks for Log2Mail and CVE-2021-46208. Version 20211227)	10	→	29	→		

Figure 2.10: Scan configs window

The scan configuration is a configuration used during the scan, essentially it tells OpenVAS how to scan and what to scan. Essentially the Full and Fast preset looks at everything possible from Cisco appliances, Fedora security, Windows services etc. This is the reason why the database is so big, occupying tens of gigabytes. Since there are thousands of settings if we look at every possible configuration, what we will do is to configure a pre-set at a high level tailoring it for Windows XP.

New Scan Config

×

Name

Windows XP Taylored Scan

Comment

Base

☐ Base with a minimum set of NVTs
 ☒ Empty, static and fast
 ☐ Full and fast

CVE

Cancel

Save

Figure 2.11: Taylored scan creation

To create it select the Empty config, save it and then edit it by clicking to the pencil icon, select the following:

Edit Scan Config Windows XP Taylored Scan

×

Name

Windows XP Taylored Scan

Comment

Empty and static configuration template. Version 20201215.

Search

Search for families, preferences, or NVTs

Edit Network Vulnerability Test Families (60)

⊞

Family	NVTs selected	Trend	Select all NVTs	Actions
AIX Local Security Checks	0 of 1	⊞ ⊞ ⊞ ⊞	☒	
Amazon Linux Local Security Checks	0 of 748	⊞ ⊞ ⊞ ⊞	☐	
Brute force attacks	0 of 9	⊞ ⊞ ⊞ ⊞	☐	
Buffer overflow	0 of 682	⊞ ⊞ ⊞ ⊞	☐	
CISCO	0 of 651	⊞ ⊞ ⊞ ⊞	☐	
CentOS Local Security Checks	0 of 3255	⊞ ⊞ ⊞ ⊞	☐	
Citrix XenServer Local Security Checks	0 of 30	⊞ ⊞ ⊞ ⊞	☐	
Compliance	0 of 16	⊞ ⊞ ⊞ ⊞	☐	

Cancel

Save

Edit Scan Config Windows XP Taylored Scan

×

CISCO

0 of 651

⊞ ⊞ ⊞ ⊞

☐

CentOS Local Security Checks

0 of 3255

⊞ ⊞ ⊞ ⊞

☐

Citrix XenServer Local Security Checks

0 of 30

⊞ ⊞ ⊞ ⊞

☐

Compliance

0 of 16

⊞ ⊞ ⊞ ⊞

☐

Databases

0 of 1200

⊞ ⊞ ⊞ ⊞

☐

Debian Local Security Checks

0 of 18192

⊞ ⊞ ⊞ ⊞

☐

Default Accounts

0 of 315

⊞ ⊞ ⊞ ⊞

☒

Denial of Service

0 of 2404

⊞ ⊞ ⊞ ⊞

☐

FTP Local Security Checks

0 of 125

⊞ ⊞ ⊞ ⊞

☐

FTP

0 of 176

⊞ ⊞ ⊞ ⊞

☒

Fedora Local Security Checks

0 of 30209

⊞ ⊞ ⊞ ⊞

☐

FortiOS Local Security Checks

0 of 36

⊞ ⊞ ⊞ ⊞

☐

FreeBSD Local Security Checks

0 of 2009

⊞ ⊞ ⊞ ⊞

☐

Gain a shell remotely

0 of 109

⊞ ⊞ ⊞ ⊞

☐

General

0 of 8619

⊞ ⊞ ⊞ ⊞

☐

Gentoo Local Security Checks

0 of 2191

⊞ ⊞ ⊞ ⊞

☐

Cancel

Save

(a) FTP & HTTP Taylored scan options

1

(b) FTP & HTTP Taylored scan options

2

Edit Scan Config Windows XP Tailored Scan

Mac OS X Local Security Checks	0 of 442	☐	☒	☐	☐
Magia Linux Local Security Checks	0 of 5871	☐	☒	☐	☐
Malware	0 of 58	☐	☒	☐	☐
Mandrake Local Security Checks	0 of 807	☐	☒	☐	☐
Nmap NSE	0 of 154	☐	☒	☐	☐
Nmap NSE.net	0 of 177	☐	☒	☐	☐
Oracle Linux Local Security Checks	0 of 1895	☐	☒	☐	☐
Palo Alto PAN-OS Local Security Checks	0 of 40	☐	☒	☐	☐
Peer-To-Peer File Sharing	0 of 9	☐	☒	☐	☐
Policy	0 of 957	☐	☒	☐	☐
Port scanners	0 of 9	☐	☒	☐	☐
Privilege escalation	0 of 315	☐	☒	☐	☐
Product detection	0 of 3055	☐	☒	☐	☐
RPC	0 of 4	☐	☒	☐	☐
Red Hat Local Security Checks	0 of 1853	☐	☒	☐	☐

(a) FTP & HTTP Tailored scan options
3

Edit Scan Config Windows XP Tailored Scan

Solaris Local Security Checks	0 of 1	☐	☒	☐	☐
SUSE Local Security Checks	0 of 2436	☐	☒	☐	☐
Ubuntu Local Security Checks	0 of 15919	☐	☒	☐	☐
Useless services	0 of 16	☐	☒	☐	☐
VMware Local Security Checks	0 of 60	☐	☒	☐	☐
Web Servers	0 of 1047	☐	☒	☐	☐
Web application abuses	0 of 9593	☐	☒	☐	☐
Windows	0 of 288	☐	☒	☐	☐
Windows - Microsoft Bulletins	0 of 3673	☐	☒	☐	☐
openEuler Local Security Checks	0 of 6795	☐	☒	☐	☐
openSUSE Local Security Checks	0 of 9893	☐	☒	☐	☐

Edit Scanner Preferences (21)

Network Vulnerability Test Preferences (1324)

(b) FTP & HTTP Tailored scan options
4

Figure 2.13: Configuration for the FTP & HTTP tailored scan

2.1.3 Starting the scan

Now we are ready to begin the scan, to do this go back to the tasks windows, click on the task add button and do the following:

New Task

Name: WIN XP FTP&HTTP TASK

Comment:

Scan Targets: WIN XP FTP&HTTP

Add results to Assets: ☒ Yes ☐ No

Apply Overrides: ☒ Yes ☐ No

Min QoD: 70

Alterable Task: ☐ Yes ☒ No

Auto Delete Reports: ☒ Do not automatically delete reports

Scanner: OpenVAS Default

Scan Config: Windows XP Tailored Scan

(a) FTP & HTTP Tailored task 1

New Task

Name: WIN XP FTP&HTTP TASK

Comment:

Scan Targets: WIN XP FTP&HTTP

Add results to Assets: ☒ Yes ☐ No

Apply Overrides: ☒ Yes ☐ No

Min QoD: 70

Alterable Task: ☐ Yes ☒ No

Auto Delete Reports: ☒ Do not automatically delete reports

Scanner: OpenVAS Default

Scan Config: Windows XP Tailored Scan

Order for target hosts: Sequential

Maximum concurrently executed NVTs per host: 4

Maximum concurrently scanned hosts: 20

(b) FTP & HTTP Tailored task 2