

Logging with pLogger

Paul Newman

August 26, 2009



1 Logging – pLogger

The **pLogger** process is intended to record the activities of a MOOS session. It can be configured to record a fraction of or every publication of any number of MOOS variables. It is an essential MOOS tool and is worth its weight in gold in terms of post-mission analysis, data gathering and post-mission replay.

The configuration of **pLogger** is trivial and consists of multiple lines with the following syntax:

$$\text{Log} = \text{varname} @ \text{period} [\text{NOSYNC}], [\text{MONITOR}]$$

where *varname* is any MOOS variable name and *period* is the minimum interval between log entries that will be recorded for the given variable. For example, if *varname* = **INS_YAW** and *period* = 0.2 then even if the variable is published at 20Hz it will only be recorded at 5Hz. The optional **NOSYNC** flag indicates that this variable should not be recorded in the synchronous logs (see Section 1.2). The optional **MONITOR** flag tells **pLogger** to send a notification if this variable isn't logged at least every 10 seconds. The notification occurs under the **MOOS_DEBUG** variable. If you are running **iRemote** (which subscribes to this variable automatically) you'll see a warning printed to the screen. This can be pretty useful when running a complicated system and you really do want notification that an important variable isn't being logged (probably because the process producing the variable is kaput in some sense.)

1.1 Logging Session

The logger supports the notion of logging sessions. For each log session the logger will create a new directory and place all the logged files within that directory. These are typically (see later sections) an *alog* file, a *slog* file, a system log file, a copy of the mission file (moos file) and, if applicable, a hoof file (if **pHelm** is running). A new log session can be created by writing the variable **LOGGER_RESTART** to the **MOOSDB** or if you are using **iRemote** by pressing shift-g.

1.2 Log File Types

The logger records data in two file formats – synchronous (“slog” extensions) and asynchronous (“alog” extensions). Both formats are ASCII text – they can always be compressed later and usability is more important than disk space. The two formats are now discussed.

1.2.1 Synchronous Log Files

Synchronous logging makes a table of *numerical* data. Each line in the file corresponds to a single time interval. Each column of the table represents the broad evolution of a given variable over time. The time between lines (and whether synchronous logging is even required) is specified with the line:

$$\text{SyncLog} = \text{true/false} @ \text{period}$$

where *period* is the interval time.

If there has been no change in the numeric variable between successive time steps, then its value is written as `NaN`. It is important to note that synchronous logs do not capture all that happens – they sample it. Synchronous logs are designed to be used to swiftly appraise the behaviour of a MOOS community by examining numeric data in a tool such as Matlab or a spreadsheet. The `MOOSData` Matlab script reads in these files and with a single mouse click can display the time evolution of any logged variable.

1.2.2 Asynchronous Log Files

Asynchronous logging is thorough. The mechanism is designed to be able to record *every* delta to the MOOSDB. The use of the period variable allows the mission designer to back off from this ultimate limit and record variables at a maximum frequency. The key properties of asynchronous logging can be enumerated as follows.

1. Records both string and numeric data.
2. Records data in a list format – one notification per line.
3. Entries are only made when variable is written.

Asynchronous log files are designed to be used with a playback tool (for example `uPlayback` or other purpose-built executable). Although the handling of strings and numeric data adds a slight overhead to such a program’s complexity, the utility gain from being able to slow, stop and accelerate time during a post-mission replay/reprocessing session is simply massive. Turn asynchronous logging on with:

$$\text{AsyncLog} = \text{true}$$

in the logger configuration block.

1.2.3 Floating Point Precision

You can set the logged precision (number of decimal places) of floating point data in alogs (ie MOOS messages with a `double` data type) by using the `DoublePrecision` directive in the configuration block:

```
DoublePrecision = 2
```

will record all double precision data with just two decimal points. This can reduce the size of your alogs substantially (as can on-the-fly compression described in Section 1.2.4)

1.2.4 Compressed Asynchronous Logging

If the common compression library Zlib is available¹ pLogger offers the ability to compress alog files at run time. The CMake build system will search for the correct libraries and headers and set `ZLIB_FOUND` if all is good at compile time. You can turn on compressed logging by adding

```
CompressAlogs = true
```

to the configure block of pLogger ²

1.3 System Log File

There is a third kind of log file that is produced – a system log file (ylog). This file only contains data contained in `MOOS_SYSTEM` and `MOOS_DEBUG` messages. The later can be written to by calling the `CMOOSApp::MOOSDebugWrite` method from any `CMOOSApp` derived class. The thinking behind the ylog files is that it is pretty useful to be able to browse through a text file of events to see when and if things went wrong in a mission. Processes can write to `MOOS_SYSTEM` and/or `MOOS_DEBUG` if something happens which they think is salient. Think of this as `/var/log` .

1.4 Dynamic Logging Configuration

Post V7.0.1 releases of MOOS include a dynamic logging ability. External parties can, at run time, request the logger to start logging particular (named) variables. The logger subscribes to messages called `PLOGGER_CMD` (if the Logger is being run under the MOOS name “pLogger”, otherwise substitute the relevant name) and by correctly formatting the string data of this message dynamic logging can be invoked.

```
LOG_REQUEST = varname @ period [NOSYNC], [MONITOR]
```

¹this might be a bit tricky on WIN32 platforms.

²If you are in the habit of launching processes via `pAntler` and kill them all in one swoop by pressing ctrl-C in pAntlers window then take care...on Windows child processes are not killed by passing signals so `pLogger` has no chance to tidy up the compression routines. On Nix platforms Antler offers support for killing child processes in a compassionate way and so compressed log integrity is ensured.

Note that this string format is identical to that found in the mission file, modulo `LOG` being replaced with `LOG_REQUEST`. Now dynamic logging sits naturally with “alog” (asynchronous) files but not so well with “slog” files. These files are easy to use (and hence popular) because they are rectangular numerical arrays written to text file (easily parsed by Matlab’s load command). But dynamic logging means that by the time a mission ends an unknown number of variables (columns) will occur in every line of the slog. To address this issue the logger can be configured (in its mission file configuration block) with a line like:

`DynamicSyncLogColumns = 30`

Here 30 columns are being reserved for variables that are requested at run time. As dynamic requests are received and processed by the logger, these unclaimed columns are consumed until none remain. At this point any future dynamic logging requests will still be accepted but the logged variables won’t appear in the slog file (they will of course appear in the `/italog` file). Unclaimed slots will be labeled `DYNAMIC_X` until claimed and will always have `NaN` entries.

1.5 Specifying Log File Names and Locations

Each time the logger starts it creates (if required) a new directory in the logging root directory (see below) and performs logging within that directory. `pLogger` is quite flexible in terms of log file configuration and is controlled by the following variables.

GlobalLogPath This is a **file scope variable** (i.e. not in any process configuration block). If it is present in a mission file, then it specifies the root directory in which log files will be created.

Path This specifies the root logging directory but is only used if **GlobalLogPath** is not set (see above).

File This is the stem file name given to logged files (alog/slog and ylog).

FileTimeStamp If this is set to true, the name of each logged file (and created containing directory) will be the concatenation of the **File** variable and a time stamp. If **FileTimeStamp** is false then each time the logger is run it will write to the same set of log files **and destroy the original contents**. This is by design; when developing, it’s often useful to not have useless log files take ever more space on your machine.

Note that if the logger is run without a mission file it starts logging to the local directory with file time stamping enabled. See Figure 1 for a typical logger configuration block.

If for some reason the logger was unable to start logging to a location specified in the log file it tries, as a last resort, to open a log directory in the current working directory (`‘.’`). If this fall-back fails then all is lost, we are without hope and the logger exits. If you are running a mission from `pAntler`, you’ll be notified that the logger has quit.

1.5.1 Where is the Most Recent Log File?

`pLogger` records where it last opened a log file in a file which by default is called “. LastOpenedMOOSLogDirectory” (note the period !) and is in the working directory of the logger. The location and name of this hint file can be customised via the `LoggingDirectorySummaryFile` parameter, for example

```
LoggingDirectorySummaryFile = /homes/5/spock/.MOOSLoggingHint
```

Why is this useful ? Well you can now quickly knock up a script which peeks in this hint file and opens for browsing the last set of log files.

1.6 Mission Backup

Simply having the *alog* and *slog* files is not enough to evaluate the mission. One also needs the things that *caused* the data to be recorded, namely the *.moos Mission file and the *.hoof file (if Task redirection was used). To this end the `pLogger` process takes a copy of these files and places them (name appended with a time stamp if desired) within the logging directory. The files extensions are renamed to **.moos* and **.hoof* respectively.

1.6.1 Additional File Backup on Demand

It is quite within the bounds of reason that a system using MOOS makes use of configuration (especially other files) which has content which should not reside inside a *.moos or *.hoof file. `pLogger` provides a mechanism to back these files up on request at run time. Post V7.0.1, by writing to the `PLOGGER_CMD` variable any MOOS process can instruct the logger to back a local file up and place a copy in the current logging directory. See Section 1.5. As always, the process `_CMD` message is a string and for dynamic file back up should be formatted as:

```
COPY_FILE_REQUEST = PathToFile
```

For example,

```
COPY_FILE_REQUEST = /home/VehicleQ/CameraCalibration.txt
```

would log “ /home/VehicleQ/CameraCalibration.txt” to a file called “CameraCalibration.txt” in the current logging directory. Note the additional underscore which is in keeping with the backup style used for mission files. If the file being backed up has no extension, a “_bak” is added.

1.7 Wildcard Logging

Post V7.0.1 a new configuration option has been introduced which instructs the logger to log every change made to the MOOSDB to an /italog file.³ By writing

```
WildCardLogging = true
```

³It does this by using a specialised MOOS IPC call to the DB which is not intended for daily use.

asynchronous logging will be turned on (even if `AsyncLog = false` is present in the configuration block) and every change to every variable will be logged to the current `/italog` file. Some points to note:

- Wildcard logging only causes variables to be written to the current `/italog` file. Synchronous logging is not affected.
- If the log rates for variables have already been specified at configuration then it is these rates that are used.
- If wildcard logging is enabled, when the logger spots that variables that are not already known to it are being written to the DB it registers to be told about every change made (like `Log = XXX @ 0`).
- By default wildcard logging is disabled. It was designed to be a safety net for situations in which many new variables are being created by a software team in a dynamic environment.
- It may take up to a second for the logger to detect and subscribe for new MOOS variables. If new data is written multiple times before subscription can complete (i.e. within a second), the logger will be unable to capture these writes.

1.7.1 Wildcard Logging Patterns

If all you do is set `WildcardLogging` to be true then everything will be logged. There is every chance though that you may want finer control by specifying template patterns for variables you want logged and equally, variables you don't want logged. Two optional configuration parameters `WildcardPattern` and `WildcardOmitPattern` achieve this. Each takes a value of a comma separated list of "globbing" expressions; each expression containing any character apart from a comma. Only "*" and "?" wildcards are supported. For example

```
WildcardPattern = DB_*, *_LA?
```

will only log variables with names that begin "DB_" or end in "_LA" followed by a single character. By specifying patterns which should not be logged finer control can be gained

```
WildcardPattern = DB_*, *_LA?
WildcardOmitPattern = *ME,X*
```

will only log variables with names that begin "DB_" or end in "_LA" followed by a single character but do not end with "ME" or begin with an "X". You can specify these patterns individually or in tandem, i.e. you can use `WildcardOmitPattern` without `WildcardPattern` and vice versa.

You can also have multiple instances of these pattern declarations:

```
WildcardPattern = DB_*
WildcardPattern = *_LA?
WildcardOmitPattern = *ME
WildcardOmitPattern = X*
```

1.7.2 Exclusion Logs - "xlogs"

Not recording the right thing can be expensive so `pLogger` can provide a catch all safety net for you by logging (quietly in the background)variables which either

- failed to match any `WildcardPattern` patterns (you thought you didn't care about them but actually this was a blunder, you did....)
- matched a `WildcardOmitPattern` (you thought you explicitly didn't want them but the reality was you did.....)

to a so called "exclusion log" or `xlog` . By setting `WildcardExclusionLog=true` in the configuration block any thing sent by any MOOS process that would usually not appear in the `alog` will be captured in the `xlog` . The following truth table fully specifies the configuration and behaviour of exclusion logging. If a cell in the "Omit" column is true it means that a variable name matches a `WildcardOmitPattern` and similarly for the "Accept" column.

WildcardExclusionLog	Omit	Accept	Destination
false	false	false	not logged
false	false	true	alog
false	true	false	not logged
false	true	true	not logged
true	false	false	xlog
true	false	true	alog
true	true	false	xlog
true	true	true	xlog

Note also that if `alog` compression is enabled both `alogs` and `xlogs` are compressed at run time.

1.8 Runtime File Backup

In Post 7.0.1 releases, by writing a correctly formatted string value to the MOOS variable `PLOGGER_CMD` processes within the MOOS community can request the logger to back up arbitrary files to the current log directory. For example, if the contents of a message with name `PLOGGER_CMD` is set to

```
COPY_FILE_REQUEST = /home/pnewman/code/TheFile.xzy
```

and published to the `MOOSDB` it will result in a copy of `/home/pnewman/code/TheFile.xzy` being placed in the logging directory under the name `'TheFile.xzy'`- note the additional underscore. If the file in question has no extension then `'.bak'` is appended to the file name.

1.9 Example Configuration

```

////////////////////////////////////////
// Logger configuration block
ProcessConfig = pLogger
{
    //over loading basic params..lets be feisty
    AppTick    = 20.0
    CommsTick   = 20.0

    //all file names begin with this stem
    File        = SciPark29Mar

    //where is the root log directory
    PATH        = /home/doe/MOOSData/SciencePark/

    //yes we want some sync logging for crude
    //performance checking
    SyncLog     = true @ 0.2

    //yes we want async logging so we can replay
    // exactly what happened and record strings
    AsyncLog    = true

    WildCardLogging = false

    //yes append each created directory log file
    //with a time stamp DAY MONTH YEAR TIME
    FileTimeStamp = true

    //what do we want to log
    //(zero means capture everything)
    Log         = LMS_LASER_2D @ 0 MONITOR
    Log         = LMS_LASER_3D @ 0 MONITOR
    Log         = MARGE_ODOMETRY @ 0
    Log         = DESIRED_RUDDER @ 0
    Log         = DESIRED_THRUST @ 0
    Log         = CAMERA_GRAB @ 0
    Log         = GPSData @ 0.4
}

```

Figure 1: A Typical pLogger configuration block

2 Replay – uPB

There is a FLTK-based, cross-platform GUI application that can load in *alog* files and replay them into a MOOS community as though the originators of the data were really running and issuing notifications. A typical use of this application

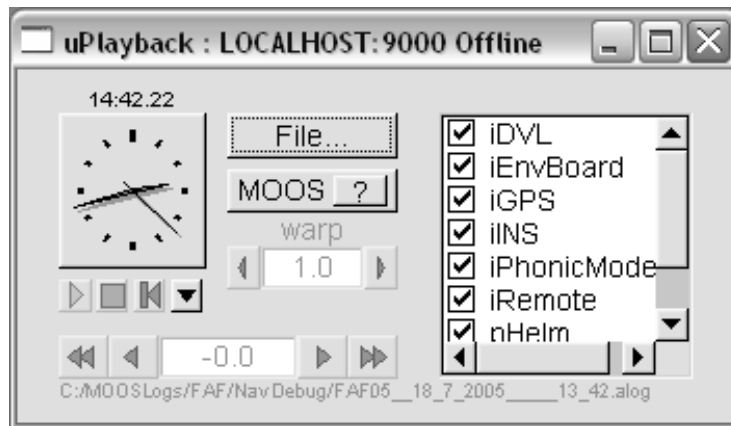


Figure 2: A screen shot of uPB – a cross-platform “alog” playback tool

is to “fake” the presence of sensor processes when reprocessing sensor data and tuning navigation filters. Alternatively, it can be used in pure replay mode, perhaps to render a movie of the recorded mission. The GUI allows the selection of which processes are “faked”. Only data recorded from those applications will be replayed from the log files. There is a single class that encapsulates all the replay functionality – `CMOOSPlayback`. The GUI simply hooks into the methods exported by this class. The GUI is almost self documenting – start it up and hold the mouse over various buttons.

A client process can control the replay of MOOS messages by writing to the `PLAYBACK_CHOKE` variable and writing a valid time in the numeric message field. The Playback executable will not play more than a few seconds past this value before waiting for a new value to be written. In this way it is possible to debug (halt inspect and compile-in-place etc) at source level a client application using replayed data without having the playback rush on ahead during periods of thought or code-stepping.