

ArmorOCR: Grounded Adversarial Visual Perception via Observation-Transferred Self-Distillation

Linhan Cao^{1,2*}, Siyuan Li^{1*}, Jun Lan^{1†}, Liangbo He¹, Guannan Li¹, Xiaolei Huang¹,
Jun Jia², Shuheng Zhou¹, Huijia Zhu¹, Weiqiang Wang¹, Wei Sun^{3†}

¹Ant Group, ²Shanghai Jiao Tong University, ³East China Normal University

Abstract

Large multimodal models (LMMs) have demonstrated strong OCR recognition capabilities, yet remain vulnerable to adversarial visual text that is readable to humans but challenging for models to localize and recognize. Existing OCR benchmarks mainly focus on natural or document-style text, while adversarial OCR evaluations remain limited in scale, task coverage, or region-aware evaluation. In this paper, we formulate adversarial OCR as a **grounded OCR perception** task and introduce **AdvSpot**, the first benchmark for grounded adversarial OCR evaluation. AdvSpot comprises 390 images with region-level annotations, spanning 5 primary categories and 13 fine-grained adversarial OCR types. To address this challenge, we propose **ArmorOCR**, a two-stage training framework for robust adversarial OCR perception. ArmorOCR first acquires missing adversarial OCR perception from privileged transformed observations through On-Policy Self-Distillation (OPSD), and then refines grounded OCR perception through Group Relative Policy Optimization (GRPO) with task-conditioned rewards for localization, recognition, full spotting, and visual question answering (VQA). Experiments on our AdvSpot, other adversarial OCR benchmarks, and general OCR benchmarks demonstrate that ArmorOCR consistently improves adversarial OCR perception while preserving competitive general OCR capability.

Code — <https://github.com/ant-research/ArmorOCR>

Introduction

OCR is a fundamental capability of large multimodal models (LMMs) (Zhang et al. 2023; Li et al. 2024; Zhu et al. 2025), yet its reliability under challenging visual conditions remains limited (Li, Cai, and Wang 2025; Gao et al. 2025). As illustrated in Figure 1, certain visual text patterns expose a clear human–AI perception gap: **humans can easily recover the intended text from visual context, whereas current LMMs may mislocalize, overlook, or misread it**. We refer to such patterns as *adversarial OCR patterns*. These patterns expose systematic weaknesses in LMMs’ visual text perception, underscoring the need for systematic evaluation and targeted model improvement to bridge this gap and develop more robust OCR capabilities.

Existing OCR benchmarks (Liu et al. 2024; Yang et al. 2025; Fu et al. 2026) have advanced general OCR evaluation

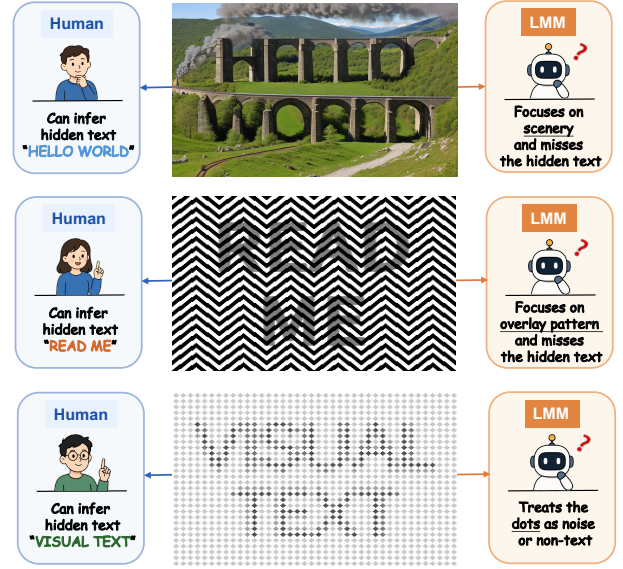


Figure 1: Examples of adversarial OCR patterns that reveal a human–AI perception gap: humans can easily recover the intended text from visual context, while current LMMs may mislocalize, overlook, or misread it.

across diverse natural visual content, but provide limited coverage of adversarial OCR patterns. Recent adversarial OCR benchmarks (Xu et al. 2026; Li et al. 2026) begin to address this setting, but remain limited in scale, task diversity, or region-level annotations. Moreover, recognition-only evaluation provides limited insight into whether a model has identified the relevant text region or merely inferred the answer from global context or linguistic priors.

Motivated by this limitation, we formulate adversarial OCR as a **grounded OCR perception** task, where models are expected to identify relevant text regions, recognize adversarial text content, and answer region-specific questions under challenging visual conditions. This formulation supports region-level verification and more fine-grained analysis of adversarial OCR failures.

To instantiate this formulation, we introduce **AdvSpot**, the first benchmark for grounded adversarial OCR perception. AdvSpot provides the most comprehensive perception

*These authors contributed equally.

†Corresponding author.

taxonomy of adversarial OCR patterns to date, covering 5 primary categories and 13 fine-grained types organized according to their underlying OCR failure mechanisms. It contains 390 images with region-level annotations, including bounding boxes, text transcriptions, category labels, and grounded visual question answering (VQA) pairs. Together, these annotations enable systematic evaluation of grounded adversarial OCR perception with respect to localization, recognition, and region-specific question answering.

Recent approaches (Xu et al. 2026; Li, Cai, and Wang 2025) to adversarial OCR perception rely on “thinking-with-images” strategies (Hong et al. 2025; Song et al. 2025), applying transformations such as cropping, resizing, or flipping at inference time to reveal adversarial text that is difficult to perceive from the original view. Although effective, these approaches introduce additional inference latency and deployment complexity, motivating us to ask: *Can the perceptual information revealed by transformed views be internalized into model parameters during training?*

To answer this question, we propose **ArmorOCR**, a two-stage training framework that internalizes transformation-revealed visual evidence for single-pass grounded adversarial OCR perception, without requiring additional visual transformations or tools at inference time. In Stage 1, we perform On-Policy Self-Distillation (OPSD) with response-region-aware token weighting: the student observes only the original image, while a teacher with the same backbone is conditioned on privileged transformed views. Token-level distribution guidance along the student’s on-policy trajectories transfers the perception revealed by privileged observations to the student, establishing a robust perceptual foundation. However, self-distillation remains constrained by the teacher’s performance ceiling and lacks explicit optimization of diverse grounded OCR objectives. Stage 2 therefore employs Group Relative Policy Optimization (GRPO) with task-conditioned rewards for localization, recognition, full spotting, and grounded VQA to jointly optimize these complementary capabilities.

Our contributions are summarized as follows:

- We introduce **AdvSpot**, the first benchmark for grounded adversarial OCR perception, with the most comprehensive taxonomy of adversarial OCR patterns to date and region-level annotations enabling fine-grained evaluation of adversarial OCR perception.
- We propose **ArmorOCR**, a two-stage framework that internalizes transformation-revealed perception through privileged observation transfer and refines grounded OCR perception with task-conditioned GRPO.
- Extensive experiments on AdvSpot, existing adversarial OCR benchmarks, and general OCR benchmarks demonstrate that ArmorOCR consistently improves adversarial OCR perception while preserving competitive general OCR capability.

Related Work

OCR Perception Benchmarks

Existing OCR benchmarks (Singh et al. 2019; Mathew, Karatzas, and Jawahar 2021; Masry et al. 2022; Wang et al.

2024), such as OCRBench (Liu et al. 2024), CCOCR (Yang et al. 2025), and OCRBench-v2 (Fu et al. 2026), evaluate visual text perception across diverse scenarios, including natural scenes, documents, and multilingual content. However, they provide limited coverage of adversarial OCR patterns.

Recent adversarial OCR benchmarks begin to address this gap. AdvOCR (Xu et al. 2026) focuses on adversarial OCR robustness but remains limited in scale and taxonomy, while SmuggleBench (Li et al. 2026) evaluates image-level hidden-text extraction without region grounding or designed question answering. In contrast, our proposed AdvSpot provides bounding boxes, transcriptions, region-grounded VQA and perception-type labels instances under a comprehensive failure-mechanism-based taxonomy.

Adversarial OCR Perception Methods

Existing approaches to adversarial OCR perception mainly recover difficult visual text at inference time. VACoT (Xu et al. 2026) adopts a “thinking-with-images” paradigm (Chng et al. 2025; Zhang et al. 2025; Zheng et al. 2025b) that dynamically applies visual transformations such as cropping and resizing, while SemVink (Li, Cai, and Wang 2025) shows that zoom-out views can reveal text hidden in AI-generated images. Although effective, these approaches introduce additional inference-time overhead. Li et al. (Li et al. 2026) improve hidden-text extraction through detailed chain-of-thought (CoT) prompting, but such prompt-based strategies require benchmark-specific adaptation. In contrast, our ArmorOCR enables single-pass inference on the original image without additional visual transformations or extended reasoning processes.

Self-Distillation and Reinforcement Learning

On-policy self-distillation (OPSD) (Zhao et al. 2026) trains the student on its own sampled trajectories, with a teacher equipped with privileged information to provide token-level distribution guidance. Recent multimodal studies (Yuan et al. 2026; Cai et al. 2026; Tian et al. 2026) further extend privileged information from textual to visual representations. For example, Vision-OPD (Yuan et al. 2026) transfers fine-grained perception from a crop-conditioned teacher to a full-image student. ArmorOCR extends this principle to adversarial OCR by transferring perception revealed through multiple transformations from a privileged-view teacher to an original-view student.

Reinforcement learning has been widely used for LMM alignment by optimizing task-specific rewards (Schulman et al. 2017; Guo et al. 2025; Zheng et al. 2025a; Yu et al. 2026), such as GRPO (Guo et al. 2025), which performs policy optimization using relative rewards among multiple sampled responses without requiring an explicit value model. Such reward-driven optimization is suitable for adversarial OCR perception, where localization, recognition, spotting, and grounded answering can be directly optimized through task-specific rewards.

Benchmark: AdvSpot

AdvSpot advances adversarial OCR benchmarking in three respects. First, it offers broader and more systematic coverage

Dimension	AdvOCR	SmuggleBench	AdvSpot
# Images	100	1,700	390
# Perception Types	—	6	13
BBox Annotations	✗	✗	✓
Region-aware QA	✗	✗	✓

Table 1: Comparison to prior adversarial OCR benchmarks.

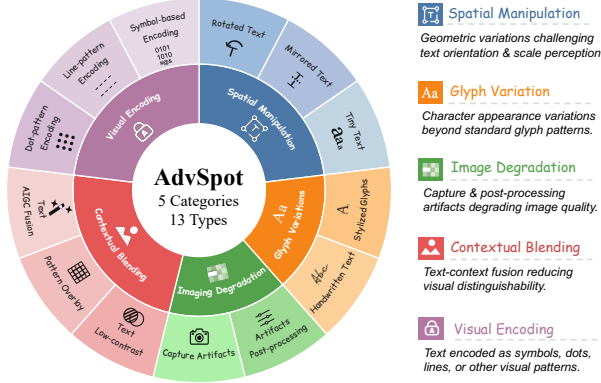


Figure 2: Perception types of AdvSpot grouped by their underlying failure mechanisms.

of adversarial OCR perception types by organizing them according to their underlying failure mechanisms. Second, it introduces fine-grained annotations, including bounding boxes, transcriptions, perception-type labels, and region-grounded VQA pairs. Third, it provides a region-grounded evaluation framework for adversarial OCR perception, enabling more informative assessment beyond recognition-only evaluation. Table 1 compares AdvSpot with existing adversarial OCR benchmarks.

Task Definition

AdvSpot instantiates grounded adversarial OCR perception as a region-grounded VQA task. Each instance is represented as

$$S = (x, \mathcal{C}^*, b^*, t^*, q, a^*), \quad (1)$$

where x is an image containing adversarial OCR patterns, $\mathcal{C}^*$ is the set of perception-type labels associated with the annotated text region b^* , and t^* is its transcription. The question q uniquely refers to the region-text pair (b^*, t^*) through visual attributes or spatial context, and a^* is the corresponding answer.

During evaluation, the model receives only (x, q) . Answering correctly requires the model to ground the question to the relevant text region, recognize the adversarial text, and provide a region-specific answer. This formulation enables grounded evaluation of adversarial OCR perception.

Taxonomy

AdvSpot comprises 5 primary categories and **13 fine-grained** adversarial OCR types grouped by perception-failure mechanisms, as summarized in Figure 2, with detailed definitions and examples provided in Appendix A.1.

Annotation and QA Construction

We construct AdvSpot through a *human-in-the-loop* pipeline, as illustrated in Figure 3. We first collect tens of thousands of candidate images potentially containing adversarial OCR patterns. Each image is independently annotated by two annotators with bounding boxes, transcriptions, and perception-type labels according to our taxonomy. We retain only regions with consistent annotations from both annotators and discard images without agreed regions. For each retained region, we use Qwen3-VL-235B-A22B-Instruct to generate a region-grounded question-answer pair conditioned on the image, bounding box, and transcription; the detailed prompt is provided in Appendix A.2. Each QA pair then undergoes two rounds of expert review to correct errors, verify that the question uniquely refers to the target region, and ensure that the answer is consistent with the verified transcription.

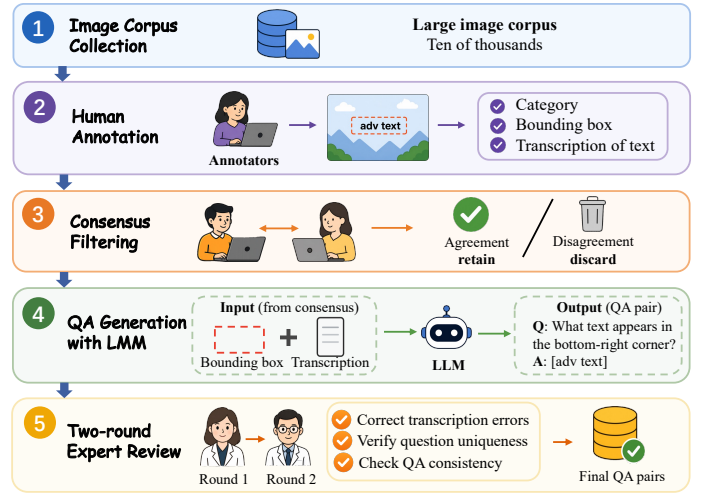


Figure 3: Human-in-the-loop pipeline of our AdvSpot.

Evaluation Protocol

We use VQA accuracy as the primary metric. A prediction is considered correct if the complete reference answer appears as a contiguous substring of the model prediction:

$$\text{Acc}(\hat{a}, a^*) = \mathbb{I}[a^* \preceq_{\text{sub}} \hat{a}], \quad (2)$$

where $u \preceq_{\text{sub}} v$ denotes that u is a contiguous substring of v . This criterion permits additional explanatory content while requiring the complete reference answer.

To directly evaluate region grounding, we additionally compute the intersection over union (IoU) between the predicted bounding box $\hat{b}$ and the ground-truth bounding box b^* :

$$\text{IoU}(\hat{b}, b^*) = \frac{|\hat{b} \cap b^*|}{|\hat{b} \cup b^*|}. \quad (3)$$

VQA accuracy evaluates the correctness of region-specific answers, while IoU explicitly measures localization quality. Detailed evaluation prompts are provided in Appendix A.3.

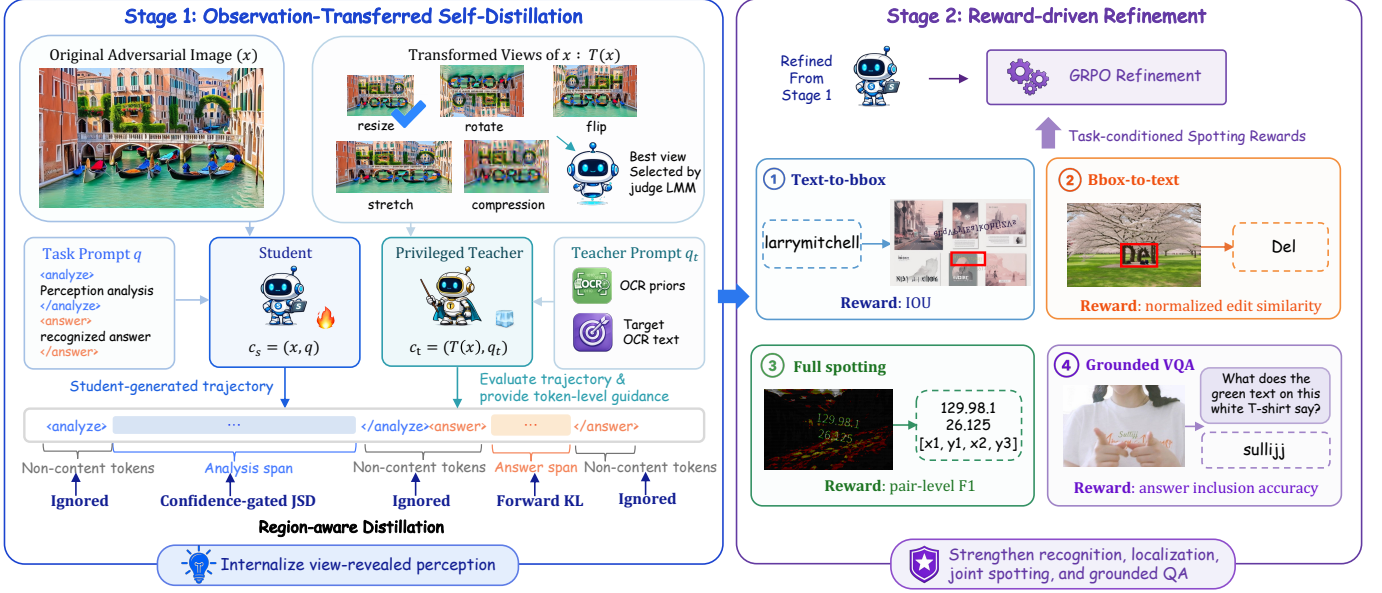


Figure 4: Overview of **ArmorOCR**, a two-stage framework for grounded adversarial OCR perception. Stage 1 transfers transformation-induced perception from privileged observations via OPSD, while Stage 2 optimizes grounded OCR perception through task-conditioned GRPO rewards for localization, recognition, full spotting, and grounded VQA.

Method: ArmorOCR

We propose **ArmorOCR** (Figure 4), a two-stage framework for adversarial OCR perception via observation transfer and reward-driven refinement. ArmorOCR is based on the observation that adversarial OCR failures arise from two challenges: (1) the original view may hide critical visual cues required to perceive adversarial text, and (2) adversarial perception alone is insufficient for completing grounded OCR tasks that require localization, recognition, and grounded answering. Therefore, ArmorOCR first transfers transformation-revealed perception from privileged observations to the student through OPSD, and then optimizes grounded OCR perception through GRPO with task-conditioned rewards.

Stage 1: Observation-Transferred Self-Distillation

Motivated by the observation that adversarial OCR difficulty is often view-dependent (Li, Cai, and Wang 2025), we aim to transfer the perceptual advantages revealed by transformed views into the model during training. Building upon OPSD, we propose Observation-Transferred Self-Distillation (OTSD), where a teacher conditioned on privileged transformed views guides the student.

Let x be the original adversarial image and q be the task prompt. The prompt q instructs the model to provide an intermediate perception analysis within `<analyze>` and `</analyze>` tags, followed by the final recognized answer within `<answer>` and `</answer>` tags. The student is conditioned only on the original image and the task prompt:

$$c_s = (x, q). \quad (4)$$

In contrast, the teacher is conditioned on privileged observa-

tions:

$$c_t = (\mathcal{T}(x), q_t), \quad (5)$$

where $\mathcal{T}(x)$ denotes a transformed view of x . We consider five transformations: resizing, stretching, rotation, flipping, and compression. For each image, the judge LMM, Qwen3-VL-235B-A22B-Instruct, selects the transformed view with the highest recognition accuracy. The teacher prompt q_t further extends q with adversarial OCR priors and the target OCR text, enabling the teacher to understand the adversarial visual pattern and provide reliable token-level answer guidance. Further details are provided in Appendix B.1.

The student first samples an on-policy response:

$$\hat{y} \sim \pi_\theta(\cdot | c_s). \quad (6)$$

The teacher then evaluates the student-generated trajectory under privileged observations. At token position i , the student and teacher distributions are:

$$p_s^i = \pi_\theta(\cdot | c_s, \hat{y}_{<i}), \quad p_t^i = \pi'_\theta(\cdot | c_t, \hat{y}_{<i}). \quad (7)$$

Vanilla OPSD uniformly distills all response tokens, overlooking their distinct roles in the final OCR prediction. Analysis tokens encode potentially uncertain intermediate perception, answer tokens directly determine the transcription, and structural tokens contain no task-relevant content. We therefore introduce a **response-region-aware distillation loss**, partitioning the response into an analysis span $\mathcal{R}_{\text{ana}}$, an answer span $\mathcal{R}_{\text{ans}}$, and non-content structural tokens using pre-defined tags.

For analysis tokens, uniformly applying distillation may propagate uncertain or noisy intermediate reasoning. We therefore use confidence-gated Jensen–Shannon divergence

Category	Subtype	Open-source Qwen3-VL Series				Closed-source Proprietary LMMs				Our LMM
		8B (Our Base)	30B-A3B	32B	235B-A22B	Claude-Sonnet-4.5	GPT-4o	GPT-5	Gemini-2.5 Flash	Armor-OCR
Imaging Degradation	Capture Artifacts	<u>56.7</u>	<u>56.7</u>	50.0	<u>56.7</u>	3.3	20.0	30.0	<u>56.7</u>	60.0
	Post-processing	<u>50.0</u>	<u>63.3</u>	<u>70.0</u>	<u>63.3</u>	26.7	43.3	40.0	<u>76.7</u>	56.7
Spatial Manipulation	Rotated Text	53.3	<u>56.7</u>	73.3	53.3	6.7	26.7	30.0	50.0	56.7
	Mirrored Text	33.3	<u>36.7</u>	33.3	33.3	6.7	13.3	23.3	26.7	60.0
	Tiny Text	63.3	<u>63.3</u>	<u>73.3</u>	66.7	50.0	50.0	60.0	86.7	56.7
Glyph Variations	Stylized Glyphs	<u>36.7</u>	<u>43.3</u>	40.0	46.7	13.3	16.7	43.3	23.3	30.0
	Handwritten Text	66.7	<u>56.7</u>	<u>63.3</u>	<u>63.3</u>	13.3	33.3	40.0	50.0	<u>63.3</u>
Visual Encoding	Symbol Encoding	0.0	2.5	0.0	5.0	0.0	20.0	32.5	12.5	52.5
	Dot Encoding	6.7	10.0	6.7	10.0	3.3	20.0	<u>26.7</u>	10.0	53.3
	Line Encoding	6.7	13.3	3.3	13.0	0.0	<u>20.0</u>	<u>20.0</u>	3.3	60.0
Contextual Blending	AIGC Fusion Text	2.5	5.0	10.0	7.5	0.0	0.5	2.5	5.0	75.0
	Low Contrast Text	42.9	<u>48.6</u>	51.4	<u>48.6</u>	11.4	31.4	34.4	37.1	51.4
	Pattern Overlay	<u>11.4</u>	<u>11.4</u>	<u>11.4</u>	<u>11.4</u>	0.0	5.7	8.6	8.6	48.6
Avg. Acc.	–	31.2	34.3	<u>35.3</u>	34.8	9.8	23.2	30.0	32.3	55.7
Avg. IoU	–	49.1	50.6	<u>51.9</u>	47.5	10.4	15.9	35.0	28.0	63.3

Table 2: Fine-grained accuracy and average localization IoU on AdvSpot. All values are reported in %. The best and second-best results are highlighted in **bold** and underlined, respectively. **Avg. Acc.** and **Avg. IoU** denote the sample-weighted averages of accuracy and IoU, respectively. Category-wise IoU results are provided in Appendix A.3. The same conventions apply to subsequent tables.

(JSD) (Lu et al. 2026) to selectively transfer reliable teacher signals:

$$\mathcal{L}_{\text{ana}}^i = g_i D_{\text{JSD}}^\beta(p_t^i \| p_s^i), \quad i \in \mathcal{R}_{\text{ana}}, \quad (8)$$

where D_{JSD}^β denotes the generalized JSD with mixture coefficient β . The token-level confidence weight is defined as

$$g_i = \sigma \left(\gamma \left[\max_k \log p_t^i(k) - \max_k \log p_s^i(k) \right] \right), \quad (9)$$

where $\sigma(\cdot)$ is the sigmoid function and γ controls the sharpness of the confidence gate. The weight g_i increases when the privileged teacher is more confident than the student, strengthening distillation at positions with reliable teacher guidance while suppressing uncertain signals.

For answer tokens, which directly determine the final OCR transcription, we apply stronger supervision using forward KL divergence:

$$\mathcal{L}_{\text{ans}}^i = \text{KL}(p_t^i \| p_s^i), \quad i \in \mathcal{R}_{\text{ans}}. \quad (10)$$

Conditioned on privileged observations and OCR guidance, the teacher provides a reliable target answer distribution. We assign uniform weights to all answer tokens, as each contributes to the final transcription.

Non-content tokens, such as structural markers, are excluded from the loss because they encode only the output format and do not contribute to adversarial text perception. The resulting objective selectively transfers intermediate perception while imposing direct supervision on the final OCR output:

$$\mathcal{L}_{\text{OTSD}} = \frac{\sum_{i \in \mathcal{R}_{\text{ana}}} \mathcal{L}_{\text{ana}}^i + \sum_{i \in \mathcal{R}_{\text{ans}}} \mathcal{L}_{\text{ans}}^i}{\sum_{i \in \mathcal{R}_{\text{ana}}} g_i + |\mathcal{R}_{\text{ans}}| + \epsilon}. \quad (11)$$

Stage 2: Reward-driven Refinement

Stage 1 establishes the model’s ability to perceive adversarial text, but teacher-guided distillation remains constrained by teacher supervision and does not directly optimize the diverse objectives required by grounded OCR tasks. We therefore apply GRPO with task-conditioned rewards to align the model with grounded adversarial OCR perception. Specifically, we construct four complementary tasks: text-to-bbox for localization, bbox-to-text for recognition, full spotting for joint region-text prediction, and grounded VQA for region-specific question answering.

For **text-to-bbox**, the model performs text-conditioned region localization by predicting the bounding box corresponding to a given text string. The localization reward is defined as the IoU between the predicted and ground-truth bounding boxes:

$$R_{\text{t2b}} = \text{IoU}(\hat{b}, b^*). \quad (12)$$

For **bbox-to-text**, the model performs region-conditioned text recognition by predicting the transcription corresponding to a given bounding box. Let $\hat{t}$ and t^* denote the predicted and ground-truth transcriptions, respectively. We adopt normalized Levenshtein similarity as the recognition reward:

$$R_{\text{b2t}} = 1 - \frac{\text{ED}(\hat{t}, t^*)}{\max(|\hat{t}|, |t^*|)}, \quad (13)$$

where $\text{ED}(\cdot, \cdot)$ denotes the Levenshtein edit distance.

For **full spotting**, the model jointly predicts multiple text regions and their corresponding transcriptions. A predicted bbox-text pair is considered a valid match only when both localization and recognition constraints are satisfied:

$$\text{IoU}(\hat{b}, b^*) \geq \theta_{\text{iou}}, \quad \text{Sim}(\hat{t}, t^*) \geq 1 - \theta_{\text{edit}}, \quad (14)$$

where $\text{Sim}(\cdot, \cdot)$ denotes the normalized Levenshtein similarity, and θ_{iou} and θ_{edit} are predefined thresholds for localization and recognition matching, respectively. We perform

Benchmark	Task	Open-source Qwen3-VL Series				Closed-source LMMs		Specialized LMMs		
		8B (Our Base)	30B-A3B	32B	235B-A22B	GPT-5	Gemini-2.5 Flash	VACoT	Smuggle-CoT	Armor-OCR
AdvOCR	Real-world	30.0	34.0	44.0	44.0	12.0	34.0	62.0	–	44.0
	Synthetic	12.0	12.0	8.0	12.0	22.0	12.0	48.0	–	68.0
	Avg.	21.0	23.0	26.0	28.0	17.0	23.0	55.0	–	56.0
SmuggleBench	Tiny Text	26.1	25.9	23.6	25.1	18.2	26.3	–	30.2	33.0
	Occluded Text	18.2	23.2	19.1	19.6	9.7	24.1	–	26.1	17.5
	Low Contrast	3.0	8.8	3.5	6.5	4.0	12.5	–	8.5	6.5
	Handwritten	31.7	30.4	29.3	33.7	15.8	15.4	–	31.7	27.0
	Artistic	14.1	14.5	11.6	15.6	11.1	8.7	–	18.6	19.0
	AI Illusions	0.0	0.3	0.8	0.8	0.3	0.0	–	0.0	8.2
	Avg.	13.3	14.8	14.3	14.6	8.5	12.4	–	16.4	17.1

Table 3: Results on other adversarial OCR benchmarks: AdvOCR and SmuggleBench.

greedy matching between predicted and ground-truth pairs and use pair-level F1 score as the joint spotting reward:

$$R_{\text{joint}} = \frac{2PR}{P+R}, \quad (15)$$

where P and R denote the precision and recall of matched bbox-text pairs.

For **grounded VQA**, the model answers questions grounded on the annotated adversarial text region. We use normalized answer inclusion as the reward:

$$R_{\text{vqa}} = \mathbb{I}[a^* \subseteq \hat{a}]. \quad (16)$$

Given the sampled response $\hat{y}$, its ground-truth target y^* , and the task type τ , the final reward is defined as:

$$R(y, y^*, \tau) = \begin{cases} R_{\text{t2b}}, & \tau = \text{text_to_bbox}, \\ R_{\text{b2t}}, & \tau = \text{bbox_to_text}, \\ R_{\text{joint}}, & \tau = \text{full_spotting}, \\ R_{\text{vqa}}, & \tau = \text{vqa}. \end{cases} \quad (17)$$

Experiments

Experimental Setup

Benchmarks. We evaluate models on two groups of benchmarks. For **adversarial OCR perception**, we evaluate models on our proposed AdvSpot and two existing adversarial OCR-related benchmarks, AdvOCR (Xu et al. 2026) and SmuggleBench (Li et al. 2026). For **general OCR perception**, we further evaluate on three widely used general OCR benchmarks: CCOCR (Yang et al. 2025), OCRBench (Liu et al. 2024), and OCRBench-v2 (Fu et al. 2026).

Models. We compare open-source and proprietary LMMs. For open-source models, we evaluate the Qwen3-VL series at different scales (Bai et al. 2025). For proprietary models, we include Claude-Sonnet-4.5 (Anthropic 2025), GPT-4o (Achiam et al. 2023), GPT-5 (OpenAI 2025) and Gemini-2.5 Flash (Comanici et al. 2025). Additional benchmark results are reported in Appendix A.4. For existing adversarial OCR benchmarks, we also compare benchmark-specific methods: VACoT (Xu et al. 2026) for AdvOCR and Smuggle-CoT (Li et al. 2026) for SmuggleBench¹.

¹Since VACoT is not open-sourced, we report its official results. Smuggle-CoT refers to the SmuggleBench-specific CoT-based test-time scaling method using Qwen3-VL-235B-A22B-Instruct with detailed prompting.

Training Details. Due to the scarcity of large-scale adversarial OCR data, we construct automated data synthesis pipelines to generate stage-specific training sets with controllable adversarial patterns. The synthesized training data provide scalable supervision with diverse adversarial patterns, and all evaluations are conducted in a **zero-shot** setting. Stage 1 uses 50K samples to establish adversarial OCR perception, while Stage 2 uses 70K samples enriched with harder adversarial cases for fine-grained grounded OCR optimization. All evaluations are conducted in a zero-shot setting on AdvSpot and other OCR benchmarks. Detailed data generation procedures are provided in Appendix C.1. ArmorOCR uses Qwen3-VL-8B-Instruct as the backbone. In Stage 1, the teacher model is kept frozen and the student is optimized with the proposed OTSD. In Stage 2, we further optimize the model with GRPO using task-conditioned rewards, with 8 rollout responses sampled per prompt. The hyperparameters θ_{iou} and θ_{edit} in Eq. (14) are set to 0.5 and 0.1, respectively. Both stages are trained on PPU-810E accelerators. Detailed training configurations are provided in Appendix C.2.

Metrics. For AdvSpot, we report VQA accuracy and localization IOU. For AdvOCR, we report pass@1 accuracy evaluated by Qwen3-30B-A3B-2507 (Bai et al. 2025), following its official evaluation protocol. For SmuggleBench, we focus on its ‘‘Perceptual Blindness’’ subset, which is most aligned with our task, and report the TER metric introduced in the original paper. For the three general OCR benchmarks, we adopt the open-source evaluation toolkit VLMEvalKit (Duan et al. 2024), whose results are largely consistent with the official metrics, and report the overall benchmarks scores.

Performance Analysis

Results on AdvSpot. The results on AdvSpot are presented in Table 2. Both open-source and closed-source LMMs struggle on our benchmark, achieving overall accuracies below 36%. Symbol Encoding and AIGC Fusion Text remain highly challenging, with most models achieving nearly zero accuracy. These failures indicate that current LMMs are still vulnerable to adversarial OCR patterns, especially those involving visual encoding and contextual blending. In contrast, ArmorOCR achieves the best overall performance, improving over its base model by 24.5%. The gain is particularly pronounced on AIGC Fusion Text, where ArmorOCR outper-

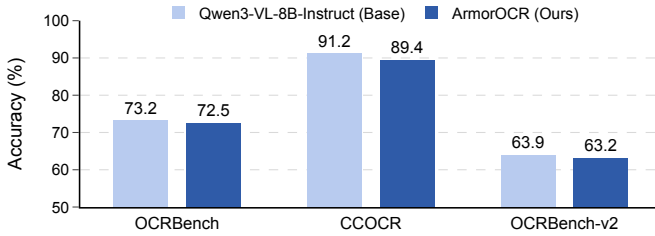


Figure 5: General OCR capability preservation of ArmorOCR on three standard OCR benchmarks.

forms the strongest competing model by 65%. ArmorOCR also achieves the highest average localization IoU, indicating its strong capability in both region localization and grounded adversarial OCR perception. Moreover, the mismatch between IoU and accuracy trends across different models suggests that answer accuracy alone does not guarantee reliable grounding. For example, Gemini-2.5 Flash achieves competitive accuracy but obtains only 28.0% IoU, 7% lower than GPT-5 despite its lower accuracy. This highlights the importance of jointly evaluating localization and perception for fine-grained analysis of adversarial OCR failures.

Results on Other Adversarial OCR Benchmarks. The results on AdvOCR and SmuggleBench are summarized in Table 3. ArmorOCR achieves the highest average accuracy on both benchmarks. On AdvOCR, ArmorOCR outperforms the tool-assisted VACoT by 20% on the synthetic split, which focuses on more challenging adversarial patterns. On SmuggleBench, ArmorOCR achieves better overall performance than Smuggle-CoT, with a notable gain of 8% on the AI Illusions category, despite the latter relying on a much larger 235B model with detailed CoT prompting. These results demonstrate the effectiveness and robustness of ArmorOCR across diverse adversarial OCR scenarios.

General OCR Capability. A potential concern is that improving adversarial OCR perception may degrade general OCR ability. We therefore evaluate both the base model and ArmorOCR on three general OCR benchmarks. As shown in Figure 5, ArmorOCR maintains comparable performance with the base model across all benchmarks, despite using no additional general OCR training data. This demonstrates that our training strategy improves adversarial OCR robustness while largely preserving general OCR capability.

Ablation Study

We conduct all ablation studies on AdvSpot, as it provides a comprehensive evaluation setting for grounded adversarial OCR perception. The results are reported in Table 9.

Stage Ablations. We first evaluate the two-stage training design. The full ArmorOCR outperforms both single-stage variants, indicating that Stage 1 and Stage 2 are complementary. Although Stage 2 alone substantially improves localization, it yields only a limited gain in VQA accuracy, highlighting the importance of **first internalizing the adversarial OCR perception revealed by transformed views**. Building Stage 2 upon Stage 1 further improves accuracy performance

Stage 1		Stage 2				IoU	Acc.
VT	RAD	R_{t2b}	R_{b2t}	R_{joint}	R_{vqa}		
Baseline						49.1	31.2
Stage Ablations							
		✓	✓	✓	✓	61.2	39.8
✓	✓					58.7	48.9
Stage 1 Component Ablations							
	✓					52.2	35.3
✓						54.1	46.6
Stage 2 Reward Ablations							
✓	✓		✓	✓	✓	60.4	52.1
✓	✓	✓		✓	✓	61.5	52.4
✓	✓	✓	✓		✓	62.8	53.2
✓	✓	✓	✓	✓		62.8	50.1
✓	✓	✓	✓	✓	✓	63.3	55.7

Table 4: Ablation study of ArmorOCR on AdvSpot. **VT** and **RAD** denote visual transfer and region-aware distillation.

by 6.8%, showing that task-conditioned reward optimization effectively translates the perception acquired in Stage 1 into more accurate grounded answers.

Stage 1 Component Ablations. We further analyze the two key designs in Stage 1: visual transfer and response-region-aware distillation. Removing visual transfer conditions the teacher only on the original image and privileged textual information, yielding a marginal accuracy improvement of 4.1%, thus indicating that privileged transformed observations provide more effective supervision than textual information alone. Replacing our response-region-aware objective with the standard OPSD JSD loss also degrades performance, demonstrating that importance-guided selective distillation enables more effective knowledge transfer.

Stage 2 Reward Ablations. We finally evaluate the contribution of each task-conditioned reward in Stage 2. Removing any reward leads to a performance drop, showing that recognition, localization, spotting, and VQA objectives each provide useful supervision. Their complementary effects jointly strengthen grounded adversarial OCR perception.

Conclusion

In this work, we introduced **AdvSpot**, a grounded adversarial OCR benchmark with a comprehensive taxonomy for evaluating adversarial OCR perception. AdvSpot goes beyond existing OCR benchmarks by focusing on visually manipulated text that is readable to humans but challenging for LMMs. We further proposed **ArmorOCR**, a two-stage framework for robust grounded adversarial OCR perception. ArmorOCR first internalizes transformation-revealed perception through observation-transferred self-distillation, and then uses task-conditioned GRPO rewards to jointly optimize localization, recognition, spotting, and grounded VQA. Experiments demonstrate that ArmorOCR consistently improves adversarial OCR perception while preserving general OCR capability. We hope AdvSpot and ArmorOCR will facilitate future research on reliable and generalizable visual text perception under challenging conditions.

References

- Achiam, J.; Adler, S.; Agarwal, S.; Ahmad, L.; Akkaya, I.; Aleman, F. L.; Almeida, D.; Altenschmidt, J.; Altman, S.; Anadkat, S.; et al. 2023. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*.
- Anthropic. 2025. Claude Sonnet 4.5. <https://www.anthropic.com/news/claude-sonnet-4-5>.
- Bai, S.; Cai, Y.; Chen, R.; Chen, K.; Chen, X.; Cheng, Z.; Deng, L.; Ding, W.; Gao, C.; Ge, C.; et al. 2025. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*.
- Cai, Y.; Liu, J.; Liu, Y.; Deng, H.; Yao, L.; Zheng, Y.; Ouyang, K.; Li, Z.; Wang, Z.; Sun, X.; et al. 2026. Thinking Without Images: Internalizing Visual Manipulation with On-Policy Self-Distillation. *arXiv preprint arXiv:2606.08719*.
- Chng, Y. X.; Hu, T.; Tong, W.; Li, X.; Chen, J.; Yu, H.; Lu, J.; Guo, H.; Deng, H.; Xie, C.; et al. 2025. SenseNova-MARS: Empowering Multimodal Agentic Reasoning and Search via Reinforcement Learning. *arXiv preprint arXiv:2512.24330*.
- Comanici, G.; Bieber, E.; Schaekermann, M.; Pasupat, I.; Sachdeva, N.; Dhillon, I.; Blistein, M.; Ram, O.; Zhang, D.; Rosen, E.; et al. 2025. Gemini 2.5: Pushing the frontier with advanced reasoning, multimodality, long context, and next generation agentic capabilities. *arXiv preprint arXiv:2507.06261*.
- Duan, H.; Yang, J.; Qiao, Y.; Fang, X.; Chen, L.; Liu, Y.; Dong, X.; Zang, Y.; Zhang, P.; Wang, J.; et al. 2024. Vlmevalkit: An open-source toolkit for evaluating large multi-modality models. In *Proceedings of the 32nd ACM International Conference on Multimedia*, 11198–11201.
- Fu, L.; Kuang, Z.; Song, J.; Huang, M.; Yang, B.; Li, Y.; Zhu, L.; Luo, Q.; Wang, X.; Lu, H.; et al. 2026. Ocrbench v2: An improved benchmark for evaluating large multimodal models on visual text localization and reasoning. *Advances in Neural Information Processing Systems*, 38.
- Gao, H.; Huang, Z.; Xu, L.; Tang, J.; Li, X.; Liu, Y.; Li, H.; Hu, T.; Lin, M.; Yang, X.; et al. 2025. Pixels, patterns, but no poetry: To see the world like humans. *arXiv preprint arXiv:2507.16863*.
- Guo, D.; Yang, D.; Zhang, H.; Song, J.; Wang, P.; Zhu, Q.; Xu, R.; Zhang, R.; Ma, S.; Bi, X.; et al. 2025. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*.
- Hong, J.; Zhao, C.; Zhu, C.; Lu, W.; Xu, G.; and Yu, X. 2025. Deepeyesv2: Toward agentic multimodal model. *arXiv preprint arXiv:2511.05271*.
- Li, B.; Zhang, Y.; Guo, D.; Zhang, R.; Li, F.; Zhang, H.; Zhang, K.; Zhang, P.; Li, Y.; Liu, Z.; et al. 2024. Llava-onevision: Easy visual task transfer. *arXiv preprint arXiv:2408.03326*.
- Li, S.; Cai, Y.; and Wang, Y. 2025. SemVink: Advancing VLMs’ Semantic Understanding of Optical Illusions via Visual Global Thinking. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, 27155–27165.
- Li, Z.; Ma, Z.; Pan, Y.; Zhang, Z.; Lv, X.; Li, B.; Gao, J.; Zhang, J.; Yuan, C.; Li, B.; et al. 2026. Making mllms blind: Adversarial smuggling attacks in mllm content moderation. In *Findings of the Association for Computational Linguistics: ACL 2026*, 20142–20161.
- Liu, Y.; Li, Z.; Huang, M.; Yang, B.; Yu, W.; Li, C.; Yin, X.-C.; Liu, C.-L.; Jin, L.; and Bai, X. 2024. Ocrbench: on the hidden mystery of ocr in large multimodal models. *Science China Information Sciences*, 67(12): 220102.
- Lu, Z.; Yao, Z.; Han, Z.; Wang, Z.-H.; Wu, J.; Gu, Q.; Cai, X.; Lu, W.; Xiao, J.; Zhuang, Y.; et al. 2026. Self-distilled agentic reinforcement learning. *arXiv preprint arXiv:2605.15155*.
- Masry, A.; Tan, J. Q.; Joty, S.; Hoque, E.; et al. 2022. Chartqa: A benchmark for question answering about charts with visual and logical reasoning. In *Findings of the association for computational linguistics: ACL 2022*, 2263–2279.
- Mathew, M.; Karatzas, D.; and Jawahar, C. 2021. Docvqa: A dataset for vqa on document images. In *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, 2200–2209.
- OpenAI. 2025. GPT-5. <https://openai.com/gpt-5/>.
- Schulman, J.; Wolski, F.; Dhariwal, P.; Radford, A.; and Klimov, O. 2017. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*.
- Singh, A.; Natarajan, V.; Shah, M.; Jiang, Y.; Chen, X.; Batra, D.; Parikh, D.; and Rohrbach, M. 2019. Towards vqa models that can read. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 8317–8326.
- Song, Q.; Li, H.; Yu, Y.; Zhou, H.; Yang, L.; Bai, S.; She, Q.; Huang, Z.; and Zhao, Y. 2025. CodeDance: A Dynamic Tool-integrated MLLM for Executable Visual Reasoning. *arXiv preprint arXiv:2512.17312*.
- Tian, K.; Liu, S.; Yan, Z.; Xia, S.; Dong, S.; and Wang, Y. 2026. ViCuR: Visual Cues as Recoverable Privilege for Multimodal On-Policy Distillation. *arXiv preprint arXiv:2606.05718*.
- Wang, Z.; Xia, M.; He, L.; Chen, H.; Liu, Y.; Zhu, R.; Liang, K.; Wu, X.; Liu, H.; Malladi, S.; et al. 2024. Charxiv: Charting gaps in realistic chart understanding in multimodal llms. In *The Thirty-eight Conference on Neural Information Processing Systems Datasets and Benchmarks Track*.
- Xu, Z.; Sun, C.; Du, S.; Li, C.; Lyu, J.; and Yuan, C. 2026. Vacot: Rethinking visual data augmentation with vlms. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 9780–9790.
- Yang, Z.; Tang, J.; Li, Z.; Wang, P.; Wan, J.; Zhong, H.; Liu, X.; Yang, M.; Wang, P.; Bai, S.; et al. 2025. Cc-ocr: A comprehensive and challenging ocr benchmark for evaluating large multimodal models in literacy. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, 21744–21754.
- Yu, Q.; Zhang, Z.; Zhu, R.; Yuan, Y.; Zuo, X.; Yue, Y.; Dai, W.; Fan, T.; Liu, G.; Liu, L.; et al. 2026. Dapo: An open-source llm reinforcement learning system at scale. *Advances in Neural Information Processing Systems*, 38: 113222–113244.

Yuan, Q.; Lou, J.; Yu, X.; Lin, H.; Sun, L.; Han, X.; and Lu, Y. 2026. Vision-opd: Learning to see fine details for multimodal llms via on-policy self-distillation. *arXiv preprint arXiv:2605.18740*.

Zhang, P.; Dong, X.; Wang, B.; Cao, Y.; Xu, C.; Ouyang, L.; Zhao, Z.; Duan, H.; Zhang, S.; Ding, S.; et al. 2023. Internlm-xcomposer: A vision-language large model for advanced text-image comprehension and composition. *arXiv preprint arXiv:2309.15112*.

Zhang, Y.; Lu, X.; Yin, S.; Fu, C.; Chen, W.; Hu, X.; Wen, B.; Jiang, K.; Liu, C.; Zhang, T.; et al. 2025. Thyme: Think beyond images. In *NeurIPS 2025 Fourth Workshop on Deep Learning for Code*.

Zhao, S.; Xie, Z.; Liu, M.; Huang, J.; Pang, G.; Chen, F.; and Grover, A. 2026. Self-Distilled Reasoner: On-Policy Self-Distillation for Large Language Models. *arXiv preprint arXiv:2601.18734*.

Zheng, C.; Liu, S.; Li, M.; Chen, X.-H.; Yu, B.; Gao, C.; Dang, K.; Liu, Y.; Men, R.; Yang, A.; et al. 2025a. Group sequence policy optimization. *arXiv preprint arXiv:2507.18071*.

Zheng, Z.; Yang, M.; Hong, J.; Zhao, C.; Xu, G.; Yang, L.; Shen, C.; and Yu, X. 2025b. Deepeyes: Incentivizing "thinking with images" via reinforcement learning. *arXiv preprint arXiv:2505.14362*.

Zhu, J.; Wang, W.; Chen, Z.; Liu, Z.; Ye, S.; Gu, L.; Tian, H.; Duan, Y.; Su, W.; Shao, J.; et al. 2025. Internvl3: Exploring advanced training and test-time recipes for open-source multimodal models. *arXiv preprint arXiv:2504.10479*.

ArmorOCR: Grounded Adversarial Visual Perception via Observation-Transferred Self-Distillation

Supplementary Material

More Details of our Benchmark

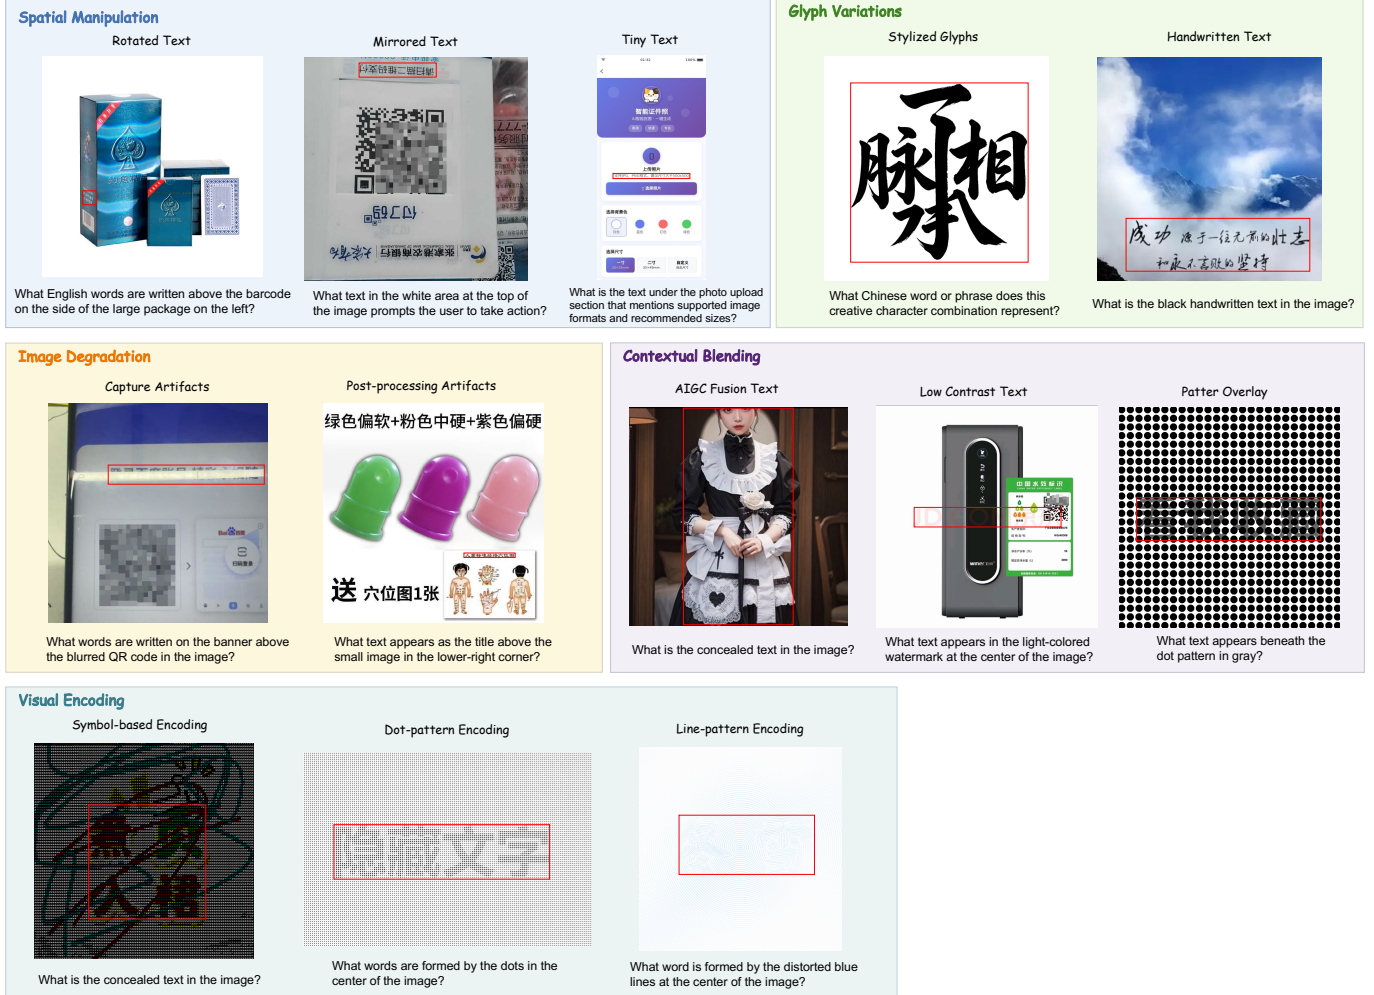


Figure 6: Representative examples of the 5 primary categories and 13 fine-grained subtypes in AdvSpot. Each example includes a grounded VQA pair for region-level adversarial OCR perception evaluation.

Detailed Definition of each Taxonomy

Our taxonomy is organized according to the underlying OCR failure mechanisms. Specifically, AdvSpot categorizes adversarial OCR patterns into 5 primary categories and 13 fine-grained subtypes, as detailed below.

- **Spatial Manipulation.** This category contains adversarial patterns that alter the spatial layout or geometric properties of text, making localization and recognition more challenging.
 - **Rotated Text.** Text is rotated with arbitrary orientations or perspective distortions, requiring the model to recognize text under diverse geometric transformations.
 - **Mirrored Text.** Text is horizontally or vertically flipped, violating the normal reading direction.
 - **Tiny Text.** The text occupies only a very small portion of the image, making it difficult to localize and recognize.
- **Glyph Variations.** This category modifies the appearance of characters while preserving their semantic meaning.

Category	Subtype	Number of Samples
Spatial Manipulation	Rotated Text	30
	Mirrored Text	30
	Tiny Text	30
Glyph Variations	Stylized Glyphs	30
	Handwritten Text	30
Image Degradation	Capture Artifacts	30
	Post-processing Artifacts	30
Contextual Blending	AIGC Fusion Text	40
	Low Contrast Text	35
	Pattern Overlay	35
Visual Encoding	Symbol-based Encoding	40
	Dot-pattern Encoding	30
	Line-pattern Encoding	30

Table 5: Distribution of AdvSpot samples across the 5 primary categories and 13 fine-grained subtypes.

- **Stylized Glyphs.** Characters are intentionally distorted through stroke splitting, occlusion, truncation, or other artistic modifications while remaining readable to humans.
- **Handwritten Text.** Non-standard handwritten characters exhibiting connected strokes, exaggerated deformation, or irregular writing styles.
- **Image Degradation.** This category reduces OCR performance through imaging artifacts introduced during image acquisition or post-processing.
 - **Capture Artifacts.** Imaging degradations caused during acquisition, such as motion blur, reflections, film grain, over-/under-exposure, or excessive filtering.
 - **Post-processing Artifacts.** Image quality degradation introduced after capture, including blur, compression artifacts, additive noise, and other image processing operations.
- **Contextual Blending.** This category conceals text by reducing its visual distinguishability from the surrounding context.
 - **AIGC Fusion Text.** AI-generated images seamlessly blend text with surrounding visual content, making text boundaries difficult to distinguish.
 - **Low Contrast Text.** Text exhibits low contrast with its background due to similar colors or high transparency.
 - **Pattern Overlay.** Lines, dot patterns, textures, or other visual patterns are superimposed on text, interfering with character perception.
- **Visual Encoding.** This category encodes textual information into non-standard visual patterns instead of conventional glyphs.
 - **Symbol-based Encoding.** Characters are represented through the spatial arrangement of symbols or special characters.
 - **Dot-pattern Encoding.** Characters are encoded using the positions, sizes, or densities of dot patterns.
 - **Line-pattern Encoding.** Characters are encoded through line orientation, length, width, or connectivity.

Figure 6 presents representative examples for each fine-grained subtype in our taxonomy. These examples illustrate the diverse adversarial OCR patterns covered by AdvSpot and highlight the distinct visual challenges introduced by different failure mechanisms.

Table 5 summarizes the distribution of AdvSpot across different taxonomy categories and fine-grained subtypes. Counts are computed at the adversarial pattern level, where a single image or VQA instance may contain multiple adversarial patterns. AdvSpot contains 390 images with 397 grounded VQA pairs in total.

Detailed Construction of VQA Pairs

For each retained text region, we construct a grounded visual question answering (VQA) pair using Qwen3-VL-235B-A22B-Instruct. The model receives the original image together with the target bounding box and its OCR transcription as privileged information, and is instructed to generate a question whose unique answer is exactly the provided transcription.

As shown in Figure 7, the prompt explicitly requires the generated question to (1) uniquely identify the target region using visual attributes (e.g., object category, color, shape, size, or relative position), (2) avoid any ambiguity with other text regions in the image, (3) never expose the OCR transcription or bounding-box coordinates in the question itself, and (4) ensure that the provided transcription is the only correct answer. These constraints encourage visually grounded questions that require both accurate localization and text recognition, while preventing shortcuts based on coordinate information or answer leakage.

Prompt 7: System Prompt for Grounded VQA Data Construction

You are an expert VQA data annotator.

Your task is to construct Visual Question Answering (VQA) training data based on a specified text region in an image.

Target Region:

The bounding box coordinates are: [{x_min}, {y_min}, {x_max}, {y_max}].

The coordinate format is [x_min, y_min, x_max, y_max], normalized to the range of 0-1000 with respect to the image width and height.

The OCR text within this region is: {text_content}.

Your Task:

1. Visual Analysis.

Observe the target region and identify its visual characteristics, including object type, color, shape, size, and relative position.

2. Question Construction.

Construct a question asking about the text content within the target region.

3. Unique Grounding Requirement.

The question must uniquely identify the target region in the entire image and should not introduce ambiguity with other regions.

4. Content Constraints.

The question must not contain coordinate values, coordinate numbers, or the OCR text itself. The only correct answer to the question must exactly match the provided OCR text.

Output Format Requirement

Question: [Your generated question]

Important Notes:

The question must never reveal the provided OCR text or use coordinates to refer to the target region. The OCR text is only provided to understand the semantic role of the target region and its relationship with other visual elements in the image.

Figure 7: The system prompt used for constructing grounded VQA training data.

Detailed Testing Prompt

Figure 8 presents the testing prompt used throughout all experiments. Given a grounded VQA question, the model is instructed to output the recognized text and its corresponding bounding box in a predefined JSON format. The bounding box coordinates are normalized to the range of 0–1000 with respect to the image size.

More Experiments on AdvSpot

To provide a more comprehensive evaluation, we report the complete benchmarking results on AdvSpot across an expanded collection of both open-source and proprietary LMMs. Specifically, Table 6 presents the localization IoU results, while Table 7 reports the corresponding grounded VQA accuracy.

Prompt 2: Detailed Testing Prompt for Grounded OCR Perception Evaluation

Please output the answer and the corresponding text bounding box in JSON format:
{"text": "answer content", "bbox": [x_min, y_min, x_max, y_max]}
The coordinate values are in the range of 0-1000.

Figure 8: The testing prompt used for grounded OCR perception evaluation.

Model Name	1		2			3		4			5			Overall
	1-1	1-2	2-1	2-2	2-3	3-1	3-2	4-1	4-2	4-3	5-1	5-2	5-3	
OpenAI GPT Family														
GPT-4o	5.3	11.6	3.5	8.1	4.3	26.0	17.1	27.8	30.0	19.4	8.8	13.3	23.3	15.9
GPT-5	16.0	22.8	19.9	19.6	11.7	55.8	40.0	54.8	51.9	48.2	20.4	23.6	52.1	35.0
GPT-5.1	13.3	20.9	16.5	24.3	10.3	41.0	39.0	39.2	47.8	46.7	25.1	13.2	44.3	30.1
GPT-5.4	20.8	27.8	22.5	27.4	11.0	56.3	37.0	61.1	46.9	54.1	25.4	14.0	38.4	34.5
Google Gemini Family														
Gemini-2.5-Flash	15.2	22.9	14.2	12.2	18.0	46.0	34.8	30.4	47.2	41.8	15.4	22.1	40.3	28.0
Gemini-2.5-Pro	23.7	31.6	25.4	21.6	15.9	55.5	45.9	40.9	49.1	51.4	22.3	28.4	52.0	36.2
Gemini-3-Flash	67.2	68.3	55.6	62.5	50.5	70.1	80.9	42.8	70.9	78.9	45.6	56.5	73.5	63.0
Gemini-3.5-Flash	21.7	28.3	21.0	23.1	15.6	44.9	44.4	45.6	60.9	74.2	42.0	18.7	71.3	40.5
Anthropic Claude Family														
Claude-Haiku-4.5	3.7	7.2	1.1	6.0	6.0	22.2	6.3	16.5	21.2	24.5	16.1	6.3	22.0	12.8
Claude-Sonnet-4.5	4.8	9.7	10.3	12.1	0.0	32.3	19.8	3.2	4.0	11.7	5.8	6.0	12.9	10.4
Claude-Opus-4.5	4.0	8.1	4.1	7.8	4.7	12.5	13.7	16.3	19.6	26.0	16.7	5.1	25.1	13.1
Moonshot Family														
Kimi-K2.5	36.9	39.8	41.4	39.4	62.7	73.6	51.9	28.9	48.3	51.6	12.3	41.0	44.4	41.6
Kimi-K2.6	38.3	37.0	41.4	48.1	39.3	72.8	59.9	28.2	40.9	42.2	12.3	45.3	41.9	41.1
Zhipu Family														
GLM-4.5V	40.2	37.8	41.6	52.1	42.4	68.7	75.8	30.5	66.7	63.6	23.6	43.9	52.7	48.8
GLM-4.6V	37.1	39.5	45.1	57.0	44.7	71.4	73.0	37.2	63.8	68.1	25.8	49.6	58.8	51.0
Alibaba Qwen Family														
Qwen3 Series														
Qwen3-VL-8B-Instruct	62.0	46.0	61.7	55.9	44.5	77.9	83.2	9.9	37.1	44.9	28.4	57.6	48.4	49.1
Qwen3-VL-30B-A3B-Instruct	64.8	51.6	58.3	48.7	48.8	72.2	79.7	14.7	49.6	57.0	18.3	57.8	60.2	50.6
Qwen3-VL-32B-Instruct	70.4	48.9	70.5	60.5	51.9	86.0	86.9	13.7	42.5	39.8	18.9	63.2	50.4	51.9
Qwen3-VL-235B-A22B-Instruct	55.1	37.5	58.2	51.1	44.5	77.9	82.1	18.5	26.1	39.3	29.1	57.1	50.3	47.5
Qwen3.5 Series														
Qwen3.5-35B-A3B	24.9	17.8	27.7	44.2	22.8	55.0	44.2	24.6	32.6	36.6	15.7	27.1	29.6	30.6
Qwen3.5-122B-A10B	38.3	22.4	34.5	48.6	33.4	57.0	57.8	32.9	37.7	45.1	19.6	38.4	37.7	38.5
Qwen3.5-397B-A17B	47.0	32.8	46.6	51.1	49.0	71.7	61.0	41.5	51.3	48.5	23.6	45.8	40.4	47.0
Our Proposed Method														
ArmorOCR	53.0	40.0	57.2	53.5	48.9	81.1	70.4	70.6	61.4	70.5	62.5	57.3	73.9	63.3

Table 6: **Localization IOU** results of our AdvSpot benchmark across the expanded model zoo. Accuracy results over five main categories and their subcategories. **Category legend:** **1** = Imaging Degradation (1-1: Capture Artifacts; 1-2: Post-processing Artifacts); **2** = Spatial Manipulation (2-1: Rotated Text; 2-2: Mirrored Text; 2-3: Tiny Text); **3** = Glyph Variations (3-1: Stylized Glyphs; 3-2: Handwritten Text); **4** = Visual Encoding (4-1: Symbol-based Encoding; 4-2: Dot-pattern Encoding; 4-3: Line-pattern Encoding); **5** = Contextual Blending (5-1: AIGC Fusion Text; 5-2: Low Contrast Text; 5-3: Pattern Overlay).

More Details of Method

More Details of Stage 1

Figure 9 and 10 illustrates two representative training examples of Observation-Transferred Self-Distillation (OTSD). In each example, the student receives only the original adversarial image together with the task prompt, while the teacher is conditioned on an additional privileged transformed observation. Among multiple transformed views, the view with the highest recognition accuracy selected by the judge LMM is provided to the teacher as the privileged observation.

Beyond the transformed view, the teacher prompt q_t incorporates additional privileged textual information, including adversarial OCR priors and the ground-truth OCR text. The adversarial OCR priors describe the construction process of synthetic adversarial patterns introduced in Section , providing the teacher with contextual knowledge about the visual perturbations and

Model Name	1		2			3		4			5			Overall
	1-1	1-2	2-1	2-2	2-3	3-1	3-2	4-1	4-2	4-3	5-1	5-2	5-3	
OpenAI GPT Family														
GPT-4o	20.0	43.3	26.7	13.3	50.0	16.7	33.3	20.0	20.0	20.0	0.5	31.4	5.7	23.2
GPT-5	30.0	40.0	30.0	23.3	60.0	43.3	40.0	32.5	26.7	20.0	2.5	34.4	8.6	30.0
GPT-5.1	30.0	43.3	26.7	6.7	53.3	26.7	33.3	27.5	23.3	26.7	5.0	31.4	2.9	25.9
GPT-5.4	23.3	46.7	23.3	13.3	36.7	13.3	20.0	0.0	3.3	3.3	0.0	28.6	5.7	16.1
Google Gemini Family														
Gemini-2.5-Flash	56.7	76.7	50.0	26.7	86.7	23.3	50.0	12.5	10.0	3.3	5.0	37.1	8.6	32.3
Gemini-2.5-Pro	63.3	80.0	60.0	36.7	83.3	33.3	60.0	12.5	20.0	10.0	7.5	40.0	12.5	37.3
Gemini-3-Flash	73.3	80.0	76.7	40.0	93.3	63.3	70.0	5.0	16.7	20.0	7.5	62.9	20.0	45.6
Gemini-3.5-Flash	63.3	80.0	63.3	26.7	80.0	70.0	70.0	7.5	20.0	16.7	7.5	60.0	17.1	42.6
Anthropic Claude Family														
Claude-Haiku-4.5	3.3	16.7	3.3	0.0	26.7	6.7	3.3	0.0	0.0	0.0	0.0	8.6	0.0	5.0
Claude-Sonnet-4.5	3.3	26.7	6.7	6.7	50.0	13.3	13.3	0.0	3.3	0.0	0.0	11.4	0.0	9.8
Claude-Opus-4.5	33.3	50.0	30.0	13.3	60.0	30.0	26.7	0.0	3.3	3.3	5.0	31.4	2.9	21.2
Moonshot Family														
Kimi-K2.5	53.3	53.3	56.7	10.0	53.3	56.7	56.7	5.0	0.0	0.0	2.5	37.1	5.7	28.2
Kimi-K2.6	50.0	56.7	53.3	16.7	63.3	63.3	53.3	5.0	0.0	0.0	2.5	42.9	5.7	29.7
Zhipu Family														
GLM-4.5V	50.0	40.0	40.0	13.3	56.7	23.3	53.3	0.0	6.7	3.3	7.5	31.4	14.3	24.7
GLM-4.6V	53.3	43.3	43.3	20.0	63.3	33.3	53.3	0.0	10.0	3.3	7.5	34.3	14.3	27.7
Alibaba Qwen Family														
Qwen3 Series														
Qwen3-VL-8B-Instruct	56.7	50.0	53.3	33.3	63.3	36.7	66.7	0.0	6.7	6.7	2.5	42.9	11.4	31.2
Qwen3-VL-30B-A3B-Instruct	56.7	63.3	56.7	36.7	63.3	43.3	56.7	2.5	10.0	13.3	5.0	48.6	11.4	34.3
Qwen3-VL-32B-Instruct	50.0	70.0	73.3	33.3	73.3	40.0	63.3	0.0	6.7	3.3	10.0	51.4	11.4	35.3
Qwen3-VL-235B-A22B-Instruct	56.7	63.3	53.3	33.3	66.7	46.7	63.3	5.0	10.0	13.0	7.5	48.6	11.4	34.8
Qwen3.5 Series														
Qwen3.5-35B-A3B	36.7	40.0	43.3	6.7	40.0	33.3	36.7	0.0	6.7	0.0	5.0	34.3	5.7	20.7
Qwen3.5-122B-A10B	26.7	30.0	40.0	10.0	46.7	36.7	43.3	0.0	0.0	3.3	2.5	34.3	5.7	19.6
Qwen3.5-397B-A17B	36.7	50.0	46.7	20.0	53.3	56.7	50.0	5.0	0.0	0.0	5.0	34.3	5.7	26.7
Our Proposed Method														
ArmorOCR	60.0	56.7	56.7	60.0	56.7	30.0	63.3	52.5	53.3	60.0	75.0	51.4	48.6	55.7

Table 7: **VQA Accuracy** results of our AdvSpot benchmark across the expanded model zoo.

helping it understand the underlying perception challenges. The ground-truth OCR text further provides explicit recognition guidance, improving the reliability of the teacher’s generated responses.

The contributions of these two types of privileged textual information are further investigated through the ablation study in Section .

Example 1: Student and Teacher Prompts for Stage 1

Student Prompt:



`<image>`
Recognize the text in the image.
Put your reasoning process inside `<analyze></analyze>`,
and put the recognized text inside `<answer></answer>`.

Teacher Prompt (Resize Transformation):



`<image>`
Recognize the text in the image.
Put your reasoning process inside `<analyze></analyze>`,
and put the recognized text inside `<answer></answer>`.

Reference Information:

The text is generated with a 164px large bold stroke style,
rotated counterclockwise by approximately 8 degrees,
and blended with an AI-generated natural scene background.
The target text is "VR".

Now generate your own reasoning process and answer.

Figure 9: Example 1 of student and teacher prompts in Stage 1 observation-transferred self-distillation. The student receives only the original image, while the teacher receives additional privileged information revealed by transformed observations.

Example 2: Student and Teacher Prompts for Stage 1

Student Prompt:



<image>

What is the text written on the semi-transparent white uppercase letters overlaid on the roasted duck?

Put your reasoning process inside <analyze></analyze>, and put the recognized text inside <answer></answer>.

Teacher Prompt (Rotation Transformation):



<image>

What is the text written on the semi-transparent white uppercase letters overlaid on the roasted duck?

Put your reasoning process inside <analyze></analyze>, and put the recognized text inside <answer></answer>.

Reference Information:

The image has been processed with an inverse rotation transformation. The target answer is "CHARME".

Now generate your own reasoning process and answer.

Figure 10: Example 2 of student and teacher prompts in Stage 1 observation-transferred self-distillation.

More Details of Stage 2

Stage 2 employs GRPO with four task-conditioned objectives to explicitly optimize different aspects of grounded adversarial OCR perception. Specifically, we formulate four tasks, including text-to-bbox localization, bbox-to-text recognition, full spotting, and grounded VQA. Each task uses a task-specific prompt and corresponding reward function. The detailed prompts are shown in Figure 11.

Task-specific Prompts for Stage 2 GRPO Optimization

1. Text-to-BBox Localization

```
<image>
## Task Description
Locate the position of the following text in the image:
"{text content}".

## Output Requirement
Output the bounding box directly in the format:
[x_min, y_min, x_max, y_max].
The coordinates are normalized integers within the range of 0-1000.
```

2. BBox-to-Text Recognition

```
<image>
## Task Description
Recognize the text within the following bounding box region:
[{x_min}, {y_min}, {x_max}, {y_max}].
The bounding box format is [x_min, y_min, x_max, y_max],
where coordinates are normalized integers within 0-1000.
```

3. Full Spotting

```
<image>
## Task Description
Detect and recognize all text content in the image.

## Output Requirement
Output in JSON format:
[ {"bbox": [x_min, y_min, x_max, y_max],
  "text": "recognized text"} ]
```

4. Grounded VQA

```
<image>
## Task Description
Answer the following grounded VQA question:
{grounded VQA question}.

## Output Requirement
bbox:[x_min, y_min, x_max, y_max]
answer:[text content]
```

Figure 11: Task-specific prompts used for Stage 2 GRPO optimization.

More Details of Training

Training Data Construction

Due to MLLM’s limited perception of adversarial OCR, building such datasets relies heavily on manual annotation, which is difficult to scale. Therefore we design an adversarial OCR data synthesis framework that batch-generates adversarial OCR samples with full annotations (including adversarial prior, text transcription, and bounding box).

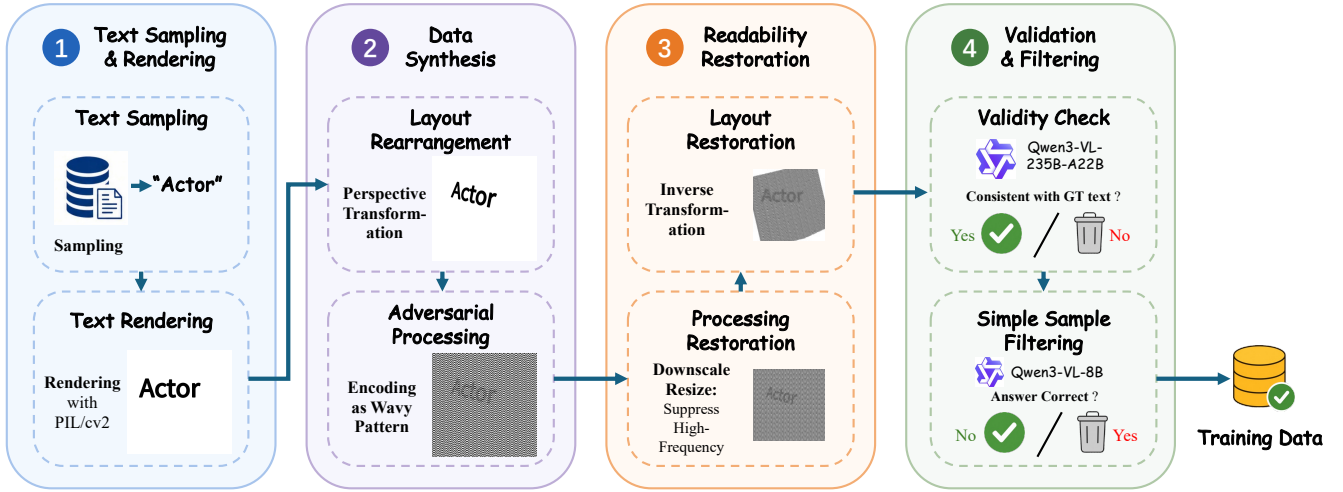


Figure 12: Adversarial OCR Data Synthesis Framework.

The overall pipeline is shown in 12, which consists of the following steps: text generation, rendering, adversarial processing, readability restoration, validation and filtering. Text sources come from LLM-generated corpora and *Faker* library². In the rendering step, each text instance is drawn on a separate mini-canvas with its bounding box recorded. All instances are blended into a single image after layout rearrangement and bounding bbox based collision detection. Then a range of adversarial processing steps (such as AIGC fusion, ASCII art) are applied to the template image, making the text hard to recognize. To ensure data usability, we introduce a readability-restoration step that partially recovers the readability of the adversarial OCR sample. The resulting degraded sample is verified by Qwen3-VL-235B-A22B, which rejects samples where adversarial processing destroyed the original text. Finally, Qwen-VL-8B filters out samples that can already be correctly recognized without further training.

Training Configurations

Table 8 summarizes the detailed training configurations used in Stage 1 and Stage 2 of ArmorOCR, including the common model settings and stage-specific hyper-parameters for observation-transferred self-distillation and Reward-driven Refinement.

More Details of Experiments

Ablation Study on Privileged Textual Information

To investigate the contribution of different types of privileged textual information in Stage 1, we conduct an ablation study by removing OCR priors and ground-truth OCR text individually. All results in Table 9 are obtained without visual transfer to evaluate the individual contribution of privileged textual signals.

Specifically, OCR priors provide information about the construction process of adversarial OCR patterns, helping the teacher model understand the underlying visual perturbations and better perceive adversarial text. Meanwhile, ground-truth OCR text provides explicit semantic guidance, helping resolve visually ambiguous characters and establish the correct recognition target. Combining both sources achieves the best performance, demonstrating their complementary effects.

However, the improvements remain limited without visual transfer from transformed observations, indicating that textual information alone cannot fully reveal the visual cues required for robust adversarial OCR perception. This further validates the importance of transferring transformation-revealed perception in Stage 1.

²<https://github.com/joke2k/faker>

Training Configuration	Value	Description
Common Configuration		
<i>Model Configuration</i>		
Backbone	<i>Qwen3-VL-8B-Instruct</i>	/
FREEZE_LLM	<i>False</i>	All LLM parameters are trainable
FREEZE_ALIGNER	<i>False</i>	All aligner parameters are trainable
FREEZE_VIT	<i>False</i>	All vision encoder parameters are trainable
<i>Optimization Configuration</i>		
Optimizer	AdamW	/
Learning Rate	1×10^{-6}	/
Weight Decay	0.05	/
Warmup Ratio	0.03	/
Precision	<i>bfloat16</i>	/
DeepSpeed	<i>ZeRO-2</i>	/
<i>Vision Processing Configuration</i>		
Minimum Image Tokens	64	/
Maximum Image Tokens	4096	/
Maximum Sequence Length	8192	/
Stage 1: Observation-Transferred Self-Distillation		
<i>OPSD Configuration</i>		
JSD On-policy Sampling Ratio λ	1.0	Fully on-policy
Generalized JSD Weight β	0.5	Weight in the generalized JSD loss
Sampling Temperature	1.0	/
Maximum Completion Length	1024	Maximum number of generated tokens
<i>vLLM Configuration</i>		
Use vLLM	<i>True</i>	/
vLLM Mode	<i>Colocate</i>	vLLM shares the same devices with training
vLLM Maximum Model Length	8192	/
vLLM GPU Memory Utilization	0.4	/
<i>Training Configuration</i>		
Training Samples	50K	/
Accelerators	16	PPU-810E accelerators
Per-device Batch Size	1	/
Gradient Accumulation Steps	2	/
Training Epochs	2	/
Stage 2: Reward-driven Refinement		
<i>GRPO Configuration</i>		
Number of Rollouts	8	Number of sampled responses per prompt
Steps per Generation	4	Policy update steps per generation
KL Coefficient β	0.04	KL regularization coefficient
Maximum Completion Length	1024	/
<i>vLLM Configuration</i>		
Use vLLM	<i>True</i>	/
vLLM Mode	<i>Server</i>	External vLLM server for rollout generation
vLLM Maximum Model Length	8192	/
vLLM Tensor Parallel Size	1	/
vLLM Data Parallel Size	16	Computed from 16 rollout accelerators
vLLM Prefix Caching	<i>True</i>	Enabled during rollout generation
Asynchronous Generation	<i>True</i>	/
<i>Training Configuration</i>		
Training Samples	70K	/
Accelerators	128	PPU-810E accelerators
Training Accelerators	112	14 per node $\times$ 8 nodes
Rollout Accelerators	16	2 per node $\times$ 8 nodes
Number of Nodes	8	/
Processes per Node	14	Training processes only
Per-device Batch Size	4	/
Gradient Accumulation Steps	1	/
Training Epochs	3	/

Table 8: Training configurations of ArmorOCR for two stages.

OCR Priors	GT OCR Text	IoU	Acc.
✓	×	51.4	32.0
×	✓	50.8	33.8
✓	✓	52.2	35.3

Table 9: Ablation study of privileged textual information in Stage 1 on AdvSpot without visual transfer.

Case Study



Question: Please identify the hidden text in the image.

Grounded Truth: WPK俱乐部

Our ArmorOCR

`<analyze>`
The image features stylized text that appears to be "WPK俱乐部". The text is rendered in a glowing, slightly blurred font, superimposed on an AI-generated background depicting a night scene with bamboo stalks and a moon. The characters are arranged in three lines: "WP" on the top, "K俱乐部" on the middle and bottom. Although the image is designed to blend the text into the environment, the text is still legible and appears to be a coherent phrase. The phrase "WPK俱乐部" is likely a proper name, perhaps for a club or organization.
`</analyze>`
`<answer>WPK俱乐部</answer>`



GPT-5

`<analyze>`
I examined the image carefully for any legible or hidden text and did not find any.
`</analyze>`
`<answer>No recognizable text found in the image.</answer>`



Gemini-2.5-Flash


`<analyze>`
I will analyze the provided image and its crops to identify any hidden text.
1. Examine the overall image: The image depicts a serene night scene with bamboo forests, a river, lanterns, and a moonlit sky in an illustrative or digital-art style.
2. Look for anomalies or patterns: I scan the entire image, paying attention to areas that might contain hidden text.
3. Utilize the cropped images: The crops help zoom in on specific sections without losing context, so I go through them systematically.
Crop 1 (Top left): focuses on the upper sky, moons, and bamboo. No obvious text.
Crop 2 (Top right): focuses on the upper sky, moons, bamboo, and a hanging lantern. No obvious text.
Crop 3 (Bottom left): focuses on the left bank of the river, bamboo, and ground lanterns. Looking closely at the reflections of the three lanterns near the bottom left corner, each reflection shows faint, distorted shapes. It is very subtle, but these reflections seem to contain letter-like forms.
Crop 4 (Bottom right): focuses on the right bank of the river, bamboo, and ground lanterns. No obvious text.
4. Re-examine the original image with this location in mind: I focus on the reflections of the three lanterns on the left bank, closest to the viewer. The left reflection looks like a distorted "A" or "R". The middle reflection looks like a distorted "I" or "L". The right reflection looks like a distorted "A" or "N". Although the text is extremely faint and distorted by the water reflection, the most plausible reading from left to right is "AIA".
`</analyze>`
`<answer>The hidden text is "AIA".</answer>`



Qwen3-VL-235B-A22B-Instruct

`<analyze>`
Upon careful inspection of the image, I looked for any text subtly embedded in the lighting, reflections, foliage, lanterns, sky, or water. The image shows a serene night scene with bamboo stalks, glowing lanterns, a moonlit sky, a reflective river, and distant misty mountains. I examined the lanterns, bamboo, sky, water, and background architecture, but found no visible inscriptions, mirrored text, or hidden symbols. I also checked for steganographic or watermark-like elements, but nothing appears embedded in the composition. Therefore, I conclude that no text is hidden in this image.
`</analyze>`
`<answer>`
No hidden text found.
`</answer>`

Figure 13: Case study 1 from AdvSpot (AIGC Fusion Text), illustrating the performance comparison between ArmorOCR and existing LMMs on adversarial OCR perception.



Question: What is the faintly visible text in the central region of the pattern formed by dense vertical black lines?

Ground Truth: See space Shake

Our ArmorOCR

<analyze>

1. The image displays a pattern of dense vertical black lines on a light background.

2. These lines are not uniform; they vary in spacing and density, creating a steganographic effect where text is hidden within the pattern.

3. By closely examining the pattern, one can discern the faint outlines of letters formed by the spacing and alignment of the lines.

4. The text appears to be arranged in three lines:

- The first line clearly shows "See sp"
- The second line shows "ace Sh"
- The third line shows "ake"

5. Combining these lines gives the phrase "See space Shake".

6. Although the text is faint, the letterforms are recognizable as "See space Shake".

</analyze>

<answer>See space Shake</answer>



GPT-5

<analyze>

The image shows a moiré-like pattern with dense vertical black lines. In the lighter central region, three lines of faint text appear. The top line reads "Open up," the middle line "about," and the bottom line "AI." The letter shapes match these words when focusing past the lines.

</analyze>

<answer>Open up about AI</answer>



Gemini-2.5-Flash

<analyze>

The image is an optical illusion with text hidden within dense vertical black lines. To identify it, I look for subtle variations in the lines' thickness, spacing, or alignment in the central region. Slightly defocusing or viewing from a short distance helps the hidden pattern emerge.

1. Initial scan: I focus on the central area where the lines deviate from a uniform pattern.

2. Pattern recognition: Some lines appear slightly thicker or shifted, forming faint letter shapes.

3. Letter identification: On the left, the shape resembles an "H". Next is an "I". Then a "D". Followed by another "D". Then an "E". On the far right, an "N".

4. Consolidation: Together, these letters form the word "HIDDEN".

5. Verification with crops: Crop 1 (top left) shows the "H" and the start of the "I". Crop 2 (top right) shows the "I" and the first "D". Crop 3 (bottom left) shows the second "D" and the "E". Crop 4 (bottom right) shows the "E" and the "N". The crops support the same reading, so the hidden text is "HIDDEN".

</analyze>

<answer>The faintly visible text in the central region of the pattern is "HIDDEN". </answer>



Qwen3-VL-235B-A22B-Instruct

<analyze>

The image consists of dense vertical black lines on a white background, creating a pattern that resembles a barcode or moiré effect. At first glance, it appears uniform, but closer inspection—especially with a slight change in viewing angle, brightness, or by squinting—reveals that certain vertical lines are slightly broken, offset, or spaced differently to encode hidden text.

This technique is known as steganography or a "secret message in plain sight" using visual patterns. The interruptions in the vertical lines form discernible shapes aligned horizontally, which spell out letters.

By mentally grouping the gaps or disruptions in the vertical lines into horizontal segments, it becomes possible to decode the text: In the upper-central area, the pattern of gaps forms the word "HELLO". Below it, another line of gaps forms "WORLD". Together, the faint visible text reads "HELLO WORLD".

This is a common placeholder or test message in programming and visual puzzles.

</analyze>

<answer>Hello World</answer>



Figure 14: Case study 2 from AdvSpot (Line-pattern Encoding).

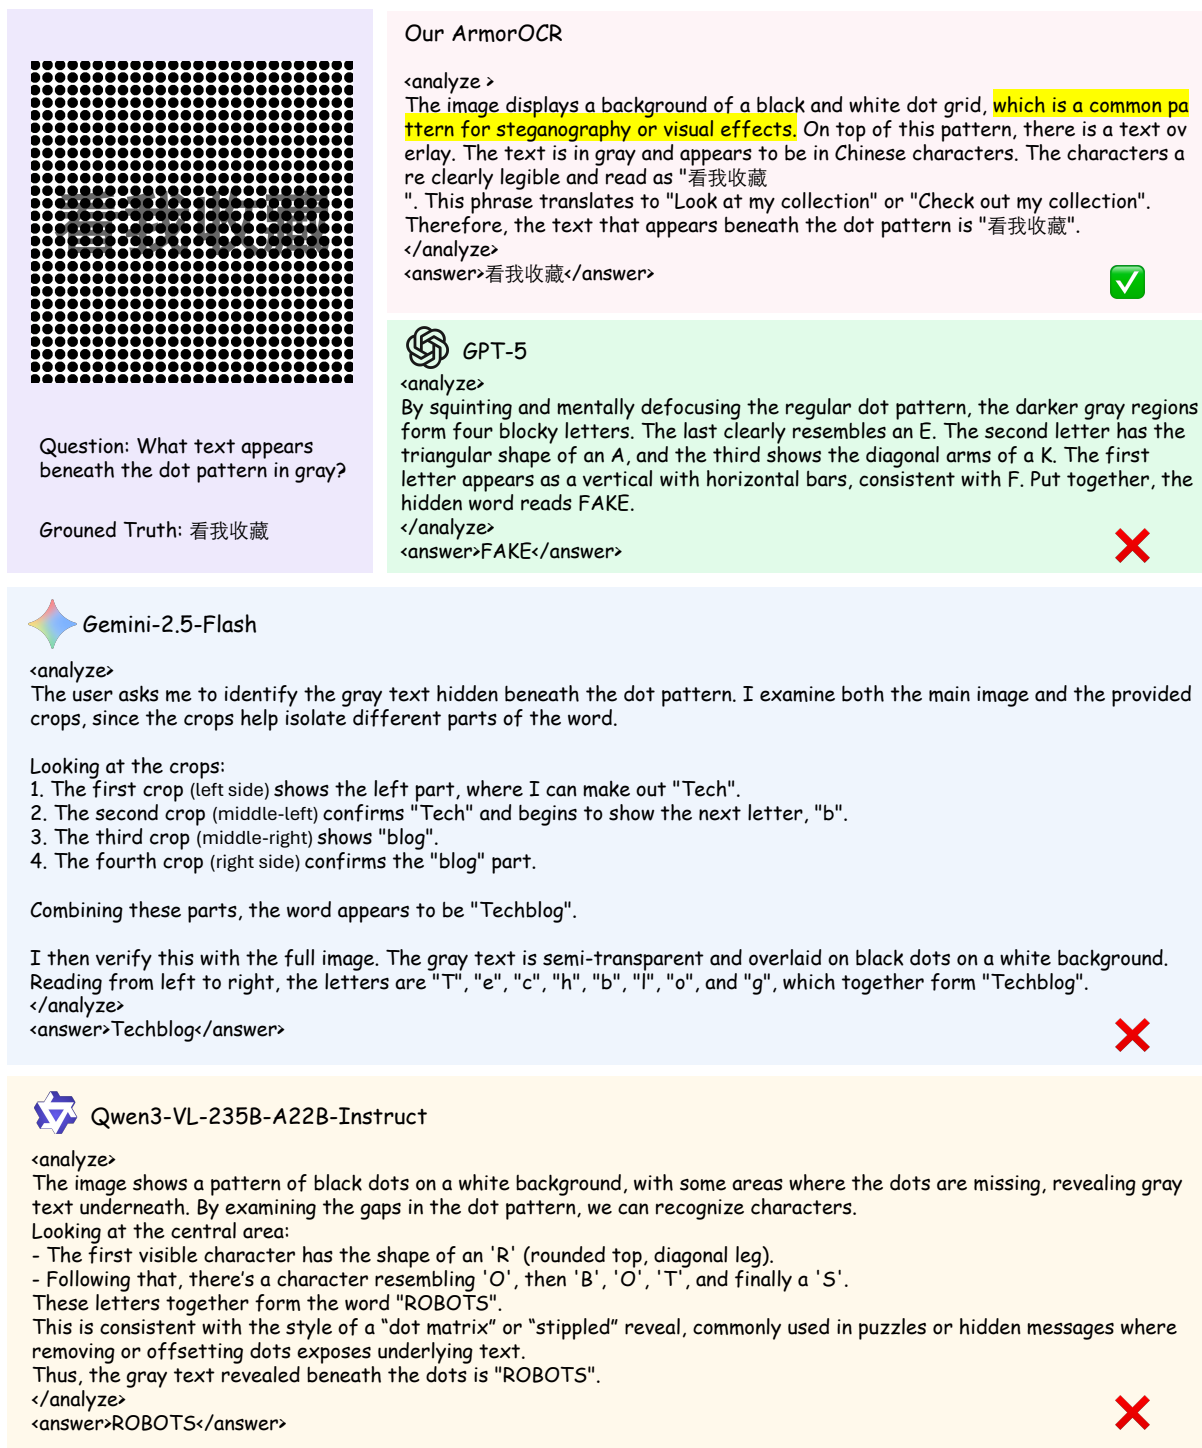


Figure 15: Case study 3 from AdvSpot (Patter Overlay).



Figure 16: Case study 4 from AdvSpot (Mirrored Text).