

Empirical Evidence for Simply Connected Decision Regions in Image Classifiers

Arjhun Swaminathan^{1,2*}
arjhun.swaminathan@uni-tuebingen.de

Mete Akgün^{1,2}
mete.akguen@uni-tuebingen.de

Abstract

Understanding the topology of decision regions is central to explaining the inner workings of deep neural networks. Prior empirical work has provided evidence that these regions are path connected. We study a stronger topological question: whether closed loops inside a decision region can be contracted without leaving that region. To this end, we propose an iterative quad-mesh filling procedure that constructs a finite-resolution label-preserving surface bounded by a given loop and lying entirely within the same decision region. We further connect this construction to natural Coons patches in order to quantify its deviation from a canonical geometric interpolation of the loop. By evaluating our method across several modern image-classification models, we provide empirical evidence supporting the hypothesis that decision regions in deep neural networks are not only path connected, but also simply connected.

1 Introduction

Deep neural networks have achieved remarkable performance in image classification, with modern architectures ranging from convolutional networks to vision transformers [He et al., 2016, Tan and Le, 2019, Huang et al., 2017, Liu et al., 2022, Dosovitskiy et al., 2020, Liu et al., 2021, Krizhevsky et al., 2012, Simonyan and Zisserman, 2014, Szegedy et al., 2015]. Despite their success, the geometry of the decision regions learned by these models remains incompletely understood [Ramamurthy et al., 2019, Fawzi et al., 2018]. A classifier partitions the input space into regions corresponding to predicted labels, and the topology of these regions determines whether two images of the same predicted class can be joined without leaving that class, whether loops inside a decision region enclose holes, and together with the geometry of the decision boundary, how boundaries are arranged around natural images. Understanding these geometric and topological properties is important not only for interpretability, but also for adversarial robustness, since adversarial examples reveal that decision boundaries can lie extremely close to natural images even when the classifier performs well on standard benchmarks [Fawzi et al., 2018, Goodfellow et al., 2014, Szegedy et al., 2013, Moosavi-Dezfooli et al., 2016, 2017].

A central observation motivating this work is that local adversarial vulnerability does not necessarily imply global topological fragmentation. Although small perturbations can move an image across a decision boundary, the corresponding decision region may still be large and path connected. Prior empirical work showed that, for several deep image classifiers, pairs of images assigned to the same class could often be connected by continuous, nearly straight paths that remain inside the same decision region [Fawzi et al., 2018].

This path-connectivity perspective opens an important direction for studying neural networks in input space. However, it only probes the zeroth-order topology of decision regions: whether points lie in

¹Medical Data Privacy and Privacy-preserving Machine Learning (MDPPML), University of Tübingen.

²Institute for Bioinformatics and Medical Informatics (IBMI), University of Tübingen.

the same connected component. A successful path between two images shows that the two images are connected, but it does not rule out non-contractible loops in the class region. In particular, a connected region need not be simply connected [Munkres et al., 2025, Hatcher, 2005]. Thus, the next natural question is whether closed loops lying inside a predicted decision region can be continuously filled without leaving that region. Moving from paths to surfaces changes the empirical problem from one-dimensional connectivity to two-dimensional fillability.

Surface construction has a long history in geometric modelling [Barnhill, 1977]. In classical computer-aided design, Coons patches [Coons, 1967] provide a principled way to construct a surface from four boundary curves by blending the boundaries and correcting for the bilinear interpolation of the vertices. Given four same-label paths forming a closed loop, a Coons patch construction provides a canonical candidate surface spanning the loop. The key question is then whether the interior of such a surface can also remain inside the same decision region.

In this paper, we empirically study whether loops inside predicted decision regions can be filled by label-preserving surfaces. To do so, we propose a surface-filling procedure for loops whose vertices are four same-label images and whose edges are label-preserving paths. Our method iteratively builds a parametrised surface and empirically enforces that a sufficiently dense set of sampled surface points receives the same predicted label. We compare the resulting surfaces to their natural Coons-patch counterparts, allowing us to study not only existence, but also how geometrically simple or distorted the constructed surface is. We evaluate this procedure on the ImageNet validation dataset [Deng et al., 2009, Russakovsky et al., 2015] across six representative architectures: ResNet-50, DenseNet-121, EfficientNet-B0, ConvNeXt-Tiny, ViT-B/16, and Swin-T. For each model, we test 1000 loops, one for each output label in the ImageNet label set. Across this empirical setting, we construct sampled label-preserving surfaces for all tested loops, providing strong finite-resolution evidence supporting the hypothesis that same-label loops in these decision regions are contractible at the tested resolution.

2 Related Work

2.1 A topological perspective

The decision regions induced by neural networks have been studied from both theoretical [Nguyen et al., 2018, Beise et al., 2021, Bianchini and Scarselli, 2014] and empirical perspectives [Fawzi et al., 2018, Ramamurthy et al., 2019]. Early theoretical work showed that architecture places nontrivial constraints on decision regions [Nguyen et al., 2018]. Under suitable activation assumptions, certain pyramidal network architectures necessarily produce connected decision regions, while sufficiently wide hidden layers are required to guarantee the ability to represent disconnected decision regions. Related results on narrow neural networks further showed that, when the width is at most the input dimension, all connected components of decision regions are unbounded under broad activation assumptions [Beise et al., 2021]. Together, these results indicate that topology is not merely an accidental property of trained networks, but is closely tied to architectural expressivity.

Topological data analysis has also been used to study decision boundaries and neural-network representations [Ramamurthy et al., 2019, Watanabe and Yamana, 2022]. Persistent homology [Ghrist, 2008, Carlsson, 2009, Swaminathan and Akgün, 2025b] provides a way to summarise connected components, holes, and higher-dimensional topological features from sampled data [Edelsbrunner and Harer, 2010]. Prior work has proposed persistent-topology methods for studying decision boundaries from labelled samples, as well as labelled Čech and Vietoris–Rips constructions for inferring the homology of decision boundaries [Ramamurthy et al., 2019]. Other studies have used persistent homology to measure the structure and complexity of internal representations learned by deep networks [Watanabe and Yamana, 2022]. These approaches provide useful summaries of topological structure through sample-derived geometric complexes. Our work is complementary: rather than inferring homological features from a complex, we construct an explicit image-space surface.

2.2 A geometric perspective

The geometry of neural-network decision boundaries has been studied extensively in connection with adversarial examples [Reza et al., 2023, Rahmati et al., 2020, Maho et al., 2021, Chen et al., 2020, Brendel et al., 2017]. The discovery that small perturbations can change the prediction of high-performing classifiers revealed that decision boundaries can lie close to natural images [Szegedy

et al., 2013, Goodfellow et al., 2014, Fawzi et al., 2018]. This view was formalised by methods such as DeepFool, which iteratively linearise the classifier near an input and estimate a small perturbation needed to cross the decision boundary [Moosavi-Dezfooli et al., 2016]. Rather than seeing adversarial examples as failures of robustness, such methods use the boundary itself as a geometric object that can be approximated, searched, or traversed [Moosavi-Dezfooli et al., 2016, Brendel et al., 2017, Chen et al., 2020, Reza et al., 2023]. More generally, studies of adversarial robustness have shown that local boundary geometry influences both the directions in which classifiers are most sensitive and the efficiency with which adversarial perturbations can be found [Fawzi et al., 2018, Moosavi-Dezfooli et al., 2016, Rahmati et al., 2020, Maho et al., 2021, Reza et al., 2023, Swaminathan and Akgün, 2025a]. These works motivate studying decision regions not only as abstract topological objects, but also as geometric subsets of the high-dimensional image space.

The work most closely related to ours explicitly studied both the topology of decision regions and the geometry of decision boundaries in deep image classifiers [Fawzi et al., 2018]. Its central empirical finding was that state-of-the-art deep networks appear to learn path connected decision regions: for pairs of images assigned the same label, polygonal paths could be constructed and empirically verified to remain within the same decision region. The proposed procedure repairs path segments that leave the target region by projecting intermediate points back into the desired decision region, thereby producing a label-preserving piecewise-linear path between same-label images.

Our work extends this line of work from paths to surfaces: rather than asking only whether two same-label images can be connected, we ask whether tested same-label loops admit label-preserving surfaces. This provides a finite-resolution probe of loop contractibility, the key additional condition underlying simple connectedness.

3 Method

3.1 Problem setup

We work in the normalised image space $\mathcal{X} \subset \mathbb{R}^{3 \times H \times W}$, where H and W denote the image height and width in pixels. Let

$$f : \mathcal{X} \rightarrow \{1, \dots, K\} \quad (1)$$

be a hard-label classifier, and let

$$\mathcal{R}_y = \{x \in \mathcal{X} : f(x) = y\} \quad (2)$$

denote the decision region corresponding to label y . Our goal is to construct an explicit two-dimensional surface spanning a closed loop contained in $\mathcal{R}_y$.

We begin with four images $x_{00}, x_{10}, x_{01}, x_{11} \in \mathcal{R}_y$, which define the corners of a loop ordered as

$$x_{00} \rightarrow x_{10} \rightarrow x_{11} \rightarrow x_{01} \rightarrow x_{00}. \quad (3)$$

The straight-line segment between two same-label images need not remain in $\mathcal{R}_y$. We therefore construct a finite-resolution piecewise-linear boundary loop by initialising boundary vertices along the anchor-to-anchor sides and repairing off-label vertices into $\mathcal{R}_y$ using DeepFool [Moosavi-Dezfooli et al., 2016]. The resulting boundary is represented by four polygonal curves

$$\gamma_0, \gamma_1, \gamma_2, \gamma_3 : [0, 1] \rightarrow \mathcal{R}_y, \quad (4)$$

$$\gamma_0(0) = x_{00}, \quad \gamma_0(1) = x_{10}, \quad \gamma_1(0) = x_{10}, \quad \gamma_1(1) = x_{11}, \quad (5)$$

$$\gamma_2(0) = x_{01}, \quad \gamma_2(1) = x_{11}, \quad \gamma_3(0) = x_{00}, \quad \gamma_3(1) = x_{01}. \quad (6)$$

We then seek a surface $S : [0, 1]^2 \rightarrow \mathcal{X}$ whose boundary agrees with these four paths:

$$S(u, 0) = \gamma_0(u), \quad S(u, 1) = \gamma_2(u), \quad S(0, v) = \gamma_3(v), \quad S(1, v) = \gamma_1(v), \quad (7)$$

and whose interior remains in the same decision region:

$$f(S(u, v)) = y \quad \forall u, v \in [0, 1]. \quad (8)$$

In practice, this condition is verified at finite resolution. The output of our method is therefore a finite-resolution, label-preserving, piecewise-bilinear disk whose boundary is the loop formed by $\gamma_0, \gamma_1, \gamma_2$ and γ_3 .

Because images are normalised prior to classification, we measure geometric quantities in normalised image space but express the stopping resolution in grey-level root-mean-square (RMS) units. Let

$$\sigma = (\sigma_R, \sigma_G, \sigma_B) \quad (9)$$

denote the channel-wise standard deviations used in ImageNet normalisation. A one-grey-RMS perturbation in pixel space corresponds to the following normalised ℓ_2 scale:

$$\ell_{\text{grey}} = \sqrt{HW \sum_{c=1}^3 \left(\frac{1}{255\sigma_c} \right)^2}. \quad (10)$$

For two normalised images $x, x' \in \mathcal{X}$, we define the grey-RMS distance as

$$d_{\text{grey}}(x, x') = \frac{\|x - x'\|_2}{\ell_{\text{grey}}}. \quad (11)$$

Thus, $d_{\text{grey}}(x, x') = 1$ corresponds to an average perturbation of approximately one grey level per pixel after accounting for the ImageNet normalisation.

In our work, we use the term *quad* to refer to a quadrilateral. For a quad Q , let $V(Q)$ denote its four image-space vertices. Its normalised image-space diameter is

$$\text{diam}(Q) = \max_{p, q \in V(Q)} \|p - q\|_2, \quad (12)$$

and its grey-RMS diameter is

$$\text{diam}_{\text{grey}}(Q) = \frac{\text{diam}(Q)}{\ell_{\text{grey}}}. \quad (13)$$

3.2 Coons patches

Given the four boundary curves, the classical Coons patch provides a natural geometric reference surface [Coons, 1967]. It is obtained by blending the boundary curves and subtracting the bilinear interpolation of the corners:

$$C(u, v) = (1 - v)\gamma_0(u) + v\gamma_2(u) + (1 - u)\gamma_3(v) + u\gamma_1(v) - B(u, v), \quad (14)$$

where

$$B(u, v) = (1 - u)(1 - v)x_{00} + u(1 - v)x_{10} + (1 - u)v x_{01} + uvx_{11}. \quad (15)$$

The Coons patch is hence a canonical surface determined by the boundary loop. However, it is not guaranteed to remain inside $\mathcal{R}_y$. Our method therefore constructs a classifier-constrained surface by adaptively refining a quadrilateral mesh. Figure 1 illustrates the relationship between the Coons reference patch and the label-preserving surface produced by our method.

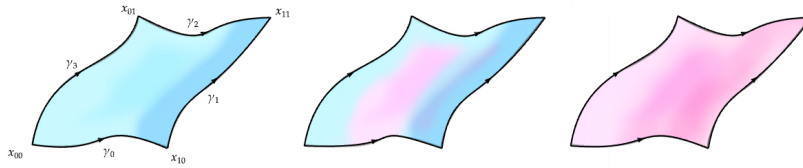


Figure 1: Two-dimensional visualisation of the surface-filling construction. Left: Coons patch induced by the boundary loop. Middle: overlay of the Coons patch and our label-preserving surface. Right: label-preserving surface produced by our procedure.

3.3 Filling procedure

We start with a quad with vertices x_0, x_1, x_2 and x_3 that we will divide into smaller quads (four child quads), referring to each level as the subdivision level. We represent our surface on a dyadic grid. For a maximum subdivision level D , define

$$\Lambda_D = \{(i/2^D, j/2^D) : 0 \leq i, j \leq 2^D\}. \quad (16)$$

Each grid coordinate (i, j) is associated with an image-space vertex $z_{ij} \in \mathcal{X}$. The method maintains a shared vertex map

$$(i, j) \mapsto z_{ij}, \quad (17)$$

so that adjacent quads use the same image-space vertex along their common edge. This shared-vertex representation ensures that the final piecewise-bilinear surface is continuous across quad boundaries.

For a quad with vertices $z_{00}, z_{10}, z_{01}, z_{11}$, the local patch is given by bilinear interpolation:

$$Q(u, v) = (1 - u)(1 - v)z_{00} + u(1 - v)z_{10} + (1 - u)vz_{01} + uvz_{11}, \quad (u, v) \in [0, 1]^2. \quad (18)$$

Each active quad is first tested against the finite-resolution stopping rule. Given a tolerance τ , a quad is accepted by resolution if its vertices are already verified to lie in $\mathcal{R}_y$ and

$$\text{diam}_{\text{grey}}(Q) \leq \tau. \quad (19)$$

This means that the quad is smaller than the prescribed grey-RMS scale according to its vertex diameter, so it is not refined further at the chosen resolution.

Quads not accepted by resolution are then checked by sampling their bilinear patch on a regular grid

$$G_m = \{(a/m, b/m) : 0 \leq a, b \leq m\}. \quad (20)$$

Thus, each such quad is checked at $(m + 1)^2$ points. A quad passes the label check if

$$f(Q(a/m, b/m)) = y \quad \forall a, b \in \{0, \dots, m\}. \quad (21)$$

If this condition holds, the quad is accepted into the final surface. Otherwise, it is subdivided. For quads that require grid checking, the grid resolution m is chosen adaptively from the geometric size of the quad. The goal is to make neighbouring sampled points sufficiently close relative to the tolerance τ . For each quad Q , we first compute

$$m_{\text{raw}}(Q) = \max \left\{ m_{\min}, \left\lceil \frac{\text{diam}_{\text{grey}}(Q)}{\tau} \right\rceil \right\}. \quad (22)$$

We then choose $m(Q)$ as the smallest power of two satisfying $m(Q) \geq m_{\text{raw}}(Q)$.

The power-of-two choice aligns the verification grid with the dyadic subdivision structure we describe below. We will see that when a failing quad is later split into four smaller child quads, the newly created edge and centre vertices lie on the same dyadic grid.

When a quad fails the label check and is not yet below the resolution threshold, it is subdivided into four quads by adding four edge midpoints and one centre point, as illustrated in Figure 2. For an interior edge with endpoints z_a and z_b , the midpoint is initialised as $z_{ab} = (z_a + z_b)/2$, while the centre point is initialised as $z_c = (z_{00} + z_{10} + z_{01} + z_{11})/4$.

Edge vertices on the original loop are constrained to remain on the prescribed paths $\gamma_0, \gamma_1, \gamma_2$ and γ_3 using the parameter space, while interior vertices are initialised by these linear averages. This ensures that we fill the original loop.

Each newly created vertex is evaluated by the classifier. If it is already classified as y , it is added to the verified vertex set. If not, it is repaired by a targeted DeepFool-style update [Moosavi-Dezfooli et al., 2016] followed by a bisection step. The repair step seeks a nearby replacement $\tilde{z}$ satisfying

$$f(\tilde{z}) = y \quad (23)$$

while keeping $\|\tilde{z} - z\|_2$ small. Operationally, this acts as a local projection of off-label mesh vertices back into the target decision region.

The method proceeds level by level. At each level, all active quads are first checked against the grey-RMS resolution threshold. Quads that are already smaller than τ are accepted. The remaining quads are sampled on their adaptive verification grids. Passing quads are accepted, while failing quads are subdivided and their newly created vertices are verified or repaired. The full procedure is illustrated in Figure 2.

The algorithm terminates when every quad formed has either passed the grid check or has become smaller than the grey-RMS resolution threshold. The accepted quads define a continuous piecewise-bilinear surface of the original loop. At the chosen finite resolution, the sampled interior of this surface remains in the target decision region.

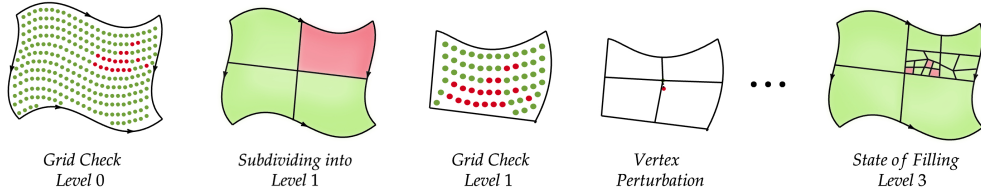


Figure 2: Illustration of the surface-filling procedure. From left to right: at level 0, the initial surface is sampled on a regular grid chosen so that nearby samples are below the grey-RMS tolerance τ ; red points indicate samples outside the target decision region. The failing surface is subdivided into four quads, three of which pass the grid check. The remaining quad is checked at level 1, fails again, and is further subdivided. When a newly introduced vertex is off-label, it is repaired by a local projection back into the target region. The final panel illustrates the resulting mesh at Level 3.

3.4 Geometric comparison to Coons patches

In addition to testing whether a label-preserving surface can be constructed, we measure how much the constructed surface deviates from the Coons patch induced by the same loop. We use surface area in normalised image space as our geometric comparison. The area of the constructed surface is computed by splitting each accepted quad in the final mesh into triangles and summing their Euclidean areas, yielding A_{ours} . We compute the Coons patch area A_{Coons} using the same triangle-based approximation on a regular discretisation of the Coons patch. We then report the area ratio

$$\rho = \frac{A_{\text{ours}}}{A_{\text{Coons}}}. \quad (24)$$

Values $\rho \approx 1$ indicate that the label-preserving surface has nearly the same area as the boundary-induced Coons patch, suggesting that the constructed surface is geometrically close to a natural interpolation of the loop.

4 Experiments

4.1 Experimental setup

We evaluate our surface-filling procedure on ImageNet validation images across six classifiers: ResNet-50, DenseNet-121, EfficientNet-B0, ConvNeXt-Tiny, ViT-B/16, and Swin-T. These models cover residual convolutional networks, densely connected convolutional networks, compound-scaled ConvNets, transformer-era ConvNets, vision transformers, and hierarchical vision transformers.

For each model, we construct a model-specific collection of 1000 loops each classified with a different label. Each loop is formed from four images that are assigned the same predicted label by the corresponding model. Since different models may assign different labels to the same image, the quad set is generated separately for each model. Thus, for each model we evaluate 1000 four-point loops, corresponding to 4000 endpoint images, and across all six models we evaluate 6000 model-specific loops consisting of 24000 images.

All experiments were run on a high-performance computing cluster. Each loop was processed as an independent SLURM array task with one GPU allocation, four CPU cores, and 60 GB memory.

We use the same surface-filling parameters across all models unless otherwise stated. The grey-RMS stopping threshold is set to $\tau = 0.5$. Newly introduced off-label vertices are repaired using the targeted DeepFool-style procedure described in Section 3, with a maximum of 50 DeepFool iterations, overshoot value of 0.02 and 10 bisection steps (default repair setting). To avoid out-of-memory failures, batch sizes are chosen according to model memory usage. Convolutional models use larger batches, while transformer-based models use smaller batches.

4.2 Results

Cross-model success. Table 1 reports the success of our filling procedure across the different architectures. We first run all loops with the default repair setting described in Subsection 4.1, which already succeeds on most loops. Since the default setting is chosen for computational efficiency, we rerun only the failures with a stronger repair setting which consists of 200 maximum iterations, overshoot value of 0.05 and 20 bisection steps. Under this stronger setting, all previously failed loops were successfully filled. Thus, across all tested models and loops, the final procedure succeeds in constructing a finite-resolution label-preserving surface. Table 6 reports an ablation over stricter grey-RMS thresholds, showing that the success persists as the finite-resolution criterion is tightened.

Table 1: Cross-model success counts. Loops that failed under the default setting were rerun with the stronger repair setting. All 6000 tested loops were successfully filled after the stronger repair pass.

Model	Loops Tested	Default repair		Strong repair	
		Success	Failure	Success	Failure
ResNet-50	1000	999	1	1000	0
DenseNet-121	1000	975	25	1000	0
EfficientNet-B0	1000	990	10	1000	0
ConvNeXt-Tiny	1000	992	8	1000	0
ViT-B/16	1000	993	7	1000	0
Swin-T	1000	990	10	1000	0

Root-level diagnostic. Before applying subdivision or vertex repair, we first test the most direct possible surface: the quadrilateral determined by the four image vertices. This diagnostic asks whether the entire initial root quad already lies inside the target decision region under our finite grid check. Table 2 reports the corresponding root-level acceptance rates. The root quad is accepted for only a minority of loops for most models, ranging from 6.9% for DenseNet-121 to 42.2% for Swin-T. Thus, most same-label loops are not filled by naive interpolation alone and require the adaptive construction. The higher root-acceptance rates for ConvNeXt-Tiny, ViT-B/16, and Swin-T suggest that these models more often contain broad same-label regions along the sampled quadrilateral, while the lower rates for ResNet-50, DenseNet-121, and EfficientNet-B0 indicate more frequent crossings of decision boundaries under the direct interpolation.

Table 2: Root-level diagnostic. A loop is root-accepted if the initial bilinear quadrilateral determined by the four image vertices passes the finite grid check without subdivision or vertex repair.

Model	Loops tested	Root accepted	Root accepted (%)
ResNet-50	1000	159	15.9
DenseNet-121	1000	69	6.9
EfficientNet-B0	1000	85	8.5
ConvNeXt-Tiny	1000	389	38.9
ViT-B/16	1000	284	28.4
Swin-T	1000	422	42.2

Note that in our experiments, natural images serve as convenient well-labelled anchors; for a fixed same-label loop, any four boundary points could be used as anchors because the constructed surface fills the loop itself, and Table 2 shows that this is not merely due to trivial interpolation.

Coverage by refinement level. To understand how the procedure fills the surface, we track the cumulative accepted area in the parameter domain at each refinement level. At level d , each unresolved quad has parameter-domain side length 2^{-d} and area 4^{-d} . Thus, accepting one quad at level d certifies or resolves a fraction 4^{-d} of the area enclosed by the original four image vertices. Figure 3 reports this behaviour in two complementary ways. The left plot shows cumulative accepted parameter-domain area as a function of refinement level for nontrivial loops, excluding loops accepted at the root level. The right plot summarises all successful loops using threshold depths D_{50} , D_{75} , D_{90} , D_{95} , and D_{99} , where D_p is the first refinement level at which a loop reaches at least $p\%$ cumulative coverage.

Together, these plots show how quickly the algorithm fills the parameter space and whether difficult regions are localised to deeper levels.


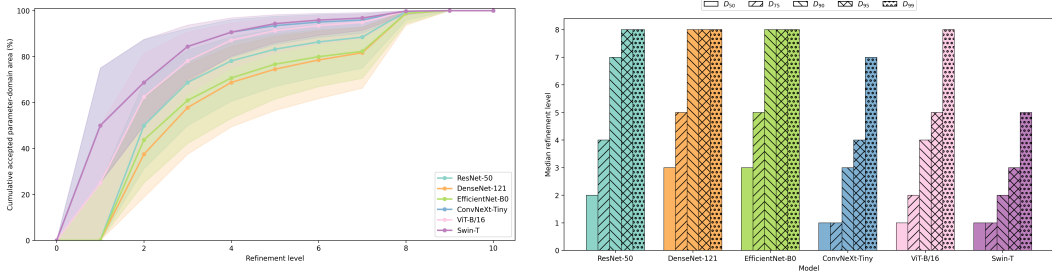


Figure 3: Coverage by refinement level. Left: cumulative accepted parameter-domain area for nontrivial loops, excluding loops accepted at the root level; curves show medians and shaded regions show interquartile ranges. Right: median refinement level needed to reach fixed cumulative coverage thresholds over all successful loops.

Acceptance mechanism. We decompose the final accepted area by the mechanism that accepted each quad. A quad can be accepted directly by the grid check or accepted by the geometric size threshold once it is sufficiently small and its vertices are verified. This decomposition distinguishes surfaces that are mostly certified by direct sampling from surfaces that rely more heavily on the finite-resolution stopping rule. Figure 4a reports, for each model, the fraction of final accepted parameter-domain area accepted by grid checks and by the size threshold. This breakdown characterises how locally flat the same-label region appears along the constructed surface. A larger grid-check fraction means that larger bilinear surface patches can be explicitly verified as label-preserving, while a larger size-threshold fraction means that the construction more often had to refine to small quads, typically relying on subdivision and repaired vertices before acceptance.

Geometric deviation from the Coons reference. We compare each constructed surface to the boundary-matched Coons reference surface using the area ratio $\rho = A_{\text{OUTS}}/A_{\text{COONS}}$. Here A_{OUTS} is the sum of triangle areas over the final accepted quad mesh, and A_{COONS} is the area of the Coons reference patch constructed from the same boundary. Figure 4b shows the distribution of this ratio across models using violin plots. Ratios close to 1 indicate that the label-preserving surface has nearly the same area as the natural geometric interpolation of the boundary. Across models, the distributions remain concentrated near 1, indicating that the constructed label-preserving surfaces typically stay geometrically close to the corresponding Coons reference surfaces.

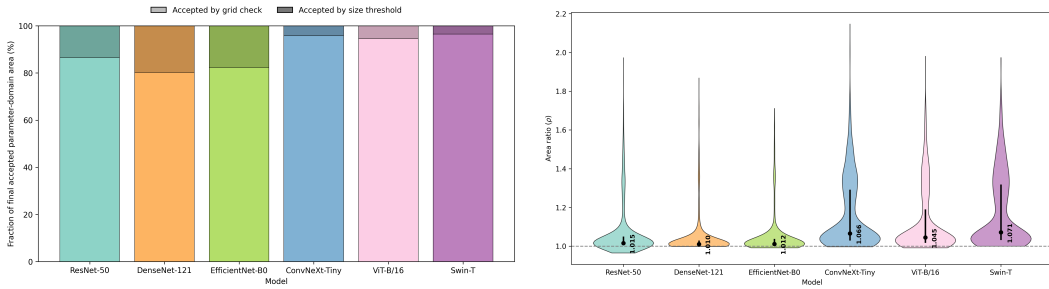

(a) Acceptance mechanism by final accepted area. Grid-check acceptance indicates explicit sampled label verification; size-threshold acceptance indicates verified small quads below the grey-RMS resolution threshold.

(b) Distribution of the constructed-to-Coons area ratio across models. The black dot marks the median and the vertical black line shows the interquartile range. The dashed line at $\rho = 1$ marks equal area, with values near 1 indicating that label-preserving surfaces remain geometrically close to the Coons patch induced by the boundary loop.

Figure 4: Acceptance and geometric diagnostics for the constructed surfaces.

Final mesh complexity. Table 3 summarises the complexity of the final constructed meshes. We report the average number of quads and vertices in the final shared-vertex surface. These quantities measure how much geometric refinement was required to produce the surface. Smaller meshes indicate that the loop can be filled with relatively little refinement. Consistent with the coverage-depth results in Figure 3, Swin-T and ConvNeXt-Tiny require the smallest final meshes on average, whereas DenseNet-121 and EfficientNet-B0 require the largest.

Table 3: Final mesh complexity. Final quads are the accepted quads forming the piecewise-bilinear surface, and final vertices are the label-verified vertices present on the surface.

Model	Avg. final quads	Avg. final vertices
ResNet-50	15631.8	16594.8
DenseNet-121	22927.3	24259.6
EfficientNet-B0	20833.7	21699.9
ConvNeXt-Tiny	5170.8	5505.8
ViT-B/16	6734.1	7267.9
Swin-T	4423.9	4820.7

5 Conclusion

We presented an empirical study of decision-region topology beyond path connectivity by asking whether closed same-label loops in image-classifier decision regions can be filled by label-preserving surfaces. Across six diverse architectures and 6000 ImageNet loops, our procedure constructed finite-resolution surfaces for every tested loop, yielding a 100% success rate providing strong empirical evidence for a surface-level analogue of previously observed path connectivity. This result is striking because the surfaces are not explained by simple convex interpolation: naive bilinear surfaces often cross decision boundaries, yet adaptive refinement and repair consistently recover label-preserving surfaces within the target region. The accompanying diagnostics show that these surfaces are typically obtained with moderate mesh complexity and remain geometrically close to the corresponding Coons patches. While this does not prove that full decision regions are simply connected, the uniform success across models, labels, and architectures suggests that modern classifiers may organise decision regions into globally coherent structures whose loops are contractible. More broadly, these findings point to a new empirical picture of neural-network decision regions – simple connectedness.

Limitations and future work. Our results should be interpreted as finite-resolution empirical evidence rather than as a formal topological proof. The proposed procedure verifies sampled label preservation at the chosen grey-RMS resolution and therefore cannot exclude smaller-scale holes or non-contractible loops outside the tested loop family. Future work could strengthen this direction by developing certified guarantees between sampled points, using topological probes to improve adversarial understanding, and deepening the fundamental understanding of how classifiers form their decision regions.

Code availability

Our code is available at the following URL: <https://github.com/mdppml/contractible-class-regions>.

Acknowledgments

This research was supported by the German Federal Ministry of Education and Research (BMBF) under project number 01ZZ2010. The authors acknowledge the usage of the Training Center for Machine Learning (TCML) cluster at the University of Tübingen.

References

- Robert E Barnhill. Representation and approximation of surfaces. In *Mathematical software*, pages 69–120. Elsevier, 1977.
- Hans-Peter Beise, Steve Dias Da Cruz, and Udo Schröder. On decision regions of narrow deep neural networks. *Neural Networks*, 140:121–129, 2021.
- Monica Bianchini and Franco Scarselli. On the complexity of neural network classifiers: A comparison between shallow and deep architectures. *IEEE transactions on neural networks and learning systems*, 25(8):1553–1565, 2014.
- Wieland Brendel, Jonas Rauber, and Matthias Bethge. Decision-based adversarial attacks: Reliable attacks against black-box machine learning models. *arXiv preprint arXiv:1712.04248*, 2017.
- Gunnar Carlsson. Topology and data. *Bulletin of the American Mathematical Society*, 46(2):255–308, 2009.
- Jianbo Chen, Michael I Jordan, and Martin J Wainwright. Hopskipjumpattack: A query-efficient decision-based attack. In *2020 IEEE symposium on security and privacy (sp)*, pages 1277–1294. IEEE, 2020.
- Steven A Coons. Surfaces for computer-aided design of space forms. 1967.
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *2009 IEEE conference on computer vision and pattern recognition*, pages 248–255. Ieee, 2009.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, et al. An image is worth 16x16 words: Transformers for image recognition at scale. *arXiv preprint arXiv:2010.11929*, 2020.
- Herbert Edelsbrunner and John Harer. *Computational topology: an introduction*. American Mathematical Soc., 2010.
- Alhussein Fawzi, Seyed-Mohsen Moosavi-Dezfooli, Pascal Frossard, and Stefano Soatto. Empirical study of the topology and geometry of deep networks. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pages 3762–3770, 2018.
- Robert Ghrist. Barcodes: the persistent topology of data. *Bulletin of the American Mathematical Society*, 45(1):61–75, 2008.
- Ian J Goodfellow, Jonathon Shlens, and Christian Szegedy. Explaining and harnessing adversarial examples. *arXiv preprint arXiv:1412.6572*, 2014.
- Allen Hatcher. *Algebraic topology*. 2005.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778, 2016.
- Gao Huang, Zhuang Liu, Laurens Van Der Maaten, and Kilian Q Weinberger. Densely connected convolutional networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4700–4708, 2017.
- Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. Imagenet classification with deep convolutional neural networks. *Advances in neural information processing systems*, 25, 2012.
- Ze Liu, Yutong Lin, Yue Cao, Han Hu, Yixuan Wei, Zheng Zhang, Stephen Lin, and Baining Guo. Swin transformer: Hierarchical vision transformer using shifted windows. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 10012–10022, 2021.
- Zhuang Liu, Hanzi Mao, Chao-Yuan Wu, Christoph Feichtenhofer, Trevor Darrell, and Saining Xie. A convnet for the 2020s. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 11976–11986, 2022.

- Thibault Maho, Teddy Furon, and Erwan Le Merrer. Surfree: a fast surrogate-free black-box attack. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10430–10439, 2021.
- Seyed-Mohsen Moosavi-Dezfooli, Alhussein Fawzi, and Pascal Frossard. Deepfool: a simple and accurate method to fool deep neural networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2574–2582, 2016.
- Seyed-Mohsen Moosavi-Dezfooli, Alhussein Fawzi, Omar Fawzi, and Pascal Frossard. Universal adversarial perturbations. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1765–1773, 2017.
- James R Munkres, Steven G Krantz, and Harold R Parks. *Elements of algebraic topology*. Chapman and Hall/CRC, 2025.
- Quynh Nguyen, Mahesh Chandra Mukkamala, and Matthias Hein. Neural networks should be wide enough to learn disconnected decision regions. In *International conference on machine learning*, pages 3740–3749. PMLR, 2018.
- Ali Rahmati, Seyed-Mohsen Moosavi-Dezfooli, Pascal Frossard, and Huaiyu Dai. Geoda: a geometric framework for black-box adversarial attacks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 8446–8455, 2020.
- Karthikeyan Natesan Ramamurthy, Kush Varshney, and Krishnan Mody. Topological data analysis of decision boundaries with application to model selection. In *International Conference on Machine Learning*, pages 5351–5360. PMLR, 2019.
- Md Farhamdur Reza, Ali Rahmati, Tianfu Wu, and Huaiyu Dai. Cgba: Curvature-aware geometric black-box attack. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 124–133, 2023.
- Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, et al. Imagenet large scale visual recognition challenge. *International journal of computer vision*, 115(3):211–252, 2015.
- Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image recognition. *arXiv preprint arXiv:1409.1556*, 2014.
- Arjhun Swaminathan and Mete Akgün. Accelerating targeted hard-label adversarial attacks in low-query black-box settings. *arXiv preprint arXiv:2505.16313*, 2025a.
- Arjhun Swaminathan and Mete Akgün. Dynamic k-anonymity for electronic health records: A topological framework. In *Computer Security. ESORICS 2024 International Workshops*, pages 137–152, Cham, 2025b. Springer Nature Switzerland. ISBN 978-3-031-82349-7.
- Christian Szegedy, Wojciech Zaremba, Ilya Sutskever, Joan Bruna, Dumitru Erhan, Ian Goodfellow, and Rob Fergus. Intriguing properties of neural networks. *arXiv preprint arXiv:1312.6199*, 2013.
- Christian Szegedy, Wei Liu, Yangqing Jia, Pierre Sermanet, Scott Reed, Dragomir Anguelov, Dumitru Erhan, Vincent Vanhoucke, and Andrew Rabinovich. Going deeper with convolutions. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1–9, 2015.
- Mingxing Tan and Quoc Le. Efficientnet: Rethinking model scaling for convolutional neural networks. In *International conference on machine learning*, pages 6105–6114. PMLR, 2019.
- Satoru Watanabe and Hayato Yamana. Topological measurement of deep neural networks using persistent homology. *Annals of Mathematics and Artificial Intelligence*, 90(1):75–92, 2022.

A Technical appendices and supplementary material

Computational cost. Although runtime is not the main object of study, we report a compact runtime summary in Table 4. Each loop is processed independently, and the total cost depends on the number of grid evaluations, the amount of subdivision, and the number of repaired vertices. We report the median total elapsed time per loop together with the main timing components: grid computation, subdivision, and DeepFool repair. This table makes the empirical scale of the study clear and shows that grid evaluation is the dominant cost, while subdivision and repair become more substantial for models requiring larger final meshes.

Table 4: Computational cost. All times are reported in minutes and are medians over 1000 successful loops per model.

Model	Total elapsed	Grid computation	Subdivision	DeepFool repair
ResNet-50	24.54	13.30	7.01	6.08
DenseNet-121	34.75	17.47	12.55	11.31
EfficientNet-B0	21.46	11.20	7.30	6.06
ConvNeXt-Tiny	13.50	9.49	1.15	0.90
ViT-B/16	31.15	22.94	3.66	3.38
Swin-T	14.30	11.00	0.29	0.25

Vertex repair difficulty. The adaptive construction introduces new edge and centre vertices whenever a quad fails the grid check. Some of these proposed vertices may initially lie outside the target decision region, in which case we repair them using a targeted DeepFool step followed by bisection. Table 5 summarises the number and difficulty of these repairs. Across all models, repairs are frequent but typically easy: the average repair takes about two DeepFool iterations, no repair failures occur, and no repair reaches the iteration limit. This suggests that newly introduced off-label vertices usually lie close to the target decision region.

Table 5: Vertex repair difficulty over 1000 successful loops per model. Default failures from Table 1 are included after rerunning with the stronger repair setting. Average iterations are computed over repair attempts.

Model	Avg. repairs	Avg. iters	Max iters
ResNet-50	11039.4	2.10	23
DenseNet-121	16009.4	2.10	20
EfficientNet-B0	17335.5	2.04	28
ConvNeXt-Tiny	3962.6	2.02	10
ViT-B/16	4674.4	2.06	25
Swin-T	3045.7	2.04	28

Grey-RMS threshold ablation. Finally, we evaluate the sensitivity of the method to the grey-RMS stopping threshold τ . Smaller values of τ require quads to become geometrically smaller before they can be accepted by resolution, and therefore impose a stricter criterion. We repeat the experiment on a subset of 100 randomly sampled ResNet-50 loops for multiple thresholds using the stronger repair setting described in Table 1. All tested loops succeed at every threshold. As expected, decreasing τ increases the final mesh complexity and maximum refinement level, while the median Coons-area ratio remains close to 1. This indicates that the observed behaviour persists even as the finite-resolution requirement becomes stricter.

Table 6: Grey-RMS threshold ablation on 100 ResNet-50 loops. All runs use the stronger repair setting described in Table 1.

Grey-RMS threshold	Success	Median Coons ratio	Avg. final quads	Avg. final vertices	Max depth level
1.0	100%	1.0343	2951.0	3175.8	7
0.5	100%	1.0333	10760.3	11438.9	8
0.25	100%	1.0437	19806.7	21177.8	9
0.125	100%	1.0482	25930.6	27934.2	10