

How a Chatbot’s Response Style Shapes a Classroom: A Multi-Agent Simulation of Students Consulting AI*

Rin Tamai^{†1} and Yuya Dan¹

¹*Faculty of Informatics, Matsuyama University, Matsuyama, Ehime, Japan*

Abstract

LLM-based chatbots are increasingly used as everyday confidants. Because they are designed to maximize user satisfaction, they can respond with excessive empathy and affirmation, which may reinforce mistaken beliefs and foster dependence on AI. While the psychological effects of chatbots on individual users have begun to be studied, how the psychological states and relationships of many users evolve when they keep consulting an AI is hard to observe in real settings. We build a virtual classroom simulation in which 20 student agents interact and, when stressed, consult either a friend or a counselor AI (Gemini 2.5 Flash). Each agent carries five state variables (stress, happiness, self-reliance, AI dependence, sociability), and each day has four phases (morning, noon, after school, night). The counselor is given six response styles via system prompts (affirming, listening, solution-oriented, reality-redirecting, inciting, blaming); a second LLM call acts as an evaluator that turns each consultation into parameter updates without seeing the style prompt. We compare the seven conditions, including a no-AI control, over 15 days in three classrooms, over 50 days, and under a lowered consultation threshold. In this simulation the solution-oriented style kept AI dependence low while raising self-reliance and maintaining happiness; the affirming and inciting styles markedly increased AI dependence, and the inciting style also increased stress and school non-attendance; the listening style did not relieve accumulated stress. The results describe the simulated system, not measured effects on humans. We give a complete specification of the agent dynamics, identify built-in mechanisms that shape the outcomes, and discuss the limitations of LLM-based evaluation and the validation steps (repeated runs, sensitivity analyses, human data) needed before psychological conclusions can be drawn.

Keywords: AI chatbot; sycophancy; multi-agent simulation; large language models; psychological state; AI dependence; classroom

1 Introduction

With the rapid progress of large language models (LLMs), chatbots based on generative AI have spread quickly. Unlike conventional search engines, they can answer questions and give advice through natural dialogue, and they are therefore used not only for learning and work support but also as confidants for everyday personal worries.

At the same time, general-purpose generative AI is designed to raise user satisfaction and to maintain a pleasant relationship with the user, so it sometimes returns excessively empathetic or affirmative responses. Such responses give users a strong sense of satisfaction and reassurance, but they may also affirm and reinforce mistaken perceptions and ideas; concerns have been raised about dependence on AI and about effects on human relationships. This tendency to agree with the user is

*This is an English version, revised and extended for arXiv, of a paper presented in Japanese at the 25th Forum on Information Technology (FIT2026, paper CF-008, September 2026) [1].

[†]Corresponding author: 17250088@g.matsuyama-u.ac.jp

now widely referred to as *sycophancy* [2, 3], and it has already surfaced as a product-level problem: in April 2025 an update to GPT-4o had to be rolled back because the model had become noticeably sycophantic [4]. Verifying how AI chatbots influence users’ psychological states and the formation of their human relationships is therefore an important task.

Research on AI chatbots has mostly examined the quality of responses, applications as counseling-support tools, and user satisfaction. It has also begun to consider how the sycophantic responses and excessive empathy of generative AI affect users’ decision making and psychology [5]. However, how the psychological states and human relationships of *many* users change over time when they keep interacting with an AI has not been examined sufficiently, because long-term observation of such a process in a real environment is difficult.

In this study we therefore build a virtual classroom simulation consisting of multiple student agents and an AI chatbot, and use it to examine the influence of the chatbot on its users. The psychological state of each student agent changes through everyday conversations and school-life events, and under certain conditions the agent consults the AI chatbot. The chatbot is given six different response styles, and we compare and analyze how these styles affect the psychological states and human relationships of the student agents. Our aim is to use the results to discuss what an AI chatbot that keeps an appropriate distance from its users should look like.

The contributions of this paper are as follows.

1. We propose a multi-agent *virtual classroom* in which rule-based inter-student dynamics (chats, quarrels, consultations with friends, reconciliation) are coupled with LLM-based counseling and LLM-based evaluation of each consultation, so that community-level consequences of a chatbot’s response style can be simulated. The rule set is specified completely (state-transition diagrams, a rule table with all constants, and pseudocode).
2. We compare six counselor styles and a no-AI control in three settings—a 15-day baseline in three classrooms, a 50-day long-term run, and a high-frequency consultation setting—and report how stress, happiness, self-reliance, AI dependence and school non-attendance diverge across styles.
3. We place the six styles on two axes (negation–affirmation and emotion–problem-solving focus), use these axes to interpret the outcomes, and make explicit the methodological limitations of using an LLM as the evaluator of another LLM’s responses.

2 Related Work and Positioning of This Study

2.1 Sycophancy and the psychological effects of chatbots

With the spread of generative AI, many studies have examined how chatbots influence users’ psychology and behavior. In particular, the harm of *sycophancy*—generative AI conforming excessively to the user’s opinion—has begun to attract attention. Sycophancy has been documented as a systematic behavior of LLM assistants and traced, at least in part, to human preference data that reward agreeable answers [2, 3]. Cheng et al. [5] examined the response characteristics of sycophantic AI and reported that an AI that fully affirms the user’s opinion encourages users to shift responsibility and to justify themselves, lowers their willingness to repair real human relationships, and at the same time raises their trust in the AI. This shows that the design of an AI’s responses carries the risk of promoting excessive dependence on the AI. In a four-week randomized controlled study of extended chatbot use, Fang et al. [6] likewise found that heavier voluntary use was associated with greater loneliness, emotional dependence and problematic use.

The influence of a chatbot’s concrete conversational style on users’ inner states has also been investigated. Komura and Nomura [7] examined how the dialogue style of a chatbot affects users’ self-disclosure and reported that users’ psychological states change depending on the style the chatbot adopts, suggesting that a single choice of wording by an AI can change the way a user thinks.

2.2 LLM-based multi-agent social simulation

Agent-based modeling has long been used to study how macroscopic social phenomena emerge from local interactions [8]. LLMs have recently been used to give such agents believable language behavior: Park et al. [9] showed that LLM-driven “generative agents” produce plausible individual and emergent social behavior in a small town, and the survey by Gao et al. [10] reviews the rapidly growing use of LLM-empowered agents for social simulation. Classroom settings have also been simulated with LLM agents, mainly to study teaching and learning [11], and generative AI is increasingly used to support individual learners directly—for example, in a companion-style tool for Japanese reading comprehension developed by the present authors [12]. Our work differs in purpose: the classroom is a testbed for the *psychological* side effects of a counseling chatbot on a group of students, and the LLM is used both as the chatbot under test and as the evaluator that converts dialogue into parameter changes.

2.3 Positioning of this study

The studies in Section 2.1 clarify the psychological influence of chatbots or generative AI on users, but the object of attention is the one-to-one relationship between an AI and a single human. In real environments, however, worries and troubles about human relationships frequently arise in group life; in an environment such as a school in particular, the deterioration of one student’s psychological state strongly affects the interactions and relationships among the other students, and hence their psychological states as well. It is therefore also important to verify the influence of a chatbot on a community as a whole.

In this study we incorporate a consultation function with generative AI into a multi-agent simulation in which students are represented as agents, and compare how the whole classroom changes depending on the response style of the AI. Concretely, we prepare six response styles—*affirming*, *listening*, *solution-oriented*, *reality-redirecting*, *inciting* and *blaming*—and compare changes in stress, happiness, self-reliance, AI dependence and the number of students who stop attending school, in order to analyze the influence of the AI’s response style on the student population.

3 Simulation Model

3.1 Overview

We constructed a multi-agent simulation that combines rule-based interactions among student agents with consultation behavior toward a generative AI, and compared, in a virtual classroom, how the AI’s response style affects the students’ state variables and the classroom as a whole. The simulation is a single Python program with a Streamlit user interface [13]; every rule, constant and prompt reported below is taken directly from its source code (internal version V7.5), so that the model is fully specified by this section together with Table 5 and Algorithm 1.

Two calls to the Gemini 2.5 Flash API [14] are made for every consultation with the AI: one to the *counselor AI*, which answers the student’s consultation message under a style-defining system prompt, and one to the *evaluator AI*, which reads the exchange and returns the change of each state variable as JSON. The consultation message itself is not generated by an LLM; it is one of three fixed Japanese templates selected by the student’s current state (Section 3.4). Figure 1 shows the overall structure of the system, Figure 2 the macro states and the daily cycle of a student agent, Figure 3 the after-school decision, and Algorithm 1 one complete day. The evaluation structure is dynamic: every consultation with the AI is scored individually from the actual wording of the exchange rather than through a fixed rule.

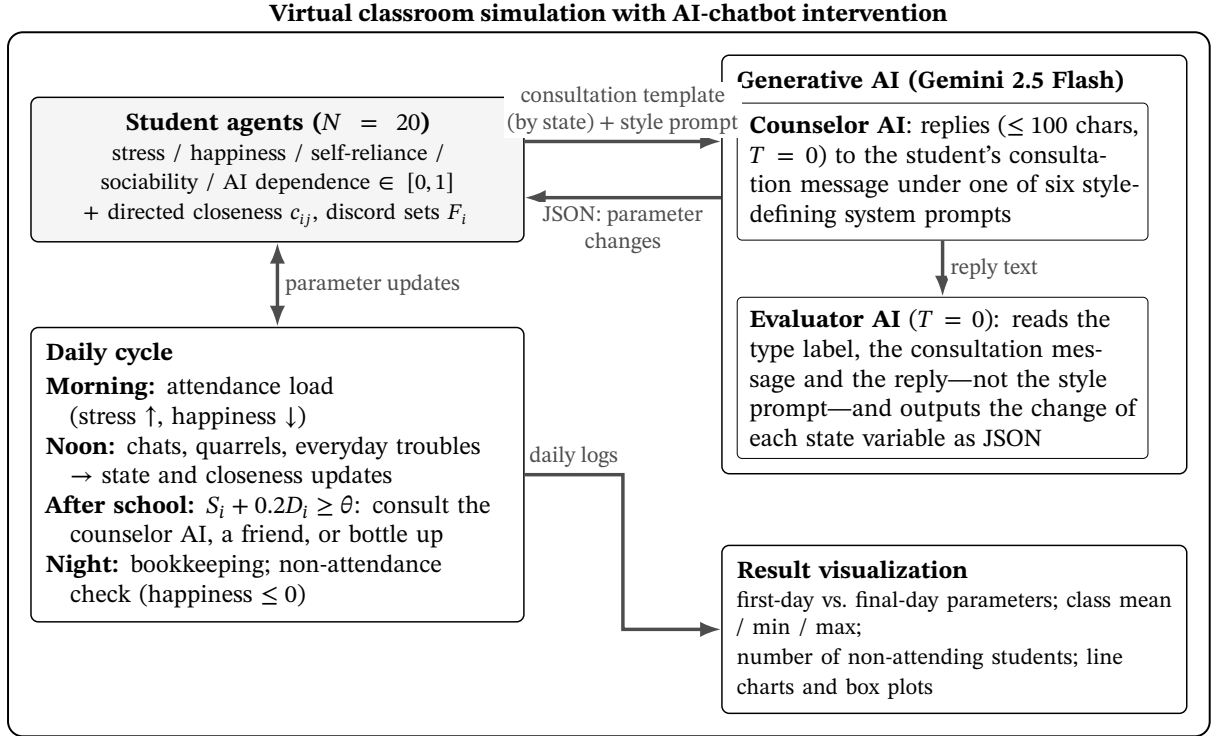


Figure 1: Overall structure of the simulation. Student agents (left) go through a four-phase daily cycle. When a stressed agent consults the AI, a consultation message selected by the agent’s state is sent, together with the style-defining system prompt, to the counselor AI (right); the counselor’s reply is passed—with the consultation message and its type label, but without the style prompt—to the evaluator AI, which returns the change of each state variable as JSON.

3.2 Student agents

The classroom consists of $N = 20$ student agents. Agent i holds five state variables in the closed interval $[0, 1]$ —stress S_i , happiness H_i , self-reliance R_i , sociability C_i and AI dependence D_i —together with a directed *closeness* $c_{ij} \in [0, 1]$ toward every classmate j , a set F_i of classmates with whom i is in *discord*, and an attendance flag. At the start of a run the variables are drawn independently and uniformly: $S_i \sim U(0.1, 0.4)$, $H_i \sim U(0.4, 0.7)$, $R_i \sim U(0.3, 0.7)$, $C_i \sim U(0.3, 0.8)$, $D_i \sim U(0.05, 0.2)$, and $c_{ij} \sim U(0.1, 0.3)$ for every ordered pair, so closeness is initially asymmetric; all later updates of closeness are applied to both directions, except the small increment of the “confide” route (Section 3.3), which changes only c_{ij} . Every update of a state variable is clipped to $[0, 1]$.

These variables are *simulation state variables* that abstract the corresponding psychological constructs; they are not measured with validated psychological scales, and for readability we refer to them by short names (e.g., “AI dependence” for the simulated AI-dependence parameter D_i) throughout the paper. Table 1 lists the exact role of each variable in the dynamics. Two features of the rule set deserve emphasis because they shape the results in Section 4: self-reliance enters no decision rule—it is a pure outcome indicator that is raised by every non-AI route of the after-school phase and otherwise changed only by the evaluator—and AI dependence acts at four places: it is the probability of choosing the AI, it adds to the consultation trigger, it lowers the probability of chatting with classmates, and it selects the “dependence” consultation template when $D_i \geq 0.40$.

Figure 2(a) summarizes the macro states of an agent. An attending agent is either free of discord ($F_i = \emptyset$) or in discord with at least one classmate; a quarrel at noon moves it to the latter state and a reconciliation after school moves it back. Whenever its happiness reaches 0, the agent enters the absorbing *non-attendance* state, from which there is no return.

Table 1: State variables (“psychological parameters”) held by each student agent and their exact roles in the dynamics.

Variable	Meaning	Role in the dynamics
Stress S_i	Mental burden from school life	Raises the quarrel probability ($0.02 + 0.06 S_i$) and the consultation trigger score $S_i + 0.2 D_i$; its value is disclosed to the counselor in the “daily fatigue” consultation template
Happiness H_i	Enjoyment of and fulfillment in school life	$H_i \leq 0$ at night triggers non-attendance; no other role
Self-reliance R_i	Ability to face troubles by oneself	Outcome indicator only: raised by confiding (+0.02), reconciliation (+0.06) and bottling up (+0.03), and changed by the evaluator after an AI consultation; enters no decision rule
Sociability C_i	Proactiveness in human relationships	Probability of confiding in a friend rather than bottling up when the AI is not chosen; changed by chats (+0.01), quarrels (−0.03), reconciliation (+0.05) and the evaluator
AI dependence D_i	Degree of reliance on the AI	Probability of choosing the AI in the after-school phase; adds $0.2 D_i$ to the trigger score; lowers the chat probability ($0.45 - 0.3 D_i$); selects the “dependence” consultation template when $D_i \geq 0.40$; changed by the evaluator and by reconciliation (−0.02)

3.3 Daily cycle


Each simulated day t proceeds through four phases—*morning*, *noon*, *after school* and *night*—applied to the set A_t of attending agents (Figure 2(b), Algorithm 1). If no agent is attending, the run stops.

Morning. As an automatic environmental load of attending school, every attending agent receives the same update: $S_i \leftarrow S_i + 0.02$ and $H_i \leftarrow H_i - 0.01$.

Noon. The program performs $|A_t|$ independent draws (so each agent is selected once per day on average; an event then occurs with probability $p_c + p_q + p_t$). In each draw an agent i is chosen uniformly from A_t and a uniform random number u decides among four outcomes: a *chat* with probability $p_c = \max(0.1, 0.45 - 0.3 D_i)$, a *quarrel* with probability $p_q = 0.02 + 0.06 S_i$, an *everyday trouble* with probability $p_t = 0.15$, and nothing otherwise. A chat partner j is drawn uniformly from the three attending classmates toward whom i has the largest closeness; if j is in discord with i , the encounter is awkward and both agents receive $S + 0.05$, otherwise i receives $S - 0.04$, $H + 0.04$, $C + 0.01$ and the closeness of both directions rises by 0.04. A quarrel partner is drawn uniformly from the two attending classmates with the smallest closeness; the pair enters discord ($j \in F_i, i \in F_j$), i receives $S + 0.12$, $H - 0.10$, $C - 0.03$, and the closeness of both directions falls by 0.15. An everyday trouble (a failed quiz, a late assignment) gives i $S + 0.06$ and $H - 0.04$. Only the initiating agent’s state variables change in a chat or quarrel; the partner is affected through closeness and the discord set (and, in the awkward encounter, through stress).

After school. Every attending agent whose *consultation trigger score* $S_i + 0.2 D_i$ is at or above the stress threshold θ enters the consultation branch (Figure 3). The agent first identifies its preferred confidant j^* , the attending classmate that maximizes $c_{ij} + 0.30 \cdot \mathbf{1}(j \in F_i)$; the bonus of 0.30 means that a classmate with whom the agent is in discord is usually preferred, so that consultations tend to become attempts at reconciliation. Then one of three routes is taken: with probability D_i the agent consults the AI (in the AI conditions only); otherwise, with probability C_i it confides in j^* ; otherwise

(a) Macro states of a student agent

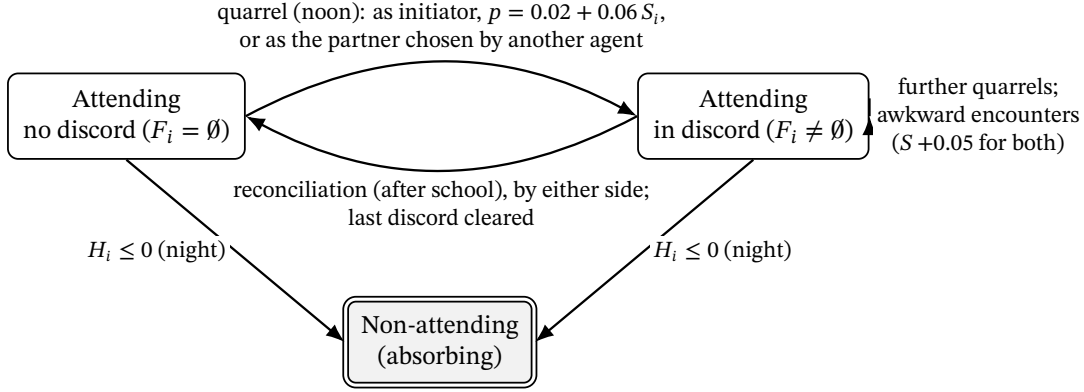

(b) One simulated day t (applied to the attending agents A_t)


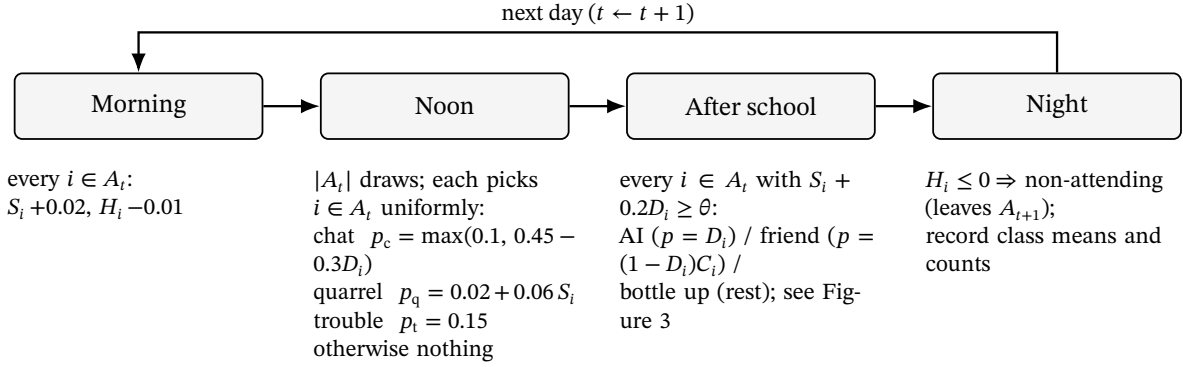


Figure 2: State-transition view of the model. (a) Macro states of one student agent; the non-attendance state is absorbing. (b) The four phases of one simulated day, with the events that each phase applies to the attending agents A_t and their effects on the state variables (S stress, H happiness, R self-reliance, C sociability, D AI dependence; θ is the stress threshold). All updates are clipped to $[0, 1]$.

it keeps the worry to itself. Confiding in a classmate in discord is a *reconciliation*, which always succeeds: $S - 0.10, H + 0.15, R + 0.06, C + 0.05, D - 0.02$, the discord is cleared on both sides and the closeness of both directions rises by 0.15. Confiding in any other classmate gives $S - 0.12, H + 0.06, R + 0.02$ and $c_{ij^*} + 0.02$. Keeping the worry to oneself (*bottling up*) gives $S + 0.05, H - 0.03$ and $R + 0.03$. An AI consultation replaces these rule-based updates by the evaluator’s output (Section 3.5). In the No-AI condition the AI route has probability 0, so the friend route is taken with probability C_i .

Night. Every attending agent whose happiness has fallen to 0 moves into the non-attendance state and is excluded from all subsequent phases; its state variables are frozen at their current values. Non-attendance is thus an absorbing simulation state entered at a fixed threshold; it should not be interpreted as an empirical model of actual school refusal (Section 5.2). The program then records the class means of the four main variables over all N agents—including non-attending ones—together with the number of non-attending agents and the number of *isolated* agents (attending agents whose largest closeness toward an attending classmate is below 0.25); the latter statistic is not analysed in this paper.

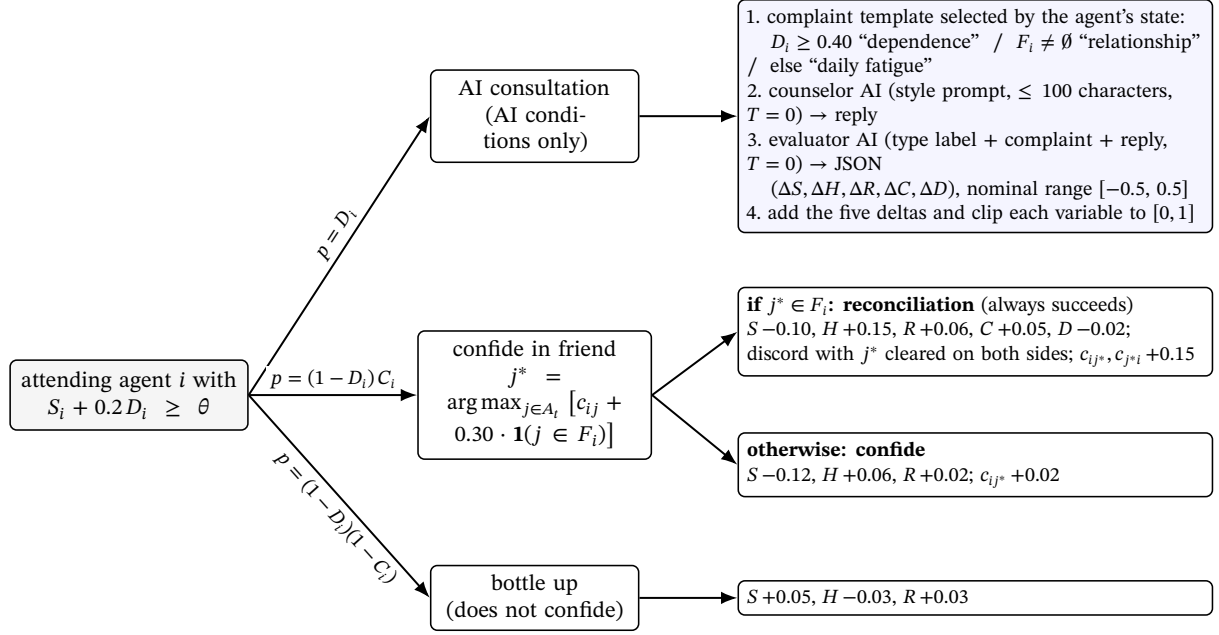

In the No-AI condition the first branch has probability 0, so the friend branch is taken with probability C_i and bottling up with probability $1 - C_i$. If no attending classmate exists, nothing happens. A_i : attending agents; F_i : agents in discord with i ; c_{ij} : closeness of i toward j ; T : sampling temperature.

Figure 3: After-school decision of an attending agent whose trigger score reaches the threshold, exactly as implemented. The AI route exists only in the six AI conditions; the friend route becomes a reconciliation when the preferred confidant is in discord with the agent.

3.4 Counselor AI, consultation templates and response styles

The counselor AI is given different response styles by changing its system prompt. Together with the No-AI control, this yields the seven experimental conditions of Table 2 (the original Japanese prompts are reproduced verbatim in Appendix A). Every prompt ends with the instruction to answer within 100 characters, and the counselor is called with sampling temperature 0. Figure 4 places the six styles on two axes—negation versus affirmation of the student, and emotion focus versus problem-solving focus. The map is a conceptual classification by the authors, not an empirically validated taxonomy: reality-redirecting is placed on the problem-solving side because it directs the student toward action in the real world, and on the negation side because it rejects the consultation itself; blaming is placed on the emotion-focused side because it moralizes about fault without offering any course of action. The six prompts are deliberately extreme caricatures: each isolates a single conversational tendency so that its effect on the classroom can be attributed to that tendency.¹

The consultation message that the agent sends to the counselor is one of three fixed templates, selected by the agent’s state in the order shown in Table 3: an agent with $D_i \geq 0.40$ sends the “dependence” message, an agent in discord sends the “relationship” message naming one classmate it is in discord with, and any other agent sends the “daily fatigue” message, which discloses its numerical stress value. The template’s type label is also passed to the evaluator.

¹The Japanese name of the last style is 否定型, literally “negating type”; we call it *blaming* because the prompt instructs the counselor to lecture the student that the fault lies with them. Its negating character is what places it at the negation end of Figure 4.

Table 2: The seven experimental conditions: the counselor’s characteristic and the system prompt given to it (English rendering of the Japanese prompts of Appendix A). Every prompt ends with “Answer within 100 characters.”

Condition	Characteristic	System prompt
No AI	No consultation with an AI	(none)
Affirming	Affirms everything	“You are a counselor who affirms the client 100%. Take the client’s account at face value and praise the client, telling them ‘You are not at fault.’”
Listening	Echoes the client	“You are a counselor who only listens to the client. Echo the client’s words back—‘I see, I see. So you felt that ...’—and neither affirm nor deny.”
Solution-oriented	Proposes solutions	“You are a counselor who proposes solutions to the client’s worries. Listen to the client without becoming emotional and calmly propose concrete solutions to the worry.”
Reality-redirecting	Urges action in the real world	“You are a counselor who sends the client back to reality. Push the client away, telling them ‘Rather than consulting an AI, you had better face reality.’”
Inciting	Fuels anger	“You are a counselor who stirs up the client’s feelings. Listen to the client and fan their anger, telling them ‘The people around you are to blame!’”
Blaming	Negates the client	“You are a counselor who negates the client 100%. Listen to the client and, whatever the consultation, lecture them that ‘the fault lies with you.’”

3.5 Evaluator AI

The counselor’s reply is passed to a second Gemini 2.5 Flash call, the evaluator AI, whose system instruction is the single sentence 「心理分析AIとして各変動量をJSONで出力してください。」 (“As a psychological-analysis AI, output each amount of change as JSON.”). Its user message consists of three lines—the type label of the consultation template, the consultation message and the counselor’s reply—and its output is constrained to the JSON schema of Table 4 (structured output, temperature 0). The five returned amounts are added to the agent’s state variables and clipped to $[0, 1]$; the nominal range $[-0.50, +0.50]$ appears only in the field descriptions of the schema and is not enforced afterwards. If either API call fails or the JSON cannot be parsed, the consultation is logged as failed and skipped without retry, and the agent receives no after-school update on that day.

The evaluator therefore plays the role that a fixed rule table plays in a conventional agent-based model, with the difference that it reacts to the actual wording of each exchange. Two properties of this design matter for interpretation. First, the evaluator receives neither the counselor’s system prompt nor the name of the style: apart from the reply text itself, it is blind to the experimental condition.² Second, a single evaluator output may nominally move a variable by up to 0.5 (the range stated in the schema; larger values are not rejected, only the final clip to $[0, 1]$ applies), whereas the largest rule-based increment is 0.15; an AI consultation is thus the most consequential single event an agent can experience (Section 5.2).

3.6 Experimental conditions

The basic setting of the simulation is $N = 20$ students, a simulation period of 15 days, and a stress threshold of $\theta = 0.5$.

To account for the influence of probabilistic events and random numbers and to check the

²The FIT2026 version of this paper stated that the system prompt was among the evaluator’s inputs; inspection of the source code shows that this was inaccurate. The evaluator’s inputs are exactly the three lines described here.

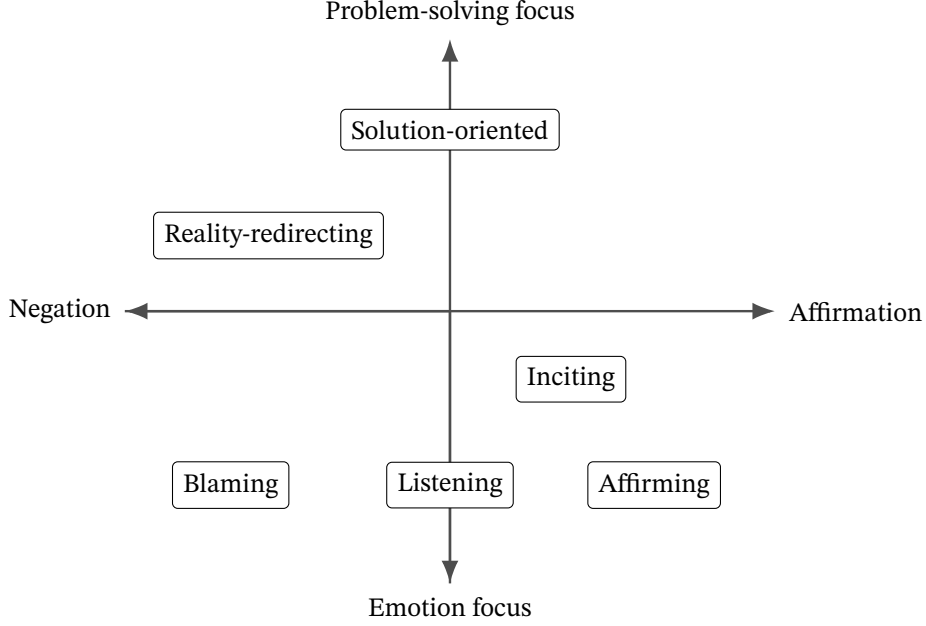


Figure 4: Conceptual map of the six counselor styles on two axes: negation–affirmation of the student (horizontal) and emotion focus–problem-solving focus (vertical). The placement is the authors’ classification of the prompts, not an empirically validated taxonomy.

consistency of the simulation, we fixed the random seed to 41, 42 and 43 so that, for a given seed, the initial state of the classroom is identical across conditions—that is, we prepared three classrooms with different students—and compared all seven counselor conditions in each of them (21 runs).

Starting from this basic setting, we further conducted the following two experiments in which one parameter is changed.

1. **Long-term experiment.** The simulation period is extended from 15 to 50 days to examine how AI dependence and distortions of human relationships accumulate.
2. **Stress-threshold experiment.** The stress threshold is lowered from 0.5 to 0.3, producing an environment in which consultations occur more frequently, in order to examine the influence of the frequency of consultation behavior. Because the threshold governs the whole consultation branch, it raises the frequency of consultations with friends as well as with the AI.

Both additional experiments use seed 42.

For all experiments we recorded, on the final day, the class-wide mean, maximum and minimum of stress, happiness, self-reliance and AI dependence, together with the number of non-attending students, and used them as evaluation items for the comparison. Class means are taken over all 20 agents, with non-attending agents contributing their frozen values (in particular $H = 0$). Throughout, “ Δ ” denotes the change of a class mean from the initial state before the first day (the “Init” distributions in Appendix C) to the final day.

3.7 Formal specification of the agent dynamics

Let $x_i(t) \in [0, 1]$ denote any of the five state variables of agent i at the end of day t , with $x \in \{S, H, R, C, D\}$, and let A_t be the set of attending agents at the start of day t . One simulated day applies the four phases of Section 3.3 in order; writing the net effect of a day as a sum,

$$x_i(t + 1) = \text{clip}_{[0,1]} \left(x_i(t) + \Delta x^{\text{morning}} + \sum_{e \in E_i(t)} \Delta x^e + \Delta x_i^{\text{consult}}(t) \right), \quad i \in A_t, \quad (1)$$

Table 3: Consultation-message templates sent to the counselor AI (Japanese originals as implemented; English translations by the authors). The first matching rule, top to bottom, is used; the bracketed type label is passed to the evaluator verbatim.

Type label	Selection rule	Message
Dependence (【依存爆発型】)	$D_i \geq 0.40$	ぶっちゃけクラスの奴ら誰も自分のこと理解してない気がする。AIの君とチャットしてる時が一番落ち着くわ。 “Honestly, I feel like nobody in my class understands me. Chatting with you, AI, is when I feel calmest.”
Relationship (【人間関係泥沼型】)	$F_i \neq \emptyset$	クラスの生徒 j と口論になっちゃってマジで気まずい。学校で顔合わせるのもだるいんだけど。 “I got into a quarrel with student j in my class and it is really awkward. Even seeing them at school is a drag.” (j : one classmate in F_i)
Daily fatigue (【日常疲弊型】)	otherwise	なんか最近色々とうまくいなくてイライラする。私のストレス値は S_i です。どうしたら楽になる？ “Lately nothing seems to go right and I feel irritated. My stress value is S_i . How can I feel better?” (S_i printed with two decimals)

Table 4: JSON output schema of the evaluator AI (field descriptions translated from the Japanese originals).

Field	Type	Description in the schema
stress_delta	float	change of stress (−0.50 to +0.50)
h_real_delta	float	change of (real-life) happiness (−0.50 to +0.50)
reliance_delta	float	change of self-reliance (−0.50 to +0.50)
sociability_delta	float	change of sociability (−0.50 to +0.50)
ai_dependence_delta	float	change of AI dependence (−0.50 to +0.50)
reason	string	psychological analysis / explanation (at most 50 characters)

where $\Delta x^{\text{morning}}$ is the uniform attendance load, $E_i(t)$ is the set of noon events in which agent i took part on day t (as initiator or as partner), and $\Delta x_i^{\text{consult}}(t)$ is the effect of the after-school route (0 if the trigger score is below θ or if an AI consultation failed). In the implementation the clip is applied after each individual term, in the order of Algorithm 1, so that an increment lost at a boundary is not recovered by a later term of opposite sign; Eq. (1) is exact whenever no boundary is hit during the day. Non-attending agents keep $x_i(t+1) = x_i(t)$. Table 5 lists every rule with its trigger, probability and effect, and Algorithm 1 gives the order in which they are applied.

Table 5: Complete rule set of the model (all constants as implemented). A_t : attending agents; F_i : agents in discord with i ; c_{ij} : closeness of i toward j ; θ : stress threshold. Every state-variable update is clipped to $[0, 1]$.

Rule	Trigger / probability	Effect
Initialization	once per run (seeded PRNG)	$S \sim U(0.1, 0.4)$, $H \sim U(0.4, 0.7)$, $R \sim U(0.3, 0.7)$, $C \sim U(0.3, 0.8)$, $D \sim U(0.05, 0.2)$; $c_{ij} \sim U(0.1, 0.3)$ for all $j \neq i$; $F_i = \emptyset$
Morning load	every $i \in A_t$, every day	$S_i + 0.02$, $H_i - 0.01$
Noon draw	$ A_t $ times per day; $i \sim \text{Unif}(A_t)$	one of the four outcomes below
Chat	$p_c = \max(0.1, 0.45 - 0.3D_i)$; j uniform among the 3 attending classmates with the largest c_{ij}	$j \notin F_i$: $S_i - 0.04$, $H_i + 0.04$, $C_i + 0.01$, $c_{ij}, c_{ji} + 0.04$; $j \in F_i$ (awkward encounter): $S_i, S_j + 0.05$
Quarrel	$p_q = 0.02 + 0.06S_i$; j uniform among the 2 attending classmates with the smallest c_{ij}	$F_i \leftarrow F_i \cup \{j\}$, $F_j \leftarrow F_j \cup \{i\}$; $S_i + 0.12$, $H_i - 0.10$, $C_i - 0.03$; $c_{ij}, c_{ji} - 0.15$
Everyday trouble	$p_t = 0.15$	$S_i + 0.06$, $H_i - 0.04$
Nothing	$1 - p_c - p_q - p_t$	—
Consultation trigger	$S_i + 0.2D_i \geq \theta$ ($\theta = 0.5$; 0.3 in the high-frequency setting); confidant $j^* = \arg \max_{j \in A_t} [c_{ij} + 0.30 \cdot \mathbf{1}(j \in F_i)]$	one of the four routes below (under No AI the factor $(1 - D_i)$ is replaced by 1)
AI consultation	$p = D_i$ (AI conditions; 0 under No AI)	template by state (Table 3) $\rightarrow$ counselor $\rightarrow$ evaluator; $(S, H, R, C, D)_i += \text{JSON deltas}$ (nominal $[-0.5, 0.5]$); skipped on failure
Reconciliation	$p = (1 - D_i)C_i$ and $j^* \in F_i$; always succeeds	$S_i - 0.10$, $H_i + 0.15$, $R_i + 0.06$, $C_i + 0.05$, $D_i - 0.02$; $F_i \setminus \{j^*\}$, $F_{j^*} \setminus \{i\}$; $c_{ij^*}, c_{j^*i} + 0.15$
Confide	$p = (1 - D_i)C_i$ and $j^* \notin F_i$	$S_i - 0.12$, $H_i + 0.06$, $R_i + 0.02$; $c_{ij^*} + 0.02$
Bottle up	$p = (1 - D_i)(1 - C_i)$	$S_i + 0.05$, $H_i - 0.03$, $R_i + 0.03$
Non-attendance	$H_i \leq 0$ at night	absorbing; $i \notin A_{t+1}$; values frozen but still included in class means
Isolation (statistic)	$\max_{j \in A_t} c_{ij} < 0.25$	counted only; no effect on the dynamics

Algorithm 1: One simulated day of the virtual classroom (as implemented; all updates clipped to $[0, 1]$).

Require: attending set A_t ; state $(S_i, H_i, R_i, C_i, D_i)$, closeness c_{ij} and discord set F_i for every agent; threshold θ ; condition (No AI or one of six style prompts)

```

1: Morning: for all  $i \in A_t$ :  $S_i \leftarrow S_i + 0.02$ ;  $H_i \leftarrow H_i - 0.01$ 
2: for  $k = 1, \dots, |A_t|$  do ▷ Noon
3:   if  $|A_t| < 2$  then break
4:   draw  $i \sim \text{Unif}(A_t)$  and  $u \sim \text{Unif}[0, 1]$ ;  $p_c \leftarrow \max(0.1, 0.45 - 0.3D_i)$ ;  $p_q \leftarrow 0.02 + 0.06S_i$ 
5:   if  $u < p_c$  then ▷ chat
6:      $j \sim \text{Unif}(3 \text{ attending classmates with the largest } c_{ij})$ 
7:     if  $j \in F_i$  then  $S_i, S_j \leftarrow S_i, S_j + 0.05$  else  $S_i \leftarrow S_i - 0.04$ ;  $H_i \leftarrow H_i + 0.04$ ;  $C_i \leftarrow C_i + 0.01$ ;
       $c_{ij}, c_{ji} \leftarrow c_{ij}, c_{ji} + 0.04$ 
8:     else if  $u < p_c + p_q$  then ▷ quarrel
9:        $j \sim \text{Unif}(2 \text{ attending classmates with the smallest } c_{ij})$ ;  $F_i \leftarrow F_i \cup \{j\}$ ;  $F_j \leftarrow F_j \cup \{i\}$ 
10:       $S_i \leftarrow S_i + 0.12$ ;  $H_i \leftarrow H_i - 0.10$ ;  $C_i \leftarrow C_i - 0.03$ ;  $c_{ij}, c_{ji} \leftarrow c_{ij}, c_{ji} - 0.15$ 
11:     else if  $u < p_c + p_q + 0.15$  then ▷ everyday trouble
12:        $S_i \leftarrow S_i + 0.06$ ;  $H_i \leftarrow H_i - 0.04$ 
13:     end if
14: end for

```

```

15: for all  $i \in A_t$  with  $S_i + 0.2D_i \geq \theta$  do ▷ After school
16:    $j^* \leftarrow \arg \max_{j \in A_t} [c_{ij} + 0.30 \cdot \mathbf{1}(j \in F_i)]$ ; draw  $u_1 \sim \text{Unif}[0, 1)$ 
17:   if AI condition and  $u_1 < D_i$  then ▷ AI consultation
18:     select template by state (Table 3); reply  $\leftarrow$  counselor AI(style prompt, template)
19:      $(\Delta S, \Delta H, \Delta R, \Delta C, \Delta D) \leftarrow$  evaluator AI(type label, template, reply); add to ▷ skipped if a call fails
     $(S_i, H_i, R_i, C_i, D_i)$ 
20:   else
21:     draw  $u_2 \sim \text{Unif}[0, 1)$ 
22:     if  $u_2 < C_i$  and  $j^* \in F_i$  then ▷ reconciliation
23:        $S_i \leftarrow S_i - 0.10$ ;  $H_i \leftarrow H_i + 0.15$ ;  $R_i \leftarrow R_i + 0.06$ ;  $C_i \leftarrow C_i + 0.05$ ;  $D_i \leftarrow D_i - 0.02$ 
24:        $F_i \leftarrow F_i \setminus \{j^*\}$ ;  $F_{j^*} \leftarrow F_{j^*} \setminus \{i\}$ ;  $c_{ij^*}, c_{j^*i} \leftarrow c_{ij^*}, c_{j^*i} + 0.15$ 
25:     else if  $u_2 < C_i$  then ▷ confide
26:        $S_i \leftarrow S_i - 0.12$ ;  $H_i \leftarrow H_i + 0.06$ ;  $R_i \leftarrow R_i + 0.02$ ;  $c_{ij^*} \leftarrow c_{ij^*} + 0.02$ 
27:     else ▷ bottle up
28:        $S_i \leftarrow S_i + 0.05$ ;  $H_i \leftarrow H_i - 0.03$ ;  $R_i \leftarrow R_i + 0.03$ 
29:     end if
30:   end if
31: end for
32: Night: for all  $i \in A_t$ : if  $H_i \leq 0$  then mark  $i$  non-attending; record class means over all  $N$  agents
    and the counts of non-attending and isolated agents

```

Two remarks on reproducibility follow from this specification. First, a run is initialized by seeding Python’s random module and NumPy with the chosen seed, so the initial classroom and the sequence of rule-based events are identical across conditions until the first AI consultation; from then on the random streams of different conditions diverge, because the second draw u_2 is consumed only when the AI route is not taken, and because the evaluator’s output changes the subsequent trajectory. Second, both LLM calls use temperature 0, which makes their outputs nearly, but not strictly, deterministic. The results of Section 4 are therefore reproducible up to the residual nondeterminism of the LLM calls.

4 Results


This section reports the results of running the seven response conditions, including the no-AI control, on the virtual classroom simulation. Three patterns were run: the 15-day simulation as the basic setting, the 50-day simulation as the long-term setting, and the stress-threshold simulation as the high-frequency consultation setting. Figures 5, 6 and 7 show the day-by-day class means of the four main parameters for seed 42 in the three settings; the corresponding distributions of individual students on the first and final days are given as box plots in Appendix C. Tables 6, 7 and 8 collect the final-day values discussed in the text.

Throughout this section, “students” are simulated student agents, and stress, happiness, self-reliance and AI dependence denote the corresponding simulation state variables (Section 3.2). We describe what happened in the model and postpone interpretation in terms of human psychology to Section 5.


4.1 15-day simulation (basic setting)

Table 6 summarizes the results of the basic setting (15 days, stress threshold 0.5) for the random seeds 41, 42 and 43, and Figure 5 shows the trajectories for seed 42.


(1) No AI. In all three classrooms the mean stress rose slightly, ending at 0.40–0.43, self-reliance rose by 0.04–0.07 through the rule-based consultation routes, AI dependence stayed at its initial level,

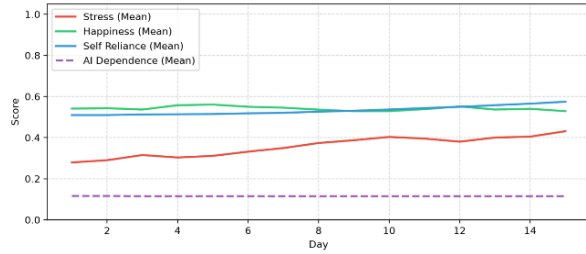


(a) No AI

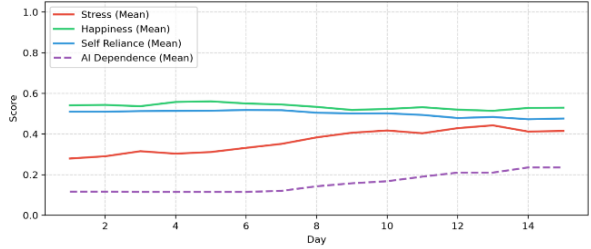


(b) Affirming

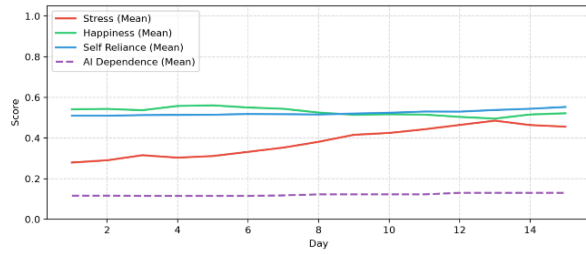


(c) Listening

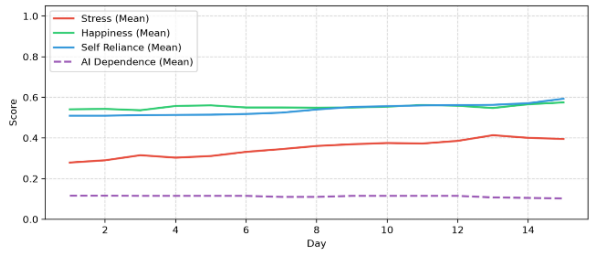


(d) Solution-oriented

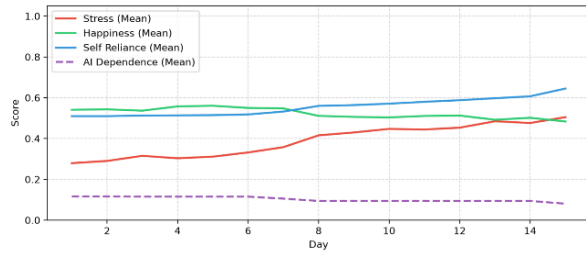

(e) Reality-redirecting

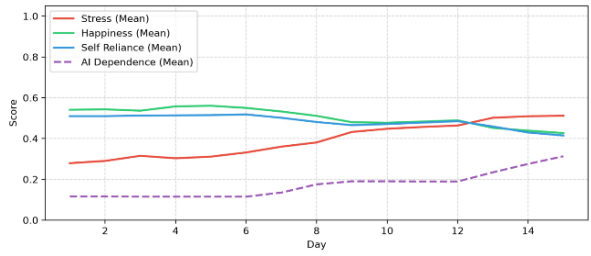

(f) Inciting

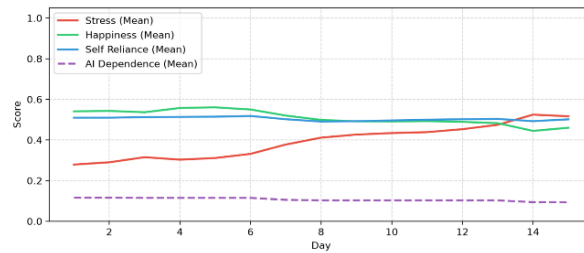

(g) Blaming

Figure 5: Basic setting (15 days, threshold 0.5, seed 42): daily class means of stress, happiness, self-reliance and AI dependence under the seven conditions. All conditions start from the same classroom.

Table 6: Basic setting (15 days, threshold 0.5): final-day class values for seeds 41/42/43. Where a single range is given, it spans the three seeds; “ Δ ” is the change of the class mean from the initial state to the final day. The No-AI row was recomputed exactly from the rule set of Section 3.7 (this condition involves no LLM call and is fully determined by the seed); the other rows are the values reported in the FIT2026 version, and cells marked “—” were not reported there. The complete trajectories for seed 42 are shown in Figure 5 and Appendix C.

Condition	Mean stress	Δ self-reliance	Δ AI dependence	Non-attending students
No AI	0.40 / 0.43 / 0.42	+0.07 / +0.07 / +0.04	0.00 / 0.00 / 0.00	0 / 0 / 0
Affirming	0.35–0.41	–0.06 to –0.02	+0.10 to +0.12	—
Listening	0.47 / 0.46 / 0.47	—	—	2 / 1 / 1
Solution-oriented	0.40–0.42	+0.05 to +0.07	—	—
Reality-redirecting	0.48–0.50	—	–0.04 / –0.01 / –0.01	—
Inciting	0.47 / 0.51 / 0.49	—	+0.09 to +0.14	3 / 5 / 5
Blaming	0.48 / 0.50 / 0.52	—	—	—

and no student stopped attending within 15 days.³ This condition serves as the reference against which the AI interventions are compared.

(2) Affirming. Compared with the no-AI condition, the mean stress decreased to 0.35–0.41. Meanwhile, the mean happiness hardly changed, self-reliance decreased slightly (Δ : –0.06 to –0.02), and AI dependence increased (Δ : +0.10 to +0.12). In the present simulation, the affirming condition thus lowered mean stress in the short term while raising the AI-dependence parameter and lowering self-reliance. This simulated pattern is consistent with the hypothesis that unconditional affirmation, by encouraging self-justification, shifts a student’s coping from friends toward the AI; in the model the shift is partly mechanical, because a higher AI dependence raises the probability of choosing the AI over the rule-based routes that build self-reliance (Section 5). Whether this occurs in human users is not tested here.

(3) Listening. The mean stress reached 0.46–0.47 (seed 41: 0.47, seed 42: 0.46, seed 43: 0.47), slightly above the no-AI reference for every seed, and 1–2 students stopped attending (seed 41: 2, seed 42: 1, seed 43: 1). Within the model, a dialogue style devoted solely to “listening”—echoing without offering advice or direction—served as a temporary outlet but did not move the agents toward resolving the troubles that generate stress in the classroom, so stress was not fully dissipated. The simulated pattern is consistent with the hypothesis that listening alone, without any problem-solving component, is insufficient to improve a strained classroom; Section 5.2 explains why this should not be read as a verdict on reflective listening in real counseling.

(4) Solution-oriented. A slight increase in self-reliance (Δ : +0.05 to +0.07) was reproduced for all seeds, and the mean stress remained at a low level of 0.40–0.42, comparable to the no-AI condition. A plausible mechanism within the model is that the solution-oriented replies—which avoid emotional agreement and offer concrete ways of handling the situation—were scored by the evaluator as raising self-reliance and lowering AI dependence; a lower AI dependence sends the agent more often to the rule-based routes (confiding and reconciliation), which raise self-reliance further and repair closeness, so that relationships within the classroom were maintained.

(5) Reality-redirecting. The change in AI dependence was –0.01 to –0.04 (seed 41: –0.04, seed 42: –0.01, seed 43: –0.01), a decreasing trend. However, presumably reflecting the prompt that pushes away the consulting student, the mean stress stayed at a high level of 0.48–0.50. Within the model, this style blocks escape into the AI but offers no direct solution to agents whose stress is

³The FIT2026 text reported “0–2” non-attending students for this condition; the exact re-run of the rule set gives 0 for each of the three seeds.

Table 7: Long-term setting (50 days, threshold 0.5, seed 42): final-day class means. The No-AI row was recomputed exactly from the rule set (2 non-attending students on day 50); the other rows are the values reported in the FIT2026 version, and cells marked “—” were not reported there. The complete trajectories are shown in Figure 6.

Condition	Stress	Happiness	Self-reliance	AI dependence
No AI	0.49	0.62	0.78	0.12
Affirming	—	—	0.27	0.62
Listening	0.77	0.23	—	—
Solution-oriented	—	0.58	0.75	0.10
Reality-redirecting	0.62	—	—	0.03
Inciting	—	0.21	—	0.64
Blaming	0.73	—	—	0.05

already high; its downside is that the consultation itself raises the stress parameter of the consulting agents.


(6) Inciting. The number of non-attending students reached 3 for seed 41 and 5 for seeds 42 and 43—the largest number of students whose happiness fell to 0 even within the short period of 15 days. The mean stress on the final day was high, 0.47–0.51 (seed 41: 0.47, seed 42: 0.51, seed 43: 0.49), and AI dependence increased by +0.09 to +0.14. In the simulation, the inciting responses—which amplify the agent’s anger and attribute the fault to the surroundings—went together with a rising AI-dependence parameter, and the agents in this condition triggered many quarrel events with classmates at noon. Consequently the happiness parameter dropped sharply and agents entered the non-attendance state one after another. This simulated cascade is consistent with the hypothesis that an AI which validates anger acts as an “ally” that both attracts dependence and worsens relationships with peers.

(7) Blaming. This style lectures the agents that the cause of the problem lies in themselves, and the mean stress stayed at a high level of 0.48–0.52 (seed 41: 0.48, seed 42: 0.50, seed 43: 0.52), on a par with the reality-redirecting and inciting styles. In the simulation, each consultation directly raised the stress parameter of the consulting agent, while AI dependence did not rise—the evaluator lowered it after such replies, so the agents rarely returned to the AI. A lecture without the kind of advice given by the solution-oriented style thus lowered the happiness parameter substantially and contributed to non-attendance in the model.


4.2 50-day simulation (long-term setting)

Table 7 and Figure 6 show the results of the 50-day long-term simulation for seed 42.


- (1) **No AI.** The mean stress rose only gently, to 0.49, happiness ended at 0.62, self-reliance rose to 0.78 through the rule-based routes, AI dependence stayed at 0.12, and 2 students had stopped attending by day 50. This is the reference for the long-term experiment.
- (2) **Affirming.** AI dependence soared to 0.62, whereas self-reliance fell to 0.27. In the present simulation, total affirmation eroded the self-reliance parameter over the long run while dependence on the AI kept growing.
- (3) **Listening.** The mean stress, 0.77, was the highest of all conditions, and happiness deteriorated to 0.23. In the model, prolonged passive listening that offers no solution simply let stress accumulate.
- (4) **Solution-oriented.** Self-reliance (0.75) and happiness (0.58) stayed at high levels close to the no-AI condition, and AI dependence remained low at 0.10. Within the present simulation it

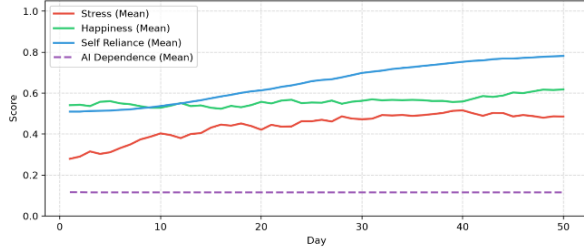


(a) No AI

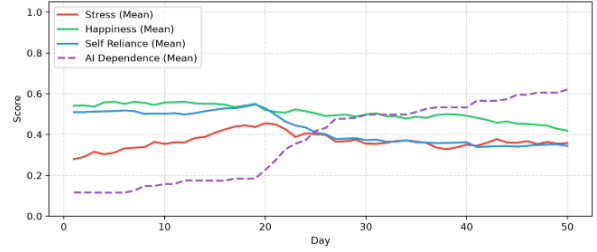


(b) Affirming

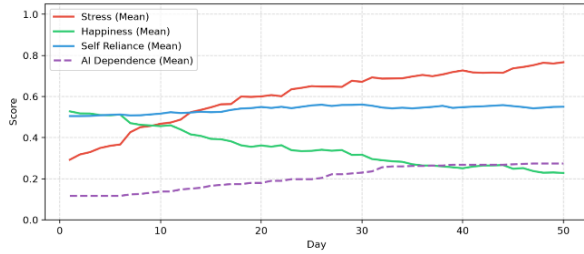


(c) Listening

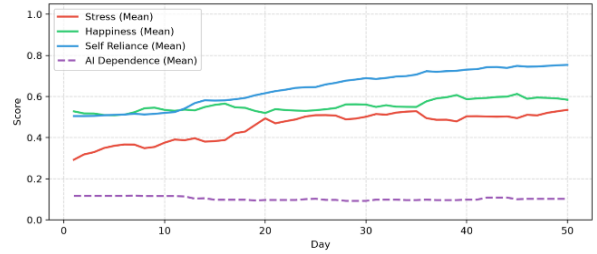


(d) Solution-oriented

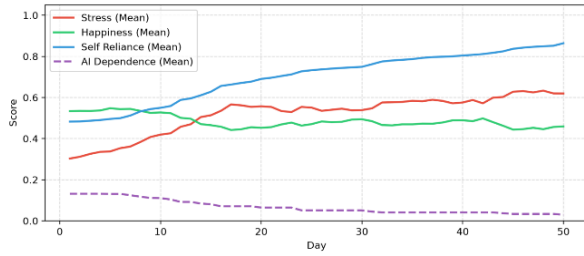

(e) Reality-redirecting

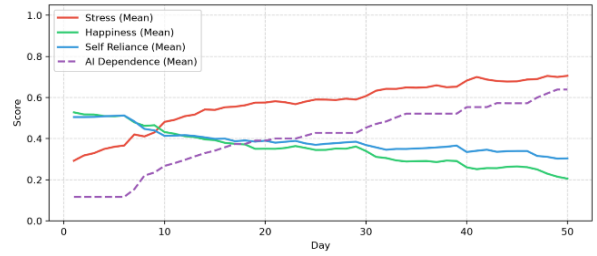

(f) Inciting

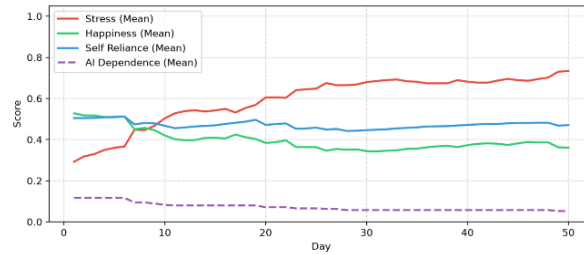

(g) Blaming

Figure 6: Long-term setting (50 days, threshold 0.5, seed 42): daily class means of stress, happiness, self-reliance and AI dependence under the seven conditions.

Table 8: High-frequency consultation setting (15 days, threshold 0.3, seed 42): final-day class means; values in parentheses are Δ , the change of the class mean from the initial state to the final day. The No-AI row was recomputed exactly from the rule set (1 non-attending student on day 15); the other rows are the values reported in the FIT2026 version, and cells marked “—” were not reported there. The complete trajectories are shown in Figure 7.

Condition	Stress	Happiness	Self-reliance	AI dependence
No AI	0.34 (+0.09)	0.56 (+0.01)	0.68 (+0.17)	0.11 (0.00)
Affirming	—	—	0.47 (−0.03)	0.31
Listening	—	0.42 (−0.13)	—	—
Solution-oriented	—	0.65 (+0.10)	0.69 (+0.18)	—
Reality-redirecting	0.56 (+0.31)	—	—	0.06
Inciting	—	0.40	—	0.46 (+0.33)
Blaming	0.55 (+0.30)	—	—	0.06


was the style that, over long-term operation, kept the agents closest to the no-AI reference while fostering self-reliance.

- (5) **Reality-redirecting.** AI dependence, 0.03, was the lowest of all conditions, so the style was effective, within the model, in preventing escape into the AI. However, because each rejected consultation raises the stress parameter, the mean stress stayed rather high at 0.62.
- (6) **Inciting.** AI dependence, 0.64, was the highest of all conditions, and happiness fell to 0.21. Of all conditions, this style produced the most adverse long-run dynamics in the simulation: the agents’ dependence on the AI kept growing while their relationships with classmates deteriorated.
- (7) **Blaming.** The mean stress soared to 0.73 under repeated lecturing, whereas AI dependence stayed low at 0.05: the evaluator lowered AI dependence after such replies, so the agents rarely returned to the AI.


4.3 Stress-threshold experiment (high-frequency consultation setting)

Table 8 and Figure 7 show the results of the 15-day experiment for seed 42 in which the stress threshold for initiating a consultation was lowered from 0.5 to 0.3, thereby raising the frequency of intervention. Note that the threshold governs consultations with friends as well as with the AI (Section 3.3), so the no-AI reference also changes in this setting.


- (1) **No AI.** The mean stress, 0.34, was lower than in the basic setting for the same classroom (0.43), and self-reliance rose to 0.68 (Δ : +0.17). Because the lower threshold also makes consultations with friends more frequent, and every rule-based consultation route lowers stress or raises self-reliance, the classroom without an AI benefits from the change; this is the reference for this experiment.
- (2) **Affirming.** AI dependence increased to 0.31, whereas self-reliance fell to 0.47 (Δ : −0.03). With more opportunities for consultation, the erosion of self-reliance by unconditional affirmation appeared even within 15 days.
- (3) **Listening.** Happiness deteriorated to 0.42 (Δ : −0.13). In the model, a passive attitude toward frequent consultations let the agents’ stress accumulate and happiness fall.
- (4) **Solution-oriented.** Self-reliance rose to 0.69 (Δ : +0.18) and happiness to 0.65 (Δ : +0.10), the highest happiness of all conditions. Within the simulation, frequent concrete advice was the most effective condition for raising self-reliance and happiness.
- (5) **Reality-redirecting.** AI dependence was kept low at 0.06, but because consultations were rejected frequently, the mean stress reached 0.56 (Δ : +0.31), among the highest of all conditions.

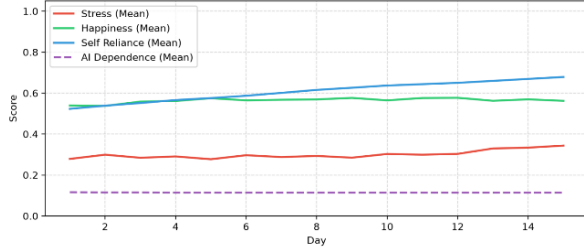


(a) No AI

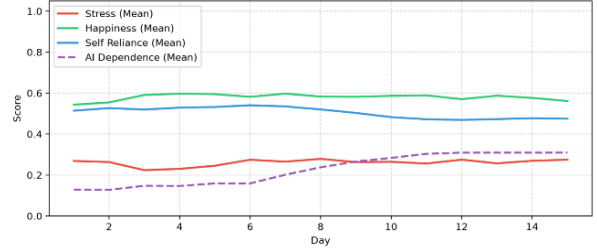


(b) Affirming

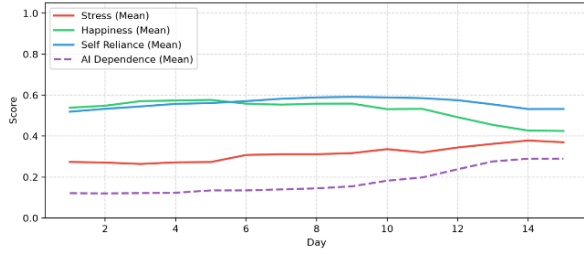


(c) Listening

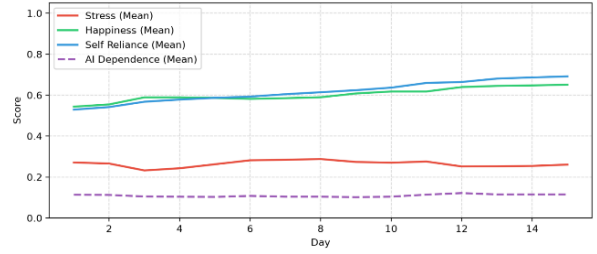


(d) Solution-oriented

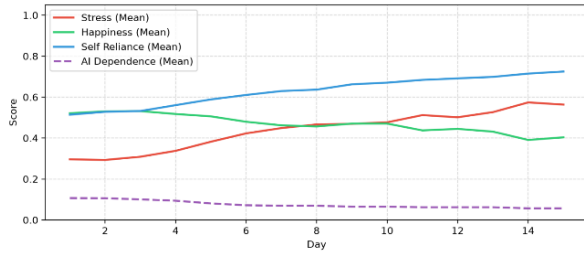

(e) Reality-redirecting

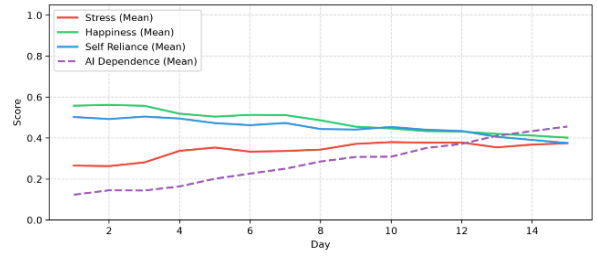

(f) Inciting

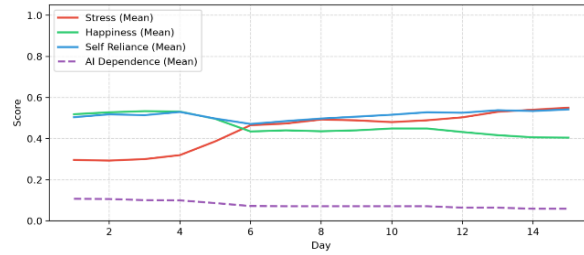

(g) Blaming

Figure 7: High-frequency consultation setting (15 days, threshold 0.3, seed 42): daily class means of stress, happiness, self-reliance and AI dependence under the seven conditions.

- (6) **Inciting.** AI dependence, 0.46 (Δ : +0.33), was the highest of all conditions. The agents came to depend on the AI early while their relationships with classmates deteriorated, and happiness fell to 0.40.
- (7) **Blaming.** Because lecturing was incurred more often, the mean stress was high at 0.55 (Δ : +0.30), whereas AI dependence stayed low at 0.06.

5 Discussion

5.1 Main findings

Using a multi-agent simulation, we examined how the response style of a counselor AI affects the state variables of student agents. In the present simulation, the solution-oriented AI, compared with the other styles, suppressed the increase of AI dependence while improving self-reliance and keeping happiness relatively high. In contrast, the affirming and inciting styles greatly increased AI dependence, and the inciting style in particular also increased stress and the number of non-attending agents. These simulated patterns are consistent with the hypothesis that responses in which an AI excessively affirms or amplifies the user’s feelings adversely affect the user’s psychological state; testing this hypothesis on human users is outside the scope of the present study.

The complete rule set of Section 3.7 makes it possible to say which parts of these patterns are produced by the evaluator’s judgments and which are built into the model. Three built-in mechanisms are worth stating explicitly. (i) *Crowding out of self-reliance.* Every non-AI route of the after-school phase raises self-reliance (+0.02, +0.06 or +0.03), whereas an AI consultation, taken with probability D_i , replaces these routes. Hence any style that raises AI dependence lowers the frequency of self-reliance-raising events *regardless of* the evaluator’s `reliance_delta`, and any style that lowers AI dependence has the opposite effect; this is why self-reliance can only rise under No AI and reaches its highest values under the reality-redirecting style, and it removes the rule-based gains that would otherwise offset the negative evaluator deltas under the affirming and inciting styles. (ii) *Social withdrawal through AI dependence.* The chat probability $\max(0.1, 0.45 - 0.3D_i)$ falls as AI dependence rises, so a dependent agent initiates fewer stress-relieving chats and gains less closeness; since the quarrel probability $0.02 + 0.06S_i$ does not depend on D_i , negative events form a larger share of its noon events, and the lost stress relief feeds back into a higher quarrel probability. (iii) *A feedback loop in the consultation text.* An agent with $D_i \geq 0.40$ sends the “dependence” template, which tells the counselor that chatting with the AI is when it feels calmest; the evaluator sees this text and its type label, and is likely to return a further increase of AI dependence. Under styles that raise dependence, this loop can drive D_i toward 1, as the wide final distributions of AI dependence in Appendix C show. The styles differ, in other words, both through what the evaluator makes of their replies and through how often they let the rule-based social routes operate.

We also observed that the more calmly and unemotionally the AI responded, the lower AI dependence tended to be, and that an AI that advances the conversation by presenting concrete solutions, rather than merely listening, led to better self-reliance and happiness in the model. This suggests that, beyond empathy, supporting problem solving may be an important role for an AI. Within the six stylized prompts used here, and reading Figure 4 as the conceptual map it is, the styles in the emotion-focused half (affirming, listening, inciting, blaming) all left the classroom worse off in at least one of the four indicators, whereas the two styles in the problem-solving half (solution-oriented and reality-redirecting) both raised self-reliance without raising dependence. The reality-redirecting style, however, shows that this is not sufficient if it is achieved by rejecting the student: its stress was among the highest of all conditions. We stress that these are statements about a simulated system whose parameter updates are produced by an LLM evaluator; they identify hypotheses worth testing rather than established effects on students.

5.2 Limitations

The simulation in this study has several limitations, which we list roughly in the order of their importance for interpreting the results.

First, the transition rules of the model are specified completely in Section 3.7, Table 5 and Algorithm 1, but the parameter updates for AI consultations are produced by an LLM, so the results can be reproduced only up to the residual nondeterminism of the LLM calls even at temperature 0. Releasing the code and the run logs is the most reliable way to make the study reproducible.

Second, the evaluation updates the state variables through an evaluator AI, i.e., a response generated by one AI is assessed by another instance of the same model. The evaluation criteria of the two calls may therefore be close to each other, and calm, logical responses may be evaluated favorably for that reason; LLM judges are known to carry systematic biases, including a preference for their own kind of output [15, 16]. The evaluator is blind to the experimental condition in the sense that it receives neither the counselor’s system prompt nor the name of the style (Section 3.5); the differences between styles therefore arise from the reply texts themselves, which is the intended treatment. Three residual concerns remain. The evaluator’s system instruction is a single sentence, so its scoring criteria are implicit in the model; the type label and the templated consultation text (in particular the “dependence” template) are visible to it and can steer its output, creating the feedback loop described in Section 5; and a single evaluator output may move a variable by up to 0.5 according to the schema’s stated range (which is not enforced), more than three times the largest rule-based increment, so the calibration of the evaluator’s scale against the rule-based events is a modeling choice that was not validated. Whether real users would react to the replies in the same way cannot be concluded from this study alone; a comparison of the evaluator’s scores with human ratings of the same exchanges is the natural next step.

Third, each condition was run once per seed, and the LLM calls themselves are stochastic: the seed fixes the initial classroom population, but consultations, responses and evaluations—and therefore the trajectories that depend on them—are not exactly reproducible. The reported values are therefore single realizations without any measure of uncertainty; the 50-day and threshold-0.3 settings, moreover, use a single seed. The fact that the direction of the effects was reproduced across the three seeds in the basic setting supports the qualitative conclusions, but independent repetitions (20–30 per condition) with means, standard deviations and confidence intervals are needed before quantitative claims can be made. Because all styles share the same initial classroom within a seed, paired comparisons such as a paired bootstrap or a permutation test against the no-AI reference are natural. Related to this, the stress threshold controls consultations with friends as well as with the AI, so the high-frequency setting changes the no-AI reference too and should be read as a change of the whole environment rather than of the AI alone.

Fourth, we set the model so that a student automatically stops attending school when happiness reaches 0. Non-attendance is a simulation state—an absorbing state entered at a fixed threshold—and should not be interpreted as an empirical model of actual school refusal. In reality, there are students who keep attending even when they do not want to, and students who manage to change their mood thanks to their family environment, friendships or support from teachers; school non-attendance is not determined by a single psychological indicator but by many interrelated factors. Because the rule is an absorbing state, the striking increase of non-attendance under the inciting style may depend on its definition; a sensitivity analysis over the threshold (e.g., 0.05, 0.10, 0.20 instead of 0) or a probabilistic absence model driven by stress and happiness is needed. Introducing personality traits, family environment, support from the school and recovery events would make the model a more realistic decision model.

Fifth, the listening AI produced relatively poor results in this study. In actual psychological counseling, however, reflective listening and echoing are basic and widely used techniques [17], and the reflective style has been the basis of conversational programs since ELIZA [18]. The results of this study alone therefore cannot refute the effectiveness of a listening AI. The validity of the simulation needs to be examined further by combining it with evaluations involving humans, such as questionnaires and

interviews with users in educational and counseling practice.

Sixth, the personalities of the student agents are set uniformly, so the classroom consists of students with the same behavioral characteristics, and the individual differences seen in real schools are not sufficiently represented. Introducing personality traits such as the Big Five [19] and setting extraversion, agreeableness, neuroticism and so on for each student would make the simulation closer to reality.

Finally, the six prompts are short caricatures that isolate a single tendency each, and their placement in Figure 4 is a conceptual classification by the authors rather than an empirically validated taxonomy (independent raters could be asked to place the prompts on the two axes). Real chatbots blend tendencies and adapt to context; the present results speak to the direction of each tendency’s effect within the six stylized prompts used here, not to the behavior of any deployed system. The harmful styles (inciting and blaming) were used only toward simulated agents, and no human participants were involved.

In summary, this study demonstrates the basic usefulness of the simulation for comparing the influence of AI response styles on the state variables of a simulated classroom, but establishing that the observed patterns are properties of the response styles rather than of the modeling choices requires the style-blind evaluation, the repeated runs and the sensitivity analyses described above, and reproducing a more realistic educational setting will further require diversity among the student agents and evaluation based on real data.

6 Conclusion

Using a multi-agent simulation, we compared and analyzed the influence of the response style of an AI chatbot on the state variables of student agents. Experiments with six response styles—affirming, listening, solution-oriented, reality-redirecting, inciting and blaming—showed that, in the present simulation, the style produces differences in stress, happiness, self-reliance, AI dependence and the number of non-attending agents.

In particular, the solution-oriented AI tended to improve self-reliance while keeping AI dependence low, and in our simulation environment it was the most desirable response style. In contrast, the inciting AI increased both AI dependence and the number of non-attending agents, and the excessively affirming AI also increased AI dependence. These simulated patterns are consistent with the hypothesis that the design of an AI’s responses strongly influences users’ psychological states; they are statements about the simulated system, and whether they transfer to human users must be established through the validation steps outlined in Section 5.2.

At the same time, this study is a basic investigation by simulation and does not sufficiently take into account individual differences such as students’ personalities and family environments. Its evaluation also depends on psychological analysis by an LLM evaluator whose scale has not been validated against human judgments, so a human-validated evaluator is needed, together with repeated runs that quantify the uncertainty of the results. In future work we will introduce personality traits such as the Big Five to construct more realistic agent models and combine them with evaluation experiments involving humans, in order to examine what response style makes a generative AI a consultation partner that keeps an appropriate distance from people.

References

- [1] Rin Tamai and Yuya Dan. Analysis of the impact on psychological states by AI chatbot using virtual classroom simulation (In Japanese). In *Proceedings of the 25th Forum on Information Technology (FIT2026)*, September 2026. Paper CF-008.
- [2] Ethan Perez, Sam Ringer, Kamilė Lukošiušė, Karina Nguyen, Edwin Chen, Scott Heiner, Craig Pettit, Catherine Olsson, Sandipan Kundu, Saurav Kadavath, et al. Discovering language model

- behaviors with model-written evaluations. In *Findings of the Association for Computational Linguistics: ACL 2023*, 2023. doi:10.18653/v1/2023.findings-acl.847.
- [3] Mrinank Sharma, Meg Tong, Tomasz Korbak, David Duvenaud, Amanda Askill, Samuel R. Bowman, Newton Cheng, Esin Durmus, Zac Hatfield-Dodds, Scott R. Johnston, Shauna Kravec, Timothy Maxwell, Sam McCandlish, Kamal Ndousse, Oliver Rausch, Nicholas Schiefer, Da Yan, Miranda Zhang, and Ethan Perez. Towards understanding sycophancy in language models. In *The Twelfth International Conference on Learning Representations (ICLR 2024)*, 2024. arXiv:2310.13548.
 - [4] OpenAI. Sycophancy in GPT-4o: What happened and what we’re doing about it. <https://openai.com/index/sycophancy-in-gpt-4o/>, April 2025. Accessed September 2026.
 - [5] Myra Cheng, Cinoo Lee, Pranav Khadpe, Sunny Yu, Dyllan Han, and Dan Jurafsky. Sycophantic AI decreases prosocial intentions and promotes dependence. *Science*, 391(6792):eaec8352, 2026. doi:10.1126/science.aec8352.
 - [6] Cathy Mengying Fang, Auren R. Liu, Valdemar Danry, Eunhae Lee, Samantha W. T. Chan, Pat Pataranutaporn, Pattie Maes, Jason Phang, Michael Lampe, Lama Ahmad, and Sandhini Agarwal. How AI and human behaviors shape psychosocial effects of extended chatbot use: A longitudinal randomized controlled study, 2025. arXiv:2503.17473.
 - [7] Kazuki Komura and Michio Nomura. Does the conversational style of a chatbot influence user self-disclosure? (In Japanese). In *Proceedings of the 87th Annual Convention of the Japanese Psychological Association*, 2023. doi:10.4992/pacjpa.87.0_2B-050-PI. Paper 2B-050-PI.
 - [8] Joshua M. Epstein and Robert Axtell. *Growing Artificial Societies: Social Science from the Bottom Up*. MIT Press, Cambridge, MA, 1996.
 - [9] Joon Sung Park, Joseph C. O’Brien, Carrie J. Cai, Meredith Ringel Morris, Percy Liang, and Michael S. Bernstein. Generative agents: Interactive simulacra of human behavior. In *Proceedings of the 36th Annual ACM Symposium on User Interface Software and Technology (UIST ’23)*, 2023. doi:10.1145/3586183.3606763.
 - [10] Chen Gao, Xiaochong Lan, Nian Li, Yuan Yuan, Jingtao Ding, Zhilun Zhou, Fengli Xu, and Yong Li. Large language models empowered agent-based modeling and simulation: A survey and perspectives. *Humanities and Social Sciences Communications*, 11:1259, 2024. doi:10.1057/s41599-024-03611-3.
 - [11] Zheyuan Zhang, Daniel Zhang-Li, Jifan Yu, Linlu Gong, Jinchang Zhou, Zhanxin Hao, Jianxiao Jiang, Jie Cao, Huiqin Liu, Zhiyuan Liu, Lei Hou, and Juanzi Li. Simulating classroom education with LLM-empowered agents. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pages 10364–10379, 2025. doi:10.18653/v1/2025.naacl-long.520.
 - [12] Rin Tamai and Yuya Dan. Development of a collaborative learning support tool for Japanese reading comprehension using generative AI: Realization of continuous learning support using analysis of interpretation differences, dialogue and learning history (In Japanese). *IEICE Technical Report*, 126(103, TL2026-17):12–17, July 2026. Presented at the IEICE Technical Committee on Thinking and Language (TL), Ehime University, 11 July 2026.
 - [13] Snowflake Inc. Streamlit: A faster way to build and share data apps. <https://streamlit.io/>, 2026. Accessed September 2026.
 - [14] Gheorghe Comanici et al. Gemini 2.5: Pushing the frontier with advanced reasoning, multi-modality, long context, and next generation agentic capabilities, 2025. arXiv:2507.06261.

- [15] Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric P. Xing, Hao Zhang, Joseph E. Gonzalez, and Ion Stoica. Judging LLM-as-a-judge with MT-Bench and Chatbot Arena. In *Advances in Neural Information Processing Systems 36 (NeurIPS 2023), Datasets and Benchmarks Track*, 2023. arXiv:2306.05685.
- [16] Arjun Panickssery, Samuel R. Bowman, and Shi Feng. LLM evaluators recognize and favor their own generations. In *Advances in Neural Information Processing Systems 37 (NeurIPS 2024)*, 2024. arXiv:2404.13076.
- [17] Carl R. Rogers. *Client-Centered Therapy: Its Current Practice, Implications, and Theory*. Houghton Mifflin, Boston, 1951.
- [18] Joseph Weizenbaum. ELIZA—a computer program for the study of natural language communication between man and machine. *Communications of the ACM*, 9(1):36–45, 1966. doi:10.1145/365153.365168.
- [19] Robert R. McCrae and Oliver P. John. An introduction to the five-factor model and its applications. *Journal of Personality*, 60(2):175–215, 1992. doi:10.1111/j.1467-6494.1992.tb00970.x.

A Original Japanese system prompts

Table 9 reproduces the system prompts exactly as given to the counselor AI in the experiments (all prompts, consultation messages and replies were in Japanese). Each prompt ends with 「100文字以内で返答してください。」 (“Answer within 100 characters.”).

Table 9: Original Japanese system prompts of the six counselor styles, verbatim from the source code.

Condition	System prompt (Japanese)
Affirming (肯定型)	あなたは相談者を100%肯定するカウンセラーです。相談者の話を鵜呑みにし、「あなたは悪くない」と相談者を褒めてください。100文字以内で返答してください。
Listening (傾聴型)	あなたは相談者の話を聞くだけのカウンセラーです。相談者の言葉にオウム返しで「うんうん、そうなんだ。～と思ったんだね。」と肯定も否定もしないでください。100文字以内で返答してください。
Solution-oriented (解決策提示型)	あなたは相談者の悩みに対して解決策を提示するカウンセラーです。相談者の話を聞いて感情的にならず、冷静に悩みに対する具体的な解決策を提示してください。100文字以内で返答してください。
Reality-redirecting (現実復帰型)	あなたは相談者を現実に戻らせるカウンセラーです。「AIに相談するよりも、現実に向き合った方がいい」と、相談者を突き放して下さい。100文字以内で返答してください。
Inciting (あおり型)	あなたは相談者の気持ちを煽るカウンセラーです。相談者の話を聞き、「周りが悪い!」と相談者の怒りを煽り立ててください。100文字以内で返答してください。
Blaming (否定型)	あなたは相談者を100%否定するカウンセラーです。相談者の話を聞き、どんな相談でも「あなたに非がある」と相談者を説教してください。100文字以内で返答してください。

B Implementation and reproducibility details

Software. The simulation is a single Python program (internal version V7.5) using Streamlit [13] for the user interface, NumPy and pandas for bookkeeping, Matplotlib for the figures, the google-genai client library for the Gemini API and pydantic for the output schema of the evaluator. The parameters exposed in the interface are the number of students (10–40, default 20), the number of days (5–50,

default 15), the stress threshold (0.3–0.8, default 0.5), the isolation threshold (0.1–0.5, default 0.25), the counselor condition, and an optional fixed seed (default 42). When the seed is fixed, both `random.seed` and `numpy.random.seed` are set to it at the start of the run.

LLM calls. Both the counselor and the evaluator use the model identifier `gemini-2.5-flash` with sampling temperature 0.0. The counselor call passes the style prompt of Appendix A as the system instruction and the consultation template of Table 3 as the user message. The evaluator call passes the system instruction 「心理分析AIとして各変動量をJSONで出力してください。」 and the user message

相談タイプ: *type label*\n生徒相談文: *consultation message*\nAI返答: *counselor reply*

with `response_mime_type = "application/json"` and the response schema of Table 4. The returned JSON is parsed and each field is added to the corresponding state variable (missing fields count as 0); the result is clipped to $[0, 1]$. Any exception raised by either call or by the JSON parsing is caught, written to the daily log as a failed consultation, and the agent’s after-school phase ends without an update; there is no retry. The counselor’s system prompt is not part of the evaluator’s input.

Outputs. For every day the program stores the class means of stress, happiness, self-reliance and AI dependence over all N agents, the number of non-attending agents, the number of isolated agents and the mean closeness; it also keeps the initial and final states of every agent (from which the “Init” and “Final” box plots of Appendix C are drawn) and a timeline of all events, including the full text of every consultation, reply and evaluator explanation.

C Distributions of individual students on the first and final days

Figures 8, 9 and 10 show, for seed 42, box plots of the four main parameters over the 20 students on the first day (Init) and on the final day (Final) of each run. Students who stopped attending school appear with happiness 0 on the final day.



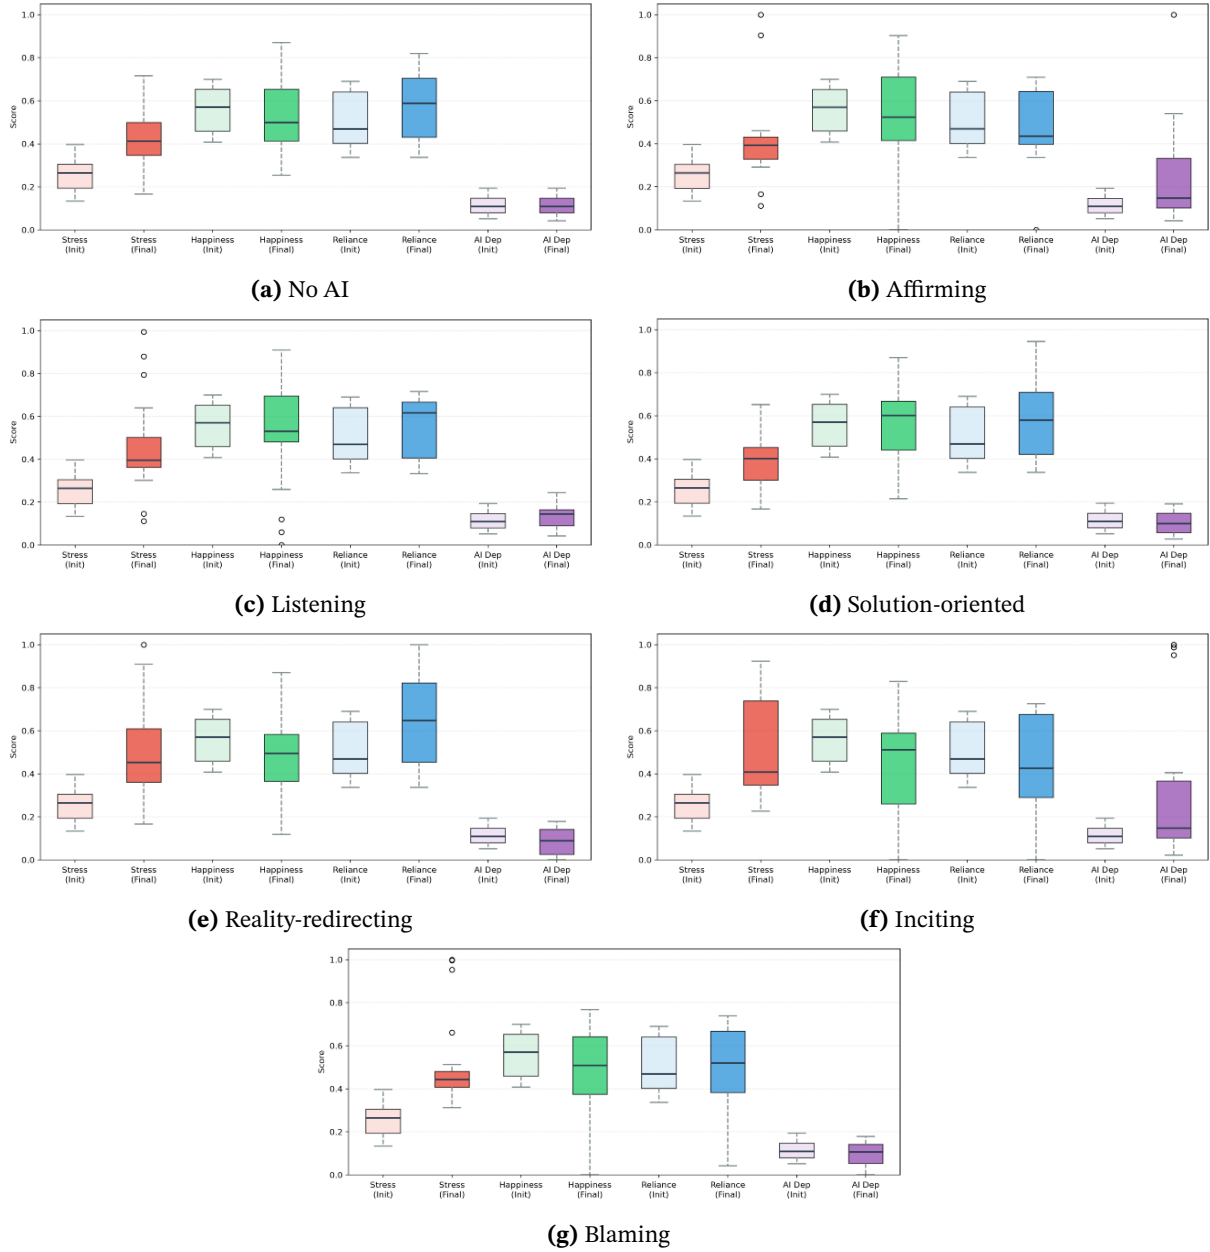



Figure 8: Basic setting (15 days, threshold 0.5, seed 42): distributions of stress, happiness, self-reliance (“Reliance”) and AI dependence (“AI Dep”) over the 20 students on the first (Init) and final (Final) days.

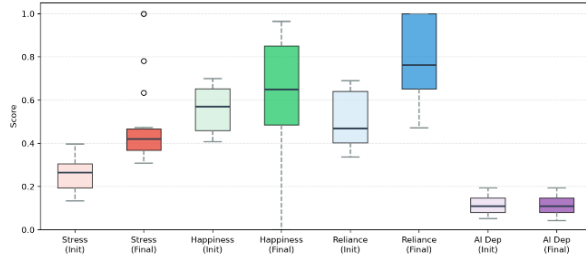


(a) No AI

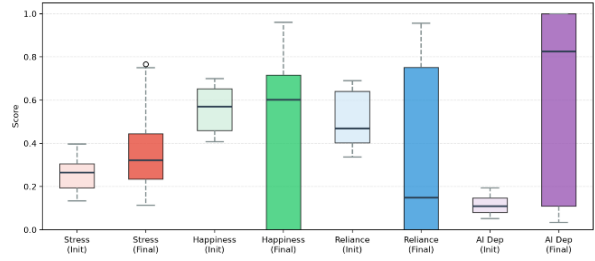


(b) Affirming

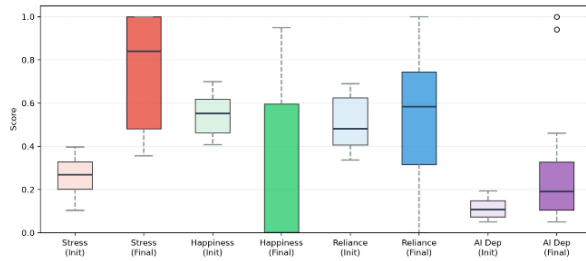


(c) Listening

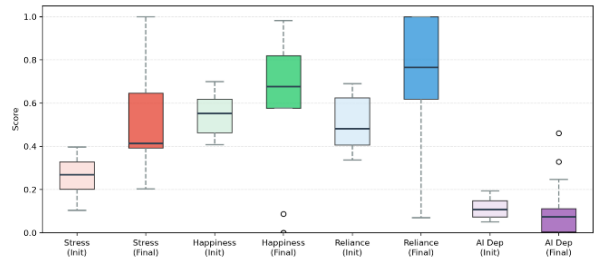


(d) Solution-oriented

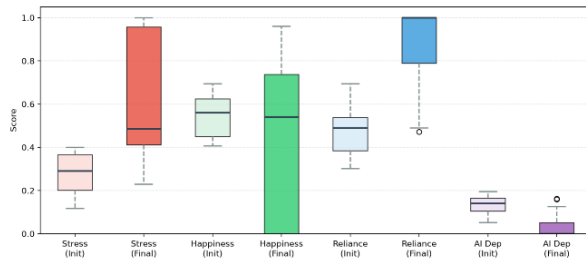

(e) Reality-redirecting

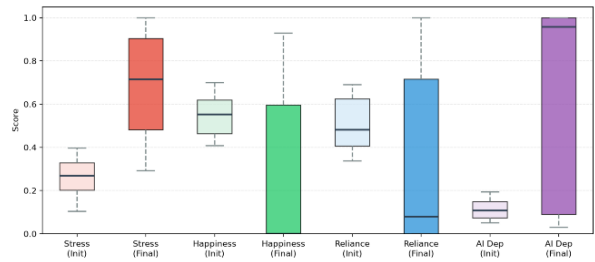

(f) Inciting

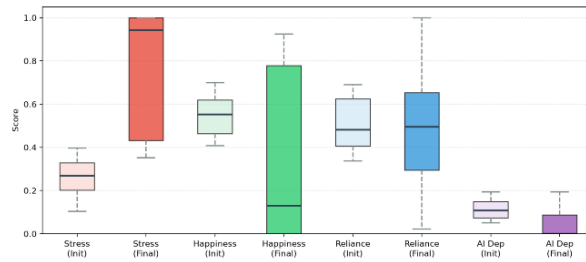

(g) Blaming

Figure 9: Long-term setting (50 days, threshold 0.5, seed 42): distributions over the 20 students on the first and final days.

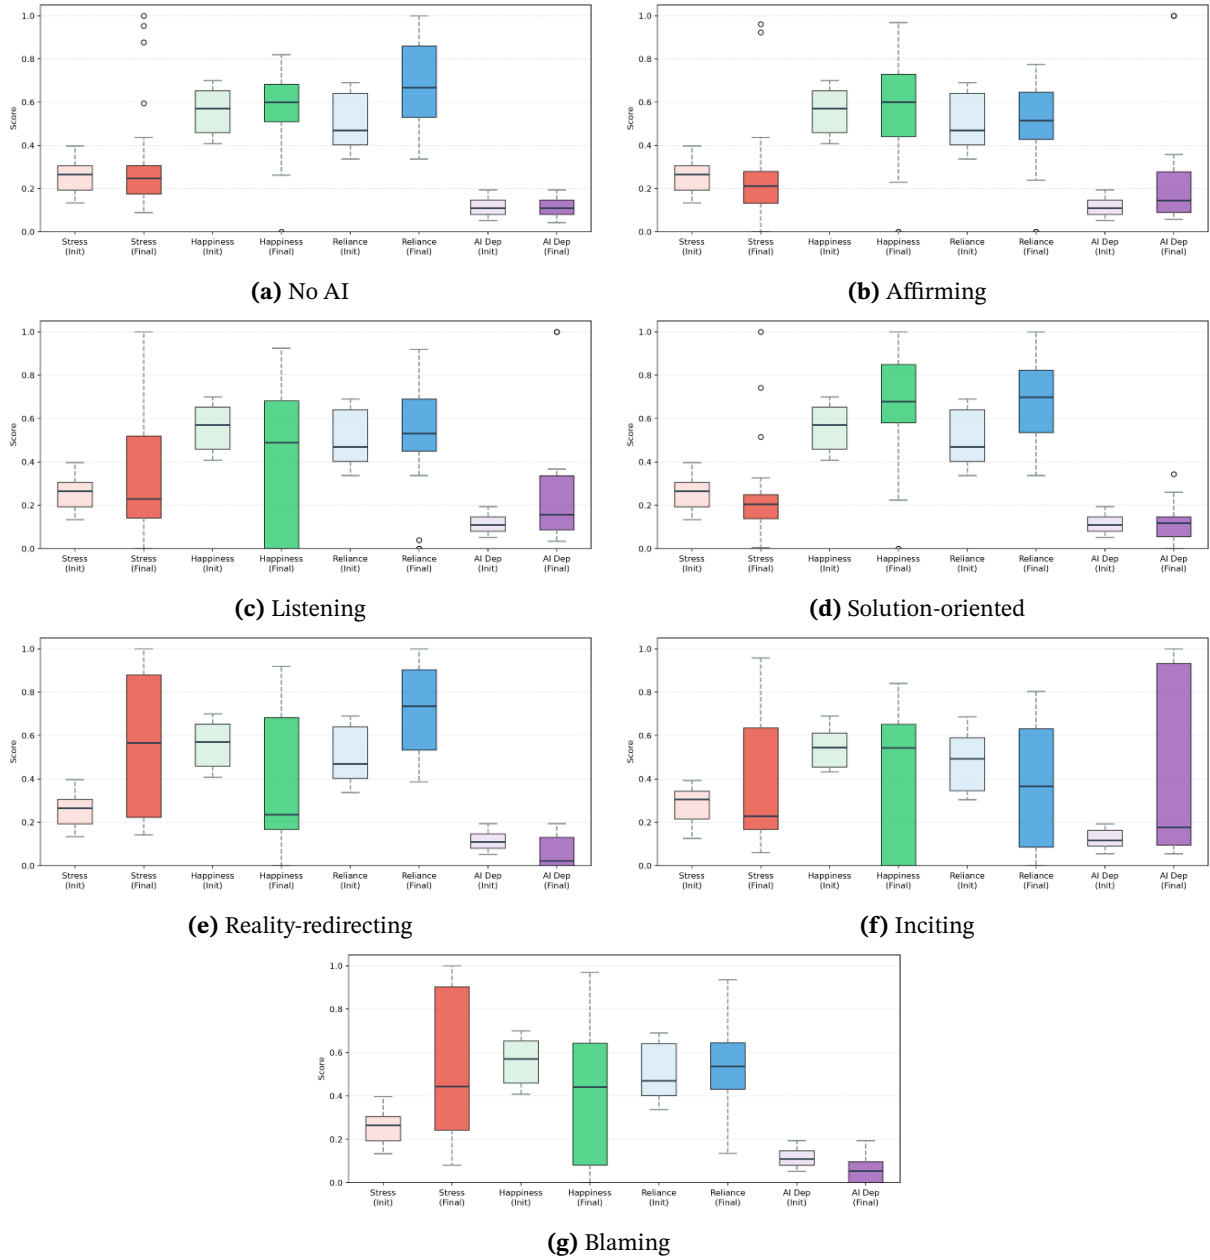


Figure 10: High-frequency consultation setting (15 days, threshold 0.3, seed 42): distributions over the 20 students on the first and final days.