

RoboInter1.5: A Holistic Intermediate Representation Suite for Embodied World Modeling and Robotic Manipulation

Team of RoboInter1.5, full author list in [Contributors](#) section.

Recent breakthroughs in foundation models have driven rapid progress in both vision-language-action (VLA) policies and embodied world models (WM). Yet, existing robot datasets remain expensive to curate, embodiment-specific, and insufficiently annotated with the fine-grained structure required for generalizable reasoning, execution, or long-horizon environment dynamics simulation. Building on our prior work, RoboInter1.0, we present RoboInter1.5, an extended and holistic suite of intermediate representations for both robotic manipulation and embodied world modeling. RoboInter1.5 provides a unified resource of data, benchmarks, and models centered on dense manipulation-oriented intermediate representations. Specifically, RoboInter-Data contains over 230k manipulation episodes across 571 scenes with dense per-frame annotations covering more than ten types of intermediate representations, including subtasks, primitive skills, object and gripper grounding, segmentation, affordance, grasp poses, contact points, motion traces, etc. Built upon these annotations, RoboInter-VQA introduces spatial and temporal embodied VQA tasks to benchmark and improve the intermediate-representation reasoning capabilities of our RoboInter-VLM. RoboInter-VLA further studies how such representations benefit action execution through implicit, explicit, and modular plan-then-execute paradigms. To better model the physical world, we further introduce RoboInter-World, which leverages intermediate representations as structured conditioning signals for controllable prediction of future world states. Extensive evaluations demonstrate that RoboInter1.5 provides a unified spatiotemporal scaffolding for intermediate representations. Rather than treating intermediate representations merely as interpretable signals, RoboInter1.5 conceptualizes them as a bidirectional interface that both regularizes low-level action spaces and constrains the latent rollouts of open-world physical simulators.

 [Code:RoboInter1.5](#) |  [Data:RoboInter-Data](#) |  [Homepage](#)

1. Introduction

Recent advances in large vision-language models (VLMs) have stimulated growing interest in embodied intelligence systems, spanning embodied question answering for scene and task understanding (Fang et al., 2025; Luo et al., 2025b; Team et al., 2025a; Zhou et al., 2025a), vision-language-action (VLA) models (Bjorck et al., 2025; Black et al., 2024; Brohan et al., 2023; Kim et al., 2024; Lu et al., 2025a) for robotic control, and embodied world models (Guo et al., 2025; Hung et al., 2025; Kim et al., 2026; Team et al., 2026; Ye et al., 2026b) for simulating how the world evolve under physical interactions. While web-scale multimodal data equips VLMs with broad semantic reasoning, embodied VLA policies and generative world models struggle to directly inherit these capabilities. Meanwhile, attempting to bridge this divide by curating large-scale robot datasets (Bu et al., 2025; et al., 2023; Khazatsky et al., 2024; Wu et al., 2024) remains prohibitively expensive and tightly coupled to specific embodiments (Fu et al., 2024), imposing a significant bottleneck on scalable generalization.

To address this generalization gap, recent research increasingly leverages structured intermediate representations. On the control side, **modular VLAs** (Belkhale et al., 2024; Huang et al., 2024a, 2023; Liu et al., 2024; Nasiriany et al., 2024) and many **end-to-end VLAs** (Cen et al., 2025; Deng et al., 2025; Du et al., 2023; Lin et al., 2025; Shi et al., 2025; Wu et al., 2025; Yang et al., 2025; Zawalski et al., 2024; Zhou et al., 2025b) integrate subtasks, grounding, or motion traces to decompose monolithic policies and bridge high-level reasoning with low-level control. Concurrently, broader

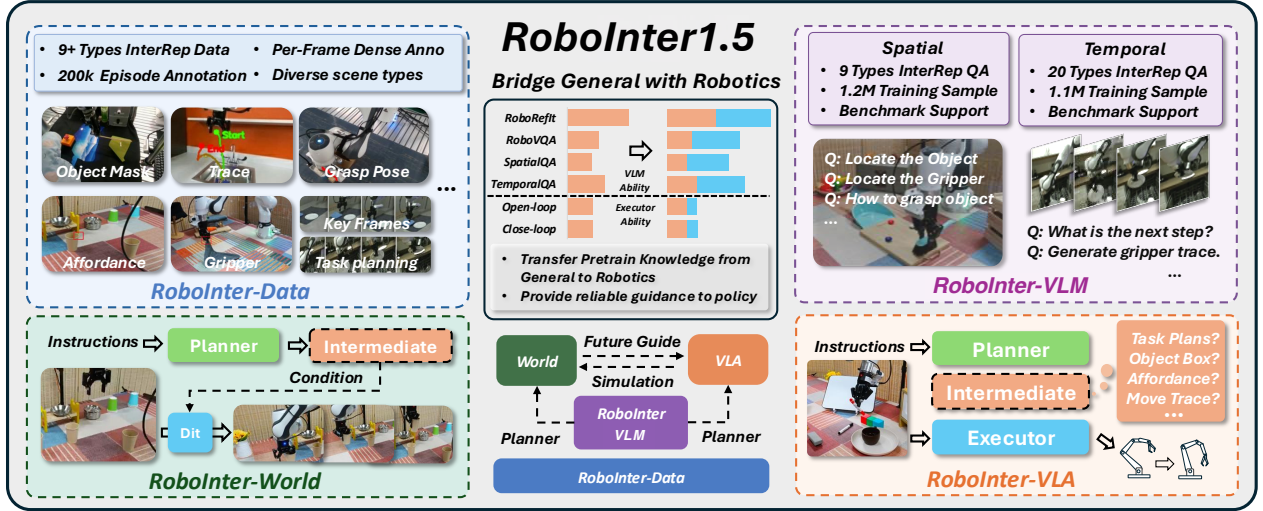


Figure 1. **RoboInter1.5 manipulation suite** includes annotation tools, annotated data, a curated VQA dataset, and their applications in VLMs, VLAs, and World Models. RoboInter provides a dataset with over 230k episodes and 10+ types of intermediate representation annotations, named *RoboInter-Data*; VLMs trained on the curated embodied VQA dataset covering 29 spatial- and temporal-level categories, named *RoboInter-VLM*; an integrated *plan-then-execute* framework for training VLA models, *RoboInter-VLA*; and an intermediate representation guided world model, *RoboInter-World*.

advances in **controllable video generation** (Chu et al., 2025; Kuang et al., 2024; Li et al., 2024b, 2025b; Liang et al., 2024) have demonstrated that structural priors (such as traces or keypoints) are essential to transition from unconstrained visual hallucinations to reliable dynamics synthesis. This insight has driven the adoption of these representations as structural constraints to facilitate long-horizon embodied world modeling. Ultimately, both domains converge on a shared paradigm: leveraging intermediate representations as a universal interface that seamlessly connects semantic understanding, physical execution, and future simulation.

The effectiveness of this shared paradigm critically depends on high-quality intermediate representations. Existing datasets (Bu et al., 2025; et al., 2023; Khazatsky et al., 2024) typically pair visual inputs with high-level instructions and low-level actions, yet they rarely provide the fine-grained structural annotations for intermediate representations, which are required to bridge reasoning, control, and simulation. Furthermore, collecting and manually annotating new data from scratch is prohibitively costly and infrastructure-intensive, leaving massive community-driven open-source datasets underutilized for large-scale intermediate representations training. While recent efforts (Li et al., 2025d; Yuan et al., 2024) have explored automated annotation for existing datasets, they often encounter significant limitations. For instance, LLARVA (Niu et al., 2024) leverages a pretrained gripper detector to extract large-scale motion traces, but it remains highly sensitive to distribution shifts. ECoT (Zawalski et al., 2024) utilizes Gemini (Team, 2023) to generate pseudo-labels for textual planning and object grounding, yet struggles with precise physical alignment. ShareRobot (Ji et al., 2025) combines automated pipelines with manual verification, but operates at a limited scale and yields labels that are temporally misaligned with step-wise actions. Ultimately, the absence of large-scale, high-quality annotations in current open-source datasets severely bottlenecks the advancement of intermediate representations for both VLA models and embodied world models.

To address this gap, based on our prior work, RoboInter1.0 (Li et al., 2026a), we further introduce the **RoboInter1.5 Manipulation Suite**, illustrated in Figure 1. Built upon **RoboInter-Tool**, a lightweight GUI for the semi-automatic per-frame annotation of embodied videos, we curate

Table 1. **Comparison of embodied annotation datasets.** *Emb.-VQA* denotes the availability of curated embodied VQA benchmarks and datasets; *E2E-ACT* indicates whether the annotation is temporally aligned with executed actions; *Curated-CoT* specifies multi-intermediate chain-of-thought support; *IR-Video* indicates whether the dataset provides high-quality video sequences conditioned on dense intermediate representations

Dataset	#Video	#Scene	Dense	Emb. -VQA	E2E -ACT	Curated -CoT	IR -Video	Subtask &Skill	Affor- -dance	Contact Point	Gripper Box	Object Box	Trace	Annotation Type
LLARVA	–	311	✗	✗	✓	✗	✗	✗	✗	✗	✗	✗	✓	Auto
Hamster	136k	–	✓	✓	✓	✗	✗	✗	✗	✗	✗	✗	✓	Auto
RH20T-P	38k	7	✗	✓	✗	✗	✗	✓	✗	✓	✗	✗	✗	Human + Auto
ECoT	60k	12	✓	✗	✓	✓	✗	✓	✗	✗	✓	✓	✗	Auto
AgiBot-World	1M	106	✓	✗	✓	✗	✗	✓	✗	✗	✗	✗	✗	Human
VLA-OS	10k	–	✓	✗	✓	✓	✗	✓	✓	✓	✓	✓	✓	Auto
ShareRobot	51k	102	✗	✓	✗	✗	✗	✓	✓	✓	✗	✗	✓	Human + Auto
Robo2VLM	176k	463	✗	✓	✗	✗	✗	✓	✗	✓	✗	✗	✓	Auto
VeBrain	12k	–	✓	✓	✗	✗	✗	✓	✗	✓	✗	✗	✗	Human
Ours	230k	571	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	Human + Auto

RoboInter-Data, a large-scale dataset featuring dense intermediate representations for robotic manipulation. As shown in Table 1, *RoboInter-Data* encompasses over 230k episodes across 571 distinct scenes, significantly surpassing LLARVA (Niu et al., 2024), ECoT (Zawalski et al., 2024), and ShareRobot (Ji et al., 2025) in both scale and environmental diversity. Unlike prior datasets constrained by limited scene variations (Chen et al., 2024) or heavily reliant on noisy automated pipelines (Li et al., 2025d; Zawalski et al., 2024), *RoboInter-Data* uniquely guarantees high fidelity by combining scalable automatic generation with rigorous human-in-the-loop verification. This constitutes a large open-source real-world manipulation dataset offering dense, per-frame annotations across a comprehensive taxonomy of more than ten categories. These seamlessly integrate high-level semantics (subtasks, primitive skills), 2D/3D visual grounding (segmentation masks, gripper bounding boxes, affordances, placement proposals), and precise physical geometries (grasp poses, motion traces, contact points). Crucially, all annotations are strictly synchronized temporally with executed actions, robot states, and two-view visual observations (third-person and wrist-mounted cameras), establishing a robust data foundation for both end-to-end action learning and world modeling.

Leveraging these fine-grained annotations, we develop three downstream frameworks to validate the utility of our intermediate representations systematically. First, we introduce **RoboInter-VQA** to benchmark and enhance the spatial-temporal reasoning capabilities of VLMs, comprising 9 spatial and 20 temporal VQA categories tailored for embodied scenes. Built upon the **RoboInter-VLM** planner trained on this curated VQA data, we present **RoboInter-VLA**, an integrated control framework supporting both modular and end-to-end variants. This enables rapid adaptation from semantic planning to low-level execution, allowing us to systematically investigate the impact of intermediate representations on policy generalization and controllability. Extending beyond reasoning and control, we introduce **RoboInter-World**, a controllable embodied world model. By utilizing our dense, per-frame intermediate representations as structural constraints, it effectively mitigates unconstrained visual hallucinations, enabling reliable, long-horizon forward dynamics simulation. Through extensive experiments, we demonstrate that *RoboInter-Data* substantially improves the reasoning capabilities of VLM planners, particularly in understanding and generating manipulation-oriented representations. Furthermore, open- and closed-loop evaluations confirm that these structured priors provide significant performance and generalization gains to VLA policies. Meanwhile, we find that the future images predicted by *RoboInter-World* can effectively improve the action prediction accuracy of *RoboInter-VLA*. By analyzing the trade-offs among different VLA and world model variants, we establish a unified foundation for leveraging these data in diverse tasks. In this work, we extend several key

improvements over the prior RoboInter1.0 version (Li et al., 2026a), including:

- **Extension of the Benchmark:** Building upon *RoboInter-Data*, we construct *RoboInter-CV*, a novel long-horizon benchmark for embodied world modeling conditioned on intermediate representations. To the best of our knowledge, this is the first dataset in the Embodied AI field specifically designed to utilize intermediate representations as the primary guidance for world models in long-horizon manipulation tasks.
- **Methodological Advancement:** Extending the application of intermediate representations from VQA (*RoboInter-VLM*) and Robotic Manipulation (*RoboInter-VLA*) to the realm of video generation, we introduce *RoboInter-World*. This novel world model architecture is explicitly designed for intermediate representation guidance. By effectively capturing and utilizing these visual cues, *RoboInter-World* achieves superior generalization capabilities across diverse manipulation scenarios.
- **Extended Comprehensive Evaluation:** Utilizing the newly established *RoboInter-CV* benchmark, we have conducted extensive new experiments to evaluate world models and how world models guide VLA models. These evaluations, including various model variants and systematic ablation studies, provide deep insights into how intermediate representations fundamentally enhance performance and physical realism.

2. Related Works

2.1. Embodied intermediate representations and datasets.

Embodied intermediate representations have emerged as an important interface between high-level planning and low-level action execution. Existing studies have explored a wide range of such representations, including 2D visual traces (Gu et al., 2023), optical flow (Xu et al., 2024), object grounding and affordance box (Huang et al., 2025, 2024b; Sundaresan et al., 2023), subtasks planning (Belkhale et al., 2024; Zhang et al., 2024), task-oriented pointing (Li et al., 2025d; Xue et al., 2025), future images or goal states (Lv et al., 2025; Ma et al., 2026; Xu et al., 2026; Zhao et al., 2025), 3D reconstruction (Yang et al., 2026), and language-based reasoning chains (Guo et al., 2023; Ji et al., 2025). These representations provide more structured and physically meaningful supervision than raw action tokens alone, and therefore serve as an intermediate abstraction for decomposing manipulation tasks and guiding action generation. Despite the strong perception ability of vision foundation models (Morimitsu et al., 2025; Oquab et al., 2023; Ravi et al., 2024), directly applying them to embodied manipulation remains challenging. General models can estimate certain visual cues, but their reliability often fluctuates across diverse physical scenes due to the domain gap between web-scale data and embodied observations. Consequently, recent works (Dang et al., 2026; Luo et al., 2025a; Tan et al., 2026; Team et al., 2025a) has shifted from using off-the-shelf vision models alone toward curating task-specific embodied datasets and training VLMs to understand or generate embodied intermediate representations. For example, RoboBrain (Team et al., 2025a) emphasizes planning, affordance perception, and trajectory prediction as core capabilities.

Large-scale robotic manipulation datasets (et al., 2023; Fang et al., 2023; Gao et al., 2025b; Hou et al., 2025; Khazatsky et al., 2024) provide diverse embodiments, scenes, and manipulation skills, forming the data foundation for robotic manipulation systems. However, these datasets are usually collected for imitation learning and typically lack labels for intermediate representations. This absence makes it difficult to train VLMs to explicitly bridge abstract instructions and concrete physical behaviors. To compensate for this limitation, a line of work augments existing robot demonstrations with additional annotations. RH20T-P (Chen et al., 2024) and RT-H (Belkhale et al., 2024) provided extra primitive-level subtasks or motion-level language descriptions, providing temporally structured

supervision for hierarchical planning. LLaRVA (Niu et al., 2024), Hamster (Li et al., 2025d), and related trajectory-centric methods extract 2D gripper traces from demonstrations for VLM pretraining, enabling models to predict spatially grounded action traces. ECoT (Zawalski et al., 2024) and Emma-X (Sun et al., 2024) further combine trajectory clips with grounded chain-of-thought and spatial reasoning. Other works focus on a single type of representation or high-level embodied understanding: RoboPoint (Yuan et al., 2024) and Point-It-Out (Xue et al., 2025) study pointing or visual trace generation for embodied grounding, ManipVQA (Huang et al., 2024b) injects manipulation-centric affordance and physical concept knowledge into MLLMs, and RoboAnnotatorX (Kou et al., 2025) formulates robotic scene understanding, long-horizon reasoning, and interaction-phase recognition as VQA-style supervision.

However, relying on single-modality representations or post-hoc extraction limits the richness of embodied planning. In contrast, RoboInter (Li et al., 2026a) and RoboInter1.5 introduce *per-frame* dense annotation data across diverse intermediate representations, covering both low-level spatial cues and high-level task planning within a unified suite. This design advances both comprehensive embodied understanding and end-to-end action learning, and offers a practical foundation for bridging high-level planning with low-level execution in generalizable robotic manipulation.

2.2. Embodied reasoning and world modeling for actions.

To bridge embodied reasoning and low-level action execution, recent research has focused on two parallel paradigms. The first paradigm leverages the profound semantic reasoning capabilities of VLMs in VLA models, which are generally divided into implicit and explicit reasoning. Implicit methods operate as black boxes (Black et al., 2024; Li et al., 2025a, 2023; Ye et al., 2026c), fine-tuning pretrained VLMs across various datasets to directly regress raw actions. In contrast, explicit methods prioritize interpretability, as seen in $\pi_{0.5}$ (Intelligence et al., 2025) and Rekep (Huang et al., 2024c). Building on this, models like ECoT (Zawalski et al., 2024) and VLA-OS (Gao et al., 2025a) introduce explicit text-based Chain-of-Thought (CoT), prompting VLMs to autoregressively generate step-by-step textual planning before discrete actions. While this language-driven planning inherits strong zero-shot generalization of VLMs, it suffers from a critical lack of perceptual priors, as language instruction is an inherently sparse representation (Psiris et al., 2026) and struggles to convey dense, high-frequency physical cues. Consequently, purely language-driven CoT is difficult to ground in physical reality, necessitating auxiliary perceptual structures to capture fine-grained visual information.

Another paradigm advocates for generative world modeling to act as an internal predictive simulator (Gao et al., 2026; Li et al., 2025c; Lou et al., 2026; Pai et al., 2025; Team et al., 2025b). These models attempt to explicitly simulate the physical evolution of the environment. Architectures like Cosmos-Policy (Kim et al., 2026), Genie Envisioner (GE) (Liao et al., 2025), lingbot-va (Li et al., 2026b), $\pi_{0.7}$ (Intelligence et al., 2026) and DreamZero (Ye et al., 2026a) jointly predict visual futures and optimal actions, while platforms like GigaWorld-0 (Team et al., 2025b) and Gaussian World Models (Lu et al., 2025b) tackle multi-view coherence and spatial rigidity through 3D representations and physical foresight rewards. Despite offering a visually grounded reasoning mechanism, generative approaches suffer from systemic limitations when extended to long-horizon rollouts, largely due to the inadequacy of their conditioning signals. Language-conditioned video generation often hallucinates intermediate physical dynamics because text provides only coarse spatial constraints, while action-conditioned simulators rely primarily on raw motor actions, which lack intrinsic geometric semantics and impose an unintuitive representation on continuous dynamics (Psiris et al., 2026). As a result, errors accumulate over time, ultimately making the generated futures unreliable for precise control.

RoboInter1.5 goes beyond CoT planning by systematically investigating the role of intermediate representations in embodied reasoning, particularly for complex, long-horizon tasks in diverse real-

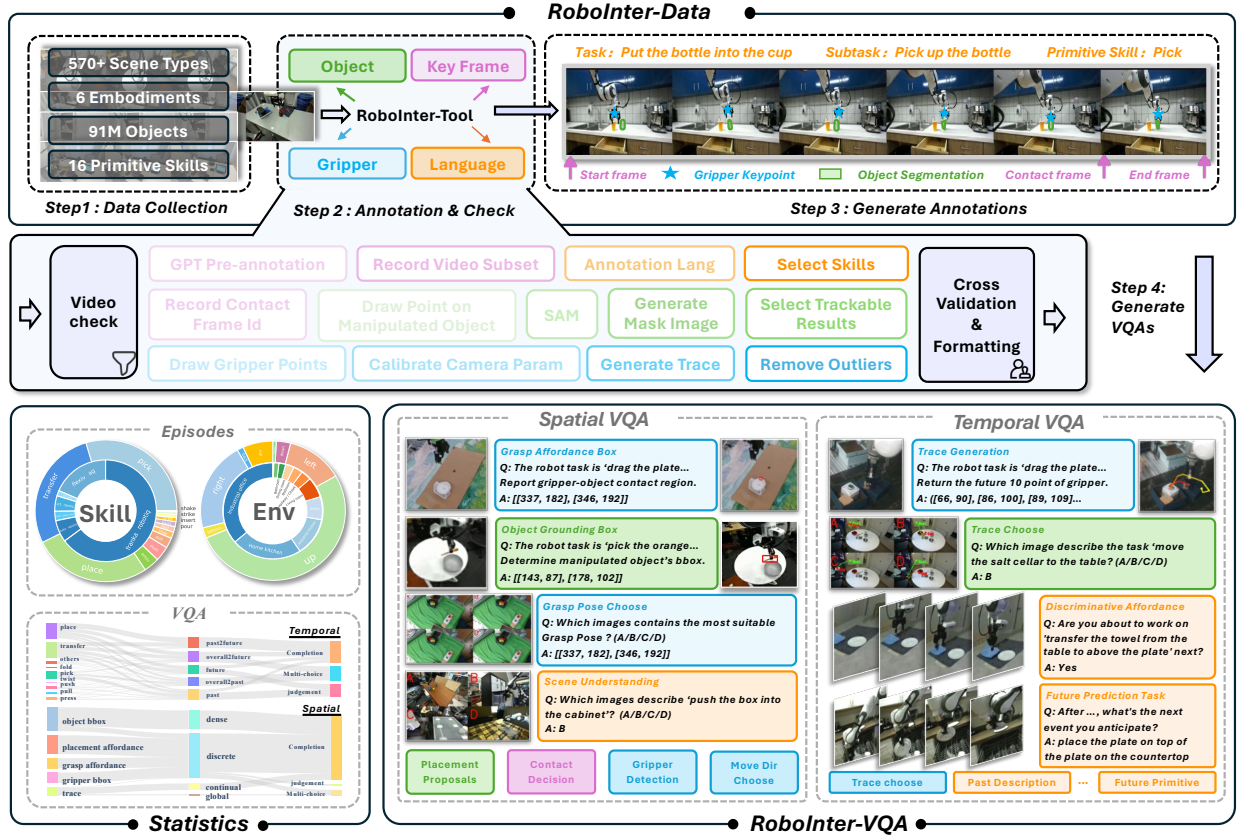


Figure 2. **Overview of RoboInter-Data and RoboInter-VQA.** We annotate 230k manipulation episodes with 10 types of intermediate representation annotations through Data Collection and Annotation & Check. A large-scale, diverse set of VQA spanning spatial and temporal dimensions is further constructed. Statistics of raw episodes and curated VQA are also provided.

world settings. In addition, we study world modeling based on intermediate representations, which effectively captures and leverages task-relevant visual cues to enable accurate long-horizon rollouts and stronger generalization capabilities.

3. Dataset

3.1. RoboInter-Data

As illustrated in Figure 2, RoboInter-Data builds upon extensive manipulation datasets and provides large-scale, high-quality annotations of diverse intermediate representations.

Data collection. To enhance dataset diversity, we collected two types of raw manipulation data: (1) *In-the-Wild setting* (i.e., diverse indoor scenarios), emphasizing the diversity of scenes and instructions, mainly collected from Droid (Khazatsky et al., 2024), RH20T (Fang et al., 2023), and OXE (et al., 2023). (2) *Table-Top setting* (i.e., tabletop interaction scenarios), highlighting the high quality and skills diversity, collected from RH20T (Fang et al., 2023). By integrating raw teleoperated video recordings of these datasets, followed by rigorous screening and pre-processing, we constructed a high-quality, large-scale database consisting of 230k manipulation episodes (third-person videos).

Annotations & Check with RoboInter-Tool. For accurate and comprehensive labels, *RoboInter-Tool* is employed to perform the following annotations: (1) *Task decomposition & key-frame annotation.*

Each manipulation video is decomposed into clips using 15 predefined primitive skills, and ChatGPT (OpenAI, 2023) is employed to produce preliminary references for language annotations. Human annotators utilize *RoboInter-Tool* to segment video clips, assigning each clip to a primitive skill, and simultaneously completing clip-level and video-level language annotations. The *contact frame* where the robot arm contacts the manipulated object is also recorded. **(2) Recognizing the manipulated object.** After recording the object that the robot arm interacts with, *RoboInter-Tool* automatically transports the annotation to SAM2 (Ravi et al., 2024) for object segmentation and tracking, and the result is asynchronously returned for review. A re-annotation and inspection mechanism reduces the impact of segmentation or tracking errors on the quality. **(3) Locating the end-effector.** As many raw recordings lack reliable camera parameters, directly projecting 3D coordinates to obtain accurate 2D end-effector traces is often infeasible. We estimate a calibration matrix to improve projection accuracy and complement parameter-missing episodes via gripper detection and point tracking, enabling reliable reconstruction of the 2D trace. Details are provided in Appendix.

Post-processed annotations. By reorganizing the above annotations, we derive additional intermediate representations: **(1) Grasp annotation.** The grasp affordance box is inferred from the 2D end-effector location at the annotated contact frame. The contact points are the pre-defined key points of the gripper at the moment of contacting, while the corresponding robot state (i.e., the 6D end-effector pose) defines the grasp pose. **(2) Placement annotation.** The object position at the end of the subtask is treated as the target placement location. **(3) Gripper annotation.** Anchor points enclosing the gripper are identified and projected from 3D to 2D using camera parameters and robot states, forming the gripper bounding box on the 2D image coordinates.

Statistics of RoboInter-Data. As shown in Figure.2, we provide high-quality, scene-diverse intermediate representation annotations for 230k manipulation episodes. This dataset includes 6 types of robot arms, 571 types of scenes, and 15 types of primitive skills. With the assistance of the *RoboInter-Tool*, we produce nearly 61M-frame object grounding annotations, about 70M-frame gripper trace annotations, 190k affordance boxes and placement proposals, and nearly 760k language clip annotations, providing both large scale and high quality.

3.2. RoboInter-VQA

VQA task construction. As illustrated in the *RoboInter-VQA* section of Figure.2, we convert the annotations into diverse VQA tasks to enhance VLM capabilities. Tasks are organized along two axes: (i) intermediate representation type (spatial vs. temporal) and (ii) target capability (understanding vs. generation). **(1) Spatial VQA for understanding.** We design three selection tasks and one judgment task to train spatial comprehension, including selecting the correct object bounding box or grasp pose, matching scenes to instructions, and determining whether contact occurs. **(2) Spatial VQA for generation.** It includes five prediction tasks that require generating spatial intermediate representations for downstream execution and complete specific content based on spatial reasoning, which includes object bounding box, grasp pose, placement proposal, key points, and the gripper bounding box. **(3) Temporal VQA for understanding.** To evaluate how the VLMs understand motion traces and the relationships between subtasks and observations, we design selection tasks and judgment tasks for temporal information. We design five selection tasks for movement directions of grippers, the matching of trace and description, subtask/primitive discrimination, and execution stage identification. Four judgment tasks assessing task success and next-step feasibility. **(4) Temporal VQA for generation.** We formulate tasks that require trace generation and multi-step planning under varying levels of contextual completeness. Prompts condition on different amounts of prior information (e.g., past subtasks or overall instructions) and ask the model to predict the subsequent steps or multi-step planning. Video-based visual inputs are also used to summarize past events and

predict feasible next steps. Trace generation is evaluated under both easy and challenging settings (with or without initial waypoints). Details are included in the Appendix.

Statistics of RoboInter-VQA. Our VQA data is also large in scale, comprising approximately 1M spatial generation entries, 172k spatial understanding entries, 131k temporal generation entries, and 935k temporal understanding entries. To prevent information leakage between training and validation, we carefully designate 7,246 videos as the evaluation pool with the remaining data used for training, and sample validation sets for each question category from this pool.

3.3. RoboInter-CV

Data construction. Currently, long-horizon robotic world imagination remains difficult when models are conditioned only on natural language or actions. Language instructions are usually too coarse to describe detailed object motion, contact timing, and spatial constraints, while robot actions are low-level embodiment-specific signals whose visual consequences are difficult to align with image-space dynamics. This mismatch becomes more severe over long horizons, where small temporal or spatial errors accumulate and lead to object drift, inconsistent contacts, or implausible motion. To provide a more direct and visually aligned control signal, we construct **RoboInter-CV**, a control-video dataset derived from *RoboInter-Data*. For each manipulation episode, we first sample representative object points from the annotated segmentation masks and track them across time, converting dense object masks into sparse object-centric motion cues. We then render these tracked object points together with gripper traces into a compact video on a black canvas, using the same temporal axis as the original trace annotations. To ensure data quality, we filter training clips by checking whether the corresponding future window contains sufficient valid visual controls. Specifically, we build frame-level validity masks from segmentation and trace annotations, where a valid frame requires a non-trivial object mask and a non-empty trace signal. We also discard episodes with missing RGB videos, missing annotations, overly short latent sequences, or no valid anchor frame. The resulting control videos remove appearance details while preserving object-centric spatial cues and gripper motion, offering dense visual conditions that bridge coarse language, low-level actions, and future observation prediction.

Data Statistics. It contains 65k clip-level samples from 16.9k unique manipulation episodes, covering both DROID and RH20T sources. Each retained sample is paired with a rendered control video, gripper trace, robot action sequence, language instruction, subtask, RGB observation, and future latent chunk, ensuring complete alignment among visual controls, low-level actions, and future states. We render the control videos at the same resolution as that used for world-model training, and employ them as structured visual conditions for controllable future prediction in *RoboInter-World*.

4. Method

In this section, we present how intermediate representations are used by embodied models. We first introduce the shared VLM-based Planner, which learns to understand and generate intermediate representations from *RoboInter-VQA* supervision. We then describe two downstream instantiations: *RoboInter-VLA*, which follows a *plan-then-execute* paradigm for action generation, and *RoboInter-World*, which performs intermediate-conditioned future observation generation with explicit visual controls.

4.1. RoboInter-VLM Planner

VLMs as Planner. The Planner model acquires embodied capabilities through a visual question answering formulation with a co-training strategy. To capture both spatial and temporal information,

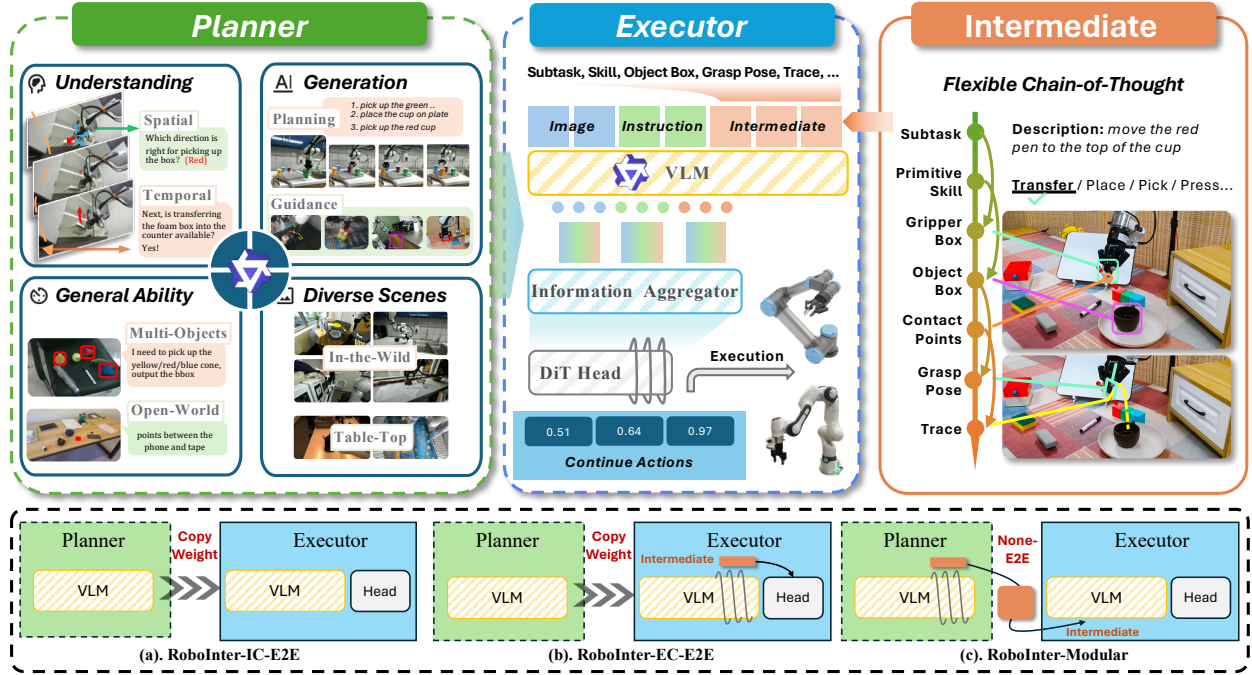


Figure 3. **Framework of RoboInter-VLA.** Our model follows a *plan-then-execute* paradigm with a VLM-based *Planner* and an *Executor*. The *Planner* exhibits enhanced understanding and generation for manipulation, strong general grounding abilities, and robust perception across diverse scenes. The *Executor* shares the VLM backbone with the *Planner*. Three variants are supported, and intermediate representations in Flexible Chain-of-Thought (F-CoT) bridge planning and execution.

we adopt VLM architectures that support single- and multi-image inputs, including the Qwen-VL series (Wang et al., 2024b) and LLaVA-One-Vision (Li et al., 2024a). Each model consists of a base LLM, a vision encoder, and an MLP-based vision-language projector. The *Planner* generates outputs autoregressively and is optimized using a cross-entropy loss.

The *Planner* serves as a shared source of intermediate representations for downstream modules. Since *RoboInter-VLA* inherits a VLM backbone from the *Planner*, it can incorporate intermediate representations through implicit feature transfer, explicit joint reasoning, or modular planner-to-executor conditioning, as detailed in Section 4.2. In contrast, *RoboInter-World* mainly focuses on video generation and does not adopt the same implicit or end-to-end integration with VLM used in *RoboInter-VLA*. Instead, it uses intermediate representations as explicit visual controls for future observation generation. Therefore, we focus on how these controls are injected into the world model and compare controls from ground-truth intermediate representation annotations and *Planner*-predicted intermediate representations.

4.2. RoboInter-VLA: Plan-Then-Execute

As illustrated in Figure 3, *RoboInter-VLA* is a family of models following a *plan-then-execute* paradigm, consisting of a *Planner* and an *Executor*. Rather than a monolithic design, *RoboInter-VLA* supports multiple variants and enables flexible adaptation from planning to execution. The *Planner* performs high-level decision-making by combining general and embodied reasoning to produce intermediate representations, which guide the *Executor* in translating multimodal observations and language instructions into low-level actions.

Executor Architecture. Our model designs mainly follow InternVLA-M1 (Chen et al., 2025) and CogACT (Li et al., 2024c). To systematically and lightweightly derive from the Planner, we build Executor on a Qwen2.5-VL backbone with a Diffusion Transformer (DiT) action head (Peebles and Xie, 2023). We further utilize an *information aggregator* that gathers the hidden states of all input and output tokens, as well as intermediate representations, and compresses them into conditioning features with a controllable length. The *Executor* consumes multi-view visual observations (e.g., primary and wrist), language instructions, and intermediate representations (based on primary observation), and produces multi-step action chunks via a diffusion loss.

Plan-Then-Execute Paradigms. As shown in Figure 3, by leveraging the pretrained Planner, we provide three paradigms to enhance downstream action execution: (1) *RoboInter-IC-E2E (Implicitly-Conditioned End-to-End)*, which directly injects the VLM from a pretrained Planner into the end-to-end Executor, using it as a stronger vision-language feature extractor. This approach can yield robust embodied perception and more accurate task-relevant visual cues. (2) *RoboInter-EC-E2E (Explicitly-Conditioned End-to-End)*, where the Executor is initialized with the VLM of the Planner and jointly optimizes both reasoning and action generation. (3) *RoboInter-Modular (Modular Planner-to-Executor)*, a non-E2E hierarchical design that treats the Planner and Executor as independent modules. During training, the Executor conditions on ground-truth intermediate representations to generate actions, whereas during inference, it uses the predicted results of the Planner.

Flexible chain-of-thought for intermediate representations. To support the explicitly conditioned and modular architectures, we introduce **F-CoT**, a chain-of-thought composed of multiple intermediate representations. F-CoT plays two roles: (i) as VQA supervision for training the Planner, and (ii) as action-aligned guidance for the Executor. In *RoboInter-IC-E2E*, the VLM generates F-CoT content, which is directly consumed by the DiT head. In *RoboInter-Modular*, the Planner produces the F-CoT content and the Executor conditions on it. F-CoT flexibly combines representations such as subtasks, skills, object bounding boxes, affordance boxes, motion traces, etc., in textual or visual form, allowing users to select subsets tailored to specific embodied tasks. We denote textual F-CoT as *RoboInter-Te-Modular* and visual-prompted F-CoT as *RoboInter-Im-Modular*.

4.3. RoboInter-World: Controlled Imagination

RoboInter-World extends *RoboInter* from action execution to future observation generation. Given observed history frames and intermediate controls, *RoboInter-World* generates future observations in the latent video space. Let z^{hist} denote the observed history latents and x_t denote the noisy future latent at diffusion timestep t . The denoising model is formulated as:

$$f_{\theta}(x_t, t \mid z^{\text{hist}}, c, a, u), \quad (1)$$

where c is the language instruction, a is the robot action sequence when used, and u is the control video rendered from intermediate representations. After iterative denoising, the predicted future latents are decoded by the 3D VAE into RGB observations. The model is optimized by

$$\mathcal{L}_{\text{world}} = \mathbb{E}_{y, \epsilon, t} \left[\left\| v_t - f_{\theta}(x_t, t \mid z^{\text{hist}}, c, a, u) \right\|_2^2 \right], \quad (2)$$

where v_t is the flow-matching target from the noisy future latent x_t to the clean future latent y .

Control Video from Intermediate Representations. The control video is constructed using the intermediate representations from *RoboInter-Data*. As described in RoboInter-CV, for object-centric control, we translate dense visual information into concise positional cues by uniformly sampling points within object bounding boxes or segmentation masks, and for gripper-centric control, we

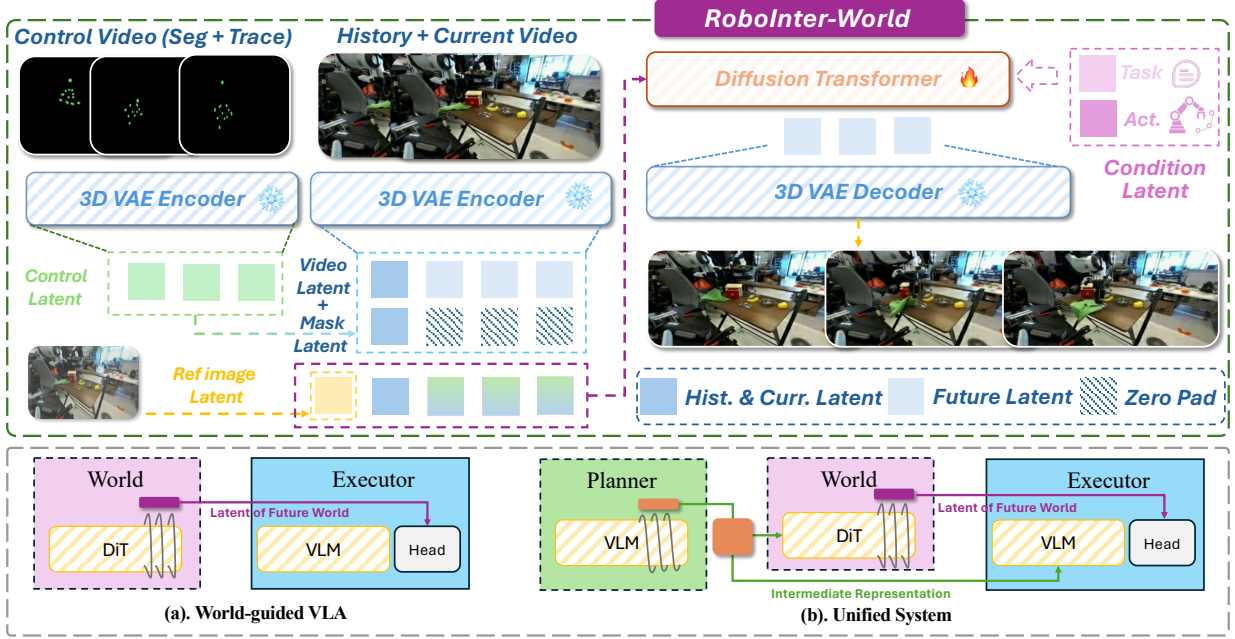


Figure 4. **Overview of RoboInter-World.** The mask latent is employed to encode temporal information, explicitly distinguishing between historical/current states and future contents. The control video is encoded into control latents, which are subsequently concatenated with the input latents along the channel dimension. Concurrently, conditioning latents (when available), comprising language instructions and robot actions, guide the diffusion transformer via the cross-attention blocks in the DiT architecture. Two variances in which *RoboInter-World* guides the action executor are also illustrated.

leverage 2D gripper traces. Crucially, the formulation of these conditions significantly impacts model performance. We empirically observe that directly injecting raw numerical coordinates via MLPs struggles to provide sufficient spatial grounding for the diffusion model. Furthermore, visual feature-replacement techniques (e.g., Wan-Move (Chu et al., 2026)) tend to introduce noisy conditioning when dealing with objects undergoing substantial topological or state changes, such as cloth folding or gripper articulation. To overcome these limitations, we explicitly render both the extracted object points and the gripper traces onto a blank canvas, temporally aligned with the original observations. By encoding intermediate representations in a visual form, we can effectively exploit the strong spatial priors embedded in pretrained vision models, thereby accelerating training convergence while avoiding the noise artifacts introduced by direct feature replacement.

World Model Architecture. We instantiate *RoboInter-World* based on a latent video diffusion transformer. As shown in Figure 4, the model processes heterogeneous inputs through modality-specific pathways. Language instructions c and action sequences a are encoded and concatenated to form the cross-attention context:

$$h^{\text{ctx}} = [\phi_{\text{text}}(c); \phi_{\text{act}}(a)].$$

The VAE-encoded control latent s^{ctrl} and a mask latent m , which explicitly distinguishes historical states from future contents, are concatenated with the video latents along the channel dimension. The resulting features are then flattened into spatio-temporal tokens. Specifically, the token sequences of the noisy future x_t and the clean history z^{hist} are concatenated along the sequence dimension, followed by the integration of CLIP-based reference image tokens z^{ref} . Finally, taking these integrated spatio-temporal tokens as input and conditioned on h^{ctx} , the DiT module predicts the flow target $\hat{v}_t$.

Control Protocol. During training, *RoboInter-World* follows a teacher-forcing setup. However, to miti-

Table 2. **Performance comparison on third-party benchmarks.** Including **Embodied**, **Grounding**, and **General** benchmarks for general VLMs (upper) and embodied VLMs (lower).

Model Name	Embodied			Grounding			General					
	Where-2place↑	RoboRefIt-test↑	Robo-VQA↑	Refcoco-g-val↑	Refcoco+val↑	Refcoco-val↑	Text-VQA↑	CO-CO↑	OCR-bench↑	MME↑	MM-VET↑	POPE↑
InternVL3-1B	2.65%	7.0%	30.5	79.8%	73.2%	83.0%	75.1	23.7	798	1907	58.9%	90.7%
InternVL3-2B	1.86%	27.5%	27.7	87.6%	84.0%	85.8%	77.0	27.9	835	2186	62.2%	89.6%
InternVL3-8B	1.95%	27.7%	27.9	89.6%	88.2%	92.5%	80.2	26.5	<u>880</u>	2410	81.3%	<u>91.1%</u>
QwenVL2.5-3B	11.8%	68.9%	37.6	85.2%	82.4%	89.1%	79.3	15.7	797	2175	61.8%	85.9%
QwenVL2.5-7B	18.9%	75.8%	38.4	87.2%	84.2%	90.2%	84.9	15.0	864	2306	67.1%	85.9%
LLaVA-OV-7B	7.9%	10.4%	31.4	71.9%	69.7%	73.8%	71.1	8.4	882	<u>2307</u>	<u>67.3%</u>	86.4%
RoboBrain-2.0-3B	59.8%	30.9%	30.6	55.0%	51.5%	50.9%	81.0	<u>27.2</u>	811	2126	59.4%	88.1%
RoboBrain-2.0-7B	63.6%	8.8%	31.6	62.9%	70.1%	76.1%	75.9	25.2	857	2076	61.4%	86.2%
RoboInter-Qwen-3B	58.3%	80.0%	43.3	87.9%	85.8%	89.5%	78.9	15.6	787	2180	61.0%	90.5%
RoboInter-Qwen-7B	<u>65.8%</u>	<u>85.6%</u>	<u>74.4</u>	<u>88.4%</u>	<u>86.6%</u>	<u>91.5%</u>	<u>83.0</u>	15.9	832	2281	62.3%	91.4%
RoboInter-LLaVAOV-7B	66.3%	89.3%	74.5	87.3%	84.2%	91.3%	72.2	15.8	725	2217	61.4%	90.4%

gate the discrepancy between training and testing distributions, we introduce stochastic perturbations to the intermediate representations. This strategy enhances the model’s robustness against imperfect, planner-generated controls during inference. So during inference, we evaluate two control protocols. In the oracle-control protocol, control videos are rendered from ground-truth annotations, measuring the upper-bound utility of high-quality intermediate representations. In the planner-control protocol, the RoboInter Planner generates future intermediate representations, such as future trace points or bounding boxes of future key frames, which are post-processed and rendered into control videos with the same procedure. Furthermore, we explore how world models can guide VLA models. Unlike $\pi_{0.7}$ (Intelligence et al., 2026), which treats subgoal images predicted by a world model as metadata for the VLM, we directly feed the image latents predicted by the world model into the executor’s action head. These latents function as image-level intermediate representations that interact with action prediction more directly.

5. Benchmarking and Experiments

5.1. Benchmarking the Planner

Enhanced grounding and embodied capability. As shown in Table 2, we evaluated on third-party spatial reasoning benchmarks, including Where2Place (Yuan et al., 2024) and RoboRefIt (Lu et al., 2023) (spatial point and grounding reasoning) and RoboVQA (Sermanet et al., 2024) (temporal task planning). Across all three benchmarks, our models substantially outperformed the base models (Qwen2.5-VL-3B/7B (Wang et al., 2024b) and LLaVA-OneVision-7B (Li et al., 2024a)). Notably, RoboBrain2.0 (Team et al., 2025a) is also an embodied VLM (i.e., Planner). At the 3B scale, *RoboInter-Qwen-3B* achieved a 49.1% improvement over RoboBrain2.0 on RoboRefIt and a 12.7% improvement on RoboVQA. At the 7B scale, the corresponding gains reached 76.8% and 42.8%, respectively. For grounding, all three RoboInterVLM variants exceeded their respective base models on Refcoco (Lin et al., 2014). Particularly, *RoboInter-Qwen-7B* eventually ranked second overall, with a 27.4% relative improvement over RoboBrain2.0-7B. On general benchmarks, our models remained relatively stable on most benchmarks, indicating that *our curated VQA data enhances the abilities of embodied reasoning and grounding*, meanwhile, the general capabilities of our VLMs are slightly affected.

RoboInter-VQA benchmark at the spatial and temporal level. As shown in Table 3, for spatial-based generation tasks, closed-source and general VLMs without embodied experience rarely produce

Table 3. **Results of RoboInter-VQA *spatial* and *temporal* benchmark.** G.D. means grounding, A.F. denotes Affordance. Spatial generation uses ACC@IOU>0.1 (%↑), multiple choice and T/F use ACC (%↑). For temporal, Trace uses DTW (↓), other metrics use ACC or average BLEU (↑).

Model Name	RoboInter-VQA Spatial							RoboInter-VQA Temporal				
	Generation				Multiple Choice		T/F	Generation		Multiple Choice		T/F
	Object G.D.↑	Grasp A.F.↑	Place A.F.↑	Gripper G.D.↑	Grasp Pose↑	Grounding Choice↑	Contact↑	Trace↓	Task Planning↑	Visual Trace↑	Planning Choice↑	Task Planning↑
QwenVL2.5-3B	46.6%	12.2%	34.1%	6.1%	21.1%	21.9%	50.9%	2712	20.3	37.5%	60.0%	59.7%
QwenVL2.5-7B	51.2%	14.7%	38.2%	10.2%	27.3%	25.7%	52.5%	1702	22.4	39.0%	64.5%	60.5%
InternVL3-1B	7.8%	2.3%	8.3%	1.2%	24.8%	25.9%	50.4%	–	10.5	28.9%	54.9%	55.8%
InternVL3-2B	20.6%	3.1%	17.9%	1.9%	25.5%	27.3%	50.1%	–	7.7	35.2%	59.3%	59.4%
InternVL3-8B	32.7%	5.9%	28.2%	3.5%	25.1%	31.1%	52.9%	1035	8.1	34.0%	71.5%	60.0%
Llava-OV-7B	25.8%	5.5%	23.7%	1.6%	24.5%	31.9%	54.4%	–	11.0	37.7%	44.9%	63.5%
GPT4o-mini	6.8%	–	7.2%	1.1%	10.9%	16.8%	53.6%	1736	14.7	28.4%	66.6%	63.9%
Gemini-2.5-flash	1.7%	–	1.2%	–	32.7%	69.4%	65.5%	–	–	49.4%	–	–
RoboBrain-2.0-3B	15.2%	–	–	2.8%	25.5%	26.5%	50.4%	595	16.0	29.7%	48.2%	46.8%
RoboBrain-2.0-7B	–	–	–	2.5%	23.3%	21.5%	49.2%	541	15.3	29.5%	57.8%	46.4%
RoboInter-Qwen-3B	76.1%	34.9%	52.7%	61.6%	74.0%	73.4%	75.2%	332	61.2	78.8%	82.2%	88.7%
RoboInter-Qwen-7B	75.1%	37.8%	56.9%	62.0%	76.1%	75.7%	75.6%	323	63.4	81.9%	86.5%	93.0%
RoboInter-LlavaOV-7B	82.9%	46.3%	55.1%	70.1%	74.1%	79.7%	76.3%	299	62.7	81.9%	81.8%	83.9%

accurate intermediates (typically below 40%), underscoring the importance of additional intermediate representation annotations. On simpler questions, Gemini-2.5-Flash and RoboBrain-2.0-7B lead on *Grasp Pose (choice)* with 32.7% and 23.3% ACC. For *Grounding Choice*, LLaVA-OV-7B achieves 31.9%, while Gemini-2.5-Flash is strongest at 69.4%; most other models remain near random choosing (25%) given limited understanding of manipulation scenes. For temporal, closed-source API and general VLMs largely fail to generate future traces or task planning; RoboBrain-2.0 attains a much better DTW in *Trace Generation* than Qwen-VL-2.5 (541 v.s. 1702). On *Visual Trace Choice*, Gemini-2.5-Flash remains competitive (49.4%). For *Planning Choice* and *T/F of Task Planning*, as planning aligns closely with general LLM abilities, most models transfer common-sense knowledge and show better performance. Overall, **current closed-source and general VLMs typically lack enough embodied abilities**. Curated from diverse annotations, **RoboInter-VQA markedly improves the VLM abilities of understanding and generating intermediate representations**.

Qualitative results. As illustrated in Figure.6, we provide qualitative examples demonstrating the capability of RoboInter-VLM to perform motion planning and subtask planning in in-the-wild scenarios. These examples highlight its spatial understanding of manipulation and its temporal reasoning ability for generating coherent task plans. Benefiting from training on both general multimodal data and RoboInter-VQA, RoboInter-VLM exhibits strong embodied understanding and generation capabilities across temporal and spatial dimensions.

5.2. Open-Loop Evaluation of the Executor

Experimental settings. In this section, we examine how a pretrained Planner improves the Executor and compare different VLA paradigms. As our annotated corpus spans more than 500 distinct scenarios, comprehensive real-world validation across all scenarios is infeasible, as emphasized by HPT (Wang et al., 2024a). Following the discrete token-accuracy evaluation in OpenVLA (Kim et al., 2024), we utilize an **Open-Loop Score (OLS)** to evaluate the generation of *continuous action chunks*, in which per-step actions are assessed independently and compared with the ground-truth actions. OLS is computed as the average value over 100K transitions from evaluation videos, ensuring statistical stability. More details in the Appendix. Nine Executor variants are evaluated: (a).*Vanilla*: omits

Table 4. **Open-loop evaluation in In-the-Wild setting.** We report OLS with different error thresholds (@0.1 to @0.01) and the mean value.

Method	Open-Loop Score (OLS)				mOLS
	@0.1	@0.05	@0.03	@0.01	
VLA-OS	0.6180	0.3905	0.1928	0.0129	0.3035
Vanilla	0.6793	0.3608	0.1753	0.0189	0.3086
RoboInter-IC-E2E	0.6984	0.3810	0.1873	0.0204	0.3218
RoboInter-EC-E2E	0.7049	0.3930	0.2066	0.0314	0.3340
QwenVL+Executor	0.6749	0.3582	0.1777	0.0298	0.3102
RoboInter-Te-Modular	0.7124	0.4133	0.2332	0.0584	0.3543
RoboInter-Im-Modular	0.7056	0.4029	0.2240	0.0430	0.3439
Oracle+VLA-OS	0.7260	0.4928	0.2734	0.0200	0.3780
Oracle+Executor	0.7511	0.4640	0.2705	0.0587	0.3861

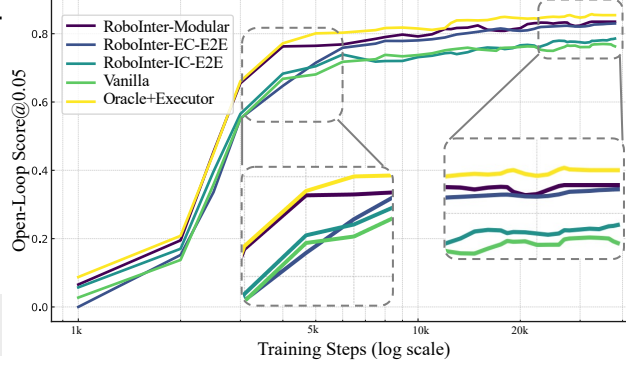


Figure 5. **Open-loop evaluation in TableTop setting.** We show the curve of OLS@0.05 from 1k to 40k training steps. We mainly report the five variances of RoboInter-VLA.

any pretrained VLM from Planner, performing action learning only; (b-e).*RoboInter-IC-E2E*, *EC-E2E*, *Te-Modular* and *Im-Modular* are stated in Section.4.2; (f).*Oracle+Executor*: not end-to-end, both training and inference are guided by GT intermediate representations; (g).*QwenVL+Executor*: training is GT-guided, and inference employs intermediates from original Qwen2.5VL; (h).*VLA-OS*: we train VLA-OS (Gao et al., 2025a) in our setting and use it as an additional baseline; (i).*Oracle+VLA-OS*: not end-to-end, VLA-OS are guided by GT intermediate representations. Two open-loop evaluation settings: (1) *In-the-Wild*: focus on scene and object generalization, we compare the convergence performance under identical training steps. (2) *Table-Top*: focus on the tabletop environment and cross-embodiment ability, we mainly examine the evaluation curve during training. The annotated corpus is divided into *In-the-Wild* and *Table-Top* subsets. We sample approximately 10% of episodes from each subset for Executor training (25k in total), of which 8% are reserved for evaluation.

Planner consistently improves the Executor’s action generation. The *In-the-Wild* setting is shown in Table.4. The *Vanilla* achieves a lower mOLS score than IC-E2E (0.3086 v.s. 0.3218), which incorporates intermediate representations, indicating that **pretrained VLM Planner can enhance the learning capability of the VLA Executor**. The mOLS score of EC-E2E is higher than IC-E2E (0.3340 v.s. 0.3218), showing that the **explicit intermediate representations are more helpful for action guidance than the implicit**. For *Oracle+Executor*, the non-E2E architectures, utilizing ground-truth annotation in the Executor, achieve substantially the highest scores. This indicates that **our annotations are informative and stable**. *Te-Modular* surpasses EC-E2E (0.3543 v.s. 0.3340), implying that **decoupling planning and execution facilitates dedicated optimization** of each capability and mitigates mode conflict. *Im-Modular* performs slightly worse than *Te-Modular* (0.3439 v.s. 0.3543), as visual prompting embeds within information-dense images, diluting their relative contribution. *QwenVL+Executor* employs Qwen2.5-VL as a zero-shot Planner, and its overall performance is not comparable with other Non-E2E models, **showing that the embodied reasoning ability of our Planner is better than the general VLMs**. The evaluation curves of the *Table-Top* are shown in Figure.5, as Table-Top scenes are easier to interpret, most methods eventually achieve high scores. *RoboInter-Te-Modular* and *Oracle+Executor* converge faster and reach higher performance. *EC-E2E* converges more slowly but ultimately approaches the performance of *Te-Modular*. *IC-E2E* shows stronger early-stage results and maintains a consistent advantage over *Vanilla* after 20k steps.

Ablations on intermediate representations. We ablate combinations of different intermediate representations within the open-loop *Oracle+Executor* setting. As shown in Table 5, coarse-grained representations such as *Subtask* and *Primitive Skill* provide only marginal improvements, as they offer stage-level guidance with limited actionable constraints during execution. In contrast, spatially

Table 5. **Ablation of intermediate representation.** We report OLS under multiple thresholds. Six representations are evaluated, where finer-grained categories yield larger gains. In the table below, we set abbreviations: S., Subtask; P., Primitive Skill; O.B., Object Box; G.B., Gripper Box; Aff., Affordance; and Tr., Trace.

Variant	OLS			
	@0.1	@0.05	@0.03	@0.01
Vanilla	0.6793	0.3608	0.1753	0.0189
+ S.	0.6965	0.3676	0.1770	0.0171
+ S. + P.	0.6983	0.3681	0.1779	0.0194
+ S. + P. + O.	0.7025	0.3849	0.1988	0.0294
+ S. + P. + O. + G.B.	0.7212	0.4032	0.2048	0.0272
+ S. + P. + O. + G.B. + Aff.	0.7245	0.4083	0.2114	0.0297
+ S. + P. + O. + G.B. + Aff. + Tr.	0.7511	0.4640	0.2705	0.0587

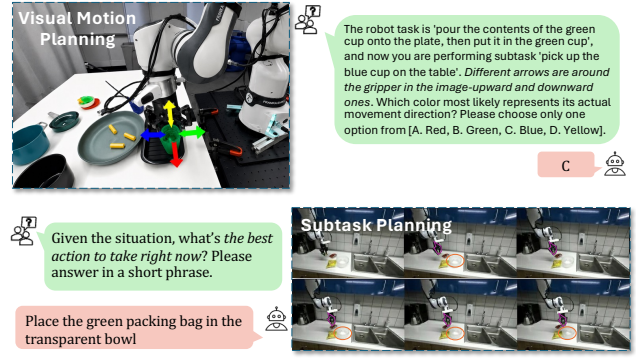


Figure 6. **Inference cases.** For the *Visual Motion Planning*, RoboInter-VLM accurately infers the action direction of the gripper, demonstrating a strong understanding of spatial relations. For the *Subtask Planning*, given a video input, RoboInter-VLM can reason about the underlying task intention.

grounded representations (*Object Box*, *Gripper Box*, and *Affordance*) yield substantially larger gains by providing finer-grained cues. The most significant improvement comes from *Trace*, which introduces dense, temporally grounded information and achieves the strongest overall performance. Additional results are provided in the Appendix.

5.3. Closed-Loop Real-World Evaluation of the Executor

Experimental setting. We study how our dataset and the pretrained Planner affect the closed-loop success rate. Experiments are conducted in a few-shot TableTop evaluation with a real-world Franka Research-3 arm. Observation input comprises a static third-person camera and a wrist-view camera, and no proprioceptive state. We focus on more practical E2E variants and evaluate five E2E models: (1) *OpenVLA* (Kim et al., 2024): Initialized from official pretrained weights and extended with an additional wrist-view input. (2) *Pi-0* (Black et al., 2024): Fine-tuned from the official checkpoints of Droid. (3) *Vanilla*: our baseline. (4) *RoboInter-IC-E2E*: Initialized from the Planner and further finetuned on in-distribution (ID) data. (5) *RoboInter-EC-E2E*: Initialized from the Planner, and jointly optimizes action and CoT generation, with a 1:1 ratio of our annotated data and collected data. As shown in Figure.7, we design four tasks: (a) Object Collecting: sequentially place three pens from a cluttered tabletop into a cup, out-of-distribution (OOD) tests are with novel objects, and alter spatial layouts. (b) Cup Stacking: Stack cups from left to right. OOD tests include novel objects, OOD positions, and continuous stacking. (c) Towel Folding: Fold two towels in sequence and stack them. OOD tests vary in the towel category and background. (d) Clutter Cleaning: Clean all items from the board with a brush. OOD tests introduce novel objects and disturbances. We provide more real-world results of Tool Inserting and Object Sorting in the Appendix.

Experimental results on ID and OOD testing. Across all tasks, *RoboInter-IC-E2E* consistently outperforms the *Vanilla*. In ID evaluations, IC-E2E attains an average success rate of 77.3%, compared with 65.0% of *Vanilla*. Under OOD conditions, the gap widens, and IC-E2E achieves a 58.3% success rate, while *Vanilla* reaches only 38.3%, indicating the superior generalization of IC-E2E. **The pretrained VLM from the Planner is pre-exposed to rich embodied data and therefore provides stronger perceptual priors.** Although Pi-0, which is pretrained on Droid, also demonstrates solid ID and OOD performance, the IC-E2E benefits from a broader representation training, thereby producing better overall results. EC-E2E records a lower ID success rate than IC-E2E (68.3% vs. 77.3%), which seems

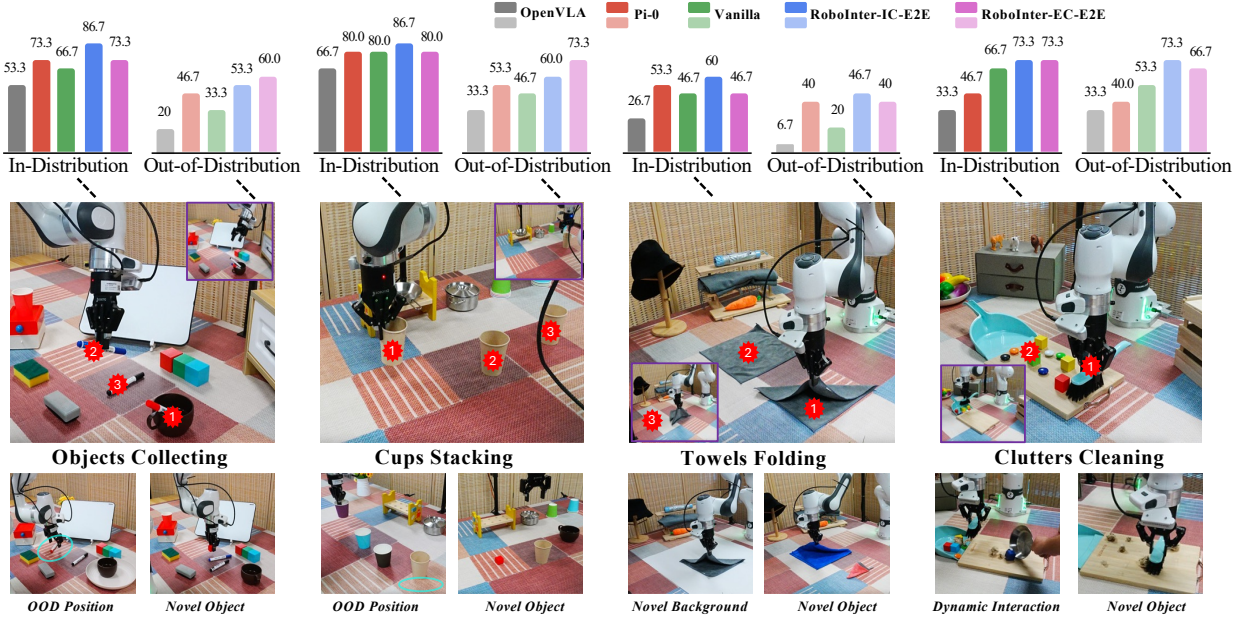


Figure 7. **Real-World experiments.** The top charts present results from 15 in-distribution (ID) and 15 out-of-distribution (OOD) trials. The bottom panel illustrates the OOD test setup. Notably, the performance drop from ID to OOD reflects each model’s generalization under distribution shift, where EC-E2E outperforms IC-E2E and exhibits a smaller ID→OOD degradation (8.3% vs. 19.0%), showing the consistent conclusion with the *Open-Loop Evaluation*. Key steps are marked with a number, along with an end-execution thumbnail. Experiments of RoboInter-Modular are in the Appendix.

to be misaligned with the open-loop results in which *EC-E2E* was superior. Actually, the open-loop protocol enforces strict decouple between training and validation, and therefore functions more like an OOD test. Correspondingly, under real-world OOD conditions, *EC-E2E* exceeds *IC-E2E* in Object Collecting (60.0% vs. 53.3%) and Cup Stacking (73.3% vs. 60.0%), and achieves a higher average success rate (60.0% vs. 58.3%). The ID-to-OOD drop is only 8.3% for *EC-E2E*, whereas *IC-E2E* declines by 19%. We attribute *EC-E2E*’s weaker ID accuracy to the potential modality interference from the joint training of text generation and action prediction. ***Diverse OOD knowledge from our dataset contributes to superior OOD robustness and generalization.*** We provide real-world results of *RoboInterVLA-Modular* and more experiments within the WidowX platform in the Appendix.

5.4. Benchmarking on world modeling

Main Results. We evaluate the impact of intermediate representations across varying model scales (1.3B and 14B) and fine-tuning strategies (LoRA and Full Fine-Tuning), with comprehensive quantitative results summarized in Table 6. We systematically investigate the oracle visual generation quality across various model architectures, fine-tuning strategies, and parameter scales. The *Inter* control mode denotes the combined utilization of both 2D traces and segmentation masks. The relevant metrics are all standard evaluation criteria for video generation tasks. For more details, please refer to Wan et al. (2025). As shown, relying solely on raw action conditioning severely bottlenecks generative quality. For instance, the 14B action-conditioned baseline (**RoboInter-W+Action**) yields an 18.26 PSNR and 0.171 LPIPS. Replacing sparse actions with our dense intermediate representations substantially boosts performance, improving PSNR to 21.05 and reducing LPIPS to 0.102 under the same 14B backbone. Importantly, this structural advantage is orthogonal to model scale and tuning strategies. In the 1.3B regime, integrating *Inter* consistently outperforms raw actions under both LoRA and Full

Table 6. **Main quantitative benchmarking of world model predictions.** Oracle visual generation quality across various model architectures and fine-tuning strategies is shown.

Model	Control	PSNR↑	SSIM↑	LPIPS↓	MAE↓	MSE↓
1.3B Parameter						
T2V-Baseline(Full-FT)	Action	18.21	0.739	0.176	0.072	0.022
RoboInter-W(Full-FT)	Action	19.08	0.770	0.148	0.063	0.029
RoboInter-W(Full-FT)	Inter	20.00	0.795	0.125	0.055	0.015
T2V-Baseline(LoRA)	Action	18.49	0.763	0.163	0.067	0.022
RoboInter-W(LoRA)	Action	19.08	0.770	0.148	0.063	0.029
RoboInter-W(LoRA)	Inter	20.43	0.800	0.114	0.052	0.014
14B Parameter						
T2V-Baseline(LoRA)	Action	19.43	0.770	0.147	0.063	0.017
T2V-Baseline(LoRA)	Action	19.36	0.780	0.141	0.059	0.018
RoboInter-W(LoRA)	Action	18.26	0.750	0.171	0.072	0.023
RoboInter-W(LoRA)	Inter	21.05	0.810	0.102	0.047	0.013

Table 7. **Impact of context and prediction horizons (14B LoRA).** We compare the predictive fidelity of raw action conditioning versus our intermediate representations (*Seg+Trace*) across varying history (H) and prediction (P) lengths. Note that H and P denote the number of latent frames after 3D VAE encoding, which corresponds to 4× the raw video frames due to temporal compression.

Model	H/P	Control	Metrics			Δ PSNR
			PSNR↑	SSIM↑	LPIPS↓	
RoboInter-W Baseline	4/3	Action	24.87	0.878	0.054	+0.13
RoboInter-W	4/3	Seg+Trace	25.00	0.881	0.049	
RoboInter-W Baseline	1/3	Action	26.20	0.886	0.051	+1.50
RoboInter-W	1/3	Seg+Trace	27.70	0.899	0.041	
RoboInter-W Baseline	4/16	Action	18.26	0.750	0.171	+2.79
RoboInter-W	4/16	Seg+Trace	21.05	0.810	0.102	

Fine-Tuning (e.g., 20.00 vs. 19.08 PSNR in Full-FT). These results demonstrate that *intermediate representations provide robust dynamic constraints for accurate physical simulation*.

Impact of Context and Prediction Horizons. In Table 7, extending prediction horizons reduces interaction frequency but increases learning difficulty and error accumulation. To investigate this trade-off, we ablate historical context and future prediction lengths using the 14B model. For short-term predictions with enough history (e.g., H4P3), the rich temporal prior provides sufficient regularity to extrapolate near-future dynamics, allowing the action-only baseline to perform adequately. However, when the historical context is limited to a single frame (H1P3), inferring temporal momentum becomes challenging. Under this heightened uncertainty, *Seg+Trace* provides essential geometric priors that *consistently improve generation fidelity, becoming critical for long-horizon predictions*. As the prediction horizon extends, the action-only baseline suffers from severe compounding errors and structural degradation. In contrast, *Seg+Trace* serves as a robust spatiotemporal scaffold that prevents drift, mitigating physical uncertainty and sustaining generation quality over extended sequences.

Modality Ablation Study. To isolate the specific contributions of individual intermediate modalities, we conduct a fine-grained ablation study across different model scales (Table 8). When applied independently, both segmentation masks (*Seg*) and 2D traces (*Trace*) significantly outperform the raw action-conditioned baselines. Mechanistically, these modalities prove highly synergistic: *segmentation masks enforce object-centric spatial constraints to prevent visual morphing, while 2D traces impose explicit temporal kinematics on the end-effector*. By combining them (*Seg+Trace*), RoboInter-W achieves the highest overall fidelity across all parameter scales. For instance, on the 14B model, the combined formulation reaches a peak PSNR of 21.05 and reduces LPIPS to 0.102. This confirms that a comprehensive spatiotemporal constraint can effectively eradicate the structural drift that typically plagues purely action-conditioned generators.

Evaluation of Control Protocols. We further evaluate RoboInter-W under two distinct settings defined in our methodology: the *oracle-control protocol* (using ground-truth annotations) and the *planner-control protocol* (using autonomously generated representations). As detailed in Table 9, while the inevitable noise from the planner introduces a slight performance drop compared to the oracle upper bound, the generated representations successfully preserve essential geometric and temporal constraints. Consequently, the *planner-control* formulation consistently and decisively outperforms the purely action-conditioned baselines across both 1.3B and 14B scales (e.g., yielding 20.17 vs. 18.26

Table 8. Ablation study on control modalities across model scales. We focus on action, segmentation masks, and 2D trace conditions.

Model	Control	Metrics				
		PSNR↑	SSIM↑	LPIPS↓	MAE↓	MSE↓
1.3B Parameter Models (LoRA)						
T2V-Baseline	Action	18.49	0.763	0.163	0.067	0.022
RoboInter-W	Action	19.08	0.770	0.148	0.063	0.029
RoboInter-W	Seg	20.38	0.804	0.113	0.052	0.014
RoboInter-W	Trace	20.01	0.791	0.125	0.056	0.016
RoboInter-W	Seg+Trace	20.43	0.800	0.114	0.052	0.014
14B Parameter Models (LoRA)						
I2V-Baseline	Action	19.43	0.770	0.147	0.063	0.017
RoboInter-W	Action	18.26	0.750	0.171	0.072	0.023
RoboInter-W	Seg	20.44	0.807	0.109	0.049	0.013
RoboInter-W	Trace	20.42	0.800	0.119	0.053	0.015
RoboInter-W	Seg+Trace	21.05	0.810	0.102	0.047	0.013

Table 9. **Evaluation of different control protocols across model scales.** Predictive fidelity of RoboInter-W under the *planner-control protocol* versus the *oracle-control protocol* (upper bound) and action-only baselines.

Model	Control	Protocol	Metrics				
			PSNR↑	SSIM↑	LPIPS↓	MAE↓	MSE↓
1.3B Parameter Models (LoRA)							
T2V-Baseline	Action	–	18.49	0.763	0.163	0.067	0.022
RoboInter-W	Action	–	19.08	0.770	0.148	0.063	0.029
RoboInter-W	Inter	Planner-Control	19.95	0.780	0.128	0.061	0.021
RoboInter-W	Inter	Oracle-Control	20.43	0.800	0.114	0.052	0.014
14B Parameter Models (LoRA)							
I2V-Baseline	Action	–	19.43	0.770	0.147	0.063	0.017
RoboInter-W	Action	–	18.26	0.750	0.171	0.072	0.023
RoboInter-W	Inter	Planner-Control	20.17	0.780	0.134	0.058	0.017
RoboInter-W	Inter	Oracle-Control	21.06	0.810	0.102	0.047	0.013

Table 10. **World-guided VLA action accuracy (%)**. We evaluate the impact of predicted latent representations on a downstream VLA model across different training steps. *OLS@X* denotes the open-Loop score of predicted actions within a normalized distance threshold.

Step	VLA Conditioning Source	Open-Loop Score (%) ↑			
		OLS@0.03	OLS@0.05	OLS@0.10	OLS@0.20
35K	VLA Baseline (No WM)	20.37	34.30	53.04	63.44
	VLA + I2V-Baseline (Pred)	19.71	33.72	53.91	64.27
	VLA + RoboInter-W (Pred)	21.42	35.23	54.54	64.42
	VLA + Oracle (GT)	21.78	35.75	54.86	64.96
55K	VLA Baseline (No WM)	22.09	35.74	54.26	64.33
	VLA + I2V-Baseline (Pred)	21.07	34.85	55.01	65.68
	VLA + RoboInter-W (Pred)	22.17	35.97	55.39	65.55
	VLA + Oracle (GT)	22.80	36.42	55.60	65.41

PSNR on the 14B model). Ultimately, our framework *exhibits high robustness to imperfect priors*; even autonomously generated intermediate representations provide sufficient structural scaffolding to surpass action-only simulations in practical deployment.

Qualitative Analysis on RoboInter-World. As illustrated in Figure. 8, we compare the performance of the baseline model with ours in long-horizon scenarios involving complex motions. It is evident that relying solely on abstract action sequences or language instructions is insufficient for the baseline model to achieve controllable motion simulation; the robotic arm either remains stagnant or exhibits unnatural structural distortions. Furthermore, the physical simulation of deformable objects is particularly poor, stemming from the limited scale of the training data and the model’s limited generalization. In contrast, our approach explicitly introduces intermediate representations by leveraging the strong generalization of *RoboInter-VLM*. The trace paths effectively constrain future motion control, concurrently, sampled object points enable more accurate simulation of rigid-body kinematics and flexible-object deformations, thereby significantly enhancing the physical realism.

5.5. World Model guides VLA Executor

As shown in Table 10, relying solely on current observations, i.e., **VLA Baseline (No WM)**, leads to limited manipulation performance, as the model lacks explicit prediction and planning over future

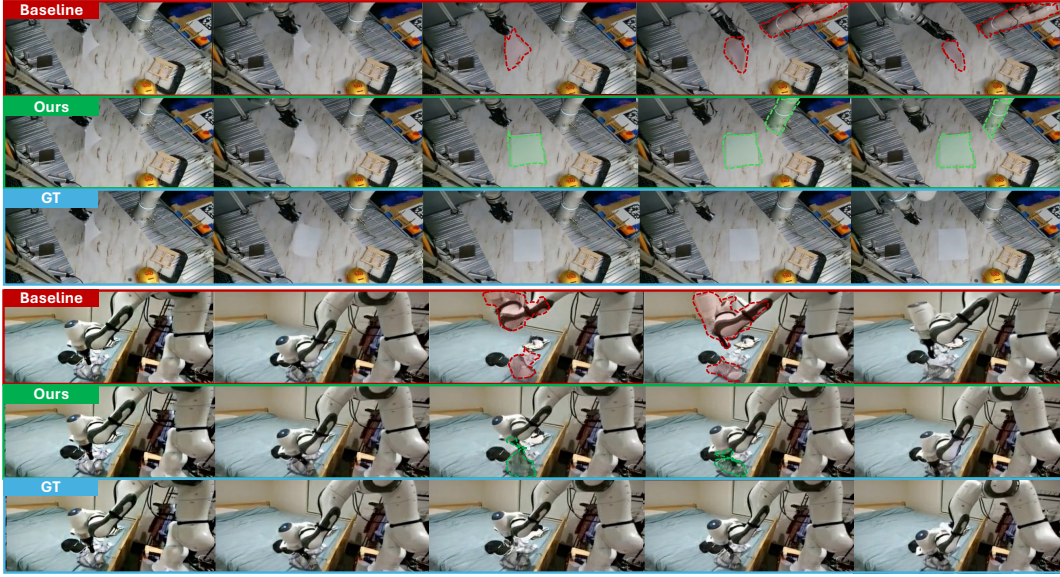


Figure 8. Qualitative comparison in two representative zero-shot, long-horizon scenarios from the test set: putting down a tissue and picking up a cloth. Each sequence represents a single-chunk prediction lasting approximately 4 seconds (64 frames). Compared to the action-guided I2V-baseline 14B model, our model demonstrates significantly better physical simulation of object deformations and gripper traces under long-horizon control, highlighting its superior generalization capabilities in unseen environments.

physical execution details. Conditioning the policy on future latent features predicted by a standard world model baseline (**VLA + I2V-Baseline**) provides only marginal improvement and even degrades performance under stricter thresholds (e.g., decreasing from 22.09% to 21.07% at Acc@0.03 for Step 55K), suggesting that unstructured predictive latent features may introduce harmful noise into action generation. In contrast, when conditioned on latent features predicted by our RoboInter-World (**VLA + RoboInter-W**), the policy achieves consistent and substantial gains across all evaluation thresholds, significantly narrowing the gap toward the **Oracle (GT)** upper bound, which provides the ground-truth latent features. These results demonstrate that *the latent representations produced by RoboInter-World are not merely visually plausible; they encode actionable physical priors that effectively enhance downstream manipulation performance.*

6. Conclusion

In this work, we presented the *RoboInter1.5* Manipulation Suite, a unified platform designed to advance research on intermediate representations for the plan-then-execute paradigm. As its core, *RoboInter-Data* provides over 230k episodes with dense, per-frame annotations, establishing a new standard of scale and quality for real-world manipulation datasets. Built upon this foundation, *RoboInter-VQA* systematically benchmarks the embodied understanding and generation capabilities of *RoboInter-VLMs* across complex spatiotemporal tasks. Bridging the gap from static understanding to physical interaction, *RoboInter-VLA* integrates these geometric priors into both modular and end-to-end control frameworks, enabling a principled investigation of how intermediate representations drive superior execution performance. Finally, extending these capabilities into generative simulation, *RoboInter-World* serves as a robust physical simulator, leveraging these actionable representations to accurately forecast future environmental dynamics.

References

- S. Belkhale, T. Ding, T. Xiao, P. Sermanet, Q. Vuong, J. Tompson, Y. Chebotar, D. Dwibedi, and D. Sadigh. Rt-h: Action hierarchies using language. [arXiv preprint arXiv:2403.01823](#), 2024.
- J. Bjorck, F. Castañeda, N. Cherniadev, X. Da, R. Ding, L. Fan, Y. Fang, D. Fox, F. Hu, S. Huang, et al. Gr00t n1: An open foundation model for generalist humanoid robots. [arXiv preprint arXiv:2503.14734](#), 2025.
- K. Black, N. Brown, D. Driess, A. Esmail, M. Equi, C. Finn, N. Fusai, L. Groom, K. Hausman, B. Ichter, et al. π_0 : A vision-language-action flow model for general robot control. [arXiv preprint arXiv:2410.24164](#), 2024.
- A. Brohan, N. Brown, J. Carbajal, Y. Chebotar, X. Chen, K. Choromanski, T. Ding, D. Driess, A. Dubey, C. Finn, et al. Rt-2: Vision-language-action models transfer web knowledge to robotic control. [arXiv preprint arXiv:2307.15818](#), 2023.
- Q. Bu, J. Cai, L. Chen, X. Cui, Y. Ding, S. Feng, S. Gao, X. He, X. Hu, X. Huang, et al. Agibot world colosseum: A large-scale manipulation platform for scalable and intelligent embodied systems. [arXiv preprint arXiv:2503.06669](#), 2025.
- J. Cen, C. Yu, H. Yuan, Y. Jiang, S. Huang, J. Guo, X. Li, Y. Song, H. Luo, F. Wang, D. Zhao, and H. Chen. Worldvla: Towards autoregressive action world model. [arXiv preprint arXiv:2506.21539](#), 2025. URL <https://arxiv.org/abs/2506.21539>.
- X. Chen, Y. Chen, Y. Fu, N. Gao, J. Jia, W. Jin, H. Li, Y. Mu, J. Pang, Y. Qiao, et al. Internvla-m1: A spatially guided vision-language-action framework for generalist robot policy. [arXiv preprint arXiv:2510.13778](#), 2025.
- Z. Chen, Z. Shi, X. Lu, L. He, S. Qian, Z. Yin, W. Ouyang, J. Shao, Y. Qiao, C. Lu, et al. Rh20t-p: A primitive-level robotic dataset towards composable generalization agents. [arXiv preprint arXiv:2403.19622](#), 2024.
- R. Chu, Y. He, Z. Chen, S. Zhang, X. Xu, B. Xia, D. Wang, H. Yi, X. Liu, H. Zhao, et al. Wan-move: Motion-controllable video generation via latent trajectory guidance. [arXiv preprint arXiv:2512.08765](#), 2025.
- R. Chu, Y. He, Z. Chen, S. Zhang, X. Xu, D. WANG, H. Yi, X. Liu, H. Zhao, Y. Liu, et al. Wan-move: Motion-controllable video generation via latent trajectory guidance. [Advances in Neural Information Processing Systems](#), 38:404–432, 2026.
- R. Dang, J. Guo, B. Hou, S. Leng, K. Li, X. Li, J. Liu, Y. Mao, Z. Wang, Y. Yuan, et al. Rynnbrian: Open embodied foundation models. [arXiv preprint arXiv:2602.14979](#), 2026.
- S. Deng, M. Yan, S. Wei, H. Ma, Y. Yang, J. Chen, Z. Zhang, T. Yang, X. Zhang, H. Cui, et al. Graspvla: a grasping foundation model pre-trained on billion-scale synthetic action data. [arXiv preprint arXiv:2505.03233](#), 2025.
- Y. Du, M. Yang, B. Dai, H. Dai, O. Nachum, J. B. Tenenbaum, D. Schuurmans, and P. Abbeel. Learning universal policies via text-guided video generation. [arXiv preprint arXiv:2302.00111](#), 2023. URL <https://arxiv.org/abs/2302.00111>.
- A. O. et al. Open X-Embodiment: Robotic learning datasets and RT-X models. <https://arxiv.org/abs/2310.08864>, 2023.

- H. Fang, M. Zhang, H. Dong, W. Li, Z. Wang, Q. Zhang, X. Tian, Y. Hu, and H. Li. Robix: A unified model for robot interaction, reasoning and planning. [arXiv preprint arXiv:2509.01106](#), 2025.
- H.-S. Fang, H. Fang, Z. Tang, J. Liu, C. Wang, J. Wang, H. Zhu, and C. Lu. Rh20t: A comprehensive robotic dataset for learning diverse skills in one-shot. [arXiv preprint arXiv:2307.00595](#), 2023.
- Z. Fu, T. Z. Zhao, and C. Finn. Mobile aloha: Learning bimanual mobile manipulation with low-cost whole-body teleoperation. [arXiv preprint arXiv:2401.02117](#), 2024.
- C. Gao, Z. Liu, Z. Chi, J. Huang, X. Fei, Y. Hou, Y. Zhang, Y. Lin, Z. Fang, Z. Jiang, et al. Vla-os: Structuring and dissecting planning representations and paradigms in vision-language-action models. [arXiv preprint arXiv:2506.17561](#), 2025a.
- N. Gao, Y. Chen, S. Yang, X. Chen, Y. Tian, H. Li, H. Huang, H. Wang, T. Wang, and J. Pang. Genmanip: Llm-driven simulation for generalizable instruction-following manipulation. In [Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition](#), pages 12187–12198, 2025b.
- S. Gao, W. Liang, K. Zheng, A. Malik, S. Ye, S. Yu, W.-C. Tseng, Y. Dong, K. Mo, C.-H. Lin, et al. Dreamdojo: A generalist robot world model from large-scale human videos. [arXiv preprint arXiv:2602.06949](#), 2026.
- J. Gu, S. Kirmani, P. Wohlhart, Y. Lu, M. G. Arenas, K. Rao, W. Yu, C. Fu, K. Gopalakrishnan, Z. Xu, et al. Rt-trajectory: Robotic task generalization via hindsight trajectory sketches. [arXiv preprint arXiv:2311.01977](#), 2023.
- P. Guo, X. Wei, Y. Hu, B. Yang, D. Liu, F. Huang, et al. Emma-x: an em-like multilingual pre-training algorithm for cross-lingual representation learning. [Advances in Neural Information Processing Systems](#), 36:10116–10144, 2023.
- Y. Guo, L. X. Shi, J. Chen, and C. Finn. Ctrl-world: A controllable generative world model for robot manipulation. [arXiv preprint arXiv:2510.10125](#), 2025.
- C. Hou, K. Wu, J. Liu, Z. Che, D. Wu, F. Liao, G. Li, J. He, Q. Feng, Z. Jin, et al. Robomind 2.0: A multimodal, bimanual mobile manipulation dataset for generalizable embodied intelligence. [arXiv preprint arXiv:2512.24653](#), 2025.
- H. Huang, F. Lin, Y. Hu, S. Wang, and Y. Gao. Copa: General robotic manipulation through spatial constraints of parts with foundation models. [arXiv preprint arXiv:2403.08248](#), 2024a.
- H. Huang, X. Chen, Y. Chen, H. Li, X. Han, Z. Wang, T. Wang, J. Pang, and Z. Zhao. Roboground: Robotic manipulation with grounded vision-language priors. In [Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition](#), pages 22540–22550, 2025.
- S. Huang, I. Ponomarenko, Z. Jiang, X. Li, X. Hu, P. Gao, H. Li, and H. Dong. Manipvqa: Injecting robotic affordance and physically grounded information into multi-modal large language models. In [2024 IEEE/RSJ International Conference on Intelligent Robots and Systems \(IROS\)](#), pages 7580–7587. IEEE, 2024b.
- W. Huang, C. Wang, R. Zhang, Y. Li, J. Wu, and L. Fei-Fei. Voxposer: Composable 3d value maps for robotic manipulation with language models. [arXiv preprint arXiv:2307.05973](#), 2023.
- W. Huang, C. Wang, Y. Li, R. Zhang, and L. Fei-Fei. Rekep: Spatio-temporal reasoning of relational keypoint constraints for robotic manipulation. [arXiv preprint arXiv:2409.01652](#), 2024c.

- C.-Y. Hung, N. Majumder, H. Deng, L. Renhang, Y. Ang, A. Zadeh, C. Li, D. Herremans, Z. Wang, and S. Poria. Nora-1.5: A vision-language-action model trained using world model-and action-based preference rewards. [arXiv preprint arXiv:2511.14659](#), 2025.
- P. Intelligence, K. Black, N. Brown, J. Darpinian, K. Dhabalia, D. Driess, A. Esmail, M. Equi, C. Finn, N. Fusai, et al. pi-0.5: a vision-language-action model with open-world generalization. [arXiv preprint arXiv:2504.16054](#), 2025.
- P. Intelligence, B. Ai, A. Amin, R. Aniceto, A. Balakrishna, G. Balke, K. Black, G. Bokinsky, S. Cao, T. Charbonnier, et al. $\pi_{0.7}$: a steerable generalist robotic foundation model with emergent capabilities. [arXiv preprint arXiv:2604.15483](#), 2026.
- Y. Ji, H. Tan, J. Shi, X. Hao, Y. Zhang, H. Zhang, P. Wang, M. Zhao, Y. Mu, P. An, et al. Robobrain: A unified brain model for robotic manipulation from abstract to concrete. In [Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition](#), pages 1724–1734, 2025.
- A. Khazatsky, K. Pertsch, S. Nair, A. Balakrishna, S. Dasari, S. Karamcheti, S. Nasiriany, M. K. Srirama, L. Y. Chen, K. Ellis, et al. Droid: A large-scale in-the-wild robot manipulation dataset. [arXiv preprint arXiv:2403.12945](#), 2024.
- M. J. Kim, K. Pertsch, S. Karamcheti, T. Xiao, A. Balakrishna, S. Nair, R. Rafailov, E. Foster, G. Lam, P. Sanketi, et al. Openvla: An open-source vision-language-action model. [arXiv preprint arXiv:2406.09246](#), 2024.
- M. J. Kim, Y. Gao, T.-Y. Lin, Y.-C. Lin, Y. Ge, G. Lam, P. Liang, S. Song, M.-Y. Liu, C. Finn, et al. Cosmos policy: Fine-tuning video models for visuomotor control and planning. [arXiv preprint arXiv:2601.16163](#), 2026.
- L. Kou, F. Ni, Y. Zheng, P. Han, J. Liu, H. Cui, R. Liu, and J. Hao. Roboannotatorx: A comprehensive and universal annotation framework for accurate understanding of long-horizon robot demonstration. In [Proceedings of the IEEE/CVF International Conference on Computer Vision](#), pages 10353–10363, 2025.
- Z. Kuang, S. Cai, H. He, Y. Xu, H. Li, L. J. Guibas, and G. Wetzstein. Collaborative video diffusion: Consistent multi-video generation with camera control. [Advances in Neural Information Processing Systems](#), 37:16240–16271, 2024.
- B. Li, Y. Zhang, D. Guo, R. Zhang, F. Li, H. Zhang, K. Zhang, P. Zhang, Y. Li, Z. Liu, et al. Llava-onevision: Easy visual task transfer. [arXiv preprint arXiv:2408.03326](#), 2024a.
- H. Li, Y. Li, Y. Yang, J. Cao, Z. Zhu, X. Cheng, and L. Chen. Dispose: Disentangling pose guidance for controllable human image animation. [arXiv preprint arXiv:2412.09349](#), 2024b.
- H. Li, S. Yang, Y. Chen, Y. Tian, X. Yang, X. Chen, H. Wang, T. Wang, F. Zhao, D. Lin, et al. Cronusvla: Transferring latent motion across time for multi-frame prediction in manipulation. [arXiv preprint arXiv:2506.19816](#), 2025a.
- H. Li, Z. Wang, Z.-h. Ding, S. Yang, Y. Chen, Y. Tian, X. Hu, T. Wang, D. Lin, F. Zhao, et al. Robointer: A holistic intermediate representation suite towards robotic manipulation. [arXiv preprint arXiv:2602.09973](#), 2026a.
- L. Li, Q. Zhang, Y. Luo, S. Yang, R. Wang, F. Han, M. Yu, Z. Gao, N. Xue, X. Zhu, et al. Causal world modeling for robot control. [arXiv preprint arXiv:2601.21998](#), 2026b.

- Q. Li, Y. Liang, Z. Wang, L. Luo, X. Chen, M. Liao, F. Wei, Y. Deng, S. Xu, Y. Zhang, et al. Cogact: A foundational vision-language-action model for synergizing cognition and action in robotic manipulation. arXiv preprint arXiv:2411.19650, 2024c.
- Q. Li, Z. Xing, R. Wang, H. Zhang, Q. Dai, and Z. Wu. Magicmotion: Controllable video generation with dense-to-sparse trajectory guidance. In Proceedings of the IEEE/CVF International Conference on Computer Vision, pages 12112–12123, 2025b.
- X. Li, M. Liu, H. Zhang, C. Yu, J. Xu, H. Wu, C. Cheang, Y. Jing, W. Zhang, H. Liu, H. Li, and T. Kong. Vision-language foundation models as effective robot imitators. arXiv preprint arXiv:2311.01378, 2023.
- X. Li, X. He, L. Zhang, M. Wu, X. Li, and Y. Liu. A comprehensive survey on world models for embodied ai. arXiv preprint arXiv:2510.16732, 2025c.
- Y. Li, Y. Deng, J. Zhang, J. Jang, M. Memmel, R. Yu, C. R. Garrett, F. Ramos, D. Fox, A. Li, et al. Hamster: Hierarchical action models for open-world robot manipulation. arXiv preprint arXiv:2502.05485, 2025d.
- J. Liang, Y. Fan, K. Zhang, R. Timofte, L. Van Gool, and R. Ranjan. Movidio: Motion-aware video generation with diffusion model. In European conference on computer vision, pages 56–74. Springer, 2024.
- Y. Liao, P. Zhou, S. Huang, D. Yang, S. Chen, Y. Jiang, Y. Hu, J. Cai, S. Liu, J. Luo, et al. Genie envisioner: A unified world foundation platform for robotic manipulation. arXiv preprint arXiv:2508.05635, 2025.
- F. Lin, R. Nai, Y. Hu, J. You, J. Zhao, and Y. Gao. Onetwovla: A unified vision-language-action model with adaptive reasoning. arXiv preprint arXiv:2505.11917, 2025. URL <https://arxiv.org/abs/2505.11917>.
- T.-Y. Lin, M. Maire, S. Belongie, J. Hays, P. Perona, D. Ramanan, P. Dollár, and C. L. Zitnick. Microsoft coco: Common objects in context. In European Conference on Computer Vision, pages 740–755. Springer, 2014.
- F. Liu, K. Fang, P. Abbeel, and S. Levine. Moka: Open-vocabulary robotic manipulation through mark-based visual prompting. In First Workshop on Vision-Language Models for Navigation and Manipulation at ICRA 2024, 2024.
- Y. Lou, Y. Ye, Y. Fu, J. Cen, X. Chi, Y. Lyu, P. Jia, S. Han, Z. Lu, and S. Zhang. Dream-tac: A unified tactile world action model for contact-rich robot manipulation. arXiv preprint arXiv:2606.08737, 2026.
- G. Lu, W. Guo, C. Zhang, Y. Zhou, H. Jiang, Z. Gao, Y. Tang, and Z. Wang. Vla-rl: Towards masterful and general robotic manipulation with scalable reinforcement learning. arXiv preprint arXiv:2505.18719, 2025a.
- G. Lu, B. Jia, P. Li, Y. Chen, Z. Wang, Y. Tang, and S. Huang. Gwm: Towards scalable gaussian world models for robotic manipulation. In Proceedings of the IEEE/CVF International Conference on Computer Vision, pages 9263–9274, 2025b.
- Y. Lu, Y. Fan, B. Deng, F. Liu, Y. Li, and S. Wang. Vl-grasp: a 6-dof interactive grasp policy for language-oriented objects in cluttered indoor scenes. In 2023 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS), pages 976–983. IEEE, 2023.

- G. Luo, G. Yang, Z. Gong, G. Chen, H. Duan, E. Cui, R. Tong, Z. Hou, T. Zhang, Z. Chen, et al. Visual embodied brain: Let multimodal large language models see, think, and control in spaces. arXiv preprint arXiv:2506.00123, 2025a.
- Y. Luo, C.-K. Fan, M. Dong, J. Shi, M. Zhao, B.-W. Zhang, C. Chi, J. Liu, G. Dai, R. Zhang, et al. Robobench: A comprehensive evaluation benchmark for multimodal large language models as embodied brain. arXiv preprint arXiv:2510.17801, 2025b.
- Q. Lv, W. Kong, H. Li, J. Zeng, Z. Qiu, D. Qu, H. Song, Q. Chen, X. Deng, and J. Pang. F1: A vision-language-action model bridging understanding and generation to actions. arXiv preprint arXiv:2509.06951, 2025.
- H. Ma, J. Cai, X. Xu, H. Li, Y. Yang, Y. Tian, J. Cao, H. Zhu, Z. Qiu, Y. Yang, et al. Internvla-a1.5: Unifying understanding, latent foresight, and action for compositional generalization. arXiv preprint arXiv:2607.04988, 2026.
- H. Morimitsu, X. Zhu, R. M. Cesar, X. Ji, and X.-C. Yin. Dpflow: Adaptive optical flow estimation with a dual-pyramid framework. In Proceedings of the Computer Vision and Pattern Recognition Conference, pages 17810–17820, 2025.
- S. Nasiriany, F. Xia, W. Yu, T. Xiao, J. Liang, I. Dasgupta, A. Xie, D. Driess, A. Wahid, Z. Xu, et al. Pivot: Iterative visual prompting elicits actionable knowledge for vlms. arXiv preprint arXiv:2402.07872, 2024.
- D. Niu, Y. Sharma, G. Biamby, J. Quenum, Y. Bai, B. Shi, T. Darrell, and R. Herzig. Llarva: Vision-action instruction tuning enhances robot learning. arXiv preprint arXiv:2406.11815, 2024.
- OpenAI. Gpt-4 technical report. arXiv:2303.08774, 2023.
- M. Oquab, T. Darcet, T. Moutakanni, H. Vo, M. Szafraniec, V. Khalidov, P. Fernandez, D. Haziza, F. Massa, A. El-Nouby, et al. Dinov2: Learning robust visual features without supervision. arXiv preprint arXiv:2304.07193, 2023.
- J. Pai, L. Achenbach, V. Montesinos, B. Forrai, O. Mees, and E. Nava. mimic-video: Video-action models for generalizable robot control beyond vlas. arXiv preprint arXiv:2512.15692, 2025.
- W. Peebles and S. Xie. Scalable diffusion models with transformers. In Proceedings of the IEEE/CVF International Conference on Computer Vision, pages 4195–4205, 2023.
- A. Psiris, V. Argyriou, E. K. Markakis, P. Sarigiannidis, E. Gavves, K. Bekris, et al. Foundation models in robotics: A comprehensive review of methods, models, datasets, challenges and future research directions. arXiv preprint arXiv:2604.15395, 2026.
- N. Ravi, V. Gabeur, Y.-T. Hu, R. Hu, C. Ryali, T. Ma, H. Khedr, R. Rädle, C. Rolland, L. Gustafson, E. Mintun, J. Pan, K. V. Alwala, N. Carion, C.-Y. Wu, R. Girshick, P. Dollár, and C. Feichtenhofer. Sam 2: Segment anything in images and videos. arXiv preprint arXiv:2408.00714, 2024. URL <https://arxiv.org/abs/2408.00714>.
- P. Sermanet, T. Ding, J. Zhao, F. Xia, D. Dwibedi, K. Gopalakrishnan, C. Chan, G. Dulac-Arnold, S. Maddingeni, N. J. Joshi, et al. Robovqa: Multimodal long-horizon reasoning for robotics. In 2024 IEEE International Conference on Robotics and Automation (ICRA), pages 645–652. IEEE, 2024.
- L. X. Shi, B. Ichter, M. Equi, L. Ke, K. Pertsch, Q. Vuong, J. Tanner, A. Walling, H. Wang, N. Fusai, et al. Hi robot: Open-ended instruction following with hierarchical vision-language-action models. arXiv preprint arXiv:2502.19417, 2025.

- Q. Sun, P. Hong, T. D. Pala, V. Toh, U. Tan, D. Ghosal, S. Poria, et al. Emma-x: An embodied multimodal action model with grounded chain of thought and look-ahead spatial reasoning. arXiv preprint arXiv:2412.11974, 2024.
- P. Sundaresan, S. Belkhale, D. Sadigh, and J. Bohg. Kite: Keypoint-conditioned policies for semantic manipulation. arXiv preprint arXiv:2306.16605, 2023.
- H. Tan, E. Zhou, Z. Li, Y. Xu, Y. Ji, X. Chen, C. Chi, P. Wang, H. Jia, Y. Ao, et al. Robobrain 2.5: Depth in sight, time in mind. arXiv preprint arXiv:2601.14352, 2026.
- B. R. Team, M. Cao, H. Tan, Y. Ji, M. Lin, Z. Li, Z. Cao, P. Wang, E. Zhou, Y. Han, et al. Robobrain 2.0 technical report. arXiv preprint arXiv:2507.02029, 2025a.
- G. Team, A. Ye, B. Wang, C. Ni, G. Huang, G. Zhao, H. Li, J. Zhu, K. Li, M. Xu, et al. Gigaworld-0: World models as data engine to empower embodied ai. arXiv preprint arXiv:2511.19861, 2025b.
- G. Team, B. Wang, B. Li, C. Ni, G. Huang, G. Zhao, H. Li, J. Li, J. Lv, J. Liu, et al. Gigabrain-0.5 m*: a vla that learns from world model-based reinforcement learning. arXiv preprint arXiv:2602.12099, 2026.
- G. D. Team. Gemini: A family of highly capable multimodal models. arXiv preprint arXiv:2312.11805, 2023. URL <https://arxiv.org/abs/2312.11805>.
- T. Wan, A. Wang, B. Ai, B. Wen, C. Mao, C.-W. Xie, D. Chen, F. Yu, H. Zhao, J. Yang, et al. Wan: Open and advanced large-scale video generative models. arXiv preprint arXiv:2503.20314, 2025.
- L. Wang, X. Chen, J. Zhao, and K. He. Scaling proprioceptive-visual learning with heterogeneous pre-trained transformers. Advances in Neural Information Processing Systems, 37:124420–124450, 2024a.
- P. Wang, S. Bai, S. Tan, S. Wang, Z. Fan, J. Bai, K. Chen, X. Liu, J. Wang, W. Ge, et al. Qwen2-vl: Enhancing vision-language model’s perception of the world at any resolution. arXiv preprint arXiv:2409.12191, 2024b.
- K. Wu, C. Hou, J. Liu, Z. Che, X. Ju, Z. Yang, M. Li, Y. Zhao, Z. Xu, G. Yang, et al. Robomind: Benchmark on multi-embodiment intelligence normative data for robot manipulation. arXiv preprint arXiv:2412.13877, 2024.
- Z. Wu, Y. Zhou, X. Xu, Z. Wang, and H. Yan. Momanipvla: Transferring vision-language-action models for general mobile manipulation. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition, pages 1714–1723, 2025.
- M. Xu, Z. Xu, Y. Xu, C. Chi, G. Wetzstein, M. Veloso, and S. Song. Flow as the cross-domain manipulation interface. In 8th Annual Conference on Robot Learning, 2024.
- X. Xu, H. Li, J. Ye, Y. Chen, J. Zeng, X. Chen, L. Xu, D. Lin, W. Li, and J. Pang. Futurevla: Joint visuomotor prediction for vision-language-action model. arXiv preprint arXiv:2603.10712, 2026.
- H. Xue, Y. Ge, Y. Zeng, Z. Li, M.-Y. Liu, Y. Chen, and J. Fan. Point-it-out: Benchmarking embodied reasoning for vision language models in multi-stage visual grounding. arXiv preprint arXiv:2509.25794, 2025.
- S. Yang, H. Li, Y. Chen, B. Wang, Y. Tian, T. Wang, H. Wang, F. Zhao, Y. Liao, and J. Pang. Instructvla: Vision-language-action instruction tuning from understanding to manipulation. arXiv preprint arXiv:2507.17520, 2025.

- S. Yang, L. Xu, H. Li, J. Mu, J. Zeng, D. Lin, and J. Pang. Robo3r: Enhancing robotic manipulation with accurate feed-forward 3d reconstruction. [arXiv preprint arXiv:2602.10101](#), 2026.
- S. Ye, Y. Ge, K. Zheng, S. Gao, S. Yu, G. Kurian, S. Indupuru, Y. L. Tan, C. Zhu, J. Xiang, et al. World action models are zero-shot policies. [arXiv preprint arXiv:2602.15922](#), 2026a.
- S. Ye, Y. Ge, K. Zheng, S. Gao, S. Yu, G. Kurian, S. Indupuru, Y. L. Tan, C. Zhu, J. Xiang, et al. World action models are zero-shot policies. [arXiv preprint arXiv:2602.15922](#), 2026b.
- Y. Ye, J. Ma, J. Cen, and Z. Lu. Token expand-merge: Training-free token compression for vision-language-action models. *IEEE Robotics and Automation Letters*, 11(8):9279–9286, 2026c. doi: 10.1109/LRA.2026.3703265.
- W. Yuan, J. Duan, V. Blukis, W. Pumacay, R. Krishna, A. Murali, A. Mousavian, and D. Fox. Robo-point: A vision-language model for spatial affordance prediction for robotics. [arXiv preprint arXiv:2406.10721](#), 2024.
- M. Zawalski, W. Chen, K. Pertsch, O. Mees, C. Finn, and S. Levine. Robotic control via embodied chain-of-thought reasoning. [arXiv preprint arXiv:2407.08693](#), 2024.
- J. Zhang, K. Pertsch, J. Zhang, and J. J. Lim. Sprint: Scalable policy pre-training via language instruction relabeling. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 9168–9175. IEEE, 2024.
- Q. Zhao, Y. Lu, M. J. Kim, Z. Fu, Z. Zhang, Y. Wu, Z. Li, Q. Ma, S. Han, C. Finn, et al. Cot-vla: Visual chain-of-thought reasoning for vision-language-action models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1702–1713, 2025.
- E. Zhou, J. An, C. Chi, Y. Han, S. Rong, C. Zhang, P. Wang, Z. Wang, T. Huang, L. Sheng, et al. Roborefer: Towards spatial referring with reasoning in vision-language models for robotics. [arXiv preprint arXiv:2506.04308](#), 2025a.
- Z. Zhou, Y. Zhu, M. Zhu, J. Wen, N. Liu, Z. Xu, W. Meng, R. Cheng, Y. Peng, C. Shen, et al. Chatvla: Unified multimodal understanding and robot control with vision-language-action model. [arXiv preprint arXiv:2502.14420](#), 2025b.

A. Appendix

A.1. Contributors

Ziqin Wang^{1,3,*}, Hao Li^{2,3,*}, Weijun Wang¹, Junhao Cai³, Jia Zeng³, Yilun Chen³, Jiangmiao Pang³, Si Liu¹

A.2. Statements

RoboInter1.5 is an extended version of our previously published technical report, *RoboInter: A Holistic Intermediate Representation Suite Towards Robotic Manipulation* (Li et al., 2026a). The present work builds directly upon the framework, methodology, and experimental foundation established in the earlier version of *RoboInter*. Accordingly, substantial portions of the main text and supplementary material are inherited from or adapted from the original report, while the newly introduced components, experiments, and analyses constitute the primary extensions presented in *RoboInter1.5*. For detailed appendix content, please refer to *RoboInter1.0* (Li et al., 2026a).

A.3. Additional Real-world ID and OOD Validation

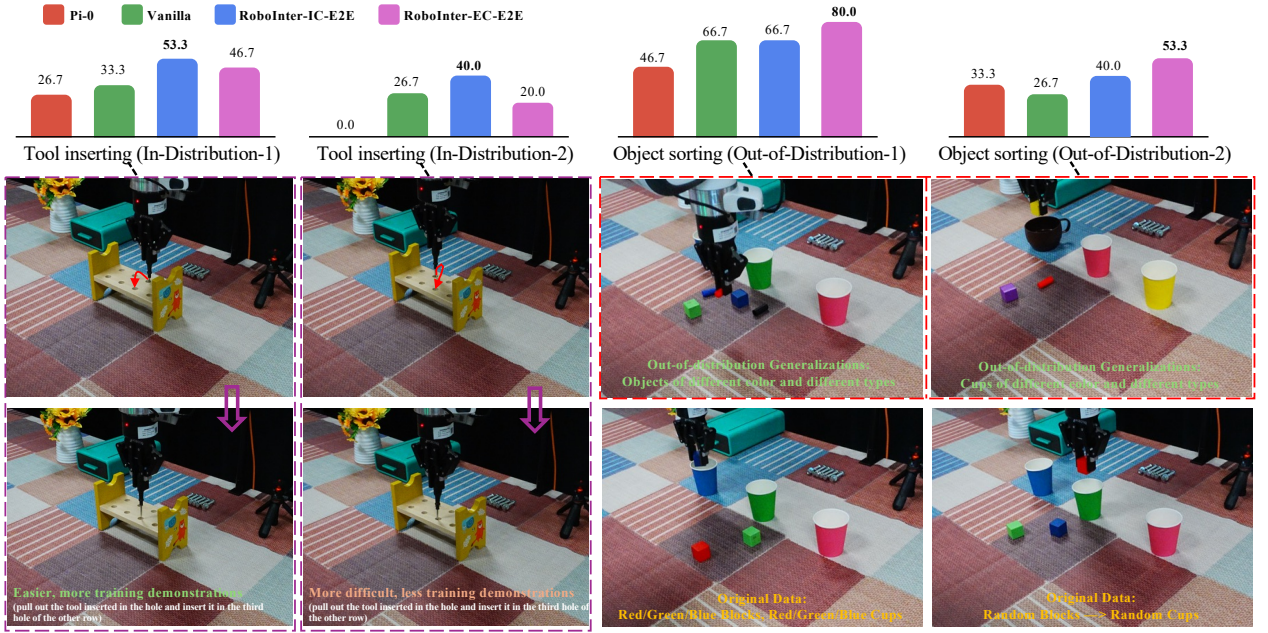


Figure 9. **Additional real-world ID and OOD validation.** (Left) *Tool Inserting*: a precision ID task requiring accurate contact handling and slot alignment. (Right) *Object Sorting*: an OOD task that tests language-guided generalization using novel objects and containers.

To further disentangle in-distribution (ID) and out-of-distribution (OOD) generalization, we introduce two additional real-world tasks that emphasize different aspects of control and reasoning:

- **Tool Inserting (ID-oriented).** A precision-controlled manipulation task that evaluates the model’s ability to fit fine-grained in-distribution actions. The robot must pull a metal tool out of a 1.5 cm × 1.5 cm slot and re-insert it into another slot of the same size. Two ID variants with different initial positions and different training demonstrations are used, each requiring accurate contact handling.

* Equal core contributions, ordered by coin toss. ¹Beihang University, ²University of Science and Technology of China, ³Shanghai Artificial Intelligence Laboratory.

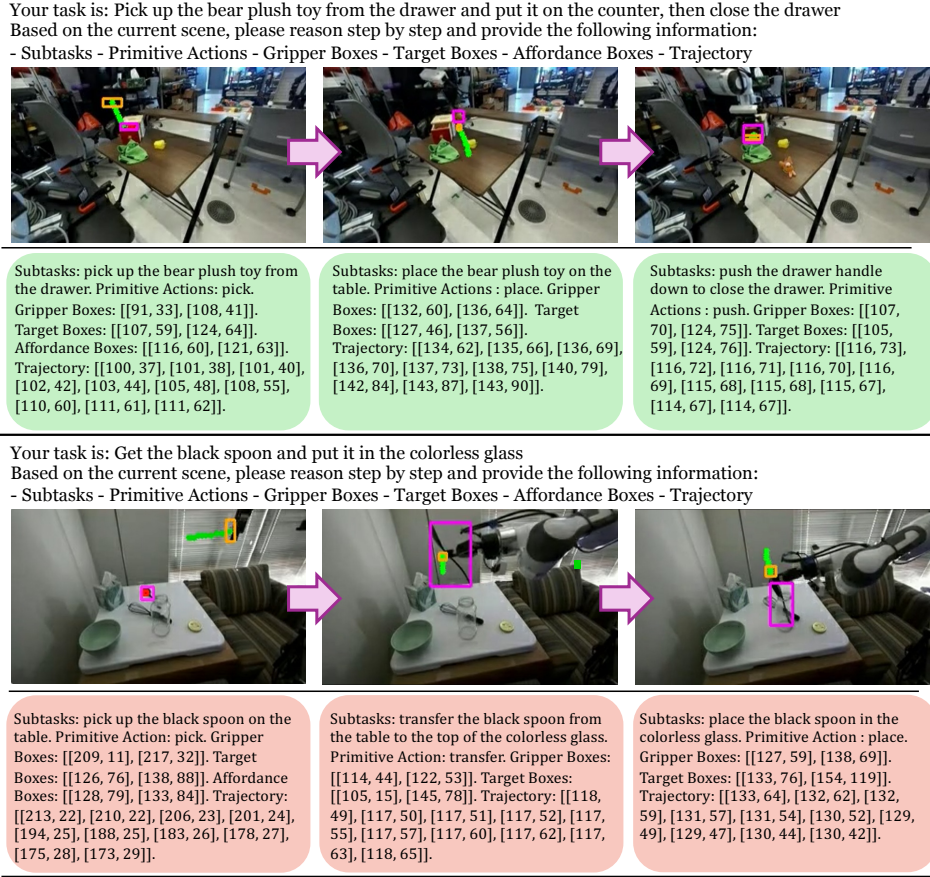


Figure 10. **Chain of thought of RoboInter-VLA.** Two representative examples (used in RoboInter-EC-E2E and RoboInter-Modular) are shown. The upper example involves a sequence of manipulation behaviors, including picking, placing, and pushing, while the lower one focuses on a pick-and-place task. RoboInter-VLA predicts and utilizes structured chain-of-thought representations consisting of subtasks, primitive skills, gripper boxes, target object boxes, affordance boxes, and traces.

- **Object Sorting (OOD-oriented).** A generalization task in which the robot must place objects into their corresponding target containers. Training demonstrations include only red, green, and blue objects and cups with simple pick-and-place motions. The OOD setting introduces novel objects and cups with novel colors, shapes, or types, assessing whether models can generalize sorting behaviors according to language instructions beyond the training distribution.

The results in Figure 9 show complementary strengths of the two variants: EC-E2E achieves stronger OOD performance owing to its explicit reasoning, whereas IC-E2E exhibits superior ID robustness. Overall, both variants outperform the Vanilla and π_0 baselines, demonstrating that intermediate representations significantly benefit both ID precision and OOD generalization.

A.4. Additional Qualitative results on RoboInter-VLA

Figure 10 shows that, in in-the-wild open-loop scenarios, RoboInter-VLA first predicts structured chain-of-thought representations before generating actions. Such intermediate reasoning provides the VLA model with a richer perception of the environment and task semantics, thereby improving its generalization ability and execution accuracy.