
No Magic, Just Building Blocks: Sparse Compositional Flow Matching for Embodied Trajectories

Yan Tang¹, Yuanbo Tang¹, Tingyu Cao¹, Shaolun Huang¹, Yang Li²

¹ Tsinghua Shenzhen Graduate School, Tsinghua University, Shenzhen, China
tangyan7025@gmail.com

² School of AI, Chinese University of Hong Kong (Shenzhen)
yangl@cuhk.edu.cn

Abstract

Embodied trajectories, such as the executable motion sequences of robotic manipulators, underwater vehicles, and mobile robots, are a fundamental output of embodied AI. Modern generative models often treat them as a dense, monolithic signal generated point by point, fitting an intricate high-dimensional posterior while leaving the data’s latent structure unmodeled, the same sample inefficiency long identified by the structured generative model literature. We argue that a *compositional latent structure* is a natural choice: many embodied tasks share recurring motion fragments that can be made explicit as a finite repertoire of reusable motion primitives, and compositional units naturally align with subtask boundaries to support task decomposition. Existing compositional generators, however, compose in a latent space and rely on post-hoc decoding to relate sampled units to actual trajectory segments. We instead compose *directly in the physical trajectory space* through a flow-matching framework with two coupled designs. *Motion-Primitive Dictionary Learning* equips each atom with a learnable length mask and binary starting indicators so the atom itself is the primitive, reused verbatim wherever it is placed. *Structural Sparse Flow Matching with Geometric Constraints* then generates a binary placement matrix using duration-aware tokenization and a differentiable geometric loss that enforces spatial continuity and temporal contiguity where adjacent primitives meet. On Open X-Embodiment and 3DMoTraj, the framework attains state-of-the-art accuracy and reduces the FDE/ADE ratio from ~ 1.8 to 1.07, improving ADE by 19.2% and FDE by 21.0% over the strongest baseline.

1 Introduction

Embodied trajectories are the executable interface of physical agents: robotic manipulators, autonomous underwater vehicles navigating turbulent flows, and mobile robots traversing cluttered environments all ultimately commit to a sequence of physically realizable motions [1, 2, 3]. Generating such trajectories is therefore a fundamental task that underpins planning [4], control [5], and skill transfer [6] in embodied AI.

Modern generative models like VAEs, diffusion and flow matching [7, 8, 9, 10] have substantially advanced trajectory modeling, yet often share a single sample-space convention: a trajectory is treated as a *dense, monolithic* signal generated point by point in continuous coordinate space. Generating trajectory points in this way faces the same fundamental difficulty as generating any other complex high-dimensional data: the joint posterior is intricate enough that estimating it accurately demands large amounts of training data, while latent structure within the data is left unmodeled. This is precisely the gap addressed by the *structured generative model* literature [11, 12], which advocates

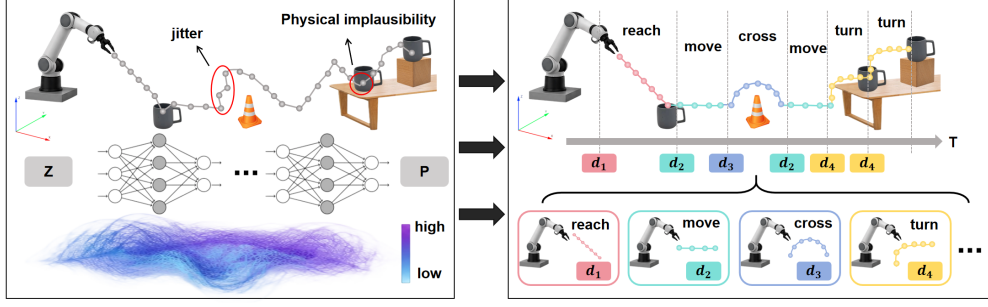


Figure 1: Compositional structure as the latent structure of embodied trajectories. Compared to dense, pointwise generation (left), our framework (right) reformulates trajectory generation as the placement of a finite library of reusable motion primitives on a shared timeline, exposing the latent structure of embodied trajectories as identifiable, reusable units with intrinsic interpretability.

explicitly modeling latent structure to reduce the sample complexity of generation. The remaining open question is therefore not whether trajectory generation needs a latent structure, but **what form of latent structure is appropriate**.

Among possible latent structures, *compositional structure* is a natural choice for embodied trajectories.

(i) Task commonality: tasks such as reaching, grasping, releasing, and retracting share recurring motion fragments within and across tasks, supporting an explicit, finite repertoire of reusable motion primitives. **(ii) Subtask alignment for interpretability:** compositional units naturally align with subtask boundaries, making the representation directly usable for task decomposition without post-hoc clustering or attribution. Existing compositional generators for embodied behavior, however, compose in a *latent space*, over skills, options, latent actions, or task skeletons [4, 13, 6, 14, 15], and rely on post-hoc decoding or attribution to relate sampled units to actual trajectory segments, so the property that a sampled element *directly* is an identifiable trajectory segment remains an aspiration.

Composing in physical trajectory space, not latent space. We instantiate this idea by maintaining a dictionary $\tilde{\mathbf{D}}$ of motion-primitive segments and assembling a full trajectory by *geometrically tiling* selected primitives onto a shared timeline. This is non-trivial: each entry must remain shape-stable across instances (standard convolutional dictionary learning fails here, as atom shape and placement are jointly absorbed into the convolution output), and adjacent primitives must meet at their boundaries in a geometrically valid way. We resolve both with two designs sharing a single placement variable. **Motion-Primitive Dictionary Learning (MPDL)** equips each atom with a learnable length mask and binary starting indicators, so the atom *itself* (not its convolution output) is the primitive and appears verbatim wherever placed. **Structural Sparse Flow Matching with Geometric Constraints** then generates the placement matrix $\hat{\mathbf{R}} \in \{0, 1\}^{M \times L}$, which primitives start at which timesteps, using duration-aware tokenization and a differentiable geometric loss on the predicted clean endpoint that penalizes spatial discontinuities and temporal gaps at primitive boundaries. On Open X-Embodiment[16] (manipulation) and 3DMoTraj [2] (3D underwater) benchmarks, the framework attains state-of-the-art accuracy and reduces the ratio of final displacement error (FDE) to average displacement error (ADE) from ~ 1.8 to 1.07, improving ADE by 19.2% and FDE by 21.0% over the strongest baseline.

Contributions.

1. A trajectory generation framework that composes *in the physical trajectory space* rather than a latent space, so every generated unit is itself an identifiable trajectory segment without post-hoc decoding or attribution.
2. *Motion-Primitive Dictionary Learning*: anchored differentiable length masks and binary starting indicators yield a primitive library whose entries remain shape-stable across instances and are directly samplable by a generative model.
3. *Structural Sparse Flow Matching with Geometric Constraints*: flow matching over the binary placement matrix with duration-aware tokenization and a differentiable geometric loss on the predicted clean endpoint, achieving an FDE/ADE ratio of 1.07 (vs. ~ 1.8 for baselines) and 19.2% / 21.0% ADE / FDE gains on two embodied benchmarks.

2 Related Work

Generative trajectory models. Trajectory generation has been studied across pedestrian forecasting [17, 18, 19], autonomous driving [20, 21, 22, 23], robot manipulation [1, 5, 24], and 3D embodied motion [2, 25], with modeling families spanning RNN/Transformer regressors [26, 18, 27], CVAEs [7, 28, 29], GANs [30, 31, 32], normalizing flows [33, 34], denoising diffusion [8, 35, 36], and flow matching [9, 37, 38, 10]. Despite this methodological diversity, these models share a single sample space, a dense coordinate sequence whose elementary unit is a single timestep, leaving motion structure and segment boundaries implicit. We do not propose another dense estimator; instead, we change the sample space itself, generating trajectories as sparse placement over a learned primitive library.

Motion primitives and dictionary learning. A long line of work represents motion as compositions of reusable units, including Dynamic and Probabilistic Movement Primitives [39, 40, 41], options [15], skill embeddings [6], latent-action models [14], and motif-based representations [42]. In parallel, sparse coding and convolutional dictionary learning [43] represent temporal signals as shifted atoms with sparse activations, with applications to motion segmentation and trajectory compression [44]. Across both threads, the learned units have been used predominantly for representation, retrieval, or control rather than as the sample space of a generative process. We close this gap by attaching a differentiable length boundary and a multi-hot binary onset to each atom, so that the atom *itself* is the primitive and is directly samplable by a generative model.

Compositional and structured generative models. Compositional generative models have been studied for visual synthesis [45, 46], human motion [47], traffic simulation [48], robotic planning [4], and policy learning [13], with diffusion- and flow-based variants supporting guided sampling, condition conjunction, and trajectory stitching across complex distributions [49, 50, 35]. More broadly, the *structured generative model* literature [11, 12] advocates explicitly modeling latent structure to reduce the sample complexity of generation. In nearly all of this work, however, composition operates on conditions, latent factors, or predefined task skeletons, while the generated object itself remains a dense sequence whose elementary units are not directly exposed. Our framework departs structurally: composition *is* the sample space; the model generates discrete primitive–time placements and regularizes the predicted clean endpoint with a differentiable geometric loss that enforces spatial continuity and temporal contiguity between adjacent units.

3 Method

We model embodied trajectory generation as sparse composition over a learned motion-primitive library, where every trajectory is explained by a sparse binary placement matrix $\mathbf{R} \in \{0, 1\}^{M \times L}$ over a shared timeline. Throughout this paper, $\mathbf{R}$ is the sole intermediate representation: the dictionary parameterizes how $\mathbf{R}$ reconstructs back to a trajectory, while the flow matching vector field parameterizes how noise transports onto the manifold of physically valid $\mathbf{R}$. Both parameterizations are coupled through this shared variable and trained in a single optimization loop under one placement legality energy, so that dictionary learning and generative modeling never become separable modules. Sec. 3.1 defines the primitives and compositional synthesis; Sec. 3.2 formalizes the joint loop; Sec. 3.3 instantiates it for conditional prediction.

3.1 Motion-Primitive Dictionary Learning

Notation. Let $\mathbf{X} = \{\mathbf{x}_i\}_{i=1}^N$ with $\mathbf{x}_i \in \mathbb{R}^{C \times L}$ denote N trajectories of L timesteps in C -dimensional Cartesian space, and let $\mathbf{D} = \{\mathbf{d}_j\}_{j=1}^M$ with $\mathbf{d}_j \in \mathbb{R}^{C \times K}$ be a convolutional dictionary of M atoms of maximum temporal extent $K \leq L$. A standard convolutional dictionary paired with continuous-valued activations entangles atom shape with instance-specific placement, producing primitives whose realized form drifts across occurrences (full diagnosis in App. ??). We therefore define primitives so that shape, duration, and placement are separated by construction.

Anchored masked atoms. Each atom $\mathbf{d}_j$ carries a temporal extent through an unconstrained parameter $\phi_j \in \mathbb{R}$. We define a soft width and a sharpened-sigmoid length mask of steepness α ,

$$w_j = 1 + (K - 1) \sigma(\phi_j) \in (1, K), \quad m_{j,s} = \sigma(\alpha(w_j - s - \tfrac{1}{2})), \quad s = 0, \dots, K-1, \quad (1)$$

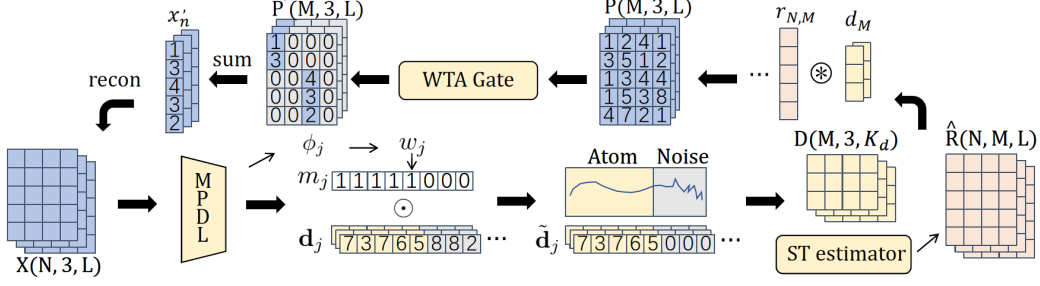


Figure 2: **Motion-primitive dictionary learning.** Length masks define crisp, learnable temporal boundaries for each atom, so that the masked atom itself is the self-contained motion primitive. Multi-hot binary placement encodes only the primitive’s onset occurrences in $\hat{\mathbf{R}}$. A per-timestep winner-take-all gate resolves residual temporal overlaps during reconstruction, yielding a compact library of reusable, disentangled motion primitives.

and form the *effective atom* $\tilde{\mathbf{d}}_j = \mathbf{d}_j \odot (\mathbf{1}_C \mathbf{m}_j^\top) \in \mathbb{R}^{C \times K}$, a temporally contiguous trajectory segment of learnable duration anchored at $s=0$ in the atom’s local frame. A straight-through discretization yields integer effective lengths $\tilde{w}_j \in \{1, \dots, K\}$ for downstream index arithmetic; the structural reason why this anchoring + length-mask combination is necessary is given in App. ??.

Multi-hot binary placement. For trajectory i and atom j , a logit vector $\ell_{i,j} \in \mathbb{R}^L$ parameterizes independent onset probabilities $\mathbf{q}_{i,j} = \sigma(\ell_{i,j}) \in [0, 1]^L$. Discrete binary onsets $\hat{\mathbf{r}}_{i,j} \in \{0, 1\}^L$ are obtained via the straight-through Bernoulli estimator

$$b_{i,j,k} \sim \text{Bernoulli}(q_{i,j,k}), \quad \hat{r}_{i,j,k} = b_{i,j,k} + q_{i,j,k} - \text{sg}(q_{i,j,k}), \quad (2)$$

where $\text{sg}(\cdot)$ denotes stop-gradient. Because every nonzero entry of $\hat{\mathbf{r}}_{i,j}$ is binary, convolution with $\tilde{\mathbf{d}}_j$ reduces to a superposition of pure temporal shifts, so $\tilde{\mathbf{d}}_j$ appears *verbatim* in every reconstruction wherever it is placed.

Compositional Synthesis. Stacking the binary onset rows into the placement matrix $\hat{\mathbf{R}}_i \in \{0, 1\}^{M \times L}$, a per-timestep winner-take-all gate $\hat{\mathbf{g}}_i \in \{0, 1\}^{M \times L}$ resolves residual ambiguity when several primitive types overlap in time, ensuring each timestep is owned by a single primitive identity. The compositional synthesis is then

$$\hat{\mathbf{x}}_i \triangleq \mathcal{D}_{\hat{\mathbf{D}}}(\hat{\mathbf{R}}_i) = \sum_{j=1}^M (\tilde{\mathbf{d}}_j * \hat{\mathbf{r}}_{i,j}) \odot \hat{\mathbf{g}}_{i,j} \in \mathbb{R}^{C \times L}. \quad (3)$$

We have now specified how a placement matrix $\hat{\mathbf{R}}$ synthesizes into a trajectory; what remains is to optimize $\hat{\mathbf{R}}$, the primitives $\hat{\mathbf{D}}$, and a generative process over $\hat{\mathbf{R}}$ jointly.

3.2 Structural Sparse Flow Matching as Joint Compositional Optimization

$\hat{\mathbf{R}}_1$ as the single bridge. We treat the binary placement matrix $\hat{\mathbf{R}}_1 \in \{0, 1\}^{M \times L}$ as the sole bridge between primitive learning and trajectory generation: the dictionary uses $\hat{\mathbf{R}}_1$ to reconstruct observed trajectories, while the flow matching vector field uses $\hat{\mathbf{R}}_1$ as its target endpoint. The dictionary side produces $\hat{\mathbf{R}}_1^{\text{dec}}$ via the straight-through Bernoulli sampler of Sec. 3.1, supervised by the requirement that $\mathcal{D}_{\hat{\mathbf{D}}}(\hat{\mathbf{R}}_1^{\text{dec}})$ explains the observed trajectory. The flow side produces $\hat{\mathbf{R}}_1^{\text{flow}} = \mathbf{Z}_t + (1-t) \mathbf{v}_\theta(\mathbf{Z}_t, t)$ as its predicted clean endpoint along the noise-to-placement transport. In the single training loop introduced below, both estimates participate in the same legality energy with no stop-gradient between them: they are not independent objectives, but two parameterizations of the same combinatorial event sequence, and convergence forces them to agree.

Placement legality energy. We unify all constraints on placements through a single *placement legality energy* Ψ , whose four sub-terms are not independent regularizers but four facets of the same

event sequence induced by $\hat{\mathbf{R}}$:

$$\Psi(\hat{\mathbf{R}}; \tilde{\mathbf{D}}, \mathbf{x}) = \underbrace{\Psi_{\text{rec}}}_{\text{Reconstruction fidelity}} + \lambda_s \underbrace{\Psi_{\text{sparse}}}_{\text{event budget}} + \lambda_p \underbrace{\Psi_{\text{prim}}}_{\text{primitive integrity}} + \lambda_g \underbrace{\Psi_{\text{geo}}}_{\text{event geometry}}. \quad (4)$$

In plain terms, Ψ_{rec} asks whether the placement reconstructs the trajectory, Ψ_{sparse} caps the event count, Ψ_{prim} keeps each primitive responsible for a single coherent motion fragment, and Ψ_{geo} requires adjacent primitives to meet geometrically; we now give each sub-term in turn. **Reconstruction fidelity:** $\Psi_{\text{rec}} = \|\mathbf{x} - \mathcal{D}_{\tilde{\mathbf{D}}}(\hat{\mathbf{R}})\|_F^2$ requires that the placement reconstruct back to the observed trajectory through the synthesis of Eq. (3). **Event budget:** $\Psi_{\text{sparse}} = \|\hat{\mathbf{R}}\|_1$ caps the number of events that may explain a trajectory. **Primitive integrity:** writing the per-timestep gate as an ownership distribution $\pi_{i,t} = \hat{\mathbf{g}}_{i,:t} \in \Delta^{M-1}$ and weighting by trajectory-conditional continuity $\omega_{i,t}(\mathbf{x}) = \exp(-\|\mathbf{x}_{i,t+1} - \mathbf{x}_{i,t}\|/\tau)$, $\Psi_{\text{prim}} = \sum_{t=1}^{L-1} \omega_{i,t}(\mathbf{x}) \|\pi_{i,t+1} - \pi_{i,t}\|_1$. This is not a generic smoothness penalty: it is conditioned on the trajectory’s own kinematic continuity, so a single coherent motion fragment cannot be split across multiple atoms, exactly the meaning of “primitive integrity”. **Event geometry.** Each nonzero entry of $\hat{\mathbf{R}}$ defines an event $e = (j_e, k_e, P_e)$ with realized probability $P_e = \hat{R}_{j_e, k_e}$, onset k_e , offset $k_e + \bar{w}_{j_e}$, start point $\mathbf{a}_e = \tilde{\mathbf{d}}_{j_e}(:, 0)$, and end point $\mathbf{b}_e = \tilde{\mathbf{d}}_{j_e}(:, \bar{w}_{j_e} - 1)$. The pairwise compatibility cost

$$c(e, e') = \underbrace{\|\mathbf{b}_e - \mathbf{a}_{e'}\|_2^2}_{\text{spatial continuity}} + \eta \underbrace{|k_{e'} - (k_e + \bar{w}_{j_e})|}_{\text{temporal contiguity}} + \underbrace{\rho \text{ovl}(e, e')}_{\text{exclusivity}}, \quad (5)$$

expresses, in one expression, the spatial and temporal continuity that adjacent events should respect together with their mutual exclusivity. The pairwise temporal overlap $\text{ovl}(e, e')$ is the length of the interval intersection of the two events on the timeline; its formal definition, properties, and differentiable surrogate are given in App. ?? . Aggregating with a vacancy-weighted sum over event pairs gives

$$\Psi_{\text{geo}}(\hat{\mathbf{R}}; \tilde{\mathbf{D}}) = \sum_{e < e'} P_e P_{e'} \underbrace{\prod_{u: k_e < k_u < k_{e'}} (1 - P_u)}_{\text{vacancy factor}} c(e, e'). \quad (6)$$

The vacancy factor activates the constraint only between events that are likely to be temporally adjacent, redirecting it whenever an intermediate event intervenes. Concretely, $\prod_{u: k_e < k_u < k_{e'}} (1 - P_u)$ is the probability that no other event occupies the open interval between e and e' , so $c(e, e')$ contributes its full magnitude only when e and e' are likely to be temporal neighbors on the timeline.

Flow matching as energy-coupled generation. With placements assembled into $\hat{\mathbf{R}}_1^{\text{dec}}$ at the current step, the flow interpolant and target velocity are

$$\mathbf{Z}_t = (1 - t) \mathbf{Z}_0 + t \hat{\mathbf{R}}_1^{\text{dec}}, \quad \dot{\mathbf{Z}}_t = \hat{\mathbf{R}}_1^{\text{dec}} - \mathbf{Z}_0, \quad \mathbf{Z}_0 \sim \mathcal{N}(\mathbf{0}, \sigma^2 \mathbf{I}), \quad t \sim \mathcal{U}(0, 1), \quad (7)$$

and the velocity field $\mathbf{v}_\theta$ regresses $\dot{\mathbf{Z}}_t$ onto $\hat{\mathbf{R}}_1^{\text{dec}}$, which is not a precomputed target but the placement inferred by the dictionary side at the current step, so gradients flow through it into both $\tilde{\mathbf{D}}$ and ℓ (full discussion in App. ??). That endpoint estimate

$$\hat{\mathbf{R}}_1^{\text{flow}} = \mathbf{Z}_t + (1 - t) \mathbf{v}_\theta(\mathbf{Z}_t, t) \quad (8)$$

enters Ψ in exactly the same way as $\hat{\mathbf{R}}_1^{\text{dec}}$, so geometric validity feeds back into θ . Architectural details of $\mathbf{v}_\theta$, including a duration-aware token initialization $\mathbf{h}_j^{(0)} = \text{Linear}(\mathbf{Z}_{t,j,:}) + \psi(w_j) + \text{MLP}(t)$ that exposes the underlying 1-D bin-packing geometry to multi-head self-attention, are deferred to App. ??.

Joint objective. Combining the dictionary-side legality, the flow-matching residual, and the flow-side legality, the joint training objective is

$$\min_{\tilde{\mathbf{D}}, \ell, \gamma, \theta} \mathbb{E}_{\mathbf{x}, t, \mathbf{Z}_0} \left[\Psi(\hat{\mathbf{R}}_1^{\text{dec}}; \tilde{\mathbf{D}}, \mathbf{x}) + \|\mathbf{v}_\theta(\mathbf{Z}_t, t) - \dot{\mathbf{Z}}_t\|_2^2 + \beta \Psi(\hat{\mathbf{R}}_1^{\text{flow}}; \tilde{\mathbf{D}}, \mathbf{x}) \right]. \quad (9)$$

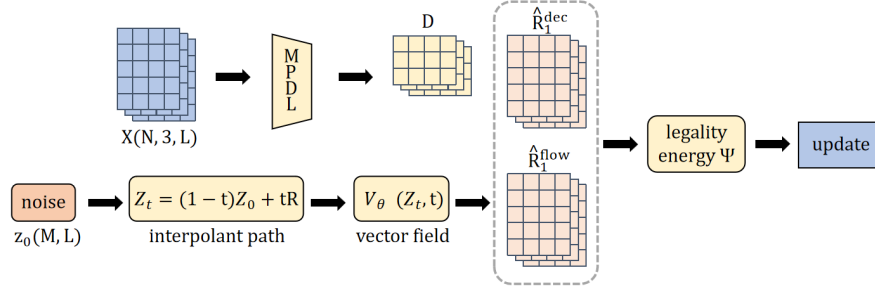


Figure 3: **Joint compositional optimization.** Dictionary and flow matching share a single intermediate variable $\hat{\mathbf{R}}_1$. The dictionary side produces $\hat{\mathbf{R}}_1^{\text{dec}}$, which the $\mathcal{D}_{\tilde{\mathbf{D}}}$ maps back to the observed trajectory; the flow side transports noise to a predicted endpoint $\hat{\mathbf{R}}_1^{\text{flow}}$. Both estimates are penalized by the same legality energy Ψ , and all parameters $\{\tilde{\mathbf{D}}, \ell, \gamma, \theta\}$ are updated through a single computation graph.

The three terms are not independent modules: the first shapes $\tilde{\mathbf{D}}$ and ℓ so that inferred placements explain real trajectories under valid event geometry; the second is the standard flow-matching consistency, but onto a target that is itself being learned; the third closes the loop by requiring the flow’s predicted endpoints to satisfy the same geometry, so improvements in the vector field feed back into the dictionary and vice versa.

3.3 Conditional Sampling and Prediction

For trajectory prediction we condition on an observed prefix $\mathbf{x}_{1:T_{\text{obs}}}$ and optional context c (e.g. task label, environment embedding), summarized by a context vector $\mathbf{h} = f_{\text{enc}}(\mathbf{x}_{1:T_{\text{obs}}}, c)$. The vector field becomes $\mathbf{v}_{\theta}(\mathbf{Z}_t, t, \mathbf{h})$; the placement legality energy Ψ and the joint objective in Eq. (9) are otherwise unchanged. Training remains a single loop: $\hat{\mathbf{R}}_1^{\text{dec}}$ now explains the observed prefix, $\hat{\mathbf{R}}_1^{\text{flow}}$ predicts the future, and Ψ requires both estimates to be kinematically valid concatenations onto the same timeline. At inference, integrating $\mathbf{v}_{\theta}(\cdot, \cdot, \mathbf{h})$ from $t=0$ to $t=1$ yields $\hat{\mathbf{R}}_1^{\text{flow}}$, which is binarized at 0.5 and synthesized through $\mathcal{D}_{\tilde{\mathbf{D}}}$ to produce the predicted future trajectory $\hat{\mathbf{x}}_{T_{\text{obs}}+1:L}$. Conditional prediction is thus a conditioned instance of the same joint compositional system, not a separately trained model. Architectural details of f_{enc} , the AdaLN conditioning of $\mathbf{v}_{\theta}$, classifier-free guidance, and the conditional sampling procedure are given in App. ??.

4 Experiments

In this section, our goal is: 1) to verify that our approach achieves strong performance across diverse embodied benchmarks; 2) to analyze how different trajectory number scales and different parameter choices affect the performance of our method. Additional experimental analyses and discussions of partial failure cases are provided in detail in the appendix.

4.1 Conditional Case

4.1.1 Embodied Trajectory Prediction in Laboratory Settings

Experimental Setup The Open X-Embodiment[16] dataset is currently the largest open-source real-world robot dataset. We select a subset of manipulation tasks, including but not limited to table wiping, hanging objects, and grasping toys, in order to evaluate the applicability of our method in indoor and daily-life scenarios. We employ a non-overlapping sliding window to generate samples. Each sample contains 20 trajectory points, with the first 8 points serving as the observed trajectory and the remaining 12 points as the ground truth future trajectory. The segments for each scenario are then randomly divided into training, validation, and test sets with an 8:1:1 ratio. To probe the effect of data scale and task diversity, we construct three groups of increasing difficulty (Table 1), varying the number of task categories and the total number of trajectories while keeping the sliding-window protocol fixed.

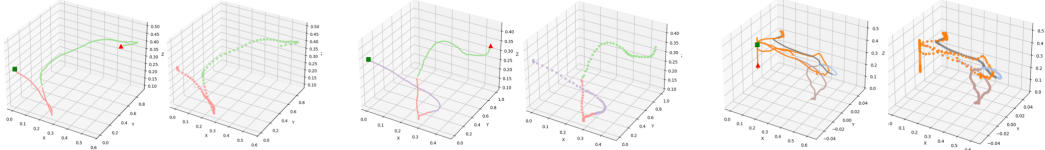


Figure 4: Here we demonstrate how primitive segments constitute trajectories. From left to right, three tasks of increasing complexity are presented. For each group, the left panel visualizes the primitive segments, while the right panel shows the resulting trajectory points.

Baselines We compare our approach against representative baselines from different methodological categories, selecting strong-performing methods from each category. Specifically, the baselines include CompDiffuser[35], a diffusion-based method; MoFlow[9], a flow-matching-based method; 3DMoTraj[2], an LSTM-based method; and LaM-SLidE[51], an encoder-decoder-based method. We additionally include ARMD[52] as a representative time-series forecasting baseline.

Table 1: Task groups used for the Open X-Embodiment experiments, spanning easy/medium/hard settings.

Group	#Tasks	#Samples	Avg. len	Max len
1 (easy)	1	5,866	48.33	64
2 (medium)	3	51,627	121.71	236
3 (hard)	5	233,741	252.74	744

Table 2: Task Group Performance Comparison. ADE/FDE are reported for each task group.

Method	Task Group = 1		Task Group = 2		Task Group = 3	
	ADE	FDE	ADE	FDE	ADE	FDE
ARMD[52]	0.952539	0.983366	0.272674	0.284185	0.278311	0.288450
3DMoTraj[2]	0.023835	0.032546	0.020756	0.038789	0.015767	0.032026
MoFlow[9]	0.016893	0.031199	0.012383	0.014987	0.015366	0.016302
CompDiffuser[35]	0.010486	0.018471	0.013773	0.029211	0.011172	0.025775
LED[36]	0.009302	0.015185	0.012759	0.023544	0.008919	0.018100
LaM-SLidE[51]	0.008470	0.013080	0.011940	0.015320	0.007841	0.011282
Ours	0.007424	0.010567	0.007993	0.011205	0.006333	0.008919

Performance gain increases as task complexity increases. Our method achieves the best performance on all three task groups, and its relative advantage grows systematically as task difficulty increases. ARMD[52], a generic time-series forecaster designed under stationarity assumptions, lags behind all other baselines by a wide margin, likely because embodied trajectories are non-stationary, task-conditioned compositional objects rather than smooth statistical sequences. Among the trajectory-specific baselines, compared with the strongest one, LaM-SLidE[51], our method yields a 12.3% relative improvement in ADE and a 19.2% relative improvement in FDE on Task Group 1. On Task Group 2, the relative improvement in ADE further expands to 33.1%, while the FDE improvement reaches 26.9%. On the most challenging Task Group 3, the relative improvements remain substantial at 19.2% in ADE and 21.0% in FDE. This trend is not incidental. As trajectory length and task diversity increase, black-box generative models are forced to fit pointwise dynamics over a much larger distributional space. By contrast, our method’s complexity does not grow linearly with trajectory length, but is instead governed by the combinatorial complexity of primitive composition.

4.1.2 Embodied Trajectory Prediction in Natural Environments

Dataset Introduction. The 3DMoTraj[2] dataset comprises eight scenarios featuring three-dimensional (3D) trajectories collected from unmanned underwater vehicles (UUVs) operating in ocean environments. The 3D trajectories are recorded using positioning devices installed on the UUVs. Each scenario includes three UUVs following predefined formations. Notably, in addition to the complex 3D motion patterns of each UUV, the trajectories also exhibit fluctuations caused by ocean currents, which introduce significant challenges to the prediction task. We believe that the experiments in this section help validate our method’s performance in embodied environments influenced by external physical conditions.

Experimental Setup. On this dataset, we are committed to adopting the same experimental setup as the original authors to ensure fair comparative experiments. For this dataset, we employ the same sliding window as Sec. 4.1.1. The fragments for each scenario are then randomly divided into training, validation, and test sets with a 1:1:1 ratio.

Table 3: Scenario Performance Comparison (ADE/FDE)

Scenario	#1	#2	#3	#4	#5	#6	#7	#8	Mean
SSTGCNN[53]	2.86/5.19	1.05/1.47	1.08/1.65	2.23/3.83	1.15/1.34	2.25/4.00	4.49/8.28	2.18/3.30	2.16/3.63
MSRL[54]	3.72/5.42	0.62/0.73	0.56/0.61	1.69/2.05	1.85/2.50	1.54/2.84	1.14/1.73	0.90/1.15	1.50/2.13
FlowChain[55]	1.44/3.20	0.61/0.99	0.62/1.02	0.90/1.76	0.54/0.84	1.31/2.52	1.18/2.53	0.93/1.84	0.94/1.84
PECNet[56]	0.79/1.05	0.70/1.29	0.74/1.26	1.29/2.46	0.41/0.58	1.16/1.65	0.92/1.53	1.22/2.21	0.90/1.50
LBEBM[57]	0.72/0.98	0.52/0.80	0.64/1.11	0.94/1.87	0.35/0.57	1.02/1.67	1.27/2.35	1.25/2.42	0.84/1.47
NPSN[58]	0.75/0.83	0.69/1.21	0.71/0.96	0.83/1.28	0.34/0.40	0.97/1.20	0.71/0.93	1.03/1.50	0.75/1.04
TrajCLIP[59]	0.56/0.94	0.40/0.69	0.37/0.70	1.32/2.81	0.33/0.58	0.79/1.27	1.04/2.02	0.85/1.69	0.71/1.34
CausalHTP[60]	0.69/1.29	0.45/0.78	0.45/0.78	0.79/1.40	0.49/0.87	1.11/1.95	0.97/1.96	0.74/1.40	0.71/1.30
MS-TIP[61]	0.62/1.16	0.61/1.16	0.58/1.15	0.78/1.42	0.57/1.11	0.84/1.50	0.77/1.44	0.79/1.52	0.70/1.31
MRGTraj[62]	0.63/1.29	0.34/0.54	<u>0.33/0.55</u>	0.94/1.89	0.42/0.83	0.99/1.73	1.06/2.44	0.84/1.63	0.69/1.36
S-Implicit[63]	0.54/0.87	0.43/0.72	0.47/0.84	1.13/2.31	0.40/0.68	0.85/1.38	<u>0.62/1.06</u>	0.98/1.92	0.68/1.22
3DMoTraj[2]	0.36/0.51	0.37/0.60	0.48/0.86	0.81/1.69	0.28/0.44	<u>0.69/1.10</u>	1.12/1.95	<u>0.55/0.99</u>	<u>0.58/1.02</u>
Ours	<u>0.53/0.55</u>	0.36/0.44	0.32/0.34	0.42/0.50	<u>0.32/0.34</u>	0.50/0.51	0.46/0.48	0.36/0.37	0.41/0.44

Structured generation on 3DMoTraj. Beyond absolute error, the FDE/ADE ratio separates the two modeling paradigms: pointwise generators accumulate error along the temporal axis, so the endpoint deviation grows disproportionately (3DMoTraj[2] 1.76, S-Implicit 1.79, FlowChain 1.96), whereas our method reaches only 1.07 (0.44/0.41), close to the ideal 1.0, because it generates in the primitive-time placement space under the event-geometry term Ψ_{geo} (Eq. (6)) that penalizes both spatial discontinuities and temporal gaps at primitive boundaries. The 3DMoTraj setting also stresses the paradigm along an external-physics axis absent from the lab-manipulation tasks of Sec. 4.1.1, namely persistent ocean-current perturbations; under these disturbances our FDE still stays below 0.55 in every scenario (as low as 0.34), indicating that primitive-level composition, together with the pairwise compatibility cost of Eq. (5), preserves endpoint consistency even when the agent must continually adapt to an uncontrollable force field.

4.2 Unconditional Generation

Unconditional generation provides a stricter test of whether a model captures the intrinsic motion distribution of embodied trajectories, rather than merely extrapolating from an observed prefix. In this setting, we reuse the dataset and preprocessing pipeline from Sec. 4.1.1, but remove all conditioning inputs and train on full-length trajectories. For each sample, we first draw a trajectory length from the empirical length distribution of the dataset, and then require each method to generate a complete trajectory of the same length from its own generative prior. We evaluate distributional fidelity using Jensen–Shannon divergence (JSD) between the generated and real trajectory distributions under different generation scales.

As shown in Table 4, our method achieves the lowest JSD at all generation scales, with a clear margin over all baselines. The advantage persists as the number of generated samples increases, with JSD decreasing from 0.109 at 5% scale to 0.087 at 20% scale, indicating that the improvement is not a sampling artifact but reflects a more faithful model of the underlying trajectory distribution. We attribute this gain to the structural design of our framework: instead of generating dense coordinate sequences directly in continuous space, our method first synthesizes sparse primitive-time compositions and then maps them through a reusable motion library with explicit temporal boundaries. This compositional generation process better preserves the geometric and temporal regularities of real embodied motion, leading to substantially higher distribution-level fidelity in the unconditional setting.

4.3 Ablation Studies

We ablate both the dictionary size M and the core structural components of our method. In this setting, we reuse the dataset and preprocessing pipeline from Sec. 4.1.2 to comprehensively examine

Table 4: Unconditional generation performance measured by JSD. Lower is better. Generation Scale is percentage of generated data from original trajectories.

Method	Generation Scale		
	5%	10%	20%
ARMD[52]	0.653	0.648	0.647
3DMoTraj[2]	0.357	0.324	0.315
MoFlow[9]	0.311	0.293	0.285
CompDiffuser[35]	0.186	0.175	0.172
LaM-SLidE[51]	0.173	0.151	0.148
LED[36]	0.147	0.130	0.114
Ours	0.109	0.096	0.087

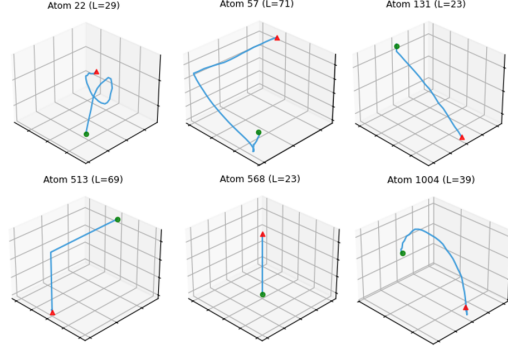


Figure 5: Randomly sampling dictionary items for primitive visualization. Clearly discernible and unambiguous semantics are observed.

the impact of the dictionary size M and core structural components on performance across different environments. Results are reported in Table 5.

Table 5: Ablation results on dictionary size M and key design components (ADE/FDE).

Scenario	#1	#2	#3	#4	#5	#6	#7	#8	Mean
$M = 3N$	0.53 / 0.55	0.36 / 0.44	0.32 / 0.34	0.42 / 0.50	0.32 / 0.34	0.50 / 0.51	0.46 / 0.48	0.36 / 0.37	0.41 / 0.44
$M = 2N$	0.70 / 0.71	0.50 / 0.59	0.47 / 0.53	0.61 / 0.72	0.42 / 0.44	0.69 / 0.70	0.62 / 0.65	0.51 / 0.52	0.56 / 0.61
$M = N$	1.07 / 1.08	0.69 / 0.79	0.66 / 0.74	0.86 / 1.04	0.60 / 0.62	1.11 / 1.14	0.92 / 0.95	0.75 / 0.81	0.83 / 0.90
w/o Mask	0.96 / 0.97	0.69 / 0.80	0.70 / 0.81	0.73 / 0.86	0.57 / 0.60	0.88 / 0.90	0.81 / 0.83	0.70 / 0.74	0.76 / 0.81
w/o Primitives	3.55 / 3.59	2.05 / 2.33	1.96 / 2.38	2.48 / 2.89	1.80 / 1.93	2.94 / 3.08	2.71 / 2.92	2.64 / 2.89	2.52 / 2.75

Dictionary size and component ablations. Scaling M from N to $3N$ monotonically improves mean ADE/FDE from 0.83/0.90 to 0.56/0.61 to 0.41/0.44, as a larger search space lets pruning retain more specialized primitives for finer tiling; even at $M = N$ our FDE (0.90) already beats the strongest baseline in Table 3, ruling out overparameterization and indicating that the learned atoms are reusable structural units rather than memorized fragments. The component ablations confirm where the gain comes from: removing the length mask degrades mean ADE/FDE to 0.76/0.81, showing that explicit temporal support is necessary for sharp primitive boundaries, while removing primitive decomposition altogether collapses performance to 2.52/2.75, so the improvement is driven by generation in the sparse compositional space rather than by the flow model alone.

5 Discussion and Conclusion

Limitations. Two practical boundaries: 1) The primitive library’s quality is bounded by training-data coverage, so under-represented motion modalities yield weak or absent atoms. 2) The kinematic loss enforces only local spatial/temporal continuity, not global dynamic feasibility such as torque limits or collision avoidance, which may demand domain-specific post-processing in safety-critical deployment. Detailed analysis and failure cases are reported in the appendix.

Conclusion. We recast embodied trajectory generation as sparse composition in the primitive-time placement space: MPDL yields a compact library of self-contained motion units with explicit temporal boundaries, and Structural Sparse Flow Matching generates trajectories as combinatorial layouts over this library under differentiable event-geometry constraints. On large-scale robot manipulation and 3D ocean benchmarks this delivers state-of-the-art accuracy, an FDE/ADE ratio of 1.07, and gains that grow with task complexity, properties dense generative models structurally cannot achieve, suggesting embodied motion is better modeled as a composition to be assembled than a waveform to be regressed.

References

- [1] Dexin Wang, Chunsheng Liu, Faliang Chang, and Yichen Xu. Hierarchical diffusion policy: Manipulation trajectory generation via contact guidance. *IEEE Transactions on Robotics*, 41:2086–2104, 2025.
- [2] Hao Zhou, Xu Yang, Mingyu Fan, Lu Qi, Xiangtai Li, Ming-Hsuan Yang, and Fei Luo. Three-dimensional trajectory prediction with 3dmotraj dataset. In *Proceedings of the 42nd International Conference on Machine Learning, ICML’25*. JMLR.org, 2025.
- [3] Xinyao Yu, Sixian Zhang, Xinhang Song, Xiaorong Qin, and Shuqiang Jiang. Trajectory diffusion for objectgoal navigation. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024.
- [4] Anurag Ajay, Seungwook Han, Yilun Du, Shuang Li, Abhi Gupta, Tommi S. Jaakkola, Joshua B. Tenenbaum, Leslie Pack Kaelbling, Akash Srivastava, and Pulkit Agrawal. Compositional foundation models for hierarchical planning. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023.
- [5] Kostas Bekris, Kris Hauser, Sylvia Herbert, Jingjin Yu, Cheng Chi, Zhenjia Xu, Siyuan Feng, Eric Cousineau, Yilun Du, Benjamin Burchfiel, Russ Tedrake, and Shuran Song. Diffusion policy: Visuomotor policy learning via action diffusion. *Int. J. Rob. Res.*, 44(10–11):1684–1704, September 2025.
- [6] Mingyu Yang, Yaodong Yang, Zhenbo Lu, Wengang Zhou, and Houqiang Li. Hierarchical multi-agent skill discovery. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, editors, *Advances in Neural Information Processing Systems*, volume 36, pages 61759–61776. Curran Associates, Inc., 2023.
- [7] Wei Xiang, Haoteng YIN, He Wang, and Xiaogang Jin. Socialcvae: Predicting pedestrian trajectory via interaction conditioned latents. *Proceedings of the AAAI Conference on Artificial Intelligence*, 38(6):6216–6224, Mar. 2024.
- [8] Yuanshao Zhu, Yongchao Ye, Shiyao Zhang, Xiangyu Zhao, and James Yu. Difftraj: Generating gps trajectory with diffusion probabilistic model. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine, editors, *Advances in Neural Information Processing Systems*, volume 36, pages 65168–65188. Curran Associates, Inc., 2023.
- [9] Yuxiang Fu, Qi Yan, Lele Wang, Ke Li, and Renjie Liao. Moflow: One-step flow matching for human trajectory forecasting via implicit maximum likelihood estimation based distillation. In *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 17282–17293, 2025.
- [10] Xianglong Hou, Xinquan Huang, and Paris Perdikaris. CFO: Learning continuous-time PDE dynamics via flow-matched neural operators. In *The Fourteenth International Conference on Learning Representations*, 2026.
- [11] Yuchen Lin, Chenguo Lin, Panwang Pan, Honglei Yan, Feng Yiqiang, Yadong MU, and Katerina Fragkiadaki. Partcrafter: Structured 3d mesh generation via compositional latent diffusion transformers. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*, 2025.
- [12] Alessandro Favero, Antonio Sclocchi, Francesco Cagnetta, Pascal Frossard, and Matthieu Wyart. How compositional generalization and creativity improve as diffusion models are trained. In *Forty-second International Conference on Machine Learning*, 2025.
- [13] Lirui Wang, Jialiang Zhao, Yilun Du, Edward Adelson, and Russ Tedrake. PoCo: Policy Composition from and for Heterogeneous Robot Learning. In *Proceedings of Robotics: Science and Systems*, Delft, Netherlands, July 2024.
- [14] Marvin Alles, Philip Becker-Ehmck, Patrick van der Smagt, and Maximilian Karl. Constrained latent action policies for model-based offline reinforcement learning. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang, editors, *Advances in Neural Information Processing Systems*, volume 37, pages 70381–70405. Curran Associates, Inc., 2024.

- [15] Yu-An Lin, Chen-Tao Lee, Chih-Han Yang, Guan-Ting Liu, and Shao-Hua Sun. Hierarchical programmatic option framework. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang, editors, *Advances in Neural Information Processing Systems*, volume 37, pages 126677–126724. Curran Associates, Inc., 2024.
- [16] Open X-Embodiment Collaboration, Abby O’Neill, Abdul Rehman, Abhinav Gupta, Abhiram Maddukuri, Abhishek Gupta, Abhishek Padalkar, Abraham Lee, Acorn Pooley, Agrim Gupta, Ajay Mandlekar, Ajinkya Jain, Albert Tung, Alex Bewley, Alex Herzog, Alex Irpan, Alexander Khazatsky, Anant Rai, Anchit Gupta, Andrew Wang, Andrey Kolobov, Anikait Singh, Animesh Garg, Aniruddha Kembhavi, Annie Xie, Anthony Brohan, Antonin Raffin, Archit Sharma, Arefeh Yavary, Arhan Jain, Ashwin Balakrishna, Ayzaan Wahid, Ben Burgess-Limerick, Beomjoon Kim, Bernhard Schölkopf, Blake Wulfe, Brian Ichter, Cewu Lu, Charles Xu, Charlotte Le, Chelsea Finn, Chen Wang, Chenfeng Xu, Cheng Chi, Chenguang Huang, Christine Chan, Christopher Agia, Chuer Pan, Chuyuan Fu, Coline Devin, Danfei Xu, Daniel Morton, Danny Driess, Daphne Chen, Deepak Pathak, Dhruv Shah, Dieter Buehler, Dinesh Jayaraman, Dmitry Kalashnikov, Dorsa Sadigh, Edward Johns, Ethan Foster, Fangchen Liu, Federico Ceola, Fei Xia, Feiyu Zhao, Felipe Vieira Frueger, Freek Stulp, Gaoyue Zhou, Gaurav S. Sukhatme, Gautam Salhotra, Ge Yan, Gilbert Feng, Giulio Schiavi, Glen Berseth, Gregory Kahn, Guangwen Yang, Guanzhi Wang, Hao Su, Hao-Shu Fang, Haochen Shi, Henghui Bao, Heni Ben Amor, Henrik I Christensen, Hiroki Furuta, Homanga Bharadhwaj, Homer Walke, Hongjie Fang, Huy Ha, Igor Mordatch, Ilija Radosavovic, Isabel Leal, Jacky Liang, Jad Abou-Chakra, Jaehyung Kim, Jaimyn Drake, Jan Peters, Jan Schneider, Jasmine Hsu, Jay Vakil, Jeannette Bohg, Jeffrey Bingham, Jeffrey Wu, Jensen Gao, Jiaheng Hu, Jiajun Wu, Jialin Wu, Jiankai Sun, Jianlan Luo, Jiayuan Gu, Jie Tan, Jihoon Oh, Jimmy Wu, Jingpei Lu, Jingyun Yang, Jitendra Malik, João Silvério, Joey Hejna, Jonathan Booher, Jonathan Tompson, Jonathan Yang, Jordi Salvador, Joseph J. Lim, Junhyek Han, Kaiyuan Wang, Kanishka Rao, Karl Pertsch, Karol Hausman, Keegan Go, Keerthana Gopalakrishnan, Ken Goldberg, Kendra Byrne, Kenneth Oslund, Kento Kawaharazuka, Kevin Black, Kevin Lin, Kevin Zhang, Kiana Ehsani, Kiran Lekkala, Kirsty Ellis, Krishan Rana, Krishnan Srinivasan, Kuan Fang, Kunal Pratap Singh, Kuo-Hao Zeng, Kyle Hatch, Kyle Hsu, Laurent Itti, Lawrence Yunliang Chen, Lerrel Pinto, Li Fei-Fei, Liam Tan, Linxi "Jim" Fan, Lionel Ott, Lisa Lee, Luca Weihs, Magnum Chen, Marion Lepert, Marius Memmel, Masayoshi Tomizuka, Masha Itkina, Mateo Guaman Castro, Max Spero, Maximilian Du, Michael Ahn, Michael C. Yip, Mingtong Zhang, Mingyu Ding, Minh Heo, Mohan Kumar Srirama, Mohit Sharma, Moo Jin Kim, Muhammad Zubair Irshad, Naoaki Kanazawa, Nicklas Hansen, Nicolas Heess, Nikhil J Joshi, Niko Suenderhauf, Ning Liu, Norman Di Palo, Nur Muhammad Mahi Shafiullah, Oier Mees, Oliver Kroemer, Osbert Bastani, Pannag R Sanketi, Patrick "Tree" Miller, Patrick Yin, Paul Wohlhart, Peng Xu, Peter David Fagan, Peter Mitrano, Pierre Sermanet, Pieter Abbeel, Priya Sundareshan, Qiuyu Chen, Quan Vuong, Rafael Rafailov, Ran Tian, Ria Doshi, Roberto Mart’ in-Mart’ in, Rohan Bajjal, Rosario Scalise, Rose Hendrix, Roy Lin, Runjia Qian, Ruohan Zhang, Russell Mendonca, Rutav Shah, Ryan Hoque, Ryan Julian, Samuel Bustamante, Sean Kirmani, Sergey Levine, Shan Lin, Sherry Moore, Shikhar Bahl, Shivin Dass, Shubham Sonawani, Shubham Tulsiani, Shuran Song, Sichun Xu, Siddhant Halder, Siddharth Karamcheti, Simeon Adebola, Simon Guist, Soroush Nasiriany, Stefan Schaal, Stefan Welker, Stephen Tian, Subramanian Ramamoorthy, Sudeep Dasari, Suneel Belkale, Sungjae Park, Suraj Nair, Suvir Mirchandani, Takayuki Osa, Tanmay Gupta, Tatsuya Harada, Tatsuya Matsushima, Ted Xiao, Thomas Kollar, Tianhe Yu, Tianli Ding, Todor Davchev, Tony Z. Zhao, Travis Armstrong, Trevor Darrell, Trinity Chung, Vidhi Jain, Vikash Kumar, Vincent Vanhoucke, Vitor Guizilini, Wei Zhan, Wenxuan Zhou, Wolfram Burgard, Xi Chen, Xiangyu Chen, Xiaolong Wang, Xinghao Zhu, Xinyang Geng, Xiyuan Liu, Xu Liangwei, Xuanlin Li, Yansong Pang, Yao Lu, Yecheng Jason Ma, Yejin Kim, Yevgen Chebotar, Yifan Zhou, Yifeng Zhu, Yilin Wu, Ying Xu, Yixuan Wang, Yonatan Bisk, Yongqiang Dou, Yoonyoung Cho, Youngwoon Lee, Yuchen Cui, Yue Cao, Yueh-Hua Wu, Yujin Tang, Yuke Zhu, Yunchu Zhang, Yunfan Jiang, Yunshuang Li, Yunzhu Li, Yusuke Iwasawa, Yutaka Matsuo, Zehan Ma, Zhuo Xu, Zichen Jeff Cui, Zichen Zhang, Zipeng Fu, and Zipeng Lin. Open X-Embodiment: Robotic learning datasets and RT-X models. <https://arxiv.org/abs/2310.08864>, 2023.
- [17] Sungjune Kim, Hyung-gun Chi, Hyerin Lim, Karthik Ramani, Jinkyu Kim, and Sangpil Kim. Higher-order relational reasoning for pedestrian trajectory prediction. In *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 15251–15260, 2024.

- [18] Liushuai Shi, Le Wang, Sanping Zhou, and Gang Hua. Trajectory unified transformer for pedestrian trajectory prediction. In *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 9641–9650, 2023.
- [19] Chao Sun, Bo Wang, Jianghao Leng, Xiangchao Zhang, and Bo Wang. Sdagcn: Sparse directed attention graph convolutional network for spatial interaction in pedestrian trajectory prediction. *IEEE Internet of Things Journal*, 11(24):39225–39235, 2024.
- [20] Bozhou Zhang, Nan Song, Xin Jin, and Li Zhang. Bridging past and future: End-to-end autonomous driving with historical prediction and planning. In *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 6854–6863, 2025.
- [21] Daehee Park, Monu Surana, Pranav Desai, Ashish Mehta, Reuben MV John, and Kuk-Jin Yoon. Generative active learning for long-tail trajectory prediction via controllable diffusion model. In *2025 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 27839–27850, 2025.
- [22] Pritam Bikram, Shubhajyoti Das, and Arindam Biswas. Effective message-passing scheme and aggregation technique embedded in graph-based encoder-decoder learning framework for trajectory prediction. *Expert Syst. Appl.*, 292(C), November 2025.
- [23] Yang Lu, Xinglong Zhang, Xin Xu, and Weijia Yao. Learning-based near-optimal motion planning for intelligent vehicles with uncertain dynamics. *IEEE Robotics and Automation Letters*, 9(2):1532–1539, 2024.
- [24] Pinhao Song, Pengteng Li, Erwin Aertbeliën, and Renaud Detry. Robot trajectron: Trajectory prediction-based shared control for robot manipulation. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 5585–5591, 2024.
- [25] Biao Jiang, Xin Chen, Wen Liu, Jingyi Yu, Gang Yu, and Tao Chen. Motiongpt: human motion as a foreign language. In *Proceedings of the 37th International Conference on Neural Information Processing Systems, NIPS ’23*, Red Hook, NY, USA, 2023. Curran Associates Inc.
- [26] Armin Danesh Pazho, Ghazal Alinezhad Noghre, Vinit Katariya, and Hamed Tabkhi. Vt-former: An exploratory study on vehicle trajectory prediction for highway surveillance through graph isomorphism and transformer. In *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pages 5651–5662, 2024.
- [27] Pu Zhang, Wanli Ouyang, Pengfei Zhang, Jianru Xue, and Nanning Zheng. Sr-lstm: State refinement for lstm towards pedestrian trajectory prediction. In *2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 12077–12086, 2019.
- [28] Apratim Bhattacharyya, Daniel Olmeda Reino, Mario Fritz, and Bernt Schiele. Euro-pvi: Pedestrian vehicle interactions in dense urban centers. In *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 6404–6413, 2021.
- [29] Boris Ivanovic, Karen Leung, Edward Schmerling, and Marco Pavone. Multimodal deep generative models for trajectory prediction: A conditional variational autoencoder approach. *IEEE Robotics and Automation Letters*, 6(2):295–302, 2021.
- [30] Liang Xu, Ziyang Song, Dongliang Wang, Jing Su, Zhicheng Fang, Chenjing Ding, Weihao Gan, Yichao Yan, Xin Jin, Xiaokang Yang, Wenjun Zeng, and Wei Wu. Actformer: A gan-based transformer towards general action-conditioned 3d human motion generation. In *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 2228–2238, 2023.
- [31] Xuebin Ma, Zinan Ding, and Xiaoyan Zhang. St-trajgan: A synthetic trajectory generation algorithm for privacy preservation. *Future Gener. Comput. Syst.*, 161(C):226–238, December 2024.
- [32] Vasu Mistry, Binod Vaidya, and Hussein T. Mouftah. Evaluation of lstm gan for trajectory prediction in connected and autonomous vehicles. In *2024 International Wireless Communications and Mobile Computing (IWCMC)*, pages 226–231, 2024.

- [33] Jiahe Chen, Jinkun Cao, Dahua Lin, Kris Kitani, and Jiangmiao Pang. Mgf: Mixed gaussian flow for diverse trajectory prediction. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang, editors, *Advances in Neural Information Processing Systems*, volume 37, pages 57539–57563. Curran Associates, Inc., 2024.
- [34] Wenjie Yin, Hang Yin, Danica Kragic, and Mårten Björkman. Graph-based normalizing flow for human motion generation and reconstruction. In *2021 30th IEEE International Conference on Robot and Human Interactive Communication (RO-MAN)*, pages 641–648, 2021.
- [35] Yunhao Luo, Utkarsh A. Mishra, Yilun Du, and Danfei Xu. Generative trajectory stitching through diffusion composition. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2025. Spotlight.
- [36] Weibo Mao, Chenxin Xu, Qi Zhu, Siheng Chen, and Yanfeng Wang. Leapfrog diffusion model for stochastic trajectory prediction. In *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 5517–5526, 2023.
- [37] Xi Zhang, Yuan Pu, Yuki Kawamura, Andrew Loza, Yoshua Bengio, Dennis L. Shung, and Alexander Tong. Trajectory flow matching with applications to clinical time series modeling. In *Proceedings of the 38th International Conference on Neural Information Processing Systems, NIPS '24*, Red Hook, NY, USA, 2024. Curran Associates Inc.
- [38] Nikita Maksimovich Kornilov, Petr Mokrov, Alexander Gasnikov, and Alexander Korotin. Optimal flow matching: Learning straight trajectories in just one step. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024.
- [39] Ge Li, Zeqi Jin, Michael Volpp, Fabian Otto, Rudolf Lioutikov, and Gerhard Neumann. Prodmpp: A unified perspective on dynamic and probabilistic movement primitives. *IEEE Robotics and Automation Letters*, 8(4):2325–2332, 2023.
- [40] Alexandros Paraschos, Christian Daniel, Jan R Peters, and Gerhard Neumann. Probabilistic movement primitives. In C.J. Burges, L. Bottou, M. Welling, Z. Ghahramani, and K. Weinberger, editors, *Advances in Neural Information Processing Systems*, volume 26. Curran Associates, Inc., 2013.
- [41] Shikhar Bahl, Mustafa Mukadam, Abhinav Gupta, and Deepak Pathak. Neural dynamic policies for end-to-end sensorimotor learning. In *Proceedings of the 34th International Conference on Neural Information Processing Systems, NIPS '20*, Red Hook, NY, USA, 2020. Curran Associates Inc.
- [42] Andreas Aristidou, Daniel Cohen-Or, Jessica K. Hodgins, Yiorgos Chrysanthou, and Ariel Shamir. Deep motifs and motion signatures. *ACM Trans. Graph.*, 37(6), December 2018.
- [43] Hongyi Zheng, Hongwei Yong, and Lei Zhang. Deep convolutional dictionary learning for image denoising. In *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 630–641, 2021.
- [44] Yuanbo Tang, Zhiyuan Peng, and Yang Li. Explainable trajectory representation through dictionary learning. In *Proceedings of the 31st ACM International Conference on Advances in Geographic Information Systems, SIGSPATIAL '23*, New York, NY, USA, 2023. Association for Computing Machinery.
- [45] Nan Liu, Shuang Li, Yilun Du, Antonio Torralba, and Joshua B. Tenenbaum. Compositional visual generation with composable diffusion models. In *Computer Vision – ECCV 2022: 17th European Conference, Tel Aviv, Israel, October 23–27, 2022, Proceedings, Part XVII*, page 423–439, Berlin, Heidelberg, 2022. Springer-Verlag.
- [46] Jinqi Luo, Tianjiao Ding, Kwan Ho Ryan Chan, Hancheng Min, Chris Callison-Burch, and René Vidal. Concept lancet: Image editing with compositional representation transplant. In *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 28502–28512, 2025.

- [47] Jianrong Zhang, Hehe Fan, and Yi Yang. Energymogen: Compositional human motion generation with energy-based diffusion model in latent space. In *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 17592–17602, 2025.
- [48] Haohong Lin, Xin Huang, Tung Phan, David Hayden, Huan Zhang, Ding Zhao, Siddhartha Srinivasa, Eric Wolff, and Hongge Chen. Causal composition diffusion model for closed-loop traffic generation. In *2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 27542–27552, 2025.
- [49] Yilun Du, Conor Durkan, Robin Strudel, Joshua B. Tenenbaum, Sander Dieleman, Rob Fergus, Jascha Sohl-Dickstein, Arnaud Doucet, and Will Grathwohl. Reduce, reuse, recycle: compositional generation with energy-based diffusion models and mcmc. In *Proceedings of the 40th International Conference on Machine Learning, ICML’23*. JMLR.org, 2023.
- [50] Kyowoon Lee and Jaesik Choi. State-covering trajectory stitching for diffusion planners. In D. Belgrave, C. Zhang, H. Lin, R. Pascanu, P. Koniusz, M. Ghassemi, and N. Chen, editors, *Advances in Neural Information Processing Systems*, volume 38, pages 57273–57303. Curran Associates, Inc., 2025.
- [51] Florian Sestak, Artur P. Toshev, Andreas Fürst, Günter Klambauer, Andreas Mayr, and Johannes Brandstetter. Lam-SLide: Latent space modeling of spatial dynamical systems via linked entities. In *The Thirty-ninth Annual Conference on Neural Information Processing Systems*, 2025.
- [52] Jiaxin Gao, Qinglong Cao, and Yuntian Chen. Auto-regressive moving diffusion models for time series forecasting. *Proceedings of the AAAI Conference on Artificial Intelligence*, 39(16):16727–16735, Apr. 2025.
- [53] Abdullah Mohamed, Kun Qian, Mohamed Elhoseiny, and Christian Claudel. Social-stgcnn: A social spatio-temporal graph convolutional neural network for human trajectory prediction. In *2020 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 14412–14420, 2020.
- [54] Yuxuan Wu, Le Wang, Sanping Zhou, Jinghai Duan, Gang Hua, and Wei Tang. Multi-stream representation learning for pedestrian trajectory prediction. *Proceedings of the AAAI Conference on Artificial Intelligence*, 37(3):2875–2882, Jun. 2023.
- [55] Takahiro Maeda and Norimichi Ukita. Fast inference and update of probabilistic density estimation on trajectory prediction. In *2023 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 9761–9771, 2023.
- [56] Karttikeya Mangalam, Harshayu Girase, Shreyas Agarwal, Kuan-Hui Lee, Ehsan Adeli, Jitendra Malik, and Adrien Gaidon. It is not the journey but the destination: Endpoint conditioned trajectory prediction. In *Computer Vision – ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part II*, page 759–776, Berlin, Heidelberg, 2020. Springer-Verlag.
- [57] Bo Pang, Tianyang Zhao, Xu Xie, and Ying Nian Wu. Trajectory prediction with latent belief energy-based model. In *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 11809–11819, 2021.
- [58] Inhwan Bae, Jin-Hwi Park, and Hae-Gon Jeon. Non-probability sampling network for stochastic human trajectory prediction. In *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 6467–6477, 2022.
- [59] Pengfei Yao, Yinglong Zhu, Huikun Bi, Tianlu Mao, and Zhaoqi Wang. Trajclip: Pedestrian trajectory prediction method using contrastive learning and idempotent networks. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang, editors, *Advances in Neural Information Processing Systems*, volume 37, pages 77023–77037. Curran Associates, Inc., 2024.
- [60] Guangyi Chen, Junlong Li, Jiwen Lu, and Jie Zhou. Human trajectory prediction via counterfactual analysis. In *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 9804–9813, 2021.

- [61] Pranav Singh Chib, Achintya Nath, Paritosh Kabra, Ishu Gupta, and Pravendra Singh. MS-TIP: Imputation aware pedestrian trajectory prediction. In Ruslan Salakhutdinov, Zico Kolter, Katherine Heller, Adrian Weller, Nuria Oliver, Jonathan Scarlett, and Felix Berkenkamp, editors, *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pages 8389–8402. PMLR, 21–27 Jul 2024.
- [62] Yusheng Peng, Gaofeng Zhang, Jun Shi, Xiangyu Li, and Liping Zheng. Mrgtraj: A novel non-autoregressive approach for human trajectory prediction. *IEEE Transactions on Circuits and Systems for Video Technology*, 34(4):2318–2331, 2024.
- [63] Abdullah Mohamed, Deyao Zhu, Warren Vu, Mohamed Elhoseiny, and Christian Claudel. Social-implicit: Rethinking trajectory prediction evaluation and the effectiveness of implicit maximum likelihood estimation. In *Computer Vision – ECCV 2022: 17th European Conference, Tel Aviv, Israel, October 23–27, 2022, Proceedings, Part XXII*, page 463–479, Berlin, Heidelberg, 2022. Springer-Verlag.