

Point Tracking Improves World Action Models

Jiarui Guan¹ Wenshuai Zhao^{1,2,†} Yue Pei⁶
Ziliang Chen^{4,5} Arno Solin^{1,2} Juho Kannala^{1,3}

¹Aalto University ²ELLIS Institute Finland ³University of Oulu

⁴Sun Yat-sen University ⁵Peng Cheng Laboratory ⁶Beihang University

{jiarui.guan, wenshuai.zhao}@aalto.fi

{juho.kannala, arno.solin}@aalto.fi c.ziliang@yahoo.com peiyue@buaa.edu.cn

[†]Corresponding author.

Abstract

Robot policy learning benefits from world-action models that capture environment dynamics, but pixel-level prediction entangles dynamics with nuisance factors such as lighting and texture, making learned representations vulnerable to task-irrelevant visual variation. We propose JOPAT, a JOint Pixel-And-Track World-Action Model that predicts latent visual observations, 2D point tracks with visibility, and actions in a single denoising diffusion transformer. The key insight is that tracks provide an explicit representation of motion that captures long-horizon dynamics and remains robust under occlusion or partial out-of-frame motion, offering greater utility than modeling pixel appearance alone. On LIBERO and real-world LeRobot tasks, JOPAT improves over pixel-based baselines, with the largest gains on long-horizon tasks involving occlusion, object interaction, and off-screen motion.

1 Introduction

Robotic manipulation in the open world demands policies that generalize across objects, scenes, and viewpoints while remaining reliable under partial observability, occlusion, and long-horizon temporal dependencies. Vision-Language-Action (VLA) models represent a major step toward this goal, which leverages pretrained Vision-Language Models (VLMs) to map language instructions and visual observations directly into robot actions [1–9]. However, despite their strong semantic capabilities, VLAs are predominantly trained on image–language data and therefore lack an understanding of environment dynamics, which is crucial for robotic policy learning [10–14].

Recently, World Action Models (WAMs) have emerged as a promising paradigm for translating video priors into robot control [15–29]. Large-scale visual pre-training provides an effective way to acquire motion priors and physical grounding from diverse visual dynamics [30–35]. However, how to effectively translate video dynamics into generalizable robotic policies still remains an open question. Several studies suggest that pixel-level pretraining on action-free videos does not necessarily improve policy success rates [14, 36–38].

We shift the central question from *how to model the world* to *what future state should serve as the interface between video prediction and control*. Our key insight is that action-free video becomes useful for control when its supervision is expressed through a future-state abstraction that preserves visual grounding while exposing controllable correspondences. To this end, we propose the *JOint Pixel-And-Track World-Action Model* (JOPAT), which jointly denoises visual latents, point tracks with visibility, and executable robot actions. In this way, we use 2D point tracks with visibility as the motion representation: tracks encode persistent scene correspondences over time, while visibility indicates when these correspondences become occluded or leave the camera view. Together with visual latents, this *pixel–track future state* preserves object identity, affordance, and appearance

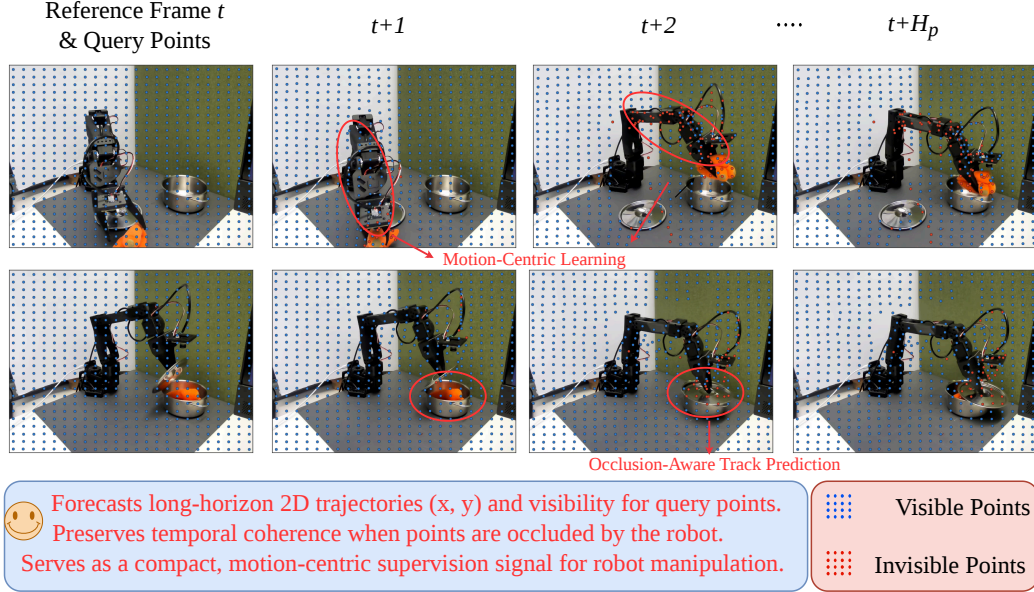


Figure 1: **JOPAT predicts structured point tracks beyond visible pixels.** Starting from query points on the reference frame, JOPAT forecasts long-horizon 2D trajectories and visibility logits. This track-space prediction exposes action-relevant scene motion while explicitly representing points that become unobservable or leave the field of view.

cues, while explicitly representing object displacement, contact-induced motion, occlusion, and out-of-frame transitions, as illustrated in Fig. 1.

We evaluate JOPAT on both simulated and real-world manipulation benchmarks under visual out-of-distribution variations, self-induced occlusions, and long-horizon dependencies. On 40 LIBERO tasks [39], JOPAT achieves an average success rate of 97.8%, establishing a new state of the art. It also demonstrates improved robustness on modified LIBERO settings with occlusions and disturbances. Real-world experiments and extensive ablation studies further validate the effectiveness of the proposed joint pixel-and-track modeling. Overall, integrating pixel-based visual representations with explicit point-track dynamics yields more reliable control than either signal alone, while enabling effective policy learning from limited robot demonstrations.

Our main contributions are: (i) we propose JOPAT, a joint pixel-and-track world-action model that integrates visual latents, 2D point tracks with visibility, and robot actions within a unified generative framework, enabling correspondence-level motion to serve as an explicit interface between perception and control; (ii) we achieve state-of-the-art performance on 40 LIBERO manipulation tasks with an average success rate of 97.8%, while demonstrating strong robustness under visual distribution shifts, occlusions, disturbances, and long-horizon dependencies in both simulated and real-world settings; and (iii) through extensive ablation studies and real-world experiments, we show that explicit point-track modeling is crucial for robust performance, as it improves long-horizon consistency, mitigates the effects of occlusion, and provides stable motion grounding that complements pixel-based representations for control.

2 Related work

Video-based world models and world action models Video-based world models learn predictive dynamics from future observations and have long been used as a route to physical interaction and control [40–42]. Recent robotic world-action models further couple video prediction with action generation, using shared generative models, diffusion objectives, or policy optimization to connect visual futures to executable controls [15, 16, 22–27]. These methods show that predictive visual objectives can improve policy learning, but most instantiate the future state in pixel, latent-image, or visual-token spaces. As a result, the motion variables that determine actions—which object

moved, where it moved, and whether the evidence became hidden—must be recovered implicitly from appearance-dominated tokens. JOPAT differs by augmenting the world-action future state with explicit point tracks and visibility, so action tokens interact with sampled correspondence-level motion variables rather than with visual latents alone.

Intermediate motion representations for control A growing line of work introduces intermediate motion representations to bridge pixels and actions. Pixel motion fields and optical-flow-like targets provide dense image-plane motion cues for policy learning [43–45], while point trajectories, 3D point tracks, and object flows introduce stronger geometric or correspondence structure [46–51]. Another line uses language-aligned keypoints, value maps, or mark-based prompts to expose task-relevant spatial structure [52–55]. These approaches demonstrate that motion and spatial abstractions are often more control-relevant than raw pixels, but they typically use motion as a policy input, an auxiliary prediction target, or a separate planning representation. JOPAT instead treats 2D tracks with visibility as part of the generative future state itself: the track variables are sampled jointly with visual latents and actions in the same denoising sequence. This design preserves semantic grounding through visual latents while using tracks as a scalable correspondence-level interface that can be obtained from ordinary videos with modern point trackers [56, 57].

Learning from action-free videos Learning from action-free videos is attractive because videos are substantially easier to scale than action-labeled robot demonstrations. Prior work uses action-free or weakly labeled videos to learn visual representations, dynamics models, inverse dynamics, latent actions, or policy-relevant priors [38, 58–63]. However, generic videos often contain uncontrolled camera motion, unknown agents, and dynamics not caused by the robot, and recent studies suggest that pixel-level pretraining alone does not always translate into improved downstream manipulation success [14, 36, 37]. JOPAT addresses this issue by using action-free videos to supervise a pixel-track future state rather than actions directly: visual latents preserve object and scene semantics, while tracks and visibility supervise realized correspondences and missing evidence. Action-labeled robot demonstrations then ground these future-state variables in executable controls.

3 Preliminaries: world-action models

We consider episodic robot manipulation with RGB observations o_t and robot actions a_t , where actions are end-effector pose deltas and gripper commands. At time t , the policy receives an observation window $\mathbf{o}_t^{\text{ctx}} = o_{t-h_o+1:t}$ and predicts an executable action chunk $a_{t:t+K-1}$. An encoder maps this window to a conditioning feature $\mathbf{c}_t = E_c(\mathbf{o}_t^{\text{ctx}})$. We assume access to two data sources: a large collection of action-free videos $\mathcal{V} = \{o_{1:T}\}$ and a smaller set of action-labeled demonstrations $\mathcal{D} = \{(o_{1:T}, a_{1:T})\}$. The goal is to learn a policy $\pi_\psi(a_{t:t+K-1} | \mathbf{c}_t)$ that transfers scalable motion priors from $\mathcal{V}$ while grounding them in executable robot actions from $\mathcal{D}$.

A world-action model (WAM) provides a generative route to this goal by coupling action prediction with future world-state prediction. Rather than learning a policy as a direct map from observations to actions, WAM models a joint distribution $p_\theta(a_{t:t+K-1}, s_{t:t+H} | \mathbf{c}_t)$, where $s_{t:t+H}$ denotes a future state abstraction of the scene. The policy can then be viewed as the action marginal of this larger predictive model, $\pi_\theta(a_{t:t+K-1} | \mathbf{c}_t) = \int p_\theta(a_{t:t+K-1}, s_{t:t+H} | \mathbf{c}_t) ds$. This perspective turns policy learning into a question of interface design: *what future world state should a robot predict so that the prediction is useful for action?* The answer is nontrivial because a future state for control is not the same as a future state for photorealistic reconstruction. For manipulation, the useful state should expose how robot-controllable scene elements move and whether their evidence remains visible, while still preserving enough visual semantics to identify objects and affordances.

The common instantiation is a pixel-latent WAM. Let $\mathbf{z}_{t+H:t+H+1}^o = E_o(o_{t+H:t+H+1})$ denote compact visual latents of a future observation window and $\mathbf{z}_{t:t+K-1}^a$ denote action tokens. A pixel-latent WAM uses $s_{t:t+H}^{\text{pix}} = \mathbf{z}_{t+H:t+H+1}^o$ and learns $p_\theta(\mathbf{z}_{t:t+K-1}^a, \mathbf{z}_{t+H:t+H+1}^o | \mathbf{c}_t)$. Architecturally, this can be implemented by concatenating noisy action and visual tokens and denoising them with a shared transformer,

$$[\hat{\epsilon}^a, \hat{\epsilon}^o] = T_\theta^{\text{WAM}}([\tilde{\mathbf{z}}^a, \tilde{\mathbf{z}}^o, \mathbf{r}; \mathbf{c}_t, \tau_a, \tau_o), \quad (1)$$

where $\mathbf{r}$ denotes learnable register tokens and τ_a, τ_o are modality-specific diffusion timesteps. This formulation enables action-free video pretraining through the observation branch, but it also inherits a limitation of pixel prediction: the state interface is dominated by appearance. For manipulation, appearance is only an indirect carrier of control-relevant change. A visual latent may encode texture,

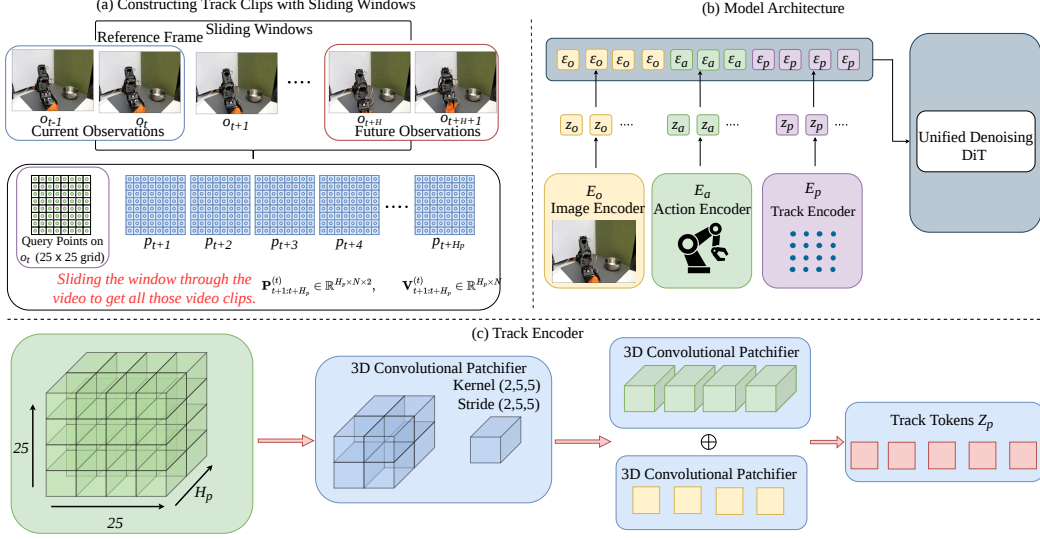


Figure 2: **Overview of JOPAT.** (a) Sliding-window track construction uses the current frame as the reference image for grid query points. (b) JOPAT jointly denoises future visual latents, point-track coordinates, and robot actions in a shared Transformer. (c) The track-as-video encoder reshapes point tracks into a spatiotemporal grid, applies 3D convolutional patchification, and predicts coordinate noise and visibility logits.

lighting, background, and camera statistics together with object motion, while the action often depends on sparse correspondence-level facts: which part moved, where it moved, whether it became occluded, and whether it left the visible workspace. Thus, the central weakness of a pixel-only WAM is not simply insufficient model capacity; it is that the predicted future state does not explicitly expose the motion variables through which actions affect the world.

4 Methods

In this section, we first present the overall architecture of the proposed JOPAT, followed by a detailed description of the critical point-track modeling component. We then introduce the training and inference pipeline.

4.1 Unified pixel-track-action architecture

Figure 2 (b) shows the unified JOPAT architecture. Given the current observation window $o_{t-1:t}$, an observation encoder E_c produces a global conditioning feature $\mathbf{c}_t = E_c(o_{t-1:t})$, which is injected into each DiT block through AdaLN together with modality-specific diffusion timesteps τ_a , τ_o , and τ_p . JOPAT jointly denoises action tokens, future visual-latent tokens, and track tokens in a shared sequence:

$$\mathbf{Z} = [\tilde{\mathbf{z}}_{t:t+K-1}^a, \tilde{\mathbf{z}}_{t+H:t+H+1}^o, \tilde{\mathbf{z}}_{t:t+H_p-1}^p, \mathbf{r}].$$

A DiT-style transformer applies bidirectional full attention over this sequence and predicts modality-specific noise:

$$\hat{\epsilon}^a, \hat{\epsilon}^o, \hat{\epsilon}^p = T_\theta(\mathbf{Z}; \mathbf{c}_t, \tau_a, \tau_o, \tau_p).$$

Separate heads decode action noise, visual-latent noise, track-coordinate noise, and visibility logits. This shared denoising design allows action generation to interact directly with imagined future pixels and point tracks, rather than relying on an isolated action decoder with auxiliary prediction heads. In our implementation, JOPAT conditions on two RGB frames, predicts a two-frame future observation window with offset $H = 16$, and uses $H_p = K = 19$ for both track and action horizons.

4.2 Track construction and modeling

Figure 2 (a,c) illustrates the track construction and encoding pipeline. JOPAT conditions on two RGB observations $o_{t-1:t}$ and uses the last frame o_t as the reference frame for point tracking. For each sliding window, we initialize N grid query points on o_t and track them over $t+1 : t+H_p$ with an off-the-shelf point tracker [57], producing

$$\mathbf{P}^{(t)} \in \mathbb{R}^{H_p \times N \times 2}, \quad \mathbf{V}^{(t)} \in \{0, 1\}^{H_p \times N}. \quad (2)$$

The superscript (t) denotes that the query points are anchored at the reference frame o_t .

To encode tracks compactly, we use a track-as-video representation. In our implementation, query points form a 25×25 grid, giving $N = 625$. We reshape the point dimension back to its spatial grid and apply a 3D convolutional patchifier:

$$\begin{aligned} \mathbf{P}^{(t)} &\rightarrow \mathbf{G}^p \in \mathbb{R}^{2 \times H_p \times H_g \times W_g}, \quad H_g W_g = N, \\ \mathbf{z}^p &= E_p(\mathbf{P}^{(t)}) = \text{Patchify}_{3D}(\mathbf{G}^p), \quad \mathbf{z}^p \in \mathbb{R}^{L_p \times d}. \end{aligned} \quad (3)$$

After shared denoising, track tokens are decoded into coordinate and visibility predictions:

$$\hat{\mathbf{P}}^{(t)} = D_p(\hat{\mathbf{z}}^p), \quad \hat{\mathbf{V}}^{(t)} = D_v(\hat{\mathbf{z}}^p), \quad \hat{\mathbf{V}}^{(t)} \in \mathbb{R}^{H_p \times N}. \quad (4)$$

Visibility is predicted only as an output and is not provided to the track encoder, avoiding leakage of ground-truth visibility during denoising.

4.3 Training and inference

JOPAT is trained with a unified denoising objective over action, visual-latent, and track-coordinate tokens. For each modality $m \in \{a, o, p\}$, let $\mathbf{x}_0^m$ be the clean target and $\epsilon^m \sim \mathcal{N}(0, I)$ be Gaussian noise. We independently sample a diffusion timestep τ_m for each modality and construct

$$\mathbf{x}_{\tau_m}^m = \sqrt{\bar{\alpha}_{\tau_m}} \mathbf{x}_0^m + \sqrt{1 - \bar{\alpha}_{\tau_m}} \epsilon^m, \quad \mathcal{L}_m = \|\hat{\epsilon}^m - \epsilon^m\|_2^2. \quad (5)$$

The track diffusion loss $\mathcal{L}_p$ is applied only to 2D coordinates. Visibility is predicted by a separate head and supervised with binary cross entropy (BCE):

$$\mathcal{L}_{\text{vis}} = \frac{1}{H_p N} \sum_{\tau=0}^{H_p-1} \sum_{i=1}^N \text{BCE}(\hat{\mathbf{V}}_{t+\tau, i}, \mathbf{V}_{t+\tau, i}). \quad (6)$$

The final objectives for action-labeled demonstrations $\mathcal{D}$ and action-free videos $\mathcal{V}$ are

$$\begin{aligned} \mathcal{L}_{\mathcal{D}} &= \mathcal{L}_a + \lambda_o \mathcal{L}_o + \lambda_p \mathcal{L}_p + \lambda_{\text{vis}} \mathcal{L}_{\text{vis}}, \\ \mathcal{L}_{\mathcal{V}} &= \lambda_o \mathcal{L}_o + \lambda_p \mathcal{L}_p + \lambda_{\text{vis}} \mathcal{L}_{\text{vis}}. \end{aligned} \quad (7)$$

Thus, the same architecture learns visual-track dynamics from action-free videos and action-grounded control from robot demonstrations.

At inference time, JOPAT is used for receding-horizon action generation. Given the current observation context $\mathbf{c}_t$, action, visual, and track tokens are initialized from Gaussian noise and iteratively denoised in the same shared sequence. Only the action branch is decoded for execution, but the visual and track tokens are not discarded auxiliary outputs: they act as latent future-state variables that interact with action tokens through self-attention during sampling. Consequently, each action chunk is generated under an implicitly sampled pixel-track future, which is the inference-time counterpart of the track-augmented state interface used during training. The action decoder outputs a chunk $\hat{a}_{t:t+K-1}$, from which we execute the first action or a short prefix before replanning.

Implementation details We use a DiT-style Transformer with depth 12, hidden dimension 768, and 12 attention heads. The model uses 8 learnable register tokens. For tracks, we use $N = 625$ query points arranged as a 25×25 grid and a spatiotemporal patch size of $(2, 5, 5)$. We train with a DDIM scheduler using 100 diffusion steps and sample with 10 denoising steps at inference.

Table 1: **Simulation experimental results.** Comparison of task success rates (SR) and ranks (RK) on the LIBERO benchmark across four task types. “†” indicates our reproduced results.

Method	Spatial		Object		Goal		Long		Average	
	SR ↑	RK ↓	SR ↑	RK ↓	SR ↑	RK ↓	SR ↑	RK ↓	SR ↑	RK ↓
Diffusion Policy [66]	78.3	15	92.5	10	68.3	15	50.5	15	72.4	15
Octo fine-tuned [67]	78.9	14	85.7	15	84.6	12	51.1	14	75.1	14
OpenVLA [68]	84.7	11	88.4	14	79.2	13	53.7	13	76.5	13
π_0 fine-tuned [1]	96.8	5	98.8	2	95.8	4	85.2	7	94.2	7
π_0 -Fast [69]	96.4	6	96.8	7	88.6	8	60.2	11	85.5	8
$\pi_{0.5}$ -KI [70]	98.0	2	97.8	6	95.6	5	85.8	6	96.0	4
OpenVLA-OFT [71]	97.6	3	98.4	4	97.9	2	94.5	3	97.1	3
SpatialVLA [72]	88.2	9	89.9	13	78.6	14	55.5	12	78.1	12
PD-VLA† [73]	95.5	7	96.7	8	94.9	7	91.7	4	94.7	5
STAR [74]	95.5	7	98.3	5	95.0	6	88.5	5	94.3	6
Dita [75]	84.2	12	96.3	9	85.4	11	63.8	10	82.4	11
CoT-VLA [76]	87.5	10	91.6	12	87.6	9	69.0	9	83.9	10
CogVLA [77]	98.6	1	98.8	2	96.6	3	95.4	2	97.4	2
UWM [78]	82.3	13	92.2	11	86.8	10	77.6	8	84.7	9
JOPAT	97.2	4	98.9	1	98.4	1	96.4	1	97.8	1

5 Experiments

Experiment design Our experiments are organized to examine the state-interface hypothesis introduced in Section 1. (i) a track-augmented future state should improve manipulation policy learning over pixel-centric world-action modeling because it exposes controllable correspondences that pixels leave implicit. (ii) the gains should come from the complementary roles of visual latents, tracks, and visibility: semantics, motion correspondences, and missing-evidence state. (iii) action-free video pretraining should be useful when it supervises the same pixel-track future state that later mediates action generation under limited robot demonstrations.

We therefore evaluate JOPAT along four axes. **(Q1) Main performance:** Does JOPAT improve success rates over prior policy-learning and world-action baselines on standard manipulation benchmarks? **(Q2) Representation design:** Are visual latents, point tracks, and visibility all necessary for this future-state interface under partial observability? **(Q3) Robustness:** Does the pixel-track future state remain reliable under long-horizon distribution shift, occlusion, and distractors? **(Q4) Scalable pretraining:** Does action-free video pretraining help under limited demonstrations, and does the benefit extend beyond robot-domain videos?

We answer Q1 on LIBERO [39], Q2 through modality and visibility ablations, Q3 with a modified LIBERO-Long out-of-distribution (OOD) stress test and real-robot LeRobot SO-101 experiments, and Q4 with action-free pretraining studies using robot-domain DROID videos [64] and generic OpenVid-1M videos [65]. For simulation, we evaluate all four LIBERO suites and use LIBERO-90 for the standard pretraining protocol before target-suite finetuning. For pretraining ablations, we compare no video pretraining, DROID action-free pretraining, and a matched 10k-video subset from OpenVid-1M; all video-only pretraining masks the action branch and supervises only visual latents, point tracks, and visibility.

5.1 Simulation results

We evaluate JOPAT on the standard LIBERO benchmark, which contains four suites: *Spatial*, *Object*, *Goal*, and *Long*, with 10 tasks and 50 demonstrations per task in each suite. Following the benchmark protocol, we report the average success rate (SR) over tasks within each suite. JOPAT is pretrained on LIBERO-90 for 100K steps and finetuned on each target suite for 10K steps.

Table 1 reports the main simulation results. JOPAT achieves the best average performance across the four suites and obtains the largest improvement on *Long*, the most temporally extended suite. This indicates that joint pixel-and-track prediction is particularly beneficial when policy learning requires maintaining action-relevant state over longer horizons. The gain on *Long* is consistent with the motivation of JOPAT. Compared with pixel-centric prediction, point tracks provide a compact

motion-centric interface, while visual latents retain semantic and contextual information. We further isolate these components in the ablation study in Section 5.3.

5.2 Real-world experiments

We further evaluate real-world transfer on a physical LeRobot SO-101 platform. The benchmark includes four tasks spanning complementary challenges: *Cook-Soup* for long-horizon sequencing under repeated interactions, *Insert-Peg* for precision alignment and contact-sensitive execution, *Push-Tomato* for contact-rich object displacement under pose variation, and *Pick-Grocery* for object-level OOD generalization. All real-robot training, inference, evaluation, and task setup details are provided in Appendix A.2.

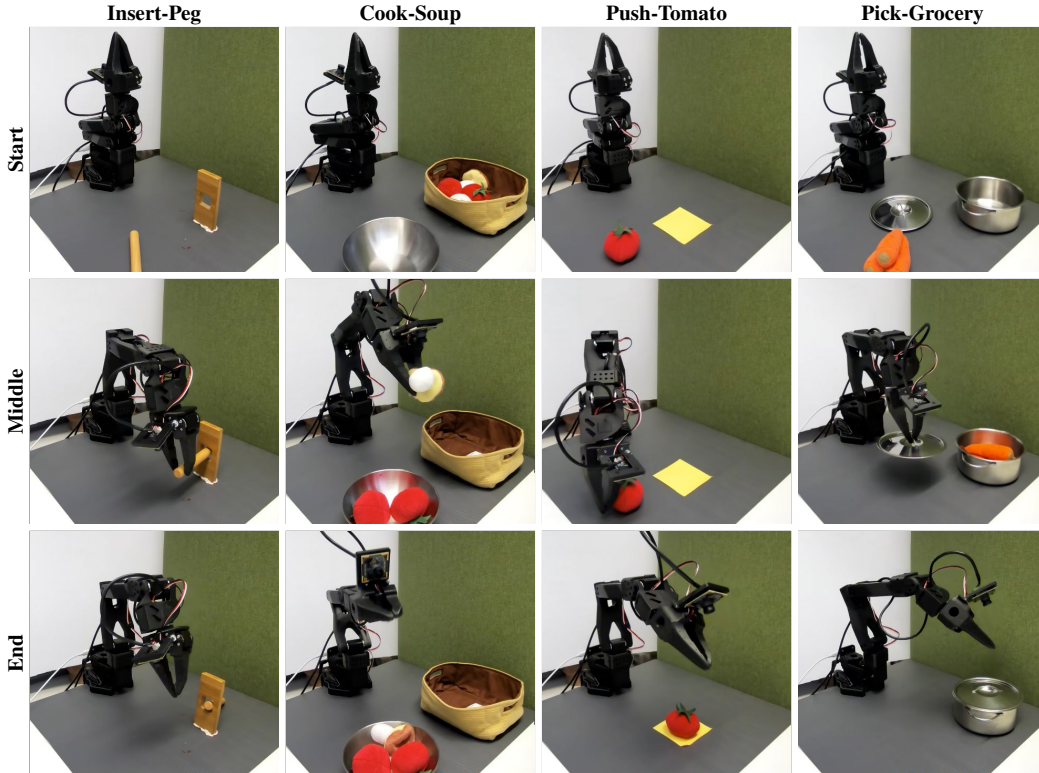


Figure 3: **Real-robot task setup.** Insert-Peg, Cook-Soup, Push-Tomato, and Pick-Grocery on the LeRobot SO-101 platform. The first row shows the initial configuration, the second row shows an intermediate state, and the third row shows successful task completion.

Table 2: **Real-robot performance on LeRobot.** SR on four real-world tasks are reported.

Method	Cook-Soup	Insert-Peg	Push-Tomato	Pick-Grocery	Avg.
ACT [79]	40%	0%	70%	50%	40%
UWM [78]	10%	0%	80%	40%	32.5%
JOPAT (Ours)	60%	10%	100%	60%	57.5%

Table 2 shows that JOPAT achieves the best average success rate, outperforming ACT and UWM by 17.5 and 25.0 points, respectively. The largest gain appears on *Push-Tomato*, where JOPAT reaches 100% SR, suggesting that explicit track prediction provides a useful motion interface for contact-rich object displacement. JOPAT also improves on *Cook-Soup*, consistent with its robustness to occlusion and long-horizon state drift observed in simulation. By contrast, *Insert-Peg* remains difficult for all methods, indicating that millimeter-level insertion may require additional geometric calibration or contact-aware sensing beyond RGB-based track-and-latent modeling.

5.3 Ablation on joint pixel-track modeling

We study whether the above performance gains come from joint pixel-and-track modeling and create three ablated variants: **Latent-only**, which removes track prediction; **Track-only**, which removes visual-latent prediction; and **Joint**, which predicts visual latents, tracks, visibility, and actions with a shared denoising transformer. All variants use the same pretraining data, optimization schedule, and downstream finetuning protocol.

Simulation ablation The results in Table 3 show that joint modeling substantially outperforms both single-modality variants, improving over Latent-only by 19.0 points and over Track-only by 70.2 points in average SR. This supports our hypothesis: track tokens provide correspondence-level motion constraints for action-token denoising, while visual latents preserve the semantic context needed to decide which object, affordance, or task state matters. Latent-only removes these motion constraints, leading to failures when correct object recognition is not enough to maintain precise long-horizon motion; Track-only removes visual grounding, leading to failures when similar motions must be tied to the correct object, affordance, or task state. The joint model succeeds by coupling both signals in the same denoising state.

Table 3: **Joint vs. single-modality ablation on LIBERO-Long.** Success rates (SR, %) across ten long-horizon tasks. All variants are pretrained on DROID action-free videos under identical settings.

Task	Latent-only	Track-only	Joint	Task	Latent-only	Track-only	Joint
Mug-Mug	58	2	92	Tomato-Sauce	93	48	100
Soup-Cheese	78	14	94	Cream-Butter	91	66	100
Moka-Moka	67	26	89	Microwave	94	32	100
Book-Candy	63	14	100	Chocolate-Pudding	73	46	91
Bowl-Drawer	95	2	100	Moka-Stove	62	12	98
Average SR: Latent-only 77.4 Track-only 26.2 Joint 96.4							

Real-robot ablation The similar effect appears in real robot experiments in Table 4. Joint modeling improves average SR from 35.0% for Latent-only and 15.0% for Track-only to 57.5%, corresponding to gains of 22.5 and 42.5 points. Latent-only retains object appearance but leaves contact-relevant motion implicit, while Track-only exposes motion structure but lacks the visual grounding needed to identify the correct object and goal region. JOPAT improves every task under the same data budget, although Insert-Peg remains difficult for all variants, suggesting that millimeter-level insertion may require additional geometry or contact information beyond RGB latents and 2D tracks.

Table 4: **Real-robot modality ablation.** SR are reported on four LeRobot SO-101 tasks.

Method	Cook-Soup	Insert-Peg	Push-Tomato	Pick-Grocery	Avg.
Latent-only	40	0	70	30	35.0
Track-only	10	0	30	20	15.0
Joint (Ours)	60	10	100	60	57.5

5.4 Ablation on track visibility prediction

We further ablate visibility prediction in Table 5. Removing the visibility head reduces real-robot average SR from 57.5% to 47.5%, with the largest improvement from visibility on Cook-Soup. This supports the role of visibility supervision as a missing-evidence constraint on the track stream: the model learns when a correspondence is unobservable instead of forcing every point to explain a visible coordinate. The unchanged Pick-Grocery result indicates that visibility is not merely extra capacity; it mainly helps tasks with self-occlusion, transient out-of-view motion, or long-horizon object motion where confusing hidden points with stationary points can cause drift.

5.5 Does action-free video pretraining help?

Table 6 isolates the effect of action-free video pretraining on LIBERO-Long. Both pretraining sources consistently outperform training from scratch across all demonstration budgets, showing that JOPAT’s

Table 5: **Track visibility ablation.** We report the SR on LeRobot SO-101 tasks. The visibility head improves robustness under self-occlusion and transient out-of-view motion.

Method	Cook-Soup	Insert-Peg	Push-Tomato	Pick-Grocery	Avg.
w/o visibility	40	0	90	60	47.5
w/ visibility (Ours)	60	10	100	60	57.5

pixel-track future-state objective turns action-free videos into useful motion priors for downstream control. The gain is especially large in the low-data regime: with only 10 demonstrations, DROID pretraining improves SR from 11.9% to 64.2%, and even generic OpenVid-1M pretraining reaches 48.5%. This indicates that the benefit is not merely due to robot-domain proximity; the model can also extract transferable object-motion and occlusion priors from non-robot videos. At 50 demonstrations, the gap between DROID and OpenVid-1M nearly vanishes (96.4% vs. 95.1%), suggesting that domain-specific pretraining is most valuable when supervision is scarce, while generic video priors can be aligned effectively once sufficient action-labeled demonstrations are available.

Table 6: **Action-free video pretraining on LIBERO-Long.** SR are reported.

Method	10 demos	25 demos	50 demos
JOPAT w/o PT	11.9%	31.6%	66.1%
JOPAT (DROID PT)	64.2%	82.7%	96.4%
JOPAT (OpenVid-1M PT)	48.5%	84.6%	95.1%

5.6 Robustness on OOD tasks

To evaluate robustness under stronger partial observability and distribution shift, we construct a modified LIBERO-Long setting with three changes: (1) the object initialization range is expanded by 5 cm; (2) one background object is replaced with an unseen object in each task; and (3) an unseen distractor is placed in front of the target object. All modifications are applied consistently across all compared methods. This setting increases failures caused by target-object occlusion, distractor interference, larger object displacement, and delayed errors in long-horizon execution.

Table 7: **OOD evaluation on modified LIBERO-Long.** SR are reported.

Task	Diffusion Policy [66]	$\pi_{0.5}$ fine-tuned [70]	UWM [78]	JOPAT (Ours)
Book-Candy	0.24	0.95	0.38	0.88
Soup-Cheese	0.21	0.82	0.44	0.78
Bowl-Drawer	0.56	0.12	0.52	0.68
Moka-Moka	0.44	0.70	0.22	0.48
Mug-Mug	0.18	0.08	0.14	0.50
Avg.	0.32	0.53	0.34	0.66

Table 7 shows that JOPAT achieves the best average SR, improving over Diffusion Policy, UWM, and fine-tuned $\pi_{0.5}$ by 34, 32, and 13 points, respectively. Compared with UWM, JOPAT improves on all five tasks, with especially large gains on *Mug-Mug* (+36 points), *Moka-Moka* (+26 points), and *Book-Candy* (+50 points). These tasks require maintaining object state across extended interactions while avoiding distractor-induced drift, suggesting that explicit correspondence and visibility prediction provides a stable future-state interface under long-horizon distribution shift.

Interestingly, fine-tuned $\pi_{0.5}$ achieves the best performance on *Book-Candy*, *Soup-Cheese*, and *Moka-Moka*, but performs poorly on *Bowl-Drawer* and *Mug-Mug*. This leads to a lower average SR than JOPAT despite strong peak performance. The result suggests that large pretrained VLA models can be highly effective on some OOD tasks, but may be less stable across task families when distractors and occlusions alter the visual grounding conditions. In contrast, JOPAT is not always the best on every individual task, but achieves the strongest average performance and the best results on tasks where distractor-aware object tracking is critical.

6 Conclusion and discussion

In this work, we introduced JOPAT, a unified world-action model that treats 2D point tracks and visual latents as joint predictive modalities for action generation. By making motion correspondences explicit alongside pixel-level visual latents, our approach anchors predictions on geometric structures and improves robustness against occlusion. Experiments on LIBERO and real-world LeRobot tasks confirm that this formulation outperforms pixel-based baselines in data efficiency, effectively transferring motion priors from action-free video to downstream control.

Limitations Despite these results, limitations persist. First, the sparsity of grid-based point tracks may overlook fine-grained deformations required for sub-centimeter dexterity. Second, our reliance on off-the-shelf trackers (e.g., CoTracker) creates a performance ceiling; the model cannot learn dynamics that the supervisor fails to capture. Additionally, while efficient, the unified transformer’s inference speed remains a bottleneck for high-frequency control ($>20\text{Hz}$), and the current architecture is optimized for static cameras, limiting applicability to mobile manipulation scenarios where ego-motion complicates tracking.

Acknowledgments

AS and JK acknowledge funding from the Research Council of Finland (352788, 362407, 373999, 373780, 362408, and 339730). This work was supported by the Research Council of Finland Flagship programme: Finnish Center for Artificial Intelligence FCAI. We acknowledge the computational resources provided by the Aalto Science-IT project.

References

- [1] Kevin Black, Noah Brown, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, Lachy Groom, Karol Hausman, Brian Ichter, Szymon Jakubczak, Tim Jones, Liyiming Ke, Sergey Levine, Adrian Li-Bell, Mohith Mothukuri, Suraj Nair, Karl Pertsch, Lucy Xiaoyang Shi, James Tanner, Quan Vuong, Anna Walling, Haohuan Wang, and Ury Zhilinsky. π_0 : A vision-language-action flow model for general robot control, 2026. URL <https://arxiv.org/abs/2410.24164>.
- [2] Anthony Brohan, Noah Brown, Justice Carbajal, Yevgen Chebotar, Joseph Dabis, Chelsea Finn, Keerthana Gopalakrishnan, Karol Hausman, Alex Herzog, Jasmine Hsu, et al. Rt-1: Robotics transformer for real-world control at scale. *arXiv preprint arXiv:2212.06817*, 2022.
- [3] Chilam Cheang, Sijin Chen, Zhongren Cui, Yingdong Hu, Liquan Huang, Tao Kong, Hang Li, Yifeng Li, Yuxiao Liu, Xiao Ma, et al. Gr-3 technical report. *arXiv preprint arXiv:2507.15493*, 2025.
- [4] Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair, Rafael Rafailov, Ethan Foster, Grace Lam, Pannag Sanketi, et al. Openvla: An open-source vision-language-action model. *arXiv preprint arXiv:2406.09246*, 2024.
- [5] Rui Shao, Wei Li, Lingsen Zhang, Renshan Zhang, Zhiyang Liu, Ran Chen, and Liqiang Nie. Large vlm-based vision-language-action models for robotic manipulation: A survey. *arXiv preprint arXiv:2508.13073*, 2025.
- [6] Mustafa Shukor, Dana Aubakirova, Francesco Capuano, Pepijn Kooijmans, Steven Palma, Adil Zouitine, Michel Aractingi, Caroline Pascal, Martino Russi, Andres Marafioti, et al. Smolvla: A vision-language-action model for affordable and efficient robotics. *arXiv preprint arXiv:2506.01844*, 2025.
- [7] Octo Model Team, Dibya Ghosh, Homer Walke, Karl Pertsch, Kevin Black, Oier Mees, Sudeep Dasari, Joey Hejna, Tobias Kreiman, Charles Xu, et al. Octo: An open-source generalist robot policy. *arXiv preprint arXiv:2405.12213*, 2024.
- [8] Dapeng Zhang, Jing Sun, Chenghui Hu, Xiaoyan Wu, Zhenlong Yuan, Rui Zhou, Fei Shen, and Qingguo Zhou. Pure vision language action (vla) models: A comprehensive survey. *arXiv preprint arXiv:2509.19012*, 2025.

- [9] Brianna Zitkovich, Tianhe Yu, Sichun Xu, Peng Xu, Ted Xiao, Fei Xia, Jialin Wu, Paul Wohlhart, Stefan Welker, Ayzaan Wahid, et al. Rt-2: Vision-language-action models transfer web knowledge to robotic control. In *Conference on Robot Learning*, pages 2165–2183. PMLR, 2023.
- [10] Zhijie Wang, Zhehua Zhou, Jiayang Song, Yuheng Huang, Zhan Shu, and Lei Ma. Vlatest: Testing and evaluating vision-language-action models for robotic manipulation. *Proceedings of the ACM on Software Engineering*, 2(FSE):1615–1638, 2025.
- [11] Borong Zhang, Jiahao Li, Jiachen Shen, Yishuai Cai, Yuhao Zhang, Yuanpei Chen, Juntao Dai, Jiaming Ji, and Yaodong Yang. Vla-arena: An open-source framework for benchmarking vision-language-action models. *arXiv preprint arXiv:2512.22539*, 2025.
- [12] Aiden Swann, Lachlain McGranahan, Hugo Buurmeijer, Monroe Kennedy III, and Mac Schwager. Sparse autoencoders reveal interpretable and steerable features in vla models. *arXiv preprint arXiv:2603.19183*, 2026.
- [13] Shresth Grover, Akshay Gopalkrishnan, Bo Ai, Henrik I Christensen, Hao Su, and Xuanlin Li. Enhancing generalization in vision-language-action models by preserving pretrained representations. *arXiv preprint arXiv:2509.11417*, 2025.
- [14] Xinghang Li, Peiyan Li, Long Qian, Minghuan Liu, Dong Wang, Jirong Liu, Bingyi Kang, Xiao Ma, Xinlong Wang, Di Guo, et al. What matters in building vision-language-action models for generalist robots. *Nature Machine Intelligence*, pages 1–15, 2026.
- [15] Chuning Zhu, Raymond Yu, Siyuan Feng, Benjamin Burchfiel, Paarth Shah, and Abhishek Gupta. Unified world models: Coupling video and action diffusion for pretraining on large robotic datasets. *arXiv preprint arXiv:2504.02792*, 2025.
- [16] Jun Guo, Qiwei Li, Peiyan Li, Zilong Chen, Nan Sun, Yifei Su, Heyun Wang, Yuan Zhang, Xinghang Li, and Huaping Liu. Unified 4d world action modeling from video priors with asynchronous denoising. *arXiv preprint arXiv:2604.26694*, 2026.
- [17] Jiayi Chen, Wenxuan Song, Pengxiang Ding, Ziyang Zhou, Han Zhao, Feilong Tang, Donglin Wang, and Haoang Li. Unified diffusion vla: Vision-language-action model via joint discrete denoising diffusion process. *arXiv preprint arXiv:2511.01718*, 2025.
- [18] Jiaming Liu, Hao Chen, Pengju An, Zhuoyang Liu, Renrui Zhang, Chenyang Gu, Xiaoqi Li, Ziyu Guo, Sixiang Chen, Mengzhen Liu, et al. Hybridvla: Collaborative diffusion and autoregression in a unified vision-language-action model. *arXiv preprint arXiv:2503.10631*, 2025.
- [19] Xiufeng Song, Yiran Qin, Yan Tai, Li Kang, Heng Zhou, Siqi Luo, Jiwen Yu, Ling Yang, Philip Torr, LEI BAI, et al. Diva: Discrete diffusion vision-language-action models for parallelized action generation.
- [20] John Won, Kyungmin Lee, Huiwon Jang, Dongyoung Kim, and Jinwoo Shin. Dual-stream diffusion for world-model augmented vision-language-action model. *arXiv preprint arXiv:2510.27607*, 2025.
- [21] Yuqi Wang, Xinghang Li, Wenxuan Wang, Junbo Zhang, Yingyan Li, Yuntao Chen, Xinlong Wang, and Zhaoxiang Zhang. Unified vision-language-action model. *arXiv preprint arXiv:2506.19850*, 2025.
- [22] Sandeep Routray, Hengkai Pan, Unnat Jain, Shikhar Bahl, and Deepak Pathak. Vipra: Video prediction for robot actions. *arXiv preprint arXiv:2511.07732*, 2025.
- [23] Fangqi Zhu, Zhengyang Yan, Zicong Hong, Quanxin Shou, Xiao Ma, and Song Guo. Wmpo: World model-based policy optimization for vision-language-action models. *arXiv preprint arXiv:2511.09515*, 2025.
- [24] Shashank Hegde, Satyaajeet Das, Gautam Salhotra, and Gaurav S Sukhatme. Warpd: World model assisted reactive policy diffusion. *arXiv preprint arXiv:2410.14040*, 2024.

- [25] Wenyao Zhang, Hongsi Liu, Zekun Qi, Yunnan Wang, Xinqiang Yu, Jiazhao Zhang, Runpei Dong, Jiawei He, Fan Lu, He Wang, et al. Dreamvla: a vision-language-action model dreamed with comprehensive world knowledge. *arXiv preprint arXiv:2507.04447*, 2025.
- [26] Seonghyeon Ye, Yunhao Ge, Kaiyuan Zheng, Shenyuan Gao, Sihyun Yu, George Kurian, Suneel Indupuru, You Liang Tan, Chuning Zhu, Jiannan Xiang, et al. World action models are zero-shot policies. *arXiv preprint arXiv:2602.15922*, 2026.
- [27] Liaoyuan Fan, Zetian Xu, Chen Cao, Wenyao Zhang, Mingqi Yuan, and Jiayu Chen. Aim: Intent-aware unified world action modeling with spatial value maps. *arXiv preprint arXiv:2604.11135*, 2026.
- [28] Peng-Fei Zhang, Ying Cheng, Xiaofan Sun, Shijie Wang, Fengling Li, Lei Zhu, and Heng Tao Shen. A step toward world models: A survey on robotic manipulation. *arXiv preprint arXiv:2511.02097*, 2025.
- [29] Xinqing Li, Xin He, Le Zhang, Min Wu, Xiaoli Li, and Yun Liu. A comprehensive survey on world models for embodied ai. *arXiv preprint arXiv:2510.16732*, 2025.
- [30] Hongtao Wu, Ya Jing, Chilam Cheang, Guangzeng Chen, Jiafeng Xu, Xinghang Li, Minghuan Liu, Hang Li, and Tao Kong. Unleashing large-scale video generative pre-training for visual robot manipulation. *arXiv preprint arXiv:2312.13139*, 2023.
- [31] Niket Agarwal, Arslan Ali, Maciej Bala, Yogesh Balaji, Erik Barker, Tiffany Cai, Prithvijit Chattopadhyay, Yongxin Chen, Yin Cui, Yifan Ding, et al. Cosmos world foundation model platform for physical ai. *arXiv preprint arXiv:2501.03575*, 2025.
- [32] Chi-Lam Cheang, Guangzeng Chen, Ya Jing, Tao Kong, Hang Li, Yifeng Li, Yuxiao Liu, Hongtao Wu, Jiafeng Xu, Yichu Yang, et al. Gr-2: A generative video-language-action model with web-scale knowledge for robot manipulation. *arXiv preprint arXiv:2410.06158*, 2024.
- [33] Suraj Nair, Aravind Rajeswaran, Vikash Kumar, Chelsea Finn, and Abhinav Gupta. R3m: A universal visual representation for robot manipulation. *arXiv preprint arXiv:2203.12601*, 2022.
- [34] Ilija Radosavovic, Baifeng Shi, Letian Fu, Ken Goldberg, Trevor Darrell, and Jitendra Malik. Robot learning with sensorimotor pre-training. In *Conference on Robot Learning*, pages 683–693. PMLR, 2023.
- [35] Simone Parisi, Aravind Rajeswaran, Senthil Purushwalkam, and Abhinav Gupta. The unsurprising effectiveness of pre-trained vision models for control. In *international conference on machine learning*, pages 17359–17371. PMLR, 2022.
- [36] Chenhao Shi, Yichen Zhu, Junjie Wen, Yefei Chen, Ziang Liu, Faming Fang, and Yi Xu. Teleportation, simulation, or human video? data utilization law for robot manipulation.
- [37] Rhoda AI Team. Causal video models are data-efficient robot policy learners. *Rhoda AI Blog*, 2026.
- [38] Haoran He, Chenjia Bai, Ling Pan, Weinan Zhang, Bin Zhao, and Xuelong Li. Learning an actionable discrete diffusion policy via large-scale actionless video pre-training. *Advances in Neural Information Processing Systems*, 37:31124–31153, 2024.
- [39] Bo Liu, Yifeng Zhu, Chongkai Gao, Yihao Feng, Qiang Liu, Yuke Zhu, and Peter Stone. Libero: Benchmarking knowledge transfer for lifelong robot learning. *Advances in Neural Information Processing Systems*, 36:44776–44791, 2023.
- [40] Chelsea Finn, Ian Goodfellow, and Sergey Levine. Unsupervised learning for physical interaction through video prediction. *Advances in neural information processing systems*, 29, 2016.
- [41] Mohammad Babaeizadeh, Chelsea Finn, Dumitru Erhan, Roy H Campbell, and Sergey Levine. Stochastic variational video prediction. *arXiv preprint arXiv:1710.11252*, 2017.

- [42] Jake Bruce, Michael D Dennis, Ashley Edwards, Jack Parker-Holder, Yuge Shi, Edward Hughes, Matthew Lai, Aditi Mavalankar, Richie Steigerwald, Chris Apps, et al. Genie: Generative interactive environments. In *Forty-first International Conference on Machine Learning*, 2024.
- [43] E-Ro Nguyen, Yichi Zhang, Kanchana Ranasinghe, Xiang Li, and Michael S Ryoo. Pixel motion diffusion is what we need for robot control. *arXiv preprint arXiv:2509.22652*, 2025.
- [44] Kanchana Ranasinghe, Xiang Li, E-Ro Nguyen, Cristina Mata, Jongwoo Park, and Michael S Ryoo. Pixel motion as universal representation for robot control. *arXiv preprint arXiv:2505.07817*, 2025.
- [45] Yitian Zheng, Zhangchen Ye, Weijun Dong, Shengjie Wang, Yuyang Liu, Chongjie Zhang, Chuan Wen, and Yang Gao. Translating flow to policy via hindsight online imitation. *arXiv preprint arXiv:2512.19269*, 2025.
- [46] Homanga Bharadhwaj, Roozbeh Mottaghi, Abhinav Gupta, and Shubham Tulsiani. Track2act: Predicting point tracks from internet videos enables generalizable robot manipulation. In *European Conference on Computer Vision*, pages 306–324. Springer, 2024.
- [47] Chuan Wen, Xingyu Lin, John So, Kai Chen, Qi Dou, Yang Gao, and Pieter Abbeel. Any-point trajectory modeling for policy learning. *arXiv preprint arXiv:2401.00025*, 2023.
- [48] Adam Hung, Bardienus Pieter Duisterhof, and Jeffrey Ichnowski. 3point: 3d point tracks for robot manipulation pretraining from casual videos. *arXiv preprint arXiv:2603.08485*, 2026.
- [49] Wenlong Huang, Yu-Wei Chao, Arsalan Mousavian, Ming-Yu Liu, Dieter Fox, Kaichun Mo, and Li Fei-Fei. Pointworld: Scaling 3d world models for in-the-wild robotic manipulation. *arXiv preprint arXiv:2601.03782*, 2026.
- [50] Karthik Dharmarajan, Wenlong Huang, Jiajun Wu, Li Fei-Fei, and Ruohan Zhang. Dream2flow: Bridging video generation and open-world manipulation with 3d object flow. *arXiv preprint arXiv:2512.24766*, 2025.
- [51] Homanga Bharadhwaj, Debidatta Dwibedi, Abhinav Gupta, Shubham Tulsiani, Carl Doersch, Ted Xiao, Dhruv Shah, Fei Xia, Dorsa Sadigh, and Sean Kirmani. Gen2act: Human video generation in novel scenarios enables generalizable robot manipulation. *arXiv preprint arXiv:2409.16283*, 2024.
- [52] Wenlong Huang, Chen Wang, Yunzhu Li, Ruohan Zhang, and Li Fei-Fei. Rekep: Spatio-temporal reasoning of relational keypoint constraints for robotic manipulation. *arXiv preprint arXiv:2409.01652*, 2024.
- [53] W Huang, C Wang, R Zhang, Y Li, J Wu, and L Voxposer Fei-Fei. Composable 3d value maps for robotic manipulation with language models. *arxiv 2023*. *arXiv preprint arXiv:2307.05973*.
- [54] Fangchen Liu, Kuan Fang, Pieter Abbeel, and Sergey Levine. Moka: Open-world robotic manipulation through mark-based visual prompting. *arXiv preprint arXiv:2403.03174*, 2024.
- [55] Jianshu Hu, Lidi Wang, Shujia Li, Yunpeng Jiang, Xiao Li, Paul Weng, and Yutong Ban. Generalizable coarse-to-fine robot manipulation via language-aligned 3d keypoints. *arXiv preprint arXiv:2509.23575*, 2025.
- [56] Carl Doersch, Ankush Gupta, Larisa Markeeva, Adrià Recasens, Lucas Smaira, Yusuf Aytar, João Carreira, Andrew Zisserman, and Yi Yang. Tap-vid: A benchmark for tracking any point in a video, 2023. URL <https://arxiv.org/abs/2211.03726>.
- [57] Nikita Karaev, Iurii Makarov, Jianyuan Wang, Natalia Neverova, Andrea Vedaldi, and Christian Rupprecht. Cotracker3: Simpler and better point tracking by pseudo-labelling real videos, 2024. URL <https://arxiv.org/abs/2410.11831>.
- [58] Simone Parisi, Aravind Rajeswaran, Senthil Purushwalkam, and Abhinav Gupta. The unsurprising effectiveness of pre-trained vision models for control. In *Proceedings of the 39th International Conference on Machine Learning*, pages 17359–17371. PMLR, 2022.

- [59] Suraj Nair, Aravind Rajeswaran, Vikash Kumar, Chelsea Finn, and Abhinav Gupta. R3m: A universal visual representation for robot manipulation. In *Conference on Robot Learning*, pages 892–909. PMLR, 2023.
- [60] Tete Xiao, Ilija Radosavovic, Trevor Darrell, and Jitendra Malik. Masked visual pre-training for motor control. *arXiv preprint arXiv:2203.06173*, 2022.
- [61] Younggyo Seo, Kimin Lee, Stephen L James, and Pieter Abbeel. Reinforcement learning with action-free pre-training from videos. In *International Conference on Machine Learning*, pages 19561–19579. PMLR, 2022.
- [62] Hongtao Wu, Ya Jing, Chilam Cheang, Guangzeng Chen, Jiafeng Xu, Xinghang Li, Minghuan Liu, Hang Li, and Tao Kong. Unleashing large-scale video generative pre-training for visual robot manipulation. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=NxoFmGgWC9>.
- [63] Xiaoyu Chen, Hangxing Wei, Pushi Zhang, Chuheng Zhang, Kaixin Wang, Yanjiang Guo, Rushuai Yang, Yucen Wang, Xinquan Xiao, Li Zhao, et al. Villa-x: enhancing latent action modeling in vision-language-action models. *arXiv preprint arXiv:2507.23682*, 2025.
- [64] Alexander Khazatsky, Karl Pertsch, Suraj Nair, Ashwin Balakrishna, Sudeep Dasari, Siddharth Karamcheti, et al. Droid: A large-scale in-the-wild robot manipulation dataset. *arXiv preprint arXiv:2403.12945*, 2024.
- [65] Kepan Nan, Rui Xie, Penghao Zhou, Tiehan Fan, Zhenheng Yang, Zhijie Chen, Xiang Li, Jian Yang, and Ying Tai. Openvid-1m: A large-scale high-quality dataset for text-to-video generation. In *International Conference on Learning Representations*, 2025.
- [66] Cheng Chi, Zhenjia Xu, Siyuan Feng, Eric Cousineau, Yilun Du, Benjamin Burchfiel, Russ Tedrake, and Shuran Song. Diffusion policy: Visuomotor policy learning via action diffusion, 2024. URL <https://arxiv.org/abs/2303.04137>.
- [67] Octo Model Team, Dibya Ghosh, Homer Walke, Karl Pertsch, Kevin Black, Oier Mees, Sudeep Dasari, Joey Hejna, Tobias Kreiman, Charles Xu, Jianlan Luo, You Liang Tan, Lawrence Yunliang Chen, Pannag Sanketi, Quan Vuong, Ted Xiao, Dorsa Sadigh, Chelsea Finn, and Sergey Levine. Octo: An open-source generalist robot policy, 2024. URL <https://arxiv.org/abs/2405.12213>.
- [68] Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair, Rafael Rafailov, Ethan Foster, Grace Lam, Pannag Sanketi, Quan Vuong, Thomas Kollar, Benjamin Burchfiel, Russ Tedrake, Dorsa Sadigh, Sergey Levine, Percy Liang, and Chelsea Finn. Openvla: An open-source vision-language-action model, 2024. URL <https://arxiv.org/abs/2406.09246>.
- [69] Karl Pertsch, Kyle Stachowicz, Brian Ichter, Danny Driess, Suraj Nair, Quan Vuong, Oier Mees, Chelsea Finn, and Sergey Levine. Fast: Efficient action tokenization for vision-language-action models, 2025. URL <https://arxiv.org/abs/2501.09747>.
- [70] Physical Intelligence, Kevin Black, Noah Brown, James Darpinian, Karan Dhabalia, Danny Driess, Adnan Esmail, Michael Equi, Chelsea Finn, Niccolo Fusai, Manuel Y. Galliker, Dibya Ghosh, Lachy Groom, Karol Hausman, Brian Ichter, Szymon Jakubczak, Tim Jones, Liyiming Ke, Devin LeBlanc, Sergey Levine, Adrian Li-Bell, Mohith Mothukuri, Suraj Nair, Karl Pertsch, Allen Z. Ren, Lucy Xiaoyang Shi, Laura Smith, Jost Tobias Springenberg, Kyle Stachowicz, James Tanner, Quan Vuong, Homer Walke, Anna Walling, Haohuan Wang, Lili Yu, and Ury Zhilinsky. $\pi_{0.5}$: a vision-language-action model with open-world generalization, 2025. URL <https://arxiv.org/abs/2504.16054>.
- [71] Moo Jin Kim, Chelsea Finn, and Percy Liang. Fine-tuning vision-language-action models: Optimizing speed and success, 2025. URL <https://arxiv.org/abs/2502.19645>.
- [72] Delin Qu, Haoming Song, Qizhi Chen, Yuanqi Yao, Xinyi Ye, Yan Ding, Zhigang Wang, JiaYuan Gu, Bin Zhao, Dong Wang, and Xuelong Li. Spatialvla: Exploring spatial representations for visual-language-action model, 2025. URL <https://arxiv.org/abs/2501.15830>.

- [73] Wenxuan Song, Jiayi Chen, Pengxiang Ding, Han Zhao, Wei Zhao, Zhide Zhong, Zongyuan Ge, Jun Ma, and Haoang Li. Accelerating vision-language-action model integrated with action chunking via parallel decoding, 2025. URL <https://arxiv.org/abs/2503.02310>.
- [74] Hao Li, Qi Lv, Rui Shao, Xiang Deng, Yinchuan Li, Jianye Hao, and Liqiang Nie. Star: Learning diverse robot skill abstractions through rotation-augmented vector quantization, 2025. URL <https://arxiv.org/abs/2506.03863>.
- [75] Zhi Hou, Tianyi Zhang, Yuwen Xiong, Haonan Duan, Hengjun Pu, Ronglei Tong, Chengyang Zhao, Xizhou Zhu, Yu Qiao, Jifeng Dai, and Yuntao Chen. Dita: Scaling diffusion transformer for generalist vision-language-action policy, 2025. URL <https://arxiv.org/abs/2503.19757>.
- [76] Qingqing Zhao, Yao Lu, Moo Jin Kim, Zipeng Fu, Zhuoyang Zhang, Yecheng Wu, Zhaoshuo Li, Qianli Ma, Song Han, Chelsea Finn, Ankur Handa, Ming-Yu Liu, Donglai Xiang, Gordon Wetzstein, and Tsung-Yi Lin. Cot-vla: Visual chain-of-thought reasoning for vision-language-action models, 2025. URL <https://arxiv.org/abs/2503.22020>.
- [77] Wei Li, Renshan Zhang, Rui Shao, Jie He, and Liqiang Nie. CogVLA: Cognition-aligned vision-language-action model via instruction-driven routing & sparsification. *arXiv preprint, arxiv:2508.21046*, 2025.
- [78] Chuning Zhu, Raymond Yu, Siyuan Feng, Benjamin Burchfiel, Paarth Shah, and Abhishek Gupta. Unified world models: Coupling video and action diffusion for pretraining on large robotic datasets, 2025. URL <https://arxiv.org/abs/2504.02792>.
- [79] Tony Z. Zhao, Vikash Kumar, Sergey Levine, and Chelsea Finn. Learning fine-grained bimanual manipulation with low-cost hardware, 2023. URL <https://arxiv.org/abs/2304.13705>.
- [80] Dustin Podell, Zion English, Kyle Lacey, Andreas Blattmann, Tim Dockhorn, Jonas Müller, Joe Penna, and Robin Rombach. Sdxl: Improving latent diffusion models for high-resolution image synthesis, 2023. URL <https://arxiv.org/abs/2307.01952>.
- [81] Jiaming Song, Chenlin Meng, and Stefano Ermon. Denoising diffusion implicit models, 2022. URL <https://arxiv.org/abs/2010.02502>.
- [82] Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization, 2019. URL <https://arxiv.org/abs/1711.05101>.

A Supplementary material

This appendix provides implementation details and supplementary analyses that complement the main paper. We include the real-robot experimental protocol, the real-robot action-free pretraining result, prediction-horizon sensitivity, and task-level failure modes.

A.1 Implementation details

Architecture JOPAT uses a DiT-style transformer backbone with modality-specific encoders and decoders for visual latents, point tracks, and actions. The conditioning encoder processes the two most recent RGB observations and injects the resulting global feature into each Transformer block through AdaLN. Future observations are encoded with a frozen SDXL VAE, while point tracks are represented on a regular query grid and patchified with a 3D convolutional encoder. The Transformer output is split into modality-specific heads for action noise, visual-latent noise, track-coordinate noise, and visibility logits, matching the unified pixel-track-action architecture in Section 4.1 and the track construction in Section 4.2.

Training data For action-free videos, the action branch is masked and the model is trained only with visual-latent, track-coordinate, and visibility losses. For action-labeled robot demonstrations, all branches are supervised. Point-track and visibility targets are extracted with CoTrackerV3 [57] using the sliding-window construction described in Section 4.2. Simulation and real-robot experiments use the same joint denoising formulation, with dataset-specific pretraining and finetuning protocols described in the corresponding experiment sections.

Inference At test time, JOPAT performs receding-horizon action generation with DDIM sampling. Action, visual, and track tokens are initialized from Gaussian noise and denoised conditioned on the current observation history. The model can also sample future visual latents and tracks for analysis, but policy execution uses only the decoded action chunk; the first 8 actions are executed before replanning.

Compute resources. Action-free pretraining was performed on 4 NVIDIA H200 GPUs for approximately 5 days. Task-specific finetuning used 1 NVIDIA H200 GPU for approximately 1 day. During deployment, inference runs on a single NVIDIA RTX 4090 GPU at approximately 10 Hz.

A.2 Real-robot experimental protocol

Platform and tasks We evaluate on the LeRobot SO-101 platform with four manipulation tasks: *Cook-Soup*, which requires long-horizon sequencing and repeated object interactions; *Insert-Peg*, which requires precise geometric alignment and contact-sensitive execution; *Push-Tomato*, which tests contact-rich object displacement under pose and interaction variation; and *Pick-Grocery*, which tests object-level OOD generalization to unseen objects. Together, these tasks evaluate robustness to partial observability, arm-object occlusion, contact-induced dynamics, and distribution shift.

Training data and finetuning For real-robot transfer, JOPAT is first pretrained on DROID action-free videos [64]. During action-free pretraining, the action branch is masked and only the visual-latent, track-coordinate, and visibility objectives are applied. Point tracks and visibility labels are extracted with CoTrackerV3 [57] using the same sliding-window construction as in the simulation experiments. The pretrained model is then finetuned separately on each LeRobot task using 50 action-labeled demonstrations. During finetuning, all branches are supervised so that the pretrained pixel-track motion priors are aligned with executable SO-101 actions.

Inference and evaluation At test time, JOPAT uses receding-horizon action generation with DDIM sampling. The policy conditions on the two most recent RGB observations, denoises action, visual, and track tokens jointly, and executes only the decoded action chunk. Unless otherwise stated, we use a future-observation offset of $H = 16$, an action/track horizon of 19 steps, 10 DDIM denoising steps, and execute the first 8 actions before replanning. We report success rate over 10 evaluation rollouts per task for each method.

Task setup Figure 3 visualizes the four LeRobot SO-101 tasks. Each column corresponds to one task, and the three rows show the initial configuration, an intermediate state, and a successful final state.

Table 8: **JOPAT hyperparameters.** Unless otherwise stated, the same configuration is used for simulation and real-robot experiments.

Parameter	Value
Data and representation	
Observation history	2 RGB frames
Image resolution	224×224
Future-observation offset	$H = 16$ steps
Action / track horizon	$K = H_p = 19$ steps
Executed action prefix	8 steps
SDXL latent shape	$28 \times 28 \times 4$
Query-point grid	25×25 ($N = 625$)
Track patch size	$(2, 5, 5)$ over time and grid dimensions
Model	
Conditioning encoder	ResNet-18, ImageNet initialization
Visual target encoder	Frozen SDXL VAE [80]
Transformer depth	12 layers
Hidden dimension	768
Attention heads	12
MLP ratio	4
Register tokens	8
Conditioning mechanism	AdaLN
Diffusion and optimization	
Noise schedule	squaredcos_cap_v2
Training diffusion steps	100
Inference denoising steps	10
Sampler	DDIM [81]
Optimizer	AdamW [82]
Learning rate	1×10^{-4}
Weight decay	1×10^{-6}
Adam betas	$(0.9, 0.999)$
Batch size	144 for pretraining; 72 for finetuning
LR schedule	Constant for pretraining; cosine for finetuning
Warmup steps	1000
Loss weights	$\lambda_a = \lambda_o = \lambda_p = \lambda_{vis} = 1$

A.3 Additional ablations

The main paper reports the LIBERO-Long joint-versus-single-modality ablation in Table 3, the real-robot modality ablation in Table 4, the visibility ablation in Table 5, and the LIBERO-Long pretraining scaling study in Table 6. Here we provide two supplementary real-robot analyses: the effect of DROID action-free video pretraining and the sensitivity to the future-observation offset. Both follow the real-robot protocol in Appendix A.2.

A.3.1 Action-free pretraining

Figure 4 summarizes the effect of action-free video pretraining. With the same 50 real-robot finetuning demonstrations per task, DROID pretraining improves the average success rate from 10.0% to 57.5%. The largest gains occur on Push-Tomato and Cook-Soup, suggesting that action-free videos provide useful priors for object motion, occlusion handling, and contact-induced dynamics. Insert-Peg remains difficult, indicating that high-precision insertion also requires fine-grained 3D geometry or contact sensing beyond 2D tracks and RGB latents.

A.3.2 Prediction-horizon sensitivity

Figure 5 shows that moderate future-observation offsets already capture the dynamics needed for most tasks. The $H = 16$ setting matches the performance of longer offsets on average, while avoiding the higher uncertainty associated with very long future-track prediction. Longer offsets can help multi-stage tasks such as Cook-Soup, but may hurt precision-sensitive tasks such as Insert-Peg, where future uncertainty produces noisy supervision for fine contact alignment.

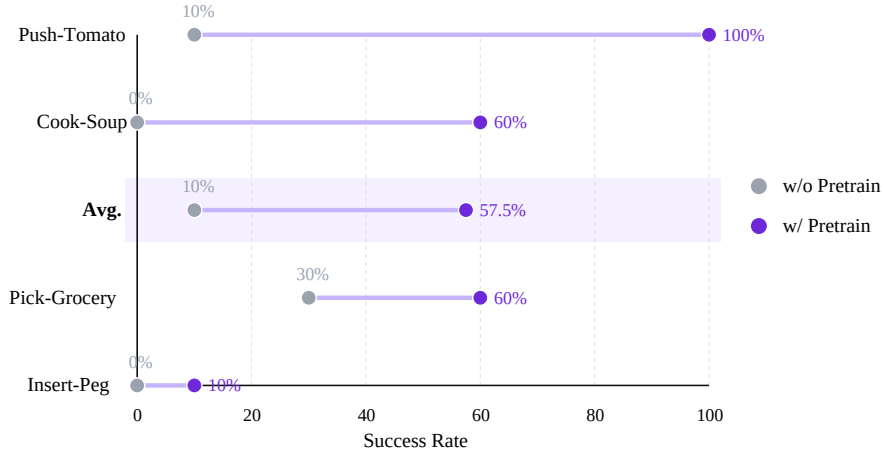


Figure 4: **Action-free pretraining ablation.** Average real-robot success rate with and without DROID action-free video pretraining.

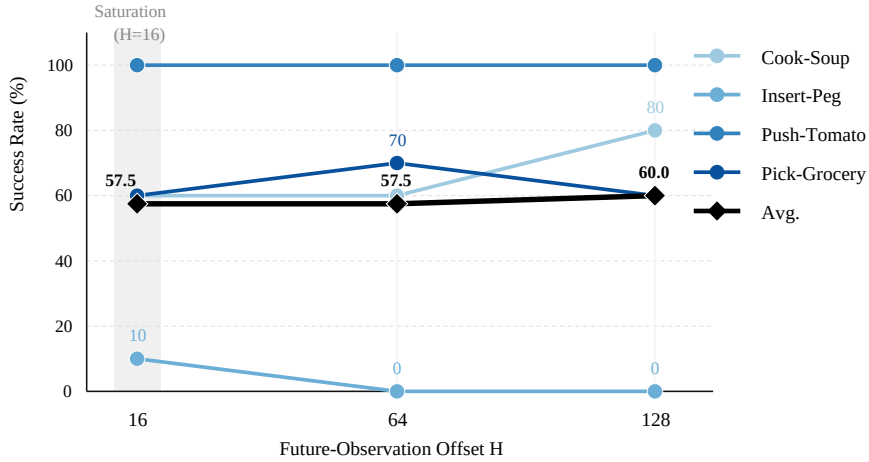


Figure 5: **Horizon sensitivity.** Average real-robot success rate for different future-observation offsets.

A.4 Qualitative behavior and failure modes

Occlusion and off-screen motion In qualitative rollouts, the predicted tracks often remain temporally coherent when the robot arm occludes the target or when objects move near the image boundary. This behavior is consistent with the quantitative visibility ablation: the model learns to maintain a belief over hidden object motion rather than relying only on currently visible pixels. Such object permanence is particularly useful for long-horizon tasks in which the policy must continue acting through temporary perceptual dropout.

Task-level failure modes The remaining failures are task dependent:

- **Cook-Soup.** Failures often occur around the pot lid, where specular reflections and unusual lid orientations weaken visual grounding. Stronger illumination augmentation or depth cues may improve robustness.
- **Insert-Peg.** The task requires millimeter-level 3D alignment between the peg and socket. Two-dimensional tracks reduce perceptual drift but do not fully resolve contact geometry, leading to jamming or repeated failed insertions.

- **Push-Tomato.** Failures are usually caused by small localization or approach-angle errors that compound during pushing. Better contact dynamics or closed-loop state estimation may further improve reliability.
- **Pick-Grocery.** Failures mainly reflect limited spatial generalization in clutter. The policy can overfit to frequent grasp locations and struggle when object layouts differ from the demonstration distribution.

Overall, JOPAT is strongest when success depends on temporal consistency, object permanence, and robustness to visual dropout. Its main limitation is fine-grained contact geometry, suggesting that future extensions should combine the proposed pixel-track world-action model with explicit 3D sensing, tactile feedback, or contact-aware objectives.