

GrainGS: Gradient-Decoupled Gaussian Splatting for Efficient Dynamic Novel View Synthesis

Jiahao He, Yihua Shao, Zhengkai Zhao, Pan Gao, Fei Ma, Jingcai Guo, *Senior Member, IEEE*, Hao Tang, *Senior Member, IEEE*, Nicu Sebe, *Senior Member, IEEE*, Qi Tian, *Fellow, IEEE*

Abstract—Dynamic scene reconstruction with 3D Gaussian Splatting requires a balance between fine-grained motion modeling, structural stability, and compact representation. Existing per-primitive methods provide flexible local deformation but often suffer from redundant primitive growth, while anchor-based methods improve spatial regularity at the cost of suppressing locally varying motion. To address these issues, we present GrainGS, a dynamic Gaussian framework that combines a hierarchical anchor scaffold with per-Gaussian deformation. A static warm-up stage first establishes a time-invariant canonical representation from observations across all timestamps. During joint training, a stop-gradient operation blocks the deformation-mediated gradient pathway to the canonical positions while preserving their direct refinement through the reconstruction objective. Each Gaussian then predicts independent temporal offsets for position, rotation, and scale, enabling detailed local motion within a structurally constrained scaffold. A canonical-residual appearance decomposition further models frame-dependent photometric changes without forcing them into geometric deformation. Experiments on synthetic monocular and real-world multiview benchmarks show that GrainGS achieves high reconstruction quality, real-time novel view synthesis, and compact storage. Under the synthetic benchmark setting, it reaches an average peak signal-to-noise ratio of 36.98 decibels, renders at 435.6 frames per second, and requires 4.67 megabytes of storage.

Index Terms—3D Gaussian Splatting, 4D Reconstruction, Neural Rendering.

I. INTRODUCTION

CAPTURING dynamic real-world scenes and rendering them from arbitrary viewpoints are essential for free-viewpoint video and visual effects [1]–[6]. With multi-view

This work was supported in part by the National Natural Science Foundation of China (No. 62272227) and supported in part by the Guangdong Basic and Applied Basic Research Foundation (2026A1515010184) and the Research Task Assignment Project from Guangdong Laboratory of Artificial Intelligence and Digital Economy (SZ) (GML-26420007).

Jiahao He, Zhengkai Zhao, and Pan Gao are with the College of Artificial Intelligence, Nanjing University of Aeronautics and Astronautics, Nanjing, Jiangsu, China (e-mail: nuaahjh@nuaa.edu.cn; zhengkai.zhao@nuaa.edu.cn; pan.gao@nuaa.edu.cn).

Yihua Shao is with Institute of Automation, Chinese Academy of Sciences, Beijing, China, and also with Department of Computing, Hong Kong Polytechnic University, Hong Kong, China. (e-mail: yihua.jerry@gmail.com)

Hao Tang is with the School of Computer Science, Peking University, Beijing, China. (e-mail: bjdxthanghao@gmail.com)

Fei Ma and Qi Tian are with Guangdong Laboratory of Artificial Intelligence and Digital Economy, Shenzhen, China. Qi Tian is also with Huawei Consumer Business Group, Huawei, Shenzhen, China. (e-mail: mafei@gml.ac.cn, wywqtian@gmail.com)

Jingcai Guo is with Department of Computing, Hong Kong Polytechnic University, Hong Kong, China. (e-mail: jingcai.guo@gmail.com)

Nicu Sebe is with Department of Information Engineering and Computer Science, University of Trento, Trento, Italy. (e-mail: sebe@disi.unitn.it)

Jiahao He and Yihua Shao are Equal Contribution (Corresponding authors: Pan Gao and Fei Ma.)

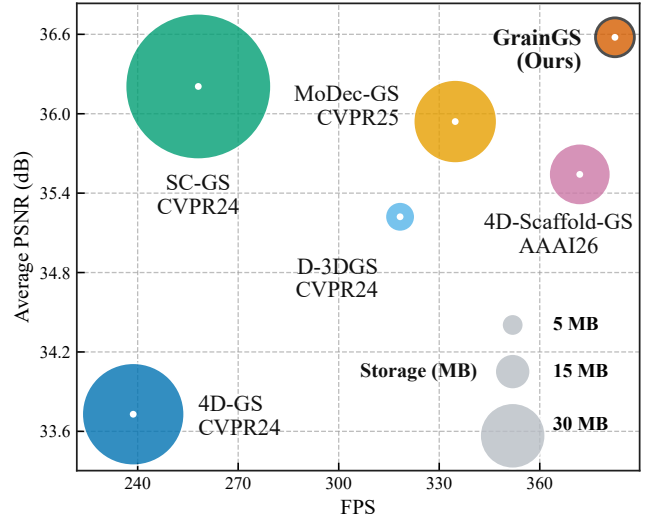


Fig. 1: **Quality-Efficiency Comparison.** Average PSNR versus rendering speed for methods with complete statistics; bubble size indicates model storage. Values are scene-count-weighted averages over eight D-NeRF and six DG-Mesh scenes, reflecting overall performance.

capture systems becoming increasingly accessible, there is growing demand for methods that reconstruct high-fidelity geometry, motion, and appearance while supporting real-time rendering [1], [7]–[9]. Neural Radiance Fields (NeRFs) [10] provide a principled framework for novel-view synthesis [11]–[15], but their volumetric rendering cost limits real-time applications [16]–[21]. 3D Gaussian Splatting (3D-GS) [22] replaces implicit volumes with explicit Gaussian primitives rendered through differentiable rasterization [23]–[26], enabling efficient rendering and motivating a growing body of dynamic extensions [27]–[34].

Existing dynamic 3D-GS methods must balance motion expressiveness and structural stability. Per-primitive approaches provide independent motion degrees of freedom [27]–[30], [32], but weak structural constraints may lead to redundant Gaussian growth and unstable canonical geometry. In contrast, anchor-based methods impose spatial regularity through sparse control nodes or hierarchical scaffolds [31], [35], [36], yet commonly propagate similar deformation signals to neighboring Gaussians, limiting fine-grained local motion. Recent methods such as 4D Scaffold-GS [33] and MoDec-GS [34] improve compactness through dynamic anchor allocation or motion decomposition, but canonical geometry and temporal deformation remain closely coupled during optimization.

We identify **deformation-mediated gradient interference** as an important source when canonical coordinates are differentiable inputs to the deformation network, frame-specific deformation gradients can perturb the canonical representation and weaken its role as a consistent geometric reference. Moreover, temporal appearance changes, such as moving shadows and specular highlights, may be incorrectly absorbed by geometric or deformation parameters when no dedicated temporal appearance models are available [8], [9], [20], [32].

To address these issues, we propose **GrainGS**, which combines a structurally regular anchor scaffold with fine-grained per-Gaussian deformation. First, a static warm-up phase optimizes the canonical modules over images sampled from all timestamps while deformation is disabled, establishing a time-invariant scaffold before temporal modeling begins. During joint training, a stop-gradient boundary blocks the indirect gradient pathway from the deformation network to the canonical positions, while retaining their direct refinement through the reconstruction loss. Second, each child Gaussian predicts independent temporal offsets $(\Delta\mathbf{x}, \Delta\mathbf{r}, \Delta\rho)$ from its own canonical position, allowing locally varying motion within the structural constraints of the anchor scaffold. Finally, we decompose color and the neural opacity score into time-invariant canonical components $(\mathbf{c}_{\text{can}}, o_{\text{can}})$ and regularized temporal residuals $(\Delta\mathbf{c}, \Delta o)$. The residual branch provides explicit capacity for frame-dependent photometric changes, reducing the pressure to explain such variation through geometric deformation.

We evaluate our methods on different datasets, results show that GrainGS achieves a strong balance between reconstruction quality and efficiency. In conclusion, our contributions can be summarized as follows:

- 1) We propose **GrainGS**, a per-Gaussian deformation method within a hierarchical anchor scaffold, which preserves structural compactness while capturing fine-grained local motion. In addition, we introduce a canonical-residual appearance decomposition to model temporal photometric variations.
- 2) We introduce a two-stage optimization strategy that combines static warm-up with stop-gradient isolation, thereby reducing deformation-mediated interference with the canonical representation.
- 3) Extensive experiments on D-NeRF [37] and DG-Mesh [8] datasets demonstrate that our method achieves competitive state-of-the-art reconstruction quality, real-time rendering performance, and compact model storage.

II. RELATED WORK

A. Neural Scene Representations

NeRF [10] optimizes continuous volumetric functions via differentiable ray marching, establishing a principled framework for photorealistic novel view synthesis [11]–[14]. Subsequent work improved training efficiency through multi-resolution hash encodings [38] and extended the framework to dynamic scenes via time-conditioned deformation fields [16], [17], [37], [39] and higher-dimensional canonical coordinates [18], [40], [41], at the cost of dense volumetric sampling

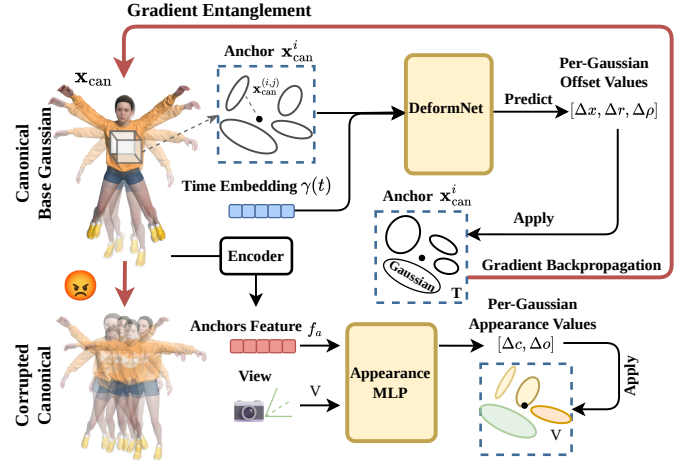


Fig. 2: **Gradient entanglement.** Without architectural isolation, deformation gradients propagate back into canonical geometry through the shared variable $\mathbf{x}_{\text{can}}$, destabilizing the time-invariant reference.

that precludes real-time rendering [19]–[21]. 3D-GS [22] resolves this by representing scenes as anisotropic Gaussian primitives rendered via tile-based differentiable rasterization, achieving real-time performance while preserving competitive visual fidelity. Scaffold-GS [35] introduced a hierarchical anchor structure in which neural Gaussians are spawned from sparse anchor points via learned offset MLPs, reducing redundant primitive proliferation and imposing structural regularity [36]. This representation targets static scenes, extending it to dynamic scenes requires introducing temporal deformation while preserving the geometric stability the anchor structure provides [29]–[31], [33], [36], [42].

B. Dynamic 3D Gaussian Splatting

Dynamic extensions of 3D-GS, building on earlier non-rigid reconstruction paradigms [43], [44], introduce time-conditioned deformation fields mapping each observed frame to a shared canonical representation [27]–[32]. Per-Gaussian approaches operate without structural priors [27], [29], [30], [42]: Deformable-3DGS [29] learns independent geometric offsets per gaussian conditioned on position and time, preserving per-gaussian motion degrees of freedom but suffering from uncontrolled Gaussian growth; 4D-GS [30] encodes dynamic scenes as a unified spatiotemporal Gaussian field, achieving compact and efficient rendering but coupling spatial and temporal degrees of freedom within each gaussian. Anchor-based methods impose structural regularity: SC-GS [31] propagates sparse control-node deformations to neighboring Gaussians via interpolation, imposing structural regularity but enforcing a single deformation signal per neighborhood, which suppresses fine-grained local motion. Gaussian-Flow [28] parameterizes per-Gaussian motion with polynomial trajectories, achieving temporal smoothness but lacking explicit canonical-deformation decoupling. 4D Scaffold-GS [33] extends the Scaffold-GS anchor hierarchy to dynamic scenes with a dynamic-aware anchor-growing strategy that densifies anchors

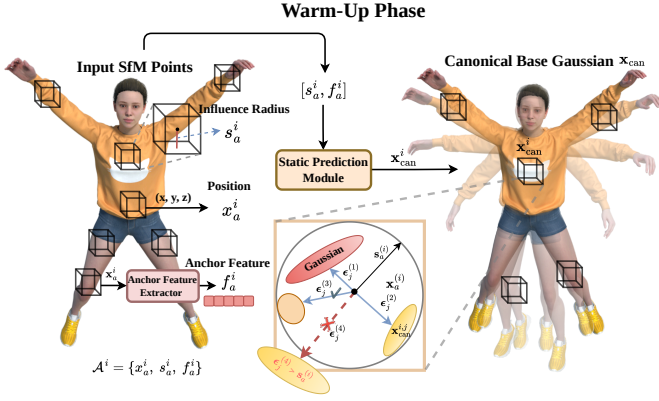


Fig. 3: **Static warm-up.** For the first T_w iterations only the canonical scaffold is optimized, establishing a time-invariant geometric foundation before temporal modules activate.

in moving regions, achieving efficient high-fidelity reconstruction, yet it folds temporal modeling into the shared anchor features rather than isolating canonical geometry from deformation. MoDec-GS [34] decomposes scene motion in a global-to-local manner with temporal interval adjustment to obtain a compact representation, but its deformation is still optimized jointly with canonical geometry through a shared gradient pathway. Despite these advances, a common structural limitation persists: canonical geometry, the deformation field, and appearance are optimized through a shared gradient pathway without explicit module isolation [28]–[31], [42]. Deformation gradients continuously perturb the canonical representation, while temporal photometric variations introduce appearance gradients that propagate into canonical geometry through the shared anchor feature [8], [9], [20]. Both failure modes share this common source and motivate the design of GrainGS.

III. METHOD

A. Overview

3D Gaussian Splatting (3D-GS) [22] represents a static scene as a set of N anisotropic Gaussians. Each Gaussian $\mathcal{G}_i$ is parameterized by a mean position $\mu_i \in \mathbb{R}^3$, a covariance matrix $\Sigma_i = \mathbf{R}_i \mathbf{S}_i \mathbf{S}_i^\top \mathbf{R}_i^\top$ decomposed into rotation $\mathbf{R}_i \in \text{SO}(3)$ and diagonal scale $\mathbf{S}_i \in \mathbb{R}^{3 \times 3}$, a base opacity $\alpha_i \in [0, 1]$, and view-dependent color $\mathbf{c}_i$. Each Gaussian contributes to the rendered image through a projected 2D covariance $\tilde{\Sigma}_i = \mathbf{J} \mathbf{W} \Sigma_i \mathbf{W}^\top \mathbf{J}^\top$, where $\mathbf{W}$ is the view transform and $\mathbf{J}$ the affine approximation of the projective Jacobian [22]. The per-pixel opacity after projection is

$$\alpha'_i(\mathbf{p}) = \alpha_i \exp\left(-\frac{1}{2}(\mathbf{p} - \tilde{\mu}_i)^\top \tilde{\Sigma}_i^{-1}(\mathbf{p} - \tilde{\mu}_i)\right), \quad (1)$$

where $\tilde{\mu}_i$ is the projected mean. Pixel color is obtained by front-to-back α -blending after tile-based depth sorting [22]:

$$\hat{C} = \sum_{i=1}^N \mathbf{c}_i \alpha'_i(\mathbf{p}) \prod_{j=1}^{i-1} (1 - \alpha'_j(\mathbf{p})). \quad (2)$$

GrainGS extends this static representation to dynamic scenes through three modules (Fig. 4): a *canonical* anchor scaffold

that defines a time-invariant geometric reference (i.e., a rest-state coordinate frame to which all temporal deformations are referenced), a per-Gaussian deformation module with stop-gradient isolation, and a decoupled appearance model.

B. Canonical Anchor-Gaussian Scaffold

Existing dynamic 3D-GS methods suffer from gradient entanglement partly because they lack a stable geometric reference: the canonical geometry and the deformation field are updated through a shared gradient pathway, causing mutual interference [28]–[31]. To provide such a reference, we adopt a hierarchical anchor structure that defines a fixed rest-state representation before any deformation is introduced [35].

Anchor initialization. An *anchor* is a sparse 3D control point associated with a local support region, from which a set of child Gaussians are generated to represent the local scene geometry and appearance. Following Scaffold-GS [35], we initialize anchor positions from the Structure-from-Motion (SfM) sparse point cloud, followed by voxel downsampling at resolution v to obtain a spatially uniform anchor distribution. Each anchor i is parameterized by a learnable tuple

$$\mathcal{A}_i = \{\mathbf{x}_a^{(i)} \in \mathbb{R}^3, \mathbf{s}_a^{(i)} \in \mathbb{R}^3, \mathbf{f}_a^{(i)} \in \mathbb{R}^{d_f}\}, \quad (3)$$

where $\mathbf{x}_a^{(i)}$ is the anchor position, $\mathbf{s}_a^{(i)}$ controls the local generation radius, and $\mathbf{f}_a^{(i)}$ is a learnable per-anchor feature embedding of dimension d_f that encodes local geometric and appearance information (Fig. 4); it is randomly initialized and jointly optimized with all other parameters during training.

Canonical Gaussian generation. Each anchor produces k child Gaussians. The j -th child of anchor i carries a learnable offset $\epsilon_j^{(i)} \in \mathbb{R}^3$; its canonical position is

$$\mathbf{x}_{\text{can}}^{(i,j)} = \mathbf{x}_a^{(i)} + \mathbf{s}_a^{(i)} \odot \epsilon_j^{(i)}. \quad (4)$$

A shared Static MLP predicts the remaining canonical geometric attributes for each child Gaussian independently from the anchor feature and the corresponding child offset [35]:

$$(\mathbf{r}_{\text{can}}^{(i,j)}, \boldsymbol{\rho}_{\text{can}}^{(i,j)}) = \text{StaticMLP}\left(\mathbf{f}_a^{(i)}, \epsilon_j^{(i)}\right), \quad (5)$$

where $\mathbf{r}_{\text{can}}^{(i,j)} \in \mathbb{R}^4$ is a unit quaternion and $\boldsymbol{\rho}_{\text{can}}^{(i,j)} \in \mathbb{R}^3$ is the canonical log-scale vector. The corresponding positive canonical scale is $\mathbf{s}_{\text{can}}^{(i,j)} = \exp(\boldsymbol{\rho}_{\text{can}}^{(i,j)})$. Because different children carry different offsets $\epsilon_j^{(i)}$, the Static MLP produces distinct attributes for each of the k Gaussians within the same anchor, yielding a per-Gaussian canonical representation. Together, Eqs. (4)–(5) define a time-independent canonical representation that serves as the geometric foundation for deformation.

Static warm-up. To ensure that this canonical scaffold is established before any deformation gradient can influence it, we adopt a two-phase training schedule (Fig. 3). For the first T_w iterations, only the anchor parameters $\{\mathcal{A}_i\}$ and the Static MLP are optimized; the DeformNet and Appearance Residual Field remains frozen. Training images are sampled uniformly across all timestamps, so the canonical scaffold must account for the full spatial extent of the object's motion range rather than converging to a single-frame configuration.

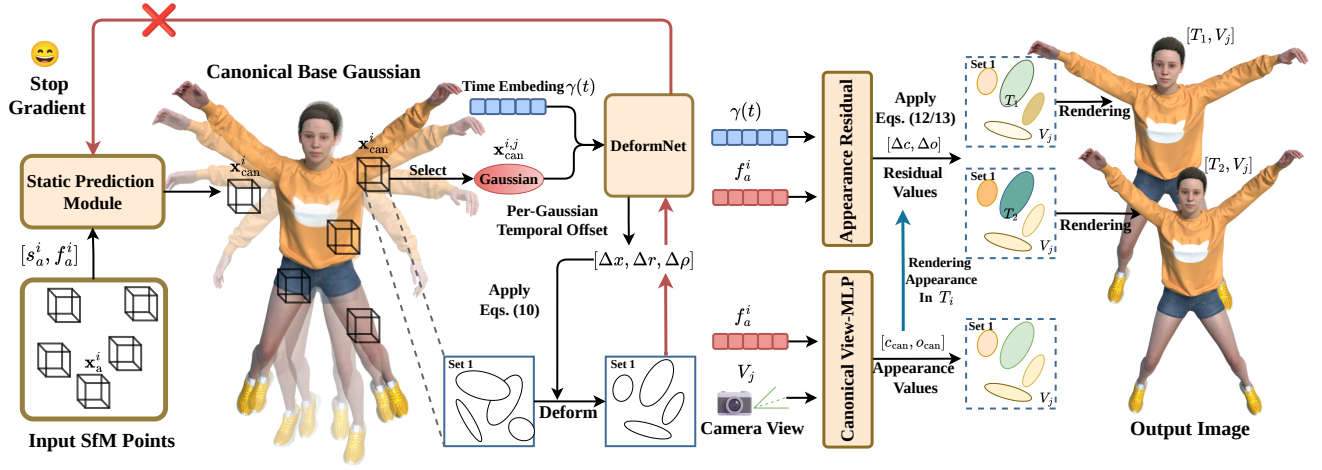


Fig. 4: **Overview of GrainGS.** The pipeline constructs a canonical anchor scaffold, applies per-Gaussian deformation via a time-conditioned DeformNet with stop-gradient isolation, and models appearance through a canonical-residual decomposition.

While warm-up strategies are common in dynamic 3D-GS pipelines [29], [30], their typical purpose is to bootstrap point-cloud initialization from SfM. Our warm-up serves a different goal: establishing a geometrically stable canonical scaffold before deformation gradients are introduced, so that the subsequent gradient decoupling operates on a reliable geometric reference. When the deformation network activates at iteration T_w+1 , it operates on a geometrically stable scaffold and learns incremental temporal corrections, rather than being required to reconstruct geometry and model motion simultaneously.

Adaptive anchor growing and pruning. A fixed scaffold can under-allocate capacity near fine geometry or persistently hard regions, so we adapt the canonical scaffold with gradient-driven anchor growing. For each anchor-offset pair (i, j) , we accumulate the screen-space position-gradient norm $G_{i,j}$ and valid observation count $D_{i,j}$. The average gradient $\bar{g}_{i,j} = G_{i,j}/(D_{i,j} + \epsilon)$ indicates the expected loss reduction from moving the corresponding local Gaussian. An offset is selected as a growing candidate when it is sufficiently observed and its average gradient exceeds a threshold:

$$D_{i,j} > \tau_{\text{obs}}, \quad \bar{g}_{i,j} \geq \tau_g. \quad (6)$$

Candidate positions, derived from anchor centers and local offsets, are quantized on a multi-resolution voxel grid. A new anchor is inserted only if the corresponding voxel is unoccupied, thereby preventing redundant growth. Each new anchor inherits the parent features and is initialized with low opacity and zero local offsets before joint optimization with the scaffold. To control model complexity, well-observed anchors with consistently low opacity are pruned. For dynamic scenes, pruning is deferred until the deformation trajectories have stabilized.

C. Gaussian-Level Deformation

With the canonical scaffold established, the remaining challenge is to model per-frame motion without re-introducing gradient entanglement. We predict independent deformation offsets for each Gaussian while using a stop-gradient operator to block gradient flow back into the canonical scaffold.

Per-Gaussian temporal offsets. After the warm-up phase, a DeformNet predicts independent per-Gaussian geometric offsets conditioned on canonical position and time. The canonical position is detached from the computational graph via a stop-gradient operator $\text{sg}(\cdot)$ before being passed to the DeformNet:

$$(\Delta \mathbf{x}, \Delta \mathbf{r}, \Delta \rho) = \text{DeformNet}(\text{sg}(\mathbf{x}_{\text{can}}^{(i,j)}), \gamma(t)), \quad (7)$$

where $\gamma(t)$ is the positional encoding of timestamp t [45]. Unlike anchor-based methods that broadcast a single per-anchor deformation to all child Gaussians, Eq. (7) produces an independent offset for each Gaussian, conditioned on its own canonical position [31]. This per-Gaussian formulation allows the representation to capture locally varying motion within each anchor neighborhood, which uniform anchor-broadcast deformation cannot express.

Stop-gradient isolation. The operator $\text{sg}(\cdot)$ in Eq. (7) blocks gradient flow from the rendering loss back into the canonical scaffold through the DeformNet. Without this isolation, deformation gradients propagate into the Static MLP, causing the canonical geometry to drift in response to frame-specific motion rather than maintaining a time-invariant reference. To see this concretely, consider the deformed position at time t , defined as the additive composition $\mathbf{x}(t) = \mathbf{x}_{\text{can}} + \Delta \mathbf{x}(\mathbf{x}_{\text{can}}, t)$. Applying the chain rule to $\mathbf{x}_{\text{can}}$ yields

$$\frac{\partial \mathcal{L}}{\partial \mathbf{x}_{\text{can}}} = \frac{\partial \mathcal{L}}{\partial \mathbf{x}(t)} \cdot \underbrace{\left(\mathbf{I} + \frac{\partial \Delta \mathbf{x}}{\partial \mathbf{x}_{\text{can}}} \right)}_{\partial \mathbf{x}(t) / \partial \mathbf{x}_{\text{can}}} = \underbrace{\frac{\partial \mathcal{L}}{\partial \mathbf{x}(t)}}_{\text{reconstruction}} + \underbrace{\frac{\partial \mathcal{L}}{\partial \mathbf{x}(t)} \cdot \frac{\partial \Delta \mathbf{x}}{\partial \mathbf{x}_{\text{can}}}}_{\text{deformation}}, \quad (8)$$

where the first term is the direct photometric reconstruction gradient and the second term back-propagates through the DeformNet into the Static MLP via the shared variable $\mathbf{x}_{\text{can}}$. The latter term couples the two networks: it shifts $\mathbf{x}_{\text{can}}$ not only to reduce the photometric error but also to minimize the deformation $\Delta \mathbf{x}$ that the DeformNet must predict, which destabilizes the time-invariant reference. The stop-gradient operator replaces the DeformNet input with $\text{sg}(\mathbf{x}_{\text{can}})$, which is treated as a constant during back-propagation. This sets

$\partial \Delta \mathbf{x} / \partial \text{sg}(\mathbf{x}_{\text{can}}) = \mathbf{0}$ and eliminates the second term in Eq. (8):

$$\left. \frac{\partial \mathcal{L}}{\partial \mathbf{x}_{\text{can}}} \right|_{\text{w/ sg}} = \frac{\partial \mathcal{L}}{\partial \mathbf{x}(t)}, \quad (9)$$

so that the canonical scaffold receives only the photometric reconstruction signal. This decouples the optimization of the Static MLP from that of the DeformNet, ensuring that the canonical geometry remains a stable, time-invariant reference while the DeformNet independently learns per-frame deformations. This decoupling directly realizes the gradient isolation proposed in Sec. I: the stop-gradient operator severs the entangled gradient pathway between canonical geometry and the deformation network.

Deformed attributes. The final geometric attributes at time t are composed from canonical and temporal terms:

$$\begin{cases} \mathbf{x}(t) = \mathbf{x}_{\text{can}} + \Delta \mathbf{x}(t), \\ \mathbf{r}(t) = \mathbf{r}_{\text{can}} \otimes \Delta \mathbf{r}(t), \\ \mathbf{s}(t) = \exp(\boldsymbol{\rho}_{\text{can}} + \text{clip}(\Delta \boldsymbol{\rho}(t), -2, 2)). \end{cases} \quad (10)$$

where $\otimes$ denotes quaternion multiplication. The clipping and exponential operations are applied element-wise, ensuring positive scales for all $\Delta \boldsymbol{\rho} \in \mathbb{R}^3$.

D. Decoupled Appearance Model

The stop-gradient operator in Sec. III-C prevents deformation gradients from reaching canonical geometry, but it does not block a second source of interference: temporal photometric variations. In dynamic sequences, moving shadows, specular highlights, and exposure changes can be absorbed by the deformation field as spurious geometric offsets if appearance and geometry share the same gradient pathway. To close this remaining pathway, we decompose appearance into a time-invariant canonical branch and a regularized temporal residual branch.

Canonical View-MLP. A pair of time-independent heads predicts canonical color and a neural opacity score from the anchor feature and the viewing direction $\mathbf{v}$:

$$\mathbf{c}_{\text{can}} = \sigma(F_c(\mathbf{f}_a^{(i)}, \mathbf{v})), \quad o_{\text{can}} = \tanh(F_o(\mathbf{f}_a^{(i)}, \mathbf{v})). \quad (11)$$

Since F_c and F_o receive no temporal input, $\mathbf{c}_{\text{can}}$ and o_{can} can only represent time-invariant, view-dependent appearance. Any frame-specific photometric change (e.g., a shadow appearing at time t) cannot be explained by this branch and is therefore left to the residual branch described below. In particular, o_{can} is a neural opacity score rather than a directly normalized alpha value. It is predicted by this branch rather than the Static MLP, since the score is view-dependent and must remain decoupled from geometric attributes.

Appearance Residual Field. A lightweight time-conditioned MLP predicts bounded color and opacity-score residuals from the anchor feature and positional encoding of time [45]:

$$(\Delta \mathbf{c}(t), \Delta o(t)) = \eta \tanh(F_{\text{res}}(\mathbf{f}_a^{(i)}, \gamma(t))). \quad (12)$$

We set the residual scale to $\eta = 0.1$ to keep the temporal corrections small. The final color and opacity score are composed as

$$\begin{aligned} \mathbf{c}(t) &= \text{clip}(\mathbf{c}_{\text{can}} + \Delta \mathbf{c}(t), 0, 1), \\ o(t) &= o_{\text{can}} + \Delta o(t). \end{aligned} \quad (13)$$

Only Gaussians with $o_i(t) > 0$ are rendered; their effective per-pixel alpha follows the Gaussian kernel in Eq. (1) and is upper-bounded by 0.99 in the rasterizer. The residual branch absorbs frame-specific appearance changes, while $\mathcal{L}_{\text{res}}$ in Sec. III-E keeps it subordinate to the canonical appearance.

E. Training Objectives and Schedule

Loss function. The total training objective is:

$$\mathcal{L} = \mathcal{L}_{\text{pho}} + \lambda_1 \mathcal{L}_{\text{temp}} + \lambda_2 \mathcal{L}_{\text{def}} + \lambda_3 \mathcal{L}_{\text{res}}, \quad (14)$$

where $\mathcal{L}_{\text{pho}}$ is the photometric reconstruction loss combining ℓ_1 and D-SSIM terms [22]:

$$\mathcal{L}_{\text{pho}} = (1 - \lambda_{\text{ssim}}) \|\hat{C} - C\|_1 + \lambda_{\text{ssim}} \mathcal{L}_{\text{D-SSIM}}. \quad (15)$$

$\mathcal{L}_{\text{temp}}$ enforces temporal smoothness of position deformation trajectories by penalizing inter-frame positional offset discontinuities [16], [17], [28]:

$$\mathcal{L}_{\text{temp}} = \sum_t \|\Delta \mathbf{x}(t+1) - \Delta \mathbf{x}(t)\|_2^2. \quad (16)$$

$\mathcal{L}_{\text{def}}$ regularizes the magnitude of all geometric deformation offsets toward zero, biasing the representation toward the canonical state when photometric evidence is ambiguous:

$$\mathcal{L}_{\text{def}} = \|\Delta \mathbf{x}\|_2^2 + \|\Delta \mathbf{r}\|_2^2 + \|\Delta \boldsymbol{\rho}\|_2^2. \quad (17)$$

$\mathcal{L}_{\text{res}}$ penalizes large appearance residuals to keep the temporal branch subordinate to the canonical base:

$$\mathcal{L}_{\text{res}} = \|\Delta \mathbf{c}\|_2^2 + \|\Delta o\|_2^2. \quad (18)$$

Two-phase training schedule. (1) **Static warm-up** (iterations 1– T_w): only $\{\mathcal{A}_i\}$ and the Static MLP are optimized with the loss reduced to $\mathcal{L}_{\text{pho}}$, establishing a time-invariant geometric foundation that spans the full spatial extent of scene motion before temporal modules are introduced. (2) **Joint training** (iterations $T_w + 1$ onward): all modules are activated; the canonical scaffold receives gradients exclusively from $\mathcal{L}_{\text{pho}}$, and the stop-gradient operator in Eq. (7) ensures that the deformation pathway cannot perturb the canonical geometry.

The loss terms and training schedule together enforce independent optimization pathways for canonical geometry, motion, and appearance, resolving the gradient entanglement identified in Sec. I.

IV. EXPERIMENTS

A. Setup

Datasets. We evaluate our method on D-NeRF [37], comprising 8 scenes with complex non-rigid motions, and the real-world multi-view DG-Mesh [8], featuring dynamic captures under natural illumination variation.

TABLE I: Quantitative comparison on the synthetic D-NeRF dataset [37]. PSNR/SSIM/LPIPS are reported for all scenes; $\uparrow/\downarrow$ denote higher/lower is better. Cell colors indicate **best**, **second best**, and **third best** results.

Method	Hell Warrior			Mutant			Hook			Bouncing Balls		
	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
D-NeRF [37]	24.757	0.9537	0.0664	30.582	0.9609	0.0391	28.795	0.9544	0.0623	36.969	0.9860	0.0401
Tensor4D [46]	27.880	0.9718	0.0429	32.186	0.9720	0.0334	29.123	0.9598	0.0446	38.667	0.9924	0.0215
4D-GS [30]	28.785	0.9736	0.0361	37.819	0.9885	0.0157	33.006	0.9764	0.0263	41.020	0.9945	0.0143
D-3DGS [29]	32.092	0.9827	0.0271	38.124	0.9893	0.0166	34.972	0.9846	0.0195	42.767	0.9959	0.0110
SC-GS [31]	32.790	0.9859	0.0186	39.061	0.9942	0.0068	36.806	0.9903	0.0099	43.081	0.9959	0.0094
4D-Scaffold-GS [33]	33.111	0.9838	0.0184	39.507	0.9932	0.0072	35.801	0.9881	0.0150	42.697	0.9953	0.0195
MoDec-GS [34]	32.801	0.9816	0.0168	38.965	0.9906	0.0092	36.386	0.9890	0.0135	42.977	0.9949	0.0107
Ours	32.932	0.9875	0.0162	39.447	0.9945	0.0066	36.888	0.9913	0.0108	43.492	0.9956	0.0095

Method	Lego			T-Rex			Stand Up			Jumping Jacks		
	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
D-NeRF [37]	21.711	0.8470	0.1191	30.301	0.9638	0.0427	32.244	0.9766	0.0295	31.802	0.9727	0.0401
Tensor4D [46]	23.710	0.8954	0.0972	31.855	0.9776	0.0294	34.830	0.9843	0.0211	32.239	0.9781	0.0306
4D-GS [30]	25.078	0.9371	0.0583	34.388	0.9855	0.0207	38.272	0.9902	0.0131	35.337	0.9856	0.0197
D-3DGS [29]	24.834	0.9292	0.0668	37.014	0.9902	0.0172	39.873	0.9925	0.0117	36.828	0.9887	0.0169
SC-GS [31]	25.176	0.9437	0.0478	38.582	0.9930	0.0117	40.289	0.9955	0.0053	38.065	0.9925	0.0087
4D-Scaffold-GS [33]	25.215	0.9421	0.0424	38.360	0.9919	0.0135	38.560	0.9912	0.0102	35.520	0.9872	0.0180
MoDec-GS [34]	25.804	0.9451	0.0396	38.219	0.9916	0.0134	39.220	0.9906	0.0102	37.247	0.9875	0.0114
Ours	25.384	0.9425	0.0408	38.864	0.9947	0.0112	40.336	0.9957	0.0051	38.511	0.9952	0.0083

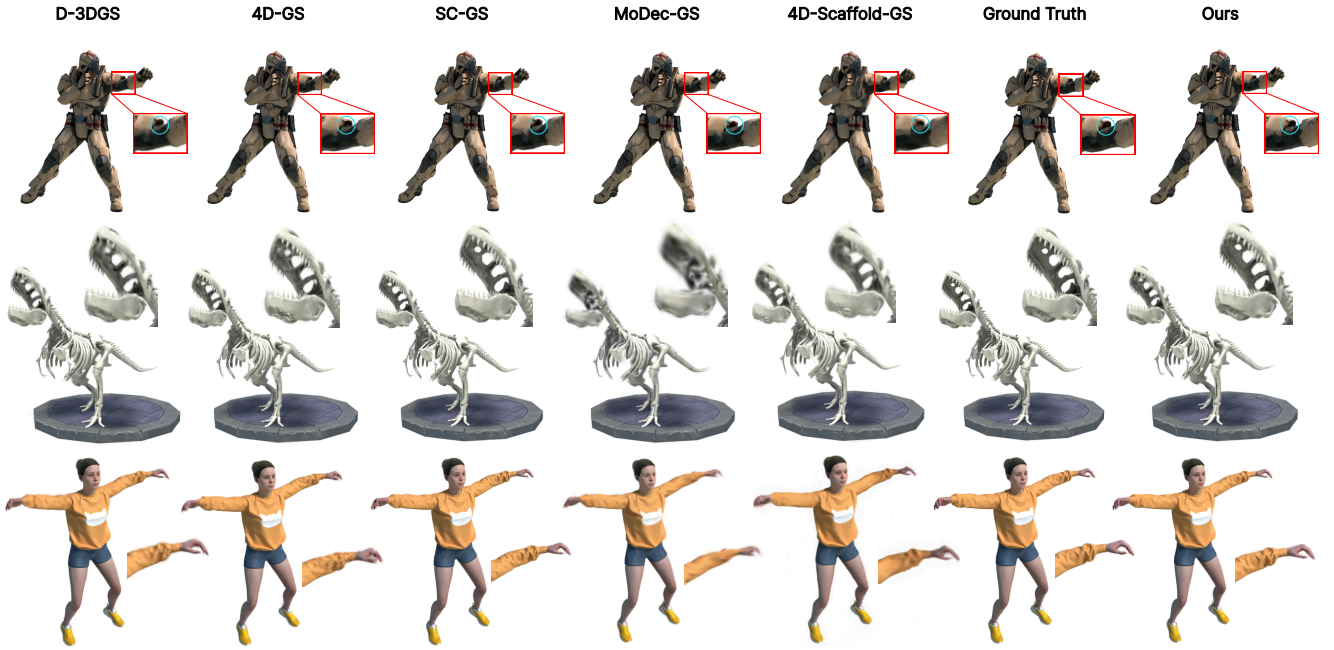


Fig. 5: **Qualitative comparison on the D-NeRF dataset [37].** GrainGS faithfully recovers fine-grained geometric details and sharp boundaries that competing methods blur or distort. Zoom in for best viewing.

Evaluation Metrics. We report PSNR, SSIM, LPIPS, rendering FPS, and total Gaussian count. All experiments run on a single NVIDIA RTX 4090.

Implementation Details. Total training: 30,000 iterations. Warm-up: $T_w = 3,000$. Child Gaussians per anchor: $k = 10$. Time encoding: sinusoidal positional encoding [45] with $L = 6$ frequencies. Loss weights: $\lambda_1 = 0.01$, $\lambda_2 = 0.001$, $\lambda_3 = 0.01$, $\lambda_{\text{ssim}} = 0.2$. Anchor-growing statistics start after 500 iterations, and anchor updates are performed every 100 iterations from iteration 1,500 to 20,000. Opacity-based pruning is disabled for the first 80% of the joint training phase to prevent premature removal of Gaussians whose deformation trajectories have not yet been estimated by the DeformNet.

B. Comparison with State-of-the-Art

We compare GrainGS against seven representative dynamic novel-view-synthesis methods spanning NeRF-based (D-NeRF [37], Tensor4D [46]), per-primitive Gaussian (4D-GS [30], Deformable-3DGS (D-3DGS) [29]), compact motion-decomposition (MoDec-GS [34]), and anchor-based Gaussian (SC-GS [31], 4D-Scaffold-GS [33]) paradigms.

1) **Quantitative Results: D-NeRF dataset [37].** Table I reports per-scene PSNR / SSIM / LPIPS. GrainGS ranks in the top three for all 24 metric entries across 8 scenes and ranks first or second in 22 entries, achieving a mean PSNR of 36.98 dB. It surpasses the strongest average baseline SC-GS (36.73 dB) by 0.25 dB and MoDec-GS (36.45 dB) by 0.53 dB.

TABLE II: Quantitative comparison on the real-world DG-Mesh dataset [8]. PSNR and LPIPS are reported for each scene; $\uparrow/\downarrow$ denote higher/lower is better. Cell colors indicate **best**, **second best**, and **third best** results.

Method	Beagle		Bird		Duck		Girlwalk		Horse		Torus2Sphere	
	PSNR $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	LPIPS $\downarrow$
D-NeRF [37]	36.705	0.0396	23.403	0.0739	31.857	0.0369	30.137	0.0247	29.653	0.0375	28.803	0.0922
Tensor4D [46]	37.073	0.0371	25.957	0.0502	33.575	0.0315	29.951	0.0234	30.538	0.0342	29.245	0.0876
4D-GS [30]	42.733	0.0208	26.308	0.0456	34.889	0.0242	33.876	0.0151	30.644	0.0339	30.056	0.0759
D-3DGS [29]	42.790	0.0212	27.290	0.0462	39.026	0.0134	35.512	0.0128	32.154	0.0302	29.823	0.0842
SC-GS [31]	44.067	0.0076	28.296	0.0300	39.792	0.0083	37.109	0.0065	33.358	0.0181	30.417	0.0704
4D-Scaffold-GS [33]	43.012	0.0122	27.792	0.0463	39.076	0.0098	36.242	0.0097	32.762	0.0194	29.932	0.0839
MoDec-GS [34]	42.036	0.0097	28.469	0.0371	38.765	0.0099	37.744	0.0095	33.616	0.0197	30.927	0.0728
Ours	44.433	0.0087	28.577	0.0325	39.800	0.0097	38.013	0.0091	33.794	0.0172	31.613	0.0657

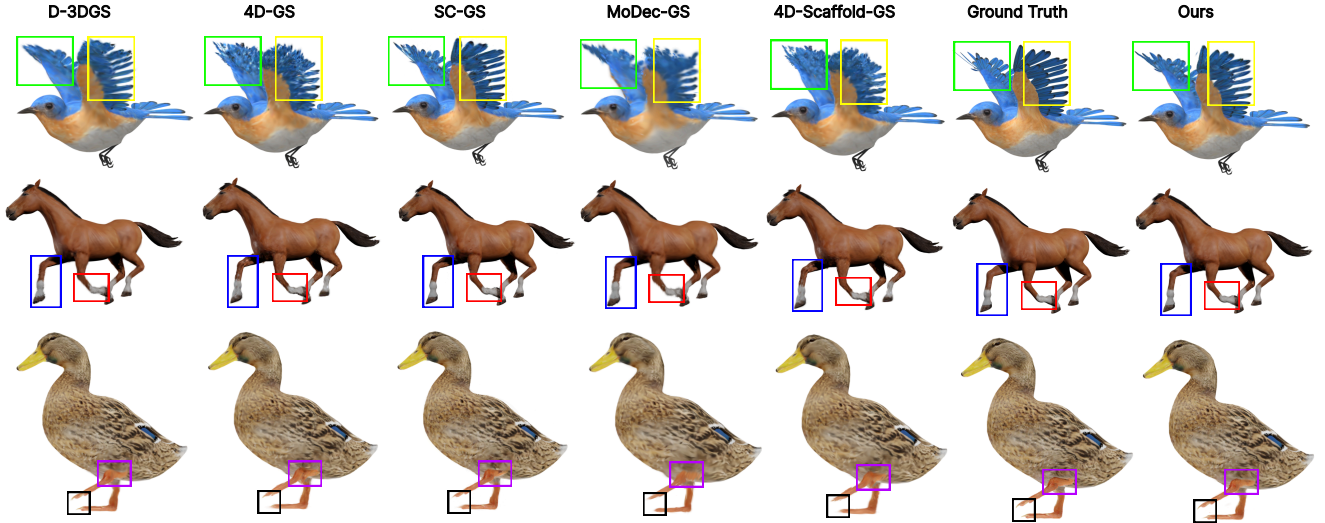


Fig. 6: **Qualitative comparison on the DG-Mesh dataset [8].** Across real-world dynamic scenes with non-rigid motion and illumination variation, GrainGS reconstructs cleaner object boundaries, more coherent local geometry, and temporally consistent appearance than competing methods. Zoomed regions highlight improvements in fine structures and texture continuity.

The advantage is most pronounced on scenes with complex localized dynamics: on *Jumping Jacks*, GrainGS achieves 38.51 dB versus 38.07 dB for SC-GS (+0.45 dB) and 36.83 dB for D-3DGS (+1.68 dB); on *Mutant*, GrainGS attains the best SSIM (0.9945) and LPIPS (0.0066) and is on par with 4D-Scaffold-GS in PSNR (39.45 vs. 39.51 dB). These scenes involve rapid limb articulation that demands per-Gaussian deformation granularity; the uniform deformation bias inherent in anchor-broadcast methods limits SC-GS, while the lack of structural priors in D-3DGS leads to geometric instability. On scenes with more regular object dynamics, MoDec-GS is particularly competitive on *Lego*; nevertheless, GrainGS remains among the top two on the average D-NeRF metrics and achieves the best LPIPS on the challenging articulated scenes *Mutant*, *T-Rex*, *Stand Up*, and *Jumping Jacks*.

DG-Mesh dataset [8]. Table II summarizes PSNR and LPIPS on the 6 real-world DG-Mesh scenes. GrainGS ranks first in PSNR across all 6 scenes, outperforming the strongest MoDec-GS baseline by 0.27 dB on *Girlwalk* (38.01 vs. 37.74 dB) and by 0.69 dB on *Torus2Sphere* (31.61 vs. 30.93 dB). On *Girlwalk* and *Horse*, where illumination variation is most pronounced, GrainGS outperforms all baselines in PSNR while maintaining competitive LPIPS; it achieves the best LPIPS on *Horse* and *Torus2Sphere*. This confirms the

effectiveness of the canonical-residual appearance decomposition: methods without temporal appearance modeling (e.g., D-3DGS [29], 4D-GS [30]) absorb lighting shifts as spurious geometric offsets, degrading perceptual quality.

Rendering efficiency. Table III reports average FPS and model storage across all D-NeRF scenes. GrainGS achieves 435.6 FPS, which is $1.4\times$ faster than D-3DGS (318.2 FPS) and $1.7\times$ faster than SC-GS (254.2 FPS). Against two recent compact dynamic methods, GrainGS renders $1.15\times$ faster than 4D-Scaffold-GS (379.4 FPS) and $1.29\times$ faster than MoDec-GS (337.6 FPS). The anchor-based scaffold constrains Gaussian placement to structurally meaningful locations, yielding a compact representation with a storage of only 4.67 MB, compared to 32.49 MB for SC-GS ($7.0\times$ reduction) and 23.68 MB for 4D-GS ($5.1\times$ reduction). It also remains $2.8\times$ and $3.5\times$ more compact than 4D-Scaffold-GS (13.30 MB) and MoDec-GS (16.40 MB), respectively. Notably, GrainGS achieves storage competitive with D-3DGS (6.62 MB) while delivering substantially higher PSNR.

Anchor growing visualization. Fig. 7 visualizes the adaptive anchor-growing process on the D-NeRF *Lego* scene. Early in training, anchors are concentrated around high-error regions with incomplete local support. As optimization proceeds, newly inserted anchors progressively cover fine object struc-

TABLE III: Average rendering speed (FPS) and model storage (MB) on the D-NeRF dataset [37], averaged over all eight scenes; $\uparrow/\downarrow$ indicate that higher/lower is better. The color of each cell means: **best**, **second best**, **third best**.

Method	FPS $\uparrow$	Storage (MB) $\downarrow$
4D-GS [30]	237.1	23.68
D-3DGS [29]	318.2	6.62
SC-GS [31]	254.2	32.49
MoDec-GS [34]	337.6	16.40
4D-Scaffold-GS [33]	379.4	13.30
Ours	435.6	4.67

tures and boundary regions, improving local reconstruction quality while avoiding uniform, scene-wide densification. The scaffold stabilizes by 20k iterations, consistent with the compact storage and high rendering speed reported in Table III.

2) *Qualitative Results*: Fig. 5 presents visual comparisons on three representative D-NeRF scenes. On *Hook* (row 1), the magnified region highlights the arm armor: GrainGS recovers fine-grained structural detail that closely matches the ground truth, while baselines produce over-smoothed or incomplete geometry. On *Jumping Jacks* (row 2), the inset focuses on finger regions, where GrainGS maintains clear contour structure without artifacts, whereas competing methods exhibit blurred or fragmented boundaries. On *T-Rex* (row 3), GrainGS reconstructs the dinosaur skeleton without generating spurious

geometric structures, and preserves sharp tooth detail at the edges that other methods render as blurred.

Fig. 6 shows comparisons on the DG-Mesh dataset [8]. On *Bird* (row 1), the magnified wing region shows that GrainGS produces sharper feather edges and more accurate color reproduction compared to baselines, which exhibit blurred boundaries and color deviation. On *Horse* (row 2), GrainGS renders more accurate shadow transitions and correct color continuity at the leg junctions, whereas other methods introduce shadow artifacts or unnatural color discontinuities. On *Duck* (row 3), GrainGS correctly reconstructs the foot-body junction; all baselines produce structural errors at this connection. These improvements stem from the canonical-residual appearance decomposition, which prevents temporal illumination variation from corrupting the geometric representation.

C. Ablation Study

We ablate each key component on the D-NeRF dataset [37] with all other hyperparameters held constant.

TABLE IV: Ablation of the stop-gradient mechanism on D-NeRF under otherwise identical settings.

Method	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
Full Model	36.982	0.9871	0.0136
w/o stop-grad	35.643	0.9812	0.0253

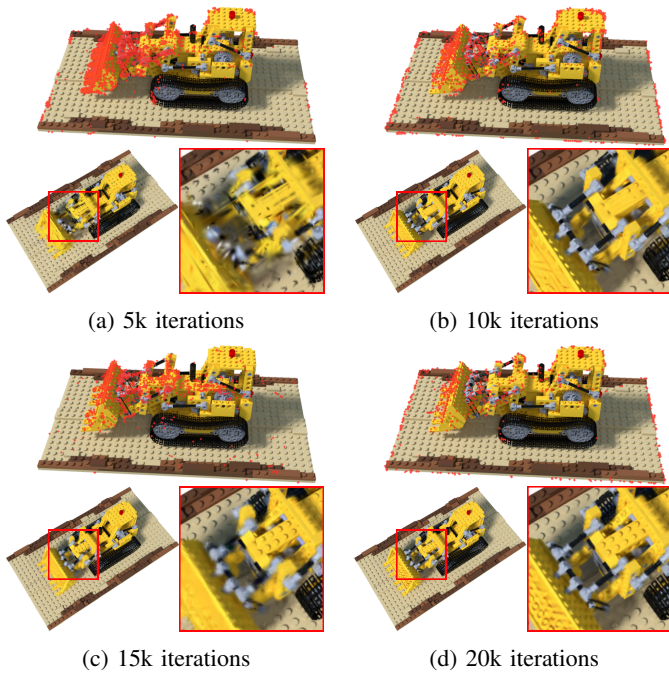


Fig. 7: **Visualization of adaptive anchor growing.** Red points denote grown anchors at different training iterations on the D-NeRF *Lego* scene. The scaffold progressively concentrates around geometrically informative regions, increasing local capacity where reconstruction remains difficult while preserving a compact anchor distribution.

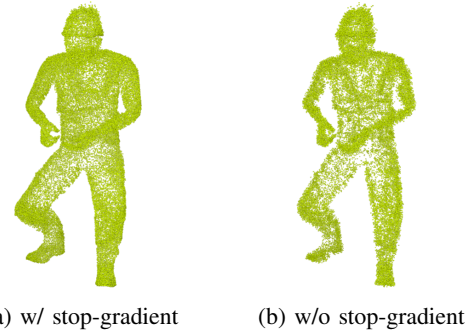


Fig. 8: **Visual effect of stop-gradient isolation.** With stop-gradient, the canonical scaffold produces uniform Gaussians; without it, deformation gradients corrupt the distribution.

Stop-gradient isolation produces the largest single improvement (+1.34 dB, Table IV). Without the stop-gradient operator, deformation gradients propagate into the canonical scaffold, causing the Static MLP to absorb frame-specific motion as permanent geometric distortion. Fig. 8 confirms this effect: with the stop-gradient operator (a), the canonical scaffold produces spatially uniform Gaussian distributions that faithfully cover the object geometry; without it (b), gradient entanglement disrupts the static structure, yielding irregular point distributions concentrated in high-motion regions. This result confirms the gradient-entanglement hypothesis (Sec. I) and demonstrates that explicit gradient isolation is necessary for maintaining a stable canonical reference.

Loss components. Table V ablates the three regularization terms, and Fig. 9 shows the corresponding visual results. The

Full Model (a) produces the sharpest rendering. Removing $\mathcal{L}_{\text{temp}}$ ((b), -0.77 dB) allows temporally discontinuous deformation trajectories, producing significant blurring across the rendered image. Removing $\mathcal{L}_{\text{def}}$ ((c), -0.52 dB) permits unconstrained offset magnitudes; the result exhibits noticeable blurring in fine structural details, though less severe than (b). Removing $\mathcal{L}_{\text{res}}$ ((d), -0.34 dB) allows the appearance residual branch to override the canonical base, introducing slight blurring in the output.

TABLE V: Ablation of loss components on D-NeRF, showing effects on reconstruction quality under identical settings

Method	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
Full Model	36.982	0.9871	0.0136
w/o $\mathcal{L}_{\text{temp}}$	36.214	0.9829	0.0167
w/o $\mathcal{L}_{\text{def}}$	36.461	0.9856	0.0154
w/o $\mathcal{L}_{\text{res}}$	36.647	0.9861	0.0148

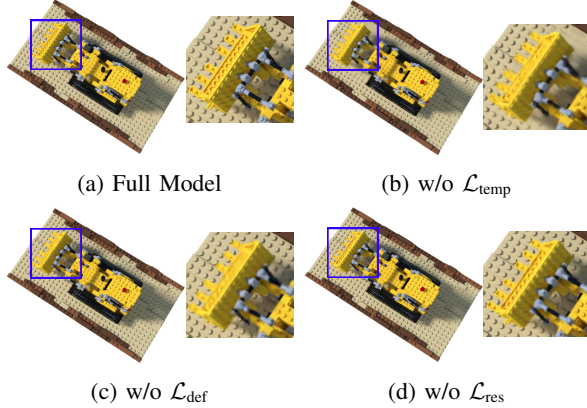


Fig. 9: **Ablation: loss components.** Removing regularization terms leads to progressively degraded quality.

Architecture components. Table VI and Fig. 10 isolate each architectural module. Collapsing Static MLP and DeformNet into a Single MLP (b) (-0.78 dB) removes the canonical-temporal separation, causing edge blurring. Removing the residual branch (c) (-0.47 dB) forces illumination variation into canonical geometry, producing blurring in fine-grained regions. Removing the canonical branch (d) (-1.15 dB) yields the largest drop, as the model loses its time-invariant reference and must reconstruct geometry and motion simultaneously.

TABLE VI: Ablation of architecture components on D-NeRF, showing their individual contributions to reconstruction quality under identical settings

Method	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
Full Model	36.982	0.9871	0.0136
Single MLP	36.201	0.9836	0.0198
w/o Residual	36.512	0.9854	0.0162
w/o Canonical	35.834	0.9812	0.0221

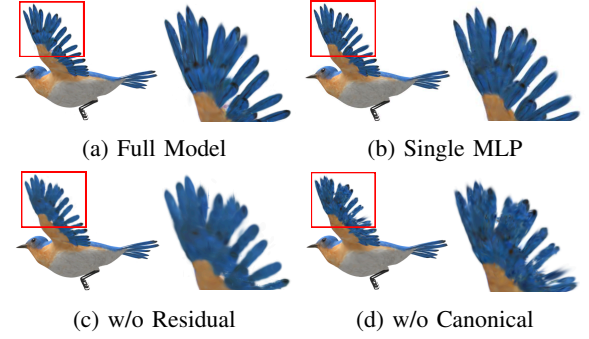


Fig. 10: **Ablation: architecture components.** Removing or simplifying modules leads to degraded quality.

V. CONCLUSION

We presented GrainGS, a dynamic 3D Gaussian Splatting framework that reduces gradient interference between canonical geometry and temporal deformation. By combining static warm-up and stop-gradient isolation, GrainGS preserves a more stable canonical reference, while per-Gaussian deformation captures fine-grained local motion within a compact anchor scaffold. The canonical-residual appearance decomposition further provides explicit capacity for temporal photometric variations, reducing their interference with geometric motion modeling. Extensive experiments on D-NeRF and DG-Mesh demonstrate that GrainGS achieves competitive SOTA reconstruction quality while maintaining real-time rendering and compact model storage.

REFERENCES

- [1] T. Li, M. Slavcheva, M. Zollhoefer, S. Green, C. Lassner, C. Kim, T. Schmidt, S. Lovegrove, M. Goesele, R. Newcombe, and Z. Lv, "Neural 3D Video Synthesis from Multi-view Video," in *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2022, pp. 5511–5521.
- [2] S. Guo, J. Hu, K. Zhou, J. Wang, L. Song, R. Xie, and W. Zhang, "Real-Time Free Viewpoint Video Synthesis System Based on DIBR and a Depth Estimation Network," *IEEE Transactions on Multimedia*, vol. 26, pp. 6701–6716, 2024.
- [3] B. Liu, J. Lei, B. Peng, Z. Zhang, J. Zhu, and Q. Huang, "Advancing Generalizable Occlusion Modeling for Neural Human Radiance Field," *IEEE Transactions on Multimedia*, vol. 27, pp. 1362–1373, 2025.
- [4] Y. Jiang, J. Li, H. Qin, Y. Dai, J. Liu, G. Zhang, C. Zhang, and T. Yang, "GS-SFS: Joint Gaussian Splatting and Shape-From-Silhouette for Multiple Human Reconstruction in Large-Scale Sports Scenes," *IEEE Transactions on Multimedia*, vol. 26, pp. 11 095–11 110, 2024.
- [5] J.-Y. Shin, J.-K. Lee, G. Bang, J.-S. Kim, and J.-W. Kang, "Neural Volumetric Video Coding With Hierarchical Coded Representation of Dynamic Volume," *IEEE Transactions on Multimedia*, vol. 27, pp. 4412–4426, 2025.
- [6] S. Peng, Y. Zhang, Y. Xu, Q. Wang, Q. Shuai, H. Bao, and X. Zhou, "Neural Body: Implicit Neural Representations with Structured Latent Codes for Novel View Synthesis of Dynamic Humans," in *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2021, pp. 9050–9059.
- [7] Z. Xu, S. Peng, H. Lin, G. He, J. Sun, Y. Shen, H. Bao, and X. Zhou, "4K4D: Real-Time 4D View Synthesis at 4K Resolution," in *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2024, pp. 20 029–20 040.
- [8] I. Liu, H. Su, and X. Wang, "Dynamic Gaussians Mesh: Consistent Mesh Reconstruction from Dynamic Scenes," in *The Thirteenth International Conference on Learning Representations (ICLR)*, 2025. [Online]. Available: <https://openreview.net/forum?id=LuGHbK8qTa>

- [9] H. Gao, R. Li, S. Tulsiani, B. Russell, and A. Kanazawa, "Monocular Dynamic View Synthesis: A Reality Check," in *Advances in Neural Information Processing Systems*, vol. 35. Curran Associates, Inc., 2022, pp. 33 768–33 780.
- [10] B. Mildenhall, P. P. Srinivasan, M. Tancik, J. T. Barron, R. Ramamoorthi, and R. Ng, "NeRF: Representing Scenes as Neural Radiance Fields for View Synthesis," in *Computer Vision - ECCV 2020*, ser. Lecture Notes in Computer Science. Springer International Publishing, 2020, pp. 405–421.
- [11] B. Mildenhall, P. P. Srinivasan, R. Ortiz-Cayon, N. K. Kalantari, R. Ramamoorthi, R. Ng, and A. Kar, "Local light field fusion: practical view synthesis with prescriptive sampling guidelines," *ACM Transactions on Graphics*, vol. 38, no. 4, pp. 1–14, 2019.
- [12] H. Fu, X. Yu, L. Li, and L. Zhang, "CBARF: Cascaded Bundle-Adjusting Neural Radiance Fields From Imperfect Camera Poses," *IEEE Transactions on Multimedia*, vol. 26, pp. 9304–9315, 2024.
- [13] Y. Zhao, G. Chen, B. Wu, Q. Jin, and T. Zeng, "Msa-Splatting: Multi-Scale Adaptive Gaussian Splatting for High-Fidelity View Synthesis," *IEEE Transactions on Multimedia*, vol. 28, pp. 5357–5367, 2026.
- [14] D. Verbin, P. Hedman, B. Mildenhall, T. Zickler, J. T. Barron, and P. P. Srinivasan, "Ref-NeRF: Structured View-Dependent Appearance for Neural Radiance Fields," in *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2022, pp. 5481–5490.
- [15] Z. Huang, M. Xu, and S. Perry, "StructGS: Adaptive Spherical Harmonics and Rendering Enhancements for Superior 3D Gaussian Splatting," *IEEE Transactions on Multimedia*, vol. 28, pp. 1499–1510, 2026.
- [16] K. Park, U. Sinha, J. T. Barron, S. Bouaziz, D. B. Goldman, S. M. Seitz, and R. Martin-Brualla, "Nerfies: Deformable Neural Radiance Fields," in *2021 IEEE/CVF International Conference on Computer Vision (ICCV)*. IEEE, 2021, pp. 5845–5854.
- [17] Z. Li, S. Niklaus, N. Snavely, and O. Wang, "Neural Scene Flow Fields for Space-Time View Synthesis of Dynamic Scenes," in *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2021, pp. 6494–6504.
- [18] K. Park, U. Sinha, P. Hedman, J. T. Barron, S. Bouaziz, D. B. Goldman, R. Martin-Brualla, and S. M. Seitz, "HyperNeRF: a higher-dimensional representation for topologically varying neural radiance fields," *ACM Transactions on Graphics*, vol. 40, no. 6, pp. 1–12, 2021.
- [19] Y. Chen, L. Zhang, S. Zhao, and Y. Zhou, "ATM-NeRF: Accelerating Training for NeRF Rendering on Mobile Devices via Geometric Regularization," *IEEE Transactions on Multimedia*, vol. 27, pp. 3279–3293, 2025.
- [20] Y.-L. Liu, C. Gao, A. Meuleman, H.-Y. Tseng, A. Saraf, C. Kim, Y.-Y. Chuang, J. Kopf, and J.-B. Huang, "Robust Dynamic Radiance Fields," in *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2023, pp. 13–23.
- [21] L. Song, A. Chen, Z. Li, Z. Chen, L. Chen, J. Yuan, Y. Xu, and A. Geiger, "NeRFPlayer: A Streamable Dynamic Scene Representation with Decomposed Neural Radiance Fields," *IEEE Transactions on Visualization and Computer Graphics*, vol. 29, no. 5, pp. 2732–2742, 2023.
- [22] B. Kerbl, G. Kopanas, T. Leimkuehler, and G. Drettakis, "3D Gaussian Splatting for Real-Time Radiance Field Rendering," *ACM Transactions on Graphics*, vol. 42, no. 4, pp. 1–14, 2023.
- [23] C. Lassner and M. Zollhofer, "Pulsar: Efficient Sphere-based Neural Rendering," in *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2021, pp. 1440–1449.
- [24] M. Zwicker, H. Pfister, J. van Baar, and M. Gross, "Surface splatting," in *Proceedings of the 28th annual conference on Computer graphics and interactive techniques*. ACM, 2001, pp. 371–378.
- [25] —, "EWA splatting," *IEEE Transactions on Visualization and Computer Graphics*, vol. 8, no. 3, pp. 223–238, 2002.
- [26] L. Ren, H. Pfister, and M. Zwicker, "Object Space EWA Surface Splatting: A Hardware Accelerated Approach to High Quality Point Rendering," *Computer Graphics Forum*, vol. 21, no. 3, pp. 461–470, 2002.
- [27] J. Luiten, G. Kopanas, B. Leibe, and D. Ramanan, "Dynamic 3D Gaussians: Tracking by Persistent Dynamic View Synthesis," in *2024 International Conference on 3D Vision (3DV)*. IEEE, 2024, pp. 800–809.
- [28] Y. Lin, Z. Dai, S. Zhu, and Y. Yao, "Gaussian-Flow: 4D Reconstruction with Dynamic 3D Gaussian Particle," in *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2024, pp. 21 136–21 145.
- [29] Z. Yang, X. Gao, W. Zhou, S. Jiao, Y. Zhang, and X. Jin, "Deformable 3D Gaussians for High-Fidelity Monocular Dynamic Scene Reconstruction," in *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2024, pp. 20 331–20 341.
- [30] G. Wu, T. Yi, J. Fang, L. Xie, X. Zhang, W. Wei, W. Liu, Q. Tian, and X. Wang, "4D Gaussian Splatting for Real-Time Dynamic Scene Rendering," in *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2024, pp. 20 310–20 320.
- [31] Y.-H. Huang, Y.-T. Sun, Z. Yang, X. Lyu, Y.-P. Cao, and X. Qi, "SC-GS: Sparse-Controlled Gaussian Splatting for Editable Dynamic Scenes," in *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2024, pp. 4220–4230.
- [32] Y. Yan, H. Lin, C. Zhou, W. Wang, H. Sun, K. Zhan, X. Lang, X. Zhou, and S. Peng, "Street Gaussians: Modeling Dynamic Urban Scenes with Gaussian Splatting," in *Computer Vision - ECCV 2024*, ser. Lecture Notes in Computer Science. Springer Nature Switzerland, 2025, pp. 156–173.
- [33] W. O. Cho, I. Cho, S. Kim, J. Bae, Y. Uh, and S. J. Kim, "4D Scaffold Gaussian Splatting with Dynamic-Aware Anchor Growing for Efficient and High-Fidelity Dynamic Scene Reconstruction," in *Proceedings of the AAAI Conference on Artificial Intelligence*, vol. 40, no. 5, 2026, pp. 3363–3371.
- [34] S. Kwak, J. Kim, J. Y. Jeong, W.-S. Cheong, J. Oh, and M. Kim, "MoDec-GS: Global-to-Local Motion Decomposition and Temporal Interval Adjustment for Compact Dynamic 3D Gaussian Splatting," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2025, pp. 11 338–11 348.
- [35] T. Lu, M. Yu, L. Xu, Y. Xiangli, L. Wang, D. Lin, and B. Dai, "Scaffold-GS: Structured 3D Gaussians for View-Adaptive Rendering," in *2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2024, pp. 20 654–20 664.
- [36] K. Ren, L. Jiang, T. Lu, M. Yu, L. Xu, Z. Ni, and B. Dai, "Octree-GS: Towards Consistent Real-time Rendering with LOD-Structured 3D Gaussians," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, pp. 1–15, 2025.
- [37] A. Pumarola, E. Corona, G. Pons-Moll, and F. Moreno-Noguer, "D-NeRF: Neural Radiance Fields for Dynamic Scenes," in *2021 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2021, pp. 10 313–10 322.
- [38] T. Müller, A. Evans, C. Schied, and A. Keller, "Instant Neural Graphics Primitives with a Multiresolution Hash Encoding," *ACM Transactions on Graphics*, vol. 41, no. 4, pp. 1–15, 2022.
- [39] J. Fang, T. Yi, X. Wang, L. Xie, X. Zhang, W. Liu, M. Nießner, and Q. Tian, "Fast Dynamic Radiance Fields with Time-Aware Neural Voxels," in *SIGGRAPH Asia 2022 Conference Papers*. ACM, 2022, pp. 1–9.
- [40] A. Cao and J. Johnson, "HexPlane: A Fast Representation for Dynamic Scenes," in *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2023, pp. 130–141.
- [41] S. Fridovich-Keil, G. Meanti, F. R. Warburg, B. Recht, and A. Kanazawa, "K-Planes: Explicit Radiance Fields in Space, Time, and Appearance," in *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2023, pp. 12 479–12 488.
- [42] Z. Yang, H. Yang, Z. Pan, and L. Zhang, "Real-time Photorealistic Dynamic Scene Representation and Rendering with 4D Gaussian Splatting," in *The Twelfth International Conference on Learning Representations (ICLR)*, 2024. [Online]. Available: <https://openreview.net/forum?id=WhgB5sispV>
- [43] R. A. Newcombe, D. Fox, and S. M. Seitz, "DynamicFusion: Reconstruction and Tracking of Non-rigid Scenes in Real-Time," in *2015 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2015, pp. 343–352.
- [44] M. Innmann, M. Zollhöfer, M. Nießner, C. Theobalt, and M. Stamminger, "VolumeDeform: Real-Time Volumetric Non-rigid Reconstruction," in *Computer Vision - ECCV 2016*, ser. Lecture Notes in Computer Science. Springer International Publishing, 2016, pp. 362–379.
- [45] M. Tancik, P. P. Srinivasan, B. Mildenhall, S. Fridovich-Keil, N. Raghuvaran, U. Singhal, R. Ramamoorthi, J. T. Barron, and R. Ng, "Fourier Features Let Networks Learn High Frequency Functions in Low Dimensional Domains," in *Advances in Neural Information Processing Systems*, vol. 33, 2020, pp. 7537–7547.
- [46] R. Shao, Z. Zheng, H. Tu, B. Liu, H. Zhang, and Y. Liu, "Tensor4D: Efficient Neural 4D Decomposition for High-Fidelity Dynamic Reconstruction and Rendering," in *2023 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*. IEEE, 2023, pp. 16 632–16 642.