

STiTch: Semantic Transition and Transportation in Collaboration for Training-Free Zero-Shot Composed Image Retrieval

Miaoge Li^{1†}, Dongsheng Wang^{2*}, Zening Sun^{2†}, Jinsen Zhang², Wenhan Luo³, Jingcai Guo^{1*}

¹Department of COMP/LSGI, The Hong Kong Polytechnic University, Hong Kong SAR

²College of Computer Science and Software Engineering, Shenzhen University, Shenzhen, China

³The Hong Kong University of Science and Technology, Hong Kong SAR

jc-jingcai.guo@polyu.edu.hk

Abstract

Training-free zero-shot composed image retrieval models are recently gaining increasing research interest due to their generalizability and flexibility in unseen multimodal retrieval. Recent LLM-based advances focus on generating the expected target caption by exploring the compositional ability behind the LLMs. Although efficient, we find that 1) the generated captions tend to introduce unexpected features from the reference image due to the semantic gap between the input image and text modification, where the image contains much more details than the text; 2) the point-to-point alignment during the retrieval stage fails to capture diverse compositions. To address these challenges, we introduce a novel Semantic Transition and Transportation in collaboration framework for training-free zero-shot CIR tasks. Specifically, given the composed caption inferred by an LLM, we aim to refine it through a transition vector in the embedding space and make it closer to the target image. Combining LLMs with user instruction, the refined caption concentrates more on the core modification intent and thus filters out unnecessary noise. Moreover, to explore diverse alignment during the retrieval stage, we model the caption and image as discrete distributions and reformulate the retrieval task as a set-to-set alignment task. Finally, a bidirectional transportation distance is developed to consider fine-grained alignments across modalities and calculate the retrieval score. Extensive experiments demonstrate that our method can be general, effective, and beneficial for many CIR tasks.

1. Introduction

Composed Image Retrieval (CIR) aims to search for a target image using a compositional query of a reference image and text modification [2, 7, 15, 19, 40]. One of the key challenges is to model the multimodal relationship of the triplet:

$\langle \text{reference image}, \text{text modification}, \text{target image} \rangle$. Previous studies have focused on fusing the input image and modifications within a shared embedding space in a supervised manner [1, 10, 40]. Generally, these models typically rely on expensive manually-annotated triplets and often exhibit suboptimal performance in unseen scenarios [3, 17]. Motivated by the success of textual inversion in image generation [11, 28, 42], recent studies have proposed Zero-Shot Composed Image Retrieval (ZS-CIR) [16, 32, 46]. These models focus on training a mapping network to convert the reference image into continuous textual embeddings and then merge them with text modifications using static templates for target captions, enabling CIR without explicit supervision. Unfortunately, these models also need image-caption pairs to learn the mapping parameters, and the mismatch between textual inversion and CIR may hamper their ability to accurately infer the implicit user intent conveyed in the text modification.

Alternatively, training-free approaches paired with foundation models can achieve effective CIR without additional training and offer improved reasoning capabilities [17, 36]. There are mainly two directions: two-stage methods typically require an image captioner and an LLM to first generate detailed captions of the reference image and then fuse them with text modification via an LLM to produce the target descriptions; one-stage methods unify this process by employing an MLLM to directly output the target captions given the multimodal queries. Despite considerable progress, several challenges remain. First, the above generation-then-retrieval pipeline is prone to *Extraneous Cognitive Load* [33]. Specifically, the reference image may trigger information leakage, which in turn leads to overemphasis on irrelevant details, affecting the retrieval performance. As shown in Fig.1, the target caption generated by MLLMs includes extraneous elements such as “red jacket and sunglasses”, which are unrelated to the textual modification. Therefore, distracting from the core intent, it diminishes the ability to identify key

*Corresponding authors. †Equal contribution.

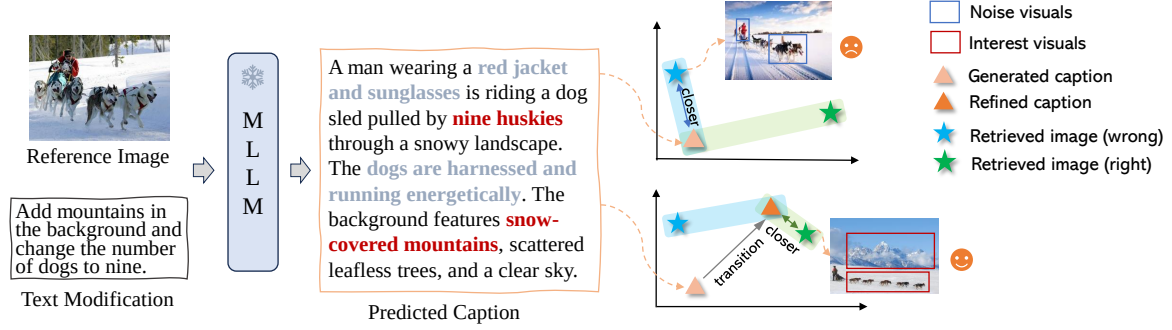


Figure 1. Motivation of our proposed model. Predicted captions from MLLMs typically consist of expected ground-truth sentences (red words) and unexpected visual details (gray words).

information, such as “snow-covered mountains”. Second, most existing models generate either a single description or simply average multiple descriptions to obtain the final representation [36, 44]. However, as one image is worth a thousand words, such point-to-point alignment focuses on partial features and fails to capture complex relations. This inherent heterogeneity between visual and textual representations inevitably leads to semantic imbalance across modalities, leading to suboptimal retrieval prediction [4, 41, 51].

To address the above issues, we propose STiTch, a novel one-stage, training-free framework that improves the existing generation-then-retrieval pipeline by introducing **S**emantic **T**ransition and **T**ransportation in collaboration framework for zero-shot CIR tasks. Like previous works [36], we explore the in-context learning of MLLMs and directly query an MLLM to generate the target caption given the reference image and text modification. Importantly, to address the above asymmetry issues, STiTch utilizes the uncertainty ability of the language decoder and views the description as a discrete distribution by generating multiple candidates. Each candidate in the distribution focuses on a specific composition pattern, and they together provide a comprehensive understanding of the given query input.

Since reference images may inevitably introduce irrelevant information into captions generated by MLLMs, we propose guiding the textual caption toward the target image via a transition vector in the embedding space (as seen in Fig. 1). Intuitively, an ideal transition vector should bridge the semantic gap between the generated caption and the target image. Here, we aim to solve it in a training-free manner and estimate the transition vector by feeding the text modification into the CLIP text encoder. For one thing, since both the text modification and the generated caption share the same modality, the former can seamlessly refine the latter without introducing a modality gap or requiring extra parameters. For another, the text modification encapsulates the incremental, high-quality, and dense information that shifts from the reference image to the target image, guiding the model to refocus on core semantic information. This

transition operates directly in the embedding space—simple yet efficient—and ensures that the final target caption retains diversity while reducing distortion, all of which is highly relevant and beneficial to the retrieval process.

After obtaining high-quality and diverse features of target captions, it is crucial to align them more effectively with the target images in the embedding space. Similar to the textual domain, STiTch models each target image as a discrete distribution through multiple augmentations, where each captures local visuals of the target image. Together, these augmentations provide a rich visual representation from the visual domain, facilitating fine-grained alignments in the retrieval process. Finally, a novel bidirectional transportation distance is further developed to calculate the similarity of two discrete distributions across the vision-language modalities. Specifically, given the cost matrix that measures the transport cost between the captions and image augmentation, STiTch designs both a forward path and a backward path to calculate the transportation distance from the caption set to the target image set and that from the target image set back to the caption set, respectively. This formulation effectively uncovers fine-grained cross-modal correlations by minimizing the bidirectional transport cost between modalities.

The main contributions can be summarized as follows:

- We propose a novel one-stage, training-free framework that considers both semantic transition and transportation collaboratively for ZS-CIR. By introducing the modification-driven transition to the generated caption, the feature drift caused by additional irrelevant noise is compensated in the embedding space.
- We elegantly transform the retrieval procedure into a bidirectional transport problem. Explicitly explore fine-grained alignments between diverse refined textual captions and enhanced target images.
- Extensive comparisons and ablations on four benchmarks demonstrate the effectiveness of the proposed STiTch with competitive performance in all settings.

2. Related Work

2.1. Composed Image Retrieval

Composed Image Retrieval (CIR) has inspired various architectural innovations [7, 19, 40]. Early methods adopt a fusion paradigm to learn joint embeddings of reference image and modification features via contrastive or attention-based objectives [1, 6]. Some recent works train large-scale retrieval models on millions of web-mined triplets [47], but reliance on supervision limits scalability. To address this, Zero-Shot CIR (ZS-CIR) enables retrieval without labeled data [35]. For example, Pic2Word [1] projects image features into a token embedding space, while SEARLE [3] improves alignment via a text inversion network. Another line of work generates synthetic triplets from image-caption pairs using generative models [12].

With the advent of foundation models, recent studies have tackled CIR in a training-free manner, leveraging their strong contextual understanding. Two main paradigms have emerged: two-stage methods performs reference image captioning and text manipulation separately, while one-stage methods generate target captions directly from multimodal inputs. For example, CIReVL [17] initially employs pre-trained captioning models [20] to generate caption for a given image. Subsequently, it queries an LLM to refine and recompose the caption based on text modifications for text-to-image retrieval. LDRE [45] considers diverse semantics of the CIR and generates diverse captions at the first stage, and then adopts an ensemble strategy to get the final single feature for the multiple captions. OSrCIR [36] uses MLLMs to infer user intent by directly processing a query pair, guided by a reflective chain-of-thought prompt. However, both are overwhelmed by the rich semantic information from the reference image, which may overshadow the key modifications. Different from existing LLM-based methods, our STiTch aims to refine the captions after the generation and improve semantic alignments by formulating the retrieval task as the bidirectional transportation problem.

2.2. Alignment via Transport Distance

Recently, Optimal Transport (OT) [39] has been widely used for aligning distributions in various domains [5, 18, 31, 41, 48, 48, 50]. Unlike traditional distance metrics like Euclidean distance, OT provides a more geometrically nuanced measure that captures structural similarities between distributions. However, it typically requires iterative optimization via the Sinkhorn algorithm [9], which can be time-consuming. To this end, Conditional Transport (CT) considers the transport plan based on the semantic similarity between samples from two distributions bidirectionally [49]. Its flexibility allows seamless integration with deep learning frameworks, offering lower computational complexity and better scalability, resulting in superior performance in recent

alignment tasks [21, 22, 26]. For instance, [37] exploits transferable statistics with CT to refine biased prototypes to capture unbiased statistics within imbalanced query samples. [21] design a sparse and layer-wise CT framework to enhance interactions between visual patches and textual labels, ensuring higher semantic consistency for multi-label classification. Notably, CT is inherently well-suited for a key step in CIR—aligning multiple captions with target images—especially when multimodal representations are involved. Motivated by this potential, we transform the traditional point-to-point similarity measure into a minimization of CT-based distance from a distributional perspective.

3. Method

Preliminaries. Let us denote (x, m, y) as the CIR triplet $\langle \text{reference image}, \text{text modification}, \text{target image} \rangle$, respectively. The first two are multimodal inputs from users describing their retrieval intent. Training-free ZS-CIR aims to search a target image y from an image database $Y = \{y_n\}_{n=1}^N$ that satisfies the semantic consistency with both x and m , without requiring additional training. Generally, existing approaches follow a generation-then-retrieval pipeline to make the final prediction. They first feed the reference image x and text modification m into a fusing model (such as an MLLM) to obtain the composed description of the target image, denoted as $t = \text{MLLM}(x, m)$. The retrieval score is then calculated by CLIP similarity:

$$p(y = i | x, m) = \frac{\exp(-\text{dis}(\mathbf{t}, \mathbf{y}_i) / \tau)}{\sum_{n=1}^N \exp(-\text{dis}(\mathbf{t}, \mathbf{y}_n) / \tau)}, \quad (1)$$

where $\mathbf{t} \in R^d$ and $\mathbf{y} \in R^d$ are the latent features of t and y in CLIP space, with d denotes the embedding dimension. dis is the distance function and τ is the temperature parameter. $\mathbf{t}$ in Eq. 1 can be viewed as prototypes that capture reasonable visual features of y . To find the optimal $\mathbf{t}$, recent LLM-based models develop various attempts, including two-stage generation and chain-of-thought reasoning [24, 36, 45].

Despite their promising results, We find that 1) the generated description $\mathbf{t}$ usually inherits the unnecessary details from the reference image, leading to suboptimal prototype learning; 2) The point estimation of $\mathbf{t}$ fails to model complex composed relations, this may limit the uncertainty of $\mathbf{t}$ and diminish the generalizability.

3.1. Semantic Transition and Transportation

Starting from Eq. 1, we propose a novel training-free ZS-CIR framework to solve the mentioned shortcomings, as illustrated in Fig. 2. Specifically, our proposed model consists of three modules: Querying, Transition, and Alignment. Unlike previous point estimation of $\mathbf{t}$, STiTch views the composed prototype as a discrete distribution, e.g., P_t , over the caption space. This allows P_t to focus on various possible target

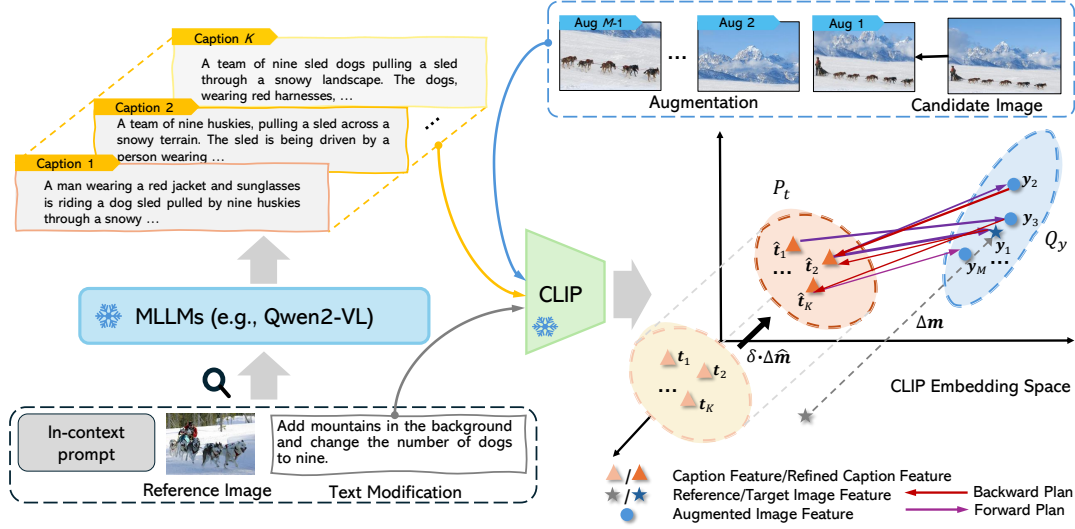


Figure 2. The overall framework of our method. STiTCh first queries MLLMs to generate multiple captions and then refines them towards the target image via the transition vector in the embedding space. Subsequently, the refined captions and augmented target images are modeled as discrete distributions, enabling fine-grained set-to-set alignment via bidirectional transportation.

captions, showing higher diversity. To alleviate the issues of unnecessary information pollution, we further transfer the obtained t using the text modification m in the embedding space. m contains high-quality relative information linking the reference image to its target image. Thus, a simple combination strategy is developed to push t to its target image, resulting in more precise t . Finally, we also view the target image as a discrete distribution and develop a bidirectional transportation distance to align the composed prototypes and target images for fine-grained retrieval.

Querying. As discussed above, one of the core challenges is to generate reasonable captions t for image y . Inspired by previous works [20, 23], STiTCh aims to solve this with MLLMs due to their impressive performance in image-text understanding. More specifically, here we explore the in-context learning of MLLM and complete the prompt template: “<in-context prompt>. < x >. Instruction:< m >. Edited Description:”. Where <in-context prompt> helps MLLMs understand the CIR task and output the expected target descriptions. < x >, < m > are the placeholder of the reference image and text modification.

Intuitively, there are likely several plausible t for each x and m pair, they describe the same target image from different views, To simulate such an ability, we explore the uncertainty generation of MLLMs via sampling from the language model’s decoder, to replace the naive greedy decoding used in previous single target description generations. Formally, we combine the top-k and top-p sampling strategy in [14] and collect K possible target description t with a discrete distribution:

$$P_t = \frac{1}{K} \sum_{k=1}^K \delta_{t_k}, \quad (2)$$

where δ_t refers to a point mass located at coordinate t , and t_k denotes the text embedding of k -th generated description. P_t can be viewed as a semantic set containing K reasonable descriptions, and it thus considers diverse visual features of the target image.

Semantic Transition. Another challenge comes from the semantic gap between the generated description t and the target image y . Generally, an ideal t should highlight the semantic changes while avoiding unnecessary information instructions from the reference image. On one hand, we empirically find that existing LLM-based generators can successfully describe the changed context. On the other hand, they also pay more attention to the reference image due to the limited guidance in text modification m . As a result, the output caption usually contains many visual details of the reference image, which act as noise and mislead the retrieval process. To this end, we propose a transition step that pushes the generated captions to the target image at the embedding space. As shown in Fig. 2, let Δm denote the difference between x and y , it provides incremental semantics from the reference image to its target. Recalling that the text modification m contains high-quality relative information, it is natural to estimate Δm using m :

$$\Delta m = y - x, \Delta \hat{m} = f(m), \quad (3)$$

where $x \in R^d$ represents the visual embeddings of the reference image x generated by the CLIP image encoder, f is the CLIP text encoder. Once obtaining the relative guidance $\Delta \hat{m}$, t_k can be updated via a simple fusing strategy:

$$\hat{t}_k = (1 - \alpha)t_k + \alpha\Delta \hat{m}, \quad (4)$$

where the first term $\mathbf{t}_k$ comes from the MLLMs, and it encodes multimodal knowledge based on the MLLM’s understanding of the composed input (x, m) . The second term $\Delta\hat{\mathbf{m}}$ is derived from the text modification estimation and contains high-quality relative instruction between the reference and target image. The transferred caption $\hat{\mathbf{t}}_k$ takes guidance from both directions with a trade-off hyperparameter $\alpha \in [0, 1]$. Now, we can rewrite P_t as: $P_t = \frac{1}{K} \sum_{k=1}^K \delta_{\hat{\mathbf{t}}_k}$.

Set-to-set Alignment. Given the collected discrete distribution P_t in the text domain, we in this section aim to explore the diverse visual features in the image domain with a similar motivation:

$$Q_y = \frac{1}{M} \sum_{m=1}^M \delta_{\mathbf{y}_m}, \quad (5)$$

where we augment the target image $M - 1$ times and $\{\mathbf{y}_m\}_{m=2}^M$ are the embeddings of the augmented images. Unlike previous ZS-CIR models that view the target image as a single point, Q_y in Eq. 5 provides us with multiple views of y , leading to the following fine-grained retrieval strategy.

Moving beyond the point-to-point similarity measurement in Eq. 1, we here develop a bidirectional distance of two discrete distributions $\mathcal{L}_{bi}(P_t, Q_y)$ under the CT framework. Specifically, $\mathcal{L}_{bi}$ consists of two transport costs: the forward cost that measures the expected transport cost from the refined captions to the target image and the backward cost that inverts the direction:

$$\begin{aligned} \mathcal{L}_{bi}(P_t, Q_y) &= \mathcal{L}_{P_t \rightarrow Q_y}(P_t, Q_y) + \mathcal{L}_{Q_y \rightarrow P_t}(P_t, Q_y) \\ &= \sum_{m,k} \pi(\mathbf{y}_m | \hat{\mathbf{t}}_k) c(\hat{\mathbf{t}}_k, \mathbf{y}_m) + \pi(\hat{\mathbf{t}}_k | \mathbf{y}_m) c(\mathbf{y}_m, \hat{\mathbf{t}}_k), \end{aligned} \quad (6)$$

where the cost function $c(\mathbf{y}, \hat{\mathbf{t}}) = c(\hat{\mathbf{t}}, \mathbf{y})$ is specified as the cosine distance to measure the transport cost between points $\hat{\mathbf{t}}$ and $\mathbf{y}$. $\pi(\mathbf{y} | \hat{\mathbf{t}})$ denotes the transport plan in the forward path, and it measures how likely $\hat{\mathbf{t}}$ will be transported to $\mathbf{y}$:

$$\pi(\mathbf{y}_m | \hat{\mathbf{t}}_k) = \frac{\exp(\hat{\mathbf{t}}_k^T \mathbf{y}_m / \tau)}{\sum_{m'=1}^M \exp(\hat{\mathbf{t}}_k^T \mathbf{y}_{m'} / \tau)}. \quad (7)$$

Naturally, the closer $\hat{\mathbf{t}}$ and $\mathbf{y}$ are in the embedding space, the higher the transport probability from $\hat{\mathbf{t}}$ to $\mathbf{y}$. $\pi(\hat{\mathbf{t}} | \mathbf{y})$ is defined in a similar way:

$$\pi(\hat{\mathbf{t}}_k | \mathbf{y}_m) = \frac{\exp(\mathbf{y}_m^T \hat{\mathbf{t}}_k / \tau)}{\sum_{k'=1}^K \exp(\mathbf{y}_m^T \hat{\mathbf{t}}_{k'} / \tau)}. \quad (8)$$

Mathematically, $\mathcal{L}_{bi}$ in Eq. 6 calculates the distance between two discrete distributions in both forward and backward directions. This benefits the alignment across the vision and language domains, showing better multimodal retrieval ability. Moreover, $\mathcal{L}_{bi}$ views the generated caption and target image as two discrete distributions, which show great potential in modeling diverse semantics.

Once obtain the bidirectional distance between the generated descriptions and the target image, we can rewrite Eq. 1 with $\mathcal{L}_{bi}$, resulting in a more general and fine-grained prediction score:

$$p(y = i | x, m) = \frac{\exp(-\mathcal{L}_{bi}(P_t, Q_{y_i}))}{\sum_{n=1}^N \exp(-\mathcal{L}_{bi}(P_t, Q_{y_n}))}. \quad (9)$$

We summarize the whole inference algorithm of STiTch in the Alg.1 in Appendix.

4. Experiments

4.1. Experimental Setup

Datasets. Following previous works [36], we evaluate our proposed model on four commonly used CIR datasets, which vary in CIR tasks, image domains and dataset sizes, including CIRR [27], CIRCO [3], FashionIQ [43], and GeneCIS [38]. CIRR is the first natural image dataset for CIR. CIRCO comes from COCO2017 [25] and has multiple ground truths for each query. FashionIQ focuses on fashion-related retrieval and consists of three subsets: shirt, dress, and toptee. GeneCIS contains images from MS-COCO [25] and Visual Attributes in the Wild [29], offering four task variations around objects and attributes. We report the original benchmark metrics for each dataset: *e.g.*, Recall@k(R@k) for CIRR, GeneCIS, and FashionIQ, and mean average precision (mAP@k) for CIRCO due to its multiple labels.

Baselines. We compare our STiTch with recent advances, grouped as training-dependent and training-free models. The former often optimize a mapping network to project the reference image into text tokens, including 1) **Pic2Word** [32], 2) **SEARLE** [3], 3) **Context-I2W** [34], and 4) **LinCIR** [13]. Training-free methods focus more on improving ZS-CIR with large language models, including 5) **CIReVL** [17], 6) **LDRE** [45], 7) **OSrCIR** [36] and 8) **SEIZE** [44]. Unlike previous training-free methods, our STiTch aims to refine the composed caption in the embedding space and explore fine-grained alignment across vision-language domains. For all training-based baselines, we directly report the results according to their official papers. For training-free models, to make a fair comparison, we reproduce their results on the FashionIQ dataset according to their released codes and report results on other datasets according to the original papers. We encourage readers to Appendix for more details.

Implementation Details. We employ the open-source Qwen2-VL-7B as our MLLM by default, while we also report the results on various MLLMs in Appendix C. To generate diverse descriptions, we follow a similar setting to previous works and apply $\tau = 0.7$, top-k(k=50), top-p(p=0.8) at the querying stage. Regarding image augmentation, we used only random resized crop and random horizontal flip for each image. We set the number of captions as $K = 5$, the number

Table 1. Comparison on CIRCO and CIRR datasets. The top two training-free results are highlighted in **bold** and underline, respectively.

CIRCO + CIRR →			CIRCO				CIRR					
Arch	Metric	Train	mAP@k				Recall@k			Recall _{Subset} @k		
	Method		k=5	k=10	k=25	k=50	k=1	k=5	k=10	k=1	k=2	k=3
ViT-L/14	Pic2Word	✓	8.72	9.51	10.64	11.29	23.90	51.70	65.30	53.76	74.46	87.08
	SEARLE	✓	11.68	12.73	14.33	15.12	24.24	52.48	66.29	53.76	75.01	88.19
	LinCIR	✓	12.59	13.58	15.00	15.85	25.04	53.25	66.68	57.11	77.37	88.89
	Context-I2W	✓	13.04	14.62	16.14	17.16	25.60	55.10	68.50	-	-	-
	CIReVL	✗	18.57	19.01	20.89	21.80	24.55	52.31	64.92	59.54	79.88	89.69
	LDRE	✗	23.35	24.03	26.44	27.50	26.53	55.57	67.54	60.43	80.31	89.90
	OSrCIR	✗	23.87	25.33	27.84	<u>28.97</u>	29.45	<u>57.68</u>	<u>69.86</u>	62.12	81.92	91.10
	SEIZE	✗	24.98	<u>25.82</u>	28.24	28.35	28.65	57.16	69.23	62.22	84.05	92.34
	STiTch(Ours)	✗	25.55	26.27	28.81	29.99	<u>28.87</u>	57.97	69.90	65.22	84.10	92.37
ViT-G/14	CIReVL	✗	26.77	27.59	29.96	31.03	34.65	64.29	75.06	67.95	84.87	93.21
	LDRE	✗	31.12	32.24	34.95	36.03	36.15	66.39	77.25	68.82	85.66	93.76
	OSrCIR	✗	30.47	31.14	35.03	36.59	37.26	67.25	77.33	69.22	85.28	93.55
	SEIZE	✗	<u>32.46</u>	<u>33.77</u>	<u>36.46</u>	<u>37.55</u>	<u>38.87</u>	<u>69.42</u>	<u>79.42</u>	74.15	89.23	95.71
	STiTch (Ours)	✗	34.40	35.56	38.07	40.02	39.23	69.95	79.56	<u>73.56</u>	89.50	95.86

of augmentations as $M = 10$, and employ a default value of $\alpha = 0.45$. The default retrieval model is CLIP-L/14 from the official OpenAI implementation [30]. We also report the results of LLM-based models (CIReVL, OSrCIR, and our STiTch) on CLIP-bigG-14 from the OpenCLIP implementation [8] for analysis of scaling laws. All experiments are conducted on a single NVIDIA A6000 GPU.

4.2. Comparison with State-of-the-art Methods

We run all experiments three times with different random seeds and report the mean value to ensure reliability. We report the comparison on the hidden test set of CIRCO and CIRR datasets in Tab. 1 (All results are obtained from the submission server provided in [3] and [27]). These two CIR datasets focus on foreground and background differentiation and fine-grained image editing. From the results, we find that our proposed STiTch achieves the best or second-best results in most cases among baselines, including training-free and textual inversion models. STiTch underperforms baselines on the CIRR dataset in the case of $k = 1$. This may be due to the noisy annotation in CIRR, where the reference image is less related to the target image [3].

Tab. 2 shows the comparison in the validation set of the Fashion-IQ dataset with ViT-G/14, and more comparisons on other backbones can be found in the Appendix Tab. 7. The results show the robustness of our method. Interestingly, we find that text inversion-based models (e.g., LinCIR) outperform LLM-based models in the fashion image editing task. This may be due to the fact that most images in Fashion-IQ are relatively simple, containing only a pure background. This may limit the ability of MLLMs, and in contrast, training-dependent models tend to describe the reference image more correctly.

Lastly, we further test the object and attribute composition ability of our model on the GeneCIS dataset, with the

results listed in Tab. 3. Unlike previous datasets that provide a detailed text modification sentence, GeneCIS uses single-word instruction to express the user’s intent, e.g., focusing/changing a specific object or attribute. From the results, we find that our proposed STiTch achieves the best results in 19/24 cases and outperforms the others at the average score. On the one hand, STiTch preserves rich multimodal knowledge to interpret implicit inputs while filtering out noise through transition. On the other hand, it views the caption as a discrete distribution, showing great potential in capturing diverse visual semantics, leading to fine-grained retrieval for this complex task.

4.3. Further Analysis

In addition to the numerical comparisons on four CIR benchmarks. In this section, we provide further analysis of the ablation results and visualizations of the proposed modules.

Main component analysis. To evaluate the impacts of each proposed module in STiTch, we report the ablation results in Tab. 4. We find that 1) both transition and transportation show a positive improvement compared to the base model (first row, query only); 2) The transition module achieves higher improvements than the transportation module in most cases. This shows the validity of our proposed transition vector in assessing the difference between the reference and target images. It highlights the text modification and offers useful guidance to steer the original caption toward the target image, resulting in more correct alignments. 3) Through collaboration, our complete model achieves the best performance. This highlights the motivation of our STiTch: the unnecessary visual details introduced in original captions and the simple point-based alignment.

Impacts of caption number and augmentation views. We report the study of caption number K and augmentation

Table 2. Comparison on Fashion-IQ datasets. The top two training-free results are highlighted in **bolded** and underlined.

Fashion-IQ →			Shirt		Dress		Toptee		Average	
Arch	Method	Train	R@10	R@50	R@10	R@50	R@10	R@50	R@10	R@50
ViT-G/14	Pic2Word	✓	33.17	50.39	25.43	47.65	35.24	57.62	31.28	51.89
	SEARLE	✓	36.46	55.35	28.16	50.32	39.83	61.45	34.81	55.71
	LinCIR	✓	46.76	65.11	38.08	60.88	50.48	71.09	45.11	65.69
	CIReVL	✗	29.85	51.07	27.07	49.53	35.80	56.14	32.19	52.36
	OSrCIR	✗	38.65	54.71	33.02	54.78	41.04	61.83	37.57	57.11
	SEIZE	✗	43.60	65.42	39.61	61.02	45.94	71.12	43.05	65.85
	STiTch(Ours)	✗	<u>39.48</u>	<u>56.59</u>	<u>35.04</u>	<u>56.74</u>	<u>42.86</u>	<u>64.95</u>	<u>39.12</u>	<u>59.43</u>

Table 3. Comparison on GeneCIS datasets. The top two training-free results are highlighted in **bolded** and underlined, respectively.

GeneCIS →			Focus Attribute			Change Attribute			Focus Object			Change Object			Average
Arch	Method	Train	R@1	R@2	R@3	R@1	R@2	R@3	R@1	R@2	R@3	R@1	R@2	R@3	R@1
ViT-L/14	SEARLE	✓	17.1	29.6	40.7	16.3	25.2	34.2	12.0	22.2	30.9	12.0	24.1	33.9	14.4
	LinCIR	✓	16.9	30.0	41.5	16.2	28.0	36.8	8.3	17.4	26.2	7.4	15.7	25.0	12.2
	Context-I2W	✓	17.2	30.5	41.7	16.4	28.3	37.1	8.7	17.9	26.9	7.7	16.0	25.4	12.7
	CIReV	✗	19.5	31.8	42.0	14.4	26.0	35.2	12.3	21.8	30.5	17.2	28.9	37.6	15.9
	OSrCIR	✗	20.9	33.1	44.5	17.2	28.5	37.9	15.0	23.6	34.2	18.4	30.6	38.3	17.9
	SEIZE	✗	<u>20.5</u>	<u>33.4</u>	<u>45.0</u>	<u>17.6</u>	<u>28.9</u>	<u>38.5</u>	<u>15.4</u>	<u>25.6</u>	<u>36.2</u>	<u>18.7</u>	<u>30.9</u>	<u>39.8</u>	<u>18.1</u>
	STiTch(Ours)	✗	<u>20.3</u>	34.6	46.4	18.3	29.8	41.6	16.8	28.5	38.4	18.8	31.0	40.3	18.6
ViT-G/14	CIReVL	✗	20.9	34.4	44.9	16.5	29.0	39.8	15.1	25.6	33.4	18.5	31.6	41.4	17.8
	OSrCIR	✗	<u>22.7</u>	<u>36.4</u>	47.0	17.9	30.8	42.0	16.9	28.4	36.7	21.0	33.4	44.2	19.6
	SEIZE	✗	22.9	36.2	47.3	<u>18.6</u>	31.4	<u>42.7</u>	<u>18.2</u>	<u>28.8</u>	<u>37.6</u>	19.6	33.0	<u>43.5</u>	<u>19.8</u>
	STiTch(Ours)	✗	21.9	36.4	47.9	19.6	31.9	42.8	20.2	30.3	39.6	<u>19.7</u>	<u>33.2</u>	<u>43.4</u>	20.4

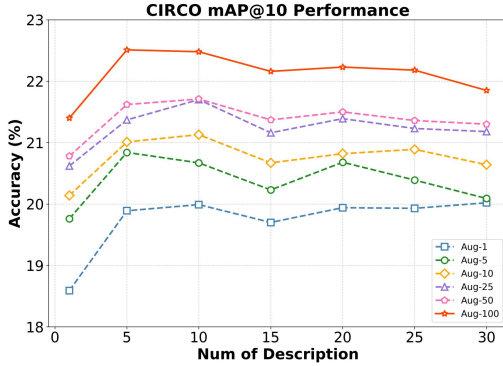


Figure 3. Ablation on the number of descriptions and image augmentations (Aug-10: 10 augmentations per image) on the CIRCO dataset with CLIP-B/32.

views M in Eq. 5 on CIRCO dataset, with results in Fig. 3. From these results, we first find that the performance shows a large improvement when $K > 1$. This demonstrates the effectiveness of using diverse captions, especially after semantic transitions, to capture rich semantic information. Moreover, increasing the number of image augmentations M consistently enhances performance, highlighting the value of multi-scale image diversity. We suggest that setting $K = 5$ and $M = 10$ is sufficient to achieve strong performance across most datasets.

Impacts of the bidirectional distance. Recalling that we propose to measure the distance between the modified cap-

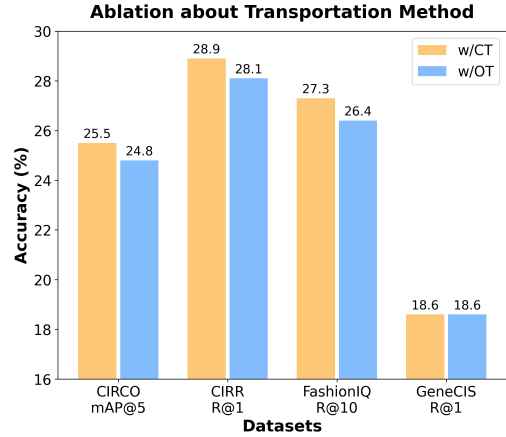


Figure 4. Ablation results of different alignment strategies across four datasets with CLIP-L/14.

tion P_t and the target image augmentation Q_y using a bidirectional transportation distance in Eq. 6. This enables the proposed STiTch to not only calculate the transport cost from P_t to Q_y but also consider the reverse cost, showing better alignments across the vision-language domains. To identify such improvements, we replace the bidirectional CT distance with the optimal transport (OT) distance and report the comparison on four datasets in Fig. 4. Note that the CT distance consistently beats the OT distance in all cases, showing the effectiveness of our bidirectional alignment.

Visualization Analysis. From the above analysis, we find that the transition module plays a key role in improving the

Table 4. Ablation results on the transition and transportation modules. All results are conducted on CIRCO and CIRR datasets with CLIP-bigG/14.

CIRCO + CIRR →			CIRCO				CIRR					
Strategy			mAP@k				Recall@k			Recall _{Subset} @k		
Transition	Transportation		k=5	k=10	k=25	k=50	k=1	k=5	k=10	k=1	k=2	k=3
✗	✗		31.23	32.87	36.32	38.04	37.22	67.36	77.84	69.93	86.48	94.05
✓	✗		31.89	34.46	37.94	39.67	38.33	68.45	78.03	72.81	88.13	94.51
✗	✓		32.14	34.78	37.87	39.48	38.48	68.38	78.34	72.15	88.04	94.48
✓	✓		34.40	35.56	38.07	40.02	39.23	69.95	79.56	73.56	89.50	95.86

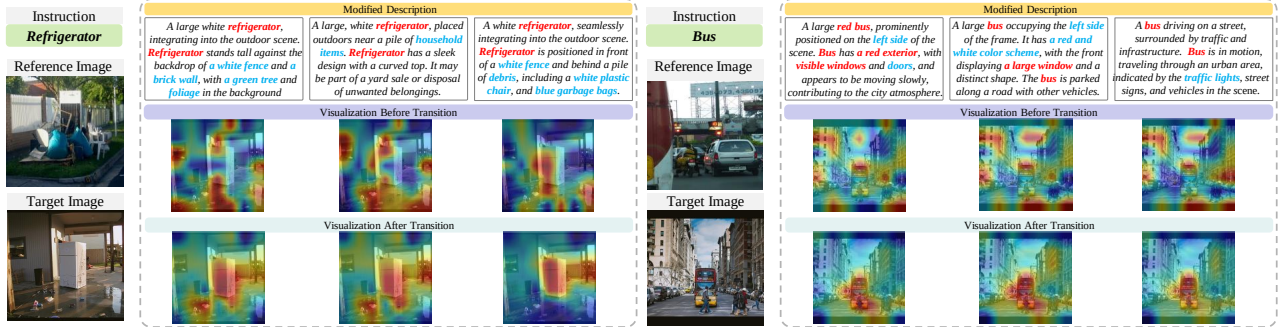


Figure 5. Visualization of the GeneCIS dataset on the ‘Focus Object’ task. Heatmaps before and after the transition on target image are shown. Captions generated by MLLMs often contain irrelevant visual noise (blue text), while the STiTCh model effectively suppresses such noise and highlights the correct focus object (red text).

Table 5. Efficiency comparison with SOTA methods. Inference times (seconds per query) are reported for each model using a single NVIDIA A6000 GPU.

Model	Pic2Word	SEARLE	CIReVL	OSrCIR	LDRE	SEIZE	STiTCh
Time (s)	<0.01	<0.01	2.97+0.85=3.82	6.65	1.30+2.98=4.28	5.8+4.5=10.3	3.5

CIR performance. It estimates the relative vector as the difference between the reference and target image and provides correct information to refine the generated captions. To make a clearer understanding, we visualize the heat maps of two samples from the GeneCIS dataset on the “Focus Object” task in Fig. E. Here, we directly calculate the cosine similarity between the visual patch embeddings and the caption embedding as the score of the heat maps. The first row denotes three generated captions and the last two heat maps denote the corresponding visualization results before and after the transition module. We find that the generated captions indeed introduce visual noise for the CIR task. For example, the retrieval attentions are often disturbed by visual noise such as “white fence”, “white color” and “left side of the scene”. In contrast, the visualizations of STiTCh often focus on the correct object, leading to higher CIR performance.

Efficiency Analysis. Tab. 5 shows the inference times (seconds per query) of various methods. Overall, LLM-based methods generally incur higher test-time latency than traditional mapping models due to the query stage. For instance, CIReVL, LDRE and SEIZE are two-stage approaches that

require significant time to generate target descriptions, while OSrCIR involves extensive chain-of-thought reasoning during inference. In contrast, our STiTCh achieves the lowest test time among LLM-based methods when taking image augmentation into consideration, showing the efficiency of our collaborative modules.

5. Conclusion

In this paper, we propose STiTCh, a novel one-stage, training-free framework for the zero-shot composed image retrieval task. STiTCh improves the quality of the generated caption by MLLMs via a transition vector and views the captions and target image as two discrete distributions in the embedding space. A bidirectional transport distance is developed to measure the similarity across the vision-language domains. Our approach not only achieves strong performance on four CIR benchmarks but also, provides interpretability via the visualization of the transferred caption and the target images. Extensive ablations also demonstrate the effectiveness of STiTCh. Since its natural flexibility and simplicity, we hope STiTCh provides innovative ideas for follow-up studies.

Acknowledgments

This research was supported in part by the Hong Kong RGC General Research Fund (Grant Nos. 15221123, 15216424, and 15211525) and the PolyU Internal Research Fund (Grant Nos. P0058468 and P0056171); in part by the Young Scientists Fund of the National Natural Science Foundation of China (Grant No. 62506237); in part by the National Natural Science Foundation of China (Grant No. 62576215); and in part by the Scientific Foundation for Youth Scholars of Shenzhen University.

References

- [1] Muhammad Umer Anwaar, Egor Labintsev, and Martin Kleinstenuber. Compositional learning of image-text query for image retrieval. In *Proceedings of the IEEE/CVF Winter conference on Applications of Computer Vision*, pages 1140–1149, 2021. 1, 3
- [2] Alberto Baldrati, Marco Bertini, Tiberio Uricchio, and Alberto Del Bimbo. Effective conditioned and composed image retrieval combining clip-based features. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 21466–21474, 2022. 1
- [3] Alberto Baldrati, Lorenzo Agnolucci, Marco Bertini, and Alberto Del Bimbo. Zero-shot composed image retrieval with textual inversion. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 15338–15347, 2023. 1, 3, 5, 6
- [4] Guangyi Chen, Weiran Yao, Xiangchen Song, Xinyue Li, Yongming Rao, and Kun Zhang. PLOT: Prompt learning with optimal transport for vision-language models. In *The Eleventh International Conference on Learning Representations*, 2023. 2
- [5] Liqun Chen, Zhe Gan, Yu Cheng, Linjie Li, Lawrence Carin, and Jingjing Liu. Graph optimal transport for cross-domain alignment. In *International Conference on Machine Learning*, pages 1542–1553. PMLR, 2020. 3
- [6] Yanbei Chen and Loris Bazzani. Learning joint visual semantic matching embeddings for language-guided retrieval. In *Computer Vision—ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part XXII 16*, pages 136–152. Springer, 2020. 3
- [7] Yanbei Chen, Shaogang Gong, and Loris Bazzani. Image search with text feedback by visiolinguistic attention learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 3001–3011, 2020. 1, 3
- [8] Mehdi Cherti, Romain Beaumont, Ross Wightman, Mitchell Wortsman, Gabriel Ilharco, Cade Gordon, Christoph Schuhmann, Ludwig Schmidt, and Jenia Jitsev. Reproducible scaling laws for contrastive language-image learning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 2818–2829, 2023. 6
- [9] Marco Cuturi. Sinkhorn distances: Lightspeed computation of optimal transport. *Advances in neural information processing systems*, 26, 2013. 3
- [10] Ginger Delmas, Rafael Sampaio de Rezende, Gabriela Csurka, and Diane Larlus. Artemis: Attention-based retrieval with text-explicit matching and implicit similarity. *arXiv preprint arXiv:2203.08101*, 2022. 1
- [11] Rinon Gal, Yuval Alaluf, Yuval Atzmon, Or Patashnik, Amit H Bermano, Gal Chechik, and Daniel Cohen-Or. An image is worth one word: Personalizing text-to-image generation using textual inversion. *arXiv preprint arXiv:2208.01618*, 2022. 1
- [12] Geonmo Gu, Sanghyuk Chun, Wonjae Kim, HeeJae Jun, Yoohoon Kang, and Sangdoo Yun. Compodiff: Versatile composed image retrieval with latent diffusion. *arXiv preprint arXiv:2303.11916*, 2023. 3
- [13] Geonmo Gu, Sanghyuk Chun, Wonjae Kim, Yoohoon Kang, and Sangdoo Yun. Language-only efficient training of zero-shot composed image retrieval. 2024 iee. In *CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 13225–13234, 2023. 5
- [14] Ari Holtzman, Jan Buys, Li Du, Maxwell Forbes, and Yejin Choi. The curious case of neural text degeneration. *arXiv preprint arXiv:1904.09751*, 2019. 4
- [15] Mehrdad Hosseinzadeh and Yang Wang. Composed query image retrieval using locally bounded features. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 3596–3605, 2020. 1
- [16] Yingying Jiang, Hanchao Jia, Xiaobing Wang, and Peng Hao. Hycir: Boosting zero-shot composed image retrieval with synthetic labels. *CoRR*, abs/2407.05795, 2024. 1
- [17] Shyamgopal Karthik, Karsten Roth, Massimiliano Mancini, and Zeynep Akata. Vision-by-language for training-free compositional image retrieval. *arXiv preprint arXiv:2310.09291*, 2023. 1, 3, 5
- [18] John Lee, Max Dabagia, Eva Dyer, and Christopher Rozell. Hierarchical optimal transport for multimodal distribution alignment. *Advances in neural information processing systems*, 32, 2019. 3
- [19] Seungmin Lee, Dongwan Kim, and Bohyung Han. Cosmo: Content-style modulation for image retrieval with text feedback. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 802–812, 2021. 1, 3
- [20] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *International conference on machine learning*, pages 19730–19742. PMLR, 2023. 3, 4
- [21] Miaoge Li, Dongsheng Wang, Xinyang Liu, Zequn Zeng, Ruiying Lu, Bo Chen, and Mingyuan Zhou. Patchct: Aligning patch set and label set with conditional transport for multi-label image classification. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 15348–15358, 2023. 3
- [22] Miaoge Li, Jingcai Guo, Richard Yi Da Xu, Dongsheng Wang, Xiaofeng Cao, Zhijie Rao, and Song Guo. Tsca: on the semantic consistency alignment via conditional transport for compositional zero-shot learning. pages 5607–5615, 2025. 3
- [23] Wei Li, Hehe Fan, Yongkang Wong, Yi Yang, and Mohan S Kankanhalli. Improving context understanding in multimodal large language models via multimodal composition learning. In *ICML*, page 7, 2024. 4

- [24] You Li, Fan Ma, and Yi Yang. Imagine and seek: Improving composed image retrieval with an imagined proxy. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 3984–3993, 2025. 3
- [25] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *European conference on computer vision*, pages 740–755. Springer, 2014. 5
- [26] Xinyang Liu, Dongsheng Wang, Bowei Fang, Miaoge Li, Zhibin Duan, Yishi Xu, Bo Chen, and Mingyuan Zhou. Patch-prompt aligned bayesian prompt tuning for vision-language models. *arXiv preprint arXiv:2303.09100*, 2023. 3
- [27] Zheyuan Liu, Cristian Rodriguez-Opazo, Damien Teney, and Stephen Gould. Image retrieval on real-life images with pre-trained vision-and-language models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 2125–2134, 2021. 5, 6
- [28] Ron Mokady, Amir Hertz, Kfir Aberman, Yael Pritch, and Daniel Cohen-Or. Null-text inversion for editing real images using guided diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 6038–6047, 2023. 1
- [29] Khoi Pham, Kushal Kafle, Zhe Lin, Zhihong Ding, Scott Cohen, Quan Tran, and Abhinav Shrivastava. Learning to predict visual attributes in the wild. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 13018–13028, 2021. 5
- [30] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning*, pages 8748–8763. PMLR, 2021. 6
- [31] Ievgen Redko, Nicolas Courty, Rémi Flamary, and Devis Tuia. Optimal transport for multi-source domain adaptation under target shift. In *The 22nd International Conference on Artificial Intelligence and Statistics*, pages 849–858. PMLR, 2019. 3
- [32] Kuniaki Saito, Kihyuk Sohn, Xiang Zhang, Chun-Liang Li, Chen-Yu Lee, Kate Saenko, and Tomas Pfister. Pic2word: Mapping pictures to words for zero-shot composed image retrieval. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 19305–19314, 2023. 1, 5
- [33] John Sweller. Cognitive load during problem solving: Effects on learning. *Cognitive science*, 12(2):257–285, 1988. 1
- [34] Yuanmin Tang, Jing Yu, Keke Gai, Jiamin Zhuang, Gang Xiong, Yue Hu, and Qi Wu. Context-i2w: Mapping images to context-dependent words for accurate zero-shot composed image retrieval. In *Proceedings of the AAAI Conference on Artificial Intelligence*, pages 5180–5188, 2024. 5
- [35] Yuanmin Tang, Jing Yu, Keke Gai, Jiamin Zhuang, Gang Xiong, Gaopeng Gou, and Qi Wu. Missing target-relevant information prediction with world model for accurate zero-shot composed image retrieval. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 24785–24795, 2025. 3
- [36] Yuanmin Tang, Jue Zhang, Xiaoting Qin, Jing Yu, Gaopeng Gou, Gang Xiong, Qingwei Lin, Saravan Rajmohan, Dongmei Zhang, and Qi Wu. Reason-before-retrieve: One-stage reflective chain-of-thoughts for training-free zero-shot composed image retrieval. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 14400–14410, 2025. 1, 2, 3, 5
- [37] Long Tian, Jingyi Feng, Xiaoqiang Chai, Wenchao Chen, Liming Wang, Xiyang Liu, and Bo Chen. Prototypes-oriented transductive few-shot learning with conditional transport. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 16317–16326, 2023. 3
- [38] Sagar Vaze, Nicolas Carion, and Ishan Misra. Genecis: A benchmark for general conditional image similarity. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6862–6872, 2023. 5
- [39] Cédric Villani et al. *Optimal transport: old and new*. Springer, 2009. 3
- [40] Nam Vo, Lu Jiang, Chen Sun, Kevin Murphy, Li-Jia Li, Li Fei-Fei, and James Hays. Composing text and image for image retrieval-an empirical odyssey. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 6439–6448, 2019. 1, 3
- [41] Dongsheng Wang, Miaoge Li, Xinyang Liu, MingSheng Xu, Bo Chen, and Hanwang Zhang. Tuning multi-mode token-level prompt alignment across modalities. *Advances in Neural Information Processing Systems*, 36:52792–52810, 2023. 2, 3
- [42] Dongsheng Wang, Jiequan Cui, Miaoge Li, Wang Lin, Bo Chen, and Hanwang Zhang. Instruction tuning-free visual token complement for multimodal llms. In *European Conference on Computer Vision*, pages 446–462. Springer, 2024. 1
- [43] Hui Wu, Yupeng Gao, Xiaoxiao Guo, Ziad Al-Halah, Steven Rennie, Kristen Grauman, and Rogerio Feris. Fashion iq: A new dataset towards retrieving images by natural language feedback. In *Proceedings of the IEEE/CVF Conference on computer vision and pattern recognition*, pages 11307–11317, 2021. 5
- [44] Zhenyu Yang, Shengsheng Qian, Dizhan Xue, Jiahong Wu, Fan Yang, Weiming Dong, and Changsheng Xu. Semantic editing increment benefits zero-shot composed image retrieval. In *Proceedings of the 32nd ACM International Conference on Multimedia*, pages 1245–1254, 2024. 2, 5
- [45] Zhenyu Yang, Dizhan Xue, Shengsheng Qian, Weiming Dong, and Changsheng Xu. Ldre: Llm-based divergent reasoning and ensemble for zero-shot composed image retrieval. In *Proceedings of the 47th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 80–90, 2024. 3, 5
- [46] Andy Zeng, Maria Attarian, Brian Ichter, Krzysztof Choromanski, Adrian Wong, Stefan Welker, Federico Tombari, Aveek Purohit, Michael Ryoo, Vikas Sindhwani, et al. Socratic models: Composing zero-shot multimodal reasoning with language. *arXiv preprint arXiv:2204.00598*, 2022. 1
- [47] Kai Zhang, Yi Luan, Hexiang Hu, Kenton Lee, Siyuan Qiao, Wenhui Chen, Yu Su, and Ming-Wei Chang. Magiclens: Self-supervised image retrieval with open-ended instructions. *arXiv preprint arXiv:2403.19651*, 2024. 3

- [48] Peng Zhao and Zhi-Hua Zhou. Label distribution learning by optimal transport. In *Proceedings of the AAAI Conference on Artificial Intelligence*, 2018. [3](#)
- [49] Huangjie Zheng and Mingyuan Zhou. Exploiting chain rule and bayes’ theorem to compare probability distributions. *Advances in Neural Information Processing Systems*, 34:14993–15006, 2021. [3](#)
- [50] Xingyu Zhu, Shuo Wang, Beier Zhu, Miaoge Li, Yunfan Li, Junfeng Fang, Zhicai Wang, Dongsheng Wang, and Hanwang Zhang. Dynamic multimodal prototype learning in vision-language models. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 2501–2511, 2025. [3](#)
- [51] Yuhan Zhu, Yuyang Ji, Zhiyu Zhao, Gangshan Wu, and Limin Wang. Awt: Transferring vision-language models via augmentation, weighting, and transportation. *Advances in Neural Information Processing Systems*, 37:25561–25591, 2024. [2](#)

STiTCh: Semantic Transition and Transportation in Collaboration for Training-Free Zero-Shot Composed Image Retrieval

Supplementary Material

Appendix Overview

The supplementary material is organized into the following sections:

- **A. Algorithm of STiTCh Process**
- **B. Additional Comparative Results**
- **C. Impacts of Different MLLMs**
- **D. Additional Ablation Experiments**
 - Impacts of the Bidirectional Distance
 - Impacts of Caption Number and Augmentation Views
 - Hyper-parameters Study
- **E. More Visualization**
- **F. Further Comparison with SEIZE**
- **G. STiTCh In-Context Learning Details**
- **H. Limitations and Future Work**

A. Algorithm of STiTCh Process

Algorithm 1 Inference algorithm of STiTCh.

- 1: **Input:** reference image x , text modification m , target image database $\mathbf{Y} = \{y_n\}_{n=1}^N$, a pre-trained CLIP model, and a pre-trained MLLM; the number of query times K , and the number of image augmentations M .
 - 2: **Output:** retrieval score $p(y|x, m)$ over all target images.
 - 3: **Querying:** Complete the input prompts with x and m , and query the MLLM K times to collect descriptions P_t from Eq. 2.
 - 4: **Transition:** Calculate Δv in Eq. 3 by feeding m into the CLIP text encoder, and obtain transferred P_t from Eq. 4.
 - 5: **for** image y_n in $\mathbf{Y}$ **do**
 - 6: Collect Q_y in Eq. 5 by augmenting target image y_n for $M - 1$ times.
 - 7: Calculate $\mathcal{L}_{P_t, Q_{y_n}}$ from Eq. 6.
 - 8: **end for**
 - 9: **Return:** Calculate retrieval score from Eq. 9.
-

B. Additional Comparative Results.

We in this section included more comprehensive comparisons with more methods across various architectures on all datasets presented in Tab.6, Tab.7, and Tab.8. It should be noted that in Tab.7, the notation (*) indicates that we reproduced the experiments using the OpenAI weights, and the (†) indicates that we reproduced the experiments using the OpenCLIP weights, respectively. From these comparisons, our approach outperforms all the baselines in most cases, showing the efficiency of STiTCh’s three operations.

C. Impacts of Different MLLMs

Like previous works that employ MLLMs to analyze multimodal inputs and generate target descriptions, we specify Qwen2-VL-7B as the MLLM in earlier experiments. Here, we further explore the performance of STiTCh with different MLLMs. Specifically, we report the results on Qwen2-VL-2B, Qwen2-VL-7B, LLaVA-Next-7B, and GPT-4o(mini) in Tab. 12. The results show that our STiTCh can be applied to MLLMs with different architectures and that the performance improves as the number of MLLM’s parameters increases. This demonstrates the potential of STiTCh in flexibility and scalability, as it serves as a plug-and-play pipeline that can seamlessly integrate with various MLLMs. Indeed, we observe that different MLLMs can lead to variations in the generated captions and thus impact retrieval results. This observation further supports our core motivation: rather than re-training or fine-tuning the large models, we aim to design a framework that maximizes retrieval effectiveness given any off-the-shelf MLLM.

In addition to Tab.4 that ablates each module on Qwen-7B, we also report the results with another MLLM GPT-4o(mini) in Tab.11. The ablations on two MLLMs can show the real efficiency of STiTCh’s modules: (1) *Strategic Synergy Over Raw MLLM Power*: The highest mAP@k values (e.g., 38.93 @k=5, 44.46 @k=50) occur when both Transition and Transportation are enabled. This indicates that STiTCh’s strength lies in its systematic collaboration of strategies rather than relying solely on MLLM capabilities. Even with the same MLLM (e.g., GPT-4o(mini)), disabling either strategy reduces performance (e.g., Transportation only yields 36.61 @k=5; Transition only yields 37.50 @k=5), confirming that STiTCh actively improves task-specific reasoning. (2) *Modular Adaptability*: The results implies STiTCh’s strategies are architecture-agnostic. While the choice of MLLM impacts absolute performance, the framework’s relative gains from Transition+Transportation collaboration remain consistent.

D. Additional Ablation Experiments

D.1. Impacts of the bidirectional distance.

To conduct a more comprehensive analysis of the impacts of the bidirectional distance, we supplemented experiments with STiTCh under different backbones using CT distance and OT distance as alignment strategy in Tab.9 and Tab.10. The results show that CT outperforms OT, highlighting the advantages of bidirectional fine-grained alignment.

Table 6. Performance comparison on CIRCO and CIRR datasets. Both ViT-B and ViT-L are loaded from OpenAI official weights, while ViT-G is loaded from OpenCLIP.

CIRCO + CIRR →			CIRCO				CIRR					
Arch	Metric	Train	mAP@k				Recall@k			Recall _{Subset} @k		
	Method		k=5	k=10	k=25	k=50	k=1	k=5	k=10	k=1	k=2	k=3
ViT-B/32	PALAVRA	✓	4.61	5.32	6.33	6.80	16.62	43.49	58.51	41.61	65.30	80.94
	SEARLE	✓	9.35	9.94	11.13	11.84	24.00	53.42	66.82	54.89	76.60	88.19
	CIReVL	✗	14.94	15.42	17.00	17.82	23.94	52.51	66.00	60.17	80.05	90.19
	LDRE	✗	17.96	18.32	20.21	21.11	25.69	55.13	69.04	60.53	80.65	90.70
	OSrCIR	✗	18.04	19.17	20.94	21.85	25.42	54.54	68.19	62.31	80.86	91.13
	SEIZE	✗	19.04	19.64	21.55	22.49	27.47	57.42	70.17	65.59	84.48	92.77
	STiTch(Ours)	✗	20.26	21.01	23.01	24.04	25.83	55.25	70.20	65.64	83.60	92.80
ViT-L/14	Pic2Word	✓	8.72	9.51	10.64	11.29	23.90	51.70	65.30	53.76	74.46	87.08
	SEARLE	✓	11.68	12.73	14.33	15.12	24.24	52.48	66.29	53.76	75.01	88.19
	LinCIR	✓	12.59	13.58	15.00	15.85	25.04	53.25	66.68	57.11	77.37	88.89
	Context-I2W	✓	13.04	14.62	16.14	17.16	25.60	55.10	68.50	-	-	-
	CIReVL	✗	18.57	19.01	20.89	21.80	24.55	52.31	64.92	59.54	79.88	89.69
	LDRE	✗	23.35	24.03	26.44	27.50	26.53	55.57	67.54	60.43	80.31	89.90
	OSrCIR	✗	23.87	25.33	27.84	28.97	29.45	57.68	69.86	62.12	81.92	91.10
	SEIZE	✗	24.98	25.82	28.24	28.35	28.65	57.16	69.23	62.22	84.05	92.34
	STiTch(Ours)	✗	25.55	26.27	28.81	29.99	28.87	57.97	69.90	65.22	84.10	92.37
ViT-G/14	Pic2Word	✓	5.54	5.59	6.68	7.12	30.41	58.12	69.23	68.92	85.45	93.04
	SEARLE	✓	13.20	13.85	15.32	16.04	34.80	64.07	75.11	68.72	84.70	93.23
	LinCIR	✓	19.71	21.01	23.13	24.18	35.25	64.72	76.05	63.35	82.22	91.98
	CIReVL	✗	26.77	27.59	29.96	31.03	34.65	64.29	75.06	67.95	84.87	93.21
	LDRE	✗	31.12	32.24	34.95	36.03	36.15	66.39	77.25	68.82	85.66	93.76
	OSrCIR	✗	30.47	31.14	35.03	36.59	37.26	67.25	77.33	69.22	85.28	93.55
	SEIZE	✗	32.46	33.77	36.46	37.55	38.87	69.42	79.42	74.15	89.23	95.71
	STiTch(Ours)	✗	34.40	35.56	38.07	40.02	39.23	69.95	79.56	73.56	89.50	95.86

D.2. Impacts of caption number and augmentation views.

Moreover, for clarity, we have provided the specific values corresponding to Fig.3 in the main text and supplemented the results of ablation experiments under different architectures, which can be found in Tab.13. It is evident that compared to a single caption ($k=1$), multiple captions can provide richer multi-modal knowledge to better understand the implicit input, leading to more accurate descriptions.

D.3. Hyper-parameters Study

We report a sensitivity analysis of α in Tab.14. The results show that STiTch exhibits moderate sensitivity to α , with performance being non-monotonic. Specifically, values in the range of 0.3 – 0.5 yield optimal results, while overly small or large values degrade performance. This confirms the effectiveness of treating modification as a transition vector, as it helps mitigate biases between MLLM-generated captions and images. For practical use, in accuracy-critical tasks (e.g., CIRCO), we suggest $\alpha \leq 0.5$ to avoid over-modification; In recall-critical tasks (e.g., CIRR), starting with $\alpha = 0.4$ is reasonable. For new datasets, a grid search within [0.3, 0.5] could be conducted, selecting the optimal α based on validation performance tailored to the application’s specific needs.

E. More Visualization

For a more comprehensive qualitative analysis, we present the visualization results of GeneCIS datasets about the task of focus in Fig. 7. It illustrated that the original generated descriptions indeed introduce visual noise while our STiTch often focuses on the correct object, leading to higher CIR performance.

F. Further Comparison with SEIZE

We observe that both SEIZE [44] and our STiTch generate multiple captions and apply the semantic calibration process. However, these two models are different from each other in terms of caption generation, semantic calibration strategy, and retrieval score calculation: (1) **Two-Stage Generation vs. One-Stage Generation**: SEIZE first generates N captions for the reference image using a captioner and then modifies them according to the input modification text via an LLM. In contrast, our STiTch directly employs an MLLM to generate N captions for the composed input, eliminating information loss from two-stage approaches. Moreover, the efficiency comparison in Tab. 5 shows that two-stage generation methods are time-consuming, which may limit their applicability in real-time scenarios. (2) **Similarity Space vs. Embedding Space**: SEIZE refines the final retrieval score

Table 7. Performance comparison on Fashion-IQ datasets. Both ViT-B and ViT-L are loaded from OpenAI official weights, while ViT-G is loaded from OpenCLIP. (*) denotes we rerun the experiments on the OpenAI weights, and (†) denotes we rerun the experiments on the OpenCLIP weights.

Fashion-IQ →			Shirt		Dress		Toptee		Average	
Arch	Method	Train	R@10	R@50	R@10	R@50	R@10	R@50	R@10	R@50
ViT-B/32	PALAVRA	✓	21.49	37.05	17.25	35.94	20.55	38.76	19.76	37.25
	SEARLE	✓	24.44	41.61	18.54	39.51	25.70	46.46	22.89	42.53
	CIReVL	✗	28.36	47.84	25.29	46.36	31.21	53.85	28.28	49.35
	CIReVL*	✗	22.03	37.00	13.34	30.14	18.97	38.19	18.11	35.11
	CIReVL†	✗	27.72	46.12	22.01	41.60	30.09	52.22	26.60	46.64
	OSrCIR	✗	31.16	51.13	29.35	50.37	36.51	58.71	32.34	53.40
	OSrCIR*	✗	22.77	40.87	17.01	37.04	20.75	41.00	20.18	39.60
	OSrCIR†	✗	32.83	52.06	29.75	51.91	36.31	58.24	32.96	54.07
	SEIZE	✗	29.38	47.97	25.37	46.84	32.07	54.78	28.94	49.35
	STiTCh(Ours)	✗	25.22	44.16	18.59	40.16	25.97	47.61	23.26	43.98
ViT-G/14	Pic2Word	✓	33.17	50.39	25.43	47.65	35.24	57.62	31.28	51.89
	SEARLE	✓	36.46	55.35	28.16	50.32	39.83	61.45	34.81	55.71
	LinCIR	✓	46.76	65.11	38.08	60.88	50.48	71.09	45.11	65.69
	CIReVL	✗	29.85	51.07	27.07	49.53	35.80	56.14	32.19	52.36
	CIReVL*	✗	31.65	49.07	23.90	43.13	32.53	53.19	29.36	48.46
	CIReVL†	✗	32.63	50.05	25.09	45.12	34.42	55.12	30.71	50.10
	OSrCIR	✗	38.65	54.71	33.02	54.78	41.04	61.83	37.57	57.11
	OSrCIR*	✗	36.56	55.45	30.69	53.25	40.13	61.30	35.79	56.67
	OSrCIR†	✗	37.39	56.92	30.59	53.50	39.72	61.04	35.79	57.15
	SEIZE	✗	43.60	65.42	39.61	61.02	45.94	71.12	43.05	65.85
	STiTCh(Ours)	✗	39.48	56.59	35.04	56.74	42.86	64.95	39.12	59.43

Table 8. Performance comparison on GeneCIS datasets. Both ViT-B and ViT-L are loaded from openai official weights, while ViT-G is loaded from openclip.

GeneCIS →			Focus Attribute			Change Attribute			Focus Object			Change Object			Average
Arch	Method	Train	R@1	R@2	R@3	R@1	R@2	R@3	R@1	R@2	R@3	R@1	R@2	R@3	R@1
ViT-B/32	SEARLE	✓	18.9	30.6	41.2	13.0	23.8	33.7	12.2	23.0	33.3	13.6	23.8	33.3	14.4
	CIReVL	✗	17.9	29.4	40.4	14.8	25.8	35.8	14.6	24.3	33.3	16.1	27.8	37.6	15.9
	OSrCIR	✗	19.4	32.7	42.8	16.4	27.7	38.1	15.7	25.7	35.8	18.2	30.1	39.4	17.4
	STiTCh(Ours)	✗	21.1	35.0	45.5	17.9	29.9	40.4	16.4	28.5	38.9	18.3	30.1	39.5	18.4
ViT-L/14	SEARLE	✓	17.1	29.6	40.7	16.3	25.2	34.2	12.0	22.2	30.9	12.0	24.1	33.9	14.4
	LinCIR	✓	16.9	30.0	41.5	16.2	28.0	36.8	8.3	17.4	26.2	7.4	15.7	25.0	12.2
	Context-I2W	✓	17.2	30.5	41.7	16.4	28.3	37.1	8.7	17.9	26.9	7.7	16.0	25.4	12.7
	CIReVL	✗	19.5	31.8	42.0	14.4	26.0	35.2	12.3	21.8	30.5	17.2	28.9	37.6	15.9
	OSrCIR	✗	20.9	33.1	44.5	17.2	28.5	37.9	15.0	23.6	34.2	18.4	30.6	38.3	17.9
	SEIZE	✗	20.5	33.4	45.0	17.6	28.9	38.5	15.4	25.6	36.2	18.7	30.9	39.8	18.1
	STiTCh(Ours)	✗	20.3	34.6	46.4	18.3	29.8	41.6	16.8	28.5	38.4	18.8	31.0	40.3	18.6
ViT-G/14	LinCIR	✓	19.1	33.0	42.3	17.6	30.2	38.1	10.1	19.1	28.1	7.9	16.3	25.7	13.7
	CIReVL	✗	20.5	34.0	44.5	16.1	28.6	39.4	14.7	25.2	33.0	18.1	31.2	41.0	17.4
	OSrCIR	✗	22.7	36.4	47.0	17.9	30.8	42.0	16.9	28.4	36.7	21.0	33.4	44.2	19.6
	SEIZE	✗	22.9	36.2	47.3	18.6	31.4	42.7	18.2	28.8	37.6	19.6	33.0	43.5	19.8
	STiTCh(Ours)	✗	21.9	36.4	47.9	19.6	31.9	42.8	20.2	30.3	39.6	19.7	33.2	43.4	20.4

by directly changing the cosine score. Our STiTCh aims to refine the generated captions in the CLIP embedding space. (3) **Point-to-Point vs. Set-to-Set**: SEIZE represents the final global caption feature by employing the average pooling on captions, and then measures similarity with candidates via cosine similarity. Our STiTCh, however, models the captions as a discrete distribution and then develops a transportation-

aware set-to-set metric to calculate the distances.

For experiments, STiTCh demonstrates more pronounced improvements on CIRr and CIRCO (Tab.6) as well as GeneCIS (Tab.8), where the modification descriptions are richer and require more faithful semantic modeling. Such settings align well with STiTCh’s one-stage caption generation and transportation-aware set-to-set metric, which jointly

Table 9. Ablation results of different alignment strategies on CIRCO and CIRR datasets.

CIRCO + CIRR →		CIRCO				CIRR					
Metric		mAP@k				Recall@k			Recall _{Subset} @k		
Arch	Method	k=5	k=10	k=25	k=50	k=1	k=5	k=10	k=1	k=2	k=3
ViT-B/32 (OpenAI)	w/CT	20.26	21.01	23.01	24.04	25.83	55.18	68.22	65.64	83.60	92.80
	w/OT	19.81	20.48	22.33	23.31	24.72	53.66	66.77	65.23	83.64	92.46
ViT-B-32 (OpenCLIP)	w/CT	28.21	28.99	31.31	32.53	32.56	62.10	73.86	70.00	86.60	94.87
	w/OT	23.94	24.79	27.01	28.09	31.37	60.97	72.92	69.54	85.76	94.27
ViT-L/14 (OpenAI)	w/CT	25.55	26.27	28.81	29.99	28.87	57.97	69.90	65.22	84.10	92.37
	w/OT	24.76	25.85	28.52	29.67	28.05	57.01	69.64	65.71	83.74	92.17
ViT-L-14 (OpenCLIP)	w/CT	32.31	33.33	36.32	37.49	35.04	65.57	76.41	71.52	88.00	94.65
	w/OT	30.23	31.22	34.13	35.20	34.39	64.48	76.17	71.98	88.34	94.68

Table 10. Ablation results of different alignment strategies on GeneCIS dataset.

GeneCIS →		Focus Attribute			Change Attribute			Focus Object			Change Object			Average
Arch	Method	R@1	R@2	R@3	R@1	R@2	R@3	R@1	R@2	R@3	R@1	R@2	R@3	R@1
ViT-B/32 (OpenAI)	w/CT	21.1	35.0	45.5	17.9	29.9	40.4	16.4	28.5	38.9	18.3	30.1	39.5	18.4
	w/OT	20.5	34.1	44.9	17.5	30.2	40.1	16.3	28.0	38.3	18.3	29.9	39.4	18.2
ViT-B-32 (OpenCLIP)	w/CT	20.8	33.6	44.2	17.6	29.4	39.7	17.4	30.7	40.4	19.6	33.6	44.2	18.9
	w/OT	20.2	33.4	43.8	17.1	29.4	39.0	17.0	29.7	39.9	20.0	33.4	43.8	18.6
ViT-L/14 (OpenAI)	w/CT	20.3	34.6	46.4	18.3	29.8	41.6	16.8	28.5	38.4	18.8	31.0	40.3	18.6
	w/OT	20.6	34.5	45.8	18.0	29.2	40.3	16.8	27.9	38.2	18.8	30.2	40.1	18.5
ViT-L-14 (OpenCLIP)	w/CT	20.5	33.8	44.2	18.1	29.0	40.2	18.5	29.4	39.1	19.9	32.9	42.8	19.3
	w/OT	20.3	33.4	44.4	17.6	28.8	39.9	17.9	28.6	38.1	19.6	33.1	42.3	18.9

Table 11. Ablation results on the transition and transportation modules. All results are conducted on CIRCO datasets with GPT-4o(mini).

Strategy		mAP@k			
Transition	Transportation	k=5	k=10	k=25	k=50
✗	✗	35.49	37.05	40.02	41.28
✓	✗	37.50	39.10	42.24	43.50
✗	✓	36.61	38.10	41.11	42.38
✓	✓	38.93	40.14	43.18	44.46

preserve semantic diversities and model transitions in embedding space more effectively than two-stage caption–editing pipelines. On Fashion-IQ, however, STiTCh performs below SEIZE. This is primarily due to the overly simple modification text in Fashion-IQ (e.g., “is solid white”, “is a lighter color”), which provides limited semantic signal and therefore offers suboptimal guidance for our transition vectors. SEIZE, by contrast, relies on a pre-trained captioning model to generate reference captions, a strategy more compatible with Fashion-IQ’s simplified language. However, as shown in Tab.7, this approach incurs noticeably higher inference-time computational cost, with STiTCh achieving nearly a 3× speed-up over SEIZE.

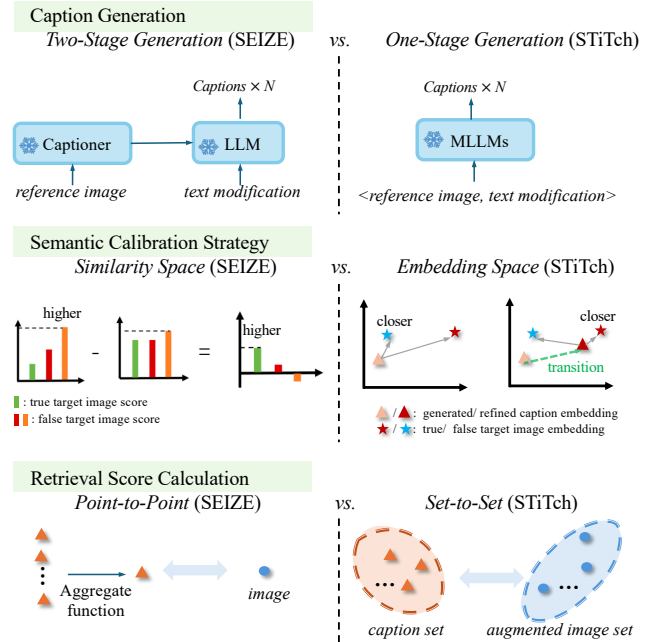


Figure 6. Further comparison between SEIZE and STiTCh in terms of caption generation, semantic calibration strategy, and retrieval score calculation (zoom-in for more details).

Table 12. Performance comparison on CIRCO and CIRR datasets with various MLLMs.

CIRCO + CIRR →		CIRCO				CIRR					
Metric		mAP@k				Recall@k			Recalls _{Subset} @k		
Method		k=5	k=10	k=25	k=50	k=1	k=5	k=10	k=1	k=2	k=3
Qwen-2B		22.49	23.64	25.90	26.95	26.05	53.28	65.59	64.53	82.46	91.25
Qwen-7B		25.55	26.27	28.81	29.99	28.87	57.97	69.90	65.22	84.10	92.37
LLaVA-Next (Mistral-7B)		24.17	24.73	27.03	28.11	26.97	55.10	66.92	65.01	82.75	91.40
GPT-4o(mini)		25.68	26.50	29.16	30.30	28.59	58.13	69.99	66.15	84.98	92.86

Table 13. Ablation study on CIRCO and CIRR datasets with different number of image augmentation on CLIP-B/32 and fix the number of description to 5.

CIRCO + CIRR →		CIRCO				CIRR					
Metrics		mAP@k				Recall@k			Recall _{Subset} @k		
Num		k=5	k=10	k=25	k=50	k=1	k=5	k=10	k=1	k=2	k=3
1		19.73	19.89	21.68	22.63	25.16	53.59	66.46	63.88	82.87	92.19
5		20.19	20.84	22.70	23.73	25.25	54.00	67.40	64.46	83.61	92.39
10		20.26	21.01	23.01	24.04	25.83	55.25	68.22	65.64	83.60	92.80
25		20.60	21.37	23.55	24.55	25.64	55.45	68.87	65.71	84.41	92.46
50		21.01	21.62	23.74	24.79	26.15	55.78	69.16	66.17	84.74	93.06
100		21.96	22.51	24.60	25.62	25.67	55.69	69.08	65.45	84.36	93.08

Table 14. Sensitivity analysis of α on Qwen2-VL-7B and ViT-B/32 on CIRCO and CIRR datasets (default $\alpha = 0.45$ in our main manuscript).

CIRCO + CIRR →		CIRCO				CIRR				
Metrics		mAP@k				Recall@k			Recall _{Subset} @k	
α value		k=5	k=10	k=25	k=50	k=1	k=5	k=10	k=1	k=2
0.1		18.37	19.09	20.77	21.76	23.28	49.98	62.36	64.05	83.21
0.2		19.74	20.49	22.34	23.32	24.63	52.46	65.45	64.89	83.40
0.3		21.71	22.36	24.33	25.26	25.35	54.12	67.28	65.49	83.74
0.4		20.73	21.37	23.33	24.37	25.81	55.37	68.34	65.23	83.67
0.45		20.26	21.01	23.01	24.04	25.83	55.25	68.22	65.64	83.60
0.5		21.47	22.47	24.46	25.46	26.02	55.45	68.58	64.82	83.49
0.6		19.77	20.45	22.55	23.48	25.62	55.40	68.22	63.64	83.13
0.7		19.05	20.18	22.11	23.20	25.11	54.65	68.22	63.62	82.68

G. STiTCh In-Context Learning Details

We utilize an in-context learning method in Fig.8. To achieve ZS-CIR, each sample uses the same placeholder “<image_url>” instead of an actual reference image URL. By providing several example outputs, the model is able to understand the required reasoning process without an actual reference image. This approach ensures efficient reasoning in a zero-sample setting. Each text requires the model to focus on a specific object and provide a detailed description. This helps the model understand the key elements in the image and how they relate to each other. We use uniform placeholders <image_url> and <reference_image_url> to ensure that the input and output formats are consistent for easy model processing.

H. Limitations and Future Work

Although our method achieves strong performance, there remain several directions for future exploration. First, while the visual augmentation applied to target images is

lightweight and performed offline, our STiTCh requires approximately $M - 1$ times more memory than others. We leave memory optimization as future work, with potential directions including online strategies or coarse-to-fine retrieval. Second, when the query image depicts a complex scene involving multiple objects or relationships, and the accompanying modification text provides insufficient detail, our STiTCh may focus on the wrong or ambiguous object, leading to unexpected captions. This limitation is consistent with issues observed in prior CIREVL [17] and OSrCIR [36] models. Moreover, current benchmarks suffer from a false-negative problem. As noted in [27], each (reference image, modification) pair in FashionIQ can correspond to multiple valid target images, yet only one is annotated as ground truth. Consequently, semantically correct retrieval results may be unfairly penalized under existing evaluation protocols. We leave these challenges as promising directions for future research.



Figure 7. Visualization of the GeneCIS dataset on the 'Focus Object' task. Heatmaps before and after the transition on target image are shown. Captions generated by MLLMs often contain irrelevant visual noise (blue text), while the STT model effectively suppresses such noise and highlights the correct focus object (red text).

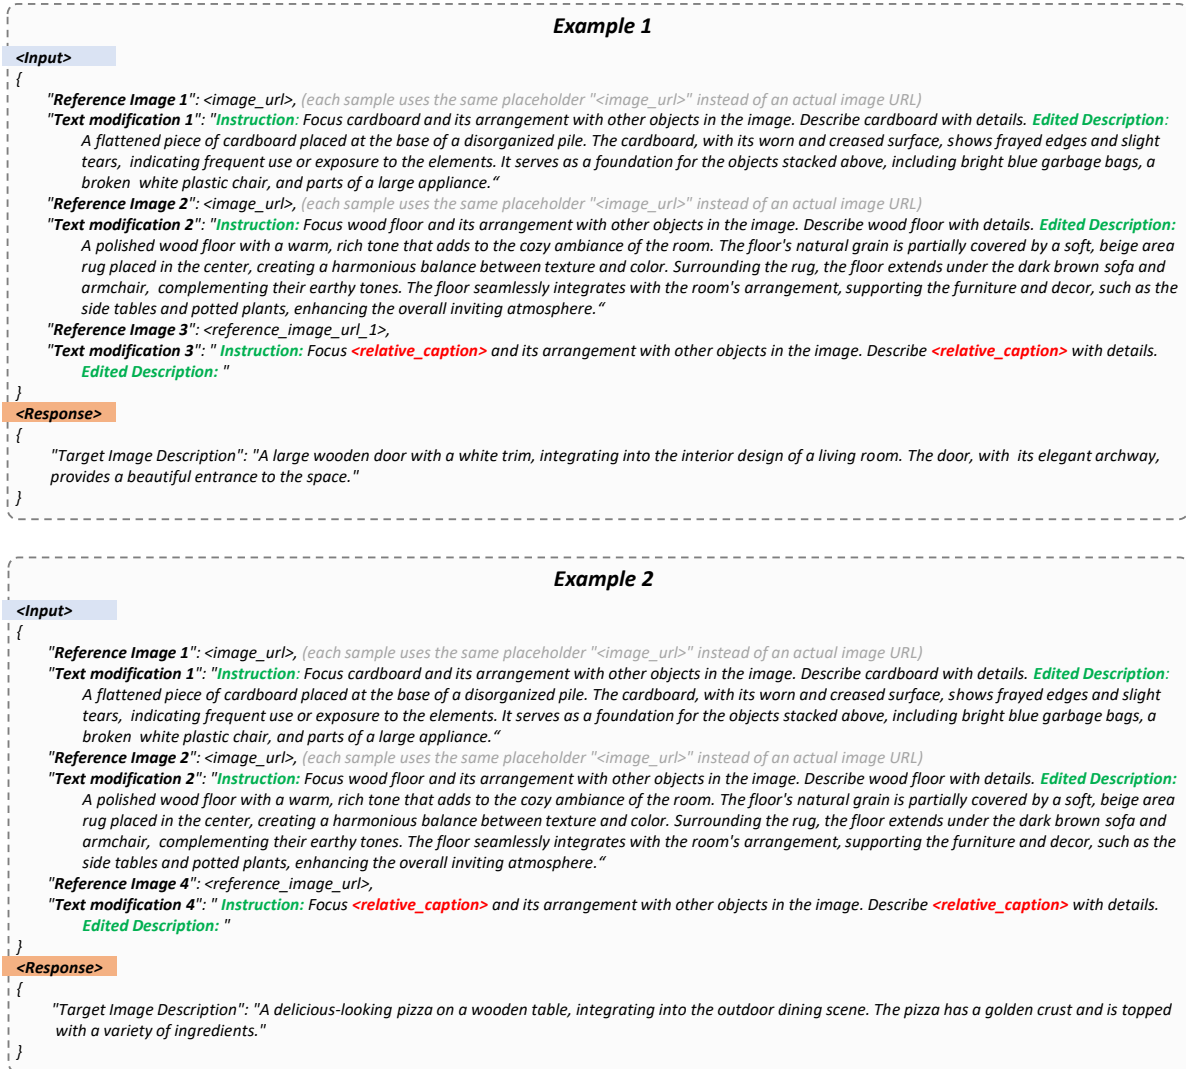


Figure 8. Examples of our in-context learning on GeneCIS dataset. Each sample uses the same placeholder "<image_url>" instead of an actual reference image URL.