

DriveMA: Rethinking Language Interfaces in Driving VLAs with One-Step Meta-Actions

Weicheng Zheng^{1,3}Yixin Huang^{1,3}Qiao Sun¹Derun Li¹Hang Zhao^{1,2*}¹Shanghai Qi Zhi Institute²Tsinghua University³Tongji University

Abstract: Driving Vision-Language-Action Models (Driving VLAs) commonly introduce natural-language reasoning as an intermediate interface for end-to-end planning, but reasoning-centric interfaces face three practical bottlenecks: obtaining high-quality reasoning annotations is difficult, generating and understanding long reasoning chains is challenging for compact models, and inference latency is substantially increased. In this paper, we rethink the design of language interfaces in Driving VLAs and show that concise one-step meta-actions are a simple yet effective alternative to verbose reasoning. Meta-actions provide semantic decision grounding while remaining low-entropy, and being automatically derivable from expert trajectories, enabling scalable supervision and reliable trajectory conditioning. Building on this interface, we propose DriveMA, which combines action-centric supervised training with a turn-level credit-assignment reinforcement learning framework that jointly optimizes meta-action correctness, trajectory quality, and trajectory–meta-action consistency. Experiments show that DriveMA already achieves a new state of the art on the Waymo End-to-End Driving Challenge with a 2B model, reaching a **Rater Feedback Score (RFS) of 8.060**, while its 4B version further improves the state of the art to **8.079**; DriveMA also obtains competitive performance on NAVSIM. Ablations demonstrate that one-step meta-actions offer a better practical trade-off between expressiveness, predictability, and inference efficiency than natural-language reasoning or finer-grained action sequences. Code, data, and models will be released to facilitate future research.

Keywords: Autonomous Driving, Vision-Language-Action, Meta-Action

1 Introduction

Recent Driving Vision-Language-Action Models (Driving VLAs) introduce language as an intermediate interface between visual inputs and action outputs, enabling explicit scene understanding, traffic reasoning, and decision grounding for end-to-end planning [1, 2]. Existing methods often use open-ended natural-language reasoning or structured reasoning stages [3] such as perception, reasoning, and decision making, and have shown advantages over direct trajectory prediction [4, 5].

However, effective reasoning does not necessarily provide an efficient language interface, as long-chain natural-language reasoning introduces bottlenecks from both the data and model perspectives. First, high-quality reasoning annotations are expensive to obtain: human annotation is difficult to scale, while rationales generated by stronger teacher models are hard to automatically verify for correctness and consistency. Second, compact Driving VLAs may struggle to generate low-hallucination reasoning and extract trajectory-relevant decisions from lengthy language contexts [3, 6]. Moreover, generating lengthy reasoning chains also increases inference latency, making it less suitable for real-time planning [7, 4]. Beyond these reasoning-side bottlenecks, Driving VLAs also suffer from a persistent language-action gap: even a correct high-level language decision may not be faithfully executed by the predicted trajectory [8, 9]. On the other hand, removing language entirely sacrifices semantic decision grounding and may encourage shortcut learning from historical motion states.

*Corresponding author: hangzhao@mail.tsinghua.edu.cn

This motivates a key question: **Can Driving VLAs use a more concise language interface than natural-language reasoning while still preserving semantic decision capability?**

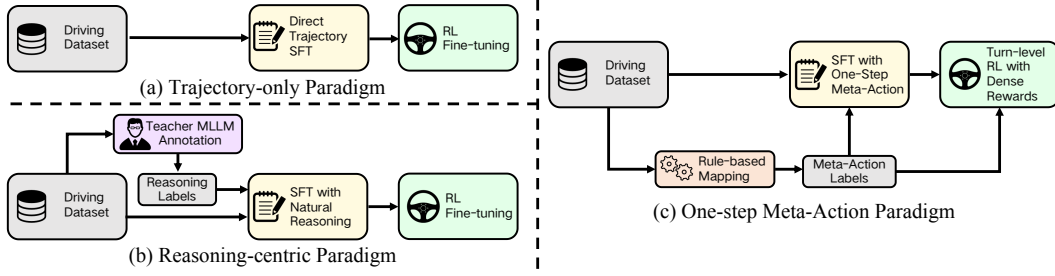


Figure 1: Comparison of three training paradigms for Driving VLAs.

We argue that meta-action provides such an interface. As illustrated in Fig. 1, meta-action differs from both trajectory-only prediction and reasoning-centric interfaces: it remains in the language domain, but compresses high-dimensional future motion into a short, low-entropy driving intention rather than verbose natural-language reasoning [10]. This makes it easier to predict as an intermediate step, following the coarse-to-fine logic of first resolving a semantic decision and then realizing it as continuous trajectories. Moreover, meta-actions can be automatically generated via trajectory clustering and rule-based mapping, making them scalable, verifiable, and directly supervisable.

Despite being a natural candidate interface, meta-action still faces two key challenges. First, what temporal granularity should it adopt? Multi-step meta-actions provide richer future motion descriptions, but they enlarge the decision space and amplify error propagation. Second, introducing meta-actions alone does not close the language-action gap, since the predicted trajectory may still be inconsistent with the predicted high-level decision. To address these challenges, we propose **DriveMA**, a Driving VLA framework built on one-step meta-actions. We systematically compare meta-action granularities under both oracle and predicted settings, and find that one-step meta-action achieves the best practical expressiveness–reliability trade-off. Building on the verifiability of meta-actions, we further introduce a turn-level credit-assignment reinforcement learning (RL) framework. It provides precise turn-level credit assignment and dense rewards for meta-action prediction and trajectory generation, while introducing an explicit consistency reward that maps predicted trajectories back to meta-actions to align language decisions with low-level planning.

Experiments show that one-step meta-action is a simple yet powerful language interface for Driving VLAs. Our method achieves a **new state of the art** on the Waymo Open Dataset Vision-based End-to-End Driving (WOD-E2E) [11], reaching a **Rater Feedback Score (RFS) of 8.079**, while obtaining competitive results on NAVSIM [12] and significantly outperforming reasoning-centric Driving VLAs. Ablations and oracle analyses further show that although natural-language reasoning has higher information capacity, its practical utility is limited by the model’s ability to generate and exploit long reasoning chains. In contrast, one-step meta-action exposes the most trajectory-relevant decision with better learnability and planning utility. Our main contributions are summarized as follows:

- We revisit the design of language interfaces in Driving VLAs and propose one-step meta-action as a simple, effective, and verifiable language-domain decision interface.
- We systematically study meta-action granularity, which shows that one-step meta-action achieves the best balance between expressiveness and prediction reliability.
- We introduce a turn-level credit-assignment RL framework. By exploiting the verifiability of meta-actions, the framework constructs a trajectory–meta-action consistency reward and combines dense rewards with turn-level precise credit assignment, effectively alleviating the language-action gap in Driving VLAs.
- DriveMA achieves a new state of the art on the WOD-E2E, competitive results on NAVSIM, and consistently outperforms representative reasoning-centric Driving VLAs.

2 Related Work

2.1 Language Interfaces for Driving VLAs

Recent language-based driving systems introduce natural language into end-to-end autonomous driving for instruction following, scene understanding, decision grounding, and interpretability [1, 2]. Following this direction, several Driving VLA methods adopt explicit reasoning as the intermediate interface between visual inputs and actions [13, 14, 15, 5, 10]. In particular, DriveVLM uses chain-of-thought reasoning to connect scene description, scene analysis, and hierarchical planning [4], while AutoVLA unifies reasoning and action generation in an autoregressive framework with adaptive thinking modes [5]. These methods demonstrate the value of language for driving, but still rely on relatively verbose reasoning interfaces, which increase annotation cost, generation difficulty, and inference latency. A parallel line of work questions whether explicit reasoning is necessary for strong end-to-end driving [16, 17]. NoRD shows that competitive Driving VLA performance can be obtained without dense reasoning annotations, reducing token overhead and training cost [16].

In contrast to both reasoning-centric VLAs and language-free alternatives, our work studies a middle-ground interface: a concise, low-entropy, and verifiable meta-action. Meta-actions preserve language-domain semantic decision grounding, while avoiding the data, generation, and latency burden of long-chain reasoning.

2.2 Language-Action Alignment

Language-action alignment is a central challenge for applying VLA models to autonomous driving. SimLingo aligns language and actions through multi-task training and Action Dreaming, grounding vision-language understanding in closed-loop driving behaviors [9]. LinkVLA improves language-action coupling by unifying language and action tokens in a shared token space and introducing an action-understanding objective to learn bidirectional trajectory–language mappings [18]. Drive-R1 mitigates reasoning-planning misalignment mainly through autonomous-driving domain alignment with large-scale Visual Question Answering (VQA) and reasoning supervision [8]. Rather than relying on implicit alignment from auxiliary tasks or domain data, DriveMA exploits the verifiability of meta-actions to explicitly measure and encourage consistency between the model’s stated high-level decision and its generated trajectory.

3 DriveMA

3.1 Overview

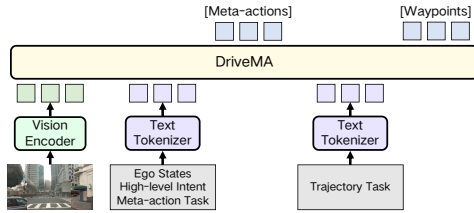


Figure 2: Overview of DriveMA.

As illustrated in Fig. 2, DriveMA is built upon a general vision-language model: visual observations are encoded by the vision encoder, while all non-visual inputs and outputs, including trajectory coordinates, are represented through the native text tokenizer.

3.2 Chunk-Based Meta-Action Labeling

Meta-actions can be automatically derived from expert trajectories, avoiding expensive human annotations or difficult-to-verify teacher-generated reasoning. Given an expert trajectory τ^* over horizon

T , we partition it into non-overlapping chunks of size c and map each chunk to a discrete meta-action:

$$m_l^* = \Phi(\tau_{[t_l, t_l+c]}^*).$$

Here, Φ is a rule-based trajectory-to-action mapping function. Each meta-action consists of longitudinal and lateral components, determined from chunk-level motion statistics such as velocity, acceleration, displacement, and heading variation. The thresholds are estimated by trajectory clustering over the training set, and the full action space and mapping rules are provided in the appendix.

The chunk size c controls the temporal granularity of meta-actions. DriveMA uses $c = T$ by default, where a single one-step meta-action summarizes the entire planning horizon.

3.3 Action-Centric Supervised Training

Before training the full planning task, DriveMA first performs action-centric supervised pretraining to adapt the general VLM to autonomous driving and warm up the meta-action prediction task. This stage is motivated by prior Driving VLA studies showing that domain-specific alignment is important for transferring general VLMs to driving scenarios [5, 8, 10].

Driving Action Alignment Pretraining. This stage contains two types of supervision. First, we use meta-action prediction data automatically generated from expert trajectories, where the model is trained to predict the expert meta-action from the driving input only, i.e., $x \rightarrow m^*$, without generating future waypoints. This provides a direct warmup for the intermediate decision interface. Second, we incorporate 240K action-related Driving VQA samples from public datasets, selecting samples related to driving intention, action decision, and risk-aware behavior. These samples further align the general VLM with driving-domain perception and decision knowledge.

Meta-Action-Conditioned Trajectory SFT. After action alignment pretraining, we train the full meta-action-guided planning task, where each sample follows the multi-turn target sequence $x \rightarrow m^* \rightarrow \tau^*$. This stage teaches the model to condition trajectory generation on the expert meta-action decision.

3.4 Turn-Level Credit Assignment Reinforcement Learning

Although supervised fine-tuning introduces the meta-action language interface into planning and improves the model’s planning ability, it may still produce trajectories that are inconsistent with its own high-level decisions. To address this language-action gap, DriveMA exploits the verifiability of meta-actions and introduces a turn-level credit assignment RL framework.

Multi-Turn Rollout. Given a driving input x , we sample G completions from the old policy $\pi_{\theta_{\text{old}}}$, denoted as $o^i = (o_1^i, o_2^i)$ for $i = 1, \dots, G$, where o_1^i is the meta-action prediction turn and o_2^i is the trajectory prediction turn. Let T_j^i denote the token indices of the j -th assistant turn in the i -th completion.

Dense Reward Design. DriveMA assigns separate rewards to the two assistant turns:

$$r_1^i = R_{\text{meta}}(o_1^i, M^*), \quad r_2^i = w_{\text{traj}} R_{\text{traj}}(o_2^i, \tau^*) + w_{\text{cons}} R_{\text{cons}}(o_1^i, o_2^i).$$

The first reward evaluates whether the predicted meta-action matches the expert label, while the second combines trajectory quality with language-action consistency. For consistency, we parse the predicted trajectory $\hat{\tau}^i$ from o_2^i , map it back to a discrete meta-action with the same rule-based function Φ , and compare it with the meta-action $\hat{M}^i$ predicted in the first turn:

$$R_{\text{cons}}(o_1^i, o_2^i) = S(\Phi(\hat{\tau}^i), \hat{M}^i),$$

where $S(\cdot, \cdot)$ measures meta-action agreement. This reward encourages the model not only to state a high-level decision, but also to generate a trajectory that executes it.

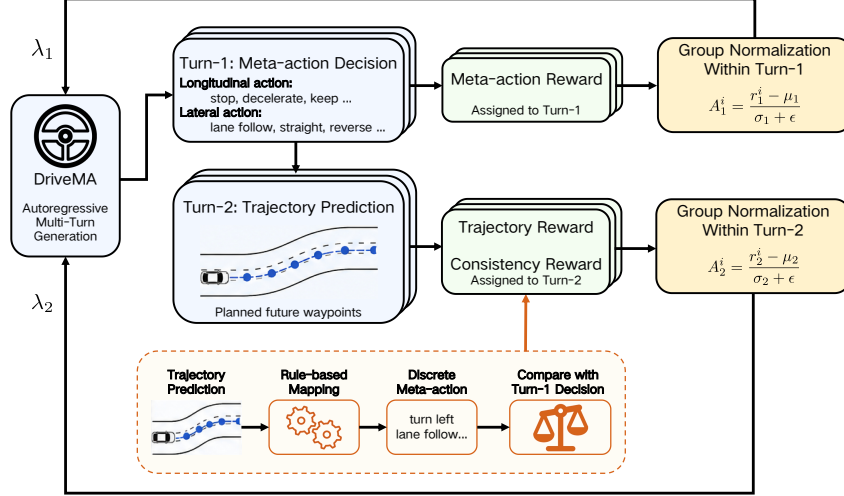


Figure 3: **Turn-level credit assignment RL in DriveMA.** DriveMA assigns meta-action rewards to the decision turn and trajectory/consistency rewards to the planning turn. Rewards are normalized within each turn, enabling dense supervision and precise credit assignment for language-action alignment.

Turn-Level Advantage Normalization. Standard GRPO [19, 20] assigns a single sequence-level reward to all generated tokens, which is suboptimal for our multi-turn setting because different turns optimize different objectives. DriveMA instead normalizes rewards separately within each turn:

$$A_j^i = \frac{r_j^i - \mu_j}{\sigma_j + \epsilon}, \quad j \in \{1, 2\},$$

where μ_j and σ_j are computed over the G sampled completions for the j -th turn. Thus, meta-action rewards update only meta-action tokens, while trajectory and consistency rewards update trajectory tokens, yielding more precise credit assignment.

Optimization Objective. The final turn-level GRPO objective is:

$$\mathcal{J}_{\text{DriveMA}}(\theta) = \mathbb{E}_{q, \{o^i\}_{i=1}^G \sim \pi_{\theta_{\text{old}}}} \left[\frac{1}{G} \sum_{i=1}^G \frac{\sum_{j=1}^2 \lambda_j \frac{1}{|T_j^i|} \sum_{t \in T_j^i} s_{j,t}^i(\theta)}{\sum_{j=1}^2 \lambda_j} \right] - \beta D_{\text{KL}}(\pi_{\theta} \| \pi_{\text{ref}}),$$

where λ_j controls the relative weight of each turn, and the clipped policy surrogate is

$$s_{j,t}^i(\theta) = \min(\rho_{i,t}(\theta) A_j^i, \text{clip}(\rho_{i,t}(\theta), 1 - \epsilon_{\text{low}}, 1 + \epsilon_{\text{high}}) A_j^i),$$

with $\rho_{i,t}(\theta) = \pi_{\theta}(o_t^i | q, o_{<t}^i) / \pi_{\theta_{\text{old}}}(o_t^i | q, o_{<t}^i)$. The KL term is applied as a separate regularizer to constrain policy drift from the reference model.

4 Experiments

4.1 Experiments Setup

Datasets. We evaluate DriveMA on two end-to-end driving benchmarks: WOD-E2E [11] and NAVSIM [12]. WOD-E2E focuses on challenging long-tail scenarios such as construction zones and safety-critical interactions, and we primarily report its official preference-based metric, RFS. NAVSIM is a planning-oriented autonomous driving benchmark built on OpenScene/nuPlan, and we primarily report PDMS, a closed-loop metric covering safety, progress, and comfort. In addition, we use open-source driving VQA datasets, including WaymoQA [21], IDKB [22], and LingoQA [23], comprising a total of 240K samples, for action-centric pretraining.

Implementation Details. For Waymo, we downsample the provided 10Hz data by a factor of five for training, and DriveMA predicts 5s future trajectories at 1Hz. During RL, we use the official preference subset with 479 expert-scored trajectory samples and instantiate R_{traj} with RFS. For NAVSIM, DriveMA predicts 4s future trajectories at 1Hz, uses the official trainval split with 103K samples, and holds out 18K samples for RL with R_{traj} instantiated by PDMS. For both benchmarks, the model takes only current-frame images from the three front-facing cameras as visual input. DriveMA is built on the Qwen3.5 model family [24]; training hyperparameters and prompt formats are provided in the appendix.

4.2 Main Results

Table 1: Results on the WOD-E2E. $\uparrow$ indicates higher is better, while $\downarrow$ indicates lower is better. Best results are shown in **bold**, and second-best results are underlined.

Method	Reasoning-centric	RFS Overall $\uparrow$	RFS Spotlight $\uparrow$	ADE@5s $\downarrow$	ADE@3s $\downarrow$
<i>E2E planning methods</i>					
Swin-Trajectory [25]	–	7.543	6.670	2.814	1.208
DiffusionLTF [26]	–	7.717	6.414	2.891	1.356
UniPlan [27]	–	7.780	6.654	2.986	1.308
FROST-Drive [28]	–	7.856	7.094	3.565	2.537
RAP [29]	–	8.043	<u>7.204</u>	<u>2.646</u>	1.174
<i>Driving VLA methods</i>					
AutoVLA [5]	Yes	7.557	6.944	2.958	1.351
NoRD [16]	No	7.709	–	–	1.250
HMVLM [13]	Yes	7.737	6.727	3.072	1.327
Poutine [15]	Yes	7.986	6.893	2.742	1.206
DriveMA-2B	No	8.060	7.251	2.616	1.154
DriveMA-4B	No	8.079	7.169	2.670	<u>1.166</u>

WOD-E2E. As shown in Table 1, DriveMA sets a new state of the art on the WOD-E2E. DriveMA-2B and DriveMA-4B achieve **8.060** and **8.079** RFS Overall, respectively, and outperform all previous methods. Notably, DriveMA-2B attains the best results on nearly all key metrics, including **7.251** RFS Spotlight on the official challenging subset and lowest ADE. Compared with reasoning-centric Driving VLAs, DriveMA consistently shows stronger planning performance, demonstrating the effectiveness of one-step meta-actions as a compact language interface.

Table 2: Results on the NAVSIM v1. All metrics are reported with one decimal place, and higher is better for all metrics. Best results are shown in **bold**, and second-best results are underlined.

Method	Reasoning-centric	PDMS	Collision	Area	Progress	TTC	Comfort
<i>End-to-end planning methods</i>							
TransFuser [30]	–	84.0	97.7	92.8	79.2	92.8	100.0
Hydra-MDP [31]	–	86.5	98.3	96.0	78.7	94.6	100.0
TrajHF [32]	–	86.4	96.6	96.6	84.5	92.1	100.0
DiffusionDriveV2 [33]	–	<u>91.2</u>	98.3	97.9	87.5	94.8	99.9
RAP [29]	–	93.8	99.1	<u>98.9</u>	86.0	<u>96.7</u>	100.0
<i>Driving VLA methods</i>							
AutoVLA [5]	Yes	89.1	98.4	95.6	81.9	98.0	99.9
DriveVLA-W0 [17]	No	90.2	98.7	99.1	83.3	95.3	99.3
ReCogDrive [14]	Yes	90.8	97.9	97.3	<u>87.3</u>	94.9	100.0
DriveMA-2B	No	90.5	<u>98.9</u>	97.8	85.3	95.2	100.0
DriveMA-4B	No	<u>91.2</u>	98.7	97.8	86.7	95.5	99.9

NAVSIM Benchmark. Table 2 reports the closed-loop results on NAVSIM. DriveMA achieves competitive performance compared with state-of-the-art end-to-end planners, with DriveMA-4B reaching 91.2 PDMS and outperforming existing VLA-based methods.

Overall, these results show that one-step meta-actions provide an efficient and scalable interface for strong end-to-end driving planning.

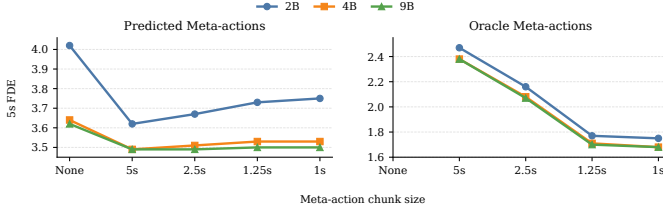



Figure 4: Meta-action granularity analysis on the WOD-E2E validation subset. The plot reports 5s FDE under predicted and oracle meta-action settings across model scales.

Table 3: Complexity of longitudinal action patterns under different chunk sizes in the WOD-E2E training set.

Size	Obs.	Entropy
5s	4	1.761
2.5s	14	2.871
1.25s	122	4.453
1s	221	5.100

Table 4: Ablation of language-interface formats on the long-tail Waymo validation subset. We report 5s FDE. The right plot reports the average inference latency on DriveMA-2B.

Setting	Model	None	Open-ended	Structured	Meta-action
Predicted	2B	4.02	3.93	3.88	3.62
	4B	3.64	3.57	3.54	3.49
	9B	3.62	3.52	3.50	3.49
Oracle	2B	—	2.51	2.48	2.47
	4B	—	2.33	2.30	2.38
	9B	—	2.29	2.29	2.38

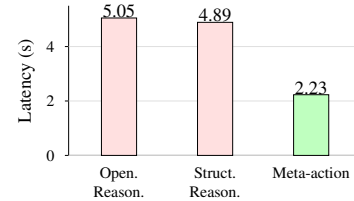

4.3 Meta-Action Granularity Analysis

We analyze the temporal granularity of meta-actions on the WOD-E2E validation subset. We vary the longitudinal chunk size from a single 5s action to finer multi-step actions, while keeping the lateral component as one 5s action, since lateral prediction is nearly saturated whereas longitudinal decisions remain the main bottleneck. Each setting is evaluated with 5s FDE across 2B, 4B, and 9B models under both predicted and oracle meta-action settings, where meta-actions are either generated by the model or replaced with ground-truth labels.

As shown in Fig. 4, finer-grained chunks consistently improve oracle performance, but this gain does not transfer to the predicted setting. Instead, predicted performance across model scales converges around the 5s one-step meta-action, where the 4B model already reaches the saturation point and scaling to 9B brings negligible additional benefit. This is because smaller chunks rapidly enlarge the decision space: Table 3 shows that observed longitudinal action patterns increase from 4 to 221 as the chunk size decreases from 5s to 1s. Thus, fine-grained meta-actions provide stronger oracle guidance but are harder to predict reliably. We therefore adopt the 4B one-step setting as the primary DriveMA configuration, while also reporting the 2B variant since it already achieves state-of-the-art performance on WOD-E2E.

4.4 Comparison of language interfaces

We compare one-step meta-action with open-ended and structured reasoning on the WOD-E2E validation subset, using Qwen3.5-2B, 4B, and 9B under both predicted and oracle settings. The reasoning annotations are built with a drafting-reflection-correction pipeline, and their final decision step is derived from the same meta-action labels. To avoid unfairly disadvantaging reasoning interfaces due to insufficient optimization [34], we train all language-interface variants with 8 epochs of SFT and report the best checkpoint selected on the validation subset.

Table 4 shows that one-step meta-action consistently performs best under predicted inference across all model scales. In addition to better prediction accuracy, meta-action also reduces inference latency. Structured reasoning is stronger than open-ended reasoning, but both lag behind meta-action when generated by the model itself. Under oracle inference, reasoning surpasses meta-action only at larger scales, indicating that reasoning offers higher potential but suffers from both generation and utilization bottlenecks. Therefore, one-step meta-action achieves a better practical trade-off: it is less expressive than full reasoning, but is easier to predict and more reliably exploited for planning.

Table 5: Ablation study of the training strategy. R_{traj} , R_{cons} , and R_{meta} denote the trajectory reward, language-action consistency reward, and meta-action reward, respectively. $\uparrow$ indicates higher is better, while $\downarrow$ indicates lower is better. L-A Consistency is computed in the same way as the language-action consistency reward. Best results are shown in **bold**.

Training Objective	RFS Overall $\uparrow$	RFS Spotlight $\uparrow$	ADE@5s $\downarrow$	L-A Consistency (%) $\uparrow$
<i>SFT and vanilla GRPO baselines</i>				
SFT w/o Action-Centric Pretraining	7.804	6.832	2.802	90.59
SFT w/ Action-Centric Pretraining	7.893	7.189	2.774	91.31
Vanilla GRPO	7.978	7.087	2.660	95.95
<i>Reward ablation under turn-level credit assignment RL</i>				
R_{traj}	8.009	7.146	2.627	88.50
$R_{\text{traj}} + R_{\text{cons}}$	8.052	7.029	2.674	98.80
$R_{\text{traj}} + R_{\text{meta}}$	8.038	7.018	2.646	91.32
$R_{\text{traj}} + R_{\text{cons}} + R_{\text{meta}}$	8.060	7.251	2.616	98.79

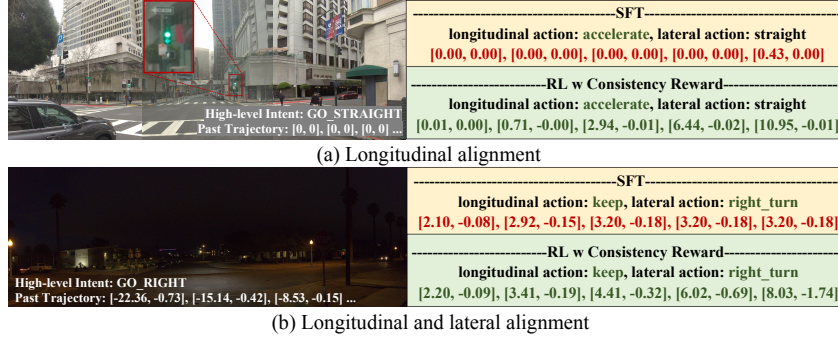


Figure 5: **Qualitative examples of language-action alignment.** SFT can predict correct high-level meta-actions but still generate inconsistent trajectories. With the trajectory–meta-action consistency reward, DriveMA better translates predicted meta-actions into executable trajectories.

4.5 Ablation Study of Training Strategy

Table 5 analyzes the contribution of each training component. Action-centric pretraining provides a strong foundation for meta-action-guided planning, improving RFS Overall from 7.804 to 7.893 and RFS Spotlight from 6.832 to 7.189 over direct SFT. The larger gain on Spotlight suggests better generalization to challenging long-tail scenarios. Turn-level credit assignment further improves over vanilla GRPO under comparable reward supervision, increasing RFS Overall from 7.978 to 8.060 by precisely assigning rewards to their corresponding generation turns.

The reward ablation shows that dense language-action supervision is crucial. Adding R_{cons} substantially improves L-A Consistency from 88.50% to 98.80%, indicating that the consistency reward effectively aligns predicted trajectories with stated meta-actions. As qualitatively shown in Fig. 5, DriveMA better translates correct high-level meta-actions into executable trajectories in both longitudinal and lateral behaviors. The full reward combination achieves the best overall planning performance, suggesting that trajectory quality, action correctness, and language-action consistency are complementary.

5 Conclusion

In this paper, we rethink language interfaces for Driving VLAs and show that concise one-step meta-actions provide an effective alternative to long-chain natural-language reasoning. By combining verifiable meta-action supervision with turn-level credit-assignment RL, DriveMA improves meta-action prediction, trajectory quality, and trajectory–meta-action consistency, achieving a new state of the art on WOD-E2E and competitive performance on NAVSIM. We hope this work encourages future Driving VLA research to focus not only on making language interfaces more expressive, but also on making them more verifiable, efficient, and actionable for end-to-end planning.

References

- [1] H. Shao, Y. Hu, L. Wang, G. Song, S. L. Waslander, Y. Liu, and H. Li. Lmdrive: Closed-loop end-to-end driving with large language models. In *CVPR*, 2024.
- [2] C. Sima, K. Renz, K. Chitta, L. Chen, H. Zhang, C. Xie, J. Beißwenger, P. Luo, A. Geiger, and H. Li. Drivelm: Driving with graph visual question answering. In *ECCV*, 2024.
- [3] J. Wei, X. Wang, D. Schuurmans, M. Bosma, F. Xia, E. Chi, Q. V. Le, D. Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. In *NeurIPS*, 2022.
- [4] X. Tian, J. Gu, B. Li, Y. Liu, Z. Zhao, Y. Wang, K. Zhan, P. Jia, X. Lang, and H. Zhao. Drivevlm: The convergence of autonomous driving and large vision-language models. In *CoRL*, 2024.
- [5] Z. Zhou, T. Cai, S. Z. Zhao, Y. Zhang, Z. Huang, B. Zhou, and J. Ma. Autovla: A vision-language-action model for end-to-end autonomous driving with adaptive reasoning and reinforcement fine-tuning. In *NeurIPS*, 2025.
- [6] D. Paul, R. West, A. Bosselut, and B. Faltings. Making reasoning matter: Measuring and improving faithfulness of chain-of-thought reasoning. In *Findings of the Association for Computational Linguistics: EMNLP*, 2024.
- [7] R. Zhang, J. Xie, W. Zhang, W. Chen, X. Tan, X. Wan, and G. Li. Adadrive: Self-adaptive slow-fast system for language-grounded autonomous driving. In *ICCV*, 2025.
- [8] Y. Li, M. Tian, D. Zhu, J. Zhu, Z. Lin, Z. Xiong, and X. Zhao. Drive-r1: Bridging reasoning and planning in vlms for autonomous driving with reinforcement learning, 2025.
- [9] K. Renz, L. Chen, E. Arani, and O. Sinavski. Simlingo: Vision-only closed-loop autonomous driving with language-action alignment. In *CVPR*, 2025.
- [10] W. Zheng, X. Mao, N. Ye, P. Li, K. Zhan, X. Lang, and H. Zhao. Driveagent-r1: Advancing VLM-based autonomous driving with active perception and hybrid thinking. In *ICLR*, 2026.
- [11] R. Xu, H. Lin, W. Jeon, H. Feng, Y. Zou, L. Sun, J. Gorman, E. Tolstaya, S. Tang, B. White, et al. Wod-e2e: Waymo open dataset for end-to-end driving in challenging long-tail scenarios, 2025.
- [12] D. Dauner, M. Hallgarten, T. Li, X. Weng, Z. Huang, Z. Yang, H. Li, I. Gilitschenski, B. Ivanovic, M. Pavone, et al. Navsim: Data-driven non-reactive autonomous vehicle simulation and benchmarking. In *NeurIPS*, 2024.
- [13] D. Wang, Y. Song, Z. He, K. Chen, X. Pan, L. Deng, and W. Gu. Hmvlm: Multistage reasoning-enhanced vision-language model for long-tailed driving scenarios, 2025.
- [14] Y. Li, K. Xiong, X. Guo, F. Li, S. Yan, G. Xu, L. Zhou, L. Chen, H. Sun, B. Wang, K. Ma, G. Chen, H. Ye, W. Liu, and X. Wang. Recogdrive: A reinforced cognitive framework for end-to-end autonomous driving. In *ICLR*, 2026.
- [15] L. Rowe, R. de Schaetzen, R. Girgis, C. Pal, and L. Paull. Poutine: Vision-language-trajectory pre-training and reinforcement learning post-training enable robust end-to-end autonomous driving, 2025.
- [16] I. Rawal, S. Gupta, Y. Hu, and W. Zhan. Nord: A data-efficient vision-language-action model that drives without reasoning. In *CVPR*, 2026.
- [17] Y. Li, S. Shang, W. Liu, B. Zhan, H. Wang, Y. Wang, Y. Chen, X. Wang, Y. An, C. Tang, et al. Drivevla-w0: World models amplify data scaling law in autonomous driving. In *ICLR*, 2026.

- [18] X. Wang, Q. Liu, W. Ding, Z. Yang, W. Li, C. Liu, B. Li, K. Zhan, X. Lang, and W. Chen. Unifying language-action understanding and generation for autonomous driving, 2026.
- [19] D. Guo, D. Yang, H. Zhang, J. Song, P. Wang, Q. Zhu, R. Xu, R. Zhang, S. Ma, X. Bi, X. Zhang, X. Yu, Y. Wu, Z. F. Wu, Z. Gou, Z. Shao, Z. Li, Z. Gao, A. Liu, B. Xue, B. Wang, B. Wu, B. Feng, C. Lu, C. Zhao, C. Deng, C. Ruan, D. Dai, D. Chen, D. Ji, E. Li, F. Lin, F. Dai, F. Luo, G. Hao, G. Chen, G. Li, H. Zhang, H. Xu, H. Ding, H. Gao, H. Qu, H. Li, J. Guo, J. Li, J. Chen, J. Yuan, J. Tu, J. Qiu, J. Li, J. L. Cai, J. Ni, J. Liang, J. Chen, K. Dong, K. Hu, K. You, K. Gao, K. Guan, K. Huang, K. Yu, L. Wang, L. Zhang, L. Zhao, L. Wang, L. Zhang, L. Xu, L. Xia, M. Zhang, M. Zhang, M. Tang, M. Zhou, M. Li, M. Wang, M. Li, N. Tian, P. Huang, P. Zhang, Q. Wang, Q. Chen, Q. Du, R. Ge, R. Zhang, R. Pan, R. Wang, R. J. Chen, R. L. Jin, R. Chen, S. Lu, S. Zhou, S. Chen, S. Ye, S. Wang, S. Yu, S. Zhou, S. Pan, S. S. Li, S. Zhou, S. Wu, T. Yun, T. Pei, T. Sun, T. Wang, W. Zeng, W. Liu, W. Liang, W. Gao, W. Yu, W. Zhang, W. L. Xiao, W. An, X. Liu, X. Wang, X. Chen, X. Nie, X. Cheng, X. Liu, X. Xie, X. Liu, X. Yang, X. Li, X. Su, X. Lin, X. Q. Li, X. Jin, X. Shen, X. Chen, X. Sun, X. Wang, X. Song, X. Zhou, X. Wang, X. Shan, Y. K. Li, Y. Q. Wang, Y. X. Wei, Y. Zhang, Y. Xu, Y. Li, Y. Zhao, Y. Sun, Y. Wang, Y. Yu, Y. Zhang, Y. Shi, Y. Xiong, Y. He, Y. Piao, Y. Wang, Y. Tan, Y. Ma, Y. Liu, Y. Guo, Y. Ou, Y. Wang, Y. Gong, Y. Zou, Y. He, Y. Xiong, Y. Luo, Y. You, Y. Liu, Y. Zhou, Y. X. Zhu, Y. Huang, Y. Li, Y. Zheng, Y. Zhu, Y. Ma, Y. Tang, Y. Zha, Y. Yan, Z. Z. Ren, Z. Ren, Z. Sha, Z. Fu, Z. Xu, Z. Xie, Z. Zhang, Z. Hao, Z. Ma, Z. Yan, Z. Wu, Z. Gu, Z. Zhu, Z. Liu, Z. Li, Z. Xie, Z. Song, Z. Pan, Z. Huang, Z. Xu, Z. Zhang, and Z. Zhang. Deepseek-r1 incentivizes reasoning in llms through reinforcement learning. *Nature*, 2025.
- [20] Z. Shao, P. Wang, Q. Zhu, R. Xu, J. Song, X. Bi, H. Zhang, M. Zhang, Y. Li, Y. Wu, et al. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. 2024.
- [21] S. Yu, S. Lee, N. Kim, J. Shin, J. Park, W. Ryu, R. Jung, and H. Shim. Waymoqa: A multi-view visual question answering dataset for safety-critical reasoning in autonomous driving, 2026.
- [22] Y. Lu, Y. Yao, J. Tu, J. Shao, Y. Ma, and X. Zhu. Can lvlms obtain a driver’s license? a benchmark towards reliable agi for autonomous driving. In *AAAI*, 2025.
- [23] A.-M. Marcu, L. Chen, J. Hünemann, A. Karnsund, B. Hanotte, P. Chidananda, S. Nair, V. Badrinarayanan, A. Kendall, J. Shotton, et al. Lingoqa: Visual question answering for autonomous driving. In *ECCV*, 2024.
- [24] Q. Team. Qwen3.5: Accelerating productivity with native multimodal agents, February 2026. URL <https://qwen.ai/blog?id=qwen3.5>.
- [25] S. Park, G. Shin, J. Song, S. Lee, H. Shon, B. Park, J. Na, H. Jeong, and S. Hwang. Swin-trajectory: Technical report for 2025 waymo vision-based end-to-end driving challenge. *Waymo Open Dataset Workshop (WAD) at CVPR*, 2025.
- [26] L. Nguyen, M. Fauth, B. Jaeger, D. Dauner, M. Igl, A. Geiger, and K. Chitta. Open x-av: Unifying end-to-end autonomous driving datasets. *Waymo Open Dataset Workshop (WAD) at CVPR*, 2025.
- [27] B. Liao, S. Chen, H. Yin, B. Jiang, C. Wang, S. Yan, X. Zhang, X. Li, Y. Zhang, Q. Zhang, et al. Diffusiondrive: Truncated diffusion model for end-to-end autonomous driving. In *CVPR*, 2025.
- [28] Z. Dong, Y. Zhu, Y. Wu, and Y. Sun. Frost-drive: Scalable and efficient end-to-end driving with a frozen vision encoder. In *CVPR*, 2026.
- [29] L. Feng, Y. Gao, E. Zablocki, Q. Li, W. Li, S. Liu, M. Cord, and A. Alahi. RAP: 3d rasterization augmented end-to-end planning. In *ICLR*, 2026.
- [30] K. Chitta, A. Prakash, B. Jaeger, Z. Yu, K. Renz, and A. Geiger. Transfuser: Imitation with transformer-based sensor fusion for autonomous driving. *IEEE TPAMI*, 2023.

- [31] Z. Li, K. Li, S. Wang, S. Lan, Z. Yu, Y. Ji, Z. Li, Z. Zhu, J. Kautz, Z. Wu, et al. Hydra-mdp: End-to-end multimodal planning with multi-target hydra-distillation. 2024.
- [32] D. Li, C. Li, Y. Wang, J. Ren, X. Wen, P. Li, L. Xu, K. Zhan, P. Jia, X. Lang, N. Xu, and H. Zhao. Learning personalized driving styles via reinforcement learning from human feedback, 2025.
- [33] J. Zou, S. Chen, B. Liao, Z. Zheng, Y. Song, L. Zhang, Q. Zhang, W. Liu, and X. Wang. Diffusiondrivev2: Reinforcement learning-constrained truncated diffusion modeling in end-to-end autonomous driving. 2025.
- [34] Q. Ren, P. Wang, R. Cai, S. Shao, D. Guo, Y. Xie, Y. Li, Q. Zhang, X. Hu, J. Shao, and D. Liu. Rethinking generalization in reasoning sft: A conditional analysis on optimization, data, and model capability, 2026.