

REDUCING OBJECT HALLUCINATION IN LVLMS VIA EMPHASIZING IMAGE-NEGATIVE TOKENS

Meng Shen

Nanyang Technological University
meng005@e.ntu.edu.sg

Minghao Wu

Monash University
minghao.wu@monash.edu

Deepu Rajan

Nanyang Technological University
ASDRajan@ntu.edu.sg

ABSTRACT

Object hallucination is a significant challenge that hinders the application of large vision-language models (LVLMS) in practice. We hypothesize that one possible origin of hallucination is the model’s tendency to prioritize text generation over meaningful interaction with images. To explore this, we examine the generation process and categorize text tokens into three groups: image-positive, invariant, and negative, based on their visual dependence on input image tokens. Our analysis reveals that most generated tokens are minimally influenced by the image information. This suggests that during the model’s training stage, more emphasis is placed on learning how to follow textual instructions, rather than extracting information from images. Based on this finding, we propose adjusting the training weights of different tokens depending on their visual dependence to control hallucination. Additionally, we remove a portion of the training data that potentially contains more hallucinations as a data filtering strategy. Both methods achieve a reduction in hallucination without compromising response length or introducing additional computational costs during inference. We validate our methods across three LVLMS variants, demonstrating the effectiveness and general applicability.

1 INTRODUCTION

In recent years, large vision-language models (LVLMS) have integrated vision capabilities into language models, opening new avenues for AI applications (Liu et al., 2024; OpenAI, 2023; Beyer et al., 2024). However, one of the most challenging issues in deploying LVLMS in real-world scenarios is the problem of hallucination. Hallucination occurs when the models generate plausible but inaccurate content that is not grounded in the image or not related to the provided text prompt. This issue can be particularly harmful in downstream tasks such as medical diagnostics (Chen et al., 2024) and robotics (Huang et al., 2023), where the accurate extraction of image details is required. Therefore, addressing the hallucination problem is crucial for applying LVLMS in various practical applications.

To mitigate hallucination in LVLMS, several approaches have been proposed (Huang et al., 2024; Leng et al., 2024; Yue et al., 2024; Liu et al., 2023). However, these approaches often require additional instructional data, which are expensive to collect, or incur extra computational costs during inference. In this work, we aim to reduce hallucination during the training phase. While EOS (Yue et al., 2024) mitigates hallucination by training the model to stop generating redundant responses, which are often hallucinatory, it produces overly short answers that may not be desirable. We propose a method to reduce hallucination that does not require additional instructional data or increase computational costs during inference, while maintaining appropriate response lengths.

We begin by investigating the origins of hallucinations in LVLMS, focusing on the influence of images on the probability distribution of tokens in generated responses. We propose a visual dependence metric by feeding LVLMS a clean image and a noisy image, and group the response tokens

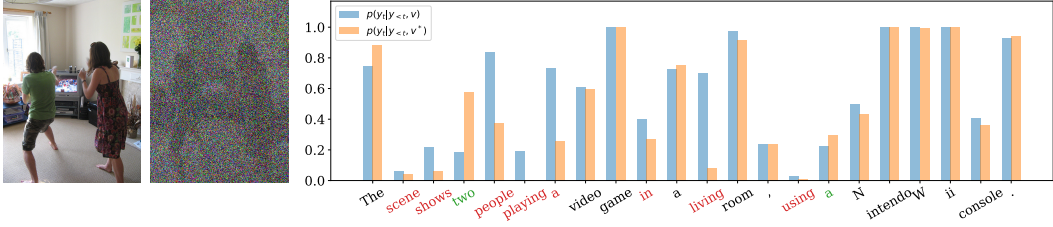


Figure 1: The left figure displays the input image and the middle figure is the noisy image with diffusion noise at time step 900. The model (fine-tuned LLaVA-v1.5-7b) is asked to generate a descriptive response given the image. The right figure shows the probability of each token y_t when provided with a clean image v and a noisy image v^* . The **image-positive**, **image-invariant** and **image-negative** tokens are marked as **red**, **black** and **green**.

into three distinct categories based on this metric. **Figure 1** illustrates the changes in token probabilities when a clean input image is replaced by a noisy one. In this paper, we demonstrate that the origins of hallucinations in generated text tokens vary based on their degree of correlation between image and text tokens.

To explore how different token types affect hallucination during the training stage, we propose scaling the loss of tokens according to their dependence on the image. Unlike traditional supervised fine-tuning of LVLMs, which treats all tokens equally, our approach adjusts the loss by suppressing or amplifying certain tokens throughout training. We find that emphasizing image-positive tokens during training results in both increased hallucinations and richer responses with more visual details. In contrast, emphasizing image-negative tokens while suppressing image-positive and image-invariant tokens helps reduce hallucinations. Additionally, we implement a simple data filtering strategy to remove instructional samples based on their visual dependence. We find that removing a certain portion of instructions with high visual dependence effectively mitigates hallucinations.

2 RELATED WORKS

Causes of Hallucination In the context of LVLMs, we focus on the image hallucination. The causes can be understood from several perspectives. **Training Data:** Misaligned visual instructional training data (Sun et al., 2023) and data containing hallucinations (Liu et al., 2023) can introduce hallucination into the model during training. **Decreased Visual Information:** As the length of the generated response increases, the model is more likely to produce hallucinated content due to the gradual loss of visual information (Favero et al., 2024; Yue et al., 2024; Zhou et al., 2023). **Language Prior:** Hallucination can occur when the model’s language processing ability exceeds its vision processing ability, leading the model to overlook the image content (Zhou et al., 2023; Leng et al., 2024; Han et al., 2022). **Visual Encoder:** The current design of LVLMs often involves extracting hidden states from a pretrained vision model and feeding them into a language model. Therefore, when the visual representations are not good enough, the model is not able to generate consistent responses (Tong et al., 2024; Jiang et al., 2023).

Mitigate Hallucination The hallucination reduction methods can be categorized into three classes based on the stage they target: data preparation, training and inference. **Data curation** methods (Liu et al., 2023) focus on collecting high-quality data with less hallucination, ensuring that the trained model produces robust responses. **Training-based** methods (Yue et al., 2024; Zhai et al., 2023) concentrate on manipulating the training process by either adjusting the generation length or training a plug-in module to control the level of hallucination. **Training-free/Inference** methods (Huang et al., 2024; Leng et al., 2024) aim to prevent the generation of hallucinated content through techniques such as contrastive decoding or rolling back when summary tokens are detected.

3 ANALYSIS OF HALLUCINATION IN LVLMS

Given an input image v , the generative LVLMS θ produces a response in an auto-regressive manner. The probability of generating each token y_t at time step t is denoted as $p(y_t|y_{<t}, v)$, where $y_{<t}$ represents the preceding tokens, and p is the probability of the current token y_t conditioned on previous tokens $y_{<t}$ and visual input v . The images, as the conditional variants, are significant to hallucinations in LVLMS. In this section, we investigate how the input image affects the probability distribution and its relationship to hallucination.

3.1 VISUAL DEPENDENCE

To quantitatively assess the relationship between text tokens and input image, we propose *visual dependence*, which reflects how generated text tokens are related with the input image by providing the model with an additional noisy image v^* . The noisy image is created by applying Gaussian noise to the original image, similar to the forward diffusion process used in VCD (Leng et al., 2024). The strength of the applied Gaussian noise is controlled by a time step T , which ranges from 0 to 1000, where $T = 0$ indicates clean image without any noise, and $T = 1000$ indicates image is completely replaced by Gaussian noise. We set the time step to 900, which retains minimal visual information while still allowing the model to perceive some aspects of the image without being entirely blinded. We represent the visual dependence of each token using the relative difference in token probability:

$$d(y_t) = \frac{p(y_t|y_{<t}, v) - p(y_t|y_{<t}, v^*)}{\max[p(y_t|y_{<t}, v), p(y_t|y_{<t}, v^*)]}. \quad (1)$$


The visual dependence value $d(y_t)$ for a token y_t ranges between -1 and 1 . When $d(y_t)$ is significantly greater than 0 (within the range **[0.25, 1]**), it indicates that the probability of generating this token decreases with the noisy image, suggesting that the token relies on the image content. Conversely, when $d(y_t)$ is significantly less than 0 (within the range **[-1.0, -0.25]**), it means that this token is more likely to be generated even without image information, indicating a negative relationship with the visual content. As stated earlier, we refer to these two types of tokens as **image-positive** and **image-negative** tokens, respectively. Additionally, if a token has a $d(y_t)$ value that is close to 0 (within the range **[-0.25, 0.25]**), we classify it as an **image-invariant** token, as it is not significantly affected by the distorted image. For illustration, we provide an example in **Figure 1** with noise step set at 900.

3.2 HALLUCINATIONS IN GENERATED TEXT TOKENS


After quantifying the visual dependence of each token and classifying them as image-invariant, image-positive, or image-negative, we analyze the prevalence of hallucination within these different types of tokens. To achieve this, we adopt fine-tuned LLaVA-v1.5-7b¹ to generate detailed descriptions for 500 randomly selected images from the COCO dataset (Lin et al., 2014). The prompts used is: "Please describe this image in detail.". We then extract both the grounded and hallucinated objects from the generated responses and count the occurrences within the different groups of tokens based on their visual dependence. The results are presented at **Figure 2a**. We then analyze the co-occurrence of hallucinations of different types of text tokens using the same 500 randomly selected images from the COCO dataset. The results are shown in the **Figure 2b**.

Findings As shown in **Figure 2a**, image-invariant tokens contain the majority of both grounded and hallucinated objects. In the example from **Figure 1**, the brand of console 'Nintendo Wii' is difficult or ambiguous to detect from the image. The first token, "N", and the last token, "console", are image-related, while the other tokens are totally image-invariant, as they often appear together as a combination. Moreover, **Figure 2b** shows that around 95% of hallucinations occur within 3 tokens of an image-invariant token, and only approximately half of hallucinations appear within 3 tokens of an image-positive token. This suggests that hallucinations in image-invariant tokens are primarily caused by the language generation process rather than poor visual information extraction capabilities. Additionally, **Figure 2a** demonstrates that there are more objects in image-positive tokens than in image-negative tokens, which aligns with our expectation that image information

¹<https://huggingface.co/liuhaotian/llava-v1.5-7b>

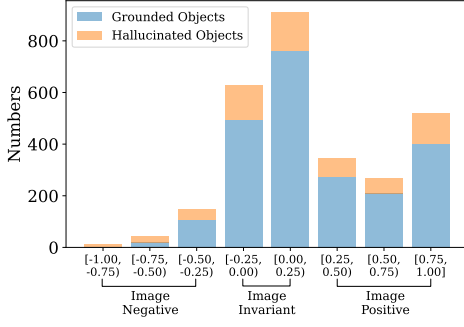

(a) The number of grounded and hallucinated objects in different groups of tokens.

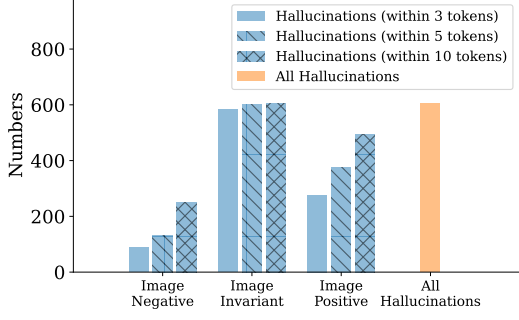

(b) The numbers of hallucinations appear at different ranges of different tokens.

should be more positively correlated with image inputs. Based on these observations, we conclude the following: **(1)** Hallucinations are more frequent in and around image-invariant tokens, and they often appear as commonly paired object combinations. **(2)** Image-positive tokens are more likely to be associated with extracting useful information from the image content, whereas image-negative tokens are more often non-object terms.

The first finding reveals that the model generates hallucinated objects associated with commonly co-occurring objects, even without directly seeing the image. These tokens are mostly image-invariant as they are less affected by the image content. It suggests that we can suppress the image-invariant tokens during training to prevent this type of hallucination. This co-occurrence phenomenon has been discussed in (Zhou et al., 2023), however, they do not connect it to visual dependence. The second finding suggests that by emphasizing image-positive tokens during training, the model might be more inclined to focus on the actual image content. However, our experimental results in **Section 5** indicate that while emphasizing image-positive tokens does improve object recognition rates, it leads to an increase in hallucination rates.

4 ADJUST LOSS WEIGHTS DURING TRAINING

Our analysis suggests that different caption tokens have varying impacts on hallucinations in LVLMs, where image-invariant tokens cause a significant influence on hallucinations which need to be suppressed during the training. Therefore, we propose adjusting the training loss weights for these tokens based on their visual dependence. We design two re-weighting strategies: one that up-scales the loss for image-negative tokens, and another that up-scales the loss for image-positive tokens. Each strategy targets different token types, allowing us to study their effects on hallucination. The re-weighting functions are defined as follows:

$$w_{\text{neg}}(y_t) = \begin{cases} -d(y_t) & \text{if } d(y_t) \leq 0, \\ 0 & \text{if } d(y_t) > 0, \end{cases} \quad (2)$$

$$w_{\text{pos}}(y_t) = \begin{cases} 0 & \text{if } d(y_t) \leq 0, \\ d(y_t) & \text{if } d(y_t) > 0, \end{cases} \quad (3)$$

where w_{neg} is applied when emphasizing image-negative tokens, while w_{pos} is used for emphasizing image-positive tokens. It is worth noting that, in both strategies, the weights of image-invariant tokens are down-scaled. To redistribute the loss weights without altering the overall magnitude of the original loss, we re-normalize the weights using softmax with a temperature parameter τ , controlling the sharpness of weight distributions, and derive the re-scaled loss objective:

$$\mathcal{L}(y) = -\frac{1}{T} \sum_{t=1}^T T \frac{e^{\tau w(y_t)}}{\sum_{i=1}^T e^{\tau w(y_i)}} \log p(y_t | y_{<t}, v). \quad (4)$$

With this re-scaling loss, for example, when using w_{neg} as $w(y_t)$, the loss weights become greater than 1 for image-negative tokens and less than 1 for image-positive and image-invariant tokens. In our experiments, we find that excessively down-scaling the loss weight of the EOS token could affect generation lengths. Therefore, we ensure that the loss weight of the EOS token is never reduced below 1 to avoid this issue. The computation of $d(y_t)$ is performed on-the-fly right before loss computation for every batch of data, and it is done in evaluation mode to save GPU memory. The computational cost can be found in Appendix B. To allow the model to accurately assess visual dependence, we begin loss re-weighting after half of training by default. In the appendix, we study the effects of different temperatures, starting times for adjustment, and various noise time steps used in calculation of visual dependence.

5 EXPERIMENTS

5.1 EXPERIMENT SETUP

LVLMS and Datasets We select three LVLMS variants with different parameter sizes: PaliGemma-3b-224 (Beyer et al., 2024), LLaVA-v1.5-7b and 13b (Liu et al., 2024) and Bunny-v1.1-8B (He et al., 2024), to evaluate our methods. We use LLaVA-Detail 23k and LLaVA-Instruct 150k (Liu et al., 2024) for fine-tuning LLaVA models. Since PaliGemma-3b is a single-turn model, we use LLaVA-Detail 23k, which is also a single-turn dataset, to fine tune it. For Bunny-v1.1-8b, we use the subset from its instruction fine-tune dataset SVIT-Detail 71k (Zhao et al., 2023) to conduct training.

Benchmarks We evaluate models using CHAIR (Rohrbach et al., 2018) and FaithScore (Jing et al., 2023), and two yes/no VQA benchmarks: POPE (Li et al., 2023) and MME (Fu et al., 2023). CHAIR identifies hallucinations by detecting objects not included in the ground-truth label set from COCO annotations. We report the sentence-level score CHAIR_S and the instance-level score CHAIR_I . Additionally, we report the Recall score to evaluate object recognition rates. FaithScore evaluates the consistency of atomic facts extracted from the generated captions with the image content. We report both the instance-level and sentence-level FaithScore. In MME, we report the perception score MME_P and cognition score MME_C . In POPE, we compute the average accuracy POPE_{Acc} and F1-score POPE_{F1} across three subsets: random, popular and adversarial.

5.2 BASELINES

We select **two training-free** baselines and **two training-based** baselines. **OPERA** (Huang et al., 2024): This inference-stage method identifies summary tokens that contribute to hallucinations and penalizes them. It further removes these tokens and re-samples the remaining ones to improve response accuracy. **VCD** (Leng et al., 2024): This decoding strategy mitigates the model’s language bias by contrasting the output distribution with an additional distribution generated from noisy images. **MLE**: This is the standard supervised training method using maximum likelihood estimation without any modifications. **EOS** (Yue et al., 2024): This training-phase method excludes EOS (End of Sequence) token probabilities from the loss calculation for non-EOS tokens, allowing the model to terminate generation before producing redundant, often hallucinatory, content. We perform greedy sampling except for OPERA which requires beam search.

5.3 MAIN RESULTS

We conduct experiments by fine-tuning the pre-trained LVLMS with LoRA (Hu et al., 2021) for 2 epochs with batch size of 128. The inference-based methods are applied to models fine-tuned using a standard maximum likelihood estimation loss function. For our method, we fix the temperature τ at 0.5 and apply the loss re-weighting only after 1 epoch to allow the model to warm-up and assess visual dependence more accurately. The noise time step is fixed to 900. **Table 1** presents the response length and the performance on CHAIR and FaithScore.

Emphasizing image-positive tokens increases both object recall and hallucination. As discussed in **Section 3.2**, image-positive tokens contribute to both object extractions and hallucinations. Therefore, up-scaling the loss for image-positive tokens enables generating richer responses,

Dataset	Cost	Method	R Len	CHAIR _S ↓	CHAIR _I ↓	Recall↑	Faith↑	Faith _S ↑
LLaVA-v1.5-7b								
LLaVA-Details 23k	Training-free	VCD _{t=500}	101.3	56.6	17.4	77.7	83.7	67.1
		OPERA	96.5	52.6	15.7	75.0	85.9	71.0
		OPERA _{fast}	102.8	56.2	17.4	75.4	84.3	68.6
	Training-based	MLE	102.1	54.2	15.9	78.3	86.1	71.0
		EOS	62.6	30.2	10.9	69.2	89.9	74.7
		Ours <i>w</i> _{pos}	102.5	56.8	16.5	78.6	85.5	70.2
		Ours <i>w</i> _{neg}	101.8	51.2	15.5	78.4	85.8	72.3
LLaVA-Instruct 150k	Training-free	VCD _{t=200}	105.2	54.6	16.9	78.0	85.2	71.2
		OPERA	97.2	51.2	14.9	76.4	86.1	72.3
		OPERA _{fast}	102.3	54.6	15.6	77.3	86.2	72.6
	Training-based	MLE	105.3	57.0	16.9	78.7	85.8	72.4
		EOS	56.9	24.4	9.1	66.9	90.9	76.2
		Ours <i>w</i> _{pos}	99.6	52.2	14.8	79.3	86.0	71.8
		Ours <i>w</i> _{neg}	99.8	48.8	13.7	77.6	86.4	71.8
LLaVA-v1.5-13b								
LLaVA-Details 23k	Training-free	VCD _{t=200}	104.4	54.8	16.2	75.7	84.9	69.5
		OPERA	97.5	54.0	16.8	76.4	85.3	70.0
		OPERA _{fast}	98.8	54.8	16.9	74.8	84.8	68.8
	Training-based	MLE	105.2	54.6	15.3	77.3	86.6	71.5
		EOS	74.9	39.4	13.1	71.9	88.8	74.5
		Ours <i>w</i> _{pos}	105.1	52.4	15.7	77.8	86.0	71.8
		Ours <i>w</i> _{neg}	105.4	51.0	15.2	76.6	86.4	71.8
PaliGemma-3b								
LLaVA-Details 23k	Training-free	VCD _{t=500}	98.9	52.8	16.1	77.3	87.8	71.9
		OPERA	102.3	48.6	13.5	77.9	87.5	73.0
		OPERA _{fast}	101.5	48.4	13.3	76.7	88.0	74.4
	Training-based	MLE	100.7	51.0	15.3	76.3	88.4	74.0
		EOS	42.2	15.8	6.5	56.1	93.6	80.4
		Ours <i>w</i> _{pos}	100.5	52.8	15.6	79.1	87.9	73.1
		Ours <i>w</i> _{neg}	101.0	47.8	14.6	74.4	88.2	73.7
Bunny-v1.1-8b								
SVIT-Details 71k	Training-free	VCD _{t=200}	343.6	47.8	9.1	74.2	87.3	72.7
		OPERA	334.1	40.2	7.7	74.0	89.2	75.1
		OPERA _{fast}	347.6	42.4	8.8	73.9	88.8	74.2
	Training-based	MLE	350.1	44.4	8.7	74.4	87.8	75.2
		EOS	311.9	40.8	8.2	74.5	88.2	76.0
		Ours <i>w</i> _{pos}	343.8	44.0	8.5	75.9	88.6	75.4
		Ours <i>w</i> _{neg}	353.4	40.4	8.5	73.5	88.8	75.1

Table 1: Main results of three LVLMs on CHAIR and FaithScore. R Len represents the average response length. *The rows in italics* are excluded from the comparison because their average response length is significantly lower than the others, making the comparison unfair. The best results are marked as **bold** and the second best are underlined.

Dataset	Method	MME _P ↑	MME _C ↑	POPE _{Acc} ↑	POPE _{F1} ↑
LLaVA-Instruct 150k	MLE	756.9	261.8	59.9	71.2
	EOS	840.8	269.6	62.8	72.6
	Ours <i>w</i> _{neg}	849.9	271.4	64.2	73.4
LLaVA-Mix Subset 264k	MLE	1377.4	268.2	85.4	84.9
	EOS	1369.1	267.9	85.9	85.3
	Ours <i>w</i> _{neg}	1386.6	282.1	85.9	85.3

Table 2: The performance comparison on MME and POPE.

but also increases hallucinations. This strategy might be a good choice in scenarios where hallucination is more acceptable, and users require responses with richer visual information (Zhai et al., 2023).

Emphasizing image-negative tokens reduces hallucination. This improvement in mitigating hallucination can be attributed to two factors. First, image-negative tokens are typically non-object words and are often located farther from where hallucinations tend to occur, as shown in **Figure 2b**. Second, it simultaneously downscales the loss weights for image-invariant and image-positive tokens, which are more likely to contain hallucinations. Therefore, we effectively reduce the model’s focus on noisy content. As a result, by directing the model’s attention away from these tokens, we help prevent it from learning and generating hallucinated information.

Model	Method	Length	CHAIR _S ↓	CHAIR _I ↓	Recall ↑
LLaVA-v1.5-7b	-	101.4	51.4	14.0	78.7
	MLE	100.4	48.8	13.8	77.9
	EOS	82.9	41.0	12.1	75.0
	VCD _{t=500}	101.5	52.8	14.8	78.6
	OPERA	93.1	42.8	13.1	76.9
	OPERA _{fast}	97.2	48.2	13.7	75.7
	Ours <i>w_{neg}</i>	97.9	<u>42.4</u>	<u>12.6</u>	76.5
LLaVA-v1.5-13b	-	102.2	48.4	13.4	77.4
	MLE	101.0	48.2	14.2	77.8
	EOS	85.7	41.8	12.9	75.1
	VCD _{t=200}	102.0	51.8	14.3	77.5
	OPERA	102.4	43.3	12.7	76.8
	OPERA _{fast}	98.7	47.5	13.6	76.9
	Ours <i>w_{neg}</i>	99.1	<u>42.4</u>	12.2	76.5

Table 3: The experimental results of continued fine-tuning of instructional tuned models.

VCD performs poorly and EOS generates short responses. We test VCD algorithm using three noise time steps $T = 200, 500, 900$ and report the best one. We find that it does not perform as well as expected. One possible reason is that VCD does not perform well on reducing hallucinations from image-invariant tokens as they are not affected by the image conditions. We also test EOS and find it is highly effective at reducing hallucinations, but it comes at the cost of shorter response lengths and lower object recall scores. Naturally, shorter responses contain fewer details and content, making them produce less hallucinations.

5.4 PERFORMANCE ON MME AND POPE

We report performance comparison on MME and POPE in **Table 2**. We select LLaVA-Instruct 150k and a subset from LLaVA-Mix 665k dataset (Liu et al., 2024) which consists of AOKVQA (66k), RefCOCO (48k), LLaVA-Conversation (58k), VQAv2 (83k) and OKVQA (9k), to save computational cost. This subset has 264k samples in total. We fine-tune LLaVA-v1.5-7b with both datasets on top of pre-trained checkpoints and evaluate their performance. Overall, our method is better on both MME and POPE when fine-tuned with LLaVA-Instruct 150k. Moreover, our method shows better results than EOS on MME and same performance on POPE as EOS trained with LLaVA-Mix Subset. One possible explanation is that the responses in LLaVA-Mix subset 264k are usually few tokens long, which are much shorter than those in LLaVA-Instruct 150k, leaving less space for loss adjusting.

5.5 FURTHER TRAINING FINE-TUNED LVLMS

Another experiment is conducted where we further train the already fine-tuned LLaVA-v1.5 7b and 13b on LLaVA-Detail 23k with LoRA for an additional epoch with batch size of 128. Given the shorter training duration, a larger temperature of $\tau = 1$ is used. Re-weighting of the loss begins after half an epoch of training. The performance results are shown in **Table 3**. In the table, the method labeled with '-' represents the original instructional fine-tuned baseline model. Our approach, which suppresses image-invariant and image-positive tokens during training, achieves a notable reduction in hallucinations while preserving response length. Although EOS achieves the lowest hallucination rate, it does so at the expense of producing shorter responses. Moreover, as with most existing hallucination reduction methods, our approach leads to a decrease in recall, since the model becomes less inclined to identify additional objects in order to minimize the risk of hallucinations.

5.6 FILTERING DATA BY VISUAL DEPENDENCE

We design a data filtering strategy by ranking each sample according to their total visual dependence, calculated as $\sum_{i=1}^T d(y_i)$. The experiment is conducted using LLaVA-Instruct 150k dataset, with visual dependence evaluated by the fine-tuned LLaVA-v1.5-7b model and the noise step is set at 900. We fine-tune pretrained LLaVA-v1.5-7b from scratch using filtered dataset for 2 epochs with LoRA, employing the vanilla loss function. **Table 4** presents the results. Notably, our filtering strategy does not affect the overall training data length or the response length. On the one hand, removing the top 10% of data with the highest visual dependence significantly reduces hallucinations. However, this strategy lowers recall score, as image-positive data, which contain both valuable visual information

Strategy	D Len	R Len	CHAIR _S ↓	CHAIR _I ↓	Recall↑
No Filtering	172.8	105.3	57.0	16.9	78.7
Random 10%	172.7	101.4	52.8	15.3	78.6
Random 20%	172.8	99.3	50.4	14.7	78.3
Lowest 10%	172.9	99.6	49.2	14.2	78.3
Lowest 20%	172.4	100.2	<u>46.8</u>	<u>13.3</u>	78.4
Highest 10%	176.1	100.8	44.4	12.9	76.9
Highest 20%	177.8	102.5	48.4	14.5	75.2

Table 4: The experimental results of data filtering. D Len represents the average data sentence length of filtered data, and R Len represents the average response length.

and noisy hallucinated information, are removed. On the other hand, removing data with the lowest visual dependence helps control hallucinations without compromising recall scores, since these data contain fewer visual details compared to those with high visual dependence.

6 CONCLUSION

This work investigates the relationship of object hallucination with visual dependence of generated tokens. Our findings suggest that hallucinations occur around image-invariant tokens are mostly affected by the language context during generation. Moreover, image-positive tokens contribute to both hallucinations and extraction of visual information. Based on these findings, we develop a loss re-weighting approach and a data filtering strategy to mitigate hallucinations in LVLMs.

REFERENCES

- Lucas Beyer, Andreas Steiner, André Susano Pinto, Alexander Kolesnikov, Xiao Wang, Daniel Salz, Maxim Neumann, Ibrahim Alabdulmohsin, Michael Tschannen, Emanuele Bugliarello, et al. Paligemma: A versatile 3b vlm for transfer. *arXiv preprint arXiv:2407.07726*, 2024.
- Jiawei Chen, Dingkan Yang, Tong Wu, Yue Jiang, Xiaolu Hou, Mingcheng Li, Shunli Wang, Dongling Xiao, Ke Li, and Lihua Zhang. Detecting and evaluating medical hallucinations in large vision language models. *arXiv preprint arXiv:2406.10185*, 2024.
- Alessandro Favero, Luca Zancato, Matthew Trager, Siddharth Choudhary, Pramuditha Perera, Alessandro Achille, Ashwin Swaminathan, and Stefano Soatto. Multi-modal hallucination control by visual information grounding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 14303–14312, 2024.
- Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Zhenyu Qiu, Wei Lin, Jinrui Yang, Xiawu Zheng, et al. Mme: a comprehensive evaluation benchmark for multi-modal large language models. *corr abs/2306.13394 (2023)*, 2023.
- Yudong Han, Liqiang Nie, Jianhua Yin, Jianlong Wu, and Yan Yan. Visual perturbation-aware collaborative learning for overcoming the language prior problem. *arXiv preprint arXiv:2207.11850*, 2022.
- Muyang He, Yexin Liu, Boya Wu, Jianhao Yuan, Yuezhe Wang, Tiejun Huang, and Bo Zhao. Efficient multimodal learning from data-centric perspective. *CoRR*, abs/2402.11530, 2024. doi: 10.48550/ARXIV.2402.11530. URL <https://doi.org/10.48550/arXiv.2402.11530>.
- Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*, 2021.
- Qidong Huang, Xiaoyi Dong, Pan Zhang, Bin Wang, Conghui He, Jiaqi Wang, Dahua Lin, Weiming Zhang, and Nenghai Yu. Opera: Alleviating hallucination in multi-modal large language models via over-trust penalty and retrospection-allocation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 13418–13427, 2024.

-
- Wenlong Huang, Chen Wang, Ruohan Zhang, Yunzhu Li, Jiajun Wu, and Li Fei-Fei. Voxposer: Composable 3d value maps for robotic manipulation with language models. *arXiv preprint arXiv:2307.05973*, 2023.
- Dongsheng Jiang, Yuchen Liu, Songlin Liu, Xiaopeng Zhang, Jin Li, Hongkai Xiong, and Qi Tian. From clip to dino: Visual encoders shout in multi-modal large language models. *arXiv preprint arXiv:2310.08825*, 2023.
- Liqiang Jing, Ruosen Li, Yunmo Chen, Mengzhao Jia, and Xinya Du. Faithscore: Evaluating hallucinations in large vision-language models. *arXiv preprint arXiv:2311.01477*, 2023.
- Sicong Leng, Hang Zhang, Guanzheng Chen, Xin Li, Shijian Lu, Chunyan Miao, and Lidong Bing. Mitigating object hallucinations in large vision-language models through visual contrastive decoding. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 13872–13882, 2024.
- Yifan Li, Yifan Du, Kun Zhou, Jinpeng Wang, Wayne Xin Zhao, and Ji-Rong Wen. Evaluating object hallucination in large vision-language models. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing, EMNLP 2023, Singapore, December 6-10, 2023*, pp. 292–305. Association for Computational Linguistics, 2023. doi: 10.18653/V1/2023.EMNLP-MAIN.20. URL <https://doi.org/10.18653/v1/2023.emnlp-main.20>.
- Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *Computer Vision—ECCV 2014: 13th European Conference, Zurich, Switzerland, September 6-12, 2014, Proceedings, Part V 13*, pp. 740–755. Springer, 2014.
- Fuxiao Liu, Kevin Lin, Linjie Li, Jianfeng Wang, Yaser Yacoob, and Lijuan Wang. Mitigating hallucination in large multi-modal models via robust instruction tuning. In *The Twelfth International Conference on Learning Representations*, 2023.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances in neural information processing systems*, 36, 2024.
- OpenAI. GPT-4 technical report. *CoRR*, abs/2303.08774, 2023. doi: 10.48550/ARXIV.2303.08774. URL <https://doi.org/10.48550/arXiv.2303.08774>.
- Anna Rohrbach, Lisa Anne Hendricks, Kaylee Burns, Trevor Darrell, and Kate Saenko. Object hallucination in image captioning. *arXiv preprint arXiv:1809.02156*, 2018.
- Zhiqing Sun, Sheng Shen, Shengcao Cao, Haotian Liu, Chunyuan Li, Yikang Shen, Chuang Gan, Liang-Yan Gui, Yu-Xiong Wang, Yiming Yang, et al. Aligning large multimodal models with factually augmented rlhf. *arXiv preprint arXiv:2309.14525*, 2023.
- Shengbang Tong, Zhuang Liu, Yuexiang Zhai, Yi Ma, Yann LeCun, and Saining Xie. Eyes wide shut? exploring the visual shortcomings of multimodal llms. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 9568–9578, 2024.
- Zihao Yue, Liang Zhang, and Qin Jin. Less is more: Mitigating multimodal hallucination from an eos decision perspective. *arXiv preprint arXiv:2402.14545*, 2024.
- Bohan Zhai, Shijia Yang, Xiangchen Zhao, Chenfeng Xu, Sheng Shen, Dongdi Zhao, Kurt Keutzer, Manling Li, Tan Yan, and Xiangjun Fan. Halle-switch: Rethinking and controlling object existence hallucinations in large vision language models for detailed caption. *arXiv preprint arXiv:2310.01779*, 2023.
- Bo Zhao, Boya Wu, Muyang He, and Tiejun Huang. Svit: Scaling up visual instruction tuning. *arXiv preprint arXiv:2307.04087*, 2023.
- Yiyang Zhou, Chenhang Cui, Jaehong Yoon, Linjun Zhang, Zhun Deng, Chelsea Finn, Mohit Bansal, and Huaxiu Yao. Analyzing and mitigating object hallucination in large vision-language models. *arXiv preprint arXiv:2310.00754*, 2023.

Temp τ	R Len	CHAIR _S ↓	CHAIR _I ↓	Recall↑
LLaVA-v1.5-7b + LLaVA-Details 23k				
0.25	101.9	52.2	15.9	77.9
0.50	101.8	51.2	15.5	78.4
1.00	100.7	52.0	15.8	77.0
1.50	101.1	51.8	16.1	75.9
PaliGemma-3b + LLaVA-Details 23k				
0.25	100.8	49.8	15.1	76.4
0.50	101.0	47.8	14.6	74.4
1.00	100.4	46.8	14.1	74.5
1.50	100.4	44.4	13.8	74.0

Table 5: The performance on CHAIR with different temperature τ in fine-tuning pre-trained LLaVA-v1.5-7b and PaliGemma-3b with LLaVA-Details 23k dataset.

A ADDITIONAL STUDIES

A.1 IMPACT OF DIFFERENT HYPERPARAMETERS

We investigate how various hyperparameters influence hallucination performance, including temperature τ in Equation 3, the starting time for loss adjustment, and the noise time steps used for calculating visual dependence. The results for each hyperparameter are detailed in **Table 5, 6, 7**, respectively. These experiments incorporate loss re-weighting, emphasizing image-negative tokens to reduce hallucinations. The default settings are τ of 0.5, adjustment starting after 50% of the total training time, and a noise step T of 900.

Temperature τ When the temperature τ is set to 0, it becomes the vanilla loss without any re-weighting. As τ becomes larger, the distribution of loss weights becomes sharper, meaning that the weights are more concentrated to emphasize only few image-negative tokens. As shown in **Table 5**, the recall score drops with higher temperatures because the image-invariant and image-positive tokens are more heavily suppressed.

Start Time for Weight Adjustment Since our loss adjustment approach requires assessing the visual dependence of each token, applying this adjustment too early can lead to inaccurate assessments and negatively impact performance. As shown in **Table 6**, starting the loss adjustment after the model has completed half (50%) of its total training time yields better results than starting at the beginning (0%).

Noise Step T Different noise steps T introduce varying levels of visual uncertainty when computing visual dependence, thereby affecting the calculation. A lower noise step generally produces visual dependence values closer to 0, whereas a higher noise step results in values with a larger magnitude. As **Table 7** shows, a T value at 200 provides the best recall performance, and a T value at 900 provides the best hallucination reduction performance. Moreover, the LLaVA model is less sensitive to T compared to the PaliGemma model.

Based on these results, for a better trade-off between hallucination and recall score, we choose a temperature τ of 0.5, adjustment starting after 50% of the total training time, and a noise step T of 900 as our default settings.

B EXPERIMENT SETTINGS AND COMPUTATIONAL COST

The experiments are conducted with 4 NVIDIA A100-40GB GPU cards. Due to heavy computational cost of training LVLMs, all experiments are single-run with random seed at 42. For reproducibility, we provide the detailed experiment settings for fine-tuning the pre-trained LVLMs in **Table 8**, including LoRA parameters, batch size, optimizer and etc. We use greedy decoding strategy for our method.

Start Time	R Len	CHAIR _S ↓	CHAIR _I ↓	Recall↑
LLaVA-v1.5-7b + LLaVA-Details 23k				
0%	102.1	51.4	15.4	77.7
25%	102.3	52.2	15.3	77.6
50%	101.8	51.2	15.5	78.4
75%	101.5	53.4	16.1	77.6
PaliGemma-3b + LLaVA-Details 23k				
0%	100.7	48.4	14.9	76.0
25%	101.3	50.8	15.0	75.6
50%	101.0	47.8	14.6	74.4
75%	101.0	47.6	14.8	75.4

Table 6: The performance on CHAIR with different start times of loss re-weighting in fine-tuning pre-trained LLaVA-v1.5-7b and PaliGemma-3b with LLaVA-Details 23k dataset. For example, 0% means that starting loss re-weighting from the beginning.

Noise Step T	R Len	CHAIR _S ↓	CHAIR _I ↓	Recall↑
LLaVA-v1.5-7b + LLaVA-Details 23k				
200	101.9	51.2	15.1	78.9
500	102.0	50.6	15.2	78.4
900	101.8	51.2	15.5	78.4
PaliGemma-3b + LLaVA-Details 23k				
200	100.7	50.8	15.1	77.0
500	100.8	50.6	15.3	76.1
900	101.0	47.8	14.6	74.4

Table 7: The performance on CHAIR with different noise step T in fine-tuning pre-trained LLaVA-v1.5-7b and PaliGemma-3b with LLaVA-Details 23k dataset.

Hyper-parameters	LLaVA-v1.5-7b	LLaVA-v1.5-13b	PaliGemma-3b	Bunny-v1.1-8b
Random seed	42	42	42	42
LoRA rank	128	128	64	128
LoRA alpha	256	256	128	256
LoRA dropout	0.05	0.05	0.05	0.05
Epochs	2	2	2	2
Warmup ratio	0.03	0.03	0.03	0.03
Per device train batch size	16	16	16	8
Gradient accumulation step	2	2	2	2
GPU devices	4	4	4	4
Global batch size	128	128	128	64
Deepspeed stage	zero2	zero3	zero2	zero3
Precision	BFloat16	BFloat16	BFloat16	BFloat16
Optimizer	AdamW	AdamW	AdamW	AdamW
Weight decay	0	0	0	0
Base learning rate	2e-4	2e-4	1e-4	2e-4
MM projector learning rate	2e-5	2e-5	1e-5	2e-5

Table 8: The training settings for main experiments of fine-tuning LVLMS from scratch.

Our method introduces around 20% extra training cost as we conduct evaluation of visual dependence during training. We present the computational cost of using the vanilla loss and our re-weighted loss in **Table 9**. Note that the visual dependence and loss weights is computed in evaluation mode, thus our method does not consume extra GPU memory.

C DATA FILTERING BY VISUAL DEPENDENCE

We remove data by ordering them of their visual dependence evaluated by an instructional fine-tuned model. **Figure 3** shows the metrics distribution of LLaVA-Instruct 150k dataset. The metrics is the

Experiment	Model	Dataset	Epochs	Vanilla (Hours)	Ours (Hours)
From Scratch	LLaVA-v1.5-7b	LLaVA-Details-23k	2	0.9	1.1
	LLaVA-v1.5-7b	LLaVA-Instruct-150k	2	9.7	11.2
	LLaVA-v1.5-13b	LLaVA-Details-23k	2	1.7	2.0
	PaliGemma-3b	LLaVA-Details-23k	2	0.5	0.6
	Bunny-v1.1-8b	SVIT-Details-71k	2	6.8	8.0
Continue Fine-tune	LLaVA-v1.5-7b	LLaVA-Details-23k	1	0.5	0.6
	LLaVA-v1.5-13b	LLaVA-Details-23k	1	0.8	1.0
	PaliGemma-3b	LLaVA-Details-23k	1	0.2	0.3
	Bunny-v1.1-8b	SVIT-Details-71k	1	3.5	4.0

Table 9: Computational cost for each experiment.

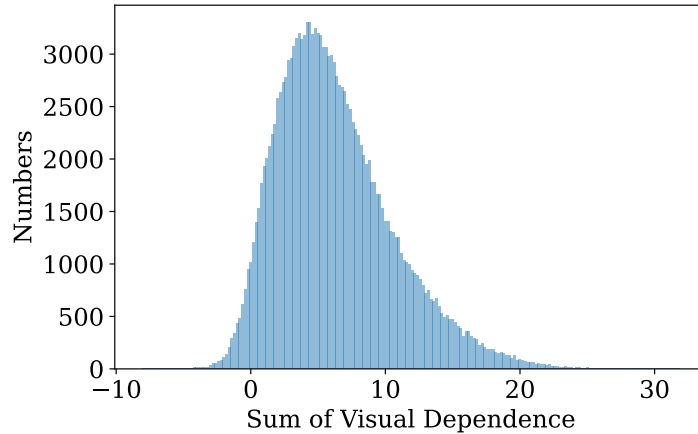


Figure 3: The distribution of the sum of visual dependence of each sample from LLaVA-Instruct 150k.

sum of visual dependence of all tokens from each instruction $\sum_{t=1}^T d(y_t)$ evaluated by instructional fine-tuned LLaVA-v1.5-7b. A higher value indicates that the model’s prediction probability will decrease, in other words, the model is less confident with its original response, after seeing a noisy image. As illustrated in the figure, most of instructions have positive values of visual dependence. By filtering out data with lowest value or with highest value, the hallucination performance of the model is affected in different ways.

D ADDITIONAL RESULTS ON FURTHER TRAINING FINE-TUNED LVLMS


Here, we show more results of experiments on further training the already fine-tuned PaliGemma-3b with LLaVa-Detail 23k dataset and Bunny-v1.1-8b with SVIT-Detail 71k dataset with LoRA for an additional epoch with batch size of 128. The performance results are shown in **Table 10**. As shown in the table, our method achieves overall better performance on these two variants of LVLMS. Recall that our method also works on LLaVA series models. It demonstrates the general capability of our method.

E QUALITATIVE RESULTS

We demonstrate qualitative results of generate image descriptions using the fine-tuned model from scratch with vanilla loss and our re-weighted loss by emphasizing image-negative tokens. **Figures 4, 5, 6, 7, 8** show the results. We show examples of probability distribution of predicted tokens with clean image and with noisy image of fine-tuned LLaVA-v1.5-7b, which is trained from scratch with LoRA on LLaVA-Details 23k dataset. The results are shown in **Figure 9, 10**.

Method	Length	CHAIR _S ↓	CHAIR _I ↓	Recall↑
PaliGemma-3b + LLaVA-Detail 23k				
-	51.0	18.0	7.0	58.1
MLE	66.1	26.6	11.9	69.1
EOS	33.4	13.2	11.1	57.8
VCD _{t=900}	65.6	29.6	10.6	68.6
OPERA	76.2	<u>26.2</u>	8.8	67.8
OPERA _{fast}	82.7	24.2	<u>8.7</u>	<u>69.0</u>
Ours w_{neg}	71.3	<u>26.2</u>	7.9	68.6
Bunny-v1.1-8b + SVIT-Detail 71k				
-	246.5	40.6	<u>7.6</u>	74.3
MLE	300.8	40.8	7.5	75.6
EOS	272.5	42.4	8.5	74.8
VCD _{t=200}	300.5	44.2	8.9	75.2
OPERA	293.4	<u>37.8</u>	7.7	74.5
OPERA _{fast}	302.8	39.4	7.5	<u>75.4</u>
Ours w_{neg}	302.7	37.2	7.8	<u>73.8</u>

Table 10: The additional experimental results of continued fine-tuning of instructional tuned models PaliGemma-3b and Bunny-v1.1-8b.



Vanilla Loss:

The image features a beautiful scene of cherry blossoms in full bloom, creating a picturesque atmosphere. A traffic light is situated in the middle of the scene, surrounded by the blossoming trees. The traffic light is red, indicating that the cars should stop and wait.
There are several cars in the image, with one car on the left side of the scene, another car on the right side, and two more cars further back in the scene. The cars are patiently waiting for the traffic light to change, allowing them to continue their journey through the lovely cherry blossom-filled area.

Ours w_{neg} :

The image features a beautiful scene of a tree filled with white flowers, likely cherry blossoms, in full bloom. The tree is located near a traffic light, which is currently displaying a red light. The traffic light is positioned at the top left corner of the image. The combination of the flowering tree and the red traffic light creates a striking contrast and a picturesque view.

Vanilla Loss:

The image features a snow-covered slope with a man and a young girl skiing. The man is standing on skis in the foreground, while the young girl is skiing behind him. They are both wearing skiing gear and enjoying their time on the snowy hill.
There are several other people in the background, some of whom are also wearing skis. The scene captures the excitement and fun of skiing as a group of people engage in the winter sport.

Ours w_{neg} :

The image features a snowy hill with a man and a child standing on it. The man is wearing a black jacket and is positioned towards the left side of the hill, while the child is standing closer to the right side. Both of them are wearing skis, ready to enjoy the snowy terrain.
 There are also two sets of skis visible in the scene, one set belonging to the man and the other set belonging to the child. The skis are placed on the snow, indicating that they are preparing to ski down the hill.



Vanilla Loss:

The image features a person holding a large sandwich in their hands, with a bite taken out of it. The sandwich is placed on a dining table, and there is a cup nearby, possibly containing a soft drink. Another person is visible in the background, partially obscured by the main subject.
In the scene, there are two additional sandwiches on the table, one located near the left edge and the other closer to the right side. A fork can also be seen on the table, likely used to eat the sandwiches.

Ours w_{neg} :

The image features a person holding a large, juicy hamburger in their hand, ready to take a bite. The hamburger is placed on a bun and appears to be quite messy. The person is wearing a ring on their finger.
 In the background, there is a dining table with a Pepsi cup on it, suggesting that the person is enjoying a meal in a casual setting. Another person can be seen in the background, partially visible on the right side of the image.

Vanilla Loss:

The image features a round piece of dough, likely a pizza dough, sitting on a piece of parchment paper on a table. The dough is uncooked and has a circular shape, **with a hole in the center**. The dough is placed on a piece of wax paper, which is covering the table.
In the background, there is a bowl, possibly containing ingredients for the dough or other food items. The scene suggests that the dough is being prepared for baking or further processing.

Ours w_{neg} :

The image features a round piece of dough, likely a pizza crust, sitting on a table. The dough is in the process of being shaped and is still in the middle of being rolled out. It is placed on a piece of parchment paper, which is spread across the table. The dough appears to be in the process of being stretched and shaped, possibly for making a pizza or another type of dough-based dish.



Vanilla Loss:

The image features three women dressed in costumes, standing in front of a fireplace. They are posing for a picture, with one of the women on the left side, another in the middle, and the third on the right side of the frame. The women are wearing hats, adding to their festive appearance.
A dog is also present in the scene, standing near the leftmost woman. A handbag can be seen placed on the floor, close to the center of the image. The room appears to be decorated for Christmas, with a Christmas tree visible in the background.

Ours w_{neg} :

The image features three women dressed in costumes, standing in front of a Christmas tree. They are posing for a picture, with one of the women standing closer to the left side of the tree, another in the middle, and the third on the right side. The women are wearing hats, adding to their festive appearance.
 A dog is also present in the scene, located near the left side of the image. The dog appears to be well-behaved and enjoying the company of the women. The overall atmosphere of the image is cheerful and celebratory, with the women and the dog all dressed up for the holiday season.

Figure 4: Qualitative results of LLaVA-v1.5-7b trained with vanilla loss baseline and ours approach with w_{neg} on LLaVA-Instruct 150k dataset. Hallucinations are marked as red.



Figure 5: Qualitative results of LLaVA-v1.5-7b trained with vanilla loss baseline and ours approach with w_{neg} on LLaVA-Instruct 150k dataset. Hallucinations are marked as red.



Figure 6: Qualitative results of PaliGemma-3b trained with vanilla loss baseline and ours approach with w_{neg} on LLaVA-Details 23k dataset. Hallucinations are marked as red.



Vanilla Loss:

The image captures a vibrant scene of a field, where a white pickup truck is parked. The truck is quite large, taking up a significant portion of the image. It has a white color and is detailed with a black stripe. The truck's features are clearly visible, including its windows, tires, and doors. The windows are black, and **the truck has two doors**. The tires are black and silver, and one of them is prominently displayed in the front. **The truck also has a black handle on the door.**

In the background, there is a mountain range that adds depth to the image. The mountains are not the main focus but provide a scenic backdrop. The sky above is clear and blue, with no clouds.

What makes this image particularly lively is the presence of kites in the sky. There are several kites, each with different colors and designs. One of the kites is red and black, while another is yellow and black. There is also a green and yellow kite, and a black and yellow kite. These kites are flying high in the sky, adding a sense of movement and color to the scene.

The field where the truck is parked is covered in dry, brown grass. The grass is not lush and seems to be in a state of dryness. The field extends to the horizon, and the truck is parked on it.

Overall, the image portrays a day out in a field with a white pickup truck as the central object, surrounded by the natural beauty of the mountains in the background and the colorful kites flying in the clear blue sky.

Ours w_{pos} :

The image captures a vibrant scene of a white pickup truck parked in a field of dry, brown grass. The truck is quite large, taking up a significant portion of the image, and it's detailed with various features. The truck's tires are black and silver, with one of them having a silver hubcap. The wheels are also black, and the truck's windows are white. **The truck's door is open, and there's a person sitting in the driver's seat. The truck also has a red and white sticker on it.**

In the sky above the truck, there are several kites flying. One of the kites is red and black, while another is yellow and black. There's also a green and yellow kite, as well as a blue and yellow one. The kites are scattered across the sky, with some being closer to the top of the image and others being lower.

The field in which the truck is parked is vast and stretches across the bottom of the image. The grass is dry and brown, **indicating that it might be a hot day or the field hasn't seen rain recently.**

In the background, there are hills and mountains visible. **The hills are green, suggesting that they are covered in vegetation, while the mountains are brown, possibly indicating that they are rocky or barren. There's also a white building in the distance, which adds some architectural interest to the scene.**

The sky is clear and blue, which provides a beautiful backdrop for the kites flying. The combination of the white truck, the colorful kites, and the natural landscape creates a dynamic and lively image.

Ours w_{neg} :

The image captures a vibrant scene of a white pickup truck parked in a field of dry, brown grass. **The truck is a Toyota**, as indicated by the logo on the truck door. **It's a four-door model, with a black door handle** and a black side mirror. The truck's tires are black, and the hubcaps are silver. The truck's windows are rolled up, and **there's a person sitting in the driver's seat, wearing a black shirt.**

The field in which the truck is parked is vast and stretches out to the horizon. **There are patches of green grass scattered throughout the field, and there are also some bushes in the distance.** The sky above is clear and blue, with no clouds.

What makes this scene particularly lively is the presence of kites flying in the sky. There are several kites, including a red kite, a green kite, and a yellow kite. **One of the kites is shaped like a dragon, and another one is shaped like a lizard.** The kites are flying high in the sky, adding a sense of movement and color to the image.

In the background, there are hills and mountains, which add depth to the image. The mountains are far in the distance, and they appear to be quite tall.

Overall, the image portrays a serene and picturesque setting with a white Toyota pickup truck parked in a field, surrounded by dry grass and flying kites in the clear blue sky. The presence of the truck and the person inside it suggests that this might be a recreational or leisure activity, possibly a day out in the countryside.

Figure 7: Qualitative results of Bunny-v1.1-8b trained with vanilla loss baseline and ours approach with w_{pos} and w_{neg} on SVIT-Details 71k dataset. Hallucinations are marked as red, the correct details that are not discovered in baseline are marked green.



Vanilla Loss:

The image depicts a cozy indoor setting, likely a living room or a study, with a prominent wooden table that takes up most of the space. The table is adorned with a variety of objects, including a stack of books, a glass vase, a wine glass, and a candle holder.

The stack of books is quite noticeable, with three books neatly arranged on top of each other. The books are of different colors, including blue, yellow, and black, and they are all hardcover. The titles of the books are not visible, but one of them is identified as "The Century's Man" and another as "These Days". The books are placed on the table, and there is a book with a yellow cover on top of the stack.

Beside the stack of books, there is a glass vase filled with water. The vase is clear and has a green plant with red flowers inside it. The flowers are vibrant and add a touch of color to the scene. The vase is placed on the table, and the plant is visible through the clear glass.

There is also a wine glass on the table, which is empty. The wine glass is placed near the vase and is made of clear glass.

A candle holder is also present on the table, and it contains a white candle. The candle is placed inside the holder, which is likely made of glass or another material.

In addition to the objects on the table, there is a chair visible in the image. The chair is made of wood and has a brown color. It is positioned near the table, possibly for someone to sit and read the books or enjoy the ambiance created by the candle and the flowers.

The background of the image is a white wall, which contrasts with the brown color of the table and the chair. The wall is clean and provides a simple backdrop for the objects on the table.

Overall, the image conveys a sense of tranquility and intellectual pursuit, with the combination of books, flowers, and candlelight creating a serene atmosphere.

Ours w_{pos} :

The image depicts a cozy indoor setting, likely a living room or a study. The room is dominated by a large wooden table, which spans almost the entire width of the image. The table is adorned with various objects, including a stack of books, a glass vase, and a wine glass.

The stack of books is prominently placed on the table. There are four books in total, each with a distinct cover. The top book is blue, while the second book from the top is yellow. The third book is red, and the bottom book is black. The titles of the books are visible, with one of them being "The Gentility Man". The books are neatly stacked, with the blue book on top and the black book at the bottom.

Beside the stack of books, there is a clear glass vase filled with water. The vase is placed on the table and contains a bouquet of red tulips. The tulips are vibrant and fresh, with green stems and leaves. The vase is transparent, allowing the water inside to be visible.

In addition to the vase, there is a wine glass on the table. The glass is clear and contains a white candle.

The candle is lit, casting a warm glow. The wine glass is placed near the vase, and both are positioned on the table.

Behind the table, there is a wooden chair. The chair is brown and has a backrest. It is positioned in such a way that it is partially visible behind the table.

The background of the image is a white wall, which provides a neutral backdrop to the scene. The wall extends from the left side of the image to the right, and it is clean and uncluttered.

Overall, the image conveys a sense of tranquility and intellectual pursuits, with the stack of books suggesting a love for reading, and the vase of tulips and lit candle adding a touch of elegance and warmth to the setting.

Ours w_{neg} :

The image depicts a cozy indoor scene, likely a reading corner or a study room. The main focus is a wooden table, which is dark brown in color. The table is quite large, occupying a significant portion of the image. On the table, there are three stacks of books, each with a different color cover. The books are neatly arranged, with the top book being blue, the middle one being yellow, and the bottom one being red. The titles of the books are not visible, but the colors of their covers are distinct.

Beside the stacks of books, there is a clear glass vase filled with water. The vase is placed on the table and contains a bouquet of red tulips. The tulips are vibrant and fresh, with their green stems visible through the clear glass of the vase. The vase is positioned near the books, adding a touch of nature to the scene.

In addition to the books and vase, there is a wine glass on the table. The wine glass is empty and has a slender stem. It is placed near the books, possibly indicating that someone might be enjoying a glass of wine while reading.

On the table, there is also a piece of paper with a red and blue design. The paper is placed near the books and adds a splash of color to the scene.

The background of the image is a white wall, which provides a clean and simple backdrop to the table and its contents. The wall is plain and does not have any decorations or patterns.

Overall, the image conveys a sense of tranquility and intellectual pursuit, with the stacks of books, the vase of tulips, and the wine glass suggesting a space for reading, relaxation, and contemplation.

Figure 8: Qualitative results of Bunny-v1.1-8b trained with vanilla loss and ours approach with w_{pos} and w_{neg} on SVIT-Details 71k dataset. Hallucinations are marked as red, the correct details that are not discovered in baseline are marked green.



Figure 9: The top left sub-figure is the input image, and the top right sub-figure is the generated image description from LLaVA-v1.5-7b fine-tuned from scratch with LLaVA-Details 23k dataset. The bottom bar charts display the probability of each token with clean image input v and with noisy image input v^* . The hallucinated objects are marked red, the grounded objects are marked green.

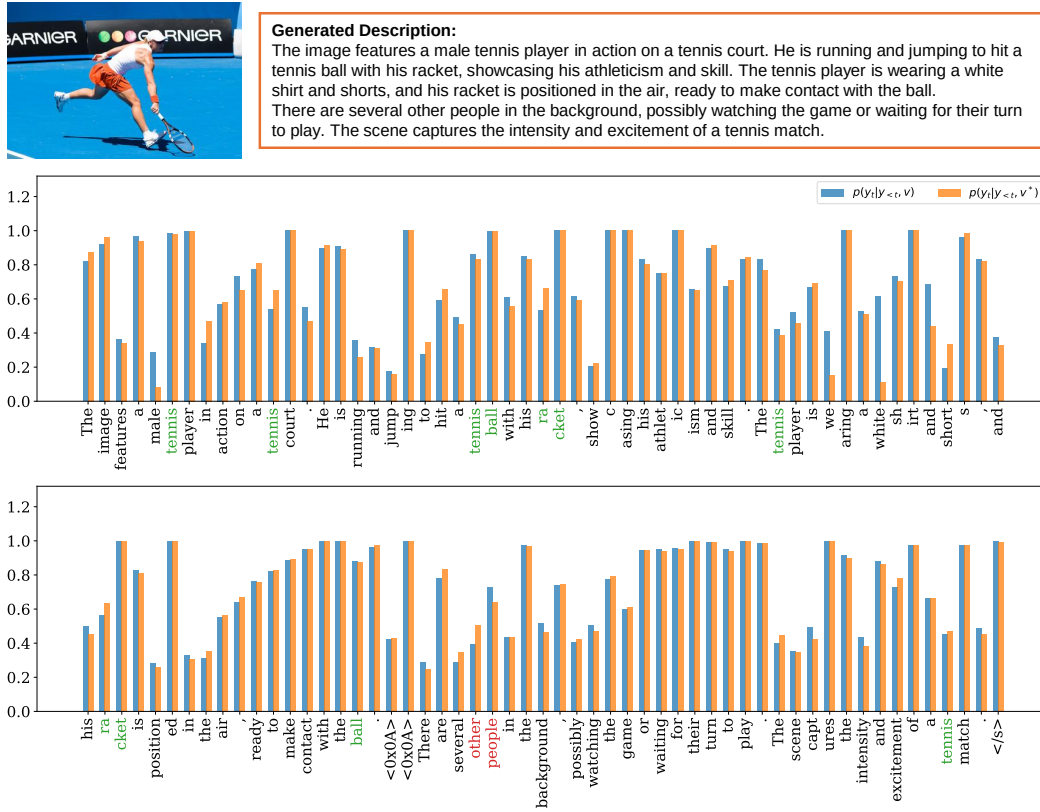


Figure 10: The top left sub-figure is the input image, and the top right sub-figure is the generated image description from LLaVA-v1.5-7b fine-tuned from scratch with LLaVA-Details 23k dataset. The bottom bar charts display the probability of each token with clean image input v and with noisy image input v^* . The hallucinated objects are marked red, the grounded objects are marked green.