

ReMATF: Recurrent Motion-Adaptive Multi-scale Turbulence Mitigation for Dynamic Scenes

Zhiming Liu, Zhicheng Zou, and Nantheera Anantrasirichai
Visual Information Laboratory, School of Computer Science, University of Bristol

Abstract

Atmospheric turbulence severely degrades video quality by introducing distortions such as geometric warping, blur, and temporal flickering, posing significant challenges to both visual clarity and temporal consistency. Current state-of-the-art methods are based on transformer, 3D architectures and require multi-frame input, but their large computational cost and memory usage limit real-time deployment, especially in resource-constrained scenarios. In this work, we propose ReMATF, a lightweight recurrent framework that restores videos using only two frames at a time while preserving spatial detail and temporal stability. ReMATF combines a multi-scale encoder-decoder with temporal warping and a motion-adaptive temporal fusion module that performs per-pixel fusion between the warped previous output and the current prediction to enhance coherence without enlarging the temporal window. This design reduces flicker, sharpens details, and remains efficient. Experiments on synthetic and real turbulence datasets show consistent improvements in PSNR/SSIM and perceptual quality (LPIPS), along with substantially faster inference than multi-frame transformer baselines, making ReMATF suitable turbulence mitigation in resource-constrained scenarios.

1. Introduction

Atmospheric turbulence (AT) causes image degradation in long-range imaging systems due to spatial and temporal variations in the air’s refractive index along the optical path [4]. The primary effects include geometric distortion, where images appear to shimmer, warp, and ripple as turbulent air motion perturbs the light path. Rapid turbulent fluctuations act as a time-varying lens, smearing fine details and resulting in image blur [28]. In addition, intensity fluctuations cause random local brightening and dimming, an effect that becomes more pronounced at longer ranges and with smaller aperture sizes. These distortions not only deteriorate visual quality but also impair scene interpretation by both humans and machines, particularly under severe con-

ditions.

Mitigating AT distortion is therefore essential. Prior to the advent of deep learning, traditional approaches such as non-rigid registration, multi-frame fusion, and deconvolution were commonly employed [3, 16, 40]. These methods can produce clean and stable results, but are largely limited to static scenes, where hundreds of frames can be exploited under the assumption that pixel displacements have approximately zero mean and exhibit quasi-periodic motion [11, 22]. Consequently, effective AT mitigation in dynamic scenes remains challenging, as temporal redundancy for the same objects is insufficient.

Deep learning has emerged as a promising solution, as models can be trained on large collections of distorted sequences rather than relying on per-sequence processing, as in traditional image processing methods [5, 13]. However, these data-driven approaches (discussed in Sec. 2) are often trained on synthetic datasets due to the lack of ground-truth data for atmospheric turbulence. As a result, they typically perform well only within the distortion regimes seen during training. Moreover, in real-world scenarios, turbulence severity can vary significantly and often co-occur with other degradations, such as haze, dust, and wind, limiting the generalisation capability of existing methods. Consistent with traditional approaches, static scenes benefit from an increased number of input frames, leading to improved restoration quality [36]. However, the number of frames is constrained by system memory. In dynamic scenes, five frames have been reported to achieve the best performance [2]. Notably, the trade-off between temporal information in scenes containing both static backgrounds and moving objects remains underexplored.

In this paper, we focus on AT mitigation in dynamic, real-world scenes. We systematically analyse the influence of distortion severity, training data composition, and temporal window size on generalizable restoration performance. To address memory limitations while preserving long-range temporal cues, we introduce a recurrent transformer-based framework that explicitly separates short- and long-term temporal reasoning.

In summary, we offer the following contributions:

- We propose a lightweight transformer-based method, **Re-MATF**, which for the first time mitigates AT distortions through coupled short- and long-term recurrent mechanisms.
- The short-term recurrence provides immediate restoration cues to guide the network in suppressing ripple artifacts.
- The long-term recurrence integrates the current restored output with the previous restored frame via a motion-aware weight map, estimated by our novel Motion-Adaptive Temporal Fusion (MATF) module. This design enables memory-efficient long-range temporal aggregation, where information from earlier frames is implicitly attenuated through recurrent propagation.
- We introduce turbulence-level conditioning to help the network adapt to a wide range of distortion severities.
- We construct a paired real-world AT dataset by replicating dynamic content from static scenes, enabling the generation of pseudo ground truth for supervised training.

2. Related Work

Early learning based video approaches primarily use residual CNN restoration with limited explicit temporal modelling. Gao et al. [10] introduce a DnCNN-style network and exploit temporal cues via multi-frame aggregation. To incorporate stronger alignment priors, Hoffmire et al. [17] apply block matching-based registration and multi-shot averaging followed by CNN refinement. Later, Anantrasirichai [2] explores complex-valued convolution, motivated by the need to better model phase information altered by AT [6]. Generative and adversarial learning have also been explored. Jin et al. [20] propose TSR-WGAN that integrates spatial and temporal information in a 3D input, and employs a large-scale dataset spanning algorithm-simulated, physically simulated, and real sequences. TurbuGAN [9] removes the need for paired ground truth by combining a physics-based forward model with adversarial distribution matching between captured and simulated measurements for multi-frame blind deconvolution. ATVR GAN [8] introduces a recurrent GAN-based video restoration approach that estimates turbulent optical flow and propagates temporal information. Pyramid GAN and inverting GAN are used in [33] and [26], respectively.

Recent methods aggregate temporal information using attention mechanisms or recurrent designs. TMT [37] introduces a two-stage pipeline that decouples tilt correction from deblurring and extracts features using temporal attention. PiRN [18] incorporates physics-based turbulence priors into a transformer framework. DATUM [34] translates the classical lucky imaging principle into a learnable architecture, using deformable attention and temporal channel attention TurbSegRes [29] proposes a segment-then-restore pipeline, separating moving foreground from background before restoration. RMFAT [25] employs a recurrent multi-

scale feature design that iteratively refines restoration across scales. DeTurb [41] combines deformable 3D convolutions for non-rigid alignment with a 3D Swin-based enhancement network. NeRT [19] leverages implicit neural representations together with a physically grounded tilt-then-blur turbulence model, while Nair [27] employs diffusion models.

In parallel, generic video restoration backbones have been adapted to turbulence, such as EDVR [30] style designs that leverage deformable alignment and multi-frame fusion to improve stability. Relatedly, generic video restoration architectures originally proposed for video deblurring can also serve as transferable backbones for AT studies, including the transformer-based VRT [23], the efficient spatio-temporal recurrent ESTRNN [38], and recurrent multi-scale bi-directional propagation designs such as RNN-MBP [39].

To scale temporal modelling without the quadratic complexity of self-attention, MambaTM [36] and MAMAT [15] apply selective state space models for long-range spatiotemporal aggregation, and introduce a learned latent phase distortion representation to provide turbulence-specific guidance. Task-driven formulations further couple mitigation with downstream objectives, such as DMAT [14], which jointly trains an AT mitigator and an object detector in an end-to-end framework, enabling feature exchange between low-level restoration and high-level semantics.

3. Analysis of Generalisation in AT Mitigation

We employ two methods for our analysis: MAMAT [15] and MambaTM [36]. Both are based on the Mamba architecture, which has been shown to outperform alternative models in terms of both restoration quality and computational efficiency [11]. Details of the datasets used are provided in Sec. 5.

Effect of Turbulence Severity in Training Data. We first investigate the impact of turbulence severity in the training data. We conduct this study on the ATSyn-Dynamic dataset [34], which provides three distortion levels: Weak, Medium, and Strong. Cross-level training and evaluation results are summarised in Tab. 1. Our experiments reveal that models trained on a narrow distortion range generalise poorly outside that regime. In particular, models trained only on subtle turbulence perform well on weak AT but degrade significantly when evaluated under severe conditions. A consistent pattern emerges across both MAMAT and MambaTM. Performance on Strong test data improves when training includes Strong turbulence, whereas models trained solely on Weak exhibit the largest degradation when evaluated on Strong. For MAMAT, the best Medium and Strong results are obtained when trained on Strong, while optimal Weak performance is achieved when trained on Weak. This demonstrates a clear trade-off between spe-

Table 1. Performance comparison of models trained and tested with AT levels.

Model (trained on)	Tested on			Avg. PSNR/SSIM/LPIPS
	Weak PSNR/SSIM/LPIPS	Medium PSNR/SSIM/LPIPS	Strong PSNR/SSIM/LPIPS	
MAMAT[15] (weak)	27.6543/0.8426/0.2226	27.3746/0.8207/0.2395	24.4744/0.7580/0.2955	26.5011/0.8071/0.2525
MAMAT[15] (medium)	27.5451/0.8417/0.2234	27.4546/0.8225/ 0.2376	24.5057/0.7591/0.2952	26.5018/0.8078/0.2521
MAMAT[15] (strong)	27.5166/0.8415/0.2290	27.6966/0.8258/0.2434	24.8913/0.7675/0.2944	26.7015/0.8116/0.2556
MambaTM[36] (weak)	27.9953/ 0.8541/0.1972	27.4776/0.8401/0.2001	26.0382/0.7969/0.2391	27.1704/0.8304/0.2121
MambaTM[36] (medium)	28.0181/0.8535/0.1979	27.6138/0.8422/0.1980	26.2394/0.8015/0.2388	27.2904/0.8324/0.2116
MambaTM[36] (strong)	27.7253/0.8456/0.2079	27.4436/0.8366/0.2050	26.2879/0.8018/0.2366	27.1523/0.8280/0.2165

Table 2. Performance comparison of models trained and tested with different datasets.

Model (trained on)	Tested on		
	ATSyn-Dynamic PSNR/SSIM/LPIPS	DeTurb PSNR/SSIM/LPIPS	Both PSNR/SSIM/LPIPS
MAMAT[15] (ATSyn-Dynamic)	24.8407/0.7678/0.2852	26.7033/0.7991/0.2941	26.3236/0.7882/0.2923
MAMAT[15] (DeTurb)	24.3604/0.7575/0.2923	26.7887/0.8025/0.2808	26.2239/0.7871/0.2884
MAMAT[15] (Both)	24.3088/0.7567/0.2978	26.0158/0.7843/0.2942	26.5229/0.7985/0.2868
MambaTM[36] (ATSyn-Dynamic)	26.3161/0.7995/0.2419	26.7766/0.8040/0.2447	26.6844/0.8033/0.2423
MambaTM[36] (DeTurb)	25.6761/0.7824/0.2508	27.1868/0.8204/0.2289	26.8199/0.8109/0.2366
MambaTM[36] (Both)	26.1983/0.7969/0.2467	27.1154/0.8175/0.2353	26.9103/0.8127/0.2332

cialisation to subtle distortions and robustness to severe turbulence. MambaTM exhibits the same tendency and further suggests that the optimal training severity for Weak and Medium depends on the evaluation metric, with PSNR and perceptual metrics favouring different regimes.

Although training on mixed-severity data substantially improves robustness, it remains insufficient when the model lacks explicit knowledge of the turbulence level at inference time. To address this limitation, we introduce *turbulence-level conditioning* (Sec. 4.1). We employ CLIP-IQA [31] to estimate perceptual quality and feed the resulting score as an auxiliary input to the network.

Synthetic Dataset Diversity and Generalisation. We investigate the impact of synthetic dataset diversity by evaluating models trained on atmospheric turbulence data generated using different simulation methods. Specifically, we employ two synthetic datasets: ATSyn-Dynamic with strong AT levels [34] and the DeTurb dataset [41], training separate models on each. Tab. 2 summarises the results and reveals a clear dependence on the synthetic generation process. For both MAMAT and MambaTM, the best performance is consistently achieved when training and testing are performed on the same synthetic dataset, whereas cross-dataset evaluation leads to noticeable degradation. Training on the combined set (ATSyn plus DeTurb) improves the overall performance on the merged test set, but does

not recover the in-domain peaks on either dataset, indicating that simply mixing two synthetic sources is insufficient to remove simulator-specific biases. Although MambaTM attains higher overall scores than MAMAT, it exhibits the same generalisation pattern, suggesting that the limitation is primarily data-driven rather than architecture-specific.

Fig. 1 shows the performance of models evaluated on real atmospheric turbulence footage, highlighting the impact of different synthetic training datasets despite using the same network architectures. The results indicate that training on even both synthetic datasets is insufficient to achieve robustness to real-world atmospheric turbulence. To enable the model to learn real AT distortions, we include real-world videos in the training dataset. Since corresponding clean versions are not available, we generate pseudo-ground truth using traditional image processing methods [3], which produce desirable results for static scenes. We then simulate dynamic scenes by mimicking camera translation at various speeds.

Influence of Temporal Window Size. In principle, a longer temporal window improves turbulence mitigation. In static regions, aggregating more frames suppresses ripple artefacts through temporal averaging, while in dynamic regions similar benefits can be achieved with accurate frame alignment. However, jointly processing many frames is computationally expensive and memory intensive. To en-

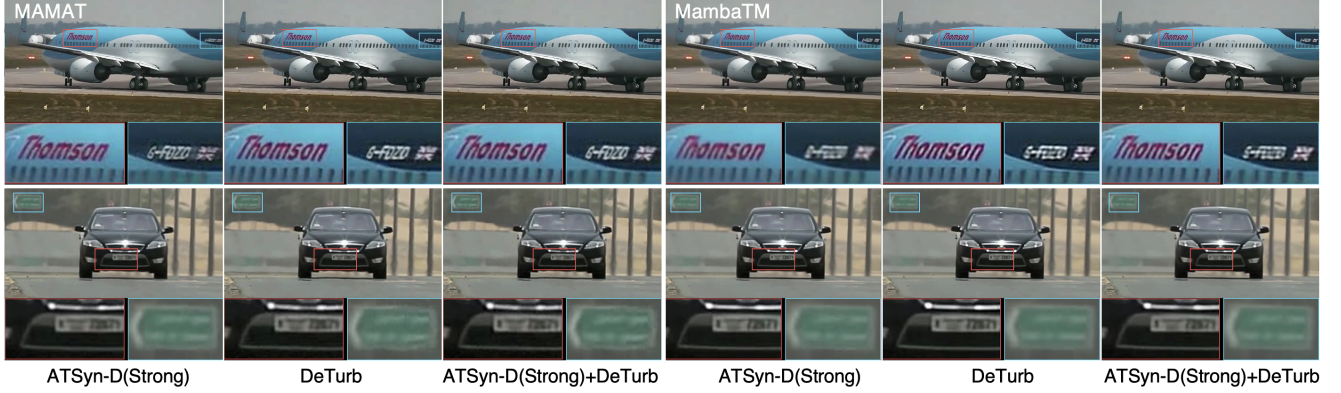


Figure 1. Restored results of real AT distortions from MAMAT [15] and MambaAT [36], trained on different synthetic datasets.




Figure 2. y - t plane visualisation comparing recurrent temporal fusion with different weights $M \in \{0.1, 0.25, 0.5\}$ under severe turbulence.

able long-range temporal aggregation without increasing memory usage, we adopt a recurrent formulation that propagates information through the previously restored frame. The current intermediate restoration $\hat{O}_t$ is fused with the previous restored frame O_{t-1} with exponentially decaying weight: $O_t = M\hat{O}_t + (1-M)O_{t-1}$, where earlier information decays progressively through recursive propagation [1].

We analyse the effect of the fusion weight by varying $M \in \{0.1, 0.25, 0.5\}$. Smaller values of M place greater emphasis on the previous restoration, effectively enlarging the temporal window. As shown in Fig. 2, under strong turbulence, smaller M produces smoother and more stable reconstructions by leveraging accumulated information from earlier frames, which helps suppress ripple artefacts and geometric distortions. However, object motion inevitably introduces occlusions, and imperfect alignment may produce artefacts when historical information dominates. Consequently, for weaker turbulence a larger M is preferable. When $M = 0.5$, the current estimate and previous output contribute equally, providing sufficient smoothing while maintaining temporal responsiveness. This setting corresponds to the short-term recurrent design in our framework (see Fig. 3), where only limited historical information is propagated. These observations motivate the use of adaptive temporal fusion, where the balance between current and historical information depends on turbulence severity.

4. Proposed Method

Our turbulence restoration framework adopts a recurrent architecture that jointly leverages short-term temporal cues and long-term temporal priors to progressively reconstruct clean frames from turbulent video sequences. As illustrated in Fig. 3, at time step t the model takes input the current distorted frame I_t and the previous restored output O_{t-1} . The two frames are concatenated to form a two-frame embedding that encodes coarse temporal correspondence and prior restoration context.

The embedding is forwarded to the *Mitigator*, a multi-stage module designed to extract spatio-temporal representations, align multi-scale structures, and refine high-frequency textures. Within each time step, the Mitigator employs hierarchical 3D convolutions to capture local spatio-temporal distortions, followed by transformer-based temporal modelling. Turbulence-level conditioning is injected into the encoder to modulate feature extraction according to distortion severity. The resulting aligned features are decoded to produce an intermediate restoration estimate $\hat{O}_t$. To enforce long-term temporal consistency, we introduce the proposed *Motion-Adaptive Temporal Fusion (MATF)* module (Sec. 4.3), which adaptively fuses $\hat{O}_t$ with the motion-compensated previous output. The learned weighting balances temporal smoothness against motion-preserving sharpness, effectively reducing ghosting and flickering artefacts.

The final restored frame O_t is recursively propagated to the next time step. This recurrent formulation enables memory-efficient long-horizon aggregation, allowing the model to accumulate temporal evidence over time while remaining robust to the strong, spatially varying distortions characteristic of atmospheric turbulence.

4.1. Turbulence-Level Conditioning

To enable the model to adapt to varying distortion levels, we introduce a per-frame turbulence level adjustment mech-

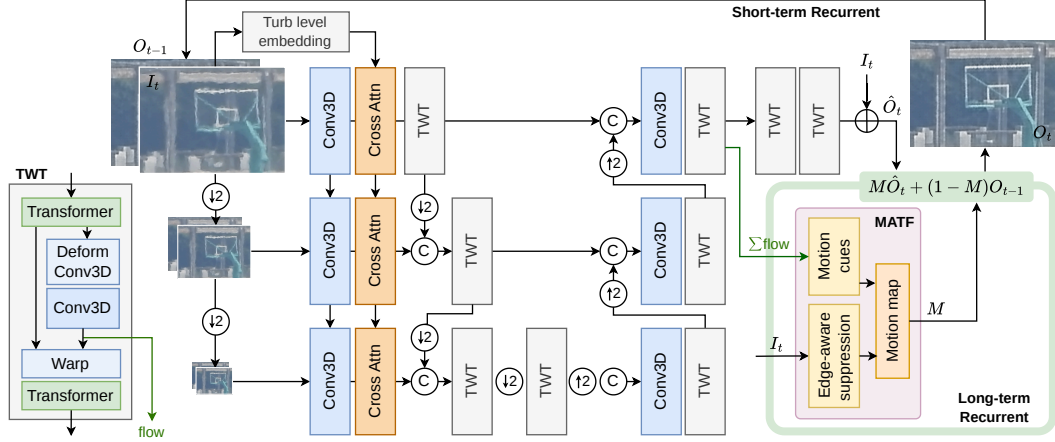


Figure 3. Overview of our proposed turbulence restoration framework.

anism (see Fig. 3). First, the distorted input is evaluated for perceptual quality using a CLIP-based Image Quality Assessment (CLIP-IQA) model [31], following analysis in Sec. 3. We evaluate multiple prompt formulations and find that the terms “quality” and “noisiness” provide the most reliable correlation with AT severity on ATSyn-Dynamic, enabling more stable adaptation across distortion levels. Since severe turbulence degrades perceptual quality, we define the turbulence level as the normalised reciprocal of the quality score. This scalar serves as a concise indicator of the overall turbulence severity in the current frame.

This scalar is then transformed into a latent embedding via a lightweight multilayer perceptron (MLP) and injected into the backbone network through a cross-attention modulation layer. Specifically, the turbulence embedding serves as the query, while the encoded spatio-temporal features act as both key and value. Through this turbulence-aware attention mechanism, the model dynamically reweights feature responses based on the estimated distortion level. Consequently, the backbone allocates greater correction capacity during intense turbulence (geometric stabilisation and multiscale alignment), while prioritising detail refinement and texture consistency under weaker turbulence. This mechanism enables the model to operate consistently across varying turbulence intensities without requiring separate models or manually designed heuristics.

4.2. Mitigator Architecture

The Mitigator is explicitly designed to model turbulence-induced distortions and to establish reliable spatio-temporal correspondences under spatially varying geometric fluctuations. The architecture comprises three principal components: (1) multi-scale feature extraction, (2) temporal alignment, and (3) feature refinement.

Multi-Scale Feature Extraction. AT produces spatially

non-uniform distortions that vary across scales, making hierarchical alignment essential. The concatenated inputs (I_t, O_{t-1}) are hence downsampled to half and quarter resolutions to construct a three-scale feature hierarchy. At each scale, low-level spatio-temporal representations are extracted using 3D convolutional blocks. These layers capture local geometric deformations, ripple artefacts, and intensity fluctuations induced by atmospheric turbulence. Turbulence-level conditioning is injected at this stage to modulate feature responses according to distortion severity. This conditioning mechanism enables the encoder to adapt its feature extraction behaviour across different turbulence regimes, improving robustness to both subtle and severe distortions.

Temporal Feature Alignment. At each scale, we introduce a Transformer-Warp-Transformer (TWT) block. The initial transformer enhances feature embeddings and facilitates attention-driven correspondence reasoning, allowing the network to emphasise stable regions while suppressing severely distorted areas. A lightweight flow estimation branch predicts forward optical flow fields, which guide a flow-warp module equipped with deformable convolutions [7] to compensate for fine-grained geometric distortions. The second transformer further refines the aligned embeddings. This coarse-to-fine, multi-scale design enables the model to handle both large displacements and subtle local fluctuations before proceeding to reconstruction.

Feature Refinement. Aligned features from all scales are fused and processed by a refinement module composed of two additional TWT blocks. This stage reconstructs high-frequency textures and removes residual distortions that remain after alignment. The resulting features are decoded to produce the intermediate restoration $\hat{O}_t$, which is subsequently utilised by the MATF module for temporally adaptive fusion.

Overall, the integration of 3D convolutions, transformer-based correspondence modelling, hierarchical alignment, and flow-guided warping equips the Mitigator to effectively address the stochastic, spatially varying characteristics of atmospheric turbulence.

4.3. Motion-Adaptive Temporal Fusion (MATF)

In the recurrent RMFAT framework [25], each frame is restored by referencing both the current turbulent input and the restored result from the previous time step. While this is effective in stabilising reconstruction, we observe two common failure cases: (1) if the model relies too heavily on the previous output, fast-moving content tends to produce ghosting or trailing artefacts; (2) if it relies too much on the current input, the image becomes sharp yet unstable, producing noticeable flickering. To address this trade-off, we introduce a lightweight *Motion-Adaptive Temporal Fusion* (MATF) strategy.

MATF performs pixel-wise estimation to determine the relative contribution of the previous restored frame and the current network output. A motion map identifies dynamic and static regions, guiding the fusion process. Dynamic areas rely more on the current restoration to avoid ghosting and preserve object boundaries, while static regions emphasise the previous output to maintain temporal consistency and reduce flicker.

To estimate such spatially varying weights, MATF considers multiple cues derived from the current input and the forward flow predicted internally by the backbone. These cues include the motion magnitude, the photometric difference between the current frame and the warped previous output, and, optionally, the forward-backward consistency of the flow. All terms are normalised to ensure stable contribution. Additionally, an edge-aware suppression term prevents strong edges from being incorrectly interpreted as moving regions, ensuring that structural boundaries remain stable over time. A simple exponential moving average is applied to smooth the motion map across frames, thereby reducing flicker in the estimated weights.

Once the motion map is produced, the fusion is straightforward: static pixels place greater confidence in the warped previous output, whereas dynamic pixels place more trust in the current restoration. As a result, the final reconstructed frame preserves dynamic detail while maintaining global temporal coherence. This fused output is then propagated to the next time step, replacing the original recurrence formulation in RMFAT.

4.4. Losses

Our training objective comprises several complementary losses that enhance spatial fidelity, texture sharpness, and temporal coherence in restored video sequences. Let O_t denote the restored frame at time step t , T_t the corresponding

ground truth, and $W(\cdot)$ a flow-based warping operator.

Reconstruction Loss. We adopt the Charbonnier penalty to provide robust pixel-wise supervision under heavy turbulence distortions:

$$\mathcal{L}_{\text{rec}} = \sqrt{(O_t - T_t)^2 + \epsilon^2}. \quad (1)$$

Wavelet-Domain Loss. To better preserve high-frequency structures, we impose a single-level Haar wavelet constraint:

$$\mathcal{L}_{\text{dwt}} = \|\mathcal{W}(O_t) - \mathcal{W}(T_t)\|_1, \quad (2)$$

where $\mathcal{W}(\cdot)$ denotes the wavelet transform.

Laplacian Structural Loss. To further enhance edge sharpness and structural fidelity, we penalise discrepancies in the Laplacian responses:

$$\mathcal{L}_{\text{lap}} = \|\Delta O_t - \Delta T_t\|_1. \quad (3)$$

Static-Aware Temporal Consistency Loss. The MATF module produces a spatial mask S_t that identifies static regions. To maintain temporal coherence while avoiding motion-induced artefacts, we enforce consistency between the current output and the warped previous prediction in static areas:

$$\mathcal{L}_{\text{temp}} = \|S_t \odot O_t - S_t \odot W(O_{t-1})\|_1. \quad (4)$$

Multi-Step Flow Consistency Loss. Beyond adjacent frames, we additionally encourage coherence with multiple historical predictions using the flow fields estimated at different decoding stages. For each offset k , the earlier output O_{t-k} is warped using the corresponding multi-scale flow $F_t^{(k)}$:

$$\tilde{O}_t^{(k)} = W(O_{t-k}, F_t^{(k)}). \quad (5)$$

Overall Objective. The final training objective integrates all components:

$$\mathcal{L} = \mathcal{L}_{\text{rec}} + \lambda_{\text{dwt}}\mathcal{L}_{\text{dwt}} + \lambda_{\text{lap}}\mathcal{L}_{\text{lap}} + \lambda_{\text{temp}}\mathcal{L}_{\text{temp}} + \lambda_{\text{flow}}\mathcal{L}_{\text{flow}}. \quad (6)$$

The loss terms collectively guide the model to reconstruct sharp details, stabilise temporal transitions, and remain robust across diverse turbulence intensities.

5. Datasets and Experiment settings

5.1. Synthetic datasets

We use the following synthetic datasets across our experiments. For the generalisation analysis in Sec. 3, we employ the ATSyn-Dynamic dataset [34], which provides paired turbulence-degraded and clean videos with three labelled severity levels (Weak, Medium, Strong). We follow the official train and test splits and use the provided level annotations to define the evaluation subsets. And we also use the

Table 3. Performance comparison on the ATSyn-dynamic set [34]. The **best**, **second best**, and **third best** results are highlighted.

Turbulence Level	Weak	Medium	Strong	Overall
Methods	PSNR / SSIM / LPIPS	PSNR / SSIM / LPIPS	PSNR / SSIM / LPIPS	PSNR / SSIM / LPIPS
RNN-MBP [39]	27.9243 / 0.8438 / 0.2096	27.4742 / 0.8210 / 0.2178	26.0812 / 0.7900 / 0.2511	27.2161 / 0.8186 / 0.2245
ESTRNN [38]	28.9805 / 0.8622 / 0.2005	28.3338 / 0.8472 / 0.2063	26.8897 / 0.8076 / 0.2480	28.1347 / 0.8407 / 0.2169
VRT [23]	28.8453 / 0.8625 / 0.1831	28.2628 / 0.8492 / 0.1865	26.7492 / 0.8217 / 0.2207	28.0179 / 0.8442 / 0.1954
RVRT [24]	29.8950 / 0.8799 / 0.1806	29.1658 / 0.8686 / 0.1855	27.6827 / 0.8309 / 0.2221	28.9332 / 0.8656 / 0.1957
TSRWGAN [21]	27.0844 / 0.8435 / 0.2141	26.7046 / 0.7915 / 0.2221	25.4230 / 0.7358 / 0.2671	26.4541 / 0.7927 / 0.2325
TMT [37]	29.1183 / 0.8654 / 0.1820	28.5050 / 0.8524 / 0.1841	26.9744 / 0.8110 / 0.2206	28.2665 / 0.8430 / 0.1942
DATUM [34]	30.2058 / 0.8867 / 0.1788	29.6203 / 0.8783 / 0.1825	28.2550 / 0.8456 / 0.2188	29.4222 / 0.8714 / 0.1919
MambaTM [36]	30.8736 / 0.8991 / 0.1425	30.0816 / 0.8903 / 0.1426	28.6142 / 0.8601 / 0.1721	29.9151 / 0.8843 / 0.1516
ReMATF [Ours]	31.1248 / 0.9127 / 0.0843	30.6515 / 0.9058 / 0.0921	28.9874 / 0.8712 / 0.1189	30.4072 / 0.8996 / 0.0987

DeTurb dataset [41], which is generated using a different simulation pipeline and therefore exhibits a distinct distortion distribution from ATSyn. DeTurb also provides paired degraded and clean sequences, enabling full-reference evaluation using PSNR, SSIM, and LPIPS. In Sec. 3, we train separate models on ATSyn-Dynamic and DeTurb to quantify simulator-specific bias under cross-dataset testing.

5.2. Real datasets

As discussed in Sec. 3, training on multiple synthetic datasets does not fully capture the characteristics of real AT. To address this limitation, we construct a paired dataset comprising 28 videos from real-world turbulent sequences. However, these sequences lack ground truth, as capturing the same dynamic scene under turbulence-free conditions is infeasible. To approximate ground truth, we generate pseudo-clean references using the statistical restoration method proposed in [3]. This approach produces reliable results only in static scenarios where hundreds of distorted frames can be accumulated. To introduce motion while preserving the pseudo ground truth, we simulate dynamic content by randomly cropping the first restored frame and translating the crop window across subsequent frames. This procedure mimics camera translation while maintaining the underlying scene consistency. The direction and speed of the crop displacement are randomly varied to ensure diverse motion patterns in the training data.

During evaluation, we further assess the generalisation capability of our method on real-world turbulence using three datasets: CLEAR [3], RLR-AT [32], and ATD [12]. These datasets contain long-range turbulence footage covering a diverse range of scenes and distortion severities. As clean references are unavailable for real recordings, we employ the traditional image restoration method CLEAR to generate pseudo ground truth. Consistent with its intended use, we primarily present qualitative comparisons on representative sequences to complement the quantitative results obtained on synthetic benchmarks.

5.3. Experiment settings

We train our restoration model using a two-frame recurrent strategy over 100 epochs. Training sequences are randomly cropped into 256×256 patches with a batch size of 1. The optimiser is Adam with an initial learning rate of 5×10^{-5} , decayed by a StepLR scheduler that halves the rate every 5 epochs. To further enhance temporal stability, we maintain a short buffer of past predictions and align them recursively using multi-scale optical flow fields estimated by the model.

The training split spans a wide range of turbulence severities. In preliminary experiments, we observed that some sequences exhibit extremely strong distortions for which the reconstruction error remains persistently high and shows little reduction during training. Such samples provide limited learning signal and can negatively affect optimisation by over-weighting gradients from uninformative examples. To mitigate this issue, we adopt a simple learnability-based filtering strategy to remove unlearnable or redundant samples, where extreme distortions result in unreliable supervision. Specifically, we analyse sequence-level loss trajectories during training and identify samples whose reconstruction error exhibits minimal improvement over time. These sequences are considered severely degraded and excluded from the training set. Applying this procedure to the synthetic dataset retains 878 sequences from the original 4350 training sequences. This filtering improves optimisation stability and reduces the influence of severely corrupted samples during training. After filtering, we further incorporate real atmospheric turbulence sequences with pseudo ground truth generated using synthetic translational motion, enabling the model to learn more realistic dynamic content during training.

For evaluation, we report PSNR, SSIM, and LPIPS averaged across all frames. Model checkpoints are saved based on the best combined PSNR+SSIM score on the validation set. Comparisons are conducted against state-of-the-art methods, including TSWGAN [21], TMT [37], DA-

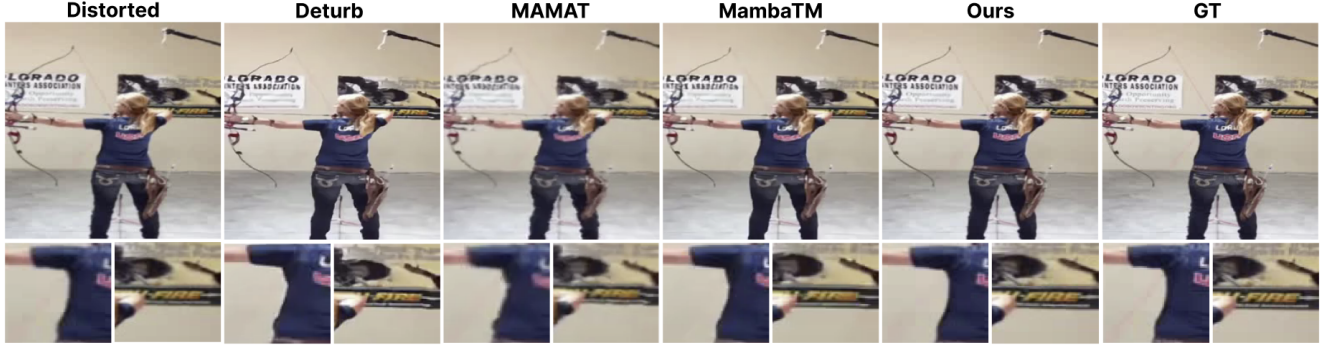


Figure 4. Qualitative comparisons on synthetic ATSyn-dynamic dataset.

Table 4. Performance and efficiency comparison on the real dataset. Speed is measured in second/frame on 480×384 images using an NVIDIA RTX4090. The best, second best, and third best results are highlighted.

Method	Params (M)↓	Runtime (s)↓	Static			Dynamic			
			PSNR↑	SSIM↑	LPIPS↓	PSNR↑	SSIM↑	LPIPS↓	tLPIPS↓
TMT [37]	26.04	0.667	18.52	0.623	0.321	23.16	0.794	0.231	0.0124
DATUM [34]	5.75	0.031	27.41	0.915	0.172	24.21	0.821	0.255	0.0390
DeTurb [41]	58.79	1.240	27.84	0.857	0.175	22.41	0.797	0.175	0.0115
MambaTM [36]	6.90	0.018	28.03	0.841	0.342	24.42	0.708	0.295	0.0117
MAMAT [15]	2.83	0.089	28.85	0.937	0.155	24.76	0.825	0.228	0.0148
RMFAT [25]	2.60	0.008	28.95	0.941	0.148	25.01	0.832	0.188	0.0123
ReMATF (Ours)	2.60	0.008	28.97	0.947	0.142	27.84	0.882	0.140	0.0100

TUM [34], MAMAT [15], and MambaTM [36].

6. Results and Discussion

6.1. Performance on Synthetic Data

To evaluate performance under controlled turbulence, we conduct experiments on the ATSyn-dynamic dataset [34]. Quantitative results across three turbulence levels are reported in Tab. 3. ReMATF achieves state-of-the-art performance across all metrics and consistently outperforms previous methods under both weak and strong turbulence, demonstrating strong robustness to varying distortion levels. These results indicate that the proposed cyclic recovery framework effectively leverages temporal information to mitigate turbulence-induced artefacts. Fig. 4 presents qualitative comparisons on representative sequences from ATSyn-dynamic. While DeTurb produces relatively clear results, it often suffers from temporal instability and structural inconsistencies across frames. In contrast, ReMATF generates temporally stable reconstructions while preserving fine structural details. Moreover, these improvements are achieved with substantially lower model complexity than DeTurb. Other methods tend to exhibit residual distortions or oversmoothing, whereas ReMATF better preserves structural fidelity and restores details closer to the ground truth.

6.2. Performance on Real Data

Tab. 4 reports quantitative results on real-world datasets covering both static and dynamic scenes. On dynamic scenes, ReMATF improves over RMFAT by +2.83dB PSNR, +0.05 SSIM (6%), and -0.048 LPIPS (25%). ReMATF achieves state-of-the-art performance across all evaluation metrics while maintaining a lightweight model and fast inference speed. Note that all methods were trained separately for static and dynamic scenes. As our method primarily focuses on dynamic content, the improvements on static scenes are modest, while substantially larger gains are observed on dynamic scenes.

Fig. 5 shows qualitative comparisons on distorted frames from the CLEAR dataset [3]. ReMATF recovers sharper structures and finer details, particularly in challenging regions such as vehicle boundaries, human silhouettes, and distant objects. In contrast, existing methods either retain noticeable distortions or produce over-smoothed or over-sharpened results, leading to structural degradation. Fig. 6 further illustrates restoration results on an ATD scene [12] with progressively increasing turbulence intensity. As distortion severity grows, competing methods often produce unstable structures or blurred textures. In contrast, ReMATF maintains stable reconstructions and stronger structural consistency across turbulence levels, demonstrat-

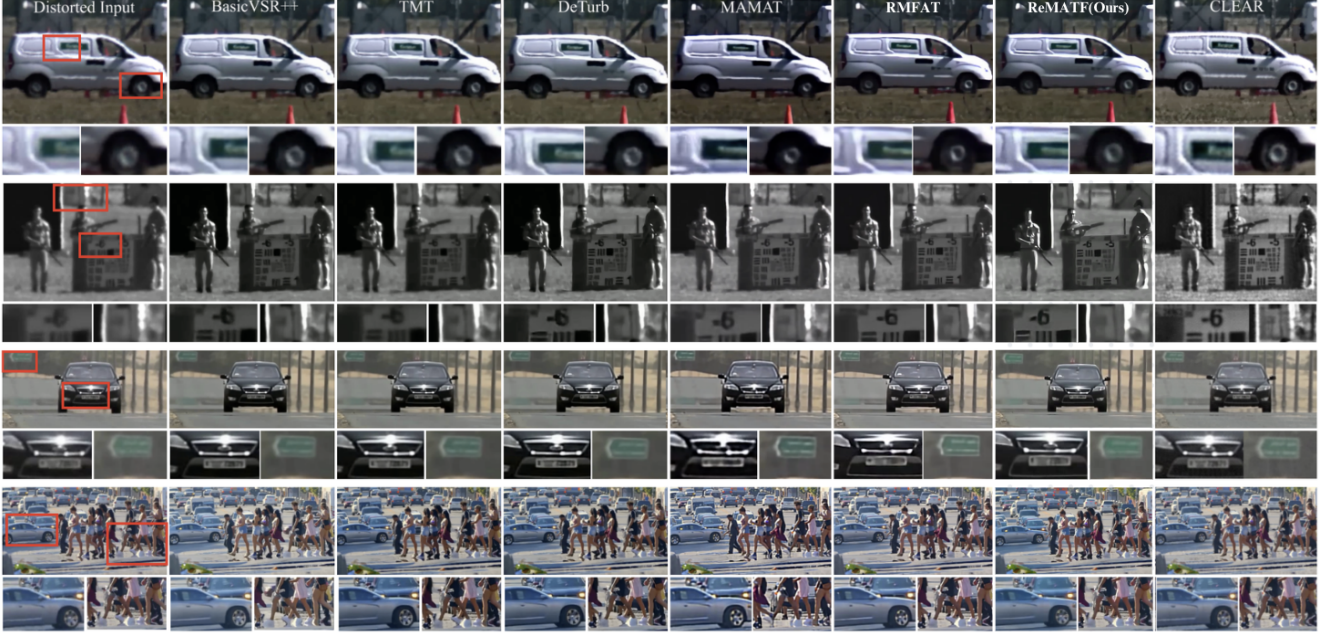


Figure 5. Qualitative comparisons on real-world AT from the CLEAR dataset.

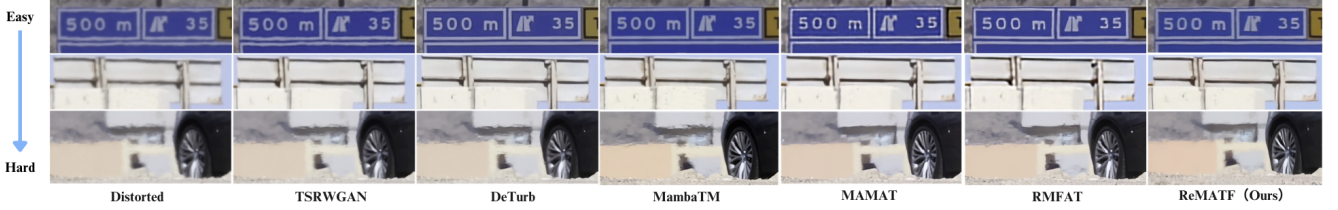


Figure 6. Qualitative comparison on real-world ATD [12] scenes with increasing turbulence severity (top to bottom).

ing improved robustness under severe atmospheric disturbances. Overall compared with previous methods, ReMATF consistently delivers higher reconstruction quality and improved perceptual similarity without increasing computational cost.

Temporal consistency. We evaluate temporal consistency on dynamic scenes using tLPIPS, with quantitative results reported in Tab. 4. ReMAFT achieves the best tLPIPS performance, consistent with the qualitative temporal stability comparisons shown in Fig. 7. The $y-t$ plots demonstrate that ReMAFT restores sharper fine details with fewer temporal fluctuations, particularly in the regions highlighted by the red arrows.

6.3. Ablation study

To analyse the contributions of each component in the proposed framework, we conducted ablation experiments on the ATSyn-dynamic dataset. The results are shown in Tab. 5. Removing the proposed MATF module leads to a significant performance degradation, indicating that adap-

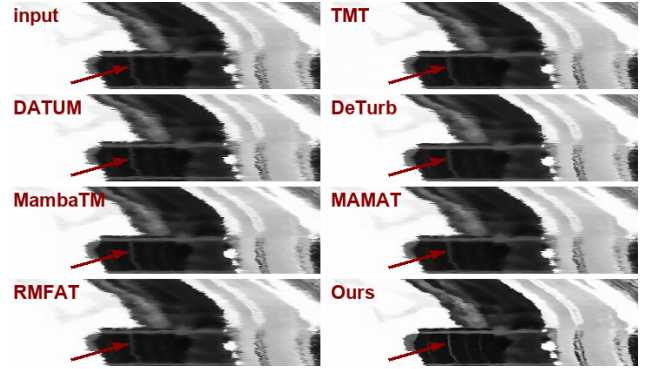


Figure 7. $y-t$ plots showing the temporal consistency of each model on the real-world CLEAR dataset. Zoom in for improved visualization of temporal variations and structural continuity.

tive fusion between the current recovery result and previous outputs is crucial for maintaining temporal stability and avoiding motion-induced artefacts. Removing the multi-scale distortion module also degrades the recovery quality,

Table 5. Ablation study on architecture on the **ATSyn-dynamic** dataset.

Config	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
w/o MATF	29.3582	0.8810	0.1364
w/o multi-scale warp	29.9555	0.8971	0.1013
w/o turb level embedding	30.1545	0.8879	0.1075
Full (Ours)	30.4072	0.8996	0.0987

demonstrating that accurate motion alignment is essential for handling spatially varying turbulent distortions. Furthermore, removing the turbulence-level embedding also degrades performance, suggesting that explicitly conditioning on turbulence intensity helps the model adjust its recovery behaviour across different distortion levels. When all components are enabled, the complete model achieves the best performance across all evaluation metrics, confirming that each proposed module contributes positively to overall recovery quality.

7. Conclusion

This paper presented ReMATF, a lightweight recurrent framework for mitigating AT in video sequences. ReMATF restores videos using only two frames at a time while maintaining spatial fidelity and temporal consistency. The proposed architecture combines a multi-scale encoder-decoder with temporal warping and a novel MATF module, which performs per-pixel fusion between the warped previous output and the current prediction to stabilise temporal dynamics without increasing memory requirements. Experiments on both synthetic and real AT datasets show that ReMATF achieves consistent improvements in PSNR, SSIM, and perceptual quality while providing significantly faster inference than recent multi-frame transformer baselines. These results demonstrate the effectiveness of combining short-term restoration cues with recurrent long-term aggregation for turbulence mitigation.

References

- [1] Anantrasirichai, N., Achim, A., Bull, D.: Atmospheric turbulence mitigation for sequences with moving objects using recursive image fusion. In: 2018 25th IEEE International Conference on Image Processing (ICIP). pp. 2895–2899 (2018). <https://doi.org/10.1109/ICIP.2018.8451755>
- [2] Anantrasirichai, N.: Atmospheric turbulence removal with complex-valued convolutional neural network. *Pattern Recognition Letters* **171**, 69–75 (2023). <https://doi.org/https://doi.org/10.1016/j.patrec.2023.05.017>
- [3] Anantrasirichai, N., Achim, A., Kingsbury, N.G., Bull, D.R.: Atmospheric turbulence mitigation using complex wavelet-based fusion. *IEEE Transactions on Image Processing* **22**(6), 2398–2408 (2013). <https://doi.org/10.1109/TIP.2013.2249078>
- [4] Andrews, L.C., Phillips, R.L., Hopen, C.Y., Al-Habash, M.A.: Theory of optical scintillation. *Journal of the Optical Society of America A* **16**(6), 1417–1429 (Jun 1999)
- [5] Chan, S.H., Chimitt, N.: Computational imaging through atmospheric turbulence. *Foundations and Trends in Computer Graphics and Vision* **15**(4), 253–508 (2023). <https://doi.org/10.1561/06000000103>
- [6] Cheng, Z., Li, Z., Ji, Z., Xia, A.: Quantitative atmospheric turbulence simulating method for laser field imaging. In: 2022 4th International Conference on Intelligent Control, Measurement and Signal Processing (ICMSP). pp. 238–242 (2022). <https://doi.org/10.1109/ICMSP55950.2022.9858990>
- [7] Dai, J., Qi, H., Xiong, Y., Li, Y., Zhang, G., Hu, H., Wei, Y.: Deformable convolutional networks. In: 2017 IEEE International Conference on Computer Vision (ICCV). pp. 764–773 (2017). <https://doi.org/10.1109/ICCV.2017.89>
- [8] Ettedgui, B., Yitzhaky, Y.: Atmospheric turbulence degraded video restoration with recurrent GAN (ATVR-GAN). *Sensors* **23**(21) (2023). <https://doi.org/10.3390/s23218815>
- [9] Feng, B., Xie, M., Metzler, C.: Turbugan: An adversarial learning approach to spatially-varying multiframe blind deconvolution with applications to imaging through turbulence. *IEEE Journal on Selected Areas in Information Theory* **PP**, 1–1 (01 2023). <https://doi.org/10.1109/JSAIT.2023.3234225>
- [10] Gao, J., Anantrasirichai, N., Bull, D.: Atmospheric turbulence removal using convolutional neural network (2019)
- [11] Hill, P., Anantrasirichai, N., Achim, A., et al.: Deep learning techniques for atmospheric turbulence removal: a review. *Artificial Intelligence Review* **58**, 101 (2025). <https://doi.org/10.1007/s10462-024-11086-6>
- [12] Hill, P., Anantrasirichai, N.: Atmospheric turbulence dataset. (Sep 2024). <https://doi.org/10.5281/zenodo.13737763>
- [13] Hill, P., Anantrasirichai, N., Achim, A., Bull, D.: Deep learning techniques for atmospheric turbulence removal: a review. *Artificial Intelligence Review* **58**(4), 101 (2025)
- [14] Hill, P., Liu, Z., Achim, A., Bull, D., Anantrasirichai, N.: DMAT: An end-to-end framework for joint atmospheric turbulence mitigation and object detection. In: Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision (WACV) (2026)
- [15] Hill, P., Liu, Z., Anantrasirichai, N.: MAMAT: 3D Mamba-Based Atmospheric Turbulence Removal and its Object Detection Capability. In: 21st IEEE International Conference on Advanced Visual and Signal-Based Surveillance (AVSS). IEEE (2025)
- [16] Hirsch, M., Sra, S., Schölkopf, B., Harmeling, S.: Efficient filter flow for space-variant multiframe blind deconvolution. In: 2010 IEEE Computer Society Conference on Computer Vision and Pattern Recognition. pp. 607–614 (2010)
- [17] Hoffmire, M.A., Hardie, R.C., Rucci, M.A., Hook, R.V., Karch, B.K.: Deep learning for anisoplanatic optical turbulence mitigation in long-range imaging. *Optical Engineering* **60**(3), 033103 (2021). <https://doi.org/10.1117/1.OE.60.3.033103>

- [18] Jaiswal, A., Zhang, X., Chan, S.H., Wang, Z.: Physics-driven turbulence image restoration with stochastic refinement. In: Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV). pp. 12170–12181 (October 2023)
- [19] Jiang, W., Boominathan, V., Veeraraghavan, A.: NeRT: Implicit neural representations for unsupervised atmospheric turbulence mitigation. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) Workshops. pp. 4236–4243 (June 2023)
- [20] Jin, D., Chen, Y., Lu, Y., Chen, J., Wang, P., Liu, Z., Guo, S., Bai, X.: Neutralizing the impact of atmospheric turbulence on complex scene imaging via deep learning. *Nature Machine Intelligence* **3**, 876–884 (10 2021). <https://doi.org/10.1038/s42256-021-00392-1>
- [21] Jin, D., Chen, Y., Lu, Y., et al.: Neutralizing the impact of atmospheric turbulence on complex scene imaging via deep learning. *Nature Machine Intelligence* **3**(10), 876–884 (2021). <https://doi.org/10.1038/s42256-021-00392-1>
- [22] Li, D.: Suppressing atmospheric turbulent motion in video through trajectory smoothing. *Signal Processing* **89**(4), 649–655 (2009)
- [23] Liang, J., Cao, J., Fan, Y., Zhang, K., Ranjan, R., Li, Y., Timofte, R., Van Gool, L.: Vrt: A video restoration transformer. *IEEE Transactions on Image Processing* **33**, 2171–2182 (2024). <https://doi.org/10.1109/TIP.2024.3372454>
- [24] Liang, J., Fan, Y., Xiang, X., Ranjan, R., Ilg, E., Green, S., Cao, J., Zhang, K., Timofte, R., Gool, L.V.: Recurrent video restoration transformer with guided deformable attention. In: *Advances in Neural Information Processing Systems*. vol. 35, pp. 378–393. Curran Associates, Inc. (2022)
- [25] Liu, Z., Anantrasirichai, N.: RMFAT: Recurrent multi-scale feature atmospheric turbulence mitigator. In: Proceedings of the AAAI Conference on Artificial Intelligence (2026)
- [26] Mei, K., Patel, V.M.: LTT-GAN: Looking through turbulence by inverting gans. *IEEE Journal of Selected Topics in Signal Processing* **17**(3), 587–598 (2023). <https://doi.org/10.1109/JSTSP.2023.3238552>
- [27] Nair, N.G., Mei, K., Patel, V.M.: AT-DDPM: Restoring faces degraded by atmospheric turbulence using denoising diffusion probabilistic models. In: Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision (WACV). pp. 3434–3443 (January 2023)
- [28] Rana, H.S.: Toward generic military imaging adaptive optics. In: *Proceedings of SPIE*. vol. 7119, p. 711904 (Sep 2008). <https://doi.org/10.1117/12.800442>
- [29] Saha, R.K., Qin, D., Li, N., Ye, J., Jayasuriya, S.: Turb-seg-res: A segment-then-restore pipeline for dynamic videos with atmospheric turbulence. 2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR) pp. 25286–25296 (2024). <https://doi.org/10.1109/CVPR52733.2024.02389>
- [30] Vint, D., Caterina, G.D., Kirkland, P., Lamb, R.A.: Deep learning-based turbulence mitigation for long range imaging. In: Bouma, H., Prabhu, R., Yitzhaky, Y., Kuijff, H.J. (eds.) *Artificial Intelligence for Security and Defence Applications II*. vol. 13206, p. 132060Z. International Society for Optics and Photonics (2024). <https://doi.org/10.1117/12.3031269>
- [31] Wang, J., Chan, K.C., Loy, C.C.: Exploring clip for assessing the look and feel of images. In: AAAI (2023)
- [32] Xu, S., Sun, R., Chang, Y., Cao, S., Xiao, X., Yan, L.: Long-range turbulence mitigation: A large-scale dataset and a coarse-to-fine framework. *arXiv preprint arXiv:2407.08377* (2024)
- [33] Yuan, Z., Meng, P., Yin, W., Zhou, L.: Turbulence mitigation in optical imaging using pyramid attention gan. *Optics & Laser Technology* **188**, 112880 (2025). <https://doi.org/https://doi.org/10.1016/j.optlastec.2025.112880>
- [34] Zhang, X., Chimitt, N., Chi, Y., Mao, Z., Chan, S.H.: Spatio-temporal turbulence mitigation: A translational perspective. In: 2024 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR). pp. 2889–2899 (2024). <https://doi.org/10.1109/CVPR52733.2024.00279>
- [35] Zhang, X., Chimitt, N., Chi, Y., Mao, Z., Chan, S.H.: Spatio-temporal turbulence mitigation: A translational perspective. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR). pp. 2889–2899 (June 2024)
- [36] Zhang, X., Chimitt, N., Wang, X., Yuan, Y., Chan, S.H.: Learning phase distortion with selective state space models for video turbulence mitigation. In: Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR). pp. 2127–2138 (2025)
- [37] Zhang, X., Mao, Z., Chimitt, N., Chan, S.H.: Imaging through the atmosphere using turbulence mitigation transformer. *IEEE Transactions on Computational Imaging* **10**, 115–128 (2024). <https://doi.org/10.1109/TCI.2024.3354421>
- [38] Zhong, Z., Gao, Y., Zheng, Y., et al.: Real-world video deblurring: A benchmark dataset and an efficient recurrent neural network. *International Journal of Computer Vision* **131**(1), 284–301 (2023). <https://doi.org/10.1007/s11263-022-01705-6>
- [39] Zhu, C., Dong, H., Pan, J., Liang, B., Huang, Y., Fu, L., Wang, F.: Deep recurrent neural network with multi-scale bi-directional propagation for video deblurring. In: Proceedings of the AAAI Conference on Artificial Intelligence. vol. 36, pp. 3598–3607 (2022). <https://doi.org/10.1609/aaai.v36i3.20272>
- [40] Zhu, X., Milanfar, P.: Removing atmospheric turbulence via space-invariant deconvolution. *IEEE Transactions on Pattern Analysis and Machine Intelligence* **35**(1), 157–170 (2013)
- [41] Zou, Z., Anantrasirichai, N.: DeTurb: Atmospheric turbulence mitigation with deformable 3d convolutions and 3d swin transformers. In: 17th Asian Conference on Computer Vision. p. 20–37 (2024)

S1. Additional Analysis of Generalization in AT Mitigation

S1.1. Effect of Motion on Temporal Fusion

We further analyse how scene motion affects the preferred temporal fusion behaviour under severe atmospheric turbulence. While stronger temporal accumulation can improve

temporal stability in relatively stable regions, its effectiveness may change substantially once object motion becomes large.

When object motion is large, the benefit of stronger temporal accumulation diminishes. In dynamic regions, imperfect alignment and occlusion make recurrent propagation more fragile, such that excessive reliance on previous outputs may introduce blur, ghosting, or structural trailing artefacts. This motivates the analysis of motion as an additional factor influencing the preferred temporal fusion behaviour.

To better understand this discrepancy, we conduct this analysis on synthetic data [35], where object motion can be separated more clearly from the micro-motions induced by AT. Object motion speed is estimated using optical flow, while turbulence severity is given by the synthetic generation protocol [34]. We divide the test clips into slow and fast-motion groups based on the average pixel displacement between consecutive frames. The resulting motion-binned evaluation is shown in Tab. S1.

The motion-binned results reveal a clearer picture. Under strong turbulence, when motion is slow, larger history weights are indeed beneficial: for both MAMAT and MambaTM, $w = 0.90$ achieves the best PSNR, SSIM, and LPIPS. This agrees with the intuition from the $y-t$ plane visualisation, where stronger temporal accumulation helps stabilise severe turbulence and suppress ripple-like temporal fluctuations. In contrast, under fast motion, the trend reverses: the more balanced setting $w = 0.50$ performs best for both models, while larger history weights lead to pronounced degradation. This indicates that once motion becomes substantial, stronger reliance on historical information amplifies misalignment, occlusion, and error propagation.

S2. More Detail on Real Dataset with Pseudo Motion

Existing simulators model turbulence physics but suffer from domain bias (Sec. 3), while real data lacks supervision. We bridge this gap by combining real turbulence with pseudo-clean references and controlled crop-based motion. We vary the motion speeds and directions, exposing the model to diverse temporal dynamics rather than a fixed linear shift. Note that the model is not bound to the pseudo-GT distribution, as training uses two complementary sources: synthetic data with true clean ground truth to anchor sharp content, and real paired clips that capture realistic atmospheric turbulence.

S2.1. Real Dataset Construction

To complement the synthetic training data, we construct a paired real AT training set from 28 real turbulent scenes from the RLR-AT dataset[32]. For each scene, we first

generate a pseudo-clean reference image using the statistical restoration method in [3], which is effective for static turbulence sequences with sufficient temporal redundancy. Since reliable ground-truth videos are unavailable for real dynamic AT, we create paired dynamic training clips by applying the same spatial crop to (i) the distorted turbulent frames and (ii) the pseudo-clean reference image. This preserves the real AT distortions in the input while providing a temporally stable supervisory target.

All generated clips use a fixed spatial resolution of 256×256 . For each scene, we produce two types of crop trajectories. First, we construct scan-based trajectories by traversing the image in a random serpentine order with a 6-pixel stride. Intermediate crop positions are further densified using 2-pixel steps to obtain smoother motion, and the resulting trajectory is randomly split into 3-5 scan clips of different lengths. Second, we generate 10 additional random clips per scene. For each random clip, the clip length is uniformly sampled from 240 to 480 frames, while the crop velocity is randomly sampled from 4 to 10 pixels per frame with a random direction. When the crop reaches an image boundary, the motion direction is reflected to keep the crop within the valid image region. The same crop coordinates are used for the turbulent sequence and the pseudo-clean reference, getting frame-wise paired supervision under simulated camera motion.

Across the 28 real scenes, this procedure produces 110 scan clips containing 23,274 frames and 280 random clips containing 101,173 frames, resulting in 390 paired real training clips with a total of 124,447 frames. To ensure consistent spatial dimensions within each scene, all turbulent frames are normalised to the dominant frame resolution before crop generation when necessary, which affects 46 frames in total. For reproducibility, we store the crop trajectory of each generated clip, including the start position, motion parameters, and per-frame crop coordinates. The composition of the final mixed training set is summarised in Tab. S2.

S2.2. Additional Results with ATSyn + Real Training

We further evaluate the effect of augmenting the filtered ATSyn-Dynamic training set with the paired real clips constructed above. The resulting mixed training set contains 1,268 sequences and 451,119 frames in total (Tab. S2). We compare models trained on ATSyn only and ATSyn + Real on both the synthetic ATSyn-Dynamic benchmark and the real dynamic AT benchmark used in the main paper.

As shown in Tab. S3, augmenting the filtered synthetic training set with the proposed paired real clips improves performance on both the synthetic and real dynamic AT benchmarks. On ATSyn-Dynamic, the mixed training strategy increases PSNR from 30.4072 to 30.6913, SSIM

Table S1. Motion-binned analysis of fixed temporal fusion weights on the Strong test split. Results are averaged over the Weak, Medium, and Strong training settings.

Model	Motion	$w = 0.50$			$w = 0.75$			$w = 0.90$		
		PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
MAMAT	Slow	24.3858	0.7293	0.3361	25.3967	0.7548	0.3089	25.8157	0.7634	0.2946
MambaTM	Slow	24.9081	0.7586	0.2644	26.1791	0.7918	0.2313	26.8632	0.8058	0.2154
MAMAT	Fast	24.3501	0.7551	0.3337	22.4278	0.7151	0.3853	20.2574	0.6665	0.4477
MambaTM	Fast	25.0127	0.7857	0.2631	22.7781	0.7362	0.3263	20.4118	0.6784	0.4026

Table S2. Composition of the final training set. The synthetic subset corresponds to the filtered ATSyn-Dynamic training data used in the main paper.

Training subset	# Sequences	# Frames
Filtered ATSyn-Dynamic	878	326,672
Real paired clips	390	124,447
ATSyn + Real (Final)	1,268	451,119

Table S3. Effect of augmenting ATSyn-Dynamic with the proposed real paired clips. We report performance on both the synthetic ATSyn-Dynamic benchmark and the real dynamic AT benchmark.

Training data	ATSyn-Dynamic (Overall)			Real (Dynamic)		
	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$
ATSyn only	30.4072	0.8996	0.0987	25.13	0.834	0.181
ATSyn + Real	30.6913	0.9005	0.0911	27.84	0.882	0.140

from 0.8996 to 0.9005, and reduces LPIPS from 0.0987 to 0.0911, indicating that the inclusion of real paired clips does not compromise synthetic-domain performance. More importantly, the gains on real dynamic AT are substantially larger: PSNR improves from 25.13 to 27.84, SSIM from 0.834 to 0.882, and LPIPS decreases from 0.181 to 0.140. These results suggest that the proposed real paired clips provide complementary supervision beyond synthetic simulation alone, particularly for dynamic real-world turbulence where appearance changes and motion patterns are not fully captured by synthetic distortions. Overall, combining ATSyn-Dynamic with the constructed real paired clips leads to better generalisation while preserving strong restoration quality on the original synthetic benchmark.