

Stream3D: Sequential Multi-View 3D Generation via Evidential Memory

Kaichen Zhou^{2,3*} Zeyang Bai^{1,2*} Xinhai Chang^{2*}
Mengyu Wang³ Paul Liang^{2†} Fangneng Zhan^{1†}

¹World Mind Lab, HKUST ²Media Lab and EECS, MIT

³Kempner Institute, Harvard University



Figure 1: **Stream3D** takes streaming input views as additional conditioning signals to improve the performance of pretrained single-view-conditioned 3D generation models. Compared with SAM3D, this demo shows that incorporating views from the input stream can substantially improve 3D generation quality.

Abstract

View-conditioned 3D generators such as SAM 3D, TRELLIS and Hunyuan3D produce high-quality object reconstructions from a single view, but real-world visual observation often arrives as long monocular streams. Naively applying these generators to each streaming frame independently leads to severe temporal inconsistency in the generated results. To address this problem, we propose Stream3D, the first training-free streaming mechanism that turns a frozen view-conditioned 3D generator into a streaming generator with constant cross-chunk memory. Stream3D achieves this by maintaining a compact evidential memory, which selectively caches the most informative historical frames based on a proposed evidence score mechanism. As the stream progresses, the memory dynamically updates to retain a fixed number of informative frames, preventing the memory footprint from growing linearly with sequence length. This also prevents degradation over long sequences and keeps the underlying generator completely unchanged without retraining, architectural modifications, or auxiliary losses. Evaluated on both realistic and synthetic streaming benchmarks, Stream3D outperforms latent-transport baselines, including KV-cache reuse and flow-based feature editing, across both photometric and geometric metrics. More details can be found at: [Link](#).

*Equal contribution as first authors. †Joint supervision.

1 Introduction

Object-centric 3D generation is becoming a practical building block for vision and robotics [39, 33, 61]. Recent systems such as SAM 3D Objects [9] and TRELLIS.2 [78] can take an image, isolate an object, and reconstruct a Gaussian splat [25] or mesh within seconds. Yet their input model remains fundamentally non-streaming. They are designed for a single view, or a small set of views, while real capture devices produce long monocular streams: a phone circling an object, a robot observing while moving, or a wearable camera recording continuously. Naively applying a single-view 3D generator frame by frame yields temporally inconsistent reconstructions; feeding all frames via multi-diffusion method [4] or multiview fusion [32] is computationally expensive or even infeasible; and processing fixed-size chunks via a flow matching-based method [29] loses the history needed for global consistency.

An alternative approach is to adapt techniques from streaming video generation or 3D reconstruction [26, 18, 30, 89]. For instance, state-transport mechanisms like KV banks [30] or FlowEdit-style velocity edits [29] could be introduced to propagate information across chunks. However, transporting latent states in this manner is fundamentally problematic. As the orientation, shape, and scale of these states are deeply entangled within the generator, they are difficult to align across frames, leading to severe error accumulation during the streaming process. Furthermore, as these methods transport and accumulate state over time, their memory footprint naturally grows with sequence length. Ultimately, the transported state itself can become a source of error: over long streams, the very mechanism intended to preserve consistency may paradoxically degrade it.

To solve this problem, we propose **Stream3D**, a training-free streaming wrapper that turns a frozen view-conditioned 3D generator into a long-stream generator without modifying its weights or architecture. Rather than transporting latent states across chunks, Stream3D retains *evidential views*: observed frames that the generator itself identifies as reliable conditioning signals through its cross-attention maps. During a lightweight one-step warmup pass, we compute an evidence score for each query token and incoming view, measuring whether the token attends to that view both strongly and selectively. These scores update an *Adaptive Evidential Memory*, which stores only a fixed number of high-evidence frame indices per query token, keeping memory constant with stream length. At each chunk, token-level evidence is aggregated into frame-level ownership scores, and the top- K frames are selected as a bounded conditioning bundle for *Evidence-Based Multi-Generation*. This allows different spatial regions of the 3D volume to retrieve different historical observations, rather than relying on a single global frame subset or an accumulated latent state. As new views arrive, the retained evidence for each query token can only be maintained or improved, yielding a simple non-degradation property in evidence space. In this way, Stream3D avoids latent-space alignment, preserves long-range visual evidence, and enables coherent streaming 3D generation while leaving the original generator unchanged.

We evaluate Streaming3D as a lightweight streaming wrapper around pre-trained SAM 3D on long monocular streams as shown in Fig. 1. Across photometric and geometric metrics, Streaming3D improves over latent-transport baselines while maintaining a constant memory footprint and avoiding the long-horizon degradation observed in KV-bank and FlowEdit-style alternatives. Our contributions are fourfold:

- **Streaming 3D generation.** We pioneer the task of extending frozen view-conditioned 3D generators to long monocular streams, producing temporally consistent 3D generations while keeping memory bounded and avoiding retraining.
- **Adaptive Evidential Memory.** We introduce a compact memory mechanism that stores token-level evidential views rather than transporting latent states. The memory is interpretable and training-free, with a footprint that remains constant with stream length.
- **Evidence-Based Multi-Generation.** We propose an evidence-guided generation strategy that aggregates token-level memory into a bounded conditioning view bundle and runs the frozen generator on the selected views. This enables different spatial regions to draw from the most reliable historical observations without modifying the underlying generator.
- **Superior streaming performance.** We show that Stream3D outperforms latent-transport and fixed-view baselines across photometric and geometric metrics, while avoiding long-horizon degradation and maintaining a constant memory footprint.

2 Related Work

2.1 3D Generation

Recent object-centric 3D generators can be understood along three main design axes: *output representation*, *learning regime*, and *input format*. Along the first axis, different methods adopt different 3D representations, including triplane- and Neural Radiance Field (NeRF)-based backbones [19, 64, 47, 84, 6, 33, 1, 69], surface meshes [80, 75, 79, 39, 73, 74, 63, 17], 3D Gaussian splats [21, 25, 61, 81, 62, 83], and native structured latent volumes [86, 76, 36, 35, 9, 78]. Along the second axis, existing approaches cover closed-form regressors [19, 64, 80, 75, 21, 78, 33, 39, 61, 73, 74, 1, 81, 69], 3D latent diffusion models [86, 76, 36, 35, 9, 51, 24], and SDS-based optimization methods [52, 37, 72, 67, 46, 7, 63, 53, 62, 83, 60, 54]. Some layout-aware variants [9, 32, 2] further model the spatial arrangement of multiple objects within a scene. The third axis, *input format*, is the one most relevant to our work. Despite their differences in representation and learning paradigm, most existing methods assume a fixed and limited input interface: they take either a single image or a small, predefined set of images as input. Multi-view diffusion methods [40, 56, 42, 43, 57, 28, 65, 34] relax this setting by first hallucinating additional views before reconstructing 3D geometry. Video-conditioned reconstruction models [71, 31, 82, 88, 68, 10] and 4D-aware generators [3, 58, 87, 85, 23, 11, 55] extend the input format further to short temporal clips. More recently, MV-SAM3D [32] enables multi-view fusion directly in the latent space of a 3D generator. Nevertheless, these methods still operate on a fixed input bundle determined in advance, rather than supporting truly open-ended streaming inputs. None of these methods natively supports unbounded online streams. In practice, long-stream processing is typically handled through ad hoc latent-transport schemes, which propagate intermediate states across chunks. However, such designs usually incur memory growth with sequence length and lead to performance degradation over long horizons. In this work, we adapt a frozen view-conditioned generator [9] into a streaming generator that maintains constant cross-chunk memory, independent of stream length, and agnostic to the model backbone.

2.2 Reconstruction from Streaming Inputs

Reconstructing 3D geometry from streaming inputs has traditionally been studied in monocular SLAM [15, 14, 12, 27, 50, 16, 48, 49, 5, 59, 45, 20], which incrementally estimates camera motion and scene structure from video. Recent methods have extended modern feed-forward reconstruction models to online settings. Notably, Spann3R [66] augments a DUST3R-style encoder [71] with a token-addressable spatial memory, enabling online pointmap fusion over long image streams. Similarly, SLAM3R [41], also built upon DUST3R, introduces a real-time end-to-end dense reconstruction system that directly predicts 3D pointmaps from RGB videos. Point3R [77] further incorporates an explicit geometry-aligned spatial pointer memory, together with 3D hierarchical RoPE and an adaptive fusion mechanism. However, DUST3R itself remains inherently two-view, restricting each inference step to a fixed image pair and making large-scale fusion dependent on iterative matching and optimization. VGGT-SLAM [44, 68] addresses this limitation by adopting the more powerful VGGT transformer, which supports image sets of arbitrary length. CUT3R [70] instead adopts an RNN-style formulation for causal pointmap prediction from unstructured image streams. However, it compresses all past observations into a limited recurrent state, which can hinder long-range memorization and fine-grained multi-view fusion. Following the design philosophy of modern large language models, StreamVGGT [89] and Stream3R [30] employ causal transformers to implicitly cache historical visual tokens. In addition, because CUT3R suffers from severe drift on long streaming inputs, TTT3R [8] proposes a simple empirical state-update rule to improve sequence-length generalization. Streaming3D departs from these reconstruction-centered approaches: while online reconstruction focuses on aggregating geometry already observed in the input stream, streaming 3D generation must also infer and synthesize unseen structure under temporal and geometric consistency constraints.

3 Method

We extend view-conditioned 3D generators — SAM 3D Objects [9] — to handle long streaming inputs without retraining, architectural change, or auxiliary loss shown in Fig. 2. The *Adaptive Evidential Memory* (Sec. 3.2) enables efficient long-range memory by retaining token-level evidence from past views, while *Evidence-Based Multi-Generation* (Sec. 3.3) leverages this memory to produce temporally consistent and geometrically coherent 3D generations throughout the streaming process.

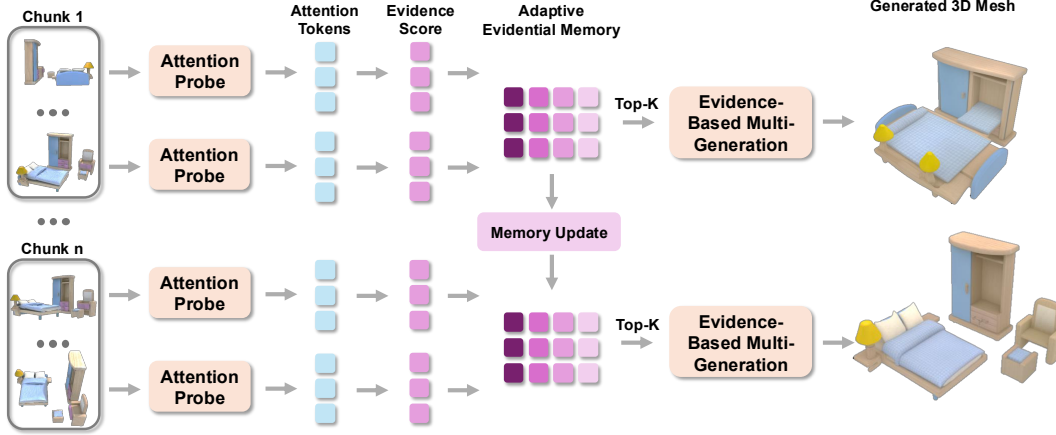


Figure 2: **Framework of Stream3D.** Given a streaming video, Streaming3D processes frames chunk by chunk. A lightweight warmup pass extracts token-wise evidence score from cross-attention, which is stored to vote for informative frames to update the evidential memory, i.e., **Adaptive Evidential memory**. Then, the top-K informative frames are passed to the frozen 3D generator for multi-view generation based on evidence. By retaining only compact evidential memory rather than latent states, Streaming3D achieves stable long-horizon generation with a constant memory footprint.

3.1 Problem Setup

3D Generation Preliminary. Let f_θ denote a frozen view-conditioned 3D generator that, given a single input frame v and an initial noise prior $z_0 \sim \mathcal{N}(0, I)$, produces a 3D sample (Gaussian splat [25], mesh, or latent volume) $\hat{y} = f_\theta(v; z_0)$. Recent 3D generation models, i.e., SAM 3D [9], TRELLIS [79], TRELLIS.2 [78], Hunyuan3D 2.0 [86] and CraftsMan3D [35], instantiate f_θ as a two-stage pipeline — a structure stage (SS) producing a coarse occupancy / latent grid, followed by a texture or appearance stage — with at least one cross-attention layer of the form:

$$\mathbf{A}_v = \text{softmax}\left(\frac{\mathbf{Q}\mathbf{K}^\top}{\sqrt{d}}\right) \in [0, 1]^{Q \times P}, \quad (1)$$

where Q is the number of query tokens in the generator’s voxel grid (e.g., $16^3 = 4096$ in SAM 3D’s structure stage), P is the number of key tokens in the input frame v , and d is the feature dimension of each query/key token. In its native form, 3D generator f_θ accepts a single frame and produces a single reconstruction; it has no mechanism for incorporating multi-view evidence.

Streaming 3D Generation. Our method extends 3D generator f_θ to accept a stream of condition views $\mathcal{V} = \{v_1, \dots, v_T\}$ by fusing the per-view forward passes through a confidence-weighted Multi-Diffusion-style aggregation in 3D latent space. The stream is partitioned into overlapping chunks $\mathcal{C}_k$ of size C . At chunk k , we wish to produce a 3D sample $\hat{y}_k$ that is consistent with all preceding chunks, while maintaining a memory that does not scale linearly with stream length T .

3.2 Adaptive Evidential Memory

To maintain an efficient memory footprint that does not scale linearly with the total sequence length T , we introduce an *Adaptive Evidential Memory* mechanism shown in Fig. 3. Rather than blindly retaining all historical frames, this approach dynamically filters and preserves only the most informative views by evaluating their relevance at a per-token level. Our mechanism operates in three distinct stages. (1) First, we compute a token-wise **Evidence Score** via a lightweight attention probe to measure the significance of each incoming view. (2) Second, we update a fixed-capacity global **Memory** that persistently tracks the highest-scoring frames for each individual query token. (3) Finally, we perform **Conditioning-view selection** by allowing the tokens to “vote” for their preferred frames, aggregating these local preferences to select an optimal, bounded-size condition set for the full generation pass.

Evidence Score. At a certain chunk, we run a single denoising step of the structure-stage generator on the chunk’s condition set, with a *frozen* prior z_0 that is sampled once on chunk 0 and reused thereafter. We extract the cross-attention map equation 1 at one fixed layer L , for a query token q that excludes special tokens (CLS, register, etc.), and compute the per-token cross-attention induced by

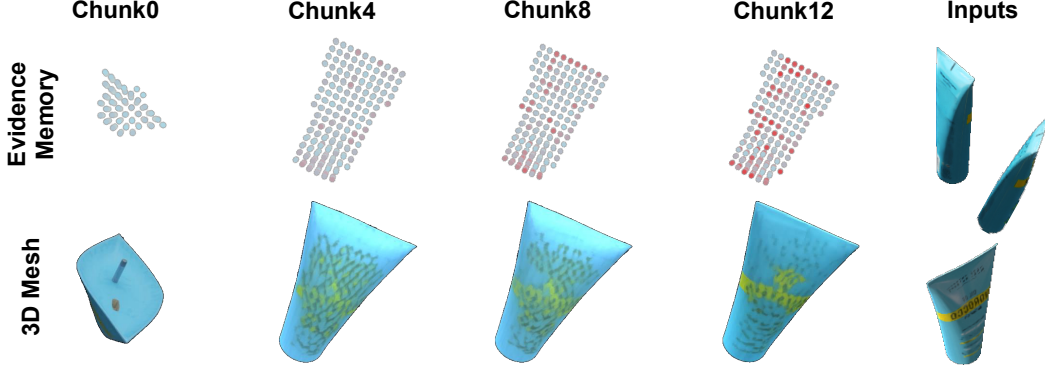


Figure 3: **Adaptive Evidential Memory.** Given streaming input chunks, our memory is updated automatically by retaining the most informative historical views. The color transition from blue to pink indicates increasing frame indices, from earlier to later observations. As the memory accumulates stronger evidence over time, the reconstruction quality progressively improves.

view v (with P patch tokens) as below:

$$\mathbf{H}_v[q] = -\frac{1}{\log(P)} \sum_{i=1}^P \tilde{\mathbf{A}}_v[q, i] \log \tilde{\mathbf{A}}_v[q, i], \quad \tilde{\mathbf{A}}_v[q, i] = \frac{\mathbf{A}_v[q, i]}{\sum_{j=1}^P \mathbf{A}_v[q, j]}, \quad (2)$$

$$\mathbf{M}_v[q] = \left(1 + \left(\sum_{i=1}^P \mathbf{A}_v[q, i] - \frac{\sum_{v=1}^{N_c} \sum_{i=1}^P \mathbf{A}_v[q, i]}{N_c} \right) \right) \cdot \left(1 - \mathbf{H}_v(\tilde{\mathbf{A}}_v[q]) \right), \quad (3)$$

which yields a per-view evidence score $\mathbf{M}_v[q] \in [0, 1]$ for query token q and N_c is the chunk length. Notably, there are three intentional designs in this probe as explained below: **Frozen prior:** reusing z_0 across chunks makes evidence score $\mathbf{M}_v[q]$ comparable across chunks; any difference between two chunks’ entropy maps is attributable to the views, not to a fresh draw of noise. **Single denoising step:** the first step’s attention is dominated by the input views’ content; later steps are progressively shaped by the model’s own prediction, which would be circular for a view-selection objective.

Memory. The cross-chunk memory is represented by two matrices $\mathbf{M}, \mathbf{F} \in Q \times D$, where Q is the number of query tokens, and D is the number of frames to retain, i.e., memory depth. $\mathbf{M} \in \mathbb{R}^{Q \times D}$ is the *evidence memory*, which stores the D token-wise highest evidence scores over all observed views; $\mathbf{F} \in \mathbb{R}^{Q \times D}$ is the *frame-index memory*, which stores their corresponding global frame indices. During the streaming process, each token’s top- D list is updated by merging in the new candidates from newly arriving frames. Frames that never enter any token’s list are discarded immediately. The total footprint is $2 \times Q \times D$ scalars, *constant in stream length T* — about 65 KB for SAM 3D ($Q=4096, D=5$).

Conditioning-view Selection. At a certain chunk, the runtime view set $\mathcal{V}^*$ selected for the full forward pass is obtained by aggregating the per-token top- D lists into a per-frame *token-ownership count*, then taking the **top- K** frames by that count. Concretely, we define the ownership count of frame f_r as the number of (token, rank) slots it occupies anywhere in $\mathbf{F}$:

$$n_{f_r} = |\{(q, j) : \mathbf{F}[q, j] = f_r, 1 \leq q \leq Q, 1 \leq j \leq D\}|, \quad (4)$$

and select the K frames with the largest counts for $\mathcal{V}^*$. Notably, there are two distinct ranks D and K . D is the *memory depth*: how many candidate frames each token retains in its sorted list; K is the *bundle size*: how many frames the downstream generator consumes per forward pass. Here, D controls how robust the evidence score computation is.

3.3 Evidence-Based Multi-Generation

Generation via multi-view flow-matching fusion. The selected views $\mathcal{V}^*$ are passed to the generator f_θ , which performs multi-view-conditioned diffusion: at each step t , the generator computes a velocity $V_\theta(z_t, v)$ for each $v \in \mathcal{V}^*$ and fuses the per-view scores into a single update on the shared latent z_t . Following the standard multi-diffusion fusion rule, the fused velocity at each query token q

Algorithm 1 Streaming inference with the Adaptive Evidential Memory.

Require: generator f_θ , chunk C , chunk frame v , chunk frame index k , layer L , token range $[a, b]$, memory depth D , bundle size K .

- 1: Sample $z_0 \sim \mathcal{N}(0, I)$ ▷ frozen prior
- 2: $\mathbf{M} \leftarrow \mathbf{0}^{Q \times D}, \mathbf{F} \leftarrow \mathbf{0}^{Q \times D}$ ▷ evidence and frame-index memory
- 3: **for** $k = 0, 1, 2, \dots$ **do**
- 4: Run one warmup denoising step of f_θ on C with prior z_0
- 5: Extract $\mathbf{A}_v$ at layer L via Eq. 1 for each $v \in C$
- 6: Compute per-view evidence score $\mathbf{M}_v \in [0, 1]^Q$ on patch token
- 7: Update memory: row-wise top- D merge for each query token q
- 8: Compute ownership counts $\{n_{f_r}\}$ via Eq. 4
- 9: Select bundle $\mathcal{V}^*$ via selecting the top- K frames
- 10: Fuse per-view scores via Eq. 5 during the full forward
- 11: **output** $\hat{y} \leftarrow f_\theta(\mathcal{V}^*; z_k)$ with fresh z_k
- 12: **end for**

is a view-weighted average:

$$\bar{V}_\theta(z_t)[q] = \sum_{v \in \mathcal{V}^*} \bar{M}_v[q] V_\theta(z_t, v)[q], \quad \sum_{v \in \mathcal{V}^*} \bar{M}_v[q] = 1, \quad (5)$$

where $\bar{M}_v[q]$ is the normalized per-token, per-view evidence score. The full forward pass is $\hat{y} = f_\theta(\mathcal{V}^*; z_k)$ with z_k drawn freely per chunk.

Algorithm and properties. Algorithm 1 summarizes the per-chunk procedure. The method involves three integer hyperparameters (L, D, K) , a fixed prior z_0 , and no learned parameters. Processing each chunk requires a single warmup forward pass to extract cross-attention at layer L , followed by memory updates, and a full forward pass of f_θ using the selected conditioning frame bundle.

Summary. The Adaptive Evidential Memory has two structural properties that clearly distinguish it from latent-transport schemes. First, its cross-chunk memory footprint is bounded by at most $2 \times Q \times D$ scalars, and is therefore constant with respect to the stream length T . Second, for every query token q and rank j , the cached evidence score $\mathbf{M}[q, j]$ is monotonically non-decreasing over time, since each update retains only the top- D entries from the union of the previous cache and the newly arrived candidates. As a result, the conditioning bundle selected for 3D generation can only stay the same or improve in terms of evidence quality as streaming progresses, while the memory cost remains fixed. By contrast, KV banks and FlowEdit-style velocity edits provide no comparable non-degradation guarantee, and their state typically grows linearly with stream length. Our mechanism simply selects from views that have already been observed, leaves the weights and architecture of f_θ unchanged, and requires no additional learning.

4 Experiment

We evaluate Stream3D on long-stream 3D generation, where the model receives a sequence of continuously arriving posed images and must maintain a coherent 3D representation over time. Unlike standard multi-view reconstruction, this setting stresses two properties simultaneously: the method must exploit newly observed views to improve geometry and appearance, while preserving long-range consistency without reprocessing the entire stream. Our experiments are designed to answer three questions: (i) whether Stream3D improves streaming 3D generation quality over single-view and multi-view baselines, (ii) whether token-wise evidential memory provides better long-range consistency than existing streaming alternatives, and (iii) how memory size and view-selection strategy affect performance.

4.1 Experimental Setup

Implementation: Our experiments are run on NVIDIA H100 GPU. We use SAM3D with its standard settings as the underlying generation backbone. We adopt Depth Anything 3 [38] to estimate the camera pose and depth of initial input to get a point map, which are fed into SAM 3D for 3D generation. We set $K = 8$ and $D = 1$ for efficiency, and provide ablation studies to justify this choice. In all experiments, we evaluate multi-view generation models using streams of length 100.

Dataset: We evaluate on two complementary benchmarks. The first is the GSO benchmark [13], which contains high-quality scanned objects with ground-truth 3D assets. Following prior multi-



Figure 4: **Qualitative results on GSO and NAVI.** Stream3D produces more consistent and geometrically faithful 3D generations than single-view and multi-view diffusion baselines.

Table 1: **Main results on GSO and NAVI.** Stream3D consistently improves geometry and appearance over single-view and multi-view generation baselines.

Data	Method	Geometry			Appearance			
		CD↓	IOU↑	PFID↓	PSNR↑	SSIM↑	LPIPS↓	Image FID↓
GSO	TRELIS.2	0.156	0.480	170.726	10.563	0.822	0.210	202.808
	TRELIS+M.D.	0.138	0.500	122.780	10.680	0.850	0.192	245.361
	TRELIS.2+M.D.	0.150	0.493	176.253	10.611	0.838	0.194	228.937
	SAM3D	0.094	0.664	71.263	14.178	0.848	0.178	105.197
	Ours	0.048	0.775	40.641	16.145	0.866	0.139	66.711
NAVI	SAM3D	0.138	0.721	71.737	16.159	0.876	0.132	141.496
	TRELIS.2	0.152	0.682	76.446	15.492	0.874	0.128	142.487
	TRELIS+M.D.	0.160	0.703	69.098	14.513	0.861	0.135	140.148
	TRELIS.2+M.D.	0.160	0.684	86.128	15.672	0.877	0.126	144.276
	Ours	0.128	0.741	62.743	16.474	0.879	0.123	134.025

view generation and reconstruction protocols, we render posed image streams from each object and evaluate both novel-view appearance and geometric accuracy. This controlled setting allows us to measure whether the generated 3D content remains faithful to the underlying object as the stream length increases. The second benchmark is NAVI [22], which provides more complex object-centric view sequences with diverse camera trajectories and challenging viewpoint variation. Compared with GSO, NAVI introduces stronger long-range consistency requirements, since the input stream may contain larger pose changes, partial observations, repeated visual patterns, and more severe self-occlusions.

Baseline: We compare Stream3D with representative single-view, multi-view, and streaming baselines. Single-view baselines, including SAM3D, and TRELIS, generate 3D content from individual observations and therefore provide a lower bound on streaming consistency. EscherNet serves as a strong multi-view baseline that benefits from multiple posed observations but is not designed for unbounded streaming inputs. We also compare against TRELIS+M.D. [79] and TRELIS.2+M.D. [78] which aggregate multiple views through full-context or multi-window diffusion but becomes expensive as the number of frames grows.

Metrics. We report appearance and geometry metrics. For appearance, we use Peak Signal-to-Noise Ratio (PSNR), Structural Similarity Index Measure (SSIM), Learned Perceptual Image Patch Similarity (LPIPS) and Fréchet Inception Distance (FID) on held-out novel views. These metrics evaluate whether the generated representation renders images that are both photometrically accurate and perceptually faithful. For geometry, we report Patch Fréchet Inception Distance (PFID), Chamfer

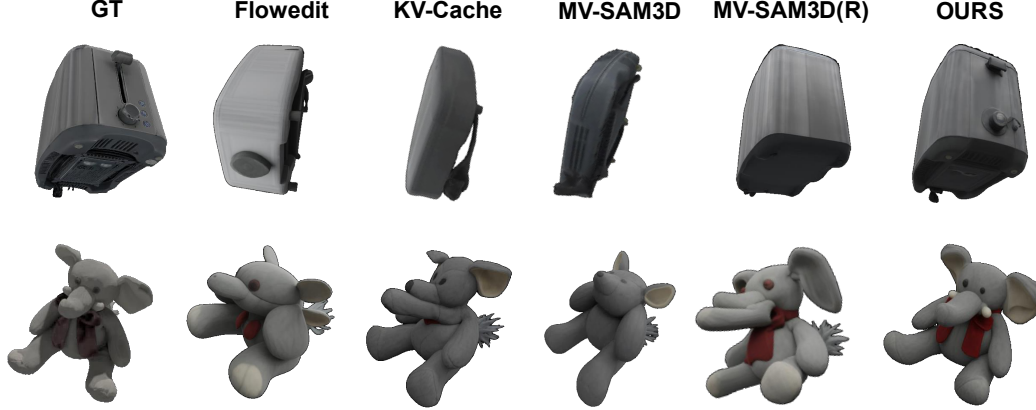


Figure 5: **Qualitative result of our Ablation studies.** FlowEdit denotes SAM3D with FlowEdit, and KV-Cache denotes SAM3D with KV-cache reuse. MV-SAM3D denotes MV-SAM3D applied to the last input chunk, while MV-SAM3D(R) denotes MV-SAM3D with K randomly selected views.

Table 2: **Ablation studies of different streaming strategies.**

Data	Method	Geometry			Appearance			
		CD↓	IOU↑	PFID↓	PSNR↑	SSIM↑	LPIPS↓	Image FID↓
GSO	SAM3D + FlowEdit	0.090	0.668	76.445	14.343	0.850	0.178	98.643
	SAM3D + KV-Cache	0.084	0.682	67.292	14.482	0.852	0.171	83.353
	MV-SAM3D + Last Chunk	0.113	0.630	86.044	13.906	0.848	0.184	104.228
	MV-SAM3D with K random views	0.064	0.676	68.534	14.828	0.859	0.156	83.039
	Ours	0.048	0.775	40.641	16.145	0.866	0.139	66.711

Distance (CD) and Intersection over Union (IOU). These metrics measure absolute depth quality, relative geometric consistency, and fine-grained 3D accuracy.

4.2 Main Results

Table 1 reports qualitative results on both GSO and NAVI. Fig. 4 shows qualitative results on GSO. Across the two datasets, Stream3D achieves the strongest overall performance on both appearance and geometry metrics. The gains are consistent across all metrics, indicating that the improvement is not limited to image-level rendering quality but also reflects better 3D structure. We could conclude: (1) Compared with single-view baselines such as SAM3D [9], TRELLIS [79], and TRELLIS.2 [78], Stream3D substantially improves both appearance and geometry. This confirms that streaming observations provide important information that cannot be recovered from a single image alone. Single-view methods often generate plausible observed geometry but hallucinate unobserved regions inconsistently across time. (2) Compared with multi-view baselines such as TRELLIS+M.D. [79] and TRELLIS.2+M.D. [78], Stream3D shows stronger long-stream behavior. EscherNet benefits from multiple posed views, but it is designed for bounded multi-view input rather than continuously arriving streams. TRELLIS+M.D. can improve consistency by fusing multiple views, but full-context diffusion becomes computationally expensive as the stream grows and does not provide an explicit mechanism for compact long-range memory. Stream3D addresses this limitation by retaining token-level evidence rather than storing or reprocessing all frames. As a result, it maintains high reconstruction quality while keeping memory usage constant.

4.3 Streaming Baseline Comparison

Table 2 further compares Stream3D with several streaming alternatives. Fig. 5 report qualitative results. (1) We compare against MV-SAM3D-style [32] fixed-view selection to evaluate whether a small set of representative views can serve as an effective substitute for streaming memory. Random view sampling is unstable, as it may discard observations that are critical for reconstructing specific geometric regions. More broadly, these results reveal the limitation of frame-level view selection: streaming generation requires a finer-grained memory mechanism, since different spatial tokens may rely on evidence from different historical views. A frame that is highly informative for one surface region can be irrelevant, redundant, or even misleading for another. In contrast, Stream3D maintains

Table 3: **Ablation studies on module selection and hyperparameters.** “Stage” denotes the step at which evidence scores are computed. “E” denotes the evidence computation strategy. “M” denotes the memory depth. “K” denotes the number of selected Top-K views. Our setting is **highlighted**.

Stage	E	M	K	Geometry			Appearance			
				CD-L2↓	α -IoU↑	P-FID↓	PSNR↑	SSIM↑	LPIPS↓	Img-FID↓
SS6-SLAT3	Evi	5	8	0.057	0.744	48.62	15.577	0.859	0.1531	72.16
SS6-SLAT6	Evi	5	8	0.057	0.742	49.09	15.536	0.858	0.1528	70.97
SS9-SLAT3	Evi	5	8	<u>0.048</u>	0.775	41.36	16.136	<u>0.866</u>	0.1406	68.28
SS9-SLAT6	Evi	5	8	<u>0.048</u>	0.775	40.64	16.145	<u>0.866</u>	<u>0.1396</u>	66.71
SS9-SLAT9	Evi	5	8	<u>0.048</u>	<u>0.776</u>	41.05	16.119	0.865	0.1403	67.88
SS9-SLAT6	Evi(N)	5	8	0.056	0.749	44.98	15.730	0.863	0.1486	74.08
SS9-SLAT6	Ent	5	8	0.053	0.760	47.26	15.892	0.864	0.1449	67.75
SS9-SLAT6	Evi	1	8	0.051	0.769	41.15	15.952	<u>0.866</u>	0.1406	67.93
SS9-SLAT6	Evi	3	8	0.049	0.773	39.47	16.067	<u>0.866</u>	0.1415	66.45
SS9-SLAT6	Evi	7	8	0.049	0.772	40.19	16.040	0.863	0.1425	67.50
SS9-SLAT6	Evi	5	4	0.055	0.755	45.47	15.741	0.863	0.1478	70.20
SS9-SLAT6	Evi	5	12	<u>0.048</u>	0.775	<u>40.12</u>	<u>16.167</u>	0.865	0.1411	66.29
SS9-SLAT6	Evi	5	16	0.048	0.779	41.48	16.169	0.867	0.1393	65.69

token-level evidential memory, enabling each spatial region to retrieve the historical observations that best support its generation. (2) We also compare against cache- and transport-based streaming baselines. KV-cache reuse provides an efficient mechanism for carrying historical information forward, but cached tokens are not explicitly filtered according to geometric reliability. As a result, the memory can accumulate stale or ambiguous evidence, especially under long camera motion. FlowEdit performs local flow-based latent editing and improves short-range consistency, but it operates on fixed-size chunks and therefore loses long-range history. This limitation becomes visible in long streams, where global consistency depends on observations that may fall outside the current editing window. In contrast, Stream3D maintains a compact but persistent evidence memory. The memory does not simply reuse all past latent states; it selects and aggregates historical information according to token-level evidence. (3) We also compare Stream3D with MV-SAM3D [32], which selects a compact set of informative input views using visibility-aware weighting. Although MV-SAM3D is effective in bounded multi-view settings, it is not designed for streaming generation: once the input stream grows, selecting a small global view subset can discard historical observations that are locally important for specific surfaces or tokens. In contrast, Stream3D maintains a token-wise evidential memory, allowing different spatial regions to retrieve different historical views according to their accumulated evidence. This provides a more flexible and scalable mechanism for long-stream generation, preserving global consistency without requiring all past frames to be regenerated or jointly fused.

4.4 Ablation Studies

We conduct detailed ablation studies in Tab. 3 to analyze the influence of different evidence scoring and view selection strategies on both geometric consistency and visual quality.

First, we investigate the effect of the stage used for evidence computation. Following [9], we denote the first generation stage as SS and the second generation stage as SLAT. Comparing different stage combinations, such as SS6-SLAT3, SS6-SLAT6, SS9-SLAT3, SS9-SLAT6, and SS9-SLAT9, we observe that deeper stages consistently provide better geometry-aware evidence estimation. In particular, SS becomes stable after stage 9, while SLAT becomes stable after stage 6. Using SS9-SLAT6 achieves substantially lower CD-L2 and better α -IoU than shallow-stage configurations, while also improving appearance metrics including PSNR and LPIPS. This suggests that deeper transformer features encode more reliable multi-view geometric correspondence for streaming view selection.

Next, we compare different evidence normalization strategies. Besides our proposed normalized Evidence weighting, we evaluate entropy-based scoring (ENT) and an unnormalized variant Evidence(N). Results show that normalized Evidence consistently outperforms both alternatives across geometry and appearance metrics. ENT leads to weaker geometric alignment, while Evidence(N) suffers from degraded stability and higher perceptual errors. These results indicate that proper normalization is critical for balancing confidence across candidate views and preventing dominance.

We further study the effect of memory depth M . Compared with $M = 1$, increasing the memory depth to $M = 3$ and $M = 5$ improves both geometry and appearance metrics, indicating that retaining multiple high-evidence historical views is beneficial for long-range consistency. However, further increasing the memory depth to $M = 7$ does not consistently improve all metrics: while it can slightly improve some appearance scores, it may also introduce weaker or stale evidence from less reliable historical frames. Overall, $M = 3$ achieves the best P-FID, while $M = 5$ offers a strong and stable trade-off across geometry, appearance, and memory cost.

Finally, we analyze the influence of TopK view selection. Using too few views ($K = 4$) significantly degrades both geometry and appearance quality due to insufficient multi-view coverage. Increasing the number of selected views from $K = 8$ to $K = 16$ only brings moderate changes in performance, suggesting that the method is relatively stable once enough informative views are included. In particular, $K = 16$ achieves the best overall results on most metrics, including CD-L2, α -IoU, PSNR, SSIM, LPIPS, and Img-FID, demonstrating that richer multi-view aggregation can further improve geometric reconstruction and visual consistency, although the gain over $K = 8$ is not large.

5 Limitations

The method is built on top of the quality of the underlying pretrained generator. If the base model fails to reconstruct the object from individual views, the proposed evidential memory cannot fully recover the missing geometry or appearance.

6 Conclusion

We introduced Stream3D, a training-free framework that extends frozen view-conditioned 3D generators to long monocular streams. Instead of transporting latent states across chunks, Stream3D uses the generator’s cross-attention maps to identify historical views that provide reliable conditioning evidence for each 3D query token. This evidence is stored in a compact Adaptive Evidential Memory and used by Evidence-Based Multi-Generation to select a bounded view bundle for each chunk. As a result, Stream3D keeps memory constant with stream length while leaving the original generator unchanged. Experiments on GSO and NAVI show that Stream3D improves both appearance and geometry over single-view generators, multi-view diffusion baselines, and streaming alternatives such as KV-cache reuse and flow-based feature editing. These results support our central claim: streaming 3D generation is better addressed as an evidence selection problem than as a latent transport problem. By preserving token-level evidential views rather than unstable latent states, Stream3D provides a scalable path toward coherent long-horizon 3D generation from continuously arriving visual observations.

References

- [1] 3DTopia. Openlrm: Open-source large reconstruction models. <https://github.com/3DTopia/OpenLRM>, 2023.
- [2] T. Anciukevičius, Z. Xu, M. Fisher, P. Henderson, H. Bilen, N. J. Mitra, and P. Guerrero. Renderdiffusion: Image diffusion for 3d reconstruction, inpainting and generation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 12608–12618, 2023.
- [3] S. Bahmani, I. Skorokhodov, V. Rong, G. Wetzstein, L. Guibas, P. Wonka, S. Tulyakov, J. J. Park, A. Tagliasacchi, and D. B. Lindell. 4d-fy: Text-to-4d generation using hybrid score distillation sampling. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 7996–8006, 2024.
- [4] O. Bar-Tal, L. Yariv, Y. Lipman, and T. Dekel. Multidiffusion: Fusing diffusion paths for controlled image generation. 2023.
- [5] C. Campos, R. Elvira, J. J. G. Rodriguez, J. M. M. Montiel, and J. D. Tardos. Orb-slam3: An accurate open-source library for visual, visual-inertial, and multimap slam. *IEEE Transactions on Robotics*, 37(6):1874–1890, 2021.
- [6] E. R. Chan, C. Z. Lin, M. A. Chan, K. Nagano, B. Pan, S. De Mello, O. Gallo, L. Guibas, J. Tremblay, S. Khamis, et al. Efficient geometry-aware 3d generative adversarial networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 16123–16133, 2022.
- [7] R. Chen, Y. Chen, N. Jiao, and K. Jia. Fantasia3d: Disentangling geometry and appearance for high-quality text-to-3d content creation. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 22246–22256, 2023.
- [8] X. Chen, Y. Chen, Y. Xiu, A. Geiger, and A. Chen. Ttt3r: 3d reconstruction as test-time training. *arXiv preprint arXiv:2509.26645*, 2025.
- [9] X. Chen, F.-J. Chu, P. Gleize, K. J. Liang, A. Sax, H. Tang, W. Wang, M. Guo, T. Hardin, X. Li, et al. Sam 3d: 3dfy anything in images. *arXiv preprint arXiv:2511.16624*, 2025.
- [10] Z. Chen, H. Tan, K. Zhang, S. Bi, F. Luan, Y. Hong, F. Li, and Z. Xu. Long-lrm: Long-sequence large reconstruction model for wide-coverage gaussian splats. *arXiv preprint arXiv:2410.12781*, 2024.
- [11] Z. Chen, Y. Wang, F. Wang, Z. Wang, and H. Liu. V3d: Video diffusion models are effective 3d generators. *arXiv preprint arXiv:2403.06738*, 2024.
- [12] A. J. Davison, I. D. Reid, N. D. Molton, and O. Stasse. Monoslam: Real-time single camera slam. *IEEE transactions on pattern analysis and machine intelligence*, 29(6):1052–1067, 2007.
- [13] L. Downs, A. Francis, N. Koenig, B. Kinman, R. Hickman, K. Reymann, T. B. McHugh, and V. Vanhoucke. Google scanned objects: A high-quality dataset of 3d scanned household items. In *2022 International Conference on Robotics and Automation (ICRA)*, pages 2553–2560. IEEE, 2022.
- [14] J. Engel, V. Koltun, and D. Cremers. Direct sparse odometry. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 40(3):611–625, 2018.
- [15] J. Engel, T. Schöps, and D. Cremers. Lsd-slam: Large-scale direct monocular slam. In *European conference on computer vision*, pages 834–849. Springer, 2014.
- [16] C. Forster, M. Pizzoli, and D. Scaramuzza. Svo: Fast semi-direct monocular visual odometry. In *2014 IEEE international conference on robotics and automation (ICRA)*, pages 15–22. IEEE, 2014.
- [17] J. Gao, T. Shen, Z. Wang, W. Chen, K. Yin, D. Li, O. Litany, Z. Gojcic, and S. Fidler. Get3d: A generative model of high quality 3d textured shapes learned from images. In *Advances in Neural Information Processing Systems*, volume 35, pages 31841–31854, 2022.
- [18] R. Henschel, L. Khachatryan, D. Hayrapetyan, H. Poghosyan, V. Tadevosyan, Z. Wang, S. Navasardyan, and H. Shi. Streamingt2v: Consistent, dynamic, and extendable long video generation from text. *arXiv preprint arXiv:2403.14773*, 2024.
- [19] Y. Hong, K. Zhang, J. Gu, S. Bi, Y. Zhou, D. Liu, F. Liu, K. Sunkavalli, T. Bui, and H. Tan. Lrm: Large reconstruction model for single image to 3d. *arXiv preprint arXiv:2311.04400*, 2023.

- [20] H. Huang, L. Li, H. Cheng, and S.-K. Yeung. Photo-slam: Real-time simultaneous localization and photorealistic mapping for monocular, stereo, and rgb-d cameras. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 21584–21593, 2024.
- [21] Z. Huang, M. Boss, A. Vasishta, J. M. Rehg, and V. Jampani. Spar3d: Stable point-aware reconstruction of 3d objects from single images. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 16860–16870, 2025.
- [22] V. Jampani, K.-K. Maninis, A. Engelhardt, A. Karpur, K. Truong, K. Sargent, S. Popov, A. Araujo, R. Martin Brualla, K. Patel, et al. Navi: Category-agnostic image collections with high-quality 3d shape and pose annotations. *Advances in Neural Information Processing Systems*, 36:76061–76084, 2023.
- [23] Y. Jiang, L. Zhang, J. Gao, W. Hu, and Y. Yao. Consistent4d: Consistent 360 dynamic object generation from monocular video. In *International Conference on Learning Representations*, 2024.
- [24] H. Jun and A. Nichol. Shap-e: Generating conditional 3d implicit functions. *arXiv preprint arXiv:2305.02463*, 2023.
- [25] B. Kerbl, G. Kopanas, T. Leimkühler, G. Drettakis, et al. 3d gaussian splatting for real-time radiance field rendering. *ACM Trans. Graph.*, 42(4):139–1, 2023.
- [26] J. Kim, J. Kang, J. Choi, and B. Han. Fifo-diffusion: Generating infinite videos from text without training. In *Advances in Neural Information Processing Systems*, 2024.
- [27] G. Klein and D. Murray. Parallel tracking and mapping for small ar workspaces. In *2007 6th IEEE and ACM international symposium on mixed and augmented reality*, pages 225–234. IEEE, 2007.
- [28] X. Kong, S. Liu, X. Lyu, M. Taher, X. Qi, and A. J. Davison. Eschernet: A generative model for scalable view synthesis. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9503–9513, 2024.
- [29] V. Kulikov, M. Kleiner, I. Huberman-Spiegelglas, and T. Michaeli. Flowedit: Inversion-free text-based editing using pre-trained flow models. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 19721–19730, 2025.
- [30] Y. Lan, Y. Luo, F. Hong, S. Zhou, H. Chen, Z. Lyu, S. Yang, B. Dai, C. C. Loy, and X. Pan. Stream3r: Scalable sequential 3d reconstruction with causal transformer. *arXiv preprint arXiv:2508.10893*, 2025.
- [31] V. Leroy, Y. Cabon, and J. Revaud. Grounding image matching in 3d with mast3r. In *European conference on computer vision*, pages 71–91. Springer, 2024.
- [32] B. Li, D. Wu, J. Li, S. Zhou, Z. Zeng, L. Li, and H. Zha. Mv-sam3d: Adaptive multi-view fusion for layout-aware 3d generation. *arXiv preprint arXiv:2603.11633*, 2026.
- [33] J. Li, H. Tan, K. Zhang, Z. Xu, F. Luan, Y. Xu, Y. Hong, K. Sunkavalli, G. Shakhnarovich, and S. Bi. Instant3d: Fast text-to-3d with sparse-view generation and large reconstruction model. *arXiv preprint arXiv:2311.06214*, 2023.
- [34] P. Li, Y. Liu, X. Long, F. Zhang, C. Lin, M. Li, X. Qi, S. Zhang, W. Luo, P. Tan, W. Wang, Q. Liu, and Y. Guo. Era3d: High-resolution multiview diffusion using efficient row-wise attention. *arXiv preprint arXiv:2405.11616*, 2024.
- [35] W. Li, J. Liu, H. Yan, R. Chen, Y. Liang, X. Chen, P. Tan, and X. Long. Craftsman3d: High-fidelity mesh generation with 3d native generation and interactive geometry refiner. *arXiv preprint arXiv:2405.14979*, 2024.
- [36] Y. Li, Z.-X. Zou, Z. Liu, D. Wang, Y. Liang, Z. Yu, X. Liu, Y.-C. Guo, D. Liang, W. Ouyang, et al. Triposg: High-fidelity 3d shape synthesis using large-scale rectified flow models. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2025.
- [37] C.-H. Lin, J. Gao, L. Tang, T. Takikawa, X. Zeng, X. Huang, K. Kreis, S. Fidler, M.-Y. Liu, and T.-Y. Lin. Magic3d: High-resolution text-to-3d content creation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 300–309, 2023.
- [38] H. Lin, S. Chen, J. Liew, D. Y. Chen, Z. Li, G. Shi, J. Feng, and B. Kang. Depth anything 3: Recovering the visual space from any views. *arXiv preprint arXiv:2511.10647*, 2025.
- [39] M. Liu, C. Xu, H. Jin, L. Chen, M. Varma T, Z. Xu, and H. Su. One-2-3-45: Any single image to 3d mesh in 45 seconds without per-shape optimization. *Advances in Neural Information Processing Systems*, 36:22226–22246, 2023.

- [40] R. Liu, R. Wu, B. Van Hoorick, P. Tokmakov, S. Zakharov, and C. Vondrick. Zero-1-to-3: Zero-shot one image to 3d object. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 9298–9309, 2023.
- [41] Y. Liu, S. Dong, S. Wang, Y. Yin, Y. Yang, Q. Fan, and B. Chen. Slam3r: Real-time dense scene reconstruction from monocular rgb videos. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 16651–16662, 2025.
- [42] Y. Liu, C. Lin, Z. Zeng, X. Long, L. Liu, T. Komura, and W. Wang. Syncdreamer: Generating multiview-consistent images from a single-view image. *arXiv preprint arXiv:2309.03453*, 2023.
- [43] X. Long, Y.-C. Guo, C. Lin, Y. Liu, Z. Dou, L. Liu, Y. Ma, S.-H. Zhang, M. Habermann, C. Theobalt, et al. Wonder3d: Single image to 3d using cross-domain diffusion. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 9970–9980, 2024.
- [44] D. Maggio, H. Lim, and L. Carlone. Vggt-slam: Dense rgb slam optimized on the sl (4) manifold. *arXiv preprint arXiv:2505.12549*, 2025.
- [45] H. Matsuki, R. Murai, P. H. J. Kelly, and A. J. Davison. Gaussian splatting slam. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 18039–18048, 2024.
- [46] G. Metzger, E. Richardson, O. Patashnik, R. Giryes, and D. Cohen-Or. Latent-nerf for shape-guided generation of 3d shapes and textures. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 12663–12673, 2023.
- [47] B. Mildenhall, P. P. Srinivasan, M. Tancik, J. T. Barron, R. Ramamoorthi, and R. Ng. Nerf: Representing scenes as neural radiance fields for view synthesis. In *European Conference on Computer Vision*, pages 405–421, 2020.
- [48] R. Mur-Artal, J. M. M. Montiel, and J. D. Tardos. Orb-slam: A versatile and accurate monocular slam system. *IEEE transactions on robotics*, 31(5):1147–1163, 2015.
- [49] R. Mur-Artal and J. D. Tardós. Orb-slam2: An open-source slam system for monocular, stereo, and rgb-d cameras. *IEEE transactions on robotics*, 33(5):1255–1262, 2017.
- [50] R. A. Newcombe, S. J. Lovegrove, and A. J. Davison. Dtam: Dense tracking and mapping in real-time. In *2011 international conference on computer vision*, pages 2320–2327. IEEE, 2011.
- [51] A. Nichol, H. Jun, P. Dhariwal, P. Mishkin, and M. Chen. Point-e: A system for generating 3d point clouds from complex prompts. *arXiv preprint arXiv:2212.08751*, 2022.
- [52] B. Poole, A. Jain, J. T. Barron, and B. Mildenhall. Dreamfusion: Text-to-3d using 2d diffusion. *arXiv preprint arXiv:2209.14988*, 2022.
- [53] G. Qian, J. Mai, A. Hamdi, J. Ren, A. Siarohin, B. Li, H.-Y. Lee, I. Skorokhodov, P. Wonka, S. Tulyakov, and B. Ghanem. Magic123: One image to high-quality 3d object generation using both 2d and 3d diffusion priors. *arXiv preprint arXiv:2306.17843*, 2023.
- [54] L. Qiu, G. Chen, X. Gu, Q. Zuo, M. Xu, Y. Wu, W. Yuan, Z. Dong, L. Bo, and X. Han. Richdreamer: A generalizable normal-depth diffusion model for detail richness in text-to-3d. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9914–9925, 2024.
- [55] J. Ren, K. Xie, A. Mirzaei, H. Liang, X. Zeng, K. Kreis, Z. Liu, A. Torralba, S. Fidler, S. W. Kim, et al. L4gm: Large 4d gaussian reconstruction model. *Advances in Neural Information Processing Systems*, 37:56828–56858, 2024.
- [56] R. Shi, H. Chen, Z. Zhang, M. Liu, C. Xu, X. Wei, L. Chen, C. Zeng, and H. Su. Zero123++: A single image to consistent multi-view diffusion base model. *arXiv preprint arXiv:2310.15110*, 2023.
- [57] Y. Shi, P. Wang, J. Ye, M. Long, K. Li, and X. Yang. Mvdream: Multi-view diffusion for 3d generation. *arXiv preprint arXiv:2308.16512*, 2023.
- [58] U. Singer, S. Sheynin, A. Polyak, O. Ashual, I. Makarov, F. Kokkinos, N. Goyal, A. Vedaldi, D. Parikh, J. Johnson, and Y. Taigman. Text-to-4d dynamic scene generation. In *International Conference on Machine Learning*, pages 31915–31929, 2023.
- [59] J. Sun, Y. Xie, L. Chen, X. Zhou, and H. Bao. Neuralrecon: Real-time coherent 3d reconstruction from monocular video. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 15598–15607, 2021.

- [60] J. Sun, B. Zhang, R. Shao, L. Wang, W. Liu, Z. Xie, and Y. Liu. Dreamcraft3d: Hierarchical 3d generation with bootstrapped diffusion prior. *arXiv preprint arXiv:2310.16818*, 2023.
- [61] J. Tang, Z. Chen, X. Chen, T. Wang, G. Zeng, and Z. Liu. Lgm: Large multi-view gaussian model for high-resolution 3d content creation. In *European Conference on Computer Vision*, pages 1–18. Springer, 2024.
- [62] J. Tang, J. Ren, H. Zhou, Z. Liu, and G. Zeng. Dreamgaussian: Generative gaussian splatting for efficient 3d content creation. *arXiv preprint arXiv:2309.16653*, 2023.
- [63] J. Tang, T. Wang, B. Zhang, T. Zhang, R. Yi, L. Ma, and D. Chen. Make-it-3d: High-fidelity 3d creation from a single image with diffusion prior. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 22819–22829, 2023.
- [64] D. Tochilkin, D. Pankratz, Z. Liu, Z. Huang, A. Letts, Y. Li, D. Liang, C. Laforte, V. Jampani, and Y.-P. Cao. Triposr: Fast 3d object reconstruction from a single image. *arXiv preprint arXiv:2403.02151*, 2024.
- [65] V. Voleti, C.-H. Yao, M. Boss, A. Letts, D. Pankratz, D. Tochilkin, C. Laforte, R. Rombach, and V. Jampani. Sv3d: Novel multi-view synthesis and 3d generation from a single image using latent video diffusion. *arXiv preprint arXiv:2403.12008*, 2024.
- [66] H. Wang and L. Agapito. 3d reconstruction with spatial memory. In *2025 International Conference on 3D Vision (3DV)*, pages 78–89. IEEE, 2025.
- [67] H. Wang, X. Du, J. Li, R. A. Yeh, and G. Shakhnarovich. Score jacobian chaining: Lifting pretrained 2d diffusion models for 3d generation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 12619–12629, 2023.
- [68] J. Wang, M. Chen, N. Karaev, A. Vedaldi, C. Rupprecht, and D. Novotny. Vggt: Visual geometry grounded transformer. *arXiv preprint arXiv:2503.11651*, 2025.
- [69] P. Wang, H. Tan, S. Bi, Y. Xu, F. Luan, K. Sunkavalli, W. Wang, Z. Xu, and K. Zhang. Pf-lrm: Pose-free large reconstruction model for joint pose and shape prediction. *arXiv preprint arXiv:2311.12024*, 2023.
- [70] Q. Wang, Y. Zhang, A. Holynski, A. A. Efros, and A. Kanazawa. Continuous 3d perception model with persistent state. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025.
- [71] S. Wang, V. Leroy, Y. Cabon, B. Chidlovskii, and J. Revaud. Dust3r: Geometric 3d vision made easy. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 20697–20709, 2024.
- [72] Z. Wang, C. Lu, Y. Wang, F. Bao, C. Li, H. Su, and J. Zhu. Prolificdreamer: High-fidelity and diverse text-to-3d generation with variational score distillation. *Advances in neural information processing systems*, 36:8406–8441, 2023.
- [73] Z. Wang, Y. Wang, Y. Chen, C. Xiang, S. Chen, D. Yu, C. Li, H. Su, and J. Zhu. Crm: Single image to 3d textured mesh with convolutional reconstruction model. *arXiv preprint arXiv:2403.05034*, 2024.
- [74] X. Wei, K. Zhang, S. Bi, H. Tan, F. Luan, V. Deschaintre, K. Sunkavalli, H. Su, and Z. Xu. Meshlrm: Large reconstruction model for high-quality meshes. *arXiv preprint arXiv:2404.12385*, 2024.
- [75] K. Wu, F. Liu, Z. Cai, R. Yan, H. Wang, Y. Hu, Y. Duan, and K. Ma. Unique3d: High-quality and efficient 3d mesh generation from a single image. *Advances in Neural Information Processing Systems*, 37:125116–125141, 2024.
- [76] S. Wu, Y. Lin, F. Zhang, Y. Zeng, J. Xu, P. Torr, X. Cao, and Y. Yao. Direct3d: Scalable image-to-3d generation via 3d latent diffusion transformer. *Advances in Neural Information Processing Systems*, 37:121859–121881, 2024.
- [77] Y. Wu, W. Zheng, J. Zhou, and J. Lu. Point3r: Streaming 3d reconstruction with explicit spatial pointer memory. *arXiv preprint arXiv:2507.02863*, 2025.
- [78] J. Xiang, X. Chen, S. Xu, R. Wang, Z. Lv, Y. Deng, H. Zhu, Y. Dong, H. Zhao, N. J. Yuan, et al. Native and compact structured latents for 3d generation. *arXiv preprint arXiv:2512.14692*, 2025.
- [79] J. Xiang, Z. Lv, S. Xu, Y. Deng, R. Wang, B. Zhang, D. Chen, X. Tong, and J. Yang. Structured 3d latents for scalable and versatile 3d generation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 21469–21480, 2025.

- [80] J. Xu, W. Cheng, Y. Gao, X. Wang, S. Gao, and Y. Shan. Instantmesh: Efficient 3d mesh generation from a single image with sparse-view large reconstruction models. *arXiv preprint arXiv:2404.07191*, 2024.
- [81] Y. Xu, Z. Shi, Y. Wang, H. Chen, C. Yang, S. Peng, Y. Shen, and G. Wetzstein. Grm: Large gaussian reconstruction model for efficient 3d reconstruction and generation. *arXiv preprint arXiv:2403.14621*, 2024.
- [82] J. Yang, A. Sax, K. J. Liang, M. Henaff, H. Tang, A. Cao, J. Chai, F. Meier, and M. Feiszli. Fast3r: Towards 3d reconstruction of 1000+ images in one forward pass. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 21924–21935, 2025.
- [83] T. Yi, J. Fang, J. Wang, G. Wu, L. Xie, X. Zhang, W. Liu, Q. Tian, and X. Wang. Gaussiandreamer: Fast generation from text to 3d gaussians by bridging 2d and 3d diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6796–6807, 2024.
- [84] A. Yu, V. Ye, M. Tancik, and A. Kanazawa. pixelnerf: Neural radiance fields from one or few images. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 4578–4587, 2021.
- [85] Y. Zhao, Z. Yan, E. Xie, L. Hong, Z. Li, and G. H. Lee. Animate124: Animating one image to 4d dynamic scene. *arXiv preprint arXiv:2311.14603*, 2023.
- [86] Z. Zhao, Z. Lai, Q. Lin, Y. Zhao, H. Liu, S. Yang, Y. Feng, M. Yang, S. Zhang, X. Yang, et al. Hunyuan3d 2.0: Scaling diffusion models for high resolution textured 3d assets generation. *arXiv preprint arXiv:2501.12202*, 2025.
- [87] Y. Zheng, X. Li, K. Nagano, S. Liu, K. Kreis, O. Hilliges, and S. De Mello. A unified approach for text-and image-guided 4d scene generation. *arXiv preprint arXiv:2311.16854*, 2023.
- [88] K. Zhou, Y. Wang, G. Chen, X. Chang, G. Beaudouin, F. Zhan, P. P. Liang, and M. Wang. Page-4d: Disentangled pose and geometry estimation for 4d perception. *arXiv e-prints*, pages arXiv–2510, 2025.
- [89] D. Zhuo, W. Zheng, J. Guo, Y. Wu, J. Zhou, and J. Lu. Streaming 4d visual geometry transformer. *arXiv preprint arXiv:2507.11539*, 2025.