

Knowing When to Stop: Adaptive Action Chunking via Internal Cross-Attention Dynamics in VLAs

Runze Xu¹, Xiaolong Shan¹, Shuang Dai¹, Yu Wang¹, and Jincheng Yu¹

Abstract—Action chunking is a standard execution strategy in modern Vision-Language-Action (VLA) frameworks, but fixed execution horizons impose a trade-off between efficiency and accuracy. Short chunks require frequent inference and may cause oscillatory behavior, whereas long chunks can become misaligned with newly observed states. We address this limitation with an adaptive action chunking approach based on internal cross-attention dynamics in the action expert. We observe that, as the prediction horizon extends, action-to-observation cross-attention becomes increasingly dispersed and its entropy rises toward a plateau. This pattern is associated with higher action prediction error and provides an online signal that the current observation offers limited grounding for further open-loop execution. Based on this observation, we introduce a training-free truncation mechanism that detects sustained high-entropy plateaus and dynamically selects the execution horizon during inference. The method uses attention weights already computed by the policy and introduces negligible additional overhead. Evaluations on $\pi_{0.5}$ and X-VLA across RoboTwin 2.0, LIBERO, and three real-world manipulation tasks show improved average task success over fixed-horizon and adaptive chunking baselines, while preserving efficient closed-loop control. These results show that cross-attention dynamics can provide a practical internal signal for adaptive action execution in VLAs.

I. INTRODUCTION

Vision-Language-Action (VLA) models have demonstrated significant success in robotic manipulation by integrating large-scale multimodal pre-training with physical execution [1]–[9]. These models typically combine a Vision-Language Model (VLM) backbone for high-level reasoning with a specialized action expert for fine-grained control. To capture multimodal trajectory distributions, action experts often employ generative denoising techniques such as diffusion [10]–[12] or flow matching [13], [14]. Conditioned on VLM hidden states, these experts sample continuous action sequences representing future trajectories rather than isolated points.

This serialized output paradigm effectively utilizes action chunking, a concept introduced by ALOHA [15] to address the challenges of error accumulation and temporal interference in imitation learning. In single-step regimes (Fig. 1a), minor deviations in predicted actions accumulate over successive steps, leading to large divergence. Additionally, single-step policies often fail to capture temporal logic within training trajectories such as varying rhythms. In contrast, using action chunks (Fig. 1b) as the primary units of prediction and execution suppresses error propagation by reducing replanning frequency and improves the modeling

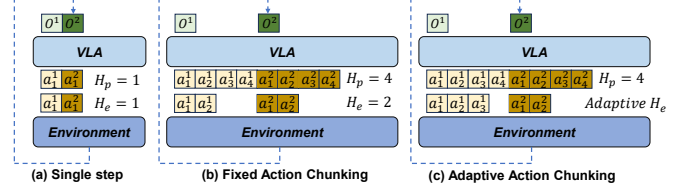


Fig. 1: **Different action execution paradigms.** The model receives observation O^t and predicts a sequence of actions $\{a_j^t\}$ over a predicted horizon H_p . (a) Single step: Predicts and executes one action per observation. (b) Fixed Action Chunking: Executes a fixed number of actions from the predicted horizon. (c) Adaptive Action Chunking: Dynamically adjusts the execution horizon to balance reactivity and efficiency.

of complex temporal patterns. During inference, the model generates an action sequence over a temporal window H_p , termed the predicted horizon. To maintain reactivity to environmental changes, the robot typically executes only the first H_e steps, defined as the execution horizon [16].

However, fixed execution horizons necessitate a trade-off between precision and efficiency [17]–[20]. Short horizons increase computational costs through frequent inference and may induce oscillatory behaviors. Conversely, excessively long horizons misalign execution with real-time observations; as visual feedback relevance decays, predictive accuracy collapses [21], [22]. Furthermore, optimal horizons vary both across tasks and within single-task stages, such as transitioning from rapid approach to fine-grained manipulation [18]. Current reliance on manual tuning or static heuristics [2], [5] thus limits VLA generalization in diverse scenarios.

To address the limitations of fixed horizons, we examine the internal attention allocation of action experts (Fig. 2), focusing on cross-attention from action queries to VLM tokens. Across the predicted horizon, we observe a systematic change in this distribution. Early action tokens attend sparsely to a small set of perceptual and linguistic features, whereas later tokens distribute their attention over a broader context. The corresponding entropy typically rises with the action index and may eventually enter a high-value saturation regime. Empirically, sustained high entropy indicates reduced concentration on the current perceptual context and is associated with elevated offline action error. It therefore provides a practical proxy for identifying predictions that are at greater risk of becoming weakly grounded in the current observation. Based on this insight, we propose an adaptive truncation mechanism. This mechanism monitors

¹Tsinghua University

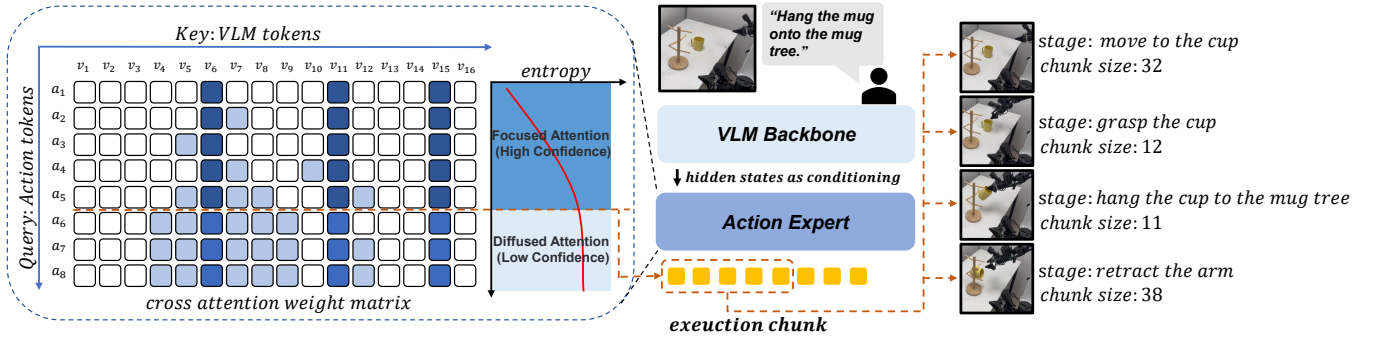


Fig. 2: **Method Overview.** Our framework dynamically determines action chunk sizes by monitoring the cross-attention entropy within the action expert. Conditioned on VLM states, the action expert identifies chunk boundaries by monitoring attention focus. This enables adaptive execution across task stages.

cross-attention entropy during inference and dynamically determines the execution horizon H_e when the entropy reaches its plateau. This approach establishes a dynamic closed loop between perception and action with near-zero computational overhead.

The primary contributions of this work are three-fold. (1) We characterize the horizon-wise dispersion of action-to-VLM attention in flow-based VLA policies and show that sustained high-entropy saturation is associated with increased offline action error, supporting its use as an empirical indicator of reduced perceptual grounding and elevated prediction risk. (2) Based on these findings, we design a training-free dynamic truncation mechanism that adaptively adjusts the execution horizon during inference without requiring architectural modifications. (3) Extensive evaluations across multiple state-of-the-art VLA models in both simulated and real-world environments show improved average success rates over the evaluated fixed-horizon baselines, competitive performance against adaptive baselines where available, and low additional inference latency.

II. RELATED WORK

A. Vision-Language-Action (VLA) Models

VLA architectures combine visual observations, language instructions, and robot actions within a shared policy framework. A common design uses a pre-trained VLM to encode semantic and perceptual context, which then conditions a dedicated action-generation module. Early systems formulate control as autoregressive prediction over discretized action tokens [23], [24]. This formulation directly reuses language-model training objectives, but action discretization and sequential decoding can limit precision and increase the cost of modeling long trajectories. More recent approaches employ continuous action experts based on diffusion or flow matching to represent multimodal action distributions and generate an entire future trajectory in parallel [1]–[3], [5], [25], [26]. Their architectures range from decoupled designs, in which action queries attend to fixed VLM features, to coupled designs that jointly update VLM and action tokens through a shared attention stack.

Existing work primarily improves policy training and action generation, while execution commonly uses a manually

chosen fixed horizon. We instead study when future actions cease to be sufficiently grounded in the current observation. Our method uses sustained dispersion in action-to-VLM attention as an empirical signal to adapt the executed action chunk at inference time.

B. Action Chunking

Unlike single-step action inference, action chunking [27] generates and executes a sequence of actions in a single pass, which mitigates cumulative errors and enhances the temporal modeling capabilities of the model. Following its introduction in ALOHA [15], this technique became the standard paradigm for VLA models [1], [2], [5], [25]. However, fixed execution horizons require tedious manual tuning for specific tasks and restrict adaptive generalization. While BID [20] attempts to identify optimal chunk lengths, it maintains static horizons during execution, remaining unresponsive to task dynamics. [18] performs **multiple sampling (MS)** during the flow matching denoising process to estimate action uncertainty via entropy for dynamic truncation. Alternatively, [19] utilizes **self-attention (SA)** weights of action tokens relative to sequence anchors to evaluate confidence. This strategy essentially relies on internal sequence consistency but overlooks the root cause of action drift, specifically that current observations become stale for long-range predictions. To address these challenges, we propose an adaptive action chunking method based on the dispersion of cross-attention. By measuring the distribution characteristics of attention from action tokens to VLM tokens, we characterize prediction confidence with negligible computational burden. Experimental results demonstrate that our approach improves adaptive execution performance in multi-task environments without introducing substantial overhead.

III. METHODS

A. Unified Interaction Formulation in VLA

To develop a general adaptive chunking mechanism, we first examine how different VLA architectures handle the interaction between actions and perceptions. While specific implementations vary, most modern frameworks rely on an attention-based interface to fuse multimodal information. For instance, $\pi_{0.5}$ adopts a decoupled paradigm where VLM

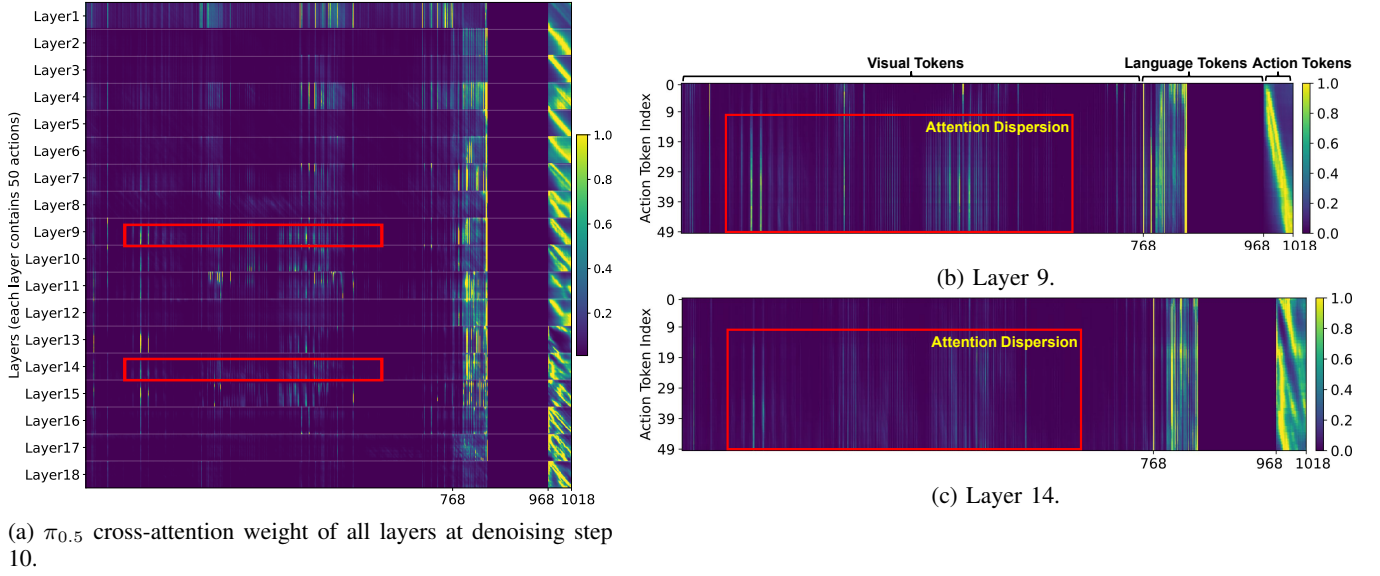


Fig. 3: **Visualization of cross-attention dynamics within the action expert of $\pi_{0.5}$.** (a) provides a comprehensive view across all 18 layers, where the vertical axis represents 50 action queries per layer and the horizontal axis comprises 1,018 key tokens (768 visual, 200 language, and 50 action tokens). (b) and (c) present magnified views of Layer 9 and Layer 14. Red boxes highlight the pronounced attention dispersion for later-stage actions, whereas tokens with smaller indices exhibit negligible reliance on these visual features.

tokens serve as static keys and values that remain unchanged across all layers. In contrast, X-VLA utilizes a coupled paradigm where VLM and action tokens are concatenated and updated jointly via self-attention.

Despite these architectural differences, the underlying action generation process can be unified as a cross-attentional retrieval. Specifically, as shown in Fig. 2, the expert uses a set of action queries **action queries** $\{a_j\}_{j=1}^{H_p}$ to extract information from **perceptual keys** $\{v_i\}_{i=1}^N$ provided by the VLM backbone. This interaction is captured by an attention weight matrix $W \in \mathbb{R}^{H_p \times N}$, where the row index j represents the temporal step of the predicted action sequence, and the column index i corresponds to the perceptual features of the observation. This unified formulation enables us to seek an internal signal within W that is associated with reduced perceptual grounding of future actions. In the following sections, we instantiate our methodology using $\pi_{0.5}$ as the representative model to analyze cross-attention dynamics, with X-VLA-specific adaptations discussed in the experimental evaluation.

B. Attention Dispersion and Entropy Dynamics

1) *Qualitative Observation of Attention Maps:* We begin by analyzing the attention weight matrix $W_l \in \mathbb{R}^{H_p \times (N+H_p)}$ at each layer l of the action expert. As illustrated in Fig. 3a, the vertical axis represents the $H_p = 50$ action token queries of each layer, while the horizontal axis comprises keys of VLM tokens and action tokens. As patterns are consistent across denoising steps, we focus on the final step (step = 10) for analysis.

A global inspection of the intermediate and deep layers, specifically from Layer 9 to Layer 15, reveals a systematic

shift in attention focus. For actions at the beginning of the sequence, the attention exhibits sharp and concentrated saliency, primarily localized on language tokens. However, as the action index increases, the attention focus shifts toward visual tokens and becomes significantly dispersed. We magnify Layer 9 (Fig. 3b) and Layer 14 (Fig. 3c) as representative examples. As indicated by the red boxes, attention for later actions is distributed across nearly the entire visual field. This intra-layer transition shows an empirically observed regime in which later action tokens are less selectively grounded in the current perceptual context; we therefore examine attention dispersion as a candidate empirical risk signal associated with reduced perceptual grounding of future actions.

2) *Quantification via Cross-Attention Entropy:* To quantify this phenomenon, we isolate the action-to-VLM dependency from the full attention matrix. Let $\alpha_{l,j,i} = W_l[j,i]$ denote the attention weight of the j th action token on the i th VLM token v_i at layer l . We introduce cross-attention weight entropy to quantify how focus is distributed across VLM tokens, where higher values indicate a more divergent allocation. To mitigate layer-specific noise and enhance stability, we aggregate the action-to-VLM attention coefficients along the layer axis. These values are subsequently normalized to obtain a probability distribution $p_{i,j}$ describing the relative attention assigned to each VLM token v_i by action token a_j :

$$p_{i,j} = \text{Norm} \left(\sum_{l=1}^L \alpha_{l,j,i} \right), \quad i \in 1, \dots, N, \quad (1)$$

where $\text{Norm}(\cdot)$ ensures that $\sum_{i=1}^N p_{i,j} = 1$ for each action token a_j . Based on this distribution, the cross-attention

weight entropy $\mathcal{E}_j$ for each action token a_j is computed as

$$\mathcal{E}_j = - \sum_{i=1}^N p_{i,j} \log p_{i,j}. \quad (2)$$

Because $p_{i,j}$ is defined over N retained VLM tokens, its entropy is bounded by $0 \leq \mathcal{E}_j \leq \log N$, with equality at the upper bound when attention is uniformly distributed. This architecture-dependent bound provides a normalized reference for distinguishing a genuinely dispersed high-entropy plateau from a locally flat but still concentrated attention pattern.

We analyze the evolution of cross-attention weight entropy $\mathcal{E}$ relative to the action index j . As illustrated in Fig. 4a, entropy consistently increases with the action index before reaching a stable plateau. This plateau indicates an empirically observed regime in which action-to-VLM attention is highly dispersed and temporally stable. We restrict this interpretation to the observed attention pattern and evaluate its association with action error below. The onset of this regime varies with the task stage. During coarse approach maneuvers, entropy increases gradually and attention remains concentrated over a longer action prefix. In contrast, during precise pre-interaction phases, entropy rises sharply and plateaus at a much earlier index. These observations motivate a stage-dependent execution rule: a fixed horizon cannot accommodate changes in the action-to-observation grounding pattern across different manipulation stages.

3) *Entropy as Accuracy Proxy*: To test whether entropy is associated with action prediction error rather than merely action index position, we conduct an inference analysis on held-out demonstration trajectories from the test set. At each evaluated frame, the policy predicts a horizon of 50 actions. For every valid horizon index, we compare the predicted action with the ground-truth action at the corresponding future time step in the recorded trajectory and associate the resulting MSE with that action token’s cross-attention entropy, with predictions extending beyond the end of a trajectory excluded. Entropy and MSE exhibit significant positive dependence (Pearson $r = 0.187$, Spearman $\rho = 0.432$; both $p < 10^{-120}$). After regressing both variables on the within-chunk action index, their partial correlation remains significant ($r = 0.214$), showing that the relationship is not explained solely by later actions being harder to predict.

To construct Fig. 4c, we sort all valid pairs by entropy and partition them into 12 equal-frequency bins. Each point reports the mean entropy and mean MSE of all pairs within one bin, thereby showing how average action prediction error varies across different entropy ranges while keeping the number of samples in each range comparable. The resulting relationship is strongly nonlinear: the average MSE rises sharply in the high-entropy regime near $\mathcal{E} = 6.5$, which is approximately 95% of the theoretical entropy upper bound $\ln(968)$. Moreover, within the high-entropy regime, the top MSE quartile has $10.4\times$ higher mean error and $12.1\times$ higher error standard deviation than the remaining samples. These

results support high attention entropy as an online risk signal for truncating predictions.

C. Adaptive Action Chunking

Based on the observed entropy dynamics, we propose an Adaptive Action Chunking strategy that dynamically selects the execution horizon during inference. Given the cross-attention entropy sequence $\mathbf{E} = \{\mathcal{E}_1, \mathcal{E}_2, \dots, \mathcal{E}_{H_p}\}$ computed at the final denoising step, the method identifies the earliest point at which attention enters a sustained high-dispersion regime.

To reduce noise in the entropy sequence, we first apply a moving-average filter with a window size of k :

$$\bar{\mathcal{E}}_j = \frac{1}{k} \sum_{m=0}^{k-1} \mathcal{E}_{j+m}, \quad j \in \{1, \dots, H_p - k + 1\}. \quad (3)$$

We then compute the first-order change of the smoothed entropy sequence:

$$\Delta \bar{\mathcal{E}}_j = \bar{\mathcal{E}}_{j+1} - \bar{\mathcal{E}}_j. \quad (4)$$

A low entropy gradient alone is not sufficient to indicate saturation, because entropy can also vary slowly while remaining concentrated. Therefore, we detect a plateau only when the smoothed entropy is both high and temporally stable. Specifically, we define the set of candidate plateau locations as


$$\mathcal{C} = \left\{ j \in \{1, \dots, H_p - 2k + 1\} \mid \begin{array}{l} \min_{0 \leq n < k} \bar{\mathcal{E}}_{j+n} \geq \eta \log N, \\ \left| \frac{1}{k} \sum_{n=0}^{k-1} \Delta \bar{\mathcal{E}}_{j+n} \right| < \tau \end{array} \right\}. \quad (5)$$

where η is the normalized high-entropy threshold and τ is the stability threshold. The first condition requires every smoothed entropy value in the k -step window to exceed a fraction η of the maximum entropy $\log N$. The second condition requires the average entropy change within the same window to remain small. The adaptive execution horizon is then defined as


$$H_e = \begin{cases} \min(\mathcal{C}) + k, & \mathcal{C} \neq \emptyset, \\ H_p, & \mathcal{C} = \emptyset. \end{cases} \quad (6)$$

The offset $+k$ accounts for the k -step window used to detect the plateau. Consequently, a low-entropy plateau does not trigger truncation: if no window satisfies both conditions, the policy executes the full predicted horizon H_p .


By selecting the execution horizon from the observed action-to-VLM attention dynamics, the method retains longer action chunks while attention remains concentrated and truncates only after detecting a sustained high-dispersion regime associated with increased prediction error. The rule uses attention weights already produced by the action expert and requires neither retraining nor additional sampling.

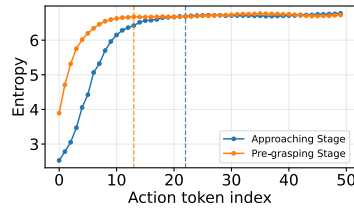

(a) Stage-dependent entropy.

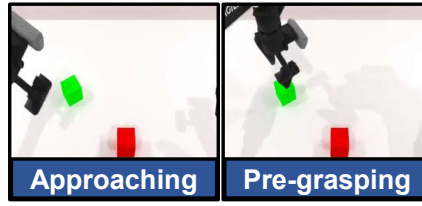

(b) Different stages.



(c) Entropy versus action MSE.

Fig. 4: **Action entropy analysis.** (a) Attention entropy exhibits distinct growth rates across the task stages visualized in (b). Precise interactions (pre-grasping) lead to a sharper rise and earlier saturation than coarse movements (approaching). (c) Offline evaluation on the test set shows that the action-prediction MSE rises sharply as cross-attention entropy approaches its theoretical maximum; the top MSE quartile exhibits a $10.4\times$ higher mean error and a $12.1\times$ higher error standard deviation than the remaining samples.

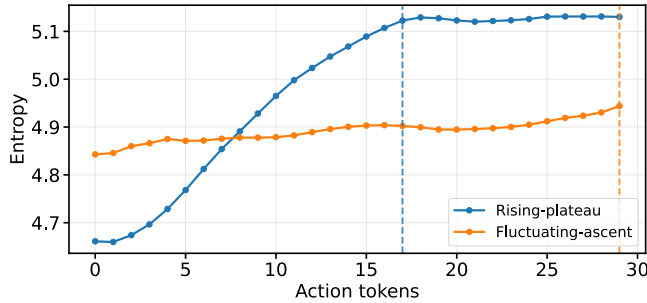


Fig. 5: **Entropy patterns in X-VLA.** Two distinct patterns are observed: the rising-plateau pattern reaches a sustained high-entropy regime, whereas the fluctuating-ascent pattern continues to vary without forming a stable plateau.

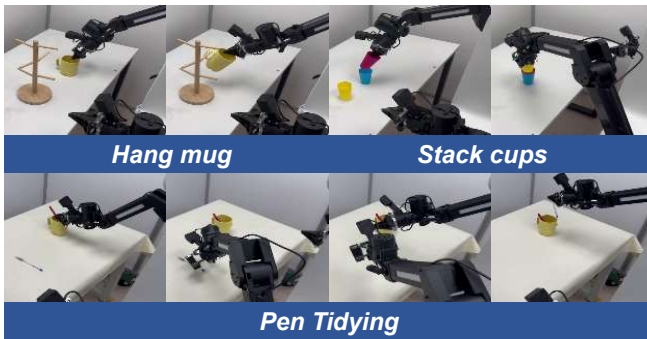


Fig. 6: **Real-world tasks.** We evaluate the generalizability of our adaptive chunking method across three representative real-world tasks: Hang mug, Stack cups, and Pen Tidying.

IV. EXPERIMENTS

We evaluate our adaptive action chunking method using state-of-the-art $\pi_{0.5}$ and X-VLA models across the RoboTwin 2.0 [28], [29] and LIBERO [30] benchmarks, as well as three real-world tasks. Systematic comparisons against fixed-length, multi-sampling [18] (MS), and self-attention-based [19] (SA) baselines demonstrate that our method improves success rates and generalizability.

Hyperparameters. We use a common configuration of $k = 5$, $\tau = 0.01$, and $\eta = 0.95$ across models, benchmarks, and

TABLE I: RoboTwin 2.0 task statistics.

Task	Avg. Frames	Horizon
Place phone stand	127.74	Short
Place fan	147.66	Short
Move can pot	151.68	Short
Place dual shoes	227.94	Medium
Place bread basket	238.80	Medium
Hand over block	284.98	Medium
Stack blocks two	313.58	Medium
Blocks rank rgb	461.00	Long
Stack blocks three	473.16	Long
Put bottles dustbin	622.42	Long

tasks. The normalized high-entropy ratio η is selected once according to the entropy–MSE relationship in Fig. 4c, which shows a rapid increase in action error in the high-entropy regime, and is not tuned for individual tasks or architectures. The sole exception is $\pi_{0.5}$ on LIBERO: because this policy predicts only $H_p = 10$ actions per query, we use a proportionally shorter smoothing window of $k = 3$. All four LIBERO suites share this setting, while τ and η remain unchanged.

A. Simulation

1) *RoboTwin 2.0 Experiments:* To ensure comprehensive assessment, we evaluate 10 representative RoboTwin 2.0 tasks, categorized by average episode length into short (3 tasks), medium (4 tasks), and long-horizon (3 tasks) tiers. The selected tasks and their average episode lengths are summarized in Tab. I. For $\pi_{0.5}$, we fine-tune individual checkpoints for 40,000 steps (batch size 32) using 50 Aloha Agilix demonstrations per task. For X-VLA, we evaluate the open-source model trained on all 50 RoboTwin tasks. All evaluations are conducted in RoboTwin’s clean mode using three random seeds per configuration, with 100 rollouts each. *Evaluation on $\pi_{0.5}$.* The fine-tuned $\pi_{0.5}$ model generates a candidate sequence of $H_p = 50$ actions per inference step. We evaluate several fixed execution chunk lengths, specifically 10, 15, 20, and 25, while omitting longer horizons due to their significantly degraded success rates. Dynamic baselines include the multi-sampling method, which utilizes 20

TABLE II: Success Rate (%) and Average Action Length for $\pi_{0.5}$ in RoboTwin 2.0 benchmark.

Task Name	Success Rate (%) by Execution Chunk						Ours	
	10	15	20	25	SA	MS	Ours	Avg. Len.
Blocks rank rgb	80.0	62.0	52.7	43.3	58.3	74.7	77.3	20.83
Put bottles dustbin	89.3	90.0	84.7	82.7	87.3	78.0	91.3	19.54
Stack blocks three	63.0	43.3	28.7	36.7	53.0	66.0	62.3	18.30
Stack blocks two	91.7	85.0	82.0	77.3	85.0	81.3	89.3	20.31
Hand over block	19.0	27.0	29.0	25.3	26.0	10.0	25.3	15.91
Place dual shoes	31.0	37.0	37.0	38.7	36.0	33.7	39.3	17.10
Place bread basket	55.7	54.7	55.7	55.0	52.3	48.0	57.3	14.88
Move can pot	90.7	87.0	73.0	68.3	75.3	84.7	87.3	17.89
Place Fan	44.0	42.7	37.3	39.0	41.3	51.0	42.7	21.42
Place phone stand	52.0	51.0	58.0	55.3	61.0	42.7	56.7	14.88
Average	61.6	58.0	53.8	52.2	57.6	57.0	62.9	18.11

iterations to estimate action entropy, and the self-attention-based approach. The mean success rates across three seeds are summarized in Tab. II. Our method achieves a leading average success rate of 62.9%, outperforming all fixed-chunk baselines and established methods such as self-attention-based (SA) and multi-sampling (MS). While fixed-chunk baselines can achieve competitive performance on individual tasks, their adaptability across a diverse multi-task suite is limited compared to our approach. Our method maintains consistently high success rates across all evaluated scenarios, demonstrating both stability and effective generalization. It outperforms the strongest baseline (chunk size = 10) despite having a much longer average execution horizon of 18.11 steps. This indicates that stage-aware dynamic adjustment can improve success rates while reducing inference frequency. By extending execution during high-confidence phases, our strategy lowers computational overhead, providing a better trade-off between task precision and inference efficiency.

Evaluation on X-VLA. To further validate the generalizability of our method, we conduct the same experiments on X-VLA. X-VLA generates a candidate sequence of $H_p = 30$ actions at each inference step. We evaluate fixed execution horizons of 15, 20, 25, and 30, while omitting shorter horizons due to their low success rates. Despite X-VLA’s coupled self-attention mechanism, we restrict the action-token attention entropy to the cross-attentional component over the $N = 200$ VLM tokens, following Eqs. 1 and 2. As shown in Fig. 5, X-VLA exhibits both rising-plateau and fluctuating-ascent patterns. We apply exactly the same normalized criterion in Eq. 5 as for $\pi_{0.5}$, without an architecture-specific entropy-increment threshold. A rising or fluctuating sequence that never forms a sustained high-entropy plateau leaves $\mathcal{C}$ empty and therefore executes the full 30-action horizon; only a sustained high-entropy plateau triggers truncation. Results in Tab. III show that although fixed execution lengths achieve peak performance on individual tasks, their performance varies substantially across the task suite. Our method attains the highest average success rate without model-specific threshold design.

TABLE III: Success Rate (%) for X-VLA.

Task Name	SR (%) by Execution Chunk				
	15	20	25	30	Ours
Blocks rank rgb	33.0	84.0	85.7	82.7	84.0
Put bottles dustbin	46.0	72.7	80.0	80.0	71.3
Stack blocks three	22.0	52.7	58.0	45.3	59.3
Stack blocks two	32.0	94.0	90.0	81.3	94.0
Hand over block	80.3	61.7	80.3	90.0	94.0
Place dual shoes	72.0	70.0	76.0	76.7	76.0
Place bread basket	50.7	67.3	64.3	71.0	64.7
Move can pot	32.7	61.0	82.0	76.3	88.0
Place Fan	26.0	40.7	72.3	66.0	74.3
Place phone stand	40.0	45.0	52.0	91.3	84.0
Average	43.5	64.9	74.1	76.1	79.0

TABLE IV: Success rate (%) on the LIBERO benchmark.

Execution	Spatial	Object	Goal	Long	Avg.
Fixed-2	97.5	96.5	93.0	85.0	93.00
Fixed-4	97.5	97.0	94.5	89.5	94.63
Fixed-6	98.0	97.0	94.5	90.0	94.88
Fixed-8	97.0	97.5	92.5	89.5	94.13
Fixed-10	97.0	97.0	95.5	89.5	94.75
Ours	99.5	98.5	96.5	94.5	97.25

2) *LIBERO Experiments:* We evaluate our method on all four LIBERO task suites using the open-source trained $\pi_{0.5}$ model. We compare adaptive execution against fixed execution chunks of 2, 4, 6, 8, and 10 actions without modifying the policy parameters. As shown in Tab. IV, our method achieves the highest success rate on every suite and improves the overall average from 94.88% for the strongest fixed-chunk baseline (chunk size 6) to 97.25%. The improvement is most pronounced on LIBERO-Long, where our method reaches 94.5%, exceeding the best fixed setting by 4.5 percentage points. These results indicate that a single static execution horizon cannot consistently accommodate tasks with different temporal structures, whereas adaptive action chunking transfers effectively to a separately trained policy and benchmark.

TABLE V: Success rate for realworld tasks.

Task Name	SR (%) by Execution Chunk							
	10	20	30	40	50	SA	MS	Ours
Hang Mug	55	45	60	60	65	60	20	75
Stack Cups	60	55	60	65	50	65	15	70
Pen Tidying	20	40	35	15	10	40	20	40
Average	45	47.5	47.5	40	42.5	55	18.3	61.7

TABLE VI: Latency Analysis

Method	Fixed	MS	SA	Ours
Latency / s ↓	0.2661	0.2956	0.2728	0.2725

B. Realworld Experiments

1) *Platform and Tasks*: Our real-world system uses a dual-arm ARX R5 follower robot and an ARX X5 leader for bilateral teleoperation. Two wrist-mounted fisheye cameras provide local manipulation views, while a head-mounted RGB camera observes the full workspace. Images are captured at 20 Hz and the low-level control loop runs at 60 Hz. We evaluate three tasks shown in Fig. 6: *Mug Hanging*, a single-arm task requiring precise placement on a mug-tree branch under partial occlusion; *Pen Tidying*, which transitions from single-arm placement to a dual-arm handover; and *Cup Stacking*, a contact-rich dual-arm task requiring three cups to be stacked vertically.

2) *Training and Evaluation Protocol*: For each task, we collect 50 expert demonstrations and fine-tune a separate $\pi_{0.5}$ policy for 40,000 steps with batch size 32. Each execution method is evaluated over 20 independent trials per task.

As shown in Tab. V, our method consistently improves success rates for both single-arm and dual-arm tasks. The average success rate across the three tasks increases by 14.2% compared to the best fixed-chunk configuration (chunk = 20,30) and by 6.7% relative to the strongest adaptive action chunking baseline (SA). It is also observed that the multi-sampling (MS) method struggles due to the fragmented execution resulting from the small chunk size. Using the configuration reported in the original literature, the robot exhibits intermittent pauses during movement, which impacts the overall success rate. These results demonstrate the effectiveness of utilizing the dispersion of cross-attention within the action expert as a metric to characterize the accuracy of predicted actions.

C. Efficiency Analysis

We analyze the computational latency for a single action chunk inference cycle on a single NVIDIA A100 GPU using $\pi_{0.5}$. As shown in Tab. VI, the multi-sampling (MS) method increases the latency of each inference cycle by 29.5 ms. Although MS employs parallel execution for multiple sampling passes, such overhead remains considerable for high-frequency closed-loop control. Conversely, attention-based strategies, including the self-attention-based (SA) baseline and our approach, introduce less than 7 ms of additional

latency relative to fixed chunking. By exploiting intrinsic model signals rather than executing redundant sampling passes, our method facilitates real-time dynamic action chunking with minimal computational cost.

V. CONCLUSION

This paper introduces an adaptive action chunking strategy using internal cross-attention dynamics in action expert modules. By calculating attention entropy from weight distributions, we characterize model predictive boundaries relative to observations. This enables a training-free dynamic truncation mechanism that adjusts the execution horizon during inference. Our experiments demonstrate improved success rates and robustness across multiple state-of-the-art VLA models in various multi-task settings. These improvements, achieved with negligible overhead, indicate that intrinsic epistemic uncertainty can be effectively used to enhance closed-loop robotic control.

VI. LIMITATIONS

Our framework currently depends on identifiable cross-attention pathways. Architectures with highly interleaved or hierarchical structures present challenges in aggregating unified uncertainty signals. Furthermore, we have yet to evaluate our method on emerging World Action Models (WAMs) [31]–[33] exhibiting distinct generative dynamics. Extending this adaptive strategy to such complex paradigms remains a promising future direction.

REFERENCES

- [1] K. Black, N. Brown, D. Driess, A. Esmail, M. Equi, C. Finn, N. Fusai, L. Groom, K. Hausman, B. Ichter *et al.*, “ π_0 : A vision-language-action flow model for general robot control,” *arXiv preprint arXiv:2410.24164*, 2024.
- [2] K. Black, N. Brown, J. Darpinian, K. Dhabalia, D. Driess, A. Esmail, M. R. Equi, C. Finn, N. Fusai, M. Y. Galliker *et al.*, “ $\pi_{0.5}$: a vision-language-action model with open-world generalization,” in *9th Annual Conference on Robot Learning*, 2025.
- [3] S. Liu, L. Wu, B. Li, H. Tan, H. Chen, Z. Wang, K. Xu, H. Su, and J. Zhu, “Rdt-1b: a diffusion foundation model for bimanual manipulation,” *arXiv preprint arXiv:2410.07864*, 2024.
- [4] S. Liu, B. Li, K. Ma, L. Wu, H. Tan, X. Ouyang, H. Su, and J. Zhu, “Rdt2: Exploring the scaling limit of umi data towards zero-shot cross-embodiment generalization,” *arXiv preprint arXiv:2602.03310*, 2026.
- [5] NVIDIA, :, J. Bjorck, F. Castañeda, N. Cherniadev, X. Da, R. Ding, L. J. Fan, Y. Fang, D. Fox, F. Hu, S. Huang, J. Jang, Z. Jiang, J. Kautz, K. Kundalia, L. Lao, Z. Li, Z. Lin, K. Lin, G. Liu, E. Llontop, L. Magne, A. Mandlekar, A. Narayan, S. Nasiriany, S. Reed, Y. L. Tan, G. Wang, Z. Wang, J. Wang, Q. Wang, J. Xiang, Y. Xie, Y. Xu, Z. Xu, S. Ye, Z. Yu, A. Zhang, H. Zhang, Y. Zhao, R. Zheng, and Y. Zhu, “Gr00t n1: An open foundation model for generalist humanoid robots,” 2025. [Online]. Available: <https://arxiv.org/abs/2503.14734>
- [6] Q. Bu, J. Cai, L. Chen, X. Cui, Y. Ding, S. Feng, S. Gao, X. He, X. Hu, X. Huang *et al.*, “Agibot world colosseum: A large-scale manipulation platform for scalable and intelligent embodied systems,” *arXiv preprint arXiv:2503.06669*, 2025.
- [7] Q. Bu, Y. Yang, J. Cai, S. Gao, G. Ren, M. Yao, P. Luo, and H. Li, “Univla: Learning to act anywhere with task-centric latent actions,” *arXiv preprint arXiv:2505.06111*, 2025.
- [8] G. R. Team, S. Abeyruwan, J. Ainslie, J.-B. Alayrac, M. G. Arenas, T. Armstrong, A. Balakrishna, R. Baruch, M. Bauza, M. Blokzijl *et al.*, “Gemini robotics: Bringing ai into the physical world,” *arXiv preprint arXiv:2503.20020*, 2025.

- [9] M. Shukor, D. Aubakirova, F. Capuano, P. Kooijmans, S. Palma, A. Zouitine, M. Aractingi, C. Pascal, M. Russi, A. Marafioti *et al.*, “Smolvla: A vision-language-action model for affordable and efficient robotics,” *arXiv preprint arXiv:2506.01844*, 2025.
- [10] J. Sohl-Dickstein, E. Weiss, N. Maheswaranathan, and S. Ganguli, “Deep unsupervised learning using nonequilibrium thermodynamics,” in *International conference on machine learning*. pmlr, 2015, pp. 2256–2265.
- [11] J. Ho, A. Jain, and P. Abbeel, “Denoising diffusion probabilistic models,” *Advances in neural information processing systems*, vol. 33, pp. 6840–6851, 2020.
- [12] J. Song, C. Meng, and S. Ermon, “Denoising diffusion implicit models,” *arXiv preprint arXiv:2010.02502*, 2020.
- [13] Y. Lipman, M. Havasi, P. Holderrieth, N. Shaul, M. Le, B. Karrer, R. T. Chen, D. Lopez-Paz, H. Ben-Hamu, and I. Gat, “Flow matching guide and code,” *arXiv preprint arXiv:2412.06264*, 2024.
- [14] Y. Lipman, R. T. Chen, H. Ben-Hamu, M. Nickel, and M. Le, “Flow matching for generative modeling,” *arXiv preprint arXiv:2210.02747*, 2022.
- [15] T. Z. Zhao, V. Kumar, S. Levine, and C. Finn, “Learning fine-grained bimanual manipulation with low-cost hardware,” *arXiv preprint arXiv:2304.13705*, 2023.
- [16] C. Chi, Z. Xu, S. Feng, E. Cousineau, Y. Du, B. Burchfiel, R. Tedrake, and S. Song, “Diffusion policy: Visuomotor policy learning via action diffusion,” *The International Journal of Robotics Research*, vol. 44, no. 10-11, pp. 1684–1704, 2025.
- [17] J. So, C. Lee, S. Lee, J. Ok, and E. Park, “Improving generative behavior cloning via self-guidance and adaptive chunking,” *Advances in Neural Information Processing Systems*, vol. 38, pp. 84432–84456, 2026.
- [18] Y. Liang, X. Wang, K. Wang, S. Wang, X. Peng, H. Chen, D. K. H. Chua, and P. Vadakkepat, “Adaptive action chunking at inference-time for vision-language-action models,” *arXiv preprint arXiv:2604.04161*, 2026.
- [19] H. Wang, G. Zhang, Y. Yan, R. R. Kompella, and G. Liu, “Vla knows its limits,” *arXiv preprint arXiv:2602.21445*, 2026.
- [20] Y. Liu, J. Hamid, A. Xie, Y. Lee, M. Du, and C. Finn, “Bidirectional decoding: Improving action chunking via guided test-time sampling,” in *International Conference on Learning Representations*, vol. 2025, 2025, pp. 4594–4627.
- [21] K. Black, M. Galliker, and S. Levine, “Real-time execution of action chunking flow policies,” *Advances in Neural Information Processing Systems*, vol. 38, pp. 33383–33407, 2026.
- [22] Y. Liu, H. Yu, J. Zhao, B. Li, D. Zhang, M. Li, W. Wu, Y. Hu, J. Xie, J. Guo *et al.*, “Learning native continuation for action chunking flow policies,” *arXiv preprint arXiv:2602.12978*, 2026.
- [23] B. Zitkovich, T. Yu, S. Xu, P. Xu, T. Xiao, F. Xia, J. Wu, P. Wohlhart, S. Welker, A. Wahid *et al.*, “Rt-2: Vision-language-action models transfer web knowledge to robotic control,” in *Conference on Robot Learning*. PMLR, 2023, pp. 2165–2183.
- [24] M. J. Kim, K. Pertsch, S. Karamcheti, T. Xiao, A. Balakrishna, S. Nair, R. Rafailov, E. Foster, G. Lam, P. Sanketi *et al.*, “Open-vla: An open-source vision-language-action model,” *arXiv preprint arXiv:2406.09246*, 2024.
- [25] J. Zheng, J. Li, Z. Wang, D. Liu, X. Kang, Y. Feng, Y. Zheng, J. Zou, Y. Chen, J. Zeng *et al.*, “X-vla: Soft-prompted transformer as scalable cross-embodiment vision-language-action model,” *arXiv preprint arXiv:2510.10274*, 2025.
- [26] Q. Zhao, Y. Lu, M. J. Kim, Z. Fu, Z. Zhang, Y. Wu, Z. Li, Q. Ma, S. Han, C. Finn *et al.*, “Cot-vla: Visual chain-of-thought reasoning for vision-language-action models,” in *Proceedings of the Computer Vision and Pattern Recognition Conference*, 2025, pp. 1702–1713.
- [27] L. Lai, A. Z. Huang, and S. J. Gershman, “Action chunking as policy compression,” *PsyArXiv*, 2022.
- [28] T. Chen, Z. Chen, B. Chen, Z. Cai, Y. Liu, Z. Li, Q. Liang, X. Lin, Y. Ge, Z. Gu *et al.*, “Robotwin 2.0: A scalable data generator and benchmark with strong domain randomization for robust bimanual robotic manipulation,” *arXiv preprint arXiv:2506.18088*, 2025.
- [29] Y. Mu, T. Chen, Z. Chen, S. Peng, Z. Lan, Z. Gao, Z. Liang, Q. Yu, Y. Zou, M. Xu *et al.*, “Robotwin: Dual-arm robot benchmark with generative digital twins,” in *Proceedings of the computer vision and pattern recognition conference*, 2025, pp. 27649–27660.
- [30] B. Liu, Y. Zhu, C. Gao, Y. Feng, Q. Liu, Y. Zhu, and P. Stone, “Libero: Benchmarking knowledge transfer for lifelong robot learning,” in *Advances in Neural Information Processing Systems*, vol. 36, 2023.
- [31] S. Ye, Y. Ge, K. Zheng, S. Gao, S. Yu, G. Kurian, S. Indupuru, Y. L. Tan, C. Zhu, J. Xiang *et al.*, “World action models are zero-shot policies,” *arXiv preprint arXiv:2602.15922*, 2026.
- [32] L. Li, Q. Zhang, Y. Luo, S. Yang, R. Wang, F. Han, M. Yu, Z. Gao, N. Xue, X. Zhu *et al.*, “Causal world modeling for robot control,” *arXiv preprint arXiv:2601.21998*, 2026.
- [33] T. Yuan, Z. Dong, Y. Liu, and H. Zhao, “Fast-wam: Do world action models need test-time future imagination?” *arXiv preprint arXiv:2603.16666*, 2026.