

CONTRASTIVE ON-POLICY DISTILLATION

Jiacheng Ruan^{1,2,*}, Jun Tang², Wenzhen Yuan¹, Ting Liu¹,

Shuai Bai², Dayiheng Liu², Zhibo Yang^{2,†}, Yuzhuo Fu^{1,‡}

¹Shanghai Jiao Tong University, ²Alibaba Group

jackchenruan@sjtu.edu.cn

ABSTRACT

On-policy Distillation (OPD) supervises a student model on trajectories sampled from its own policy by minimizing the divergence between the output distributions of the teacher and student at each token position, thereby providing dense token-level supervision. Although existing OPD methods have demonstrated strong performance in improving the reasoning ability of student models, their objectives fundamentally rely on token-level distribution matching. Consequently, they lack an explicit signal for comparing a token’s relative compatibility across reasoning modes and thus do not directly model preferences between these modes. To address this limitation, we propose COPD, a contrastive OPD framework. Specifically, for each token generated by the student model, a frozen teacher model scores the same student state under two contrasting instructions that elicit light and heavy reasoning. The difference between the resulting log probabilities serves as a token-level advantage signal to guide the OPD update. Rather than merely imitating a single teacher distribution, COPD directly encourages the student model to learn more concise and efficient reasoning strategies. We conduct experiments on nine multimodal benchmarks covering both reasoning and understanding tasks. The results show that COPD substantially reduces reasoning length without compromising model performance and consistently improves efficiency across different tasks and model scales. Furthermore, the contrastive formulation can be seamlessly integrated into the On-policy Self-distillation (OPSD) framework, where self-contrastive supervision is constructed without an additional teacher model, thereby enabling the model to distill itself toward lightweight reasoning.

1 INTRODUCTION

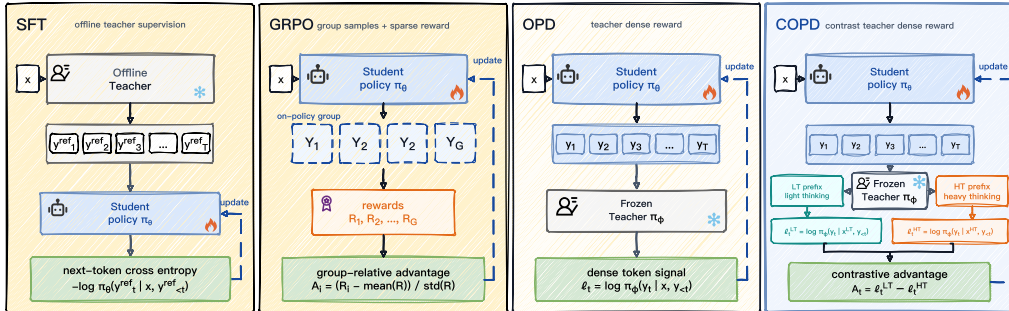


Figure 1: **COPD contrasts OPD-style supervision with a paired Light-thinking and Heavy-thinking (LT/HT) teacher signal.** The same on-policy student token is scored under light- and heavy-thinking prefixes to obtain a dense preference signal.

*This work was done during an internship with the Qwen Team at Alibaba Group.

[†]Project leader.

[‡]Corresponding author.

In recent years, large-scale reasoning models have achieved remarkable progress in both multimodal understanding and text-only reasoning tasks (Alayrac et al., 2022; Li et al., 2023; Liu et al., 2023; 2024; Chen et al., 2024b; Bai et al., 2023; Wang et al., 2024b; Bai et al., 2025b;a; Caffagni et al., 2024; Jin et al., 2025a; Shao et al., 2024). By generating explicit intermediate reasoning steps to decompose complex problems, these models have significantly improved accuracy in scenarios such as mathematical problem solving, logical inference, and multi-step decision making (Wei et al., 2022; Kojima et al., 2022; Wang et al., 2022; Zhou et al., 2022; Yao et al., 2023). Step-by-step reasoning has thus become a dominant paradigm for tackling complex tasks (Wei et al., 2022; Yao et al., 2023; Huang & Chang, 2023). However, as reasoning capabilities improve, redundancy in the reasoning process has become increasingly prominent. Therefore, enhancing reasoning efficiency while preserving problem-solving capability has emerged as a key research challenge.

Existing reasoning-compression methods explicitly encourage efficiency through selected concise traces, preference pairs, token budgets, or length- and conciseness-aware rewards (Munkhbat et al., 2025; Jin et al., 2025b; Han et al., 2025; Li et al., 2026c; Liu et al., 2025; Li et al., 2026a; Dumitru et al., 2025). These methods derive their compression signals from selected training targets or explicitly designed budgets and rewards. On-policy distillation (OPD) offers a complementary route: it distills teacher feedback on student-generated sequences, providing dense token-level supervision at prefixes the student actually visits (Agarwal et al., 2024). However, at each student-visited prefix, standard OPD supervises the student against only one teacher distribution. Such single-distribution supervision measures token compatibility under one teacher context, but provides no relative information about how that compatibility changes across reasoning-mode instructions. What is missing, therefore, is not more token-level supervision, but a paired conditional signal that compares the same candidate token across reasoning-mode instructions while holding the raw task input and student-generated prefix fixed.

To address this issue, we propose COPD, a contrastive on-policy distillation method. By introducing pairwise comparisons of reasoning modes, this approach translates the implicit reasoning preferences of the teacher model into explicit token-level supervision signals. Specifically, the student model first generates reasoning trajectories in an on-policy manner. Subsequently, the frozen teacher model evaluates the identical trajectory generated by the student model at the token level under two distinct reasoning instructions, namely light-thinking and heavy-thinking. The discrepancy between these two evaluations serves as a token-level advantage signal to guide the optimization of the student model. Through this design, the teacher model functions not merely as an imitation target for a single distribution, but rather as a contrastive reference for evaluating diverse reasoning modes. Consequently, the contrastive signal shifts the student toward responses associated with the light-thinking condition, thereby achieving adaptive compression without requiring predefined target lengths.

We systematically evaluate the proposed method on nine multimodal benchmarks. The experimental results demonstrate that, across diverse task types and model scales, COPD substantially reduces reasoning length while maintaining performance, thereby improving the trade-off between accuracy and inference cost. Moreover, the contrastive mechanism naturally extends to an on-policy self-distillation framework, where self-contrastive supervision can be constructed without an additional teacher model to effectively compress reasoning length.

The main contributions of this work are summarized as follows. **1)** We propose COPD, a contrastive on-policy distillation method that derives dense token-level advantage signals from paired teacher scores under two reasoning instructions, thereby enabling adaptive reasoning compression with negligible performance degradation. **2)** We integrate this contrastive paradigm into on-policy self-distillation, allowing a model with deep reasoning capabilities to be directly converted into a light-thinking counterpart. **3)** Extensive evaluations on nine multimodal benchmarks demonstrate the consistent effectiveness and robust generalization of COPD across diverse tasks and settings.

2 COPD: CONTRASTIVE ON-POLICY DISTILLATION

2.1 PROBLEM SETUP AND OVERVIEW

Let x denote an input, π_θ the student policy, and π_ϕ a frozen teacher. Standard OPD samples a response $y = (y_1, \dots, y_{T_y})$, $T_y = |y|$ from the behavior student $\pi_{\theta_{\text{old}}}$, asking the teacher to score

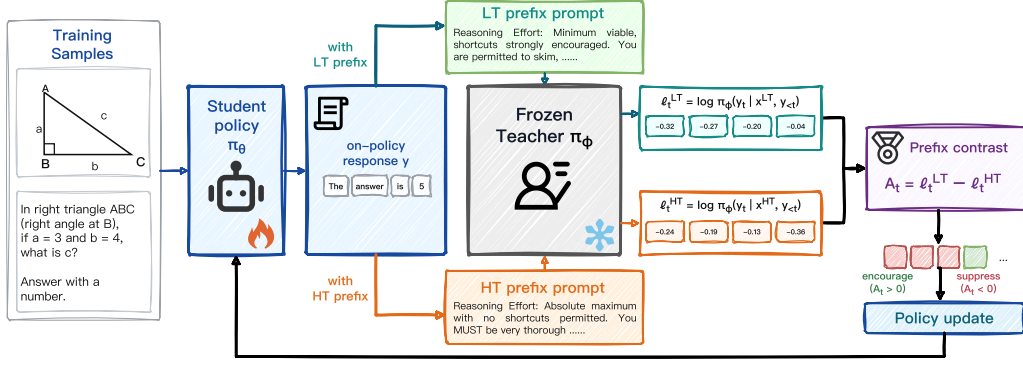


Figure 2: **Training pipeline of COPD.** The student first samples a response to the input. The frozen teacher then scores the same token sequence under light-thinking and heavy-thinking contexts, respectively. The relative likelihood derived from these scores serves as a token-level advantage signal for policy updates.

the generated tokens under the same visited prefixes $(x, y_{<t})$ (Agarwal et al., 2024). This provides dense supervision on reached student states, but the resulting score only indicates token plausibility under one teacher context.

COPD turns teacher scoring into a matched comparison between reasoning modes. For every student-generated token, the frozen teacher performs two evaluations that share the raw visual input, question, generated prefix, and candidate token but differ in the light- versus heavy-thinking instruction. The log-likelihood difference between these scores becomes a token-level preference signal. Thus, COPD preserves OPD’s student-induced state distribution while replacing single-context imitation with a dense estimate of whether the current student action is more compatible with compact or exhaustive reasoning.

2.2 PAIRED TEACHER SCORING

Let ι^{LT} and ι^{HT} denote light- and heavy-thinking instructions, respectively. The student samples a full response trajectory under input x :

$$y = (y_1, \dots, y_{T_y}) \sim \pi_{\theta_{old}}(\cdot | x), \quad (1)$$

Subsequently, the frozen teacher takes the same input and computes step-wise conditional log-probabilities for trajectory y under both reasoning intensity instructions:

$$\ell_t^m = \log \pi_\phi(y_t | x^m, y_{<t}), \quad x^m = [\iota^m; x], \quad m \in \{LT, HT\}, \quad t = 1, \dots, T_y. \quad (2)$$

Intuitively, the same token carries substantially different conditional probabilities depending on the expected reasoning mode. Paired scoring exploits this by evaluating the same generated step under both light- and heavy-thinking instruction contexts via two separate forward passes of the frozen teacher, yielding its relative conditional likelihood under each mode. The resulting signal does not rely on answer labels, token position, or sequence length, directly reflecting which reasoning mode the current step is more compatible with.

2.3 CONTRASTIVE TOKEN-LEVEL ADVANTAGE

COPD defines the token-level advantage as the light-over-heavy log-likelihood contrast:

$$A_t = \ell_t^{LT} - \ell_t^{HT}. \quad (3)$$

Positive values indicate that under the same generation prefix, the teacher considers y_t more compatible with the lightweight thinking context. Negative values indicate the opposite. To stabilize the update scale, we two-side-clip the advantage. Equivalently, the effective advantage is:

$$\tilde{A}_t = \text{stopgrad}(\text{clip}(A_t, -A_{\max}, A_{\max})), \quad A_{\max} > 0, \quad (4)$$

Our advantage signal contains no length penalty. Even if a token appears later in the sequence, it can still receive a high advantage value, provided the teacher model judges it effectively advances efficient reasoning. Therefore, output shortening is a natural result of policy learning. Only when repeated reinforcement leads the policy to form a tendency to continuously increase weights of tokens related to advancing, summarizing, or direct answering while reducing those associated with continued deep reasoning will the output gradually become shorter.

2.4 POLICY UPDATE

Given the clipped contrastive advantage $\tilde{A}_t$, COPD updates the student with a clipped policy-gradient objective (Schulman et al., 2017). Let

$$r_t(\theta) = \frac{\pi_\theta(y_t | x, y_{<t})}{\pi_{\theta_{\text{old}}}(y_t | x, y_{<t})}$$

denote the probability ratio between the current policy and the old policy that anchors the update. The clipped objective is

$$J_{\text{COPD}}(\theta) = \mathbb{E}_{\substack{x \sim \mathcal{D} \\ y \sim \pi_{\theta_{\text{old}}}(\cdot | x)}} \left[\frac{1}{T_y} \sum_{t=1}^{T_y} \min \left(r_t(\theta) \tilde{A}_t, \text{clip}(r_t(\theta), 1 - \epsilon_{\text{low}}, 1 + \epsilon_{\text{high}}) \tilde{A}_t \right) \right]. \quad (5)$$

This objective increases the likelihood of tokens more compatible with the lightweight teacher context while decreasing it for the heavy-thinking context. The contrastive advantage is treated as a detached token-level signal, providing only the update direction and scale, with gradients flowing through the student policy. The complete COPD training process is as follows.

COPD training procedure.

Given student π_{θ_0} , frozen teacher π_ϕ , and training inputs $\mathcal{D}$:

$k = 0, \dots, K - 1$, $\theta_{\text{old}} \leftarrow \theta_k$.

1. Sample inputs $\mathcal{B}_k = (x_i)_{i=1}^B$, $x_i \stackrel{\text{i.i.d.}}{\sim} \mathcal{D}$.

2. Sample responses $y_i \sim \pi_{\theta_{\text{old}}}(\cdot | x_i)$, $i = 1, \dots, B$ from the rollout student.

$y_i = (y_{i,1}, \dots, y_{i,T_i})$, $T_i = |y_i|$.

3. Construct light-thinking and heavy-thinking contexts x_i^{LT} and x_i^{HT} by prepending the corresponding reasoning-effort instruction to the same raw prompt.

$x_i^{\text{LT}} = [\ell^{\text{LT}}; x_i]$, $x_i^{\text{HT}} = [\ell^{\text{HT}}; x_i]$.

4. Score the identical generated response under both contexts to obtain response-token log-likelihoods $\ell_{i,t}^{\text{LT}}$ and $\ell_{i,t}^{\text{HT}}$.

$\ell_{i,t}^m = \log \pi_\phi(y_{i,t} | x_{i,t}^m, y_{i,<t})$, $m \in \{\text{LT}, \text{HT}\}$, $t = 1, \dots, T_i$.

5. Compute the detached contrastive advantage $A_{i,t}$ and the clamped effective advantage $\tilde{A}_{i,t}$.
 $A_{i,t} = \ell_{i,t}^{\text{LT}} - \ell_{i,t}^{\text{HT}}$.

$\tilde{A}_{i,t} = \text{stopgrad}(\text{clip}(A_{i,t}, -A_{\max}, A_{\max}))$.

6. Update the student by maximizing the clipped PPO-style contrastive distillation objective $J_{\text{COPD}}(\theta)$.

$\theta_{k+1} \approx \arg \max_\theta J_{\text{COPD}}(\theta)$.

2.5 SELF-DISTILLATION VARIANT

The same paired contrast can be used without a larger external teacher. We call this variant COPSD, where the frozen scorer is a snapshot of the model being trained rather than a larger model. COPSD

tests whether the compression signal depends on teacher scale. If the same base model assigns different likelihoods to the same action under light- and heavy-thinking contexts, then part of the useful signal comes from context-induced relative preference rather than from teacher size alone.

3 EXPERIMENTS

3.1 SETUP

3.1.1 MODELS AND BASELINE

Our main experiments are conducted on Qwen3-VL-2B-Instruct and Qwen3.5-2B (Bai et al., 2025a; Team, 2026). We use approximately 16K samples from ViRL-39K (Wang et al., 2026) as the training set, denoted as ViRL-16K¹. Our main baselines include the corresponding Base model, Vanilla OPD, ExOPD, which formulates OPD as reinforcement learning with a dense KL constraint and uses reward extrapolation to enable the student model to surpass the performance boundary of the teacher model, and VA-OPD, which uses token-level log-probability differences of the teacher model with and without visual details to hierarchically weight rollouts and tokens during online distillation, thereby preventing visual signals from being diluted by language tokens (Agarwal et al., 2024; Yang et al., 2026; Liu et al., 2026).

3.1.2 TRAINING DETAILS

We implement OPD-based training within the verl framework, employing FSDP and a rollout and scoring mechanism based on vLLM (Sheng et al., 2025; Zhao et al., 2023; Kwon et al., 2023). For each input, the student model samples an on-policy response. The frozen teacher model subsequently scores the same response tokens twice within light- and heavy-thinking instructions. The token-level contrastive advantage is computed as the log-likelihood difference between the two teacher scores, formulated as $\ell_t^{LT} - \ell_t^{HT}$, and serves as the decoupled policy gradient signal. In implementation, this contrastive advantage is clipped to the range $[-10, 10]$ to ensure stability. We do not utilize any additional tasks, formatting requirements, accuracy rewards, KL rewards, or explicit length penalties. During training, the batch size is set to 192, and the PPO mini-batch size is set to 48. The maximum prompt and response lengths are set to 4096 and 8192, respectively. We optimize the student model using AdamW (Loshchilov & Hutter, 2017) with a learning rate of 1×10^{-6} , a weight decay of 1×10^{-2} , and a maximum gradient norm of 1.0 for clipping. The model is trained for a total of 3 epochs.

3.1.3 EVALUATION BENCHMARKS

We conduct extensive experiments on nine multimodal benchmarks, comprising four reasoning benchmarks (i.e., MathVista, MathVerse, WeMath, and LogicVista) and five understanding benchmarks (i.e., HalluBench, MMMU, MMStar, RWQA, and MMGist) (Lu et al., 2024; Zhang et al., 2024; Qiao et al., 2025; Xiao et al., 2024; Guan et al., 2024; Yue et al., 2024; Chen et al., 2024a; xAI, 2024; Yuan et al., 2026)². We report three metrics: accuracy, average response length, and Acc@1K, where Acc@1K quantifies the intelligence of a model per unit of output length, defined as follows:

$$\text{Acc@1K} = \frac{\frac{1}{|B|} \sum_b \text{Acc}_b}{\frac{1}{|B|} \sum_b \text{Tokens}_b / 1000} = \frac{\sum_b \text{Acc}_b}{\sum_b \text{Tokens}_b / 1000}. \quad (6)$$

3.2 MAIN RESULTS

Accuracy–length frontier. Table 1 shows that COPD improves the accuracy–length frontier rather than scores through longer reasoning traces. Across all four teacher–student settings, it achieves the

¹ViRL-39K provides the Pass Rate estimated using Qwen2.5-VL-32B (Bai et al., 2025b). We retain only samples with a Pass Rate strictly between 0 and 1 for training.

²Detailed descriptions of the benchmarks and evaluation configurations are provided in the appendix.

Table 1: **Main results of COPD.** Each benchmark cell reports Accuracy / Average Tokens; AVG reports Accuracy / Average Tokens / Acc@1K.

Method	Reasoning				Understanding					AVG
	MathVista	MathVerse	WeMath	LogicVista	HalluBench	MMMU	MMStar	RWQA	MMGist	
Q3VL-2B	62.4/1.26K	47.6/2.12K	58.0/3.49K	38.8/4.38K	68.2/0.50K	46.3/3.09K	58.5/1.17K	67.7/0.13K	28.3/2.75K	52.9/2.10K/25.2
Qwen3-VL-8B→Qwen3-VL-2B										
OPD	61.1/1.28K	49.9/2.56K	59.7/3.77K	40.8/4.50K	69.6/0.59K	47.9/3.11K	58.7/1.29K	66.9/0.24K	28.2/2.85K	53.6/2.24K/23.9
ExOPD	66.2/1.28K	53.0/2.94K	63.2/3.05K	41.1/3.60K	70.7/0.49K	48.3/2.92K	60.1/1.25K	66.3/0.29K	27.8/2.80K	55.2/2.07K/26.7
VA-OPD	61.4/1.33K	48.6/2.47K	60.3/3.62K	41.3/4.18K	70.7/0.58K	47.7/3.06K	58.3/1.27K	65.9/0.20K	27.6/2.82K	53.5/2.17K/24.7
COPD	62.5/0.43K	53.1/0.73K	69.3/1.37K	50.2/1.79K	68.9/0.15K	52.7/1.65K	60.4/0.46K	66.8/0.03K	31.5/1.42K	57.3/0.89K/64.4
Qwen3-VL-32B→Qwen3-VL-2B										
OPD	63.4/1.31K	50.8/2.90K	61.8/3.82K	42.2/4.27K	72.3/0.66K	46.3/3.06K	60.4/1.28K	68.9/0.25K	29.0/2.92K	55.0/2.28K/24.1
ExOPD	67.2/1.17K	53.8/2.65K	67.0/2.86K	45.5/3.65K	66.8/0.36K	50.5/2.68K	63.5/1.01K	68.4/0.29K	29.8/2.57K	56.9/1.92K/29.6
VA-OPD	63.0/1.35K	49.9/2.86K	62.6/3.57K	43.5/4.13K	70.5/0.59K	47.4/2.96K	61.0/1.22K	70.1/0.28K	28.7/2.87K	55.2/2.20K/25.1
COPD	62.2/0.41K	54.4/0.72K	71.3/1.17K	49.6/1.53K	67.4/0.15K	52.3/1.44K	60.3/0.42K	64.8/0.03K	31.4/1.23K	57.1/0.79K/72.3
Q3S-2B	68.7/2.29K	55.5/3.90K	59.9/4.24K	43.8/4.27K	70.2/1.01K	49.0/3.50K	63.0/1.89K	67.7/1.05K	30.0/3.49K	56.4/2.85K/28.8
Qwen3.5-4B→Qwen3.5-2B										
OPD	69.4/2.93K	58.1/4.52K	61.0/5.12K	39.3/5.69K	70.8/1.79K	50.9/4.28K	62.1/2.50K	67.6/1.76K	29.3/4.45K	56.5/3.67K/19.6
ExOPD	70.1/3.06K	59.1/4.57K	62.4/5.18K	42.4/5.54K	71.6/1.74K	50.3/4.25K	63.6/2.44K	69.5/1.67K	29.0/4.47K	57.6/3.66K/20.3
VA-OPD	68.5/3.04K	56.5/4.64K	61.0/5.23K	40.4/5.44K	69.6/1.81K	49.7/4.33K	62.7/2.53K	69.0/1.69K	28.3/4.45K	56.2/3.68K/19.5
COPD	71.0/1.48K	60.6/2.39K	69.8/2.68K	48.9/2.97K	72.1/0.62K	53.0/2.64K	65.1/1.27K	68.5/0.67K	31.6/2.57K	60.1/1.92K/46.4
Qwen3.5-35A3B→Qwen3.5-2B										
OPD	70.0/3.11K	58.9/4.58K	63.5/5.17K	40.2/5.73K	71.1/1.92K	49.5/4.44K	61.9/2.67K	65.0/1.96K	28.3/4.66K	56.5/3.80K/18.4
ExOPD	69.9/3.19K	59.3/4.61K	64.4/5.21K	39.7/5.57K	70.2/1.85K	50.7/4.31K	63.3/2.65K	66.4/1.94K	28.4/4.58K	56.9/3.77K/18.7
VA-OPD	70.1/3.24K	57.6/4.60K	63.1/5.21K	41.3/5.42K	71.0/1.81K	49.3/4.39K	62.2/2.64K	67.5/1.89K	28.3/4.59K	56.7/3.69K/18.9
COPD	69.9/1.62K	60.1/2.55K	67.1/2.88K	48.7/3.28K	71.3/0.60K	51.4/2.82K	64.9/1.37K	69.0/0.70K	31.6/2.71K	59.3/2.06K/44.3

Table 2: **Generalization across model scales.** COPD is evaluated with Qwen3.5 students and teachers of different scales. Each entry reports Accuracy / Average Tokens / Acc@1K; AVG is the benchmark-level average.

Method	Reasoning	Understanding	AVG
Qwen3.5-4B	72.0/2.90K/24.8	64.8/1.84K/35.2	68.0/2.31K/29.4
Qwen3.5-4B $\xleftarrow{\text{COPD}}$ Qwen3.5-35A3B	74.1/1.50K/49.6	64.6/1.23K/52.6	68.8/1.35K/51.0
Qwen3.5-9B	76.0/2.72K/27.9	67.9/1.85K/36.8	71.5/2.23K/32.1
Qwen3.5-9B $\xleftarrow{\text{COPD}}$ Qwen3.5-35A3B	76.5/1.54K/49.5	68.3/1.29K/52.8	71.9/1.41K/51.0
Qwen3.5-9B $\xleftarrow{\text{COPD}}$ Qwen3.5-122A10B	78.3/2.00K/39.3	68.2/1.56K/43.8	72.7/1.75K/41.5

highest average accuracy with the shortest responses. For Qwen3-VL-8B→2B, relative to ExOPD, COPD improves accuracy by 2.1 pp while reducing response length by 57.0%, increasing Acc@1K by 141.2%. The same relation holds across the remaining model and teacher configurations, where COPD consistently more than doubles Acc@1K relative to ExOPD. These results indicate that the LT-HT contrast shifts the student toward a more efficient reasoning regime rather than trading additional generation cost for accuracy.

Compression is broad, but not uniform across tasks. Relative to the Base model, COPD shortens responses across all nine benchmarks while improving accuracy on eight. The largest gains are on WeMath (+11.3 pp accuracy with 60.7% fewer tokens) and LogicVista (+11.4 pp accuracy with 59.1% fewer tokens), showing that substantial compression need not remove useful reasoning from tasks with long initial traces. In contrast, RWQA loses 0.9 pp accuracy when its already short outputs shrink by 76.9%. This pattern suggests that the contrastive advantage induces larger length reductions on tasks permitting lengthy deliberation, while revealing a boundary: aggressive compression leaves limited margin on tasks with minimal initial responses.

The gain does not follow simple teacher scaling. Scaling the Qwen3-VL teacher from 8B to 32B reduces average accuracy by 0.2 pp, shortens responses by 11.2%, and increases Acc@1K by 12.3%. Scaling Qwen3.5 from 4B to 35A3B instead reduces accuracy by 0.8 pp, lengthens responses by 7.3%, and decreases Acc@1K by 4.5%. Thus, a larger teacher shifts the operating point without reliably improving it. This non-monotonicity is consistent with recent OPD analysis: successful distillation requires compatible teacher-student thinking patterns and teacher knowledge genuinely new to the student; a larger or higher-scoring teacher alone need not provide an effective token-level learning signal (Li et al., 2026b). Nevertheless, COPD achieves the highest Acc@1K and shortest

Table 3: **Generalization across training data.** Geo3K (3 epochs) follows the three-epoch training schedule used in the main experiments, whereas Geo3K (24 epochs) matches the total number of training iterations of ViRL-16K (3 epochs).

Method	Reasoning	Understanding	AVG
Qwen3-VL-2B	51.7/2.81K/18.4	53.8/1.53K/35.2	52.9/2.10K/25.2
Geo3K (3 epochs)	54.4/2.11K/25.8	54.4/1.25K/43.5	54.4/1.63K/33.4
Geo3K (24 epochs)	57.7/1.24K/46.4	55.3/0.84K/65.9	56.4/1.02K/55.4
ViRL-16K (3 epochs)	58.8/1.08K/54.4	56.1/0.74K/75.6	57.3/0.89K/64.4

average response in all four teacher–student settings, suggesting that the recurring benefit principally stems from the LT–HT relative preference extracted from each teacher, rather than teacher scale alone.

3.3 ABLATION STUDIES

In this section, we conduct comprehensive ablation studies across multiple dimensions. Unless otherwise specified, all experiments use the same training configuration as the main experiments.

3.3.1 GENERALIZATION ON SCALES

Table 2 isolates student- and teacher-scale effects. With the 35A3B teacher fixed, COPD retains its compression benefit as the student grows from 4B to 9B, reducing average response length by 41.6% and 36.8%, respectively, while preserving small accuracy gains and increasing Acc@1K by more than 58% in both cases. Thus, the contrastive signal generalizes across student sizes. In contrast, with the 9B student fixed, replacing the 35A3B teacher with the 122A10B teacher yields a further 0.8 pp accuracy gain but lengthens responses by 24.1% and lowers Acc@1K by 18.6%. This shows that teacher scaling chiefly shifts the accuracy–efficiency operating point, whereas COPD’s output-efficiency benefit persists across the tested student scales.

3.3.2 GENERALIZATION ON TRAINING DATA

Table 3 reports two Geo3K³ (Lu et al., 2021) settings designed to evaluate data generalization under matched epoch and optimization-iteration budgets, respectively. Geo3K (3 epochs) follows the same three-epoch training schedule as the main experiments. Although it contains only one-eighth of the training data in ViRL-16K, it improves average accuracy over the Base model by 1.5 pp, reduces response length by 22.4%, and increases Acc@1K by 32.5%, indicating that the improvements are not specific to ViRL-16K. To control for the number of optimization iterations, we train Geo3K for 24 epochs, such that Geo3K (24 epochs) and ViRL-16K (3 epochs) use the same total number of iterations. This setting further increases average accuracy to 56.4% and reduces response length to 1.02K. However, under the same iteration budget, ViRL-16K (3 epochs) achieves 0.9 pp higher accuracy, 12.7% shorter responses, and 16.2% higher Acc@1K. These results demonstrate that repeated training on a smaller dataset substantially improves the accuracy–efficiency trade-off, while broader training-data coverage yields additional gains under the same optimization budget.

3.3.3 GENERALIZATION ON VARIOUS PROMPTS

Our method is robust to superficial variations in prompt wording, as demonstrated by the consistent results reported in Table 4. Although the Simple, Complex, and default templates use different wording, they achieve similar average accuracies (56.0–57.3%), average response lengths (0.82–0.92K), and Acc@1K values (61.7–68.3%). All three variants consistently outperform the Base model in both accuracy and output efficiency. Because these variants retain the same LT–HT contrastive advantage and differ only in the prompt template, their consistent performance indicates that the improvements primarily result from the contrastive construction rather than any particular prompt wording.

³The training split of Geo3K contains only 2K samples.

Table 4: **Robustness across different LT-HT prompt templates.** The Simple, Complex, and default templates construct different light-thinking and heavy-thinking contexts while sharing the same contrastive objective.

Method	Reasoning	Understanding	AVG
Qwen3-VL-2B	51.7/2.81K/18.4	53.8/1.53K/35.2	52.9/2.10K/25.2
Simple	58.2/1.12K/52.0	55.7/0.76K/73.3	56.8/0.92K/61.7
Complex	57.6/0.97K/59.2	54.8/0.70K/78.1	56.0/0.82K/68.3
COPD (Ours)	58.8/1.08K/54.4	56.1/0.74K/75.6	57.3/0.89K/64.4

Table 5: **Contrastive on-policy self-distillation.** COPSD uses a frozen copy of the initial student model as the paired LT-HT scorer, eliminating the need for an external teacher.

Method	Reasoning	Understanding	AVG
Qwen3-VL-2B	51.7/2.81K/18.4	53.8/1.53K/35.2	52.9/2.10K/25.2
+COPSD	57.9/0.91K/63.6	55.2/0.65K/84.9	56.4/0.76K/74.2
Qwen3-VL-4B	69.4/1.57K/44.2	62.8/1.03K/61.0	65.7/1.27K/51.7
+COPSD	68.7/0.65K/105.7	63.5/0.52K/122.1	65.8/0.58K/113.4
Qwen3-VL-8B	70.4/1.42K/49.6	64.2/0.93K/69.0	66.9/1.14K/58.7
+COPSD	70.8/0.57K/124.2	64.6/0.48K/134.6	67.3/0.52K/129.4
Qwen3.5-122A10B	84.1/3.79K/22.2	74.9/3.10K/24.1	79.0/3.41K/23.2
+COPSD	86.1/3.13K/27.5	76.4/2.55K/29.9	80.7/2.81K/28.7

3.3.4 CONTRASTIVE ON-POLICY SELF-DISTILLATION

An external teacher with a larger scale can be beneficial but is not required for learning efficient reasoning. The results across four model scales in Table 5 show that a frozen student snapshot is sufficient to provide the required contrastive signal. For the 2B model, COPSD improves average accuracy by 3.5 pp while reducing response length by 63.8%, resulting in a 194.4% increase in Acc@1K. The same trend is observed for the 4B, 8B, and 122A10B models: average accuracy is maintained or improved, response length is reduced by 17.6–54.4%, and Acc@1K increases by 23.7–120.4%. These results indicate that effective compression does not depend solely on the scale of the teacher. Instead, the relative preference of the model between light and heavy reasoning contexts already provides informative supervision for generating more efficient responses.

This seemingly counterintuitive improvement, achieved without additional knowledge, can be explained by more effective policy selection rather than knowledge acquisition. Prior work has shown that concise and correct reasoning paths already exist within the output distribution of a model (Munkhbat et al., 2025). Moreover, reasoning accuracy does not increase monotonically with chain-of-thought length and may decline when excessive reasoning introduces additional noise (Wu et al., 2025). Fine-grained analyses further indicate that long reasoning traces often contain redundant repetition, excessive self-verification, and unnecessary exploration after the correct answer has been obtained (Yi et al., 2026). From this perspective, COPSD improves both accuracy and efficiency by reallocating probability mass from lengthy, failure-prone continuations to concise and correct reasoning paths already supported by the model, rather than by introducing new task knowledge.

3.3.5 CAN A SINGLE LIGHT TEACHER FOSTER LIGHT-THINKING IN STUDENTS?

The critical factor is the comparison between preferences under light- and heavy-thinking contexts, rather than the light-thinking score alone. The ablation results in Table 6 clearly demonstrate this distinction: the single-score objective produces longer outputs, whereas the contrastive objective improves both accuracy and efficiency. Specifically, using $A_t = \ell_t^{\text{LT}}$ yields only a marginal increase in average accuracy, from 52.9% to 53.1%, while increasing the average output length from 2.10K to 2.26K. This result suggests that likelihood under the light-thinking context alone assigns high scores to a broad range of plausible tokens, including those that lead to redundant reasoning, and thus provides no explicit criterion for determining which reasoning steps should be removed. In

Table 6: **Ablation of the contrastive teacher signal.** Using only the light-thinking likelihood does not yield output-efficient reasoning, whereas the light-minus-heavy contrast improves accuracy while reducing response length.

Method	Reasoning	Understanding	AVG
Qwen3-VL-2B	51.7/2.81K/18.4	53.8/1.53K/35.2	52.9/2.10K/25.2
$A_t = \ell_t^{\text{LT}}$	51.8/3.06K/16.9	54.3/1.61K/33.7	53.1/2.26K/23.5
$A_t = \ell_t^{\text{LT}} - \ell_t^{\text{HT}}$	58.8/1.08K/54.4	56.1/0.74K/75.6	57.3/0.89K/64.4

Table 7: **Training efficiency under the Qwen3-VL-8B→2B setting.** GPU hours denote the aggregate training time across all GPUs.

Method	GPU Hours	AVG
Base	—	52.9/2.10K/25.2
OPD	132	53.6/2.24K/23.9
ExOPD	150	55.2/2.07K/26.7
COPD	60	57.3/0.89K/64.4

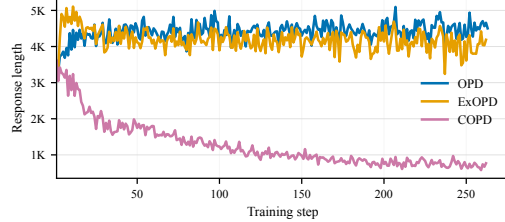


Figure 3: **Response length over training.** COPD progressively shortens rollout responses, whereas OPD and ExOPD remain at high response lengths.


contrast, $A_t = \ell_t^{\text{LT}} - \ell_t^{\text{HT}}$ evaluates the same token under both light- and heavy-thinking contexts, thereby transforming the teacher scores into a directional signal that favors lightweight reasoning. This contrastive objective increases the average accuracy to 57.3% while reducing the average output length by 57.6%. These results demonstrate that the heavy-thinking score serves as an essential reference, allowing the contrastive signal to selectively suppress subsequent redundant generation rather than merely imitate the distribution induced by the light-thinking context.

3.4 TRAINING EFFICIENCY

Table 7 and Figure 3 demonstrate that COPD improves both training and output efficiency. COPD requires only 60 GPU hours, reducing the total training cost by 54.5% relative to OPD (132 hours) and by 60.0% relative to ExOPD (150 hours). At the same time, it achieves the highest average accuracy of 57.3 and the shortest average response length of 0.89K tokens. The training trajectories further indicate that COPD consistently reduces the response length to fewer than 1K tokens, whereas the response lengths of OPD and ExOPD remain substantially higher and largely unchanged. Notably, this reduction is achieved without an explicit length penalty, supporting the interpretation that the LT-HT contrast directly suppresses redundant continuations. Therefore, the improvement in efficiency does not come at the expense of task performance.

3.5 CASE STUDY

As illustrated in Figure 4, the Base model generates an incorrect answer in the geometric reasoning example due to extensive redundant checks and a failure to capture key structures. In contrast, our method produces a more structured output characterized by concise reasoning and correct results. The output length of our method (1,626 tokens) is only 44.2% of that of the Base model (3,680 tokens). This demonstrates that our approach does not rely on extending the reasoning length; instead, it achieves more efficient reasoning within a shorter output sequence by reducing ineffective steps and redundant self-verification, thereby enhancing the comprehension of geometric structures and semantics.



Question: As shown in the figure, triangle ABC congruent triangle ADE, Point A is their common vertex. if angle B = 70.0, angle C = 30.0, angle DAC = 35.0, then the degree of angle EAC is ()
 Choices:
 A:40° B:45°
 C:35° D:25°

Qwen3.5-2B [3,680 tokens]

The user wants me to find the measure of angle EAC based on the provided image and text. 1. Analyze the given information: $\triangle ABC \cong \triangle ADE$... Specifically, $\angle B = \angle DAE$... Given $\angle B = 70^\circ$, $\angle C = 30^\circ$, $\angle DAC = 35^\circ$ Step 1: $\angle DAE = \angle B = 70^\circ$. Step 2: Looking at the diagram, $\angle DAE = \angle DAC + \angle EAC$. Step 3: $70^\circ = 35^\circ + \angle EAC$. Therefore, the degree of angle EAC is 35° . Answer: The correct option is C.

Qwen3.5-2B + COPD [1,626 tokens]

The user wants me to find the measure of angle EAC based on the given information about two congruent triangles. 1. Analyze the given information: $\triangle ABC \cong \triangle ADE$... $\angle B = 70^\circ$, $\angle C = 30^\circ$, $\angle DAC = 35^\circ$. 2. Determine missing angles in $\triangle ABC$: $\angle BAC = 180^\circ - 70^\circ - 30^\circ = 80^\circ$ 4. Use the congruence property: Since $\triangle ABC \cong \triangle ADE$, then $\angle DAE = \angle BAC = 80^\circ$. 5. Calculate $\angle EAC$: $\angle EAC = \angle DAE - \angle DAC = 80^\circ - 35^\circ = 45^\circ$. Answer: B

Figure 4: Case study on MathVerse. Compared with the Base model, our method produces a shorter and more effective reasoning process, reduces redundant intermediate steps, and correctly identifies the key geometric relationships required for solving the problem.

4 RELATED WORK

Multimodal large language models. Multimodal large language models integrate visual encoders with language models, enabling a unified model to reason over images, text, and instructions (Alayrac et al., 2022; Li et al., 2023; Liu et al., 2023; 2024; Chen et al., 2024b; Bai et al., 2023; Wang et al., 2024b; Bai et al., 2025b;a; Caffagni et al., 2024; Jin et al., 2025a). Recent benchmarks have expanded evaluation beyond generic visual question answering to visual mathematics, diagram reasoning, hallucination detection, expert knowledge, and complex multimodal understanding. Representative benchmarks include MathVista, WeMath, MathVerse, LogicVista, HallusionBench, MMMU, MMStar, and MATH-Vision (Lu et al., 2024; Qiao et al., 2025; Zhang et al., 2024; Xiao et al., 2024; Guan et al., 2024; Yue et al., 2024; Chen et al., 2024a; Wang et al., 2024a). Although these tasks often benefit from explicit intermediate reasoning, generated responses may also contain visual restatements, symbolic scratch work, formatting content, and redundant deliberation. COPD addresses this output-efficiency problem: for a fixed visual input and a prefix visited by the student, how can training favor concise and useful reasoning over exhaustive continuations while preserving the on-policy supervision provided by OPD?

On-policy distillation. Knowledge distillation transfers the behavior of a stronger model to a student using fixed datasets, teacher-generated trajectories, teacher output distributions, privileged signals, or reward-regularized self-distillation objectives (Hinton et al., 2015; Gou et al., 2021; Sanh et al., 2019; Jiao et al., 2020; Sun et al., 2019; Kim & Rush, 2016; Gu et al., 2024; Hsieh et al., 2023; Penaloza et al., 2026; Yu et al., 2026). OPD mitigates the exposure mismatch inherent in offline distillation by sampling responses from the student and using the teacher to score prefixes encountered by the student during generation (Agarwal et al., 2024). Recent variants, including G-OPD/ExOPD, Uni-OPD, VA-OPD, truncation-based updates, entropy-aware forward-KL augmentation, control variates, and best-of- N selection, improve reward scaling, reference selection, student exploration, teacher reliability, or visual-dependency supervision (Yang et al., 2026; Hou et al., 2026; Song & Zheng, 2026; Liu et al., 2026; Zhang et al., 2026b; Jin et al., 2026; Oh et al., 2026; Zhang et al., 2026a; Fu et al., 2026). In contrast, COPD changes the axis of supervision: the same frozen teacher scores each token at the same student state under light-thinking and heavy-thinking contexts, producing a state-matched contrast between compact and exhaustive reasoning.

Reasoning compression and preference learning. A growing body of work seeks to reduce the cost of explicit reasoning while preserving task accuracy (Sang et al., 2026; Zhao et al., 2026; Nayab et al., 2024; Han et al., 2025; Munkhbat et al., 2025; Li et al., 2026c). Reinforcement learning and preference learning methods penalize overly long outputs, learn from human or model preferences, or optimize the trade-off between task reward and computational cost (Liu et al., 2025; Li et al., 2026a; Jin et al., 2025b; Dumitru et al., 2025). In contrast, supervised methods train models using shorter rationales, selected concise reasoning traces, or mathematical solutions filtered by verifiers (Munkhbat et al., 2025; Yuan et al., 2023). Although effective, these approaches impose compression signals through external objectives, curated target distributions, or outcome-level rewards. By contrast, COPD derives token-level compression preferences from paired teacher likelihoods evaluated at student-generated states.

5 CONCLUSION

Reasoning compression is commonly achieved through short demonstrations or explicit penalties on response length. Although these mechanisms can shorten model outputs, they do not address a fundamental ambiguity in on-policy distillation: under a single context, the likelihood assigned by a teacher indicates whether a token is plausible, but not whether it contributes to a concise solution or merely prolongs an otherwise valid response. Our ablation study shows that the light-thinking likelihood alone still favors longer responses, whereas introducing the heavy-thinking likelihood as a reference yields substantially shorter responses.

COPD resolves this ambiguity by comparing teacher scores rather than directly imitating them. For each token generated by the student, the same frozen teacher evaluates the compatibility of the token under light-thinking and heavy-thinking contexts, and the resulting difference provides a local preference signal for efficient reasoning. This simple modification preserves the online supervision of OPD while eliminating the need for target output lengths or auxiliary length rewards. The consistent accuracy–efficiency improvements across nine multimodal benchmarks, four teacher–student configurations, and a self-distillation variant demonstrate that compact reasoning can be learned from relative preferences between reasoning modes. More broadly, efficient distillation does not need to enforce shorter outputs explicitly; instead, it can rely on supervision that distinguishes useful reasoning progress from redundant continuation.

An important direction for future work is to generalize COPD from contrasting reasoning modes to contrasting broader behavioral modes. Because its supervision is derived from the relative compatibility of the same candidate token under paired contexts while holding the input and generated prefix fixed, the framework could in principle be adapted by replacing the light/heavy-thinking pair with attribute-specific conditions. Potential applications include safety alignment through safety-compliant versus unconstrained behavioral contexts, textual-style control through desired versus alternative style contexts, and grounded generation through evidence-supported versus speculative response contexts. Our experiments validate only reasoning efficiency; whether such token-level contrasts transfer reliably to these attributes, and how multiple preferences interact, remains an open question. Future work will investigate these settings and multi-objective contrasts that balance helpfulness, safety, style, and factual grounding.

REFERENCES

- Rishabh Agarwal, Nino Vieillard, Yongchao Zhou, Piotr Stanczyk, Sabela Ramos Garea, Matthieu Geist, and Olivier Bachem. On-policy distillation of language models: Learning from self-generated mistakes. In *International Conference on Learning Representations*, volume 2024, pp. 21246–21263, 2024.
- Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, et al. Flamingo: a visual language model for few-shot learning. *Advances in neural information processing systems*, 35:23716–23736, 2022.
- Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen-vl: A versatile vision-language model for understanding, localization, text reading, and beyond, 2023. URL <https://arxiv.org/abs/2308.12966>.
- Shuai Bai, Yuxuan Cai, Ruizhe Chen, Keqin Chen, Xionghui Chen, Zesen Cheng, Lianghao Deng, Wei Ding, Chang Gao, Chunjiang Ge, et al. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*, 2025a.
- Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibao Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, Humen Zhong, Yuanzhi Zhu, Mingkun Yang, Zhaozhai Li, Jianqiang Wan, Pengfei Wang, Wei Ding, Zheren Fu, Yiheng Xu, Jiabo Ye, Xi Zhang, Tianbao Xie, Zesen Cheng, Hang Zhang, Zhibo Yang, Haiyang Xu, and Junyang Lin. Qwen2.5-vl technical report, 2025b. URL <https://arxiv.org/abs/2502.13923>.
- Davide Caffagni, Federico Cocchi, Luca Barsellotti, Nicholas Moratelli, Sara Sarto, Lorenzo Baraldi, Marcella Cornia, and Rita Cucchiara. The revolution of multimodal large language

- models: A survey. *Findings of the association for computational linguistics: ACL 2024*, pp. 13590–13618, 2024.
- Lin Chen, Jinsong Li, Xiaoyi Dong, Pan Zhang, Yuhang Zang, Zehui Chen, Haodong Duan, Jiaqi Wang, Yu Qiao, Dahua Lin, et al. Are we on the right way for evaluating large vision-language models? *Advances in Neural Information Processing Systems*, 37:27056–27087, 2024a.
- Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, et al. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 24185–24198, 2024b.
- Razvan-Gabriel Dumitru, Darius Peteleaza, Vikas Yadav, and Liangming Pan. Conciserl: Conciseness-guided reinforcement learning for efficient reasoning models. *arXiv preprint arXiv:2505.17250*, 4, 2025.
- Yuqian Fu, Haohuan Huang, Kaiwen Jiang, Jiakai Liu, Zhuo Jiang, Yuanheng Zhu, and Dongbin Zhao. Revisiting on-policy distillation: Empirical failure modes and simple fixes. *arXiv preprint arXiv:2603.25562*, 2026.
- Jianping Gou, Baosheng Yu, Stephen J Maybank, and Dacheng Tao. Knowledge distillation: A survey. *International journal of computer vision*, 129(6):1789–1819, 2021.
- Yuxian Gu, Li Dong, Furu Wei, and Minlie Huang. Minillm: Knowledge distillation of large language models. In *International Conference on Learning Representations*, volume 2024, pp. 32694–32717, 2024.
- Tianrui Guan, Fuxiao Liu, Xiyang Wu, Ruiqi Xian, Zongxia Li, Xiaoyu Liu, Xijun Wang, Lichang Chen, Furong Huang, Yaser Yacoob, et al. Hallusionbench: an advanced diagnostic suite for entangled language hallucination and visual illusion in large vision-language models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 14375–14385, 2024.
- Tingxu Han, Zhenting Wang, Chunrong Fang, Shiyu Zhao, Shiqing Ma, and Zhenyu Chen. Token-budget-aware llm reasoning. In *Findings of the Association for Computational Linguistics: ACL 2025*, pp. 24842–24855, 2025.
- Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. Distilling the knowledge in a neural network. *arXiv preprint arXiv:1503.02531*, 2015.
- Wenjin Hou, Shangpin Peng, Weinong Wang, Zheng Ruan, Yue Zhang, Zhenglin Zhou, Mingqi Gao, Yifei Chen, Kaiqi Wang, Hongming Yang, et al. Uni-opd: Unifying on-policy distillation with a dual-perspective recipe. *arXiv preprint arXiv:2605.03677*, 2026.
- Cheng-Yu Hsieh, Chun-Liang Li, Chih-Kuan Yeh, Hootan Nakhost, Yasuhisa Fujii, Alex Ratner, Ranjay Krishna, Chen-Yu Lee, and Tomas Pfister. Distilling step-by-step! outperforming larger language models with less training data and smaller model sizes. In *Findings of the Association for Computational Linguistics: ACL 2023*, pp. 8003–8017, 2023.
- Jie Huang and Kevin Chen-Chuan Chang. Towards reasoning in large language models: A survey. In *Findings of the association for computational linguistics: ACL 2023*, pp. 1049–1065, 2023.
- Xiaoqi Jiao, Yichun Yin, Lifeng Shang, Xin Jiang, Xiao Chen, Linlin Li, Fang Wang, and Qun Liu. Tinybert: Distilling bert for natural language understanding. In *Findings of the association for computational linguistics: EMNLP 2020*, pp. 4163–4174, 2020.
- Woogyeol Jin, Taywon Min, Yongjin Yang, Swanand Ravindra Kadhe, Yi Zhou, Dennis Wei, Nathalie Baracaldo, and Kimin Lee. Entropy-aware on-policy distillation of language models. *arXiv preprint arXiv:2603.07079*, 2026.
- Yizhang Jin, Jian Li, Tianjun Gu, Yexin Liu, Bo Zhao, Jinxiang Lai, Zhenye Gan, Yabiao Wang, Chengjie Wang, Xin Tan, et al. Efficient multimodal large language models: A survey. *Visual Intelligence*, 3(1):27, 2025a.

- Zhensheng Jin, Xinze Li, Yifan Ji, Chunyi Peng, Zhenghao Liu, Qi Shi, Yukun Yan, Shuo Wang, Furong Peng, and Ge Yu. Recut: Balancing reasoning length and accuracy in llms via stepwise trails and preference optimization. *arXiv preprint arXiv:2506.10822*, 2025b.
- Yoon Kim and Alexander M Rush. Sequence-level knowledge distillation. In *Proceedings of the 2016 conference on empirical methods in natural language processing*, pp. 1317–1327, 2016.
- Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. Large language models are zero-shot reasoners. *Advances in neural information processing systems*, 35:22199–22213, 2022.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with pagedattention. In *Proceedings of the 29th symposium on operating systems principles*, pp. 611–626, 2023.
- Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *International conference on machine learning*, pp. 19730–19742. PMLR, 2023.
- Yanhao Li, Lu Ma, Jiaran Zhang, Lexiang Tang, Wentao Zhang, and Guibo Luo. Leash: Adaptive length penalty and reward shaping for efficient large reasoning model. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 2846–2856, 2026a.
- Yaxuan Li, Yuxin Zuo, Bingxiang He, Jinqian Zhang, Chaojun Xiao, Cheng Qian, Tianyu Yu, Huanang Gao, Wenkai Yang, Zhiyuan Liu, et al. Rethinking on-policy distillation of large language models: Phenomenology, mechanism, and recipe. *arXiv preprint arXiv:2604.13016*, 2026b.
- Zheng Li, Qingxiu Dong, Jingyuan Ma, Di Zhang, Kai Jia, and Zhifang Sui. Selfbudgeter: Adaptive token allocation for efficient llm reasoning. In *Findings of the Association for Computational Linguistics: ACL 2026*, pp. 21135–21156, 2026c.
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances in neural information processing systems*, 36:34892–34916, 2023.
- Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 26296–26306, 2024.
- Ruiqi Liu, Xiaolei Lv, Gengsheng Li, Ximo Zhu, Zhiheng Wang, Zhengbo Zhang, Junkai Chen, Zhiheng Li, Bo Li, Jun Gao, et al. Visual-advantage on-policy distillation for vision-language models. *arXiv preprint arXiv:2605.21924*, 2026.
- Shih-Yang Liu, Xin Dong, Ximing Lu, Shizhe Diao, Mingjie Liu, Min-Hung Chen, Hongxu Yin, Yu-Chiang Frank Wang, Kwang-Ting Cheng, Yejin Choi, et al. Dler: Doing length penalty right-incentivizing more intelligence per token via reinforcement learning. *arXiv preprint arXiv:2510.15110*, 2025.
- Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*, 2017.
- Pan Lu, Ran Gong, Shibiao Jiang, Liang Qiu, Siyuan Huang, Xiaodan Liang, and Song-Chun Zhu. Inter-gps: Interpretable geometry problem solving with formal language and symbolic reasoning. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pp. 6774–6786, 2021.
- Pan Lu, Hritik Bansal, Tony Xia, Jiacheng Liu, Chunyuan Li, Hannaneh Hajishirzi, Hao Cheng, Kai-Wei Chang, Michel Galley, and Jianfeng Gao. Mathvista: Evaluating mathematical reasoning of foundation models in visual contexts. In *International Conference on Learning Representations*, volume 2024, pp. 23439–23554, 2024.

- Tergel Munkhbat, Namgyu Ho, Seo Hyun Kim, Yongjin Yang, Yujin Kim, and Se-Young Yun. Self-training elicits concise reasoning in large language models. In *Findings of the Association for Computational Linguistics: ACL 2025*, pp. 25127–25152, 2025.
- Sania Nayab, Giulio Rossolini, Marco Simoni, Andrea Saracino, Giorgio Buttazzo, Nicolamaria Manes, and Fabrizio Giacomelli. Concise thoughts: Impact of output length on llm reasoning and cost. *arXiv preprint arXiv:2407.19825*, 2024.
- Minjae Oh, Sangjun Song, Gyubin Choi, Yunho Choi, and Yohan Jo. Kl for a kl: On-policy distillation with control variate baseline. *arXiv preprint arXiv:2605.07865*, 2026.
- Emiliano Penaloza, Dheeraj Vattikonda, Nicolas Gontier, Alexandre Lacoste, Laurent Charlin, and Massimo Caccia. Privileged information distillation for language models. *arXiv preprint arXiv:2602.04942*, 2026.
- Runqi Qiao, Qiuna Tan, Guanting Dong, MinhuiWu MinhuiWu, Chong Sun, Xiaoshuai Song, Jiapeng Wang, Zhuoma Gongque, Shanglin Lei, Yifan Zhang, et al. We-math: Does your large multimodal model achieve human-like mathematical reasoning? In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 20023–20070, 2025.
- Hejian Sang, Yuanda Xu, Zhengze Zhou, Ran He, Zhipeng Wang, and Jiachen Sun. Crisp: Compressed reasoning via iterative self-policy distillation. *arXiv preprint arXiv:2603.05433*, 2026.
- Victor Sanh, Lysandre Debut, Julien Chaumond, and Thomas Wolf. Distilbert, a distilled version of bert: smaller, faster, cheaper and lighter. *arXiv preprint arXiv:1910.01108*, 2019.
- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, YK Li, Yang Wu, et al. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
- Guangming Sheng, Chi Zhang, Zilingfeng Ye, Xibin Wu, Wang Zhang, Ru Zhang, Yanghua Peng, Haibin Lin, and Chuan Wu. Hybridflow: A flexible and efficient rlhf framework. In *Proceedings of the Twentieth European Conference on Computer Systems*, pp. 1279–1297, 2025.
- Mingyang Song and Mao Zheng. A survey of on-policy distillation for large language models. *arXiv preprint arXiv:2604.00626*, 2026.
- Siqi Sun, Yu Cheng, Zhe Gan, and Jingjing Liu. Patient knowledge distillation for bert model compression. In *Proceedings of the 2019 conference on empirical methods in natural language processing and the 9th international joint conference on natural language processing (EMNLP-IJCNLP)*, pp. 4323–4332, 2019.
- Qwen Team. Qwen3.5: Accelerating productivity with native multimodal agents, February 2026. URL <https://qwen.ai/blog?id=qwen3.5>.
- Haozhe Wang, Chao Qu, Zuming Huang, Wei Chu, Fangzhen Lin, and Wenhui Chen. Vl-rethinker: Incentivizing self-reflection of vision-language models with reinforcement learning. *Advances in Neural Information Processing Systems*, 38:30865–30891, 2026.
- Ke Wang, Juntong Pan, Weikang Shi, Zimu Lu, Houxing Ren, Aojun Zhou, Mingjie Zhan, and Hongsheng Li. Measuring multimodal mathematical reasoning with math-vision dataset. *Advances in Neural Information Processing Systems*, 37:95095–95169, 2024a.
- Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, et al. Qwen2-vl: Enhancing vision-language model’s perception of the world at any resolution. *arXiv preprint arXiv:2409.12191*, 2024b.
- Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc Le, Ed Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. Self-consistency improves chain of thought reasoning in language models. *arXiv preprint arXiv:2203.11171*, 2022.

- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural information processing systems*, 35:24824–24837, 2022.
- Yuyang Wu, Yifei Wang, Ziyu Ye, Tianqi Du, Stefanie Jegelka, and Yisen Wang. When more is less: Understanding chain-of-thought length in llms. *arXiv preprint arXiv:2502.07266*, 2025.
- xAI. RealWorldQA, April 2024. URL <https://huggingface.co/datasets/xai-org/RealworldQA>.
- Yijia Xiao, Edward Sun, Tianyu Liu, and Wei Wang. Logicvista: Multimodal llm logical reasoning benchmark in visual contexts. *arXiv preprint arXiv:2407.04973*, 2024.
- Wenkai Yang, Weijie Liu, Ruobing Xie, Kai Yang, Saiyong Yang, and Yankai Lin. Learning beyond teacher: Generalized on-policy distillation with reward extrapolation. *arXiv preprint arXiv:2602.12125*, 2026.
- Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Tom Griffiths, Yuan Cao, and Karthik Narasimhan. Tree of thoughts: Deliberate problem solving with large language models. *Advances in neural information processing systems*, 36:11809–11822, 2023.
- Jingyang Yi, Jiazhang Wang, and Sida Li. Shorterbetter: Guiding reasoning models to find optimal inference length for efficient reasoning. *Advances in Neural Information Processing Systems*, 38:39011–39043, 2026.
- Xin Yu, Liuchen Liao, Yiwen Zhang, Yingchen Yu, Lingzhou Xue, and Qinzhen Guo. Preference-based self-distillation: Beyond kl matching via reward regularization. *arXiv preprint arXiv:2605.05040*, 2026.
- Wenzhen Yuan, Jiacheng Ruan, Wutao Xiong, Chengping Zhao, Ting Liu, and Yuzhuo Fu. Mmgist: A comprehensive multimodal benchmark for 2027. *arXiv preprint arXiv:2606.22437*, 2026.
- Zheng Yuan, Hongyi Yuan, Chengpeng Li, Guanting Dong, Keming Lu, Chuanqi Tan, Chang Zhou, and Jingren Zhou. Scaling relationship on learning mathematical reasoning with large language models. *arXiv preprint arXiv:2308.01825*, 2023.
- Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu Jiang, Weiming Ren, Yuxuan Sun, et al. Mmmu: A massive multi-discipline multimodal understanding and reasoning benchmark for expert agi. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 9556–9567, 2024.
- Ke Zhang, Yunjie Tian, Dongdi Zhao, Yijiang Li, Yuanye Liu, Vishal M Patel, and Di Fu. On-policy distillation with best-of-n teacher rollout selection. *arXiv preprint arXiv:2605.09725*, 2026a.
- Renrui Zhang, Dongzhi Jiang, Yichi Zhang, Haokun Lin, Ziyu Guo, Pengshuo Qiu, Aojun Zhou, Pan Lu, Kai-Wei Chang, Yu Qiao, et al. Mathverse: Does your multi-modal llm truly see the diagrams in visual math problems? In *European Conference on Computer Vision*, pp. 169–186. Springer, 2024.
- Yaocheng Zhang, Jiajun Chai, Yuqian Fu, Songjun Tu, Xiaohan Wang, Wei Lin, Guojun Yin, Qichao Zhang, Yuanheng Zhu, and Dongbin Zhao. Are full rollouts necessary for on-policy distillation? *arXiv preprint arXiv:2605.31490*, 2026b.
- Siyan Zhao, Zhihui Xie, Mengchen Liu, Jing Huang, Guan Pang, Feiyu Chen, and Aditya Grover. Self-distilled reasoner: On-policy self-distillation for large language models. *arXiv preprint arXiv:2601.18734*, 2026.
- Yanli Zhao, Andrew Gu, Rohan Varma, Liang Luo, Chien-Chin Huang, Min Xu, Less Wright, Hamid Shojanazeri, Myle Ott, Sam Shleifer, et al. Pytorch fsdp: experiences on scaling fully sharded data parallel. *arXiv preprint arXiv:2304.11277*, 2023.
- Denny Zhou, Nathanael Schärli, Le Hou, Jason Wei, Nathan Scales, Xuezhi Wang, Dale Schuurmans, Claire Cui, Olivier Bousquet, Quoc Le, et al. Least-to-most prompting enables complex reasoning in large language models. *arXiv preprint arXiv:2205.10625*, 2022.