

IGGT4D: Streaming 4D Instance-Grounded Geometry Transformer

Zhengyu Zou^{1,†}, Hao Li², Kuixuan Jiao^{1,†}, Liu Liu^{1,‡}, Tingyang Xiao¹,
Xiaolin Zhou¹, Fangzhou Hong², Zhizhong Su¹, Dingwen Zhang^{3,✉}, Ziwei Liu²

¹Horizon Robotics ²S-Lab, Nanyang Technological University

³Institute of Artificial Intelligence, Hefei Comprehensive National Science Center

Project Page: <https://iggt4d.github.io>



Figure 1: **Online Geometry-Instance Prediction with IGGT4D.** IGGT4D processes a dynamic video stream frame by frame to incrementally build a unified 4D representation that jointly captures camera motion, 3D geometry, and temporally consistent instance features. This representation supports diverse downstream applications. We also construct **InsScene4D-147K**, a large-scale dataset with geometry-guided instance masks, to support training and evaluation.

Abstract

Real-world spatial intelligence requires agents to understand scenes from continuous video streams, where objects move, persist, disappear, and reappear over time. While recent spatial foundation models have enabled generalizable feed-forward 3D reconstruction, most streaming methods remain geometry-centric and lack temporally consistent object-level understanding. Meanwhile, existing semantic reconstruction and 3D-aware vision-language methods largely rely on externally extracted 2D semantic cues or loosely coupled geometry inputs, limiting unified geometry-instance learning in long dynamic scenes. In this paper, we propose **IGGT4D**, a streaming instance-grounded geometry Transformer for online 4D scene understanding. IGGT4D processes video frames sequentially, reuses historical context through causal spatial-temporal modeling, and incrementally updates a unified representation of camera motion, geometry, and object identity. This enables long-sequence feed-forward reconstruction with geometry-instance consistency in

Preprint.

[†] Intern at Horizon Robotics

[‡] Project Leader

✉ Corresponding Author

dynamic environments. To address the lack of high-quality 4D supervision, we further construct **InsScene4D-147K**, a large-scale dataset spanning real/synthetic and static/dynamic scenes, with RGB images, depth, poses, and temporally consistent instance masks generated by an automated geometry-guided annotation pipeline. Experiments on 3D reconstruction, pose estimation, instance spatial tracking, and open-vocabulary segmentation demonstrate that IGGT4D outperforms existing streaming baselines while maintaining scalable online inference for long dynamic sequences.

1 Introduction

Real-world spatial intelligence is inherently online and dynamic. An embodied agent receives a continuous video stream in which objects move, become occluded, leave the field of view, and reappear over time. Acting in such environments requires more than estimating camera motion and scene geometry: the agent must also maintain temporally consistent object identities. We therefore formulate 4D scene understanding as streaming geometry-instance prediction, where scene geometry and object identities are updated jointly from long, dynamic video streams.

Spatial reconstruction and scene understanding are undergoing a shift from optimization-based pipelines to data-driven feed-forward prediction. Traditional geometric pipelines, from offline SfM [1, 2] to online and neural SLAM [3–7], rely on iterative per-scene optimization. Similarly, semantic reconstruction systems, from offline scene graphs [8] to online semantic mapping [9], often construct geometry and object-level cues through separate modules. These systems are effective, but their scene-specific optimization limits long-sequence efficiency, while their modular design makes temporally consistent instance reasoning difficult in dynamic scenes.

Recent spatial foundation models [10–13] address these limitations by learning generalizable priors for direct 3D prediction from images. For online long-sequence perception, this paradigm is further moving from global fixed-set inference to streaming reconstruction [14–16]. However, streaming 3D prediction alone is insufficient for embodied agents. Current streaming models remain largely geometry-centric: they estimate depth, pose, and point maps, but do not maintain temporally consistent object identities. The missing capability is a feed-forward streaming model that treats object identity as a first-class prediction target together with geometry.

Why has streaming geometry-instance understanding remained underexplored? A key reason is the lack of suitable supervision. 2D vision-language models [17–20] provide scalable open-vocabulary cues, but their predictions are view-dependent and lack metric 3D grounding. Semantic reconstruction methods [21–25] improve spatial coherence by lifting 2D semantics into 3D, but their semantic fidelity remains bounded by the capability of the external 2D predictors. 3D-aware vision-language models [26–29] incorporate geometry for spatial reasoning, but do not provide dense, temporally consistent geometry-instance supervision for training streaming models. What is missing is large-scale 4D supervision that provides metric geometry, camera motion, and temporally consistent instance labels in a unified form.

To address these gaps, we propose **IGGT4D**, a streaming instance-grounded geometry Transformer for online 4D scene understanding. IGGT4D turns geometry-instance reconstruction from a full-sequence offline problem into a causal streaming prediction problem. It processes frames sequentially, reuses historical context through causal spatial-temporal modeling, and incrementally updates camera motion, scene geometry, and instance embeddings in a unified representation. By grounding instance association in reconstructed geometry, IGGT4D maintains object identities across viewpoint changes, occlusions, and reappearance.

We further construct **InsScene4D-147K**, a large-scale dataset for geometry-instance learning in 4D scenes. It spans real/synthetic and static/dynamic sources, and provides RGB images, depth maps, camera poses, point clouds, and sequence-level consistent instance masks. To reduce annotation cost, we design an automated geometry-guided annotation pipeline that produces multi-view consistent geometry and instance labels at scale. Our contributions are threefold:

- **Streaming geometry-instance prediction.** We formulate online 4D scene understanding as causal prediction of camera motion, scene geometry, and persistent object identities from continuous video streams.

- **Object-consistent streaming reconstruction.** We introduce IGGT4D, a feed-forward streaming Transformer that couples causal geometry modeling with geometry-grounded instance prediction and online clustering, maintaining consistent object identities without full-sequence inference.
- **Scalable 4D instance supervision.** We construct InsScene4D-147K, a large-scale real/synthetic and static/dynamic dataset with geometry-consistent instance annotations generated by a scalable reconstruction, projection, and mask-refinement pipeline.

2 Related work

Streaming Spatial Foundation Models Feed-forward spatial foundation models learn generalizable 3D priors for direct reconstruction from images [10–13, 30–32]. DUST3R [30] formulates dense 3D prediction as point-map regression [30, 31], while VGGT-style models extend this paradigm toward large-scale and modality-augmented visual geometry estimation [10, 32]. However, these models are designed for fixed image sets; applying them to a growing video stream requires reprocessing the full history or using sliding windows, causing redundant computation and weakening long-range consistency. Recent streaming variants, including Spann3R [14], MUsT3R [33], CUT3R [15], and Stream3R [16], address this efficiency bottleneck by maintaining online scene state rather than rerunning global inference. While this reduces the overhead of incremental reconstruction, the maintained state remains optimized for geometric consistency rather than object persistence. Consequently, it lacks explicit object identities, instance masks, and cross-frame associations—elements indispensable for 4D scene understanding in long-duration dynamic videos.

Instance-Aware 3D Scene Understanding Object-level scene understanding has also progressed from 2D open-vocabulary perception and per-scene semantic lifting toward unified 3D prediction. LangSplat [34] and LangSurf [35] attach language features to optimized 3D representations for open-vocabulary querying, while language-driven segmentation models such as LSeg [18] predict semantic regions directly from images. These methods improve semantic accessibility, but they often depend on external 2D cues, per-scene optimization, or view-independent predictions, making it difficult to maintain coherent 3D object identities over time. More recent feed-forward scene understanding models aim to couple reconstruction with semantics or instances: LSM [36] predicts semantic radiance fields from unposed images, Uni3R [24] predicts semantic 3D Gaussians from arbitrary multi-view inputs, and IGGT [37] introduces instance-aware geometric prediction with 3D-consistent feature clustering. These models move closer to joint geometry-instance learning, but they are still built around fixed image sets and global cross-view attention. For long video streams, each update must attend to or recompute historical frames, making online inference expensive and preventing causal instance updates. IGGT4D targets the intersection of these two lines: it keeps the streaming efficiency of causal spatial foundation models while jointly predicting geometry and temporally consistent instance features for online 4D scene understanding.

3 Method

We propose IGGT4D, a streaming instance-grounded geometry Transformer. Sec. 3.1 formalizes sequential feed-forward prediction. Sec. 3.2 introduces the streaming architecture, and Sec. 3.3 presents the efficient streaming clustering strategy. Sec. 3.4 describes downstream 4D scene understanding applications, followed by the training objectives in Sec. 3.5.

3.1 Problem Formulation and Notation

Given an RGB image sequence $\{I_t\}_{t=1}^N$, where each image $I_t \in \mathbb{R}^{H \times W \times 3}$ and optional camera parameters $\{\tilde{\pi}_t\}_{t=1}^N$ with $\tilde{\pi}_t \in \mathbb{R}^9$, IGGT4D (denoted as $\mathcal{F}_\theta$) performs feed-forward sequential inference for streaming 4D geometry and instance reconstruction:

$$\mathcal{F}_\theta : (I_t, \tilde{\pi}_t) \mapsto (\pi_t, R_t, D_t, S_t), \quad t = 1, \dots, N. \quad (1)$$

For each frame, IGGT4D outputs camera parameters $\pi_t = [\mathbf{t}_t, \mathbf{q}_t, \mathbf{f}_t] \in \mathbb{R}^9$, a ray map $R_t = [O_t, V_t] \in \mathbb{R}^{H_r \times W_r \times 6}$, a depth map $D_t \in \mathbb{R}^{H \times W}$, and an instance feature map $S_t \in \mathbb{R}^{H \times W \times 8}$. Here, $\mathbf{t}_t \in \mathbb{R}^3$, $\mathbf{q}_t \in \mathbb{R}^4$, $\mathbf{f}_t \in \mathbb{R}^2$ denote translation, rotation, and field-of-view, respectively, while $O_t \in \mathbb{R}^{H_r \times W_r \times 3}$, $V_t \in \mathbb{R}^{H_r \times W_r \times 3}$ represent ray origins and directions. As images are

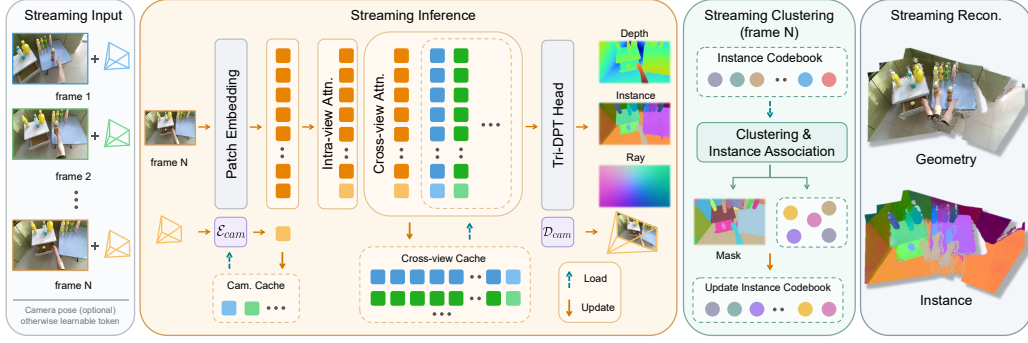


Figure 2: **Overview of IGGT4D.** Given a dynamic video sequence and optional camera poses, IGGT4D extracts a spatial-temporally consistent representation. A Tri-DPT head incrementally predicts geometry and instance features, and a streaming clustering algorithm derives instance masks for online 4D scene understanding.

sequentially streamed in, frame-wise predictions are integrated into a spatial-temporal consistent scene representation, enabling online 4D reconstruction and understanding.

3.2 Streaming Instance-Grounded Geometric Transformer

Causal Geometry-Instance Transformer. We adapt the unified geometric Transformer of DA3 [13] from fixed-set 3D prediction to causal streaming 4D understanding. Each image is encoded into image tokens and concatenated with a camera token, obtained from $\mathcal{E}_{\text{cam}}$ when camera parameters are available or from a shared learnable token otherwise. The resulting frame-level tokens are processed by 40 Transformer blocks with interleaved intra-view and cross-view attention, producing multi-scale features $\{\mathbf{F}_t^{(l)}\}_{l=1}^4$. Unlike DA3’s bidirectional fixed-view reasoning, IGGT4D imposes causal masks on cross-camera and cross-view attention, so each frame only attends to current and past observations. The same constraint is used during training to simulate streaming inference. At inference time, frames are processed sequentially, with camera and cross-view KV caches reusing historical context without redundant recomputation. The resulting representation supports scalable long-sequence geometry and instance prediction.

Tri-DPT Geometry-Instance Head. We design a Tri-DPT head to jointly decode depth D_t , ray map R_t , and instance feature map S_t from the streaming multi-scale tokens $\{\mathbf{F}_t^{(l)}\}_{l=1}^4$. All branches progressively recover spatial resolution, while the instance branch is coupled with geometric branches through geometry-aware attention. By using depth and ray features as structural priors, the head grounds instance embeddings in 3D geometry and improves object identity consistency across time.

3.3 Efficient Streaming Instance Clustering

Offline clustering, such as HDBSCAN [38] used in IGGT [37], incurs prohibitive quadratic complexity on long sequences. To enable online inference, we introduce a two-stage streaming clustering strategy that maintains a lightweight global instance codebook $\mathcal{C}_t = \{(\mathbf{c}_k, a_k)\}_{k=1}^{K_t}$, where $\mathbf{c}_k$ is the feature center of instance k and a_k is its accumulated pixel count.

First, intra-frame clustering extracts local masks $M_{t,i}$ and centers $\mathbf{c}_{t,i}$. For an unassigned pixel p , we group pixels with high cosine similarity ($\alpha_q = \mathbf{s}_p^\top \mathbf{s}_q \geq \tau_s$) into a core region, then expand it via connected components over a looser threshold (τ_l) to form $M_{t,i}$. Next, we match these local centers with the global codebook. Unmatched instances become new global entries, while unmatched background regions are naturally ignored as distinct static entities, implicitly decoupling dynamic foreground from the static background. For matches, $M_{t,i}$ inherits the global ID k as a 4D-consistent mask $M_{t,k}$, and its center is updated via area-weighted fusion:

$$\mathbf{c}_k \leftarrow \text{norm} \left(\frac{a_k \mathbf{c}_k + |M_{t,k}| \mathbf{c}_{t,i}}{a_k + |M_{t,k}|} \right), \quad a_k \leftarrow a_k + |M_{t,k}|. \quad (2)$$

This constant-time center update translates 4D-consistent instance features into high-quality tracking masks (Fig. 3), providing a lightweight mechanism for maintaining instance consistency under object motion and partial occlusion, without explicit motion modeling.

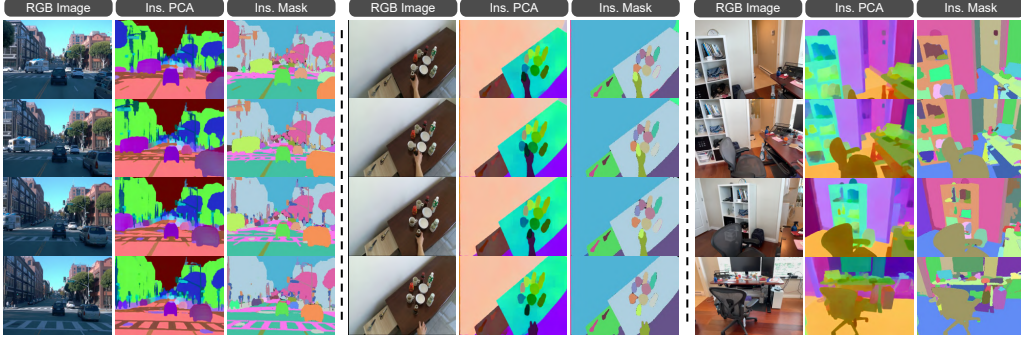


Figure 3: **Instance Feature and Mask Visualization.** We visualize the 3D-consistent instance feature PCA results alongside the corresponding instance masks generated by our streaming clustering.

3.4 4D Scene Understanding

The 4D-consistent masks $M_{t,k}$ and temporally linked instance features $\mathbf{c}_k$ provide a reusable object-level representation for downstream scene understanding tasks. First, the persistent instance correspondences across frames enable stable spatial tracking without additional association heuristics. Second, by using $M_{t,k}$ to aggregate per-frame 2D vision-language features [17, 19], we obtain spatially and temporally consistent language features $\mathbf{f}_{t,k}^{\text{lang}}$ for open-vocabulary semantic segmentation. Finally, these 4D-consistent masks and features can be provided to Large Multimodal Models (LMMs) [39, 40] to support 4D scene grounding, including tasks such as dynamic object segmentation and out-of-view object reasoning. Additional implementation details and qualitative results are provided in the supplementary material.

3.5 Training Objectives

First-frame Geometric Normalization. In streaming reconstruction, estimating scale from the entire sequence, as in offline settings, can introduce scale ambiguity. To avoid this ambiguity and promote spatial-temporal consistency, we apply first-frame-based geometric normalization during training: all poses are aligned to the first-frame camera coordinate system, and the first-frame point cloud $\mathcal{P}_1$ is used to compute a sequence-level scale $s = \frac{1}{|\mathcal{P}_1|} \sum_{\mathbf{p} \in \mathcal{P}_1} \|\mathbf{p}\|_2$, which is then applied to all geometric ground truth across the sequence.

Geometry Objectives. We supervise geometry with depth, ray, point, and camera losses: $\mathcal{L}_{\text{geo}} = \mathcal{L}_D + \mathcal{L}_R + \mathcal{L}_P + \mathcal{L}_\pi$. The depth loss $\mathcal{L}_D$ combines L1 regression, confidence C_t regularization, and spatial gradient $\mathcal{L}_{\text{grad}}$ consistency over valid pixels V :

$$\mathcal{L}_D = \frac{1}{|V|} \sum_{p \in V} (|D_t(p) - D_t^*(p)| (1 + \lambda_{\text{conf}} C_t(p)) - \lambda_{\text{conf}} \alpha \log C_t(p)) + \lambda_{\text{grad}} \mathcal{L}_{\text{grad}}, \quad (3)$$

where $\mathcal{L}_{\text{grad}} = \|\nabla D_t - \nabla D_t^*\|_1$ is an L1 gradient loss over spatial neighbors, V is the set of valid pixels, and α is a scaling factor. For the ray map $R_t = [O_t, V_t]$, we apply L1 loss to origins and directions: $\mathcal{L}_R = \|O_t - O_t^*\|_1 + \|V_t - V_t^*\|_1$. We further couple depth and rays by reconstructing 3D points $P_t = O_t + D_t V_t$ and minimizing $\mathcal{L}_P = \|P_t - P_t^*\|_1$. The camera loss is $\mathcal{L}_\pi = \|\pi_t - \pi_t^*\|_1$.

Instance Objective. We optimize the L2-normalized instance features using a multi-view contrastive loss. For each annotated mask, we define its prototype μ as the mean pixel feature. The objective enforces intra-view ($u = v$) constraints to group pixels $\mathbf{f}_p$ toward their instance center μ_k^v and repel different centers. It also applies cross-view ($u \neq v$) constraints to pull matching centers across frames and push different centers apart:

$$\begin{aligned} \mathcal{L}_{\text{ins}} = & \sum_v \left(\lambda_{\text{pull}}^{\text{in}} \sum_{p \in M_k^v} [\|\mathbf{f}_p - \mu_k^v\|_2 - \delta_{\text{pull}}^{\text{in}}]_+ + \lambda_{\text{push}}^{\text{in}} \sum_{k \neq j} [\delta_{\text{push}}^{\text{in}} - \|\mu_k^v - \mu_j^v\|_2]_+ \right) \\ & + \sum_{u \neq v} \left(\lambda_{\text{pull}}^{\text{cr}} \sum_k [\|\mu_k^u - \mu_k^v\|_2 - \delta_{\text{pull}}^{\text{cr}}]_+ + \lambda_{\text{push}}^{\text{cr}} \sum_{k \neq j} [\delta_{\text{push}}^{\text{cr}} - \|\mu_k^u - \mu_j^v\|_2]_+ \right), \end{aligned} \quad (4)$$

where $[\cdot]_+ = \max(0, \cdot)$, and δ are their respective margins. The final objective is $\mathcal{L} = \mathcal{L}_{\text{geo}} + \lambda_{\text{ins}} \mathcal{L}_{\text{ins}}$.

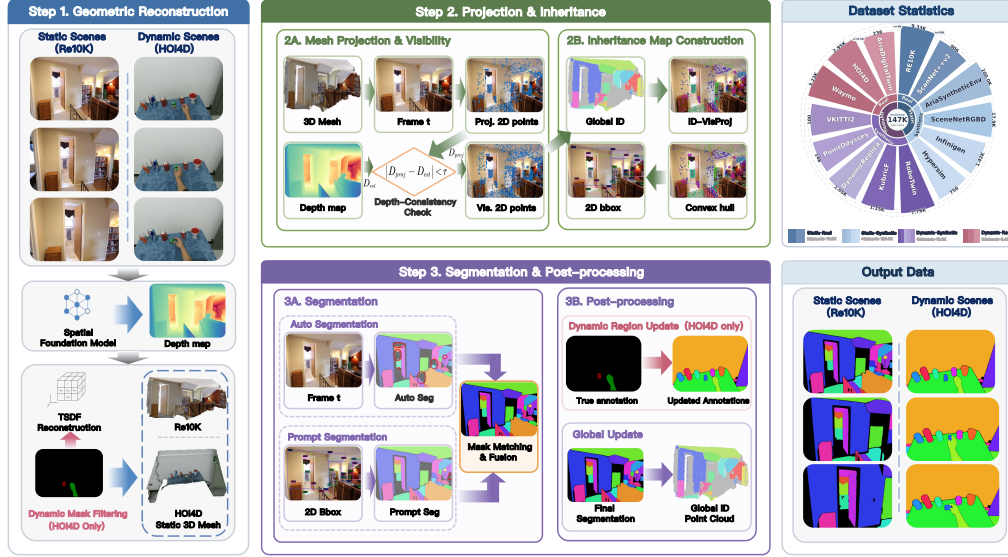


Figure 4: **InsScene4D-147K data curation pipeline.** Real/synthetic and static/dynamic sources are processed through 3D reconstruction, projection-based ID inheritance, and segmentation-based global ID refinement. The right panel summarizes the dataset splits.

4 InsScene4D-147K Dataset

We construct **InsScene4D-147K**, a large-scale dataset for online 4D scene understanding, comprising *147K* curated video sequences. The dataset spans four domains: static-real, static-synthetic, dynamic-real, and dynamic-synthetic. Specifically, the static-real split includes RealEstate10K [41] and ScanNet++ [42]; the static-synthetic split includes Aria Synthetic Environments [43], SceneNet [44], Infinigen [45], and Hypersim [46]; the dynamic-real split includes HOI4D [47], Waymo [48], and Aria Digital Twin [43]; and the dynamic-synthetic split includes RoboTwin 2.0 [49], Kubric [50], Dynamic Replica [51], PointOdyssey [52], and VKITTI2 [53]. Each sequence provides RGB images, depth maps, camera poses, point clouds, and 4D-consistent instance masks with persistent object identities across frames. Fig. 4 illustrates our geometry-guided annotation pipeline for producing temporally consistent instance supervision at scale.

For static captures, we design a curation pipeline that turns offline geometry into temporally consistent instance supervision. We first estimate multi-view consistent depth with DA3 [13], conditioned on offline ground-truth camera poses to avoid long-sequence pose drift. A static 3D mesh is then reconstructed via TSDF fusion [54], which aggregates depth predictions across views to reduce estimation variance and suppress outlier noise. This process yields high-quality, multi-view consistent geometric pseudo-labels for subsequent instance annotation.

For each frame, we project mesh vertices onto the image plane, retain visible vertices by depth consistency, and reverse-map their global IDs to form an *inheritance map*. SAM2 [55] provides category-agnostic masks, which are filtered, de-overlapped, and matched to inherited regions by IoU. Confident matches inherit existing IDs, ambiguous matches use the best-overlap ID, and unmatched masks are initialized as new instances. To prevent stale ID propagation, an object is marked as disappeared if its projected area drops sharply for $N=5$ consecutive frames.

For dynamic scenes such as HOI4D, we estimate depth and camera poses with DA3, remove dynamic regions using the provided masks, and reconstruct the static 3D mesh from the remaining regions. We then apply the same annotation pipeline, while using available dynamic-object annotations to override projected pseudo-labels in dynamic regions. For simulation data, the source datasets provide RGB-D sequences with instance-consistent masks, which we incorporate into the synthetic split.

5 Experiments

We evaluate our method across multiple tasks against a broad range of state-of-the-art baselines. All experiments are conducted on an NVIDIA RTX 5090 GPU with 32 GB of memory.

Table 1: **Geometry benchmark on HiRoom, ETH3D, 7Scenes, and ScanNet++.** (a) Camera pose estimation (AUC@3, AUC@30). (b) 3D reconstruction (F1-score) without (w/o p.) and with (w/ p.) ground-truth camera poses. Methods are grouped into *full-attention* (offline) and *streaming* (online). Best and second-best results are highlighted in **bold** and underline, respectively.

Methods	Avg		HiRoom		ETH3D		7Scenes		ScanNet++	
(a) Camera Pose Estimation										
	AUC@3↑	AUC@30↑	AUC@3↑	AUC@30↑	AUC@3↑	AUC@30↑	AUC@3↑	AUC@30↑	AUC@3↑	AUC@30↑
Full-attention (offline)										
VGGT	0.4001	0.8725	0.4927	0.8840	0.2895	0.8166	0.2293	0.8465	0.5890	0.9429
MapAnything	0.2436	0.8569	0.3069	0.8806	0.2347	0.8250	0.1683	0.8256	0.2646	0.8966
Pi3X	0.4683	0.9096	0.6662	0.9476	0.3453	0.8749	0.2526	0.8607	0.6090	0.9552
DA3	0.6046	0.9352	0.8465	0.9735	0.4541	0.9184	0.2780	0.8671	0.8397	0.9818
Streaming (online)										
CUT3R	0.1022	0.6977	0.1752	0.7438	0.1187	0.6611	0.0654	0.7177	0.0494	0.6683
StreamVGGT	0.1606	0.7579	0.1686	0.7330	0.1300	0.6866	0.1354	0.8136	0.2085	0.7985
Wint3R	0.1133	0.6937	0.2522	0.7998	0.1219	0.6693	0.0251	0.6929	0.0541	0.6129
Stream3R	0.1871	0.7947	0.2510	0.8183	0.1621	0.7143	0.1313	0.8209	0.2041	0.8252
LingBot-Map	0.3060	0.8647	0.3388	0.8727	0.2796	0.8417	0.1636	0.8257	0.4419	0.9188
Ours	0.4464	0.8924	0.7223	0.9533	0.2734	0.8242	0.2435	0.8534	0.5467	0.9389
(b) 3D Reconstruction										
	F1(w/o p.)↑	F1(w/ p.)↑	F1(w/o p.)↑	F1(w/ p.)↑	F1(w/o p.)↑	F1(w/ p.)↑	F1(w/o p.)↑	F1(w/ p.)↑	F1(w/o p.)↑	F1(w/ p.)↑
Full-attention (offline)										
VGGT	0.5775	0.6477	0.5549	0.6676	0.6249	0.7198	0.4640	0.5048	0.6662	0.6985
MapAnything	0.4526	0.6407	0.4726	0.5904	0.5722	0.7596	0.4647	0.5016	0.3007	0.7112
Pi3X	0.6740	0.7756	0.7780	0.8969	0.7014	0.8331	0.4742	0.5740	0.7424	0.7986
DA3	0.7430	0.7980	0.8819	0.9563	0.8098	0.8689	0.5005	0.5653	0.7796	0.8015
Streaming (online)										
CUT3R	0.3644	0.4060	0.2795	0.1993	0.5941	0.6467	0.3221	0.3711	0.2621	0.4071
StreamVGGT	0.2703	0.3377	0.1162	0.2179	0.3730	0.4275	0.3119	0.3567	0.2800	0.3486
Wint3R	0.4260	0.4550	0.4853	0.2969	0.6167	0.7447	0.3090	0.3901	0.2929	0.3885
Stream3R	0.4551	0.5504	0.4359	0.6435	0.5432	0.6400	0.4426	0.4739	0.3986	0.4443
LingBot-Map	0.5228	0.6082	0.4749	0.5973	0.6615	0.7394	0.3794	0.4726	0.5756	0.6236
Ours	0.6678	0.7225	0.8015	0.8501	0.7186	0.7724	0.4975	0.5441	0.6535	0.7236

5.1 Evaluation of Camera Pose Estimation and 3D Reconstruction

Following the evaluation protocol of DA3 [13], we evaluate on HiRoom, ETH3D [56], 7Scenes [57], and ScanNet++ [42]. These evaluation sequences are held out from training at the scene/sequence level. We compare with offline full-attention models (VGGT [10], MapAnything [11], Pi3X [12], DA3) and online streaming models (CUT3R [15], StreamVGGT [58], Wint3R [59], Stream3R [16], LingBot-Map [60]). We adopt DA3’s evaluation protocol and use TSDF fusion [54] for 3D consistency. We report AUC@3/AUC@30 for pose accuracy and F1-score for 3D reconstruction quality.

Camera Pose Estimation. As shown in Tab. 1(a), our method achieves the best average performance among streaming models, indicating that it can recover camera motion reliably from sequential inputs. While full-attention models such as DA3 still benefit from bidirectional reasoning over the entire sequence, our method substantially reduces the gap under a causal streaming setting and even outperforms several full-attention baselines.

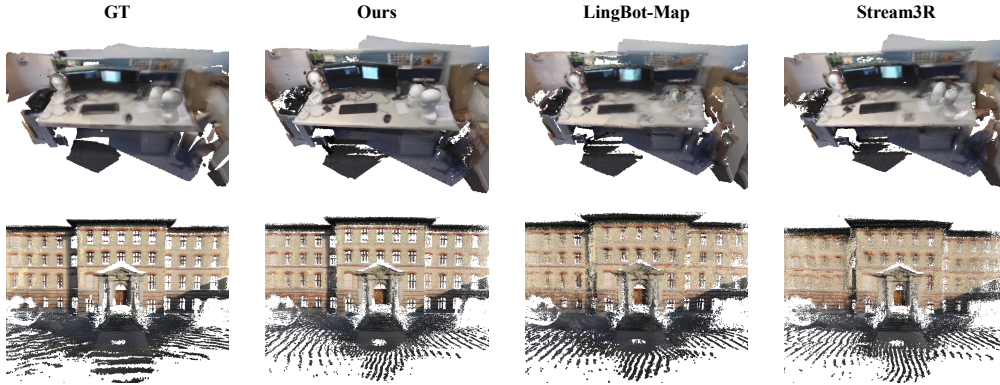


Figure 5: **Qualitative comparison of 3D reconstruction on the 7Scenes and ETH3D datasets.**

3D Reconstruction. Tab. 1(b) reports 3D reconstruction F1-scores with predicted poses (w/o p.) and ground-truth poses (w/ p.). MapAnything, Pi3X, DA3, and our method accept ground-truth poses during inference, while the other methods use them only for evaluation-time fusion. In both settings, our method outperforms all streaming baselines, showing strong 3D consistency under sequential inference. With ground-truth poses, it further improves reconstruction quality, suggesting that the model can effectively exploit streaming camera inputs. Fig. 5 shows qualitative comparisons with

Table 2: **Instance spatial tracking on HOI4D, Waymo, ScanNet++, and PointOdyssey.** Evaluated under two settings: (a) long sequences and (b) short sequences. Best and second-best results are highlighted in **bold** and underline, respectively.

Methods	Avg		HOI4D		Waymo		ScanNet++		PointOdyssey	
<i>(a) Long sequences (~100 frames, HOI4D: 40 frames)</i>										
	T-mIoU↑	T-SR↑	T-mIoU↑	T-SR↑	T-mIoU↑	T-SR↑	T-mIoU↑	T-SR↑	T-mIoU↑	T-SR↑
SpaTrackerV2+SAM	43.73	59.28	64.40	74.89	42.13	53.04	21.86	39.49	46.52	69.68
SAM2	45.38	58.65	65.41	78.34	47.62	56.93	12.88	23.24	55.62	76.07
IGGT	OOM	OOM	OOM	OOM	OOM	OOM	OOM	OOM	OOM	OOM
Ours	58.84	85.41	78.44	95.60	59.35	88.04	33.19	61.35	64.36	96.65
<i>(b) Short sequences (~16 frames)</i>										
	T-mIoU↑	T-SR↑	T-mIoU↑	T-SR↑	T-mIoU↑	T-SR↑	T-mIoU↑	T-SR↑	T-mIoU↑	T-SR↑
SpaTrackerV2+SAM	46.84	63.19	61.94	71.20	47.57	57.92	33.73	59.47	44.12	64.17
SAM2	51.75	66.03	65.87	78.11	60.65	71.37	21.25	35.08	59.21	79.57
IGGT	51.68	84.65	63.02	87.14	49.59	88.56	32.97	68.07	61.13	94.83
Ours	59.25	86.28	78.27	95.42	61.08	89.34	34.18	63.47	63.45	96.88



Figure 6: **Qualitative visualization results of Instance Spatial Tracking.**

LingBot-Map and Stream3R using TSDF-fused point clouds, with invalid ground-truth depth regions masked out.

5.2 Evaluation of Instance Spatial Tracking

For instance spatial tracking and open-vocabulary semantic segmentation, all evaluation sequences are sampled from held-out splits that are disjoint from the training data at the scene or sequence level. Our evaluation is conducted on three dynamic datasets (HOI4D [47], Waymo [48], and PointOdyssey [52]) and one static dataset (ScanNet++). Following the protocol in IGGT [37], we compare against SpaTrackerV2 [61]+SAM [20], SAM2 [55], and IGGT itself, and report Temporal mIoU (T-mIoU) and Temporal Success Rate (T-SR). We evaluate the methods under both long- and short-sequence settings. For long sequences, all datasets consist of 100 frames, except for HOI4D, which uses 40 frames. As shown in Tab. 2, IGGT suffers from out-of-memory (OOM) issues when processing long sequences. In contrast, benefiting from the proposed streaming inference and clustering mechanisms, our method can scale to 4D long sequences. We present the qualitative visualization results of Instance Spatial Tracking in Fig. 6.

5.3 Evaluation of Open-Vocabulary Semantic Segmentation

We evaluate on Waymo and ScanNet++. Baselines include 2D vision-language models (OpenSeg [19], LSeg [18]) and 3D semantic reconstruction methods (per-scene Feature-3DGS [25] and feed-forward IGGT [37]). As shown in Tab. 3, our method achieves the highest mIoU and mAcc, demonstrating stronger semantic segmentation performance under both long- and short-sequence settings in both dynamic outdoor and complex static indoor scenes. Fig. 7 shows qualitative visualization results.

Table 3: **Open-vocabulary semantic segmentation on Waymo and ScanNet++**. Evaluated under two settings: (a) long sequences and (b) short sequences. Best and second-best results are highlighted in **bold** and underline, respectively.

Methods	(a) Long sequences (~100 frames)						(b) Short sequences (~16 frames)					
	Avg		Waymo		ScanNet++		Avg		Waymo		ScanNet++	
	mIoU $\uparrow$	mAcc $\uparrow$	mIoU $\uparrow$	mAcc $\uparrow$	mIoU $\uparrow$	mAcc $\uparrow$	mIoU $\uparrow$	mAcc $\uparrow$	mIoU $\uparrow$	mAcc $\uparrow$	mIoU $\uparrow$	mAcc $\uparrow$
OpenSeg	19.16	45.77	15.14	44.10	23.17	47.43	19.41	46.80	15.03	43.87	23.78	49.73
LSeg	<u>31.95</u>	<u>48.23</u>	<u>35.52</u>	<u>56.55</u>	<u>28.37</u>	39.90	<u>32.06</u>	50.54	<u>34.82</u>	57.04	29.29	44.03
Feature-3DGS	31.94	48.15	35.51	56.49	28.37	39.81	26.47	44.32	34.81	56.88	17.80	32.90
IGGT	OOM	OOM	OOM	OOM	OOM	OOM	31.16	<u>61.90</u>	29.44	<u>62.42</u>	<u>32.88</u>	<u>61.38</u>
Ours	40.08	73.84	41.63	78.07	38.52	69.61	39.11	72.25	40.68	75.51	37.53	68.98



Figure 7: **Qualitative visualization results of Open-Vocabulary Semantic Segmentation.**

5.4 Ablation Study and Streaming Clustering Efficiency

We conduct the ablation study on ScanNet++ using a lightweight model, as shown in Tab. 4. Removing Geometry-Aware Attention (Geo-Attn) degrades instance and semantic performance, demonstrating that instance features benefit from geometric priors. Furthermore, without First-Frame Geometric Normalization (FF-Norm), severe scale ambiguity arises during streaming reconstruction. This disrupts the unified geometry-instance representation, leading to a decline across all metrics.

Streaming Clustering Efficiency. Tab. 5 compares the time and GPU memory consumption of our streaming clustering against the offline HDBSCAN [38] used in IGGT at a resolution of 504×336 . Benefiting from a lightweight clustering codebook and frame-by-frame cosine clustering, our method maintains a constant memory footprint (~ 0.7 GB) and scales linearly in time.

Table 4: **Ablation study on ScanNet++**. Geo-Attn: Geometry-Aware Attention. FF-Norm: First-Frame Geometric Normalization.

Model	Geometry		Instance		Semantic	
	AUC@3 $\uparrow$	F1-score $\uparrow$	mIoU $\uparrow$	Match Rate $\uparrow$	mIoU $\uparrow$	mAcc $\uparrow$
Full model	0.2984	0.4790	0.3098	0.6271	0.3666	0.6853
w/o Geo-Attn	0.2902	0.4778	0.2970	0.6074	0.3559	0.6796
w/o FF-Norm	0.2334	0.3542	0.2873	0.6019	0.3480	0.6768

Table 5: **Clustering efficiency comparison.** Ours: Streaming clustering. IGGT: HDBSCAN. N denotes the number of frames.

Method	$N = 8$		$N = 16$		$N = 32$		$N = 100$	
	Time(s)	Mem(GB)	Time(s)	Mem(GB)	Time(s)	Mem(GB)	Time(s)	Mem(GB)
Ours	0.78	0.7	1.60	0.7	2.98	0.7	7.43	0.7
IGGT	105.8	13.2	418.3	25.85	OOM	OOM	OOM	OOM

6 Conclusion

We presented IGGT4D, a streaming geometry-instance framework for online 4D scene understanding. IGGT4D jointly predicts camera motion, scene geometry, and temporally consistent instance features via causal spatial-temporal modeling and geometry-grounded instance prediction. We also introduced InsScene4D-147K, a large-scale dataset with geometry-consistent instance annotations across real/synthetic and static/dynamic scenes. Experiments on reconstruction, pose estimation, instance tracking, and open-vocabulary segmentation show that IGGT4D improves object-level consistency while preserving scalable streaming inference.

Limitations. InsScene4D-147K scales 4D instance supervision, but broader data coverage is needed for stronger robustness and generalization. IGGT4D remains mainly supervised, motivating future work on self-supervised learning and larger curated supervision. Our evaluations are also perception-centric; integrating embodied actions and interaction feedback is a key step toward embodied scene understanding.

References

- [1] Johannes L Schonberger and Jan-Michael Frahm. Structure-from-motion revisited. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 4104–4113, 2016.
- [2] Johannes L Schönberger, Enliang Zheng, Jan-Michael Frahm, and Marc Pollefeys. Pixelwise view selection for unstructured multi-view stereo. In *European conference on computer vision*, pages 501–518. Springer, 2016.
- [3] Carlos Campos, Richard Elvira, Juan J Gómez Rodríguez, José MM Montiel, and Juan D Tardós. Orb-slam3: An accurate open-source library for visual, visual-inertial, and multimap slam. *IEEE transactions on robotics*, 37(6):1874–1890, 2021.
- [4] Tingyang Xiao, Xiaolin Zhou, Liu Liu, Wei Sui, Wei Feng, Jiaxiong Qiu, Xinjie Wang, and Zhizhong Su. Geoflow-slam: A robust tightly-coupled rgbd-inertial and legged odometry fusion slam for dynamic legged robotics, 2025.
- [5] Zachary Teed and Jia Deng. Droid-slam: Deep visual slam for monocular, stereo, and rgb-d cameras. *Advances in neural information processing systems*, 34:16558–16569, 2021.
- [6] Zihan Zhu, Songyou Peng, Viktor Larsson, Weiwei Xu, Hujun Bao, Zhaopeng Cui, Martin R Oswald, and Marc Pollefeys. Nice-slam: Neural implicit scalable encoding for slam. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 12786–12796, 2022.
- [7] Tingyang Xiao, Liu Liu, Wei Feng, Zhengyu Zou, Xiaolin Zhou, Wei Sui, Hao Li, Dingwen Zhang, and Zhizhong Su. Iris-slam: Unified geo-instance representations for robust semantic localization and mapping, 2026.
- [8] Abdelrhman Werby, Chenguang Huang, Martin Büchner, Abhinav Valada, and Wolfram Burgard. Hierarchical open-vocabulary 3d scene graphs for language-grounded robot navigation. In *First Workshop on Vision-Language Models for Navigation and Manipulation at ICRA 2024*, 2024.
- [9] Qiao Gu, Ali Kuwajerwala, Sacha Morin, Krishna Murthy Jatavallabhula, Bipasha Sen, Aditya Agarwal, Corban Rivera, William Paul, Kirsty Ellis, Rama Chellappa, et al. Conceptgraphs: Open-vocabulary 3d scene graphs for perception and planning. In *2024 IEEE International Conference on Robotics and Automation (ICRA)*, pages 5021–5028. IEEE, 2024.
- [10] Jianyuan Wang, Minghao Chen, Nikita Karaev, Andrea Vedaldi, Christian Rupprecht, and David Novotny. Vggt: Visual geometry grounded transformer. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 5294–5306, 2025.
- [11] Nikhil Keetha, Norman Müller, Johannes Schönberger, Lorenzo Porzi, Yuchen Zhang, Tobias Fischer, Arno Knapitsch, Duncan Zauss, Ethan Weber, Nelson Antunes, et al. Mapanything: Universal feed-forward metric 3d reconstruction. *arXiv preprint arXiv:2509.13414*, 2025.
- [12] Yifan Wang, Jianjun Zhou, Haoyi Zhu, Wenzheng Chang, Yang Zhou, Zizun Li, Junyi Chen, Jiangmiao Pang, Chunhua Shen, and Tong He. π^3 : Permutation-equivariant visual geometry learning. *arXiv preprint arXiv:2507.13347*, 2025.
- [13] Haotong Lin, Sili Chen, Junhao Liew, Donny Y Chen, Zhenyu Li, Guang Shi, Jiashi Feng, and Bingyi Kang. Depth anything 3: Recovering the visual space from any views. *arXiv preprint arXiv:2511.10647*, 2025.
- [14] Hengyi Wang and Lourdes Agapito. 3d reconstruction with spatial memory. In *2025 International Conference on 3D Vision (3DV)*, pages 78–89. IEEE, 2025.
- [15] Qianqian Wang, Yifei Zhang, Aleksander Holynski, Alexei A Efros, and Angjoo Kanazawa. Continuous 3d perception model with persistent state. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 10510–10522, 2025.
- [16] Yushi Lan, Yihang Luo, Fangzhou Hong, Shangchen Zhou, Honghua Chen, Zhaoyang Lyu, Shuai Yang, Bo Dai, Chen Change Loy, and Xingang Pan. Stream3r: Scalable sequential 3d reconstruction with causal transformer. *arXiv preprint arXiv:2508.10893*, 2025.

- [17] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PmLR, 2021.
- [18] Boyi Li, Kilian Q Weinberger, Serge Belongie, Vladlen Koltun, and René Ranftl. Language-driven semantic segmentation. *arXiv preprint arXiv:2201.03546*, 2022.
- [19] Golnaz Ghiasi, Xiuye Gu, Yin Cui, and Tsung-Yi Lin. Scaling open-vocabulary image segmentation with image-level labels. In *European conference on computer vision*, pages 540–557. Springer, 2022.
- [20] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 4015–4026, 2023.
- [21] Justin Kerr, Chung Min Kim, Ken Goldberg, Angjoo Kanazawa, and Matthew Tancik. Lerf: Language embedded radiance fields. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 19729–19739, 2023.
- [22] Songyou Peng, Kyle Genova, Chiyu Jiang, Andrea Tagliasacchi, Marc Pollefeys, Thomas Funkhouser, et al. Openscene: 3d scene understanding with open vocabularies. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 815–824, 2023.
- [23] Ayça Takmaz, Elisabetta Fedele, Robert W Sumner, Marc Pollefeys, Federico Tombari, and Francis Engelmann. Openmask3d: Open-vocabulary 3d instance segmentation. *arXiv preprint arXiv:2306.13631*, 2023.
- [24] Xiangyu Sun, Haoyi Jiang, Liu Liu, Seungtae Nam, Gyeongjin Kang, Xinjie Wang, Wei Sui, Zhizhong Su, Wenyu Liu, Xinggang Wang, et al. Uni3r: Unified 3d reconstruction and semantic understanding via generalizable gaussian splatting from unposed multi-view images. *arXiv preprint arXiv:2508.03643*, 2025.
- [25] Shijie Zhou, Haoran Chang, Sicheng Jiang, Zhiwen Fan, Zehao Zhu, Dejia Xu, Pradyumna Chari, Suyu You, Zhangyang Wang, and Achuta Kadambi. Feature 3dgs: Supercharging 3d gaussian splatting to enable distilled feature fields. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 21676–21685, 2024.
- [26] Yining Hong, Haoyu Zhen, Peihao Chen, Shuhong Zheng, Yilun Du, Zhenfang Chen, and Chuhan Gan. 3d-llm: Injecting the 3d world into large language models. *Advances in Neural Information Processing Systems*, 36:20482–20494, 2023.
- [27] Chenming Zhu, Tai Wang, Wenwei Zhang, Jiangmiao Pang, and Xihui Liu. Llava-3d: A simple yet effective pathway to empowering llms with 3d-awareness. *arXiv preprint arXiv:2409.18125*, 2024.
- [28] Zhiwen Fan, Jian Zhang, Renjie Li, Junge Zhang, Runjin Chen, Hezhen Hu, Kevin Wang, Huaizhi Qu, Shijie Zhou, Dilin Wang, Zhicheng Yan, Hongyu Xu, Justin Theiss, Tianlong Chen, Jiachen Li, Zhengzhong Tu, Zhangyang Wang, and Rakesh Ranjan. Vlm-3r: Vision-language models augmented with instruction-aligned 3d reconstruction, 2025.
- [29] Haoyi Jiang, Liu Liu, Xinjie Wang, Yonghao He, Wei Sui, Zhizhong Su, Wenyu Liu, and Xinggang Wang. Spa3r: Predictive spatial field modeling for 3d visual reasoning, 2026.
- [30] Shuzhe Wang, Vincent Leroy, Yohann Cabon, Boris Chidlovskii, and Jerome Revaud. Dust3r: Geometric 3d vision made easy. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 20697–20709, 2024.
- [31] Vincent Leroy, Yohann Cabon, and Jérôme Revaud. Grounding image matching in 3d with mast3r. In *European conference on computer vision*, pages 71–91. Springer, 2024.

- [32] Haosong Peng, Hao Li, Yalun Dai, Yushi Lan, Yihang Luo, Tianyu Qi, Zhengshen Zhang, Yufeng Zhan, Junfei Zhang, Wenchao Xu, and Ziwei Liu. Omnivgt: Omni-modality driven visual geometry grounded transformer. *arXiv preprint arXiv:2511.10560*, 2025.
- [33] Yohann Cabon, Lucas Stofl, Leonid Antsfeld, Gabriela Csurka, Boris Chidlovskii, Jerome Revaud, and Vincent Leroy. Must3r: Multi-view network for stereo 3d reconstruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 1050–1060, 2025.
- [34] Minghan Qin, Wanhua Li, Jiawei Zhou, Haoqian Wang, and Hanspeter Pfister. Langsplat: 3d language gaussian splatting. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 20051–20060, 2024.
- [35] Hao Li, Minghan Qin, Zhengyu Zou, Diqi He, Xinhao Ji, Bohan Li, Bingquan Dai, Dingwen Zhang, and Junwei Han. Langsurf: Language-embedded surface gaussians for 3d scene understanding, 2026.
- [36] Zhiwen Fan, Jian Zhang, Wenyan Cong, Peihao Wang, Renjie Li, Kairun Wen, Shijie Zhou, Achuta Kadambi, Zhangyang Wang, Danfei Xu, et al. Large spatial model: End-to-end unposed images to semantic 3d. *Advances in neural information processing systems*, 37:40212–40229, 2024.
- [37] Hao Li, Zhengyu Zou, Fangfu Liu, Xuanyang Zhang, Fangzhou Hong, Yukang Cao, Yushi Lan, Manyuan Zhang, Gang Yu, Dingwen Zhang, et al. Iggt: Instance-grounded geometry transformer for semantic 3d reconstruction. *arXiv preprint arXiv:2510.22706*, 2025.
- [38] Leland McInnes, John Healy, Steve Astels, et al. hdbscan: Hierarchical density based clustering. *J. Open Source Softw.*, 2(11):205, 2017.
- [39] An Yang, Anfeng Li, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao, Chengen Huang, Chenxu Lv, et al. Qwen3 technical report. *arXiv preprint arXiv:2505.09388*, 2025.
- [40] Shuai Bai, Yuxuan Cai, Ruizhe Chen, Keqin Chen, Xionghui Chen, Zesen Cheng, Lianghao Deng, Wei Ding, Chang Gao, Chunjiang Ge, et al. Qwen3-vl technical report. *arXiv preprint arXiv:2511.21631*, 2025.
- [41] Tinghui Zhou, Richard Tucker, John Flynn, Graham Fyffe, and Noah Snavely. Stereo magnification: Learning view synthesis using multiplane images. *arXiv preprint arXiv:1805.09817*, 2018.
- [42] Chandan Yeshwanth, Yueh-Cheng Liu, Matthias Nießner, and Angela Dai. Scannet++: A high-fidelity dataset of 3d indoor scenes. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 12–22, 2023.
- [43] Xiaqing Pan, Nicholas Charron, Yongqian Yang, Scott Peters, Thomas Whelan, Chen Kong, Omkar Parkhi, Richard Newcombe, and Yuheng Carl Ren. Aria digital twin: A new benchmark dataset for egocentric 3d machine perception. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 20133–20143, 2023.
- [44] John McCormac, Ankur Handa, Stefan Leutenegger, and Andrew J Davison. Scenenet rgb-d: Can 5m synthetic images beat generic imagenet pre-training on indoor segmentation? In *Proceedings of the IEEE international conference on computer vision*, pages 2678–2687, 2017.
- [45] Alexander Raistrick, Lingjie Mei, Karhan Kayan, David Yan, Yiming Zuo, Beining Han, Hongyu Wen, Meenal Parakh, Stamatis Alexandropoulos, Lahav Lipson, et al. Infinigen indoors: Photorealistic indoor scenes using procedural generation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 21783–21794, 2024.
- [46] Mike Roberts, Jason Ramapuram, Anurag Ranjan, Atulit Kumar, Miguel Angel Bautista, Nathan Paczan, Russ Webb, and Joshua M Susskind. Hypersim: A photorealistic synthetic dataset for holistic indoor scene understanding. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 10912–10922, 2021.

- [47] Yunze Liu, Yun Liu, Che Jiang, Kangbo Lyu, Weikang Wan, Hao Shen, Boqiang Liang, Zhoujie Fu, He Wang, and Li Yi. Hoi4d: A 4d egocentric dataset for category-level human-object interaction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 21013–21022, 2022.
- [48] Jieru Mei, Alex Zihao Zhu, Xinchun Yan, Hang Yan, Siyuan Qiao, Liang-Chieh Chen, and Henrik Kretzschmar. Waymo open dataset: Panoramic video panoptic segmentation. In *European Conference on Computer Vision*, pages 53–72. Springer, 2022.
- [49] Tianxing Chen, Zhanxin Chen, Baijun Chen, Zijian Cai, Yibin Liu, Zixuan Li, Qiwei Liang, Xianliang Lin, Yiheng Ge, Zhenyu Gu, et al. Robotwin 2.0: A scalable data generator and benchmark with strong domain randomization for robust bimanual robotic manipulation. *arXiv preprint arXiv:2506.18088*, 2025.
- [50] Klaus Greff, Francois Belletti, Lucas Beyer, Carl Doersch, Yilun Du, Daniel Duckworth, David J Fleet, Dan Gnanapragasam, Florian Golemo, Charles Herrmann, et al. Kubric: A scalable dataset generator. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 3749–3761, 2022.
- [51] Nikita Karaev, Ignacio Rocco, Benjamin Graham, Natalia Neverova, Andrea Vedaldi, and Christian Rupprecht. Dynamicstereo: Consistent dynamic depth from stereo videos. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 13229–13239, 2023.
- [52] Yang Zheng, Adam W Harley, Bokui Shen, Gordon Wetzstein, and Leonidas J Guibas. Pointodyssey: A large-scale synthetic dataset for long-term point tracking. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 19855–19865, 2023.
- [53] Yohann Cabon, Naila Murray, and Martin Humenberger. Virtual kitti 2. *arXiv preprint arXiv:2001.10773*, 2020.
- [54] Brian Curless and Marc Levoy. A volumetric method for building complex models from range images. In *Proceedings of the 23rd annual conference on Computer graphics and interactive techniques*, pages 303–312, 1996.
- [55] Nikhila Ravi, Valentin Gabeur, Yuan-Ting Hu, Ronghang Hu, Chaitanya Ryali, Tengyu Ma, Haitham Khedr, Roman Rädle, Chloe Rolland, Laura Gustafson, et al. Sam 2: Segment anything in images and videos. *arXiv preprint arXiv:2408.00714*, 2024.
- [56] Thomas Schops, Johannes L Schonberger, Silvano Galliani, Torsten Sattler, Konrad Schindler, Marc Pollefeys, and Andreas Geiger. A multi-view stereo benchmark with high-resolution images and multi-camera videos. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 3260–3269, 2017.
- [57] Jamie Shotton, Ben Glocker, Christopher Zach, Shahram Izadi, Antonio Criminisi, and Andrew Fitzgibbon. Scene coordinate regression forests for camera relocalization in rgb-d images. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2930–2937, 2013.
- [58] Dong Zhuo, Wenzhao Zheng, Jiahe Guo, Yuqi Wu, Jie Zhou, and Jiwen Lu. Streaming 4d visual geometry transformer. *arXiv preprint arXiv:2507.11539*, 2025.
- [59] Zizun Li, Jianjun Zhou, Yifan Wang, Haoyu Guo, Wenzheng Chang, Yang Zhou, Haoyi Zhu, Junyi Chen, Chunhua Shen, and Tong He. Wint3r: Window-based streaming reconstruction with camera token pool. *arXiv preprint arXiv:2509.05296*, 2025.
- [60] Lin-Zhuo Chen, Jian Gao, Yihang Chen, Ka Leong Cheng, Yipengjing Sun, Liangxiao Hu, Nan Xue, Xing Zhu, Yujun Shen, Yao Yao, et al. Geometric context transformer for streaming 3d reconstruction. *arXiv preprint arXiv:2604.14141*, 2026.
- [61] Yuxi Xiao, Jianyuan Wang, Nan Xue, Nikita Karaev, Yuri Makarov, Bingyi Kang, Xing Zhu, Hujun Bao, Yujun Shen, and Xiaowei Zhou. Spatialtrackerv2: 3d point tracking made easy. *arXiv preprint arXiv:2507.12462*, 2025.

A Technical Appendices and Supplementary Material

A.1 Visualization of the Automated Geometry-Guided Annotation Pipeline

To demonstrate the effectiveness of our proposed automated geometry-guided annotation pipeline, Fig. 8 visualizes the generated annotations across the three diverse data sources. Furthermore, for the RealEstate10K (Re10K) scenes, we provide a qualitative comparison between our refined annotations and the prior vanilla annotations from InsScene-15K [37].

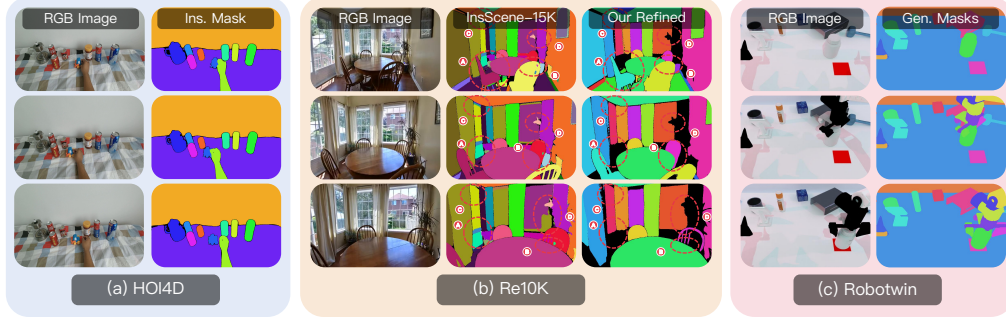


Figure 8: Qualitative evaluation of the automated geometry-guided annotation pipeline across three distinct sources (HOI4D, Re10K, and RoboTwin). For the Re10K scenes, the comparison illustrates how our approach overcomes the common failure modes observed in the vanilla InsScene-15K annotations: (a) over-segmentation, (b) false-positive segmentation, (c) identity switching, and (d) background leakage.

A.2 4D QA Scene Grounding

To demonstrate the capability of IGGT4D in supporting complex spatial-temporal reasoning, we evaluate 4D QA scene grounding using Large Multimodal Models (LMMs) [39, 40]. When provided with only RGB video streams, LMMs often struggle to track moving objects under challenging visual conditions. For example, as shown in Fig. 9, when a picked-up bottle moves from left to right, its appearance closely blends with the background. Consequently, the LMMs erroneously infer that the bottle has been moved out of view based on its motion trajectory. However, when augmented with our 4D-consistent instance features or masks, the LMMs can robustly track the object, correctly determine that it remains within the field of view, and accurately segment the bottle.

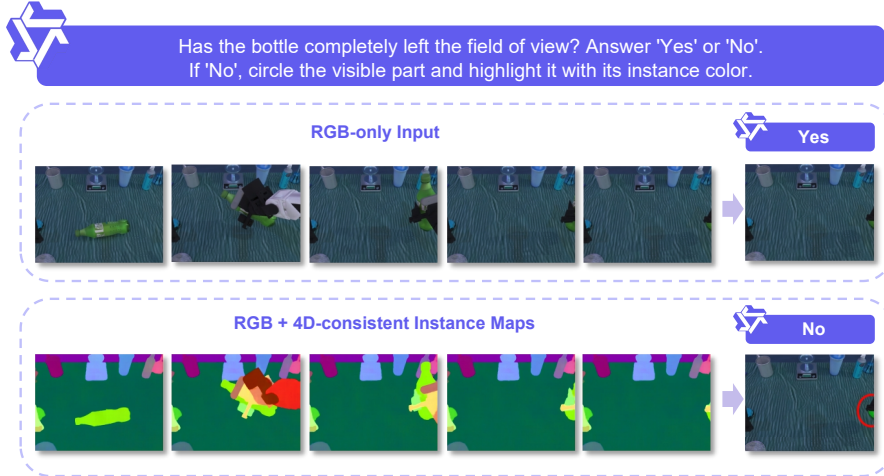


Figure 9: **4D QA Scene Grounding.** Comparison of spatial-temporal reasoning capabilities using LMMs. Given only RGB frames (top), the LMM fails to track the moving bottle as it blends into the background, erroneously concluding it has left the view. In contrast, by incorporating our 4D-consistent instance features (bottom), the LMM successfully tracks the object across frames, accurately grounds its location, and correctly answers the 4D semantic query despite challenging visual conditions.

A.3 Explanation of First-Frame Geometric Normalization

In our streaming training framework, we utilize the first-frame point cloud to normalize the geometric ground truth for the entire sequence. This design is crucial for preventing scale ambiguity. Consider an extreme scenario where global sequence-level normalization is applied instead. Suppose the model processes two different sequences that share an identical first frame. In the first sequence, the second frame captures a close-up of the ground, whereas in the second sequence, it captures an expansive open plaza. Under global normalization, the overall geometric scales of these two sequences would be drastically different.

Consequently, when the streaming model processes the identical first frame in both cases, it is forced to regress entirely different scale values. From the model’s perspective, observing only the first frame provides insufficient information to correctly infer the global scale of the yet-unseen future frames. This fundamentally leads to scale ambiguity and optimization conflicts. By anchoring the geometric normalization strictly to the first frame, we ensure that the scale is uniquely and consistently determined by the initial observation, completely eliminating this ambiguity and ensuring stable causal streaming training. Fig. 10 compares streaming predictions *without* versus *with* first-frame geometric normalization (FF-Norm).

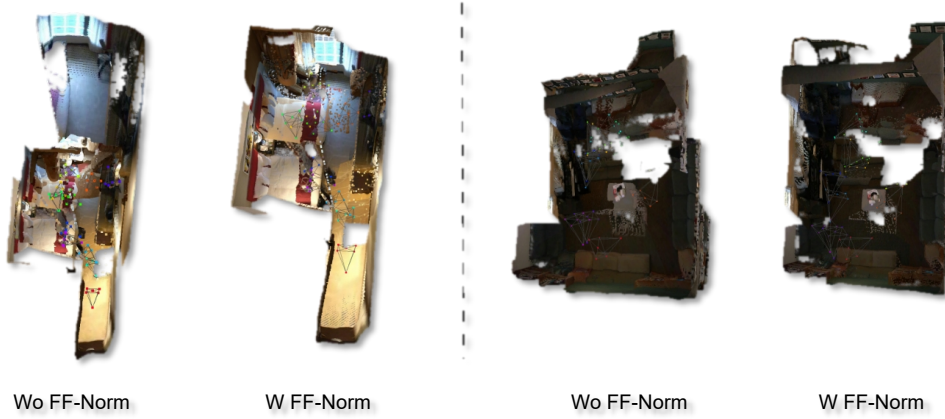


Figure 10: **First-frame geometric normalization (FF-Norm).** We compare streaming predictions *without* versus *with* first-frame geometric normalization.

A.4 Visualization of Streaming Clustering Masks

We further visualize instance-aware representations and the instance masks produced by our efficient streaming clustering. Fig. 11 shows PCA projections of the predicted instance features together with the corresponding temporally consistent masks, illustrating stable identity tracking across frames without explicit motion modeling.

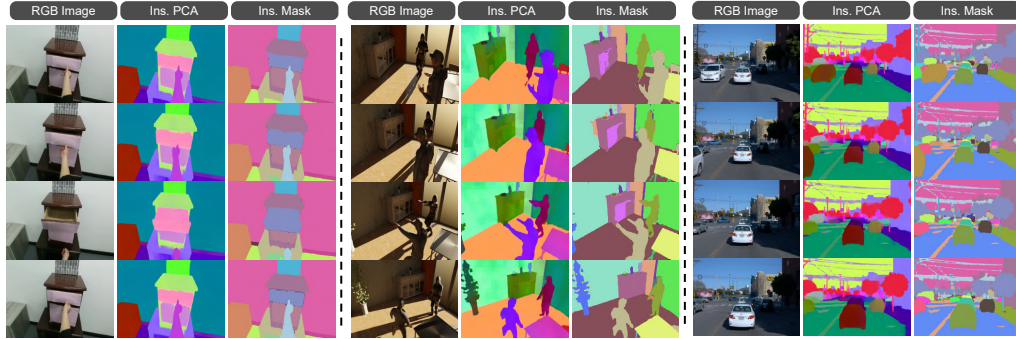


Figure 11: **Streaming clustering masks.** PCA visualization of instance features alongside masks obtained by our streaming clustering, demonstrating 4D-consistent instance segmentation in dynamic sequences.

A.5 Training Details

Our model is initialized from the DA3-Giant [13] architecture. We train IGGT4D on our constructed **InsScene4D-147K** dataset using 16 NVIDIA H20 GPUs. The training process is divided into two stages: the first 6 epochs focus exclusively on optimizing the streaming geometry, while the subsequent 9 epochs jointly optimize the geometry and instance branches. During training, the input image resolution varies between 504×504 and 504×280 . To simulate streaming sequences of varying lengths, the total number of frames per iteration is fixed at 24, with the sequence length and batch size dynamically adjusted ($B \in \{12, 8, 6, 4, 3, 2\}$). The initial learning rate is set to 2×10^{-4} for the instance branch and 1×10^{-5} for the geometry. Both learning rates are decayed following a cosine annealing schedule. Additionally, we apply a 20% probability of injecting ground-truth camera poses during the training. For all ablation studies, we adopt the DA3-Large architecture and train the models using 16 NVIDIA RTX 5090 GPUs.

A.6 Experimental Details

For *instance spatial tracking*, we compare with SpaTrackerV2 [61]+SAM [20], SAM2 [55], and IGGT [37]. Following the protocol in IGGT, we integrate SAM into SpaTrackerV2 by utilizing tracking points as prompts for dense segmentation, and modify SAM2 to support multi-view dense segmentation and tracking. We use HOI4D [47], Waymo [48], ScanNet++ [42], and PointOdyssey [52]. HOI4D contains about 40 frames per scene and is manually annotated by us. Waymo and ScanNet++ each contain about 100 frames per scene; we use the official instance annotations and manually remove several small objects. For PointOdyssey, we use scenes with about 100 frames from the official test set, manually select a subset of masks, and merge them when needed.

For *camera pose estimation and 3D reconstruction*, we compare our method with offline full-attention models (VGGT [10], MapAnything [11], Pi3X [12], DA3 [13]) and online streaming models (CUT3R [15], StreamVGGT [58], Wint3R [59], Stream3R [16], LingBot-Map [60]). Among them, MapAnything, Pi3X, DA3, and our method support the injection of ground-truth camera poses. Among the streaming methods, our method, CUT3R, StreamVGGT, and Stream3R perform frame-by-frame inference; Wint3R utilizes overlapping sliding windows with a window size of 4 and a stride of 2; and LingBot-Map initially applies full attention to the first 8 frames, subsequently reconstructing the remaining frames in a streaming manner.

Our evaluation datasets (HiRoom, ETH3D [56], 7Scenes [57], and ScanNet++ [42]) and protocol follow the DA3 benchmark. To enable streaming inference, we reorder each sequence to ensure that every frame shares visual overlap with at least one preceding frame. We adopt the robust evaluation pipeline from DA3: predicted poses are aligned to the ground truth using RANSAC-based *evo* alignment, and the aligned poses alongside predicted depths are integrated via TSDF fusion to assess 3D consistency. For camera pose estimation, we report the Area Under the Curve (AUC) at error thresholds of 3° (AUC@3) and 30° (AUC@30), where accuracy is determined by the minimum of the Relative Rotation Accuracy (RRA) and Relative Translation Accuracy (RTA). For 3D reconstruction, we evaluate the Chamfer Distance (CD) and F1-score. Let $\mathcal{P}_{\text{pred}}$ and $\mathcal{P}_{\text{gt}}$ denote the predicted and ground-truth point clouds, respectively:

$$\begin{aligned}
 d(\mathbf{x}, \mathcal{S}) &= \min_{\mathbf{y} \in \mathcal{S}} \|\mathbf{x} - \mathbf{y}\|_2, \\
 \text{Accuracy} &= \frac{1}{|\mathcal{P}_{\text{pred}}|} \sum_{\mathbf{p} \in \mathcal{P}_{\text{pred}}} d(\mathbf{p}, \mathcal{P}_{\text{gt}}), & \text{Completeness} &= \frac{1}{|\mathcal{P}_{\text{gt}}|} \sum_{\mathbf{g} \in \mathcal{P}_{\text{gt}}} d(\mathbf{g}, \mathcal{P}_{\text{pred}}), \\
 \text{Precision} &= \frac{1}{|\mathcal{P}_{\text{pred}}|} \sum_{\mathbf{p} \in \mathcal{P}_{\text{pred}}} [d(\mathbf{p}, \mathcal{P}_{\text{gt}}) < \tau], & \text{Recall} &= \frac{1}{|\mathcal{P}_{\text{gt}}|} \sum_{\mathbf{g} \in \mathcal{P}_{\text{gt}}} [d(\mathbf{g}, \mathcal{P}_{\text{pred}}) < \tau], \\
 \text{CD} &= \frac{\text{Accuracy} + \text{Completeness}}{2}, & \text{F1-score} &= \frac{2 \text{Precision} \text{Recall}}{\text{Precision} + \text{Recall}}.
 \end{aligned}$$

We report the Chamfer Distance (CD) for 3D reconstruction in Tab. 6. Our method still achieves the best average performance.

Table 6: **3D Reconstruction Chamfer Distance (CD) on HiRoom, ETH3D, 7Scenes, and ScanNet++**. Evaluated without (w/o p.) and with (w/ p.) ground-truth camera poses. Lower is better. Methods are grouped into *full-attention* (offline) and *streaming* (online). Best and second-best results are highlighted in **bold** and underline, respectively.

Methods	Avg		HiRoom		ETH3D		7Scenes		ScanNet++	
	CD(w/o p.)↓	CD(w/ p.)↓	CD(w/o p.)↓	CD(w/ p.)↓	CD(w/o p.)↓	CD(w/ p.)↓	CD(w/o p.)↓	CD(w/ p.)↓	CD(w/o p.)↓	CD(w/ p.)↓
<i>Full-attention (offline)</i>										
VGGT	0.2220	0.1838	0.0968	0.0646	0.5669	0.4664	0.1446	0.1269	0.0798	0.0771
MapAnything	0.2472	0.1883	0.0863	0.0750	0.6478	0.4919	0.1263	0.1111	0.1283	0.0754
Pi3X	<u>0.1889</u>	<u>0.1458</u>	<u>0.0449</u>	<u>0.0307</u>	<u>0.5326</u>	<u>0.3990</u>	0.1078	0.0897	<u>0.0702</u>	0.0640
DA3	0.1688	0.1457	0.0355	0.0202	0.4499	0.3893	<u>0.1216</u>	<u>0.1080</u>	0.0680	<u>0.0651</u>
<i>Streaming (online)</i>										
CUT3R	0.4691	0.4235	0.7885	0.7858	0.7618	0.6409	0.1586	0.1454	0.1674	0.1219
StreamVGGT	0.3827	0.3410	0.2806	0.2036	0.9274	0.8623	0.1573	0.1574	0.1655	0.1407
Wint3R	0.3131	0.2629	0.2644	0.2410	0.6525	<u>0.5368</u>	0.1675	0.1413	0.1680	0.1328
Stream3R	0.3223	0.2569	0.1278	0.0911	0.7271	0.5542	0.3046	0.2609	0.1298	0.1217
LingBot-Map	0.2431	<u>0.2158</u>	0.1019	0.0796	0.6451	0.5772	0.1352	<u>0.1203</u>	0.0904	0.0860
Ours	0.1852	0.1556	0.0403	0.0354	0.4822	0.3976	<u>0.1370</u>	0.1154	0.0814	0.0740

A.7 Tri-DPT Geometry-Instance Head

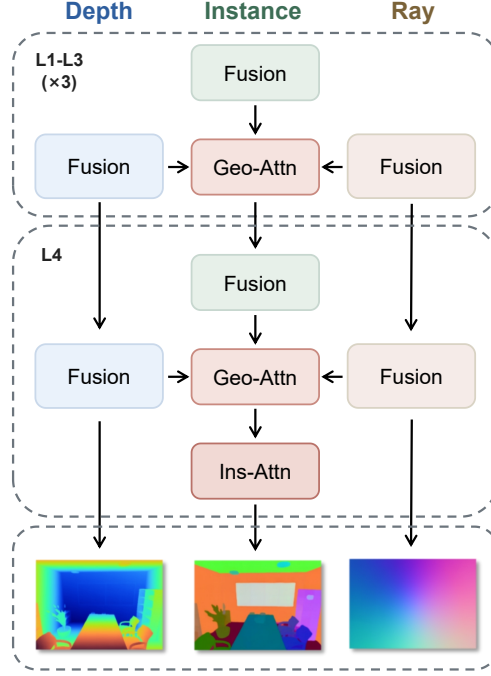


Figure 12: **Tri-DPT head**. The head jointly decodes depth, ray, and instance features, with geometry-aware attention injecting depth and ray priors into the instance branch.

We design a Tri-DPT head to jointly decode geometry and instance representations from streaming multi-scale tokens $\{\mathbf{F}_t^{(l)}\}_{l=1}^4$. Rather than treating instance prediction as an independent add-on, Tri-DPT uses a unified DPT-style decoder with three coordinated output branches for the depth map D_t , ray map R_t , and instance feature map S_t . The multi-scale tokens are reassembled and fused progressively to recover spatial resolution, allowing dense geometric predictions and instance embeddings to be produced in the same spatially aligned representation.

As shown in Fig. 12, instead of simply appending an independent instance head, the instance branch explicitly leverages multi-scale geometric features from the depth and ray branches. At the four fusion stages, depth features and ray features are fused as geometric priors and injected into the instance branch through geometry-aware attention. At the final stage, instance attention is further introduced to refine the instance features. As a result, the predicted instance features are not only driven by appearance cues, but are also tightly coupled with the underlying geometric structure. This design allows instance features to benefit from spatial-temporally consistent geometric constraints even under frame-by-frame streaming inputs, enabling stable 4D scene-level instance awareness.