

ERank in Latent Space as an Image-Complexity and Richness Measure

Maksim Smirnov, Grigory Kononov, Anastasiia Linich, Egor Surkov, Egor Shvetsov

We propose the effective rank (ERank) of the channel covariance of an image’s deep feature map as a per-sample, label-free measure of visual richness, computed from a single forward pass through a frozen pretrained encoder. ERank counts how many decorrelated channel directions an image activates, and we characterize its properties, including its behavior under noise. Empirically, ERank orders images from plain to visually rich, correlates with codec bitrate, sharpness, and edge density, and correlates with human complexity annotations on IC9600 with $r = 0.72$. As a data-selection criterion, removing low-ERank samples improves super-resolution and removing high-ERank samples improves OCR, in both pretraining and finetuning, while selection does not help classification, segmentation, or denoising. ERank is thus a cheap richness signal, useful exactly when task difficulty is governed by input richness.

1 Introduction

In this work we demonstrate that the *effective rank* (ERank) Roy and Vetterli (2007) computed over channels or tokens of an image’s intermediate representation corresponds to image richness and diversity. To compute ERank, an image is passed through a pretrained model, its spatial feature map from a given layer is flattened to obtain an $HW \times C$ matrix, and the exponential of the Shannon entropy of the normalized eigenvalues of the channel covariance is computed. The quantity has an appealing interpretation as it counts how many decorrelated channel directions the image activates, so a higher ERank corresponds to a less correlated, more diverse feature map. Beyond this intuition, the measure has appealing properties. It is a smooth, differentiable relaxation of matrix rank, invariant to isotropic scaling and to rotations of channel space; we discuss these properties in detail and provide connections to other measures in Appendix B.

We validate the measure along four axes. **First**, *visual analysis* shows that sorting images by ERank produces an interpretable ordering from plain to visually rich images. **Second**, our analysis demonstrates that ERank correlates with codec file size, sharpness, and edge density ($r \approx 0.5$) but not with distortion or colorfulness ($r \approx 0.03$). Moreover, it strongly correlates with human complexity annotations on IC9600 Feng et al. (2022) with $r = 0.72$. **Third**, we evaluate ERank as a *data-selection criterion*, where training samples are ranked by their ERank score, a fraction is pruned, and the task model is trained on the rest. We evaluate both pretraining from scratch and finetuning from a checkpoint. Removing low-ERank samples improves super-resolution on DIV2K, while removing high-ERank samples helps OCR on IIIT5K, where visually rich samples are predominantly hard or noisy. In both tasks ERank beats random removal across pruning budgets. Finally, we demonstrate where data selection with ERank does not help. ERank-based selection does not improve classification, segmentation, or denoising, and we clarify why in the corresponding sections.

2 Related Work

Label-free evaluation of per-sample characteristics is important in a wide range of applied tasks, including curriculum and active learning Toneva et al. (2019); Sener and Savarese (2018) and data selection for pretraining at scale Sorscher et al. (2022); Abbas et al. (2023). Moreover, per-sample complexity scores have been used to allocate computation in dynamic architectures to spend less compute on easy inputs Han et al. (2021); Huang et al. (2018); Wang et al. (2021), in particular ICAR Williams-Lekuona and Cosma (2026) routes images through a vision-language encoder at a depth chosen by a predicted complexity score.

Quality metrics in pixel space. A long line of proxies operates directly in pixel space. Shannon entropy of the intensity histogram [Shannon \(1948\)](#) and colorfulness indices [Hasler and Süssstrunk \(2003\)](#) summarize first-order statistics; fractal dimension captures the self-similarity of natural textures [Pentland \(1984\)](#); edge density derived from the Canny detector [Canny \(1986\)](#) and gradient-energy sharpness scores such as Tenengrad [Krotkov \(1988\)](#); [Pertuz et al. \(2013\)](#) quantify high-frequency content; and the file size produced by a standard codec such as JPEG [Wallace \(1992\)](#) serves as a computable surrogate for Kolmogorov complexity [Li and Vitányi \(2008\)](#) and as a difficulty signal. No-reference quality measures such as BRISQUE [Mittal et al. \(2012\)](#) score distortion and naturalness rather than richness. These measures are cheap but blind to semantics and confounded by pixel noise. To move beyond pixel statistics, the unsupervised activation energy (UAE) [Saracee et al. \(2020\)](#) measures image complexity in the activation space of a pretrained encoder, similar in spirit to our approach. We evaluate its correlation with human complexity annotations alongside ERank in Section 4.3.

Metrics for Data Selection. Data pruning and coreset selection typically rely on one of two strategies - removing easy and keeping hard samples, as ranked by training dynamics or error signals [Toneva et al. \(2019\)](#); [Paul et al. \(2021\)](#); [Xia et al. \(2023\)](#), or selecting samples that better cover the data distribution [Sener and Savarese \(2018\)](#); [Abbas et al. \(2023\)](#). In this work we demonstrate that per-sample diversity is a complementary signal which enables effective selection of training subsets for super-resolution and OCR.

Metrics for Dataset Characterization. Characterizing data collectively, at the level of a full dataset in a latent space, is well established for measuring model quality and sample-set diversity. FID [Heusel et al. \(2017\)](#), Inception Score [Salimans et al. \(2016\)](#), precision/recall [Sajjadi et al. \(2018\)](#); [Kynkäänniemi et al. \(2019\)](#), and density/coverage [Naeem et al. \(2020\)](#) measure fidelity and coverage of a sample set against a reference distribution, treating each sample as a single embedding vector. ERank has likewise been applied at this level, the Vendi Score [Friedman and Dieng \(2023\)](#) computes ERank of a kernel matrix of pairwise sample similarities to measure the diversity of a collection, and RankMe [Garrido et al. \(2023\)](#) computes ERank of the covariance of sample embeddings over a dataset to evaluate self-supervised models without labels. While these works are the closest to ours, the key difference is that we compute ERank *within* a single sample, over the channels or tokens of its feature map, yielding a per-sample score rather than a set-level one.

3 ERank as a Measure of Image Richness

3.1 Setup and Definition

Let f be a pretrained encoder and let $f^{(\ell)}$ denote its intermediate representation at layer ℓ . For an image I , the feature map $f^{(\ell)}(I)$ is flattened into $X^{(\ell)} \in \mathbb{R}^{N \times C}$, where $N = HW$ is spatial size and C the number of channels (or tokens, for transformer encoders) at layer ℓ . Let $\bar{X}^{(\ell)}$ denote $X^{(\ell)}$ after centering each column (channel), and let

$$\Sigma^{(\ell)} = \frac{1}{N} \bar{X}^{(\ell)\top} \bar{X}^{(\ell)} \in \mathbb{R}^{C \times C} \quad (1)$$

be the empirical channel covariance at layer ℓ , with eigenvalues $\lambda_1 \geq \dots \geq \lambda_C \geq 0$. Writing $p_i = \lambda_i / \sum_j \lambda_j$ for the normalized spectrum, the *ERank* [Roy and Vetterli \(2007\)](#) of the image at layer ℓ is

$$\text{erank}(I; f, \ell) = \exp\left(-\sum_{i=1}^C p_i \log p_i\right), \quad (2)$$

with the convention $0 \log 0 = 0$. Richness is thus always measured *relative to a chosen encoder f and layer ℓ* . We write $\text{erank}(I)$ for brevity.

Properties of ERank. We summarize the properties of ERank, which determine where it applies and where it fails, deferring statements and proofs to Appendix B. ERank is bounded between 1 and $\min(N, C)$, invariant to isotropic scaling and to rotations of channel space, and unlike matrix rank continuous and differentiable. An exact identity ties it to pairwise channel correlation and to mean pairwise similarity via the Rényi family - ERank is maximal when channels are decorrelated and collapses as they correlate. It increases monotonically under additive decorrelated noise, so it cannot separate detail from noise on its own - a limitation resolved only by the encoder, motivating the next section.

Why Measure Richness in Feature Space? Three considerations motivate computing ERank on features rather than pixels. (i) *Dimensionality*: the pixel channel spectrum is three-dimensional (RGB), capping

ERank at 3, whereas encoders provide from dozens to thousands of semantically tuned channels. *(ii) Manifold structure:* natural images concentrate near low-dimensional structure, and pretrained encoders parameterize coordinates along it [Ansuini et al. \(2019\)](#); [Pope et al. \(2021\)](#), so channel activity reflects position on the image manifold rather than raw pixel statistics. *(iii) Implicit low-rank bias:* gradient-based training is biased toward low-rank solutions [Arora et al. \(2019\)](#); [Gunasekar et al. \(2017\)](#); [Huh et al. \(2023\)](#), and trained representations exhibit rapidly decaying eigenspectra [Jing et al. \(2022\)](#); [Papayan et al. \(2020\)](#) - a trained encoder therefore does not maintain channel directions it does not need for its objective. When an image nevertheless elicits a broad channel spectrum, that breadth is informative about the *input* rather than an artifact of the representation.

4 Experiments & Results

4.1 Experimental Setup

Scoring backbones. Every image is scored by a single forward pass through one of two pretrained encoders: **ResNet-18** [He et al. \(2016\)](#) pretrained on ImageNet and **CLIP ViT-B/32** [Radford et al. \(2021\)](#). We use layers $\{1, 2, 3, 4\}$ of the ResNet and blocks $\{2, 5, 8, 11\}$ of CLIP, each feature map is flattened into a matrix of spatial positions (patch tokens for CLIP) by channels. ERank is computed on each layer separately and averaged, yielding one per-image score. The layers were fixed a priori to span the network depth and were not tuned.

Datasets and task models. The correlation analysis use random LAION [Schuhmann et al. \(2022\)](#) subsets of fixed sizes and full IC9600 [Feng et al. \(2022\)](#). The data-selection experiments (Sec. 4.4) cover five tasks: **(1)** $\times 4$ super-resolution (DIV2K [Agustsson and Timofte \(2017\)](#), EDSR [Lim et al. \(2017\)](#)), **(2)** scene-text recognition (IIIT5K [Mishra et al. \(2012\)](#), CRNN [Shi et al. \(2017\)](#) with CTC loss [Graves et al. \(2006\)](#)), **(3)** classification (MNIST [LeCun et al. \(1998\)](#), CIFAR-10 [Krizhevsky \(2009\)](#), ResNet-18), **(4)** Gaussian denoising (DIV2K, $\sigma=25$, EDSR), and **(5)** semantic segmentation (Pascal VOC [Everingham et al. \(2010\)](#), DeepLabV3-ResNet50 [Chen et al. \(2017\)](#)). Selection is evaluated in two regimes *pretrain*, training from scratch and *finetune*. For finetuning we used EDSR $\times 4$ from an EDSR $\times 2$ checkpoint trained on all 800 DIV2K images, and CRNN with a frozen ImageNet ResNet-18 stem and trainable CTC head.

Pruning protocol. We rank the training set by a score, remove 10–50% of the lowest or highest-scoring samples, retrain on the remainder, and compare against **random** removal at the same budget as a data-selection baseline [Guo et al. \(2022\)](#); [Sorscher et al. \(2022\)](#). All models are trained to convergence.

4.2 What ERank selects - visual analysis

In Figure 1 we demonstrate the highest- and lowest-scoring samples of the ERank across the datasets, scores are obtained with CLIP model as encoder. The pattern is consistent across datasets, *Low-ERank* images are plain and low-detail, whereas *High-ERank* images are visually busy, textured, multi-object, and high-frequency.

4.3 ERank is an image-complexity score

Visual analysis suggests that ERank is an image-complexity measure. We test this directly by correlating ERank with five representative statistics on LAION (Table 2): (1) Tenengrad sharpness, (2) JPEG bytes-per-pixel as a compressibility proxy, (3) Canny edge density, (4) No-Reference IQA BRISQUE distortion, and (5) colorfulness. The largest associations are with compressibility, sharpness, and edge density, while distortion and colorfulness are negligible. This supports interpreting ERank as a compact detail/complexity signal rather than as a generic quality or color score.

Controlled corruption probe. We further probe how ERank reacts to degradations of a single image for that we corrupt 1000 LAION images with cutout, Gaussian pixel noise, and Gaussian blur, and report rank-shift of each image relative to its clean version, results are presented in Table 1. Blur causes the largest drops at early and middle layers of both backbones, confirming that ERank tracks high-frequency detail, while cutout shifts ranks only mildly. The sign flips at the deepest layers motivate averaging ERank across depths (or using middle layers only). We attribute the effect to late layers encoding task-aligned directions where a confidently

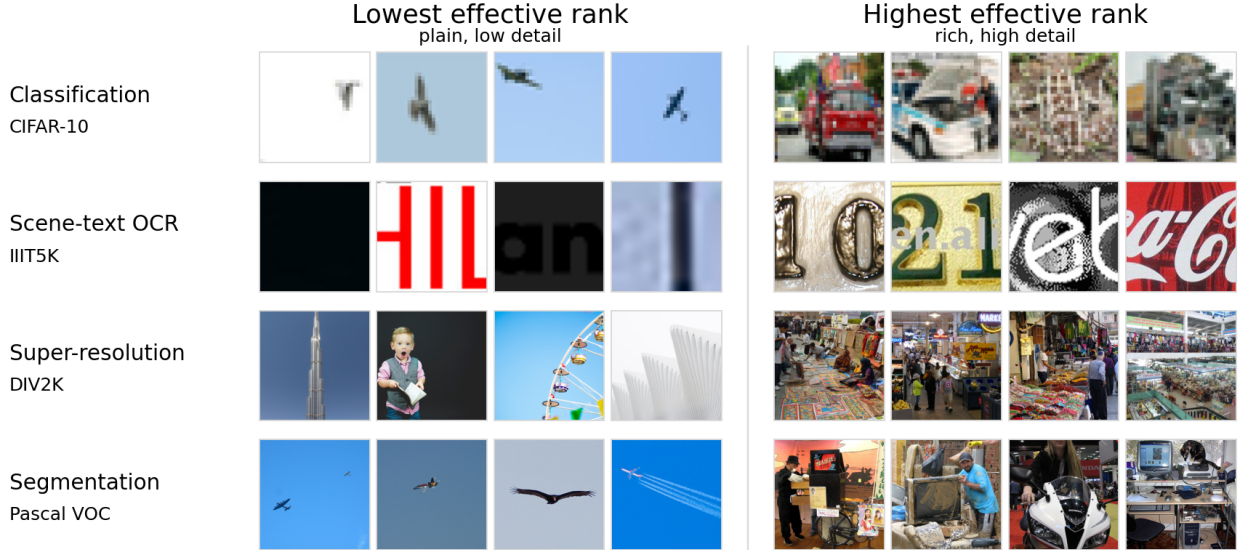


Figure 1 Images with highest and lowest ERank obtained with CLIP encoder across five task specific datasets.

recognized image concentrates on few such directions, while a corrupted, ambiguous input spreads energy across many, raising ERank.

Table 1 Controlled corruption probe on LAION (1000 samples). Each cell is the paired ERank rank-shift (corrupted minus clean).

Model	Layers	Cutout	Noise	Blur
ResNet-18	1	-36 ± 49	-158 ± 124	-498 ± 288
	3	$+4 \pm 79$	-127 ± 127	-322 ± 181
	4	$+101 \pm 150$	-136 ± 211	$+166 \pm 272$
CLIP ViT-B/32	2	-239 ± 164	$+45 \pm 148$	-490 ± 281
	6	-71 ± 106	-42 ± 105	-409 ± 227
	11	$+32 \pm 93$	-103 ± 128	-368 ± 237

Table 2 ERank correlation (PLCC) with qualitative metrics on LAION (2000 samples). ERank tracks detail, not colour or distortion.

Metric	$ r $	p -value
Sharpness (Tenengrad)	0.47	< 0.05
Compressibility (JPEG)	0.52	< 0.05
Edge density	0.49	< 0.05
Distortions (BRISQUE)	0.02	0.28
Colourfulness	0.03	0.27

Validation against human complexity labels. Further, we measure the Pearson correlation of ERank with *human* judgments on IC9600 [Feng et al. \(2022\)](#), a benchmark of 9,600 images each annotated with an image-complexity score. Alongside ResNet ERank, we evaluate *Unsupervised Activation Energy* (UAE) on IC9600 as the strongest unsupervised image complexity proxy according to [Saraee et al. \(2020\)](#). UAE is the mean nonnegative activation over spatial positions and channels, averaged over the same four layers. The results in Figure 2 demonstrate that ResNet ERank strongly tracks the human label - $r = 0.72$, while the corresponding ResNet UAE score is weaker - $r = 0.53$ (or $r = 0.68$ for the original implementation using VGG-16).

4.4 Data Selection with ERank

We further analyse whether ERank-based data selection outperforms random sampling for model pretraining and finetuning. Random sampling is a notoriously strong baseline for data selection [Guo et al. \(2022\)](#); [Okanovic et al. \(2024\)](#); [Ayed and Hayou \(2023\)](#); [Moser et al. \(2025\)](#), often matching or exceeding sophisticated score-based methods, particularly at moderate pruning ratios [Sorscher et al. \(2022\)](#). We therefore compare ERank-based selection directly against random sampling under matched budgets on various tasks.

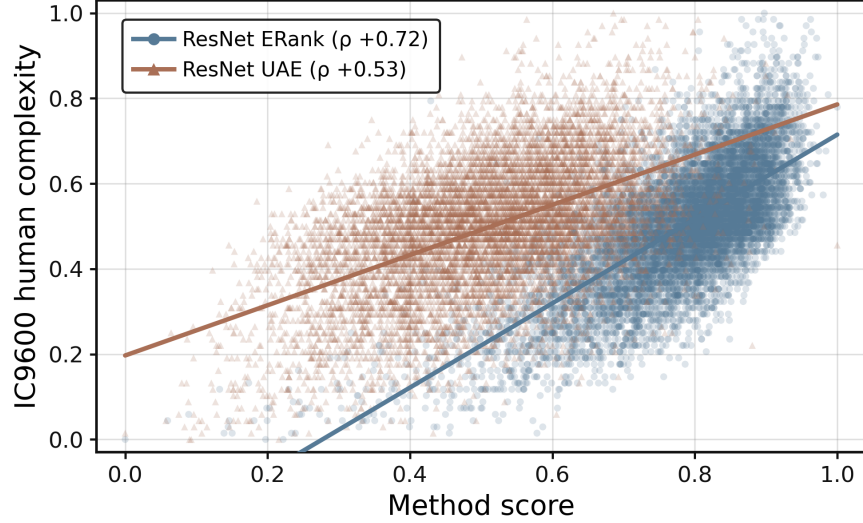


Figure 2 Correlation (PLCC) of ERank and UAE [Saraee et al. \(2020\)](#) with human annotated image-complexity scores on IC9600 [Feng et al. \(2022\)](#). Both r are statistically significant with p value below 0.05.

Where ERank helps. *Super-resolution (DIV2K $\times 4$).* Removing plain, low-ERank images whose flat patches carry little high-frequency content to reconstruct improves PSNR over random removal at every budget (Figures 3a and 3b, Table 3). Intuitively, the SR model learns little from plain images. *Scene-text recognition (IIIT5K).* Here the pattern reverses, the visually *rich* images are the *hard* ones, as dense texture and cluttered backgrounds hurt recognition, so removing the highest-ERank examples helps (Table 3). Overall, CLIP-derived ERank scores outperforms or matches random at most budgets, with the exception of the 30% pretraining budget on OCR, whereas ResNet-derived scores underperform on OCR in both scenarios.

Table 3 **Data Selection results** on DIV2K $\times 4$ super-resolution and IIIT5K OCR. Results are reported for ERank computed from ResNet-18 or CLIP ViT-B/32 features. Cells are mean $\pm$ std over three seeds. Best performance reported in bold.

Selection		Pruning ratio			
		10%	20%	30%	50%
<i>DIV2K $\times 4$ super-resolution, PSNR (dB) $\uparrow$ - remove low-ERank images</i>					
Pretrain	Random	28.850 $\pm$.013	28.800 $\pm$.015	28.762 $\pm$.015	28.688 $\pm$.004
	ERank (ResNet-18)	28.862 $\pm$.012	28.826 $\pm$.021	28.797 $\pm$.010	28.723 $\pm$.013
	ERank (CLIP)	28.874 $\pm$.015	28.841 $\pm$.025	28.806 $\pm$.009	28.743 $\pm$.013
Finetune	Random	28.911 $\pm$.005	28.879 $\pm$.010	28.864 $\pm$.003	28.798 $\pm$.006
	ERank (ResNet-18)	28.915 $\pm$.014	28.898 $\pm$.005	28.882 $\pm$.006	28.836 $\pm$.003
	ERank (CLIP)	28.929 $\pm$.010	28.913 $\pm$.004	28.887 $\pm$.007	28.846 $\pm$.006
<i>IIIT5K OCR, word accuracy $\uparrow$ - remove high-ERank images</i>					
Pretrain	Random	0.346 $\pm$.022	0.323 $\pm$.055	0.285 $\pm$.027	0.021 $\pm$.010
	ERank (ResNet-18)	0.308 $\pm$.073	0.261 $\pm$.076	0.116 $\pm$.038	0.019 $\pm$.010
	ERank (CLIP)	0.361 $\pm$.026	0.340 $\pm$.042	0.224 $\pm$.067	0.027 $\pm$.043
Finetune	Random	0.206 $\pm$.017	0.188 $\pm$.011	0.167 $\pm$.006	0.126 $\pm$.010
	ERank (ResNet-18)	0.199 $\pm$.007	0.182 $\pm$.002	0.165 $\pm$.007	0.137 $\pm$.001
	ERank (CLIP)	0.202 $\pm$.004	0.189 $\pm$.008	0.176 $\pm$.004	0.143 $\pm$.002

Where ERank does not help. On the remaining tasks, ERank selection shows no significant improvement over random at the reported budgets. For classification (MNIST/CIFAR-10, ResNet-18), ERank tracks

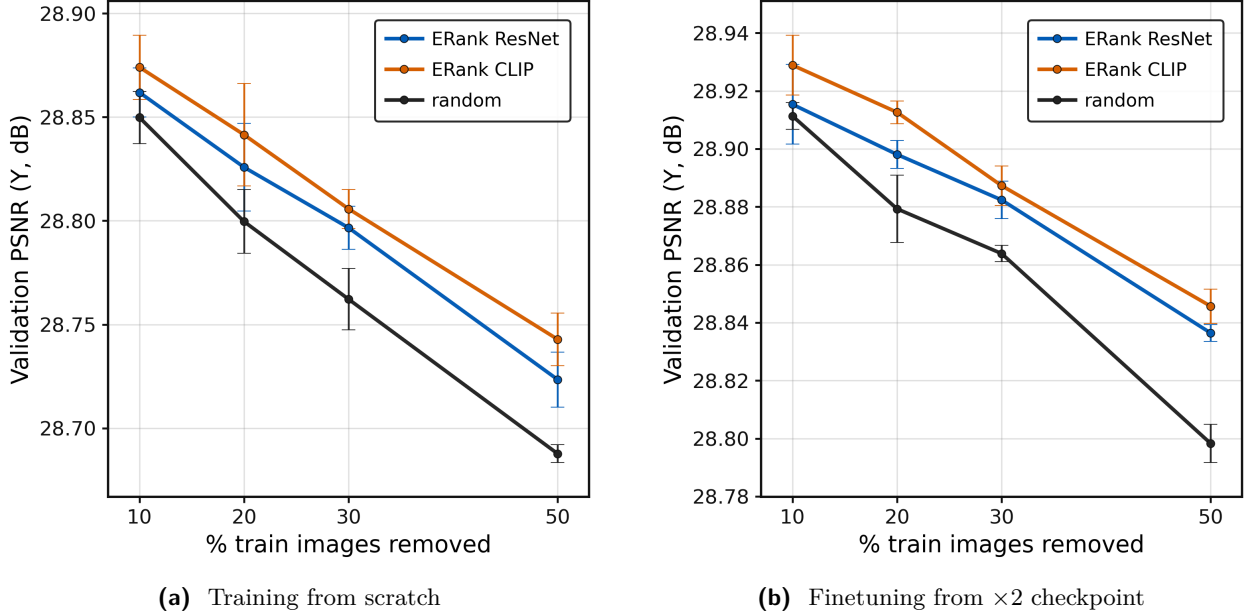


Figure 3 DIV2K $\times 4$ SR retention. The curves show ERank with the ResNet-18 and CLIP ViT-B/32 scoring backbones, together with one shared random-removal baseline. Curves are distinguished only by color; error bars show the standard deviation over three task-model seeds.

random closely: sample usefulness is governed by class structure, to which an unsupervised richness score is blind. For denoising (DIV2K, EDSR, $\sigma=25$), ERank stays within ~ 0.03 dB of random. For segmentation (Pascal VOC, DeepLabV3-ResNet50), random is noticeably better at aggressive removal and on par elsewhere, plausibly because segmentation quality depends on spatial layout, to which ERank is invariant by construction (Appendix B, property (ii)). In short, ERank helps only when visual richness aligns with sample usefulness. While constructing more sophisticated active-learning-style pipelines with scheduled sample complexity could improve our results, it is beyond the scope of this work.

5 Conclusion

We proposed the effective rank of the channel covariance of an image’s feature map as a per-sample, label-free measure of visual richness, computable from a single forward pass through an off-the-shelf encoder. Empirically, ERank orders images from plain to visually rich and correlates with codec bitrate, sharpness, edge density, and human complexity annotations on IC9600. It further serves as a data-selection signal for super-resolution and OCR.

The main practical takeaway is the boundary of the measure. ERank helps exactly when visual richness is the governing axis of task difficulty, as in super-resolution, where flat images carry little signal, and in clutter-hard OCR. It reduces to random selection when difficulty is set by class labels, by spatial layout, or by noise, as our classification, segmentation, and denoising experiments show.

Limitations. ERank is relative to a choice of encoder and layers, our layers were fixed a priori and not tuned, and results may differ under a systematic layer-selection study. Our evidence covers two backbones, moderate pruning ratios, and compact task models such as EDSR and CRNN, so whether the selection gains persist for stronger, large-scale models in pretraining and finetuning remains open.

Natural next steps are to use ERank as a differentiable training objective rather than only a selection criterion, and as a cheap complexity signal where a dedicated predictor is used today, such as auxiliary targets and loss weighting Feng et al. (2022) or complexity-routed adaptive computation Williams-Lekuona and Cosma (2026).

References

- Amro Abbas, Kushal Tirumala, Dániel Simig, Surya Ganguli, and Ari S. Morcos. SemDeDup: Data-efficient learning at web-scale through semantic deduplication. *arXiv preprint arXiv:2303.09540*, 2023.
- Eirikur Agustsson and Radu Timofte. NTIRE 2017 challenge on single image super-resolution: Dataset and study. In *IEEE Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pages 1122–1131, 2017.
- Alessio Ansuini, Alessandro Laio, Jakob H. Macke, and Davide Zoccolan. Intrinsic dimension of data representations in deep neural networks. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2019.
- Sanjeev Arora, Nadav Cohen, Wei Hu, and Yuping Luo. Implicit regularization in deep matrix factorization. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2019.
- Fadhel Ayed and Soufiane Hayou. Data pruning and neural scaling laws: Fundamental limitations of score-based algorithms. *Transactions on Machine Learning Research (TMLR)*, 2023.
- John Canny. A computational approach to edge detection. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 8(6):679–698, 1986.
- Liang-Chieh Chen, George Papandreou, Florian Schroff, and Hartwig Adam. Rethinking atrous convolution for semantic image segmentation. *arXiv preprint arXiv:1706.05587*, 2017.
- Mark Everingham, Luc Van Gool, Christopher K.I. Williams, John Winn, and Andrew Zisserman. The Pascal visual object classes (VOC) challenge. *International Journal of Computer Vision*, 88(2):303–338, 2010.
- Tinglei Feng, Yingjie Zhai, Jufeng Yang, Jie Liang, Deng-Ping Fan, Ling Shao, Jing Zhang, and Dacheng Tao. Ic9600: A benchmark dataset for automatic image complexity assessment. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, PP:1–17, 12 2022.
- Dan Friedman and Adji Bousso Dieng. The Vendi Score: A diversity evaluation metric for machine learning. *Transactions on Machine Learning Research (TMLR)*, 2023.
- Quentin Garrido, Randall Balestriero, Laurent Najman, and Yann LeCun. RankMe: Assessing the downstream performance of pretrained self-supervised representations by their rank. In *International Conference on Machine Learning (ICML)*, 2023.
- Alex Graves, Santiago Fernández, Faustino Gomez, and Jürgen Schmidhuber. Connectionist temporal classification: Labelling unsegmented sequence data with recurrent neural networks. In *International Conference on Machine Learning (ICML)*, pages 369–376, 2006.
- Suriya Gunasekar, Blake E. Woodworth, Srinadh Bhojanapalli, Behnam Neyshabur, and Nati Srebro. Implicit regularization in matrix factorization. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2017.
- Chengcheng Guo, Bo Zhao, and Yanbing Bai. Deepcore: A comprehensive library for coreset selection in deep learning. In *International Conference on Database and Expert Systems Applications (DEXA)*, pages 181–195. Springer, 2022.
- Yizeng Han, Gao Huang, Shiji Song, Le Yang, Honghui Wang, and Yulin Wang. Dynamic neural networks: A survey. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 44(11):7436–7456, 2021.
- David Hasler and Sabine Süsstrunk. Measuring colorfulness in natural images. In *Human Vision and Electronic Imaging VIII, Proceedings of SPIE*, volume 5007, pages 87–95, 2003.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016.
- Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. GANs trained by a two time-scale update rule converge to a local Nash equilibrium. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2017.
- Mark O. Hill. Diversity and evenness: A unifying notation and its consequences. *Ecology*, 54(2):427–432, 1973.
- Gao Huang, Danlu Chen, Tianhong Li, Felix Wu, Laurens van der Maaten, and Kilian Q. Weinberger. Multi-scale dense networks for resource efficient image classification. In *International Conference on Learning Representations (ICLR)*, 2018.
- Minyoung Huh, Hossein Mobahi, Richard Zhang, Brian Cheung, Pulkit Agrawal, and Phillip Isola. The low-rank simplicity bias in deep networks. *Transactions on Machine Learning Research (TMLR)*, 2023.

- Li Jing, Pascal Vincent, Yann LeCun, and Yuandong Tian. Understanding dimensional collapse in contrastive self-supervised learning. In *International Conference on Learning Representations (ICLR)*, 2022.
- Lou Jost. Entropy and diversity. *Oikos*, 113(2):363–375, 2006.
- Alex Krizhevsky. Learning multiple layers of features from tiny images. Technical report, University of Toronto, 2009.
- Eric Krotkov. Focusing. *International Journal of Computer Vision*, 1(3):223–237, 1988.
- Tuomas Kynkäänniemi, Tero Karras, Samuli Laine, Jaakko Lehtinen, and Timo Aila. Improved precision and recall metric for assessing generative models. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2019.
- Yann LeCun, Léon Bottou, Yoshua Bengio, and Patrick Haffner. Gradient-based learning applied to document recognition. *Proceedings of the IEEE*, 86(11):2278–2324, 1998.
- Ming Li and Paul Vitányi. *An Introduction to Kolmogorov Complexity and Its Applications*. Springer, 3rd edition, 2008.
- Bee Lim, Sanghyun Son, Heewon Kim, Seungjun Nah, and Kyoung Mu Lee. Enhanced deep residual networks for single image super-resolution. In *IEEE Conference on Computer Vision and Pattern Recognition Workshops (CVPRW)*, pages 1132–1140, 2017.
- Albert W. Marshall, Ingram Olkin, and Barry C. Arnold. *Inequalities: Theory of Majorization and Its Applications*. Springer, 2nd edition, 2011.
- Anand Mishra, Karteek Alahari, and C.V. Jawahar. Scene text recognition using higher order language priors. In *British Machine Vision Conference (BMVC)*, 2012.
- Anish Mittal, Anush Krishna Moorthy, and Alan Conrad Bovik. No-reference image quality assessment in the spatial domain. *IEEE Transactions on Image Processing*, 21(12):4695–4708, 2012.
- Brian B. Moser, Arundhati S. Shanbhag, Stanislav Frolov, Federico Raue, Joachim Folz, and Andreas Dengel. A coreset selection of coreset selection literature: Introduction and recent advances. *arXiv preprint arXiv:2505.17799*, 2025.
- Muhammad Ferjad Naeem, Seong Joon Oh, Youngjung Uh, Yunje Choi, and Jaejun Yoo. Reliable fidelity and diversity metrics for generative models. In *International Conference on Machine Learning (ICML)*, 2020.
- Patrik Okanovic, Roger Waleffe, Vasilis Mageirakos, Konstantinos E. Nikolakakis, Amin Karbasi, Dionysis Kalogieras, Nezihe Merve Gürel, and Theodoros Rekatsinas. Repeated random sampling for minimizing the time-to-accuracy of learning. In *The Twelfth International Conference on Learning Representations (ICLR)*, 2024.
- Vardan Papyan, X. Y. Han, and David L. Donoho. Prevalence of neural collapse during the terminal phase of deep learning training. *Proceedings of the National Academy of Sciences*, 117(40):24652–24663, 2020.
- Mansheej Paul, Surya Ganguli, and Gintare Karolina Dziugaite. Deep learning on a data diet: Finding important examples early in training. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2021.
- Alex P. Pentland. Fractal-based description of natural scenes. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 6(6):661–674, 1984.
- Said Pertuz, Domenec Puig, and Miguel Angel Garcia. Analysis of focus measure operators for shape-from-focus. *Pattern Recognition*, 46(5):1415–1432, 2013.
- Phillip Pope, Chen Zhu, Ahmed Abdelkader, Micah Goldblum, and Tom Goldstein. The intrinsic dimension of images and its impact on learning. In *International Conference on Learning Representations (ICLR)*, 2021.
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision. In *International Conference on Machine Learning (ICML)*, 2021.
- Olivier Roy and Martin Vetterli. The effective rank: A measure of effective dimensionality. In *15th European Signal Processing Conference (EUSIPCO)*, pages 606–610, 2007.
- Mehdi S. M. Sajjadi, Olivier Bachem, Mario Lucic, Olivier Bousquet, and Sylvain Gelly. Assessing generative models via precision and recall. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2018.
- Tim Salimans, Ian Goodfellow, Wojciech Zaremba, Vicki Cheung, Alec Radford, and Xi Chen. Improved techniques for training GANs. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2016.

- Elham Saraei, Mona Jalal, and Margrit Betke. Visual complexity analysis using deep intermediate-layer features. *Computer Vision and Image Understanding*, 195:102949, 2020. ISSN 1077-3142.
- Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, et al. LAION-5B: An open large-scale dataset for training next generation image-text models. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2022.
- Ozan Sener and Silvio Savarese. Active learning for convolutional neural networks: A core-set approach. In *International Conference on Learning Representations (ICLR)*, 2018.
- Claude E. Shannon. A mathematical theory of communication. *Bell System Technical Journal*, 27(3):379–423, 1948.
- Baoguang Shi, Xiang Bai, and Cong Yao. An end-to-end trainable neural network for image-based sequence recognition and its application to scene text recognition. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 39(11):2298–2304, 2017.
- Ben Sorscher, Robert Geirhos, Shashank Shekhar, Surya Ganguli, and Ari S. Morcos. Beyond neural scaling laws: Beating power law scaling via data pruning. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2022.
- Mariya Toneva, Alessandro Sordani, Remi Tachet des Combes, Adam Trischler, Yoshua Bengio, and Geoffrey J. Gordon. An empirical study of example forgetting during deep neural network learning. In *International Conference on Learning Representations (ICLR)*, 2019.
- Gregory K. Wallace. The JPEG still picture compression standard. *IEEE Transactions on Consumer Electronics*, 38(1):xviii–xxxiv, 1992.
- Yulin Wang, Rui Huang, Shiji Song, Zeyi Huang, and Gao Huang. Not all images are worth 16x16 words: Dynamic transformers for efficient image recognition. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2021.
- Mikel Williams-Lekuona and Georgina Cosma. Image complexity-aware adaptive retrieval for efficient vision-language models, 2026.
- Xiaobo Xia, Jiale Liu, Jun Yu, Xu Shen, Bo Han, and Tongliang Liu. Moderate coreset: A universal method of data selection for real-world data-efficient deep learning. In *International Conference on Learning Representations (ICLR)*, 2023.

Appendix

A A Family of Spectral Effective-Dimension Measures

ERank, the participation ratio, and the stable rank are all members of a single one-parameter family of spectral measures, and several statements below are cleanest when read against it. We therefore begin by defining the family, the propositions that follow are then proved for whichever member is most tractable and transferred to ERank by the family’s monotonicity.

Let $\lambda_1 \geq \dots \geq \lambda_C \geq 0$ be the eigenvalues of a covariance (or Gram) matrix, in our case the channel covariance $\Sigma = \frac{1}{N} \bar{X}^\top \bar{X} \in \mathbb{R}^{C \times C}$, where $\bar{X}$ is the column-centered feature matrix and let $p_i = \lambda_i / \sum_j \lambda_j$ be the normalized spectrum, so that $p = (p_1, \dots, p_C)$ is a probability distribution over the C directions. The Rényi entropy of order $\alpha \geq 0$ of this distribution is

$$H_\alpha(p) = \frac{1}{1-\alpha} \log \sum_{i=1}^C p_i^\alpha, \quad (3)$$

with the limiting cases $H_1(p) = -\sum_i p_i \log p_i$ (the Shannon entropy) and $H_\infty(p) = -\log \max_i p_i$. Exponentiating yields a family of *effective ranks*,

$$\text{erank}_\alpha = \exp(H_\alpha(p)) = \left(\sum_{i=1}^C p_i^\alpha \right)^{\frac{1}{1-\alpha}}, \quad (4)$$

each an *effective number* of active directions, $\text{erank}_\alpha = C$ when the spectrum is flat ($p_i = 1/C$) and $\text{erank}_\alpha = 1$ when it collapses onto a single direction, for every α . In ecology these are the Hill numbers [Hill \(1973\)](#);

Jost (2006), and the same construction underlies the diversity measure of Friedman and Dieng (2023). The order α controls how strongly small eigenvalues are weighted, larger α suppresses the tail of the spectrum, so higher-order members are less sensitive to the many small, often noise-dominated directions.

Below we mainly consider the following three members:

- $\alpha = 1$: **ERank** Roy and Vetterli (2007), the exponential Shannon entropy of the spectrum.
- $\alpha = 2$: the **Participation Ratio**

$$\text{PR}(\Sigma) = \frac{1}{\sum_i p_i^2} = \frac{(\text{tr } \Sigma)^2}{\text{tr}(\Sigma^2)}, \quad (5)$$

- $\alpha \rightarrow \infty$: the **Stable Rank** $1/\max_i p_i = (\text{tr } \Sigma)/\lambda_{\max}$, governed by the single largest eigenvalue.

Two properties of the family are used repeatedly. First, erank_α is *nonincreasing* in α , giving in particular

$$\text{erank}(I) = \text{erank}_1 \geq \text{erank}_2 = \text{PR}(\Sigma). \quad (6)$$

Second, every erank_α rewards a more even spectrum and the maximum is reached exactly when all eigenvalues are equal.

B Basic Properties

We record the properties that make ERank well-suited as a per-sample measure - all are elementary consequences of the definition, of the family in Sec. A, and of majorization theory Roy and Vetterli (2007); Marshall et al. (2011).

(i) *Bounds.* $1 \leq \text{erank}(I) \leq \text{rank}(\Sigma) \leq \min(N, C)$. The lower bound is attained iff the spectrum concentrates on a single direction, the upper bound C iff the spectrum is flat ($\lambda_1 = \dots = \lambda_C$). The effective-number interpretation and the relation $\text{erank} \geq \text{PR}$ (Eq. equation 6) follow directly from Sec. A.

(ii) *Invariances.* ERank is invariant to isotropic rescaling $X \mapsto \alpha X$, to orthogonal transformations of channel space $X \mapsto XQ$, and to any permutation of spatial positions applied jointly across channels ($X \mapsto PX$ with P a permutation matrix), since $\Sigma = \frac{1}{N} X^\top P^\top P X = \frac{1}{N} X^\top X$. The last invariance is deliberate but consequential.

(iii) *Continuity and differentiability.* Unlike matrix rank, which is discontinuous and requires an arbitrary threshold, ERank is continuous in X and differentiable wherever the spectrum is simple. It can therefore serve not only as a diagnostic but, in principle, as a training objective or regularizer, as in label-free representation evaluation Garrido et al. (2023).

(iv) *Concavity and Schur-concavity.* ERank is Schur-concave in the spectrum: any smoothing of the eigenvalue distribution at fixed total variance increases it. Moreover, ERank is concave as a function of the normalized eigenvalues. It is thus a canonical measure of spectral flatness, maximized exactly by the white spectrum.

B.1 Connection to Channel Correlation

We make precise the sense in which ERank measures channel decorrelation. The identity is exact for the order-2 member of the family (the participation ratio, Eq. equation 5) and transfers to ERank through the bound of Eq. equation 6.

Proposition 1 (ERank and mean squared correlation). *Let $R \in \mathbb{R}^{C \times C}$ be the channel correlation matrix, i.e. the covariance of the per-channel standardized features, and let $\bar{r}^2 = \frac{2}{C(C-1)} \sum_{i < j} r_{ij}^2$ be the mean squared pairwise correlation between channels. Then*

$$\text{PR}(R) = \frac{C}{1 + (C-1) \bar{r}^2}, \quad (7)$$

and consequently, by Eq. equation 6,

$$\text{erank}(R) \geq \frac{C}{1 + (C-1) \bar{r}^2}. \quad (8)$$

Proof. Since R has unit diagonal, $\text{tr } R = C$ and

$$\text{tr}(R^2) = \|R\|_F^2 = C + 2 \sum_{i < j} r_{ij}^2 = C + C(C-1)\bar{r}^2.$$

Hence $\text{PR}(R) = (\text{tr } R)^2 / \text{tr}(R^2) = C^2 / (C + C(C-1)\bar{r}^2)$, which is Eq. equation 7. The inequality equation 8 follows from Eq. equation 6 applied to R . $\square$ $\square$

Corollary 1. *erank(R) = C iff all channels are pairwise uncorrelated, and $\text{PR}(R) \rightarrow 1$ as $|r_{ij}| \rightarrow 1$ for all pairs. High mean squared channel correlation forces low ERank, at the explicit rate of Eq. equation 7.*

Proposition 1 is stated for the correlation matrix. For the centered but unstandardized covariance Σ used in Eq. equation 2, ERank measures two things at once: decorrelation between channels *and* balance of variance across channels (a diagonal Σ with unequal variances also has reduced ERank). We regard both as components of richness — an image exciting many channels weakly and one strongly is genuinely less rich than one exciting all channels equally — but the distinction should be kept in mind when interpreting scores.

B.2 Behavior under Noise

We add noise to the feature tensor and track its effect on the channel covariance. Let the corrupted features be $\tilde{X} = X + E$, where $E \in \mathbb{R}^{N \times C}$ is zero-mean, independent of X , and isotropic across channels with per-channel variance σ^2 , i.e. $\frac{1}{N} \mathbb{E}[\tilde{E}^\top \tilde{E}] = \sigma^2 I_C$ (here $\tilde{E}$ is E with each channel centered).

Lemma 1 (Tensor noise acts additively on the spectrum). *Under the assumptions above, the expected corrupted covariance is*

$$\mathbb{E}[\tilde{\Sigma}] = \Sigma + \sigma^2 I_C, \quad \tilde{\Sigma} := \frac{1}{N} \tilde{X}^\top \tilde{X}, \quad (9)$$

and the empirical $\tilde{\Sigma}$ concentrates on this value with an $O(N^{-1/2})$ error. Consequently each eigenvalue of $\mathbb{E}[\tilde{\Sigma}]$ is $\lambda_i + \sigma^2$.

Proof. Expanding $\tilde{X} = \bar{X} + \bar{E}$,

$$\tilde{\Sigma} = \frac{1}{N} \bar{X}^\top \bar{X} + \frac{1}{N} (\bar{X}^\top \bar{E} + \bar{E}^\top \bar{X}) + \frac{1}{N} \bar{E}^\top \bar{E}.$$

The first term is Σ . The cross term has zero expectation, since E is zero-mean and independent of X : $\mathbb{E}[\bar{X}^\top \bar{E}] = \bar{X}^\top \mathbb{E}[\bar{E}] = 0$. The last term has expectation $\sigma^2 I_C$ by the isotropy assumption. This gives Eq. equation 9. Both stochastic terms are averages of N independent contributions, so they fluctuate around their means at rate $O(N^{-1/2})$; for $N = HW$ in the thousands the deviation is negligible. Adding $\sigma^2 I_C$ shifts every eigenvalue by σ^2 , since Σ and $\sigma^2 I_C$ are simultaneously diagonalizable. $\square$ $\square$

Proposition 2 (Monotonicity under decorrelated noise). *Let $\Sigma_\sigma := \Sigma + \sigma^2 I_C$ be the shifted covariance of Lemma 1. Then $\text{erank}(\Sigma_\sigma)$ is nondecreasing in σ^2 , strictly increasing unless the spectrum of Σ is already flat, and $\text{erank}(\Sigma_\sigma) \rightarrow C$ as $\sigma^2 \rightarrow \infty$.*

Proof. By Lemma 1 the normalized spectrum is $p_i(\sigma) = (\lambda_i + \sigma^2) / (\text{tr } \Sigma + C\sigma^2)$. For $\sigma_2^2 > \sigma_1^2$, adding a constant to every eigenvalue and renormalizing moves mass from larger to smaller entries, so $p(\sigma_2)$ is majorized by $p(\sigma_1)$; Schur-concavity (Sec. A) then gives monotonicity, strict unless p is already uniform. As $\sigma^2 \rightarrow \infty$, $p_i(\sigma) \rightarrow 1/C$ for all i , whence $\text{erank}(\Sigma_\sigma) \rightarrow C$. $\square$ $\square$