

DC-WAM: Dynamic-Centric Visual Supervision and Reasoning for World-Action Models

Haoyuan Ji^{1,2*}, Lingxiang Fan^{1,2*}, Shang Su^{1,2}, Yinqiao Lu¹, Mengkai Shi², Jun Gao^{3†}, Shuo Feng^{1†}

¹Tsinghua University

²Dense-AI

³University of Michigan

Abstract

World-Action Models (WAMs) augment robot policies with future visual prediction, but it remains unclear what the visual modality should learn for control. While photorealistic future prediction provides dense supervision, it also incurs substantial computation and can allocate capacity to texture, illumination, and background variations that are only weakly related to action selection. Recent efficient WAM variants suggest that the main benefit of the video branch may not lie in the rendered future itself, but in the control-relevant visual representations induced during training. In this work, we revisit future video prediction from a dynamic-centric perspective and ask whether an existing RGB-based WAM can be redirected from appearance-dominated reconstruction toward interaction-induced visual dynamics without introducing additional modality-specific predictions or online inputs at deployment. We propose DC-WAM, a dynamic-centric WAM framework that redistributes supervision and computation in the RGB video branch. At the supervision level, DC-WAM combines temporal-difference flow matching with trajectory-guided weighting, emphasizing dense temporal changes and localized regions where the gripper, manipulated objects, and contact areas move. At the reasoning level, DynaRoute predicts token-wise dynamic relevance and converts it into an attention bias, guiding the model toward control-relevant future tokens. Experiments in simulation and on real-world manipulation tasks show that DC-WAM consistently improves policy performance, especially under out-of-distribution perturbations in lighting, object appearance, and background texture.

Introduction

Vision-Language-Action (VLA) models map visual observations and language instructions directly to robot actions, leveraging the semantic priors of large vision-language backbones (Kim et al. 2024; Black et al. 2024). World-Action Models (WAMs) further couple action generation with future visual prediction, using anticipated scene evolution as an additional learning signal for robot control (Zhu et al. 2025; Li et al. 2025; Ye et al. 2026b; Li et al. 2026b; Kim et al. 2026). By jointly modeling what the robot should do and how the scene may change, WAMs provide dense temporal supervision beyond action imitation alone.

However, uniform RGB future prediction entangles manipulation dynamics with appearance factors such as texture, illumination, background, and sensor noise. Although these

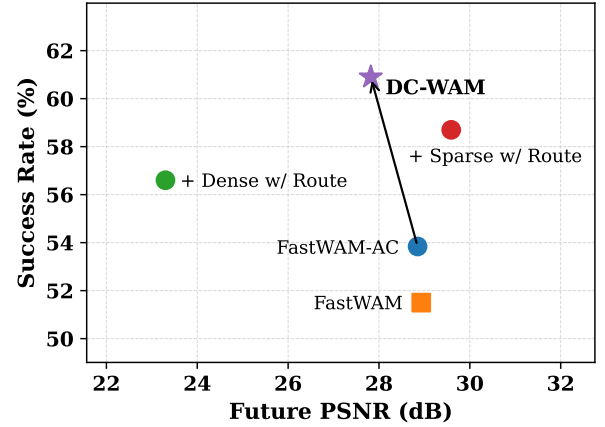


Figure 1: Effect of dynamic-centric supervision and routing. Our method achieves a relatively low PSNR, but improves policy success on LIBERO-Plus evaluation, suggesting that appearance-level reconstruction fidelity is not aligned with control-relevant future prediction.

factors dominate reconstruction errors, they often change across environments without altering the underlying manipulation dynamics, making appearance-centric supervision potentially brittle under visual distribution shifts. Consequently, an RGB video branch may allocate substantial capacity to appearance reconstruction rather than the gripper motion, object displacement, and contact events that are more directly useful for action learning.

Recent efficient WAMs show that strong action policies do not necessarily require complete future videos to be iteratively generated during execution (Yuan et al. 2026; Li et al. 2026a; Zhang et al. 2026c). Meanwhile, other methods reduce the ambiguity of RGB prediction by introducing structured future representations, such as semantic masks, point trajectories, optical flow, or geometric states (Yu et al. 2026; Guan et al. 2026; Ranasinghe et al. 2026; Liu et al. 2026; Zhang et al. 2026a). Although these representations provide more structured supervision, they typically modify or expand the predicted future-state modality. We instead ask whether the existing RGB-based WAM can be redi-

*These authors contributed equally.

†Corresponding author.

rected toward dynamic-centric representations that remain stable across appearance shifts, without additional modality-specific prediction.

We propose **DC-WAM**, a dynamic-centric World-Action Model that redistributes the supervision and reasoning toward interaction-induced dynamics. At the supervision level, DC-WAM replaces uniform latent reconstruction with two complementary training signals. First, temporal-difference supervision emphasizes changes between adjacent visual flow fields, reducing the influence of temporally persistent appearance components. Second, tracker-guided flow matching reweights the visual objective toward localized regions with strong gripper, object, and contact motion. The tracker-derived targets are constructed offline from training videos and are not required during policy execution. At the reasoning level, we introduce **DynaRoute**, a lightweight module that predicts token-wise dynamic relevance and converts it into an attention bias. This routes visual attention toward future tokens associated with interaction-induced motion.

We retain an action-conditioned visual branch, allowing video supervision to regularize action representations through an explicit action-to-visual pathway (Ye et al. 2026a). The RGB branch is used during training but can be removed at deployment following Fast-WAM-style inference, preserving efficient action generation.

Experiments show that DC-WAM substantially improves robustness under distribution shift. As summarized in Fig. 1, the proposed method progressively improves LIBERO-Plus success, demonstrating that DC-WAM improves OOD generalization while maintaining strong clean-condition performance.

In summary, our contributions are threefold:

- We propose DC-WAM, which redirects the existing RGB video branch from appearance-dominated reconstruction toward interaction-induced visual dynamics, without introducing additional modality-specific prediction branches or deployment-time inputs.
- We introduce complementary dynamic-centric supervision and reasoning mechanisms: temporal-difference supervision suppresses persistent appearance components, tracker-guided flow matching emphasizes localized manipulation dynamics, and DynaRoute routes visual attention toward dynamically relevant tokens.
- Trained only on clean demonstrations, DC-WAM maintains strong in-distribution performance while substantially improving OOD success and reducing ID–OOD degradation on LIBERO-Plus and real-world manipulation under unseen visual perturbations.

Related Work

World-Action Models and Efficient Visual Foresight

Recent WAMs couple video prediction with action generation through modality-specific diffusion, shared visual-action representations, or interleaved generation, achieving strong manipulation performance (Zhu et al. 2025; Li et al. 2025; Ye et al. 2026b; Li et al. 2026b; Ye et al. 2026a). However, generating complete RGB futures introduces substantial inference

cost. Recent methods reduce this dependence by removing the video branch at deployment, predicting coarse visual futures with compact experts, or using intermediate features from image-editing backbones (Hu et al. 2024; Yuan et al. 2026; Li et al. 2026a; Zhang et al. 2026c). These results suggest that the value of visual foresight may lie more in the predictive representations learned during training than in the rendered future itself.

Structured Visual Representations for Control

Prior VLA methods reduce the spatial ambiguity of current visual observations using trajectory sketches, state-action traces, or image-space target prompts (Gu et al. 2023; Zheng et al. 2024; Dai et al. 2025). World-model policies further introduce structured visual representations into future prediction by replacing or augmenting RGB futures with semantic masks, point trajectories, optical flow, object states, or geometric representations (Lou et al. 2026; Yu et al. 2026; Guan et al. 2026; Ranasinghe et al. 2026; Liu et al. 2026; Zhang et al. 2026a). These representations make future prediction more structured and action-relevant, but typically modify the predicted future representation or introduce additional modality-specific tokens. DC-WAM instead retains the RGB-based visual branch and uses dynamic cues only to reweight visual supervision and attention routing. Our use of trajectory-derived supervision is related to a physically grounded video generation method PhysisForcing (Zhang et al. 2026b), but DC-WAM applies these cues inside a visual-action WAM through temporally resolved token-level relevance maps coupled with action generation.

Attention Bias for Action Reasoning

Attention-logit biases inject structured priors without modifying the token set (Shaw, Uszkoreit, and Vaswani 2018; Press, Smith, and Lewis 2022). Unlike static positional biases, DynaRoute adopts a similar logit-level modulation mechanism, but replaces static positional priors with input-dependent dynamic relevance. It predicts a relevance score for each future visual token and converts it into a key-side bias in visual-token attention, emphasizing regions associated with gripper motion, object displacement, and contact changes.

Method

Overview. We consider language-conditioned robotic manipulation from visual observations. Given the current RGB image $\mathbf{o}_t \in \mathbb{R}^{3 \times H \times W}$, language instruction ℓ , and proprioceptive state $\mathbf{s}_t$, a World-Action Model (WAM) jointly predicts an action chunk and future visual evolution:

$$p_{\theta}(\mathbf{a}_{t:t+T_a-1}, \hat{\mathbf{o}}_{t+1:t+T_v} \mid \mathbf{o}_t, \ell, \mathbf{s}_t), \quad (1)$$

where T_a and T_v denote the action and visual prediction horizons, respectively.

Architecture. DC-WAM is built on the Wan2.2 backbone (Wan et al. 2025) and follows a visual-action MoT architecture with two branches: an RGB visual branch for future latent video prediction and an action branch for action-chunk generation. We keep the original RGB-based visual branch

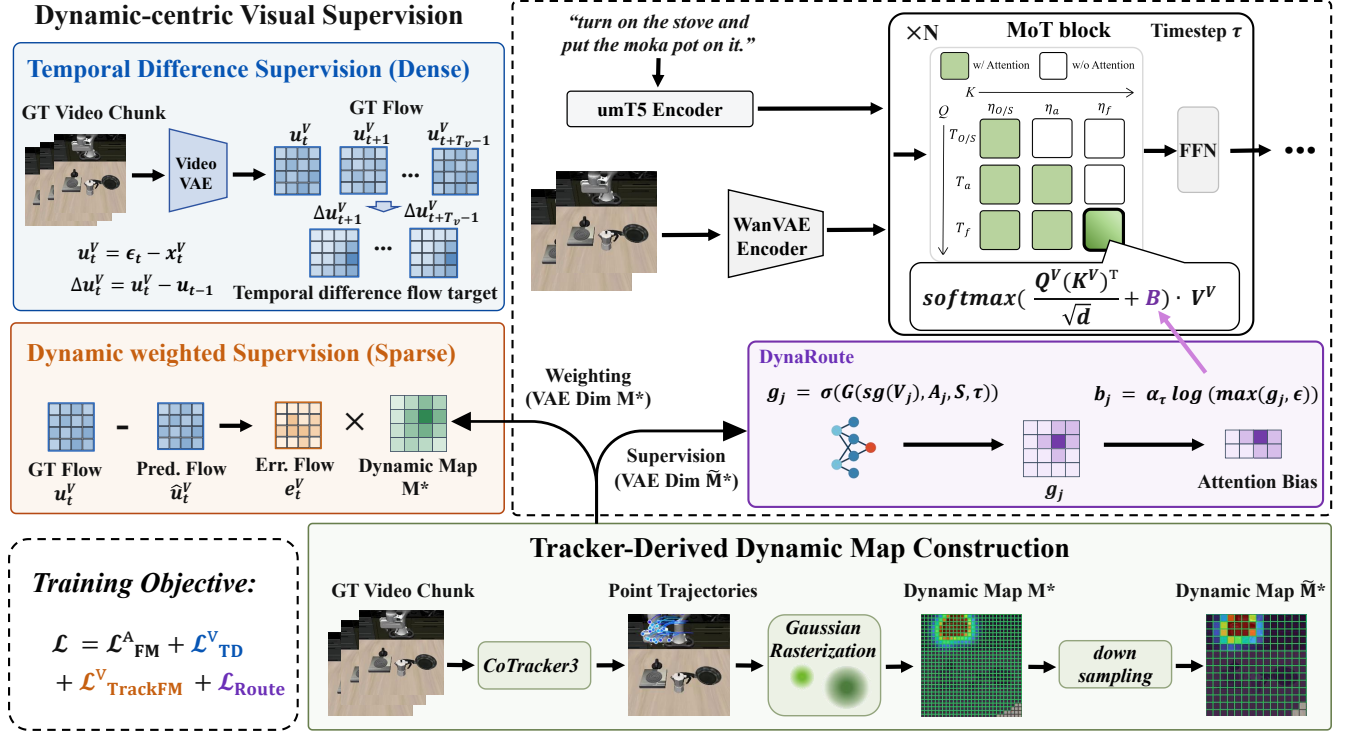


Figure 2: Overview of DC-WAM. DC-WAM redirects the RGB video branch toward interaction-induced dynamics through complementary dense and sparse supervision. Temporal-difference supervision models changes in adjacent visual flows, while TrackFM reweights visual flow-matching errors using an offline tracker-derived dynamic map. The same map supervises DynaRoute, which predicts token-wise dynamic relevance and converts it into a key-side bias in the visual-action MoT attention. Tracker-derived targets are used only during training and require no additional online input or modality-specific predictions at deployment.

and do not introduce additional modality-specific experts as extra token vectors in MoT computation.

The visual branch is action-conditioned through the MoT attention mask. Future visual tokens can attend to action tokens, while action tokens are prevented from attending to future visual tokens and can only attend to the current observed visual tokens, avoiding future leakage during action prediction.

Building on this backbone, DC-WAM modifies the training and forward computation of the RGB visual branch in two ways: dynamic-centric visual supervision and DynaRoute attention bias, as illustrated in Fig. 2. We describe these two components next.

Tracker-Derived Dynamic Map Construction

We construct tracker-derived dynamic maps offline at the episode level, providing concentration on manipulation dynamics. They are not used during policy execution.

Given an episode with T_{ep} frames, we sample candidate points either uniformly over the image or within foreground regions produced by SAM (Kirillov et al. 2023). An off-the-shelf point tracker (Karaev et al. 2024) estimates their trajectories throughout the episode. Let the position of the

n -th tracked point at global time t be

$$\mathbf{p}_{t,n} = (x_{t,n}, y_{t,n}) \in [0, W] \times [0, H], \quad (2)$$

where $t = 0, \dots, T_{\text{ep}} - 1$. We compute the frame-wise motion magnitude using the backward temporal difference:

$$d_{t,n} = \|\mathbf{p}_{t,n} - \mathbf{p}_{t-1,n}\|_2, \quad t = 1, \dots, T_{\text{ep}} - 1, \quad (3)$$

and set $d_{0,n} = 0$. Dynamic points at time t are selected by

$$\mathcal{P}_{\text{dyn}}^t = \{n \mid d_{t,n} > \delta_{\text{mot}}\}, \quad (4)$$

where δ_{mot} filters out static points and small tracking fluctuations.

We rasterize the selected dynamic points onto the VAE visual-token grid. Let (x_k, y_k) denote the center of the k -th visual token in the original image coordinate system, where $k = 1, \dots, H_z W_z$ and $H_z \times W_z$ is the spatial resolution of the VAE visual latent. The spatial response between point n and token k is

$$\kappa_{t,n,k} = \exp \left[-\lambda \left(\frac{(x_k - x_{t,n})^2}{\sigma_x^2} + \frac{(y_k - y_{t,n})^2}{\sigma_y^2} \right) \right], \quad (5)$$

with $\sigma_x = \frac{W}{W_z} \sigma_p$, $\sigma_y = \frac{H}{H_z} \sigma_p$. Unless otherwise specified, we set $\lambda = 0.25$ and $\sigma_p = 1.25$.

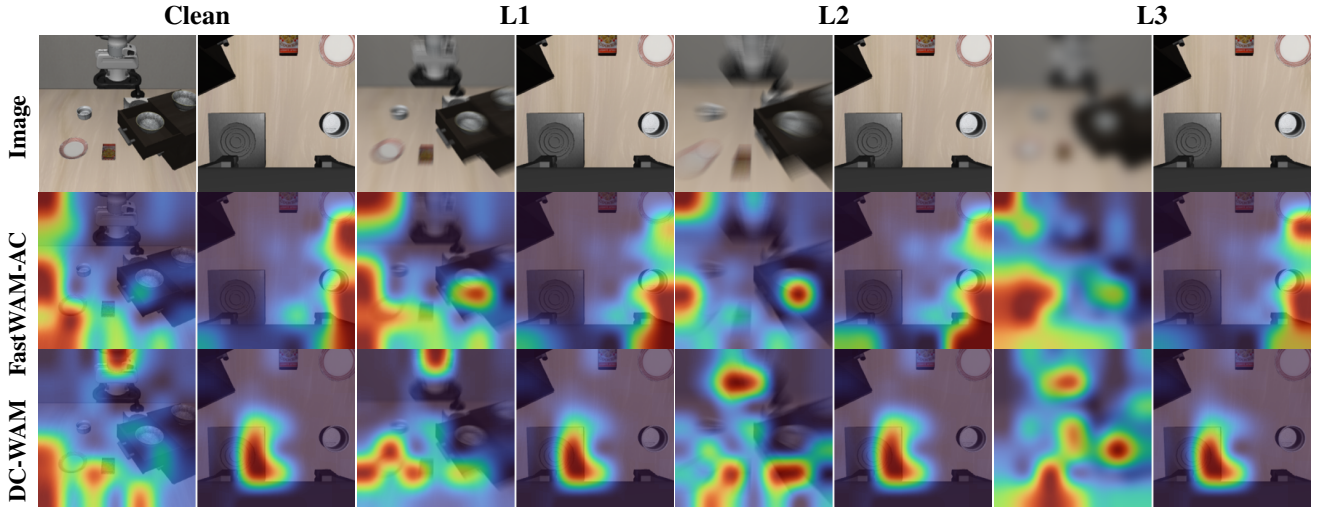


Figure 3: Attention responses under increasing visual perturbations. As perturbation severity increases, FastWAM-AC attention becomes increasingly diffuse and shifts toward static distractors, whereas DC-WAM maintains more consistent and concentrated attention on manipulation-relevant dynamic regions, indicating stronger attention stability and OOD robustness under visual corruption.

The unnormalized token-level dynamic response is obtained by aggregating motion-weighted kernel responses:

$$b_{t,k} = \sum_{n \in \mathcal{P}_{\text{dyn}}^t} d_{t,n} \kappa_{t,n,k}. \quad (6)$$

Finally, we normalize the response over the entire episode and within each camera view:

$$m_{t,k}^* = \frac{b_{t,k}}{\max_{t',k'} b_{t',k'} + \epsilon} \in [0, 1]. \quad (7)$$

This episode-level normalization preserves both spatial and temporal saliency: it highlights tokens near strong tracked motion and assigns larger relevance values to time steps where interaction-induced changes are more pronounced.

An important consequence of this construction is its reduced sensitivity to temporally persistent appearance shifts. Because the dynamic map is derived from inter-frame point displacements rather than RGB reconstruction errors, static or slowly varying changes in illumination and background texture do not directly contribute to the supervision target, provided that the underlying point trajectories remain stable. Consequently, the visual branch is encouraged to prioritize gripper motion, object displacement, and contact-related changes instead of fitting nuisance appearance variations. This provides a natural source of robustness to appearance-level OOD perturbations, such as lighting and background changes, that alter visual appearance without changing the underlying manipulation dynamics.

These maps are used to reweight the original visual flow-matching loss toward sparse interaction regions and to supervise the dynamic relevance predicted by DynaRoute, whose outputs are defined on the DiT visual-token grid. We further downsample the map to the DiT token resolution $H_D \times W_D$:

$$\tilde{m}_{t,k}^* = \mathcal{D}_{\text{tok}}(m_{t,\cdot}^*)_k, \quad k = 1, \dots, H_D W_D, \quad (8)$$

where $\mathcal{D}_{\text{tok}}$ denotes patch-wise downsampling from the VAE latent grid to the DiT token grid.

Dynamics-Aware Attention Bias

DynaRoute predicts token-wise relevance for future visual tokens and converts it into an additive key-side bias in the visual branch. It encourages the video expert to prioritize interaction-induced dynamics, such as object displacement and robot-environment contact, rather than attending uniformly to all visual tokens.

Let $\mathbf{V}_\tau \in \mathbb{R}^{B \times S_v \times d_v}$ denote the DiT visual-token sequence, where $S_v = T_v K_D$, $K_D = H_D W_D$, and d_v is the visual hidden dimension. We decompose it as

$$\mathbf{V}_\tau = [\mathbf{V}_\tau^{\text{obs}}, \mathbf{V}_\tau^{\text{fut}}], \quad (9)$$

where $\mathbf{V}_\tau^{\text{obs}}$ contains the clean current-observation tokens, while $\mathbf{V}_\tau^{\text{fut}}$ represents the future visual tokens at timestep τ . The observation tokens remain clean at all timesteps. Let $\mathbf{A}_\tau$ denote the action tokens at the same timestep, and let $\mathbf{S}$ denote the fused language and proprioceptive conditioning tokens.

DynaRoute is evaluated once at each diffusion timestep:

$$\mathbf{z}_\tau = G_\psi(\text{sg}(\mathbf{V}_\tau), \text{sg}(\mathbf{A}_\tau), \mathbf{S}, \tau) \in \mathbb{R}^{B \times S_v}, \quad (10)$$

where $\text{sg}(\cdot)$ denotes stop-gradient. The predicted dynamic relevance is

$$\mathbf{g}_\tau = \sigma(\mathbf{z}_\tau) \in (0, 1)^{B \times S_v}, \quad (11)$$

and is supervised by the downsampled tracker-derived map $\tilde{\mathbf{m}}^*$ defined in Eq. 8.

For each future visual token i , we convert its relevance into a log-space bias:

$$b_i = \alpha \log(\max(g_i, \epsilon)), \quad (12)$$

where α controls the routing strength and ϵ ensures numerical stability. Low-relevance tokens therefore receive stronger negative biases. We further center the bias over visual tokens to stabilize the bias scale:

$$\bar{b}_i = b_i - \frac{1}{S_v} \sum_{q=1}^{S_v} b_q. \quad (13)$$

Let $\mathbf{Q}_\ell^V$, $\mathbf{K}_\ell^V$, and $\mathbf{V}_\ell^V$ denote the visual queries, keys, and values at the ℓ -th MoT layer. The same bias is shared across all layers at the current diffusion timestep:

$$\text{Attn}_\ell^{V \leftarrow V} = \text{softmax} \left(\frac{\mathbf{Q}_\ell^V (\mathbf{K}_\ell^V)^\top}{\sqrt{d}} + \bar{\mathbf{B}} \right) \mathbf{V}_\ell^V, \quad (14)$$

where $\bar{\mathbf{B}}$ is obtained by broadcasting $\bar{\mathbf{b}}$ over attention heads and visual-query positions.

Additional implementation details of DynaRoute, together with further analyses of its routing behavior and effectiveness, are provided in Appendix.

Action-only inference with routed video cache. As illustrated in Fig. 4, DC-WAM follows Fast-WAM-style action-only inference at deployment. Rather than iteratively denoising future video, it executes the video branch only once to construct a routed visual key-value cache $\mathcal{C}_V$ for the action branch.

At the initial diffusion step $\tau_{\text{init}} = 1$, we form the pseudo-video and noisy action inputs as

$$\tilde{\mathbf{V}} = [\mathbf{V}^{\text{obs}}, \epsilon^V], \quad \epsilon^V \sim \mathcal{N}(\mathbf{0}, \mathbf{I}), \quad (15)$$

and

$$\tilde{\mathbf{A}} = \epsilon^A, \quad \epsilon^A \sim \mathcal{N}(\mathbf{0}, \mathbf{I}), \quad (16)$$

where $\mathbf{V}^{\text{obs}}$ is the clean observed-frame latent and ϵ^V occupies the future visual slots. DynaRoute is evaluated once to produce

$$\bar{\mathbf{b}}_{\text{cache}} = \text{Bias} \left(G_\psi \left(\text{sg}(\tilde{\mathbf{V}}), \text{sg}(\tilde{\mathbf{A}}), \mathbf{S}, \tau_{\text{init}} \right) \right), \quad (17)$$

which is injected during video-cache prefill. After constructing $\mathcal{C}_V$, the video branch is no longer executed and the action branch reuses the cached visual keys and values for all subsequent denoising steps.

This design preserves train-inference consistency for DynaRoute, as it closely matches the high-noise regime used during training. At large diffusion timesteps, DynaRoute infers dynamic relevance primarily from the clean observation, language instruction, and proprioceptive state; at lower-noise timesteps, it can additionally exploit partially preserved information in the action and future-visual tokens.

Training Objective

The complete training objective is

$$\mathcal{L} = \mathcal{L}_{\text{FM}}^A + \mathcal{L}_{\text{TD}}^V + \mathcal{L}_{\text{TrackFM}}^V + \mathcal{L}_{\text{Route}}, \quad (18)$$

where the four terms supervise action generation, dense temporal dynamics, sparse interaction regions, and DynaRoute relevance prediction, respectively.

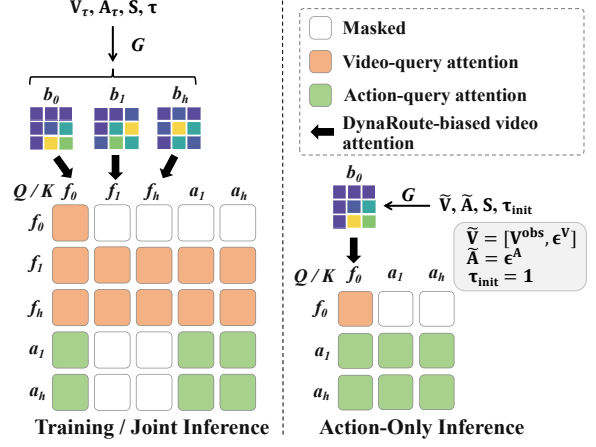


Figure 4: DynaRoute during training and inference. During training, a layer-shared bias is predicted at each diffusion timestep and injected into video-query attention. At deployment, DynaRoute is evaluated once at $\tau_{\text{init}} = 1$ to construct the routed visual cache $\mathcal{C}_V$. The video branch is then disabled and the cache is reused throughout action denoising.

Flow matching. For a clean sample $\mathbf{x}$ and Gaussian noise $\epsilon \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$, we use the linear interpolation

$$\mathbf{x}_\tau = (1 - \tau)\mathbf{x} + \tau\epsilon, \quad \tau \sim \mathcal{U}(0, 1), \quad (19)$$

with the flow target

$$\mathbf{u} = \epsilon - \mathbf{x}. \quad (20)$$

For actions, the model predicts $\hat{\mathbf{u}}^A$ and is trained with

$$\mathcal{L}_{\text{FM}}^A = \mathbb{E} \left[\left\| \hat{\mathbf{u}}^A - \mathbf{u}^A \right\|_2^2 \right]. \quad (21)$$

To emphasize state transitions, we impose a temporal-difference loss on the visual flow velocity at the VAE latent resolution (Gao et al. 2026). Let $\hat{\mathbf{u}}_t^V$ and $\mathbf{u}_t^V = \epsilon_t^V - \mathbf{x}_t^V$ denote the predicted visual velocity and the target flow velocity at time step t . The temporal difference objective $\mathcal{L}_{\text{TD}}^V$ enforces temporal consistency by matching adjacent-frame transitions between the predicted and target visual velocity fields:

$$\mathcal{L}_{\text{TD}}^V = \mathbb{E} \left[\sum_{t=1}^{T_v-1} \left\| (\hat{\mathbf{u}}_t^V - \hat{\mathbf{u}}_{t-1}^V) - (\mathbf{u}_t^V - \mathbf{u}_{t-1}^V) \right\|_2^2 \right]. \quad (22)$$

This temporal-difference loss suppresses temporally invariant appearance components, but it does not explicitly localize task-critical interaction regions. We therefore use the tracker-derived dynamic map $\mathbf{m}^* \in [0, 1]^{T_v \times H_z \times W_z}$ to reweight the original visual FM error on the VAE latent grid. Since $\mathbf{m}^*$ is constructed from thresholded tracked motion, most static background cells have zero or near-zero weights, making the map spatially sparse. For each latent frame t and cell p , let

$$e_{t,p}^V = \left\| \hat{\mathbf{u}}_{t,p}^V - \mathbf{u}_{t,p}^V \right\|_2^2. \quad (23)$$

The tracker-guided objective is

$$\mathcal{L}_{\text{TrackFM}}^V = \mathbb{E} \left[\frac{\sum_{t,p} m_{t,p}^* e_{t,p}^V}{\sum_{t,p} m_{t,p}^* + \epsilon} \right]. \quad (24)$$

Thus, TrackFM redistributes the visual FM loss toward sparse regions with strong tracked motion, such as the end effector, manipulated objects, and contact areas. Together, the temporal-difference and TrackFM objectives provide complementary dense and sparse dynamic supervision.

DynaRoute Relevance Prediction. The downsampled token-level target $\tilde{\mathbf{m}}^* \in [0, 1]^{T_v \times K_D}$ from Eq. (8) is used as the supervision target for DynaRoute. Given the predicted relevance $\mathbf{g} \in [0, 1]^{T_v \times K_D}$, we combine binary cross-entropy with soft Dice losses:

$$\mathcal{L}_{\text{Route}} = \mathcal{L}_{\text{BCE}}(\mathbf{g}, \tilde{\mathbf{m}}^*) + \lambda_{\text{Dice}} \mathcal{L}_{\text{Dice}}(\mathbf{g}, \tilde{\mathbf{m}}^*), \quad (25)$$

where

$$\mathcal{L}_{\text{Dice}} = 1 - \frac{2 \sum_{t,k} g_{t,k} \tilde{m}_{t,k}^* + \epsilon}{\sum_{t,k} g_{t,k} + \sum_{t,k} \tilde{m}_{t,k}^* + \epsilon}. \quad (26)$$

The BCE term provides token-wise relevance supervision, while the Dice term mitigates the imbalance caused by sparse dynamic regions.

Experiments

Experimental Setup

Baselines. We use FastWAM and FastWAM-AC as matched baselines under the same Wan2.2 backbone, demonstrations, action space, and evaluation protocol. FastWAM-AC retains the action-conditioned visual interaction used by DC-WAM but removes the dynamic-centric objectives and DynaRoute, providing direct controlled comparison. All models are trained on eight NVIDIA A100 GPUs.

LIBERO and LIBERO-Plus. We evaluate in-distribution policy performance on the four standard LIBERO suites: Spatial, Object, Goal, and Long (Liu et al. 2023), using 50 rollouts per task. We further use LIBERO-Plus (Fei et al. 2025) specifically as an out-of-distribution benchmark. It perturbs the original LIBERO tasks along seven dimensions: object layout, camera viewpoint, robot initial state, language instruction, lighting, background texture, and sensor noise. Each perturbation is organized into five difficulty levels, from L1 to L5. All methods are trained on the same 2000 clean demonstrations from the standard LIBERO benchmark and evaluated with identical seeds and episode horizons.

Real-world Evaluation. We evaluate DC-WAM on the Agilex Piper bimanual platform shown in Fig. 5 using three long-horizon tasks: T1, stacking three bowls; T2, stacking plates on a shelf; and T3, opening a basket, placing a potato inside, and closing it. We collect 100 successful demonstrations per task. Tracker-derived dynamic maps are generated offline from training videos and used only as training supervision; execution requires no external tracker, segmentation model, or ground-truth dynamic map.

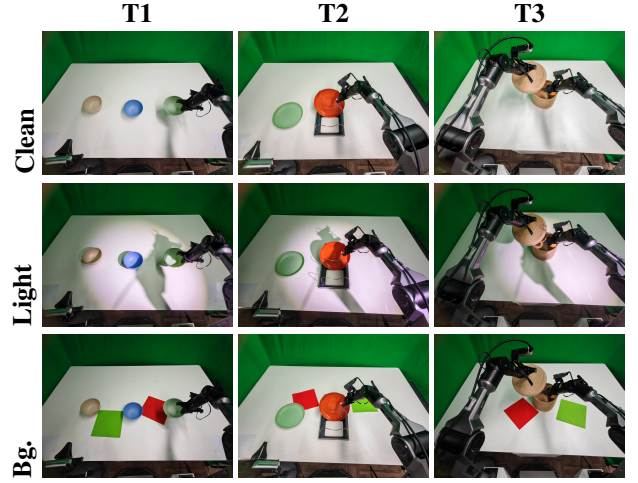


Figure 5: Real-world task-by-condition evaluation matrix. Columns show three bimanual manipulation tasks, while rows show clean, lighting-perturbed, and background-perturbed settings.

For each method, we conduct 100 trials per task-condition pair under clean, lighting, and background conditions. Lighting is varied using an external spotlight, while colored paper patches serve as localized background distractors, altering appearance without substantially changing the underlying dynamics.

Main Results

Main Results on LIBERO and LIBERO-Plus. Table 1 reports ID performance on LIBERO and OOD robustness on LIBERO-Plus. DC-WAM reaches 98.1% on LIBERO, improving FastWAM-AC by 1.4 points and FastWAM by 0.5 points. On LIBERO-Plus, it achieves 60.9%, outperforming the two baselines by 7.1 and 9.4 points, respectively. DC-WAM also has the smallest ID-OOD drop (37.2 versus 42.9 and 46.1 points) and improves six of seven perturbation dimensions, with the largest gains under language, background, and lighting shifts.

Results on Real-world Experiments. Table 2 reports real-world performance for policies trained only on clean demonstrations. DC-WAM consistently improves success across the three tasks, with larger gains under lighting shifts and background perturbations. It also exhibits smaller clean-to-OOD performance drops, demonstrating improved real-world OOD robustness.

Ablation Studies

Dense and sparse dynamic supervision. We ablate dense and sparse dynamic supervision under the same DynaRoute-enabled setting. Dense corresponds to temporal-difference supervision over the full VAE latent grid, while Sparse corresponds to TrackFM reweighting around tracker-derived interaction regions. As shown in Table 3, each signal improves over FastWAM-AC, and their combination in DC-WAM per-

Evaluation		FastWAM	FastWAM-AC	DC-WAM
<i>LIBERO</i>	Avg.	97.6	96.7	98.1
<i>LIBERO-Plus</i> (OOD)	Camera	16.2	24.0	23.9
	Robot	44.9	43.9	51.7
	Lang.	70.9	70.7	83.4
	Light	80.8	81.4	91.7
	Bg.	54.1	50.5	61.3
	Noise	40.5	50.8	54.2
	Layout	63.4	63.2	69.8
	Avg.	51.5	53.8	60.9
ID-OOD drop ↓		46.1	42.9	37.2

Table 1: Success rate (%) on LIBERO (ID) and LIBERO-Plus (OOD), with all methods trained only on clean LIBERO. ID-OOD drop denotes the difference between average success rates; lower is better.

Task	Setting	FastWAM-AC	DC-WAM	Δ
Stack-Bowl	Clean	76	84	8
	Light	34 (↓ 42)	48 (↓ 38)	14
	Background	52 (↓ 24)	61 (↓ 23)	9
Pile-Plates	Clean	80	89	9
	Light	41 (↓ 39)	71 (↓ 18)	30
	Background	46 (↓ 34)	69 (↓ 20)	23
Collect-Potato	Clean	62	70	8
	Light	53 (↓ 9)	66 (↓ 4)	13
	Background	30 (↓ 32)	45 (↓ 25)	15

Table 2: Real-world success rate (%). All methods are trained only on clean demonstrations and evaluated without adaptation under clean and unseen appearance-level perturbations. Values in parentheses indicate the absolute success-rate drop relative to the corresponding clean condition.

forms best, indicating that global temporal changes and localized interaction dynamics are complementary.

Dynamics-aware routing and gradient path. Table 4 compares routing strategies under the same dynamic supervision. DynaRoute applies a key-side bias to visual-token attention, while the variants remove routing, shuffle relevance, or bias action-query attention. Its gains over no routing and shuffled relevance demonstrate the importance of spatially aligned dynamic cues, whereas the degradation of action-query routing suggests that these cues should guide the visual branch rather than action tokens directly.

To further examine the visual-to-action gradient path, we use a stop-gradient variant that blocks gradients from visual objectives to the action branch while preserving the forward computation. The resulting drops of 1.1 points on LIBERO and 3.9 points on LIBERO-Plus indicate that video supervision contributes to action learning through the action-conditioned visual computation path.

Analysis

Does higher PSNR imply better control? Figure 1 shows that future-frame PSNR does not correlate monotonically

Variant	LIBERO	LIBERO-Plus
FastWAM-AC	96.7	53.8
+ Dense w/ Route	97.1	56.6
+ Sparse w/ Route	97.4	58.7
DC-WAM	98.1	60.9

Table 3: Ablation of dense and sparse dynamic supervision with DynaRoute enabled. Dense denotes temporal-difference supervision, and sparse denotes TrackFM supervision. FastWAM-AC removes both dynamic supervision and DynaRoute.

Routing variant	LIBERO	LIBERO-Plus
No routing	97.7	59.1
Shuffled relevance	96.8	57.8
Action-query routing	95.8	49.2
DynaRoute	98.1	60.9
DynaRoute w/ stop-grad	97.0	57.0

Table 4: Ablation of dynamics-aware attention bias.

with policy success across supervision variants. Dense w/ Route yields the lowest PSNR but still outperforms FastWAM-AC, while DC-WAM achieves the highest success despite lower PSNR than several variants. This mismatch indicates that standard video-quality metrics do not fully capture the control utility of future prediction in WAMs. Focusing supervision and attention on interaction-induced dynamics can better support policy learning, even at the cost of appearance fidelity.

How does DC-WAM reshape visual attention? Figure 3 compares DC-WAM with the matched FastWAM-AC baseline under paired clean and increasingly corrupted observations. As corruption intensifies, FastWAM-AC becomes diffuse and drifts toward irrelevant background regions, whereas DC-WAM consistently attends to dynamic-relevant objects and interaction regions. This suggests that dynamic-centric supervision and relevance routing produce robust, change-centric representations that preserve action-relevant cues under visual shifts.

Conclusion

We introduced DC-WAM, a dynamic-centric World-Action Model that improves the control utility of future prediction by shifting the RGB video branch from appearance reconstruction toward interaction-induced dynamics. DC-WAM combines dense and sparse visual objectives with DynaRoute attention bias, requires no additional modality-specific prediction, and supports efficient action-only inference. Experiments on LIBERO, LIBERO-Plus, and real-world bimanual tasks demonstrate improved success and robustness. Ablations confirm the complementarity of dense and sparse supervision, the effectiveness of dynamics-aware routing, and the mismatch between PSNR and control performance. Future work will extend DC-WAM to larger datasets, diverse robot platforms, and WAM architectures beyond MoT.

References

- Black, K.; Brown, N.; Driess, D.; Esmail, A.; Equi, M.; Finn, C.; Fusai, N.; Groom, L.; Hausman, K.; Ichter, B.; Jakubczak, S.; Jones, T.; Ke, L.; Levine, S.; Li-Bell, A.; Mothukuri, M.; Nair, S.; Pertsch, K.; Shi, L. X.; Tanner, J.; Vuong, Q.; Walling, A.; Wang, H.; and Zhilinsky, U. 2024. π_0 : A Vision-Language-Action Flow Model for General Robot Control. *arXiv preprint arXiv:2410.24164*.
- Dai, Y.; Lee, J.; Zhang, Y.; Ma, Z.; Yang, J.; Zadeh, A.; Li, C.; Fazeli, N.; and Chai, J. 2025. AimBot: A Simple Auxiliary Visual Cue to Enhance Spatial Awareness of Visuomotor Policies. *arXiv preprint arXiv:2508.08113*.
- Fei, S.; Wang, S.; Shi, J.; Dai, Z.; Cai, J.; Qian, P.; Ji, L.; He, X.; Zhang, S.; Fei, Z.; Fu, J.; Gong, J.; and Qiu, X. 2025. LIBERO-Plus: In-Depth Robustness Analysis of Vision-Language-Action Models. *arXiv preprint arXiv:2510.13626*.
- Gao, S.; Liang, W.; Zheng, K.; Malik, A.; Ye, S.; Yu, S.; Tseng, W.-C.; Dong, Y.; Mo, K.; Lin, C.-H.; Ma, Q.; Nah, S.; Magne, L.; Xiang, J.; Xie, Y.; Zheng, R.; Niu, D.; Tan, Y. L.; Zentner, K. R.; Kurian, G.; Indupuru, S.; Jannaty, P.; Gu, J.; Zhang, J.; Malik, J.; Abbeel, P.; Liu, M.-Y.; Zhu, Y.; Jang, J.; and Fan, L. J. 2026. DreamDojo: A Generalist Robot World Model from Large-Scale Human Videos. *arXiv preprint arXiv:2602.06949*.
- Gu, J.; Kirmani, S.; Wohlhart, P.; Lu, Y.; Arenas, M. G.; Rao, K.; Yu, W.; Fu, C.; Gopalakrishnan, K.; Xu, Z.; Sundaresan, P.; Xu, P.; Su, H.; Hausman, K.; Finn, C.; Vuong, Q.; and Xiao, T. 2023. RT-Trajectory: Robotic Task Generalization via Hindsight Trajectory Sketches. *arXiv preprint arXiv:2311.01977*.
- Guan, J.; Zhao, W.; Pei, Y.; Chen, Z.; Solin, A.; and Kannala, J. 2026. Point Tracking Improves World Action Models. *arXiv preprint arXiv:2605.23856*.
- Hu, Y.; Guo, Y.; Wang, P.; Chen, X.; Wang, Y.-J.; Zhang, J.; Sreenath, K.; Lu, C.; and Chen, J. 2024. Video Prediction Policy: A Generalist Robot Policy with Predictive Visual Representations. *arXiv preprint arXiv:2412.14803*.
- Karaev, N.; Makarov, I.; Wang, J.; Neverova, N.; Vedaldi, A.; and Rupprecht, C. 2024. CoTracker3: Simpler and Better Point Tracking by Pseudo-Labeling Real Videos. *arXiv preprint arXiv:2410.11831*.
- Kim, M. J.; Gao, Y.; Lin, T.-Y.; Lin, Y.-C.; Ge, Y.; Lam, G.; Liang, P.; Song, S.; Liu, M.-Y.; Finn, C.; and Gu, J. 2026. Cosmos Policy: Fine-Tuning Video Models for Visuomotor Control and Planning. *arXiv:2601.16163*.
- Kim, M. J.; Pertsch, K.; Karamcheti, S.; Xiao, T.; Balakrishna, A.; Nair, S.; Rafailov, R.; Foster, E.; Lam, G.; Sanketi, P.; Vuong, Q.; Kollar, T.; Burchfiel, B.; Tedrake, R.; Sadigh, D.; Levine, S.; Liang, P.; and Finn, C. 2024. OpenVLA: An Open-Source Vision-Language-Action Model. *arXiv preprint arXiv:2406.09246*.
- Kirillov, A.; Mintun, E.; Ravi, N.; Mao, H.; Rolland, C.; Gustafson, L.; Xiao, T.; Whitehead, S.; Berg, A. C.; Lo, W.-Y.; Dollár, P.; and Girshick, R. 2023. Segment Anything. *arXiv preprint arXiv:2304.02643*.
- Li, J.; Guo, T.; Ye, Y.; Zhang, R.; Chi, X.; Sun, Q.; Li, Y.; Lou, Y.; Huang, Y.; Lu, Z.; Guo, M.; and Zhang, S. 2026a. Efficient-WAM: A 1B-Parameter World-Action Model with Low-Cost Future Imagination. *arXiv preprint arXiv:2606.10040*.
- Li, L.; Zhang, Q.; Luo, Y.; Yang, S.; Wang, R.; Han, F.; Yu, M.; Gao, Z.; Xue, N.; Zhu, X.; Shen, Y.; and Xu, Y. 2026b. Causal World Modeling for Robot Control. *arXiv preprint arXiv:2601.21998*.
- Li, S.; Gao, Y.; Sadigh, D.; and Song, S. 2025. Unified Video Action Model. *arXiv preprint arXiv:2503.00200*.
- Liu, B.; Zhu, Y.; Gao, C.; Feng, Y.; Liu, Q.; Zhu, Y.; and Stone, P. 2023. LIBERO: Benchmarking Knowledge Transfer for Lifelong Robot Learning. *arXiv preprint arXiv:2306.03310*.
- Liu, Y.; Sun, P.; Li, S.; Xie, Y.; Zhang, L.; Chao, X.; Dong, S.; Chen, F.; Zhang, X.-P.; and Ding, W. 2026. OA-WAM: Object-Addressable World Action Model for Robust Robot Manipulation. *arXiv preprint arXiv:2605.06481*.
- Lou, Y.; Chi, X.; Zhang, X.; Qian, Z.; Li, C.; Zhang, R.; Lyu, Y.; Song, G.; Fu, C.; Xu, H.; Wang, P.; and Zhang, S. 2026. Mask World Model: Predicting What Matters for Robust Robot Policy Learning. *arXiv preprint arXiv:2604.19683*.
- Press, O.; Smith, N. A.; and Lewis, M. 2022. Train Short, Test Long: Attention with Linear Biases Enables Input Length Extrapolation. *arXiv:2108.12409*.
- Ranasinghe, K.; Zhou, H.; Fang, Y.; Yang, L.; Xue, L.; Xu, R.; Xiong, C.; Savarese, S.; Ryoo, M. S.; and Niebles, J. C. 2026. Future Optical Flow Prediction Improves Robot Control & Video Generation. *arXiv preprint arXiv:2601.10781*.
- Shaw, P.; Uszkoreit, J.; and Vaswani, A. 2018. Self-Attention with Relative Position Representations. *arXiv:1803.02155*.
- Wan, T.; Wang, A.; Ai, B.; Wen, B.; Mao, C.; Xie, C.-W.; Chen, D.; Yu, F.; Zhao, H.; Yang, J.; Zeng, J.; Wang, J.; Zhang, J.; Zhou, J.; Wang, J.; Chen, J.; Zhu, K.; Zhao, K.; Yan, K.; Huang, L.; Feng, M.; Zhang, N.; Li, P.; Wu, P.; Chu, R.; Feng, R.; Zhang, S.; Sun, S.; Fang, T.; Wang, T.; Gui, T.; Weng, T.; Shen, T.; Lin, W.; Wang, W.; Wang, W.; Zhou, W.; Wang, W.; Shen, W.; Yu, W.; Shi, X.; Huang, X.; Xu, X.; Kou, Y.; Lv, Y.; Li, Y.; Liu, Y.; Wang, Y.; Zhang, Y.; Huang, Y.; Li, Y.; Wu, Y.; Liu, Y.; Pan, Y.; Zheng, Y.; Hong, Y.; Shi, Y.; Feng, Y.; Jiang, Z.; Han, Z.; Wu, Z.-F.; and Liu, Z. 2025. Wan: Open and Advanced Large-Scale Video Generative Models. *arXiv:2503.20314*.
- Ye, A.; Wang, B.; Ni, C.; Huang, G.; Zhao, G.; Li, H.; Li, H.; Li, J.; Lv, J.; Liu, J.; Cao, M.; Li, P.; Deng, Q.; Mei, W.; Wang, X.; Chen, X.; Zhou, X.; Wang, Y.; Chang, Y.; Li, Y.; Zhou, Y.; Ye, Y.; Liu, Z.; and Zhu, Z. 2026a. GigaWorld-Policy: An Efficient Action-Centered World-Action Model. *arXiv:2603.17240*.
- Ye, S.; Ge, Y.; Zheng, K.; Gao, S.; Yu, S.; Kurian, G.; Indupuru, S.; Tan, Y. L.; Zhu, C.; Xiang, J.; Malik, A.; Lee, K.; Liang, W.; Ranawaka, N.; Gu, J.; Xu, Y.; Wang, G.; Hu, F.; Narayan, A.; Bjorck, J.; Wang, J.; Kim, G.; Niu, D.; Zheng, R.; Xie, Y.; Wu, J.; Wang, Q.; Julian, R.; Xu, D.; Du, Y.; Chebotar, Y.; Reed, S.; Kautz, J.; Zhu, Y.; Fan, L. J.;

and Jang, J. 2026b. World Action Models Are Zero-Shot Policies. *arXiv preprint arXiv:2602.15922*.

Yu, H.; Lin, H.; Zhang, J.; Zhang, W.; Gu, C.; Li, H.; and Tan, P. 2026. MaskWAM: Unifying Mask Prompting and Prediction for World-Action Models. *arXiv preprint arXiv:2606.13515*.

Yuan, T.; Dong, Z.; Liu, Y.; and Zhao, H. 2026. Fast-WAM: Do World Action Models Need Test-Time Future Imagination? *arXiv preprint arXiv:2603.16666*.

Zhang, J.; Zhu, J.; Su, T.; Ma, C.; Huang, Z.; Xu, Y.; and Wang, H. 2026a. Learning 4D Geometric Priors for Inference-Efficient World Action Models. *arXiv preprint arXiv:2607.05468*.

Zhang, P.; Deng, Y.; Sun, S.; Ma, J.; Wang, D.; Du, J.; Pan, Z.; Huang, Y.; Liang, H.; Huang, S.; Zhang, R.; Xie, E.; Liu, M.-Y.; and Zhou, D. 2026b. PhysisForcing: Physics Reinforced World Simulator for Robotic Manipulation. *arXiv:2606.28128*.

Zhang, Y.; Zhang, W.; Qi, Z.; Zhang, H.; Lin, H.; Zhang, J.; Mu, Y.; Yang, X.; Zeng, W.; and Jin, X. 2026c. ImageWAM: Do World Action Models Really Need Video Generation, or Just Image Editing? *arXiv preprint arXiv:2606.19531*.

Zheng, R.; Liang, Y.; Huang, S.; Gao, J.; Daumé III, H.; Kolobov, A.; Huang, F.; and Yang, J. 2024. TraceVLA: Visual Trace Prompting Enhances Spatial-Temporal Awareness for Generalist Robotic Policies. *arXiv preprint arXiv:2412.10345*.

Zhu, C.; Yu, R.; Feng, S.; Burchfiel, B.; Shah, P.; and Gupta, A. 2025. Unified World Models: Coupling Video and Action Diffusion for Pretraining on Large Robotic Datasets. *arXiv preprint arXiv:2504.02792*.