

CytoBERT: A Foundation Model for Cytometry Data

Syed Abdul Haseeb Qadri¹, Bjarne C. Hiller¹, Felix Blanke², Vanja Sophie Cangalovic², Kutalmış Coşkun², Amin Mirzaei², Tom Siegl¹, Sebastian Bader¹, Thomas Kirste¹, and Martin Becker^{1,2,3}

¹ University of Rostock, Rostock, Germany

² Marburg University, Marburg, Germany

³ Hessian Center for Artificial Intelligence, Darmstadt, Germany

Abstract. Cytometry measures the complex characteristics of single cells (e.g., counts and protein expression of immune cells) and is widely used across immunological research and clinical settings. However, cytometry data is highly heterogeneous and unstandardized due to experimental protocols and the choice of measured features. While machine learning methods hold the potential to gain deeper insights into cell biology, these challenges make them difficult to apply and transfer across studies. Recent advances in foundation models can alleviate these issues, but corresponding approaches are still scarce in this field. To address this, we provide CytoBERT, a publicly available, open-source, open-weight foundation model for single-cell cytometry data with variable marker panels. CytoBERT is pretrained in a self-supervised manner on a large-scale cytometry corpus (15 human datasets with heterogeneous marker panels and more than 50 million cells) curated through marker standardization, enabling it to learn transferable inter-marker relationships within cells. Fine-tuning CytoBERT for sample-level classification demonstrates that transfer learning across heterogeneous cytometry datasets is feasible, providing a starting point for scalable, generalizable cytometry analysis. Code is available at GitHub.

Keywords: cytometry · foundation models · self-supervised learning

1 Introduction

Single-cell cytometry is widely used in immunology and clinical research for immunophenotyping, disease detection, and treatment-response analysis [10,19]. It measures the expression of 5–50 protein markers at single-cell resolution. Thus, each cytometry sample can be viewed as a cell-by-marker matrix, where rows correspond to individual cells and columns correspond to measured markers. Despite its broad applications, cytometry data remain difficult to integrate across studies [17]. Depending on the study objective and laboratory, different sets of markers, known as marker panels, are measured [11]. In addition, even the same biological marker may be associated with different detection channels, metal

isotope tags, and naming conventions [14,16,11]. As a result, marker panels and marker annotations are generally not standardized across datasets, making it challenging to train models that can transfer knowledge across studies [11].

Traditional cytometry analysis is commonly performed using manual gating [14], where bounding boxes are drawn around cell populations in a hierarchy of bivariate dot plots [14]. Gated populations are then summarized per sample using population abundances and marker-expression intensities, which can be statistically associated with phenotypes or compared between clinical groups [15]. Although widely used, manual gating is laborious, subjective, time-consuming, and difficult to scale as the number of measured markers increases. Machine-learning and deep-learning methods have been proposed to automate cytometry analysis, but most are dataset-specific, assume a fixed marker panel, require labeled training data, and must be retrained for each new study or task [11,8].

To overcome these limitations, we introduce CytoBERT, a Transformer-based foundation model for cytometry data inspired by the recently proposed ImmuneFM framework [8]. Unlike ImmuneFM, we provide implementation details and make code and data available. CytoBERT processes each cell independently as a sequence of marker-expression tokens and is pretrained with a self-supervised masked expression prediction objective to learn marker co-expression patterns within cells. We extend this approach with a shared vocabulary of 220 distinct markers and evaluate the pretrained model for transfer learning across heterogeneous cytometry datasets. The model can then be fine-tuned for downstream tasks such as sample-level disease classification.

2 Related Work

Sample classification in cytometry. Several methods have been proposed for cytometry-based sample classification. Classical approaches such as CITRUS [5], FloReMi [21], and CytoDx [12] extract cluster- or marker-level features from single-cell data for sample-level prediction. Deep-learning methods, including CellCNN [4], CytoSet [23], and CytoCoSet [6], learn sample representations directly from single-cell data using convolutional or permutation-invariant architectures. However, these methods are typically supervised and dataset-specific, assume a fixed marker panel, and require retraining for each new dataset or task.

Foundation models for single-cell data. Foundation models have gained attention in single-cell transcriptomics, e.g., scBERT [22], scGPT [7], scFoundation [9], Geneformer [20], CellFM [24], and GeneMamba [18], learning reusable representations from large-scale RNA-seq datasets. However, these methods target transcriptomics, where genes provide a stable feature vocabulary across datasets. Cytometry is more heterogeneous because studies measure different subsets of protein markers and often lack standardized marker annotations. Existing cytometry foundation models remain limited: CyMAE [13] assumes a fixed marker panel (MDIPA) and is evaluated only on COVID studies, while ImmuneFM [8] addresses variable-panel cytometry but does not provide a publicly available

implementation. CytoBERT addresses this gap by learning transferable marker-expression representations from standardized cytometry datasets with variable marker panels and evaluating them for downstream sample-level classification.

3 Method

The core of CytoBERT is a Transformer encoder parametrized by θ and pre-trained using masked expression modeling. Each cell is represented as a sequence of tokens encoding marker-expression pairs. Let $m_j \in \{1, \dots, M\}$ denote the marker index of token j , where $M = 220$ is the number of distinct markers. CytoBERT learns a marker embedding function $E^m : \{1, \dots, M\} \rightarrow \mathbb{R}^d$, with $d = 128$. Expression values are transformed using $\text{arsinh}(x/5)$, MinMax-scaled per marker across the pretraining corpus, and discretized into $B = 10$ equal-width expression bins. Let $b_j \in \{1, \dots, B\}$ denote the corresponding bin index. CytoBERT learns a bin embedding function $E^b : \{1, \dots, B\} \rightarrow \mathbb{R}^d$. The final token embedding, $\mathbf{h}_j$, is given by

$$\mathbf{h}_j = E^m(m_j) + E^b(b_j).$$

Thus, each input token $\mathbf{h}_j$ combines marker identity and discretized expression information, enabling CytoBERT to process cells with variable marker panels.

3.1 Self-Supervised Pretraining

During pretraining, a subset of measured marker positions is randomly selected for masking. For this, the expression-bin embedding is replaced by a special [MASK] embedding, while the marker identity remains visible. This forces the model to infer the missing expression state of a known marker from the remaining marker-expression context within the same cell. Since zero-valued expressions dominate cytometry data and are often less informative, masking is applied only to non-zero marker-expression positions. A detailed overview of the framework is provided in supplementary material Figure 4.

Following Transformer-based single-cell models such as scBERT [22] and scGPT [7], a learnable classification token is prepended to the input sequence. During pretraining, the masked-bin prediction objective is applied to marker-token representations, while the classification token is retained for downstream fine-tuning as a compact cell-level representation:

$$\mathbf{H}_{in} = [\mathbf{h}_{CLS}, \mathbf{h}_1, \dots, \mathbf{h}_L], \quad \mathbf{H} = \text{Transformer}(\mathbf{H}_{in}).$$

The output $\mathbf{H}_0$ corresponds to the classification token used during downstream fine-tuning, while $\mathbf{H}_j$ denotes the contextualized representation of marker position j used for masked-bin prediction. A linear prediction head maps masked marker representations to logits over expression bins,

$$\mathbf{z}_j = \mathbf{W}\mathbf{H}_j + \mathbf{b}, \quad \mathbf{z}_j \in \mathbb{R}^B.$$

The logits define a conditional probability distribution over expression bins at masked marker position j ,

$$p_\theta(B_j = b \mid m_j, \{m_i, b_i\}_{i \notin \Omega}) = \text{softmax}(\mathbf{z}_j)_b,$$

where the variable B_j corresponds to the expression-bin label at position j , and Ω is the set of masked positions. The pretraining objective minimizes cross-entropy over masked positions only:

$$\mathcal{L}_{\text{pretrain}} = -\frac{1}{|\Omega|} \sum_{j \in \Omega} \log p_\theta(B_j = b_j \mid m_j, \{m_i, b_i\}_{i \notin \Omega}).$$

By reconstructing masked bins from the remaining measured markers, CytoBERT learns contextual inter-marker relationships within individual cells.

3.2 Fine-Tuning for Sample Classification

After pretraining, CytoBERT is fine-tuned end-to-end for supervised sample-level classification. Since labels are defined at the sample or patient level, cell-level representations must be aggregated into a sample-level embedding. For a sample containing K cells, each cell k is processed independently by the pre-trained encoder, and the classification-token output is used as the cell embedding: $\mathbf{c}_k = \mathbf{H}_0^{(k)}$. Cell embeddings are then aggregated using mean pooling,

$$\mathbf{s} = \frac{1}{K} \sum_{k=1}^K \mathbf{c}_k,$$

where $\mathbf{s} \in \mathbb{R}^d$ is the sample representation. This representation is passed to a task-specific, two-layer MLP classification head. During fine-tuning, both the pretrained encoder and the classification head are optimized jointly using cross-entropy loss. In the main experiments, we sample $K = 512$ cells per sample and evaluate performance using ROC-AUC.

4 Results & Analysis

4.1 Experimental Setup

Pretraining setup. CytoBERT is pretrained on a curated CyTOF corpus consisting of approximately 50 million cells from 15 out of 18 curated datasets. During pretraining, 25% of eligible non-zero marker-expression bins are masked in each epoch. The Transformer encoder uses hidden dimension $d = 128$, 6 layers, 8 attention heads, and 10 expression bins, and is optimized with Adam for 50 epochs. These hyperparameters are primarily motivated by ImmuneFM [8], the closest related cytometry foundation-model setting. A detailed overview of the markers across all datasets is provided in Supplementary Fig. 5.

Fine-tuning setup. For downstream evaluation, we fine-tune CytoBERT on sample classification tasks across seven CyTOF datasets from ImmPort. Since a single sample or file may contain a large number of cells, we randomly select 512 cells without replacement from each file to create a smaller subset/subsample. To reduce sampling variability, multiple independent subsamples are generated from each sample and classified independently. Class imbalance is handled by oversampling minority classes at the sample level.

Evaluation. We compare pretrained CytoBERT with logistic regression, CytoSet, and a randomly initialized CytoBERT model without pretrained weights (from scratch). Logistic regression uses marker expression values averaged across all cells in each subsample. CytoSet and CytoBERT both use a mean-pooling layer for sample-level aggregation. CytoSet uses a supervised, permutation-invariant architecture. Since logistic regression and CytoSet require fixed input dimensionality, they use only markers shared across all samples. CytoBERT is evaluated using its native variable-marker representation. Models are evaluated with 3-fold cross-validation. When subject identifiers are available, we use grouped splits to prevent subsamples from the same subject from appearing in both training and test folds. Performance is reported using ROC-AUC, with macro-averaged one-vs-rest ROC-AUC for multi-class tasks.

Table 1: Downstream CyTOF datasets. “Subjects” and “Samples” denote unique patients and sample files.

Dataset	Subjects	Samples	Disease/condition	In pretrain?
SDY788	20	126	Transplant	Yes
SDY997	54	259	Autoimmune	No
SDY1535	50	100	HIV diagnosis	Yes
SDY1708	74	146	COVID severity	No
SDY1733	49	99	Liver cancer stage	No
SDY2011	113	185	COVID diagnosis	Yes
SDY2015	36	107	Peanut allergy	Yes

4.2 Results on Downstream Datasets

Subject-level prediction results are reported in Fig. 1. Under grouped subject splitting, CytoBERT fine-tuning achieves the best average ranking across downstream datasets (Fig. 3). Compared with CytoBERT trained from scratch, this suggests that self-supervised pretraining provides a useful initialization for sample classification. The greatest improvements are observed on SDY1708 and SDY997, indicating transfer to datasets not seen during pretraining.

We evaluate CytoBERT on some datasets included in pretraining (Tab. 1). However, pretraining uses only marker-expression values and no sample labels, avoiding label leakage. In addition, the clearest gains are observed on truly held-out datasets, such as SDY1708 and SDY997. Because SDY788 has few subjects, its grouped-split performance is weakest.

Unlike prior evaluations using ungrouped splits [23,8], we report the main results under grouped subject splitting. This prevents samples from the same subject from appearing in both training and test folds, providing a more realistic estimate of generalization to unseen subjects. A comparison with ungrouped splitting is provided in Supplementary Figs. 2 and 3.

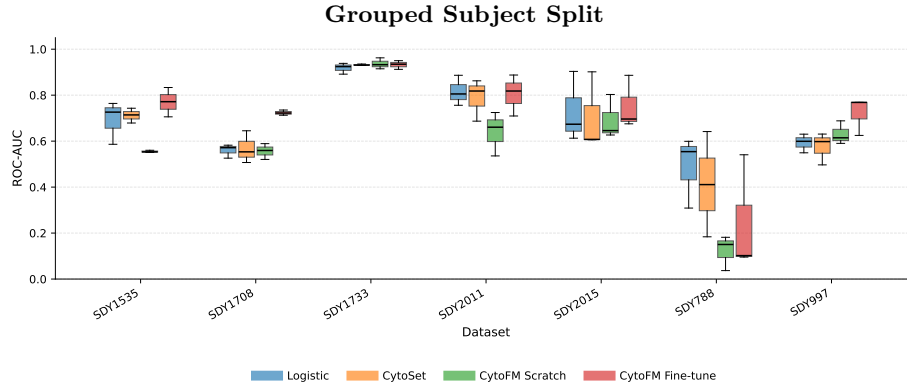


Fig. 1: Sample classification results under grouped subject splitting. ROC-AUC is shown on the y-axis. The Friedman test found no significant differences between models ($p = 0.093$), although CytoBERT achieved the best average rank.

5 Conclusion

We presented CytoBERT, an open-source, open-weight foundation model for variable-panel single-cell cytometry data. By standardizing markers across cytometry datasets and self-supervised pretraining, CytoBERT can be fine-tuned for downstream sample classification. Across the evaluated datasets, CytoBERT achieves the best average ranking under grouped subject splitting, suggesting that pretraining improves subject classification performance. Although differences to supervised baselines are not statistically significant, the results indicate the potential of foundation-model-style pretraining for cytometry. Our code and trained weights are publicly available to support reproducibility and future work.

Acknowledgments. This work has been funded by the ERDF (TBI-1-143-W-043), by the BMBF (01IS22077, 01ED2507) and DFG (CRC 1713: 534829736).

References

1. CytoBERT - code (2026). <https://doi.org/10.5281/zenodo.21299708>
2. CytoBERT - data (2026). <https://doi.org/10.5281/zenodo.21291131>
3. CytoBERT - docker (2026). <https://doi.org/10.5281/zenodo.21298697>
4. Arvaniti, E., Claassen, M.: Sensitive detection of rare disease-associated cell subsets via representation learning. *Nature Communications* **8**, 14825 (2017). <https://doi.org/10.1038/ncomms14825>
5. Bruggner, R.V., Bodenmiller, B., Dill, D.L., Tibshirani, R.J., Nolan, G.P.: Automated identification of stratifying signatures in cellular subpopulations. *Proceedings of the National Academy of Sciences* **111**(26), E2770–E2777 (2014). <https://doi.org/10.1073/pnas.1408792111>
6. Chen, C.J., Yi, H., Stanley, N.: Conditional similarity triplets enable covariate-informed representations of single-cell data. *BMC Bioinformatics* **26**(1), 45 (2025). <https://doi.org/10.1186/s12859-025-06069-5>
7. Cui, H., Wang, C., Maan, H., Pang, K., Luo, F., Duan, N., Wang, B.: scgpt: toward building a foundation model for single-cell multi-omics using generative ai. *Nature Methods* **21**, 1470–1480 (2024). <https://doi.org/10.1038/s41592-024-02201-0>
8. Ding, S., Bhattacharya, S., Butte, A.J.: ImmuneFM: Pre-training foundation model from cytometry data for immunology research (2025). <https://doi.org/10.1101/2025.07.09.664020>, <https://www.biorxiv.org/content/10.1101/2025.07.09.664020v1>
9. Hao, M., Gong, J., Zeng, X., Liu, C., Guo, Y., Cheng, X., Wang, T., Ma, J., Zhang, X., Song, L.: Large-scale foundation model on single-cell transcriptomics. *Nature Methods* **21**, 1481–1491 (2024). <https://doi.org/10.1038/s41592-024-02305-7>
10. Hartmann, F.J., Babdor, J., Gherardini, P.F., Amir, E.a.D., Jones, K., Sahaf, B., Marquez, D.M., Krutzik, P., O'Donnell, E., Sigal, N., Maecker, H.T., Davis, M.M., Nolan, G.P., Bendall, S.C.: Comprehensive immune monitoring of clinical trials to advance human immunotherapy. *Cell Reports* **28**(3), 819–831.e4 (2019). <https://doi.org/10.1016/j.celrep.2019.06.049>
11. Hu, Z., Bhattacharya, S., Butte, A.J.: Application of machine learning for cytometry data. *Frontiers in Immunology* **12**, 787574 (2022). <https://doi.org/10.3389/fimmu.2021.787574>
12. Hu, Z., Glicksberg, B.S., Butte, A.J.: Robust prediction of clinical outcomes using cytometry data. *Bioinformatics* **35**(7), 1197–1203 (2019). <https://doi.org/10.1093/bioinformatics/bty768>
13. Kim, J., Ionita, M., Lee, M., McKeague, M.L., Pattekar, A., Painter, M.M., Wagenaar, J., et al.: Cytometry masked autoencoder: An accurate and interpretable automated immunophenotyper. *Cell Reports Medicine* **5**(11), 101808 (2024). <https://doi.org/10.1016/j.xcrm.2024.101808>
14. Liu, P., Liu, S., Fang, Y., Xue, X., Zou, J., Tseng, G., Konnikova, L.: Recent advances in computer-assisted algorithms for cell subtype identification of cytometry data. *Frontiers in Cell and Developmental Biology* **Volume 8 - 2020** (2020). <https://doi.org/10.3389/fcell.2020.00234>, <https://www.frontiersin.org/journals/cell-and-developmental-biology/articles/10.3389/fcell.2020.00234>
15. Nowicka, M., Krieg, C., Crowell, H.L., Weber, L.M., Hartmann, F.J., Guglietta, S., Becher, B., Levesque, M.P., Robinson, M.D.: Cytobank workflow: differential discovery in high-throughput high-dimensional cytometry datasets. *F1000Research* **6**, 748 (2017). <https://doi.org/10.12688/f1000research.11622.3>

16. Overton, J.A., Vita, R., Dunn, P., Burel, J.G., Bukhari, S.A.C., Cheung, K.H., Kleinstein, S.H., Diehl, A.D., Peters, B.: Reporting and connecting cell type names and gating definitions through ontologies. *BMC Bioinformatics* **20**(5), 182 (2019). <https://doi.org/10.1186/s12859-019-2725-5>, <https://doi.org/10.1186/s12859-019-2725-5>
17. Pedersen, C.B., Dam, S.H., Barnkob, M.B., Leipold, M.D., Purroy, N., Rassenti, L.Z., Kipps, T.J., Nguyen, J., Lederer, J.A., Gohil, S.H., et al.: cycombine allows for robust integration of single-cell cytometry datasets within and across technologies. *Nature Communications* **13**(1), 1698 (2022)
18. Qi, C., Fang, H., Jiang, S., Song, X., Hu, T., Zhi, W.: Genemamba: An efficient and effective foundation model on single cell data. *arXiv* (2026)
19. Robinson, J.P., Ostafe, R., Iyengar, S.N., Rajwa, B., Fischer, R.: Flow cytometry: The next revolution. *Cells* **12**(14) (2023). <https://doi.org/10.3390/cells12141875>, <https://www.mdpi.com/2073-4409/12/14/1875>
20. Theodoris, C.V., Xiao, L., Chopra, A., Chaffin, M.D., Al Sayed, Z.R., Hill, M.C., Mantineo, H., Brydon, E.M., Zeng, Z., Liu, X.S., Ellinor, P.T.: Transfer learning enables predictions in network biology. *Nature* **618**, 616–624 (2023). <https://doi.org/10.1038/s41586-023-06139-9>
21. Van Gassen, S., Vens, C., Dhaene, T., Lambrecht, B.N., Saeys, Y.: FloReMi: Flow density survival regression using minimal feature redundancy. *Cytometry Part A* **89**(1), 22–29 (2016). <https://doi.org/10.1002/cyto.a.22734>
22. Yang, F., Wang, W., Wang, F., Davis, C., Gershman, S.J., et al.: scbert as a large-scale pretrained deep language model for cell type annotation of single-cell rna-seq data. *Nature Machine Intelligence* **4**, 852–866 (2022). <https://doi.org/10.1038/s42256-022-00534-z>
23. Yi, H., Stanley, N.: CytoSet: predicting clinical outcomes via set-modeling of cytometry data. In: *Proceedings of the 12th ACM International Conference on Bioinformatics, Computational Biology, and Health Informatics (ACM-BCB)*. pp. 1–8 (2021). <https://doi.org/10.1145/3459930.3469529>
24. Zeng, Y., Xie, J., Shanguan, N., Wei, Z., Li, W., Yu, W., Yang, Y., et al.: Cellfm: a large-scale foundation model pre-trained on transcriptomics of 100 million human cells. *Nature Communications* **16**, 4679 (2025). <https://doi.org/10.1038/s41467-025-59926-5>

A Data and Code Availability

A general overview of information about this manuscript is available at <https://bckrlab.org/p/cytobert>. Code is available at <https://github.com/bckrlab/cytobert>. To ensure long-term reproducibility and accessibility of the results, we additionally provide a code snapshot [1], data artifacts [2], as well as a Docker image [3].

This publication uses data provided by ImmPort. The pre-training dataset contains pre-processed data from the following ImmPort datasets:

- SDY207: Cytometry by time-of-flight shows combinatorial cytokine expression and virus-specific cell niches within a continuum of CD8+ T cell phenotypes
- SDY461: Monitoring of tissue-specific immune responses in man to naturally occurring pathogens using mass cytometric monitoring
- SDY515: Monozygotic and Dizygotic Twin Pair T-Cell Responses to Influenza Vaccination SLVP018 2010
- SDY788: Immune Profiles to Predict Response to Desensitization Therapy in Highly HLA-Sensitized Kidney Transplant Candidates
- SDY997: AMP Lupus Network Project: Molecular Characterization of Lupus Nephritis and Correlation with Response to Therapy
- SDY998: AMP Rheumatoid Arthritis Phase 1
- SDY1479: Plasmablast response to inactivated and live attenuated influenza vaccines (TIV3/TIV3 ID) in 2014
- SDY1535: TIGIT is upregulated by HIV-1 infection and marks a highly functional adaptive and mature subset of natural killer cells
- SDY1708: Broad dysregulation of innate immunity and hematopoiesis distinguishes mild from severe COVID-19
- SDY1733: Single-Cell immune signature for detecting early-stage HCC and early assessing PD-1 immunotherapy efficacy
- SDY1773: Human plasmacytoid dendritic cells mount a distinct antiviral response to virus-infected cells
- SDY2011: A shift in lung macrophage composition is associated with COVID-19 severity and recovery
- SDY2015: Mass cytometry analysis of PBMCs from peanut-sensitized tolerant and clinically allergic infants
- SDY2189: Systems vaccinology of the BNT162b2 mRNA vaccine in humans
- SDY2471: U19 CCHI_Project 1. The Role of CD4 Memory Phenotype, Memory, and Effector T Cells in
- SDY2497: Effects of Aging on Primary and Secondary Vaccine Responses in a 15-Year Longitudinal Cohort
- SDY2739: Clinical Immunity to Malaria Involves Epigenetic Reprogramming of Innate Immune Cells
- SDY2823: The Sound Life Project Healthy Adult Immunotypes

B Results under Grouped and Ungrouped Splitting

A performance comparison in terms of ROC-AUC across models and datasets is shown in Figure 2. A substantial drop in performance is observed under grouped subject splitting, particularly for the SDY788 dataset. This suggests that ungrouped sample-level splitting may allow models to exploit subject-specific patterns rather than disease-specific signals, leading to overly optimistic performance estimates. Therefore, grouped subject splitting provides a more appropriate evaluation setting for sample-level classification.

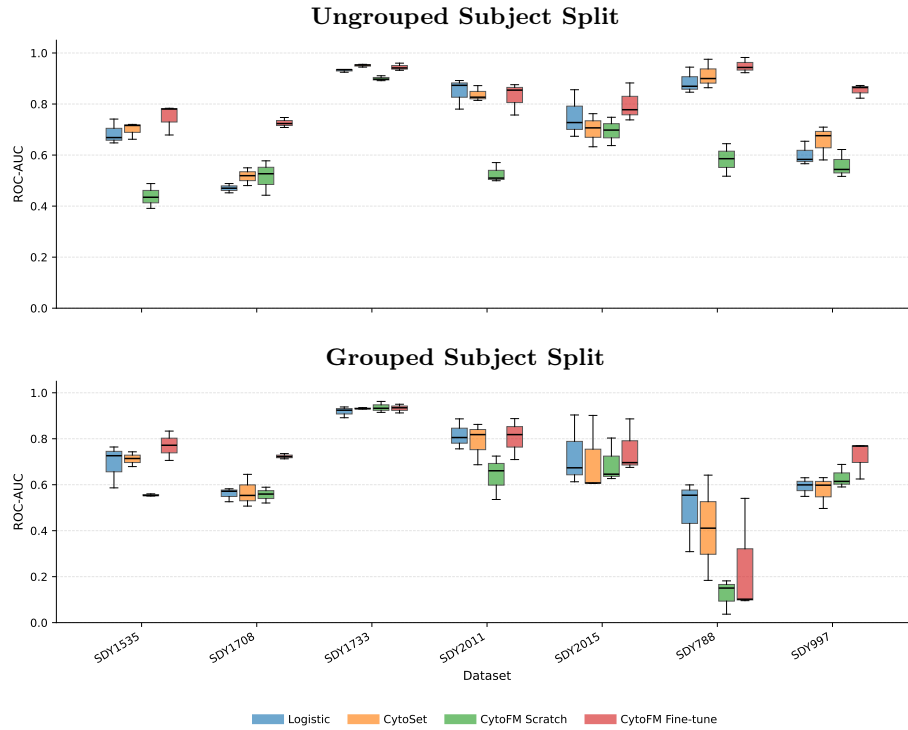


Fig. 2: Sample-level classification performance across CyTOF datasets under ungrouped splitting (top) and grouped subject splitting (bottom). The y-axis reports ROC-AUC. Grouped subject splitting ensures that samples from the same subject do not appear in both training and test folds.

C Comparison of Model Rankings

On average, CytoBERT achieves the best rank under both splitting strategies, as shown in the critical difference diagrams below. Models connected by a horizon-

tal line are not significantly different. Evaluation on additional datasets would provide a more robust comparison of model performance.

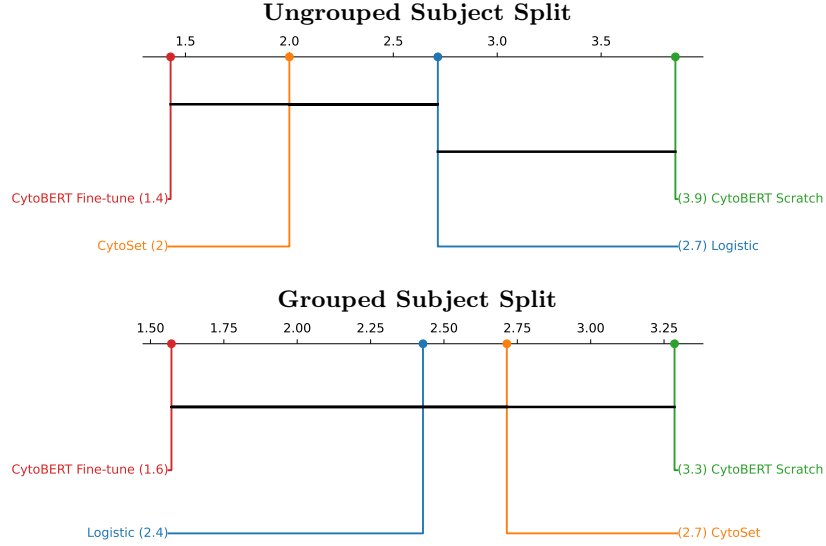



Fig. 3: Critical difference diagrams comparing average model ranks across CyTOF datasets under ungrouped splitting (top) and grouped subject splitting (bottom). Lower rank indicates better average performance.

Table 2: Mean ROC-AUC of different models across downstream datasets.


Dataset	Logistic	CytoSet	CytoBERT Scratch	CytoBERT
SDY1708	0.560	0.568	0.556	0.723
SDY1733	0.918	0.932	0.937	0.932
SDY997	0.593	0.575	0.631	0.721
SDY2015	0.730	0.705	0.692	0.753
SDY1535	0.692	0.712	0.555	0.770
SDY788	0.487	0.412	0.123	0.246
SDY2011	0.816	0.789	0.640	0.805

D Overview of CytoBERT


Figure 4 shows an overview of the full CytoBERT pipeline, and Figure 5 shows the shared marker vocabulary across all 18 datasets used.

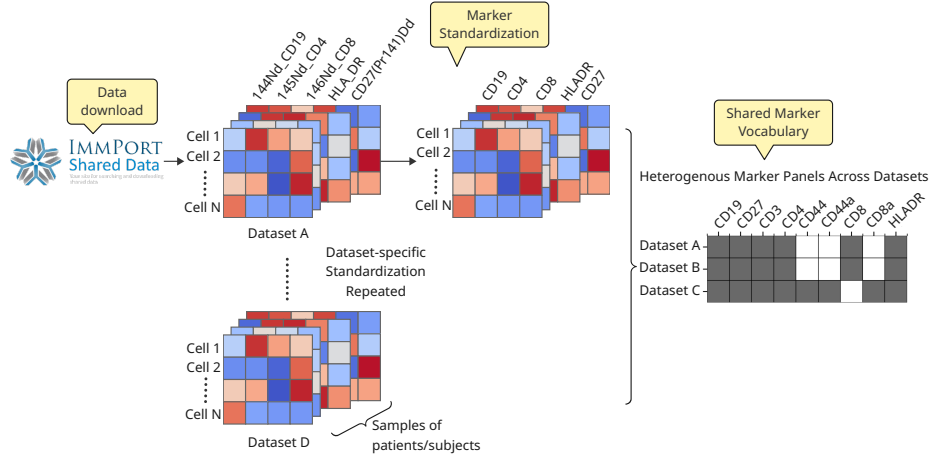

(a) Dataset curation and preprocessing, including marker harmonization, transformation, scaling, and expression binning.

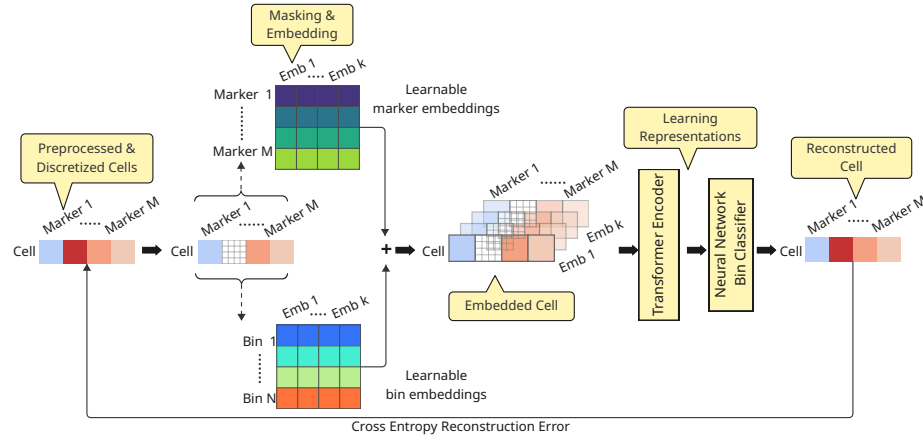

(b) Self-supervised pretraining of CytoBERT for a single cell

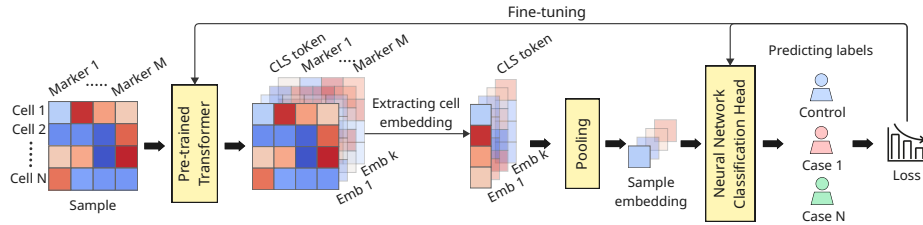

(c) Fine-tuning the pretrained encoder for downstream sample-level classification.

Fig. 4: Overview of the CytoBERT pipeline, consisting of dataset curation and preprocessing, self-supervised masked expression-bin pretraining, and supervised fine-tuning for sample-level classification.



Fig. 5: Shared marker vocabulary across all CyTOF datasets used in the project, consisting of 220 unique biomarker in total. Black = marker measured/available