

MORE CORRECT MASS, WORSE ANSWERS: WHY POWER SAMPLING CAN FAIL AND HOW TO FIX IT

Haohui Yang* & Jiaxing Sun* & Xiujun Ma†

State Key Laboratory of General Artificial Intelligence, Peking University, Beijing, China
 {yanghaohui, sunjiaxing}@stu.pku.edu.cn
 maxiujun@pku.edu.cn

ABSTRACT

Power Sampling sharpens a language model’s distribution over complete generation trajectories, offering a verifier-free way to improve reasoning at inference time. It also has the potential to serve as a general-purpose front end for a broad range of downstream sampling methods. However, we uncover a striking paradox: Power Sampling can drive more probability mass toward correct trajectories while degrading the downstream inference it is intended to enhance. Using self-consistency as a representative case, we observe accuracy drops of up to 18.5 percentage points across models and reasoning benchmarks. We trace this paradox to two mismatches. Dose mismatch arises because a fixed exponent induces drastically different amounts of distributional change across problems. Coverage mismatch arises because global sharpening concentrates mass on a narrow set of dominant paths: high pass@k, often interpreted as evidence of preserved diversity, can therefore coexist with the loss of broad reasoning-path support required for downstream aggregation, search, and selection. Guided by this diagnosis, we replace uniform trajectory exponentiation with a deformation-controlled, support-preserving Power target that calibrates sharpening across problems while limiting the suppression of moderate-probability paths. In a same-budget instantiation with weighted self-consistency, the repaired sampler reverses the losses caused by global Power and outperforms standard multi-sample inference across reasoning benchmarks.

1 INTRODUCTION

Large language models have made substantial progress on complex tasks in mathematics, code generation, and scientific question answering (Lewkowycz et al., 2022; Chen et al., 2021). For much of this progress, the dominant recipe has been to scale the resources invested during training: model capacity, training data, and training compute (Kaplan et al., 2020). More recently, test-time scaling has emerged as a complementary axis for improving capability after training. Rather than modifying model parameters, it allocates additional inference compute to longer reasoning, search over possible solutions, or the generation of multiple candidate trajectories (Snell et al., 2025; Wu et al., 2025). In doing so, it broadens the central scaling question from how to train a stronger model to how a trained model should spend computation when solving each problem.

Within this broader paradigm, repeated sampling offers a simple and broadly applicable strategy: it generates multiple reasoning trajectories and combines them through verification, selection, or aggregation (Chen et al., 2026; Khanh et al., 2026). Self-Consistency (SC), for example, selects the answer receiving the most support across independently sampled trajectories (Wang et al., 2023; Oh and Lee, 2026). Crucially, such methods rely on more than the presence of one strong trajectory. Their success also depends on whether the upstream distribution preserves the collective support on which the downstream decision is based (Tan et al., 2025; Khanh et al., 2026).

*Equal contribution.

†Corresponding author.

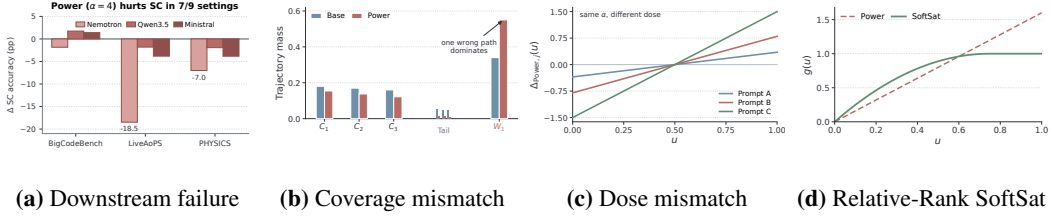


Figure 1: Power sharpening can conflict with multi-trajectory aggregation, motivating a calibrated and support-preserving alternative. Here g denotes the additive log-weight gain in $q \propto p \exp(g)$. **(a)** Change in SC accuracy when Base SC8 is replaced by Power ($\alpha = 4$) across three models and three benchmarks; seven of nine settings degrade. **(b)** Blue and red bars show Base and illustratively sharpened trajectory masses. C_1 – C_3 support the same correct answer, W_1 supports a competing wrong answer, and Tail groups other low-mass paths; sharpening makes W_1 dominant. **(c)** Curves plot each prompt’s centered Power gain $\Delta_{\text{Power},j}(u)$ against the common within-prompt rank coordinate u under a shared α . **(d)** Repair schematic. On the same u , dashed red and solid green curves show a linearly increasing Power reference $g(u)$ and the saturating Relative-Rank SoftSat gain, respectively.

This dependence makes the upstream trajectory distribution a central design choice. Power Sampling offers a verifier-free way to reshape that distribution: given a language model distribution p over complete trajectories, it targets a sharpened distribution proportional to p^α , favoring trajectories that the model already considers likely without additional training or a correctness verifier (Huang et al., 2025; Karan and Du, 2026). Recent advances, including Scalable Power Sampling and Power-SMC, substantially reduce the cost of approximating this sequence-level target, making Power Sampling practical for large-scale inference (Ji et al., 2026; Azizi et al., 2026). Because the target is independent of any particular downstream rule, it appears to be a natural front end for multi-trajectory reasoning.

However, this seemingly natural composition exposes a fundamental tension: assigning more probability to individually correct trajectories does not guarantee a better aggregated answer. Indeed, Power Sampling can move *more* probability mass onto correct trajectories while weakening the answer-level support on which aggregation relies, producing *worse* final answers. The downstream consequences are substantial. Across nine model–benchmark settings, fixed-exponent Power reduces downstream scores in seven, with a largest drop of 18.5 percentage points; notably, the degradation appears in all six LiveAoPSBench and PHYSICS settings shown in Figure 1(a). Thus, trajectory-level sharpening is not reliably aligned with the multi-trajectory decision it is intended to support.

Why does this misalignment arise? We identify two mismatches between global sharpening and downstream aggregation. First, *coverage mismatch* occurs because Power rewards trajectories individually, whereas aggregation depends on their collective answer-level support. Figure 1(b) gives a minimal example: C_1 – C_3 are distinct moderate-probability trajectories that map to the same correct answer, while W_1 is the individually strongest trajectory and maps to a competing wrong answer. Under Base, the correct answer wins through the combined support of C_1 – C_3 . Because Power exponentiates each trajectory before answer-level aggregation, it magnifies W_1 ’s individual advantage and suppresses the moderate correct paths; after renormalization, W_1 becomes dominant and the aggregated decision can flip. The low-mass Tail emphasizes that this failure is a loss of broadly distributed support, rather than the disappearance of every alternative path. Consequently, high pass@ k certifies that a correct trajectory remains reachable, but not that the distribution preserves the effective support required by aggregation, search, or selection (Karan and Du, 2026; Yue et al., 2025; Tan et al., 2025; Khanh et al., 2026). Second, *dose mismatch* occurs because a fixed exponent applies the same algebraic transformation, not the same amount of distributional change. Since likelihood geometry varies across prompts, the same α can produce a mild adjustment on one problem but near-collapse on another. Figure 1(c) places prompts on the common rank coordinate u : prompt-specific likelihood spreads turn the same α into different centered gain slopes $\Delta_{\text{Power},j}(u)$. Together, coverage mismatch explains why sharpening can damage aggregation, while dose mismatch explains why that damage is uneven and difficult to control.

This diagnosis suggests that a successful repair must control both the shape and strength of sharpening. We therefore introduce *Relative-Rank SoftSat*. To address coverage mismatch, SoftSat promotes moderately ranked trajectories while saturating gains at the top, preventing a few dominant paths from absorbing disproportionate mass. To address dose mismatch, relative rank replaces raw likelihood with a common within-prompt coordinate in $[0, 1]$, making the strength of reweighting more comparable across problems. Together, the two components favor strong trajectories without discarding the broader support required by downstream aggregation. Figure 1(d) makes this design response explicit through $g(u)$: on the same relative-rank coordinate, the dashed linear Power reference keeps growing, whereas SoftSat raises moderate ranks and saturates toward the top.

Finally, we exploit the candidate-level parallelism enabled by modern Power samplers (Ji et al., 2026; Azizi et al., 2026). Rather than invoking Power-SMC independently N times for SC_N , we recast target sampling as importance-weighted aggregation over a shared Base candidate pool. The resulting estimator reuses the same N trajectories as Base+ SC_N , while our analysis shows that it asymptotically preserves the decision of direct target sampling under a standard positive-margin condition. This same-budget realization therefore retains the computational appeal of parallel sampling while allowing the repaired target to guide downstream aggregation.

Our contributions are threefold:

1. We show that Power Sampling can increase correct-trajectory mass yet degrade multi-trajectory decisions, and identify coverage mismatch and dose mismatch as the causes.
2. We introduce Relative-Rank SoftSat, which replaces absolute likelihood with within-prompt rank to control dose and saturates gains on dominant trajectories to preserve coverage.
3. We connect ideal target sampling to importance-weighted aggregation over a shared Base pool, enabling a low-cost realization that asymptotically preserves the target decision.

2 RELATED WORK

2.1 SEQUENCE-LEVEL DISTRIBUTION SHARPENING

Distribution sharpening reallocates probability toward outputs already favored by a model and has been studied as a mechanism underlying language-model self-improvement (Huang et al., 2025). Within this view, Power Sampling operates at inference time by exponentiating complete-trajectory probabilities and approximating the resulting target with autoregressive Markov chain Monte Carlo (Karan and Du, 2026). Because iterative MCMC introduces substantial sequential latency, subsequent work has focused on making this target practical at inference time. Specifically, Scalable Power Sampling replaces iterative MCMC with an autoregressive approximation based on sampled continuations (Ji et al., 2026), whereas Power-SMC uses sequential importance weighting and re-sampling to advance a particle population in a GPU-friendly batched decode (Azizi et al., 2026). By reducing the sequential bottleneck, these methods make fixed-exponent Power distributions substantially easier to sample from. Their primary focus, however, remains how to obtain Power samples efficiently; our work instead asks how the resulting target and parallel candidate computation should interact with a downstream multi-sample decision rule.

Despite this progress, existing evaluations largely characterize the resulting sampler through single-output accuracy and $\text{pass}@k$ (Karan and Du, 2026; Ji et al., 2026). Yet $\text{pass}@k$ establishes only whether a correct trajectory remains reachable; it does not describe how probability mass is distributed across reasoning paths or answer modes. This distinction matters for multi-sample inference, where limited output diversity can constrain Best-of- N reasoning (Khanh et al., 2026) and repeated generations may form a stable but incorrect consensus (Tan et al., 2025). Accordingly, our work studies the downstream compatibility of sharpening and modifies the target deformation to preserve the support required by aggregation.

2.2 MULTI-SAMPLE CONSISTENCY AND AGGREGATION

Multi-sample aggregation methods can be organized around two choices: how they define agreement and how much support each candidate contributes. The first choice determines which trajectories are

treated as evidence for the same outcome. Self-Consistency groups reasoning trajectories by their normalized final answer and selects the largest group (Wang et al., 2023), whereas CodeT extends consistency to programs by jointly evaluating generated code and tests through execution (Chen et al., 2023a). For outputs without a canonical short answer, Universal Self-Consistency asks an LLM to identify the most consistent response (Chen et al., 2023b); Latent Self-Consistency learns representations for majority-set selection across short- and long-form answers (Oh and Lee, 2026); and ModeX identifies a dominant response through a similarity graph over complete generations (Choi and Li, 2026). Although these methods use different equivalence relations, all of their readouts depend on collective support across sampled candidates.

The second choice determines how much support each candidate contributes. Whereas standard SC assigns one vote per trajectory, CISC weights answers using model-reported confidence (Taubenfeld et al., 2025), RASC evaluates both rationale quality and answer consistency (Wan et al., 2025), and RPC combines answer frequency with internal sequence probability (Zhou et al., 2025). Dynamic distributional alignment instead adjusts token-level sampling temperature in response to the evolving answer distribution (Li et al., 2025). Other approaches improve sampling efficiency by adapting the sample count or switching among complementary models (Wang et al., 2026; Chen et al., 2026). In contrast to confidence or correctness scores, our weights represent the probability mass assigned by an explicit target trajectory distribution. Consequently, that mass can be accumulated under answer equality, execution-based relations, or semantic similarity without changing the task-specific definition of consistency.

3 PRELIMINARIES

3.1 TRAJECTORY DISTRIBUTIONS AND POWER SAMPLING

Given a prompt, let $\tau = (\tau_1, \dots, \tau_T)$ denote a complete generation trajectory; we omit prompt conditioning for clarity. The Base model assigns trajectory probability and log-likelihood

$$\begin{aligned} p(\tau) &= \prod_{t=1}^T p(\tau_t \mid \tau_{<t}), \\ \ell(\tau) &= \log p(\tau) = \sum_{t=1}^T \log p(\tau_t \mid \tau_{<t}). \end{aligned} \quad (1)$$

Token-level temperature sampling modifies each next-token distribution separately. At temperature $\gamma > 0$, it induces

$$p_\gamma(\tau) = \prod_{t=1}^T \frac{p(\tau_t \mid \tau_{<t})^{1/\gamma}}{\sum_v p(v \mid \tau_{<t})^{1/\gamma}}. \quad (2)$$

Lowering γ sharpens every prefix-conditioned decision. Power Sampling instead sharpens the distribution over complete trajectories. For $\alpha > 1$, its ideal target is

$$q_\alpha(\tau) = \frac{p(\tau)^\alpha}{Z_\alpha}, \quad Z_\alpha = \sum_{\tau'} p(\tau')^\alpha. \quad (3)$$

The token-temperature distribution in equation 2 and the Power target in equation 3 are generally different because token-level normalization depends on the generated prefix. Power-SMC approximates the sequence-level target with M particles and returns one approximate Power trajectory per run (Azizi et al., 2026). Our analysis uses the ideal q_α as its reference and separates this target from finite- M approximation error. The number of trajectories used by a downstream aggregation rule is denoted by N ; it is distinct from the internal particle count M .

3.2 FROM TRAJECTORIES TO CONSENSUS

Let $A(\tau)$ be the normalized answer extracted from τ , and let $R(\tau) \in \{0, 1\}$ indicate whether the trajectory is correct. Any trajectory distribution μ induces answer mass and total correct-trajectory mass

$$Q_\mu(a) = \Pr_{\tau \sim \mu}[A(\tau) = a], \quad C_\mu = \mathbb{E}_{\tau \sim \mu}[R(\tau)]. \quad (4)$$

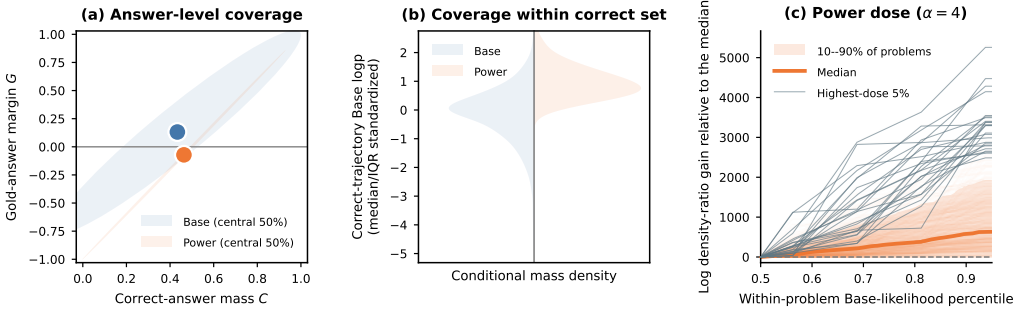


Figure 2: Three views of why Power sharpening need not improve downstream aggregation in a representative setting. (a) Power increases correct-answer mass C while reducing the gold-answer margin G ; filled markers denote across-problem centers and translucent ellipses summarize the central 50% of problems. (b) Conditional on correctness, Power concentrates mass in a narrower, high-Base-likelihood region; the two densities are mirrored only for visual comparison. (c) A fixed α produces widely different within-problem log-weight gains; the shaded region spans the 10th–90th percentiles across problems, and blue-gray curves mark the 5% of problems with the largest gain at the 90th likelihood percentile.

When correctness is determined by a unique gold answer a^* , $C_\mu = Q_\mu(a^*)$; for code, correctness may instead be determined by execution. Given N independently sampled trajectories, Self-Consistency selects

$$\hat{a}_{SC} = \arg \max_a \sum_{i=1}^N \mathbf{1}\{A(\tau_i) = a\}. \quad (5)$$

For executable or open-ended outputs without a canonical answer string, ModeX instead derives consensus from a similarity graph over complete responses (Choi and Li, 2026). These readouts use different notions of agreement, but both convert support across multiple trajectories into a final decision.

4 MISMATCH ANALYSIS

A higher chance of sampling a correct trajectory need not lead to a better decision from multiple samples. To understand this gap, we ask two questions that $\text{pass}@k$ leaves unanswered: where does Power move probability mass within a problem, and does the same exponent move different problems by comparable amounts? These questions expose two complementary failure modes, which we call *coverage mismatch* and *dose mismatch*, as summarized in Figure 2. The figure uses one representative setting; the appendix reports the same diagnostics across all three evaluated models.

4.1 COVERAGE MISMATCH

$\text{Pass}@k$ captures whether at least one correct trajectory appears among k samples. For independent draws from a trajectory distribution μ ,

$$\text{pass}@k(\mu) = 1 - (1 - C_\mu)^k. \quad (6)$$

Because this quantity depends only on C_μ , it says nothing about how correct mass is divided among trajectories or how incorrect mass is organized across competing answers. A high $\text{pass}@k$ can therefore coexist with a smaller answer margin G_μ .

Figure 2(a) contrasts total correct mass with the correct answer’s margin over its strongest competitor. Under Power, the problem distribution shifts toward larger correct mass but a smaller margin: the strongest incorrect answer gains still more mass. The answer-level view nevertheless leaves open where the additional correct mass goes. Figure 2(b) resolves this mass along within-problem standardized Base log-likelihood, with problems weighted equally. Power concentrates it in a narrower, higher-likelihood region of the correct set.

The two panels expose different aspects of coverage: panel (a) concerns competition between answers, whereas panel (b) concerns concentration within the correct set. The latter motivates examining response-level readouts such as ModeX, but does not by itself establish a change in response modes or in the winner of answer-based SC. Together, the two views show why total correct mass alone is insufficient to characterize the support available to aggregation.

4.2 DOSE MISMATCH

Coverage mismatch concerns where mass moves. A separate failure arises because a fixed α does not impose a comparable deformation across problems. Power acts on raw sequence-level likelihood rather than a problem-relative scale. Its relative reweighting of two trajectories satisfies

$$\log \frac{p_j(\tau_i)^{\alpha-1}}{p_j(\tau_k)^{\alpha-1}} = (\alpha - 1)[\ell_j(\tau_i) - \ell_j(\tau_k)]. \quad (7)$$

Although α is shared across problems, the likelihood gap is not. Narrow gaps yield mild reweighting, whereas wide gaps can make the same exponent sharply concentrate the distribution.

To place these deformations on a common trajectory coordinate, let $L_j(u)$ be the u -quantile of Base log-likelihood for problem j . The Power log-weight gain at that position relative to the within-problem median is

$$\Delta_{\text{Power},j}(u) = (\alpha - 1)[L_j(u) - L_j(1/2)]. \quad (8)$$

This aligns trajectories by their within-problem position while retaining the actual log-weight gain applied by Power.

This heterogeneity is not confined to selected trajectory pairs. If $\mathbb{E}_{\tau \sim p_j}[|\ell_j(\tau)|^3] < \infty$, then as $\alpha \downarrow 1$, the full target obeys

$$D_{\text{KL}}(q_{\alpha,j} \parallel p_j) = \frac{(\alpha - 1)^2}{2} \text{Var}_{\tau \sim p_j}[\ell_j(\tau)] + O((\alpha - 1)^3). \quad (9)$$

Thus, problem-specific likelihood dispersion controls the leading-order movement of the entire Power target. We defer the exact identity and derivation to the supplementary material. Figure 2(c) makes the consequence visible: the curves fan outward under a fixed α , with a small set of problems receiving markedly larger gains.

Coverage mismatch concerns where mass moves; dose mismatch concerns how far the distribution moves. Power couples both effects through a single global exponent, motivating a repair that controls them separately.

5 METHOD

The preceding analysis points to two changes: likelihood must first be placed on a comparable within-problem scale, and the gain assigned on that scale must preserve useful coverage. Before defining these changes, we establish how a sequence-level target can be combined with a multi-sample readout without repeatedly running its sampler.

5.1 FROM POWER SAMPLING TO WEIGHTED CONSENSUS

A single Power-SMC run uses M particles to return one approximate Power trajectory. A literal Power-SMC+SC_N composition therefore requires N independent runs. We instead estimate the answer mass of the ideal Power target from one pool of N Base trajectories. By equation 3, its unnormalized importance ratio is

$$r_\alpha(\tau) = p(\tau)^{\alpha-1} = \exp((\alpha - 1)\ell(\tau)). \quad (10)$$

For independent $X_{1:N} \sim p$ and $Y_{1:N} \sim q_\alpha$, consider

$$\begin{aligned} \hat{Q}_N^{\text{weight}}(a) &= \frac{\sum_{i=1}^N r_\alpha(X_i) \mathbf{1}\{A(X_i) = a\}}{\sum_{i=1}^N r_\alpha(X_i)}, \\ \hat{Q}_N^{\text{sample}}(a) &= \frac{1}{N} \sum_{i=1}^N \mathbf{1}\{A(Y_i) = a\}. \end{aligned} \quad (11)$$

Lemma 1 (Asymptotic expectation equivalence). *For every fixed answer a ,*

$$\begin{aligned} \lim_{N \rightarrow \infty} \mathbb{E}[\hat{Q}_N^{\text{weight}}(a)] &= \lim_{N \rightarrow \infty} \mathbb{E}[\hat{Q}_N^{\text{sample}}(a)] \\ &= Q_{q_\alpha}(a). \end{aligned} \quad (12)$$

Lemma 2 (Approximation rate). *If $0 < q_\alpha(\tau)/p(\tau) \leq C$ almost surely for some finite C , then*

$$\begin{aligned} \mathbb{E}\left[\left(\hat{Q}_N^{\text{weight}}(a) - \hat{Q}_N^{\text{sample}}(a)\right)^2\right] &= O(N^{-1}), \\ \hat{Q}_N^{\text{weight}}(a) - \hat{Q}_N^{\text{sample}}(a) &= O_p(N^{-1/2}). \end{aligned} \quad (13)$$

The proofs, including a finite-sample bound, are given in the appendix. If the answer space is finite and Q_{q_α} has a unique mode separated by a positive margin, both estimators consequently select the same mode with probability tending to one. This connection is deliberately made at the ideal-target level: it does not couple the result to the finite- M approximation error of Power-SMC, nor does it turn a deterministically weighted Base pool into fresh target samples.

5.2 RELATIVE-RANK SOFTSAT

Power reads the absolute gap in trajectory log-likelihood. To control dose across problems, we replace it with the within-problem rank

$$u_p(\tau) = \Pr_{X \sim p}[\ell(X) \leq \ell(\tau)] \in [0, 1]. \quad (14)$$

This coordinate depends only on a trajectory’s likelihood ordering within the same problem. We then shape its gain with

$$\text{SoftSat}_m(u) = 1 - \left(1 - \min\left\{\frac{u}{m}, 1\right\}\right)^2, \quad 0 < m \leq 1, \quad (15)$$

and define the corresponding reweighting multiplier

$$r_{\beta,m}(\tau) = \exp[\beta \text{SoftSat}_m(u_p(\tau))]. \quad (16)$$

The resulting target is $q_{\beta,m}(\tau) \propto p(\tau)r_{\beta,m}(\tau)$. The importance ratios in equation 10 and equation 16 expose the repair directly in the weighting view. Power reads the raw coordinate $\ell(\tau)$, so the same coefficient $\alpha - 1$ inherits problem-specific likelihood gaps; replacing it with $u_p(\tau)$ addresses dose mismatch. Power also applies a linear log-weight gain across that coordinate, whereas SoftSat raises the gain for moderate ranks and saturates it for $u \geq m$; this change of shape addresses coverage mismatch. Because the SoftSat potential lies in $[0, 1]$, the target-to-Base density ratio is bounded, so the preceding approximation applies to this target as well.

5.3 FINITE-POOL WEIGHTS AND CONSENSUS READOUT

Given a Base pool $\tau_{1:N}$, we estimate the relative rank in equation 14 by its empirical counterpart,

$$\hat{u}_i = \frac{1}{N} \sum_{k=1}^N \mathbf{1}\{\ell(\tau_k) \leq \ell(\tau_i)\}. \quad (17)$$

We obtain the finite-pool multiplier by clipping the shaped gain,

$$\tilde{r}_i = \text{clip}_{[1-\eta, 1+\kappa\eta]}(\exp[\beta \text{SoftSat}_m(\hat{u}_i) + c]). \quad (18)$$

The offset c makes these multipliers mean one; their normalized values are used as candidate weights $W_{1:N}$.

The weighted candidates are passed to a task-appropriate consensus readout $\mathcal{D}$. For answer-based tasks, this gives weighted Self-Consistency,

$$\mathcal{D}_{\text{SC}}(\tau_{1:N}, W_{1:N}) = \arg \max_a \sum_{i=1}^N W_i \mathbf{1}\{A(\tau_i) = a\}. \quad (19)$$

For free-form responses, we apply the same candidate weights throughout the ModeX readout. Uniform weights recover the original readout in either case.

Algorithm 1 Relative-Rank SoftSat with a Weighted Consensus Readout

Require: Prompt x , Base model p_θ , budget N , readout $\mathcal{D}$, parameters (m, β, η, κ)

Ensure: Consensus output $\hat{y}$

- 1: Sample $\tau_{1:N} \sim p_\theta(\cdot \mid x)$
 - 2: Rank $\ell(\tau_{1:N})$ within the pool to obtain $\hat{u}_{1:N}$
 - 3: Apply SoftSat and bounded mean-one rescaling to obtain $\tilde{r}_{1:N}$
 - 4: Normalize $W_i \leftarrow \tilde{r}_i / \sum_j \tilde{r}_j$
 - 5: **return** $\hat{y} \leftarrow \mathcal{D}(\tau_{1:N}, W_{1:N})$
-

Our method reuses the same N Base trajectories as uniform consensus, and therefore incurs the same model-generation cost with no additional model calls.

6 EXPERIMENTS

We evaluate whether Power’s failure persists across response spaces and whether SoftSat mitigates it without changing the Base candidate pool or generation budget.

6.1 EXPERIMENTAL SETUP

Benchmarks and models. Our evaluation spans code, mathematical reasoning, and physics. We use the Full-Instruct split of BigCodeBench (1,140 problems) (Zhuo et al., 2025), the April 2024 slice of LiveAoPSBench (498 problems) (Mahdavi et al., 2025), and the text-only Regular subset of the PHYSICS official test split (503 problems) (Feng et al., 2025). We evaluate three models in the 4–9B range: NVIDIA-Nemotron-3-Nano-4B-BF16, Qwen3.5-9B, and Ministral-3-8B-Reasoning-2512.

Generation and readout. For every problem, we draw eight Base trajectories at temperature 1 with top- $k = 50$, using the benchmark prompt, the model’s chat template, and a maximum generation length of 16,384 tokens. All multi-sample methods reuse this pool. *Uniform* assigns equal mass to all trajectories, while *Power* uses $\alpha = 4$. *SoftSat* uses one configuration across all model–benchmark pairs: $m = 0.75$, $\beta = 1$, $\eta = 0.25$, and $\kappa = 64$, giving clip bounds $[0.75, 17]$. Power and SoftSat therefore denote deterministic weighted readouts of the same Base pool, rather than fresh samples from either target distribution.

We use a readout matched to each response space. BigCodeBench uses ModeX (Choi and Li, 2026) followed by the official execution evaluator. LiveAoPSBench and PHYSICS group equivalent extracted answers and select the group with greatest uniform or weighted mass; scoring follows their official equivalence procedures. We report each benchmark’s official score and do not average scores across benchmarks.

6.2 MAIN RESULTS

Table 1 shows that Power is not a reliable alternative to uniform consensus. It underperforms Uniform in all six LiveAoPSBench and PHYSICS settings, by 1.808–18.474 points on LiveAoPSBench and 1.934–6.999 points on PHYSICS. On BigCodeBench, in contrast, Power improves Qwen3.5 and Ministral but degrades Nemotron. Its effect therefore varies substantially across response spaces and models.

SoftSat is substantially more stable. Relative to Uniform, it improves five of the nine settings, ties one, and has a largest regression of 1.004 points. On the two largest Power failures, both with Nemotron, the gaps to Uniform fall from 18.474 to 1.004 points on LiveAoPSBench and from 6.999 to 0.255 points on PHYSICS. SoftSat does not uniformly outperform Uniform; the main observation is instead that it removes Power’s large regressions while retaining gains in five settings.

Table 1: Official benchmark scores (%) with eight Base trajectories per problem. *Single* uses the first sampled trajectory; the remaining columns apply task-specific consensus to the same pool. Δ is SoftSat minus Uniform. Bold marks the best multi-sample result in each row.

Benchmark	Model	Single	Uniform	Power ($\alpha=4$)	SoftSat ($\beta=1$)	Δ
BigCodeBench	Nemotron-4B	17.456	24.386	22.544	24.561	+0.175
	Qwen3.5-9B	34.386	36.579	38.333	37.719	+1.140
	Ministral-8B	29.123	33.421	34.825	34.912	+1.491
LiveAoPSBench	Nemotron-4B	21.486	34.137	15.663	33.133	-1.004
	Qwen3.5-9B	59.237	64.659	62.851	64.659	0.000
	Ministral-8B	44.177	50.201	46.386	51.606	+1.405
PHYSICS	Nemotron-4B	18.869	23.891	16.892	23.636	-0.255
	Qwen3.5-9B	69.422	72.913	70.979	72.822	-0.092
	Ministral-8B	35.957	43.164	39.332	43.686	+0.522

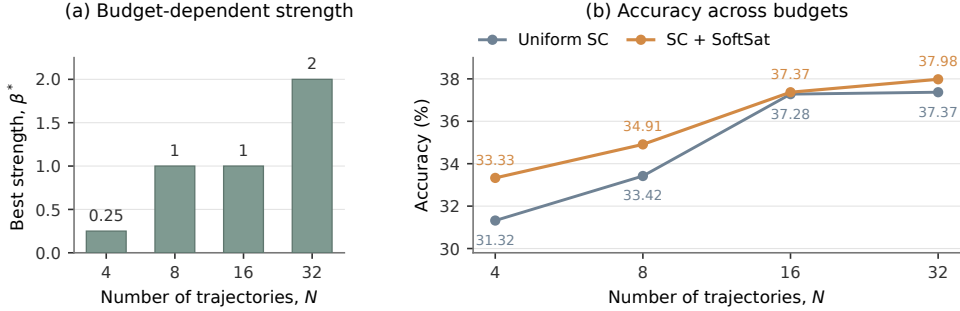


Figure 3: Budget-dependent SoftSat behavior for Ministral on BigCodeBench. (a) The best sharpening strength β^* for each trajectory budget N . (b) Accuracy of uniform SC_N and SoftSat-weighted SC_N at the corresponding β^* . Results for all three benchmarks appear in the appendix.

6.3 BUDGET-DEPENDENT STRENGTH

The appropriate sharpening strength changes with the number of available trajectories. Figure 3 reports a budget sweep for Ministral on BigCodeBench. The best β rises from 0.25 at $N = 4$ to 2 at $N = 32$, while SoftSat improves over uniform SC at each evaluated budget. Thus, a larger candidate pool can support a stronger reweighting rule, but the resulting accuracy must still be read against the corresponding uniform-consensus baseline.

6.4 REPAIRING THE DIAGNOSED MISMATCHES

The accuracy gains in Table 1 do not by themselves show that SoftSat addresses the failure identified in Section 4. Figure 4 therefore returns to the same representative setting as Figure 2 and overlays Base, Power, and SoftSat. At the answer level, Power moves the across-problem center from $(C, G) = (0.433, 0.132)$ to $(0.464, -0.072)$, whereas SoftSat gives $(0.439, 0.133)$ and retains a coverage profile close to Base. Within the correct set, Power shifts conditional mass toward the highest-Base-likelihood trajectories, while SoftSat remains much closer to the Base profile.

We do not repeat a dose panel for SoftSat. Its gain is defined on a bounded relative-rank coordinate, so fixed hyperparameters impose the same gain curve across problems, up to likelihood ties. The empirical question left for Figure 4 is therefore whether this controlled dose preserves useful coverage.

6.5 CHECKING THE WEIGHTED REALIZATION

On all 1,118 human-verified MoreHopQA Case-5 examples (Schnitzler et al., 2024), repeated Power-SMC sampling and its weighted realization select the same normalized answer in 99.55%

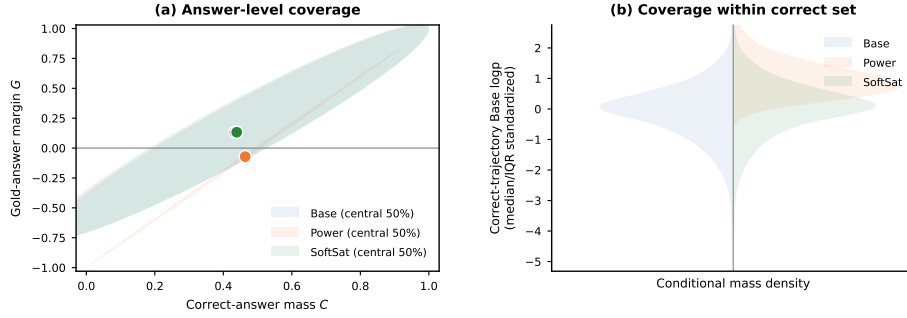


Figure 4: SoftSat repairs the coverage distortions in the representative setting from Figure 2. Each panel overlays Base, Power, and SoftSat on the same candidate pool. (a) SoftSat restores the gold-answer margin without discarding correct-answer mass. (b) SoftSat avoids Power’s concentration on a narrow high-likelihood portion of the correct set. Full three-model diagnostics appear in the appendix.

of cases. Their accuracies differ by 0.089 percentage points, with a paired-bootstrap 95% confidence interval of $[-0.268, 0.447]$, while mean inference time falls by $7.42\times$. Appendix C gives the full protocol and distributional diagnostics. This check supports the weighted realization in this finite setting; it is not a claim of universal equivalence or a test of the asymptotic convergence rate.

7 CONCLUSION

We studied why sequence-level Power Sampling can improve the probability of correct trajectories yet degrade decisions formed from multiple samples. Our analysis identified two sources of this failure: coverage mismatch concentrates probability mass on a narrow set of dominant trajectories and answers, while dose mismatch makes a fixed exponent induce sharply different deformations across problems. This diagnosis led to Relative-Rank SoftSat, which replaces absolute likelihood with a problem-relative coordinate and saturates the gain assigned to high-probability trajectories. We also connected sampling from an ideal Power target to weighted consensus over a Base candidate pool, providing a practical way to combine sequence-level targets with multi-sample inference. Across models and reasoning benchmarks, standard Power produced large and inconsistent regressions, whereas SoftSat removed these failures while retaining gains in several settings; a finite-sample check further showed close agreement between repeated Power-SMC sampling and its weighted realization. More broadly, our results show that a sharpened distribution should be judged not only by the quality of individual trajectories or $\text{pass}@k$, but also by whether it preserves the support structure required by the downstream decision rule.

REFERENCES

- Seyedarmin Azizi, Erfan Baghaei Potraghloo, Minoos Ahmadi, Souvik Kundu, and Massoud Pedram. Power-SMC: Low-latency sequence-level power sampling for training-free LLM reasoning, 2026.
- Bei Chen, Fengji Zhang, Anh Nguyen, Daoguang Zan, Zeqi Lin, Jian-Guang Lou, and Weizhu Chen. CodeT: Code generation with generated tests. In *International Conference on Learning Representations*, 2023a.
- Jianhao Chen, Zishuo Xun, Bocheng Zhou, Han Qi, Hangfan Zhang, Qiaosheng Zhang, Yang Chen, Wei Hu, Yuzhong Qu, and Shuyue Hu. Do we truly need so many samples? multi-LLM repeated sampling efficiently scales test-time compute. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 20083–20091, 2026. doi: 10.1609/aaai.v40i24.39094.
- Mark Chen et al. Evaluating large language models trained on code, 2021.

-
- Xinyun Chen, Renat Aksitov, Uri Alon, Jie Ren, Kefan Xiao, Pengcheng Yin, Sushant Prakash, Charles Sutton, Xuezhi Wang, and Denny Zhou. Universal self-consistency for large language model generation, 2023b.
- Hyeong Kyu Choi and Sharon Li. ModeX: Evaluator-free best-of-n selection for open-ended generation. In *Proceedings of the 64th Annual Meeting of the Association for Computational Linguistics*, 2026.
- Kaiyue Feng, Yilun Zhao, Yixin Liu, Tianyu Yang, Chen Zhao, John Sous, and Arman Cohan. PHYSICS: Benchmarking foundation models on university-level physics problem solving. In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 11717–11743, 2025. doi: 10.18653/v1/2025.findings-acl.610. URL <https://aclanthology.org/2025.findings-acl.610/>.
- Audrey Huang, Adam Block, Dylan Foster, Dhruv Rohatgi, Cyril Zhang, Max Simchowitz, Jordan T. Ash, and Akshay Krishnamurthy. Self-improvement in language models: The sharpening mechanism. In *International Conference on Learning Representations*, 2025.
- Xiaotong Ji, Rasul Tutunov, Matthieu Zimmer, and Haitham Bou Ammar. Scalable power sampling: Unlocking efficient, training-free reasoning for LLMs via distribution sharpening. In *International Conference on Machine Learning*, 2026.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models, 2020.
- Aayush Karan and Yilun Du. Reasoning with sampling: Your base model is smarter than you think. In *International Conference on Learning Representations*, 2026.
- Ly Tran Ho Khanh, Dongxuan Zhu, Man-Chung Yue, and Viet Anh Nguyen. Test-time diverse reasoning by riemannian activation steering. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 31429–31437, 2026. doi: 10.1609/aaai.v40i37.40407.
- Aitor Lewkowycz, Anders Andreassen, David Dohan, Ethan Dyer, Henryk Michalewski, Vinay Ramasesh, Ambrose Slone, Cem Anil, Imanol Schlag, Theo Gutman-Solo, Yuhuai Wu, Behnam Neyshabur, Guy Gur-Ari, and Vedant Misra. Solving quantitative reasoning problems with language models. In *Advances in Neural Information Processing Systems*, volume 35, 2022.
- Yiwei Li, Ji Zhang, Shaoxiong Feng, Peiwen Yuan, Xinglin Wang, Jiayi Shi, Yueqi Zhang, Chuyi Tan, Boyuan Pan, Yao Hu, and Kan Li. Revisiting self-consistency from dynamic distributional alignment perspective on answer aggregation. In *Findings of the Association for Computational Linguistics: ACL 2025*, pages 25208–25223, 2025. doi: 10.18653/v1/2025.findings-acl.1293.
- Sadegh Mahdavi, Muchen Li, Kaiwen Liu, Christos Thrampoulidis, Leonid Sigal, and Renjie Liao. Leveraging online olympiad-level math problems for LLMs training and contamination-resistant evaluation. In *Proceedings of the 42nd International Conference on Machine Learning*, volume 267 of *Proceedings of Machine Learning Research*, 2025. URL <https://proceedings.mlr.press/v267/mahdavi25a.html>.
- Jungsuk Oh and Jay-Yoon Lee. Latent self-consistency for reliable majority-set selection in short- and long-answer reasoning. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 32591–32599, 2026. doi: 10.1609/aaai.v40i38.40536.
- Julian Schnitzler, Xanh Ho, Jiahao Huang, Florian Boudin, Saku Sugawara, and Akiko Aizawa. MoreHopQA: More than multi-hop reasoning. *arXiv preprint arXiv:2406.13397*, 2024. doi: 10.48550/arXiv.2406.13397. URL <https://arxiv.org/abs/2406.13397>.
- Charlie Snell, Jaehoon Lee, Kelvin Xu, and Aviral Kumar. Scaling LLM test-time compute optimally can be more effective than scaling parameters for reasoning. In *International Conference on Learning Representations*, 2025.

-
- Hexiang Tan, Fei Sun, Sha Liu, Du Su, Qi Cao, Xin Chen, Jingang Wang, Xunliang Cai, Yuanzhuo Wang, Huawei Shen, and Xueqi Cheng. Too consistent to detect: A study of self-consistent errors in LLMs. In *Proceedings of the 2025 Conference on Empirical Methods in Natural Language Processing*, pages 4755–4765, 2025. doi: 10.18653/v1/2025.emnlp-main.238.
- Amir Taubenfeld, Tom Sheffer, Eran Ofek, Amir Feder, Ariel Goldstein, Zorik Gekhman, and Gal Yona. Confidence improves self-consistency in LLMs. In *Findings of the Association for Computational Linguistics: ACL 2025*, 2025.
- Guangya Wan, Yuqi Wu, Jie Chen, and Sheng Li. Reasoning aware self-consistency: Leveraging reasoning paths for efficient LLM sampling. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 3613–3635, 2025. doi: 10.18653/v1/2025.naacl-long.184.
- Xuezhi Wang, Jason Wei, Dale Schuurmans, Quoc V. Le, Ed H. Chi, Sharan Narang, Aakanksha Chowdhery, and Denny Zhou. Self-consistency improves chain of thought reasoning in language models. In *International Conference on Learning Representations*, 2023.
- Youkang Wang, Jian Wang, Rubing Chen, and Xiao-Yong Wei. OptScale: Probabilistic optimality for inference-time scaling. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, pages 33710–33718, 2026. doi: 10.1609/aaai.v40i40.40661.
- Yangzhen Wu, Zhiqing Sun, Shanda Li, Sean Welleck, and Yiming Yang. Inference scaling laws: An empirical analysis of compute-optimal inference for LLM problem-solving. In *International Conference on Learning Representations*, 2025.
- Yang Yue, Zhiqi Chen, Rui Lu, Andrew Zhao, Zhaokai Wang, Yang Yue, Shiji Song, and Gao Huang. Does reinforcement learning really incentivize reasoning capacity in LLMs beyond the base model? In *Advances in Neural Information Processing Systems*, 2025.
- Zhi Zhou, Yuhao Tan, Zenan Li, Yuan Yao, Lan-Zhe Guo, Yu-Feng Li, and Xiaoxing Ma. A theoretical study on bridging internal probability and self-consistency for LLM reasoning. In *Advances in Neural Information Processing Systems*, 2025.
- Terry Yue Zhuo, Minh Chien Vu, Jenny Chim, Han Hu, Wenhao Yu, Ratnadira Widyasari, Imam Nur Bani Yusuf, Haolan Zhan, Junda He, Indraneil Paul, Simon Brunner, Chen Gong, James Hoang, Armel Zebaze, Xiaoheng Hong, Wen-Ding Li, Jean Kaddour, Ming Xu, Zhihan Zhang, Prateek Yadav, Naman Jain, Alex Gu, Zhoujun Cheng, Jiawei Liu, Qian Liu, Zijian Wang, Binyuan Hui, Niklas Muennighoff, David Lo, Daniel Fried, Xiaoning Du, Harm de Vries, and Leandro von Werra. BigCodeBench: Benchmarking code generation with diverse function calls and complex instructions. In *International Conference on Learning Representations*, 2025. URL <https://openreview.net/forum?id=YrycTjllL0>.

A FULL MISMATCH DIAGNOSTICS

Figure 5 extends the three diagnostics in Figure 2 to every evaluated model on LiveAoPSBench. Figure 6 similarly extends the coverage comparison in Figure 4.

B BUDGET SWEEP ACROSS BENCHMARKS

Figure 7 extends Figure 3 to the three evaluated benchmarks.

C FINITE-SAMPLE CHECK OF THE WEIGHTED REALIZATION

The preceding lemmas motivate a weighted realization of target answer mass, but they do not imply identical decisions for a finite particle system. We therefore perform a narrow check on all 1,118 human-verified MoreHopQA Case-5 examples (Schnitzler et al., 2024). With Qwen3.5-9B and $\alpha = 4$, the sampling reference runs an $M = 8$ particle Power-SMC system independently $N = 8$

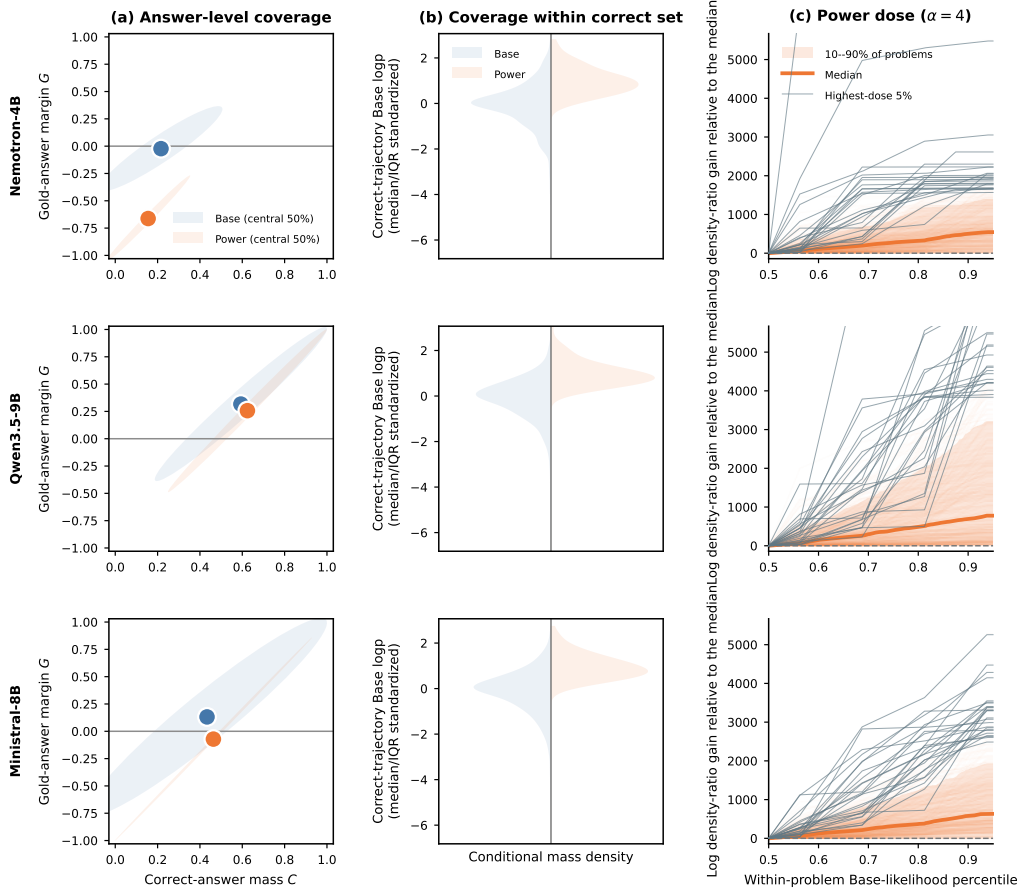


Figure 5: Full Power mismatch diagnostics on LiveAoPSBench. Rows correspond to Nemotron-4B, Qwen3.5-9B, and Ministral-8B; columns follow Figure 2.

times and applies uniform SC to the eight returned answers. The weighted realization instead runs Power-SMC once and aggregates the answer mass of its $M = 8$ terminal particles using their normalized weights.

Figure 8 shows that 1,113 of 1,118 final decisions are unchanged. Weighting corrects three errors and introduces two, yielding 91.14% accuracy versus 91.06% for repeated sampling, a difference of 0.089 percentage points with a paired-bootstrap 95% confidence interval of $[-0.268, 0.447]$. The underlying answer distributions agree nearly as closely: 80.86% have DTV at most 10^{-7} and 94.36% have DTV at most 0.01, while only 0.36% exceed $10^{-0.5}$. Mean inference time falls from 19.50 to 2.63 seconds per question, a $7.42\times$ reduction.

D PROOFS FOR WEIGHTED TARGET APPROXIMATION

Proof of Lemma 1. Fix an answer a and write $f_a(\tau) = \mathbf{1}\{A(\tau) = a\}$. Define

$$\bar{U}_N = \frac{1}{N} \sum_{i=1}^N r_\alpha(X_i) f_a(X_i), \quad \bar{R}_N = \frac{1}{N} \sum_{i=1}^N r_\alpha(X_i). \quad (20)$$

Since $q_\alpha(\tau) = p(\tau)r_\alpha(\tau)/Z_\alpha$,

$$\mathbb{E}_p[r_\alpha(X) f_a(X)] = Z_\alpha Q_{q_\alpha}(a), \quad \mathbb{E}_p[r_\alpha(X)] = Z_\alpha. \quad (21)$$

The strong law of large numbers therefore gives $\bar{U}_N \rightarrow Z_\alpha Q_{q_\alpha}(a)$ and $\bar{R}_N \rightarrow Z_\alpha$ almost surely. Because $Z_\alpha > 0$, their ratio converges almost surely to $Q_{q_\alpha}(a)$. Moreover, $0 \leq \bar{U}_N/\bar{R}_N \leq 1$, so

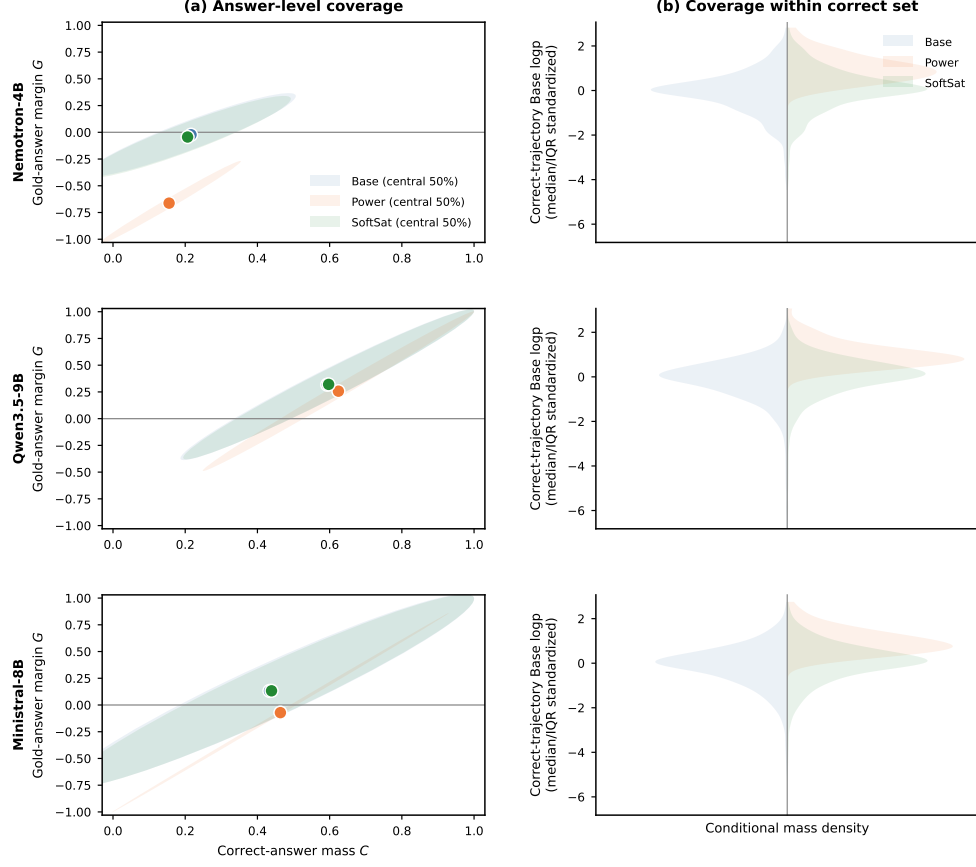


Figure 6: Full coverage comparison among Base, Power, and SoftSat on LiveAoPSBench. Rows correspond to Nemotron-4B, Qwen3.5-9B, and Ministral-8B; columns follow Figure 4.

bounded convergence yields

$$\lim_{N \rightarrow \infty} \mathbb{E} [\hat{Q}_N^{\text{weight}}(a)] = Q_{q_\alpha}(a). \quad (22)$$

For target samples, $f_a(Y_i)$ is Bernoulli with mean $Q_{q_\alpha}(a)$. Hence $\mathbb{E}[\hat{Q}_N^{\text{sample}}(a)] = Q_{q_\alpha}(a)$ for every N , proving the result. $\square$

Proof of Lemma 2. Let $\rho(\tau) = q_\alpha(\tau)/p(\tau)$ and $\theta = Q_{q_\alpha}(a)$. Multiplying all weights by the same positive constant does not change the self-normalized estimator, so

$$\begin{aligned} \hat{Q}_N^{\text{weight}}(a) - \theta &= \frac{\bar{H}_N}{\bar{\rho}_N}, \\ \bar{H}_N &= \frac{1}{N} \sum_{i=1}^N \rho(X_i)(f_a(X_i) - \theta), \\ \bar{\rho}_N &= \frac{1}{N} \sum_{i=1}^N \rho(X_i). \end{aligned} \quad (23)$$

Here $\mathbb{E}_p[\rho(X)] = 1$ and $\mathbb{E}_p[\rho(X)(f_a(X) - \theta)] = 0$. Put $\sigma_a^2 = \text{Var}_p[\rho(X)(f_a(X) - \theta)]$, which is finite because $0 < \rho \leq C$.

Consider the event $E_N = \{\bar{\rho}_N \geq 1/2\}$. On E_N , equation 23 implies

$$\left(\hat{Q}_N^{\text{weight}}(a) - \theta \right)^2 \leq 4\bar{H}_N^2, \quad \mathbb{E}[\bar{H}_N^2] = \frac{\sigma_a^2}{N}. \quad (24)$$

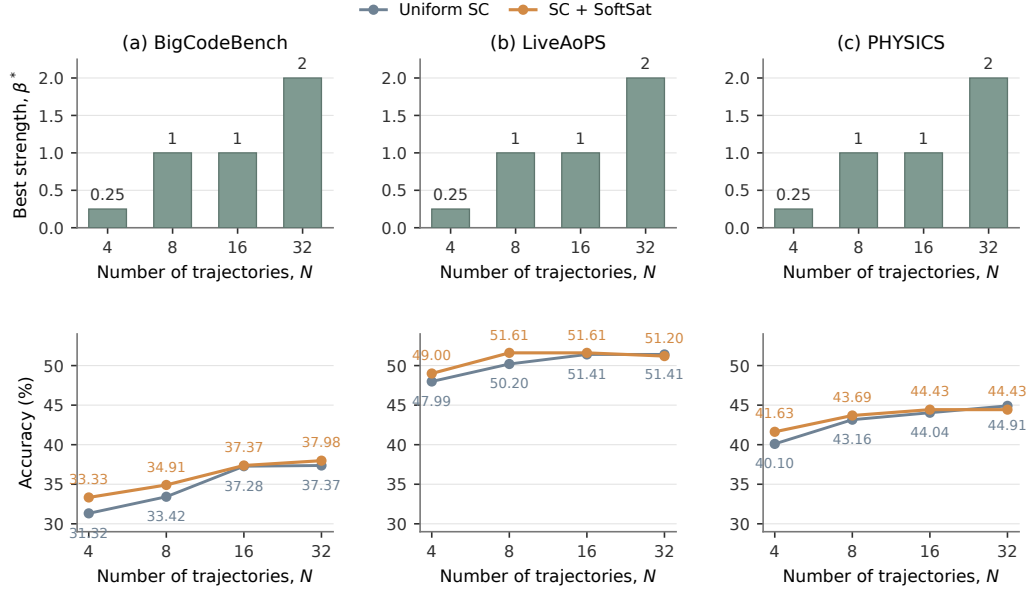


Figure 7: Budget-dependent SoftSat behavior for Ministral across BigCodeBench, LiveAoPSBench, and PHYSICS. Within each benchmark, the upper panel shows the best β at each budget and the lower panel compares uniform SC_N with SoftSat-weighted SC_N .

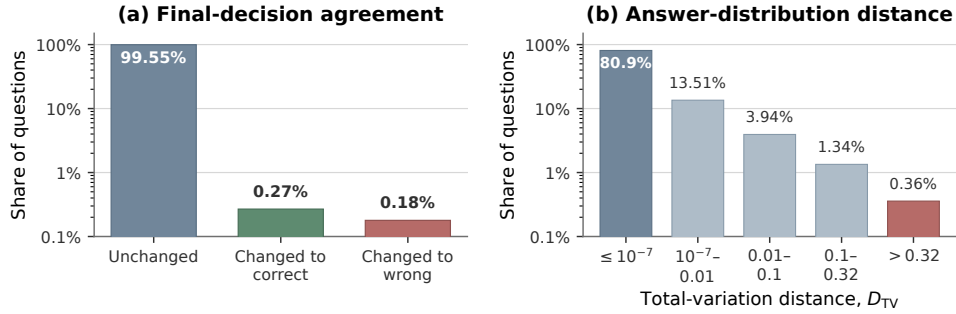


Figure 8: Finite-sample agreement between repeated Power-SMC sampling and its weighted realization on MoreHopQA Case-5. (a) The two procedures return the same normalized answer on 99.55% of questions; the remaining changes are split by whether weighting corrects or introduces an error. (b) Most answer distributions are also close in total variation distance (DTV), although a small tail remains.

On E_N^c , the squared error is at most one. Since $0 \leq \rho(X) \leq C$ and $\mathbb{E}[\rho(X)] = 1$, Hoeffding's inequality gives

$$\Pr(E_N^c) = \Pr(\bar{\rho}_N - 1 < -1/2) \leq \exp\left(-\frac{N}{2C^2}\right). \quad (25)$$

Combining the two events,

$$\mathbb{E}\left[\left(\hat{Q}_N^{\text{weight}}(a) - \theta\right)^2\right] \leq \frac{4\sigma_a^2}{N} + \exp\left(-\frac{N}{2C^2}\right). \quad (26)$$

The target-sampling estimator is unbiased with variance $\theta(1 - \theta)/N$. It is independent of the Base-pool estimator, so the cross term between their centered errors vanishes. Writing $D_N(a) =$

$$\widehat{Q}_N^{\text{weight}}(a) - \widehat{Q}_N^{\text{sample}}(a),$$

$$\begin{aligned} \mathbb{E}[D_N(a)^2] &\leq \frac{4\sigma_a^2 + \theta(1 - \theta)}{N} + \exp\left(-\frac{N}{2C^2}\right) \\ &= O(N^{-1}). \end{aligned} \tag{27}$$

The $O_p(N^{-1/2})$ statement follows immediately from this second-moment bound and Markov's inequality. $\square$

Finally, suppose the answer space is finite and a^* is the unique mode of Q_{q_α} with margin $\delta = Q_{q_\alpha}(a^*) - \max_{a \neq a^*} Q_{q_\alpha}(a) > 0$. Both estimators converge in probability to $Q_{q_\alpha}(a)$ for every answer. A union bound over the finite answer space shows that, with probability tending to one, all estimated masses are within $\delta/3$ of their targets. On this event, both estimators select a^* , establishing the mode-agreement consequence stated in the main text.